

PARTIAL TEST REPORT
No.: 6-0461-14-3-1i

According to:

FCC Part 15.247

for

Robert Bosch Car Multimedia GmbH

LCN2K70C10
Radio Navigation System
(Bluetooth 2.4GHz)

FCC ID: YBN-LCN2K70C10

| Laboratory Accreditation and Listings | | | |
|--|---|---|--|
|  <p>DAkkS Deutsche Akkreditierungsstelle D-PL-12047-01-01</p> |  <p>FEDERAL COMMUNICATIONS COMMISSION FC USA MRA US-EU 0003</p> |  <p>Industry Canada Reg. No.: 3462D-1 Reg. No.: 3462D-2 Reg. No.: 3462D-3</p> |  <p>Voluntary Controls for Electromagnetic Emissions Reg. No.: R-2666 C-2914, T-1967, G-301</p> |
|  <p>WiFi ALLIANCE AUTHORIZED RF LABORATORY</p> |  <p>CTIA Authorized Test Lab LAB CODE 20011130-00</p> | | |
| accredited according to DIN EN ISO/IEC 17025 | | | |
| <p>CETECOM GmbH Laboratory Radio Communications & Electromagnetic Compatibility Im Teelbruch 116 • 45219 Essen • Germany Registered in Essen, Germany, Reg. No.: HRB Essen 8984 Tel.: + 49 (0) 20 54 / 95 19-954 • Fax: + 49 (0) 20 54 / 95 19-964 E-mail: info@cetecom.com • Internet: www.cetecom.com</p> | | | |

Table of contents

| | |
|---|-----------|
| 1. SUMMARY OF TEST RESULTS..... | 3 |
| 1.1. Tests measurement overview according of US FCC CFR47, Part 15C Standards | 3 |
| 2. ADMINISTRATIVE DATA | 5 |
| 2.1. Identification of the testing laboratory..... | 5 |
| 2.2. Test location | 5 |
| 2.3. Organizational items..... | 5 |
| 2.4. Applicant’s details | 5 |
| 2.5. Manufacturer’s details | 5 |
| 3. EQUIPMENT UNDER TEST (EUT)..... | 6 |
| 3.1. Technical data of main EUT declared by applicant..... | 6 |
| 3.2. EUT: Type, S/N etc. and short descriptions used in this test report | 7 |
| 3.3. Auxiliary Equipment (AE): Type, S/N etc. and short descriptions..... | 7 |
| 3.4. EUT set-ups | 7 |
| 3.5. EUT operating modes | 7 |
| 3.6. Configuration of cables used for testing | 8 |
| 3.7. Test system set-up for radiated magnetic field measurements below 30 MHz..... | 9 |
| 3.8. Test system set-up for radiated electric field measurement 30 MHz to 1 GHz | 10 |
| 3.9. Test system set-up for radiated electric field measurement above 1 GHz..... | 11 |
| 4. MEASUREMENTS | 12 |
| 4.1. General Limit - Radiated field strength emissions below 30 MHz..... | 12 |
| 4.2. General Limit - Radiated field strength emissions, 30 MHz - 1 GHz..... | 14 |
| 4.3. General Limit - Radiated emissions, above 1 GHz..... | 16 |
| 4.4. RF-Parameter - Radiated Band Edge compliance measurements..... | 17 |
| 4.5. Measurement uncertainties | 19 |
| 5. ACCREDITATION DETAILS OF CETECOM’S LABORATORIES AND TEST SITES | 19 |
| 6. INSTRUMENTS AND ANCILLARY..... | 20 |
| 6.1. Used equipment “CTC” | 20 |
| 7. VERSIONS OF TEST REPORTS (CHANGE HISTORY) | 23 |

Table of annex

| | Total pages |
|--|--------------------|
| Annex 1: Test set-up photographs - separate document TR6-0461-14-3-1i –A1 | 5 |
| Annex 2: Measurement diagrams - separate document TR6-0461-14-3-1i –A2 | 22 |
| Annex 3: External EUT photographs - separate document TR6-0461-14-3-1i –A3 | 16 |
| Annex 4: Internal EUT photographs - separate document TR6-0461-14-3-1i –A4 | 8 |

The listed attachments are an integral part of this report.

1. Summary of test results

The test results apply exclusively to the test samples as presented in this Report. The CETECOM GmbH does not assume responsibility for any conclusions and generalizations taken in conjunction with other specimens or samples of the type of the item presented to tests.

The presented Equipment Under Test (in this report, hereinafter referred as EUT) is a radio transmitting device on 2.4GHz Bluetooth, which is a variant of the radio navigation system with FCC-ID YBN-LCN2K70B10
Other implemented wireless technologies are not considered within this test report.

Following test cases have been performed to show compliance with applicable FCC Part 2 and Part 15 rules of the FCC CFR Title 47 Rules, Edition 4th November 2014 standards.

1.1. Tests measurement overview according of US FCC CFR47, Part 15C Standards

| Test cases | Port | References and Limits | | EUT set-up | EUT op. mode | Result |
|---|---|----------------------------------|--|------------|--------------|---------------|
| | | FCC Standard | Test limit | | | |
| TX-Mode | | | | | | |
| Radio frequency exposure requirements (MPE) | Enclosure + Interconnecting cables (radiated) | §1.1307(b) §2.1091 §2.1093 | “general population/uncontrolled environment” Table 1 | 2 | 1 | 1.) Passed |
| 20 dB bandwidth | Antenna terminal (conducted) | §15.247 (a)(1) | At least 25 kHz or 2/3 of 20 dB bandwidth | -- | -- | 1) |
| Channel carrier frequency separation | | | | -- | -- | |
| 99% occupied bandwidth | Antenna terminal (conducted) | -- | 99% Power bandwidth | -- | -- | 1) |
| Channel average Occupancy time and number of channels | Antenna terminal (conducted) | §15.247 (a)(1) (iii) | 0.4 seconds | -- | -- | 1) |
| Transmitter Peak output power | Antenna terminal (conducted) | §15.247 (b)(1) | < 125 mW | -- | -- | 1) |

| | | | | | | |
|---|---|-----------------------------------|--|----|----|--------|
| Transmitter Peak output power radiated | Cabinet (radiated) | §15.247 (b)(4) | < 125 mW (EIRP) for antenna with directional gain less 6 dBi | 1 | 1 | passed |
| Out-Of-Band RF- emissions Band-Edge emissions | Antenna terminal (conducted) | §15.247 (d) | 20 dBc and Emissions in restricted bands must meet the general fieldstrength radiated limits | -- | -- | 1) |
| General field strength emissions + restricted bands | Cabinet + Interconnecting cables (radiated) | §15.247 (d) §15.205 §15.209 | Emissions in restricted bands must meet the general field-strength radiated limits | 1 | 1 | passed |
| AC-Power Lines Conducted Emissions | AC-Power lines | §15.207 | FCC §15.107 class B limits §15.207 limits | -- | -- | N/A |

Remark : 1) please refer to test report TR6-0461-14-3-1e-C1 of FCC-ID YBN-LCN2K70B10

N/A: not applicable

NT: not tested



.....
Dipl.-Ing. Ch. Lorenz
 Responsible for test section



GmbH
 Im Teichbühl 115
 45210 Essen
 Tel: + 49 (0) 20 54 795 19 - 0
 Fax: + 49 (0) 20 54 795 10 - 997



.....
Dipl.-Ing N. Perez
 Responsible for test report

2. Administrative Data

2.1. Identification of the testing laboratory

| | |
|-------------------------------------|--|
| Company name: | CETECOM GmbH |
| Address: | Im Teelbruch 116 45219 Essen - Kettwig Germany |
| Responsible for testing laboratory: | Dipl.-Ing. Rachid Acharkaoui |
| Deputy: | Dipl.-Ing. Niels Jeß |

2.2. Test location

2.2.1. Test laboratory “CTC”

| | |
|---------------|---|
| Company name: | see chapter 2.1. Identification of the testing laboratory |
|---------------|---|

2.3. Organizational items

| | |
|---|--------------------------|
| Project leader and responsible for test report: | Dipl.-Ing N. Perez |
| Receipt of EUT: | 2015-04-15 |
| Date(s) of test: | 2015-04-21 to 2015-04-23 |
| Date of report: | 2015-05-26 |
| ----- | |
| Version of template: | 13.02 |

2.4. Applicant’s details

| | |
|-------------------|--|
| Applicant’s name: | Robert Bosch Car Multimedia GmbH |
| Address: | Robert-Bosch-Straße 200 31132 Hildesheim Germany |
| Contact person: | Mr. Dirk Zamow |

2.5. Manufacturer’s details

| | |
|----------------------|--------------------------------|
| Manufacturer’s name: | please see Applicant's details |
| Address: | please see Applicant's details |

3.2. EUT: Type, S/N etc. and short descriptions used in this test report

| Short description*) | EUT | Type | S/N serial number | HW hardware status | SW software status |
|---------------------|-------------------------|------------|-------------------|--------------------|--------------------|
| EUT A | Radio Navigation System | LCN2K70C10 | 3202718 | 051 | F005 |

*) EUT short description is used to simplify the identification of the EUT in this test report.

3.3. Auxiliary Equipment (AE): Type, S/N etc. and short descriptions

| AE short description *) | Auxiliary Equipment | Type | S/N serial number | HW hardware status | SW software status |
|-------------------------|---------------------|-------------|-------------------|--------------------|--------------------|
| AE 1 | Main Wiring long | TH24HW-CS2 | #1 | -- | -- |
| AE 2 | USB Harness | USCAR30 | #11 | -- | -- |
| AE 3 | USB Harness | TCU-USB | #12 | -- | -- |
| AE 4 | Main Wiring short | TH18HW-CS2 | #2 | -- | -- |
| AE 5 | Ignition Unit | Nissan LCN2 | #1 | -- | -- |
| AE 6 | GPS-Antenna | GPS | #1 | -- | -- |

*) AE short description is used to simplify the identification of the auxiliary equipment in this test report.

3.4. EUT set-ups

| EUT set-up no. *) | Combination of EUT and AE | Remarks |
|-------------------|---|-------------------------|
| set. 1 | EUT A + AE 1 + AE 2 + AE 3 + AE 4 + AE 5 + AE 6 | Used for radiated tests |

*) EUT set-up no. is used to simplify the identification of the EUT set-up in this test report.

3.5. EUT operating modes

| EUT operating mode no. *) | Description of operating modes | Additional information |
|---------------------------|--------------------------------|---|
| op. 1 | TX-Mode | With help of special test firmware (special HMI version F016) a Bluetooth signal was transmitted continuously by the EUT. The choice of modulation schemes and channels are possible. See special document from applicant " <i>Short Start-Up instruction..</i> " |

*) EUT operating mode no. is used to simplify the test report.

3.6. Configuration of cables used for testing

| Cable number | Item | Type | S/N serial number | HW hardware status | Cable length |
|--------------|-------------------|----------|-------------------|--------------------|--------------|
| Cable 1 | Main Wiring long | See §3.3 | #1 | -- | 2m |
| Cable 2 | USB Harness | | #11 | -- | 2m |
| Cable 3 | USB Harness | | #12 | -- | 2m |
| Cable 4 | Main Wiring short | | #2 | -- | 1m |
| Cable 5 | GPS Antenna | | #1 | | 0.36m |


3.7. Test system set-up for radiated magnetic field measurements below 30 MHz

Specification: ANSI C63.4-2009 chapter 8.2.1, ANSI C63.10-2009 chapter 6.4

General Description: Evaluating the radiated field emissions are done first by an exploratory emission measurement and a final measurement for most critical frequencies determined.

The loop antenna was placed at 1 m height above ground plane and 3 m measurement distance from set-up for investigations. Because of reduced measurement distance, correction data were applied, as stated in chapter “General Limit - Radiated field strength emissions below 30 MHz“. The tests are performed in the semi anechoic room recognized by the regulatory commission.

Schematic:

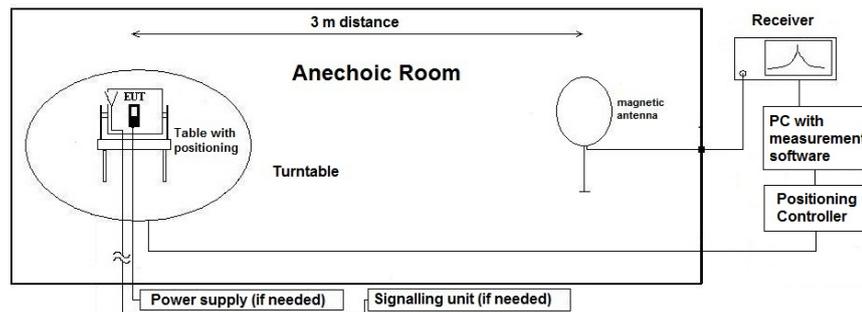

Testing method:

Exploratory, preliminary measurement

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 0.8 m height which is placed on the turntable. By rotating the turntable (step 90°, range 0° to 360°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT), the emission spectrum was recorded. The loop antenna was moved at least to 2-perpendicular axes (antenna vector in direction of EUT and parallel to EUT) in order to maximize the emissions. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a data reduction table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself either over 3-orthogonal axis (not defined usage position) or 2-orthogonal axis (defined usage position).

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

Formula:

$$E_C = E_R + AF + C_L + D_F - G_A$$

$$M = L_T - E_C$$

- AF = Antenna factor
- C_L = Cable loss
- D_F = Distance correction factor
- E_C = Electrical field – corrected value
- E_R = Receiver reading
- G_A = Gain of pre-amplifier (if used)
- L_T = Limit
- M = Margin

All units are dB-units, positive margin means value is below limit.

Distance correction:


Reference for applied correction (extrapolating) factors:
 IEEC Transaction EMC, Vol. 47, No. 3, Aug. 2005, Journal Paper
 “Extrapolating Near-field emissions of low frequency loop transmitters”.

3.8. Test system set-up for radiated electric field measurement 30 MHz to 1 GHz

Specification: ANSI C63.4-2009 chapter 8, ANSI C63.10-2009 chapter 6.5

General Description: Evaluating the field emissions have to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies. The tests are performed in a NSA-compliant semi anechoic room (SAR) recognized by the regulatory commissions.

Schematic:

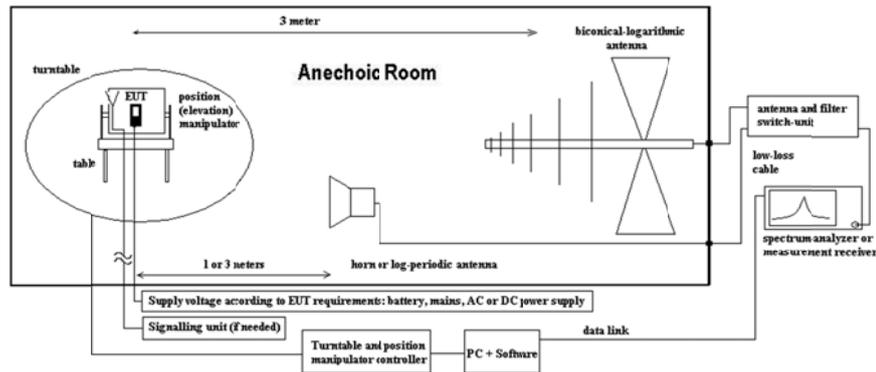

Testing method:

Exploratory, preliminary measurements

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 0.8 m height which is placed on the turntable. By rotating the turntable (range 0° to 360°, step 90°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT) the emission spectrum and its characteristics was recorded with an EMI-receiver, broadband antenna and software.

Measurement antenna: horizontal and vertical, heights: 1,0 m and 1,82 m as worst-case determined by an exploratory emission measurements. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case of them. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself either over 3-orthogonal axis (not defined usage position) or 2-orthogonal axis (defined usage position). The measurement antenna height between 1 m and 4 m.

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

Formula:

$$E_C = E_R + AF + C_L + D_F - G_A \quad (1)$$

$$M = L_T - E_C \quad (2)$$

- AF = Antenna factor
- C_L = Cable loss
- D_F = Distance correction factor (if used)
- E_C = Electrical field – corrected value
- E_R = Receiver reading
- G_A = Gain of pre-amplifier (if used)
- L_T = Limit
- M = Margin


All units are dB-units, positive margin means value is below limit.

3.9. Test system set-up for radiated electric field measurement above 1 GHz

Specification: ANSI C63.4-2009 chapter 8, ANSI C63.10-2009 chapter 6.6

General Description: Evaluating the field emissions have to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies. The tests are performed in a CISPR 16-4 compliant fully anechoic room (FAR) recognized by the regulatory commissions. The measurement distance was set to 3 meter for frequencies up to 18 GHz and 2 meter above 18 GHz. A bicon-log or horn antenna is used for frequency range 1 GHz to 40 GHz. Due to use of a fully anechoic room the measurement antennas are set to fixed antenna height of 1.55 m and the site validation criteria accord. CISPR 16-1-4:2010, Chapter 8.3 is fulfilled. The EUT is aligned within 3 dB beamwidth of the measurement antenna, on big EUTs several surface measurements are performed.

Schematic:

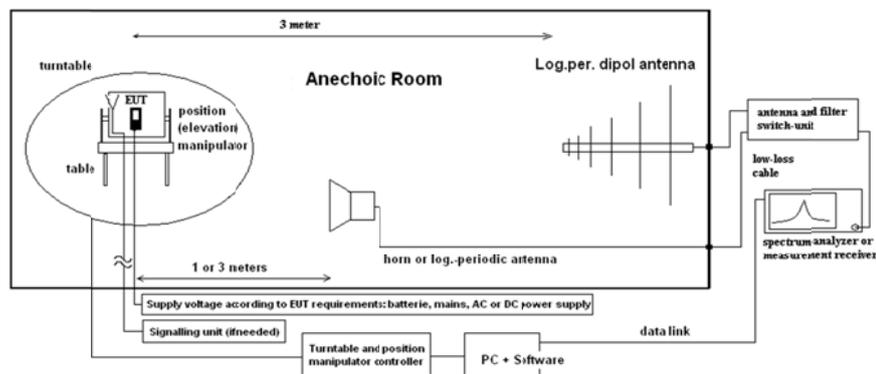

Testing method:

Exploratory, preliminary measurements

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 1.55 m height which is placed on the turntable. By rotating the turntable (range 0° to 360°, step 15°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT) the emission spectrum and its characteristics was recorded with an EMI-receiver, broadband antenna and software.

The measurements are performed in horizontal and vertical polarization of the measurement antennas. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case of them. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself either over 3-orthogonal axis (not defined usage position) or 2-orthogonal axis (defined usage position). The measurement antenna height is fixed to 1.55 m.

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

Formula:

$$E_C = E_R + AF + C_L + D_F - G_A \quad (1)$$

$$M = L_T - E_C \quad (2)$$

E_C = Electrical field – corrected value

E_R = Receiver reading

M = Margin

L_T = Limit

AF = Antenna factor

C_L = Cable loss

D_F = Distance correction factor (if used)

G_A = Gain of pre-amplifier (if used)

All units are dB-units, positive margin means value is below limit.

4. Measurements

4.1. General Limit - Radiated field strength emissions below 30 MHz

4.1.1. Test location and equipment

| | | | |
|-----------------|--|---|--|
| test location | <input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1) | <input type="checkbox"/> Please see Chapter. 2.2.2 | <input type="checkbox"/> Please see Chapter. 2.2.3 |
| test site | <input checked="" type="checkbox"/> 441 EMI SAR | <input type="checkbox"/> 487 SAR NSA | <input type="checkbox"/> 347 Radio.lab. |
| receiver | <input type="checkbox"/> 377 ESCS30 | <input checked="" type="checkbox"/> 001 ESS | <input type="checkbox"/> |
| spectr. analys. | <input type="checkbox"/> 584 FSU | <input type="checkbox"/> 120 FSEM | <input type="checkbox"/> 264 FSEK |
| antenna | <input type="checkbox"/> 574 BTA-L | <input type="checkbox"/> 133 EMCO3115 | <input type="checkbox"/> 302 BBHA9170 |
| signaling | <input type="checkbox"/> 392 MT8820A | <input type="checkbox"/> 371 CBT32 | <input type="checkbox"/> 547 CMU |
| otherwise | <input type="checkbox"/> 357 NRV-Z1 | <input type="checkbox"/> 600 NRVD | <input type="checkbox"/> 110 USB LWL |
| DC power | <input type="checkbox"/> 456 EA 3013A | <input checked="" type="checkbox"/> 457 EA 3013A | <input type="checkbox"/> 459 EA 2032-50 |
| line voltage | <input type="checkbox"/> 230 V 50 Hz via public mains | <input type="checkbox"/> 060 120 V 60 Hz via PAS 5000 | <input type="checkbox"/> 289 CBL 6141 |
| | | | <input checked="" type="checkbox"/> 030 HFH-Z2 |
| | | | <input type="checkbox"/> 477 GPS |
| | | | <input type="checkbox"/> 594 CMW |
| | | | <input type="checkbox"/> 482 Filter Matrix |
| | | | <input type="checkbox"/> 378 RadiSense |
| | | | <input type="checkbox"/> 494 AG6632A |
| | | | <input type="checkbox"/> 498 NGPE 40 |

4.1.2. Requirements

| | | | | |
|-----------------|---------------------------------------|-----------------------|--------------|---|
| FCC | Part 15, Subpart C, §15.205 & §15.209 | | | |
| ANSI | C63.10-2009 | | | |
| Frequency [MHz] | Field strength limit | | Distance [m] | Remarks |
| | [µV/m] | [dBµV/m] | | |
| 0.009 – 0.490 | 2400/f (kHz) | 67.6 – 20Log(f) (kHz) | 300 | Correction factor used due to measurement distance of 3 m |
| 0.490 – 1.705 | 24000/f (kHz) | 87.6 – 20Log(f) (kHz) | 30 | Correction factor used due to measurement distance of 3 m |
| 1.705 – 30 | 30 | 29.5 | 30 | Correction factor used due to measurement distance of 3 m |

4.1.3. Test condition and test set-up

| | | | |
|---------------------------------------|---|---|--|
| Signal link to test system (if used): | <input type="checkbox"/> air link | <input type="checkbox"/> cable connection | <input checked="" type="checkbox"/> none |
| EUT-grounding | <input checked="" type="checkbox"/> none | <input type="checkbox"/> with power supply | <input type="checkbox"/> additional connection |
| Equipment set up | <input checked="" type="checkbox"/> table top | | <input type="checkbox"/> floor standing |
| Climatic conditions | Temperature: (22±3°C) | | Rel. humidity: (40±20)% |
| EMI-Receiver or Analyzer Settings | Scan data | <input checked="" type="checkbox"/> 9 – 150 kHz RBW/VBW = 200 Hz Scan step = 80 Hz <input checked="" type="checkbox"/> 150 kHz – 30 MHz RBW/VBW = 9 kHz Scan step = 4 kHz <input type="checkbox"/> other: | |
| | Scan-Mode Detector Mode: Sweep-Time | <input checked="" type="checkbox"/> 6 dB EMI-Receiver Mode <input type="checkbox"/> 3dB Spectrum analyser Mode Peak (pre-measurement) and Quasi-PK/Average (final if applicable) Repetitive-Scan, max-hold Coupled – calibrated display if continuous signal otherwise adapted to EUT’s individual transmission duty-cycle | |
| General measurement procedures | Please see chapter “Test system set-up radiated magnetic field measurements below 30 MHz” | | |

4.1.4. Measurement Results

Table of measurement results:

| Diagram No. | Carrier Channel | | Frequency range | Set-up no. | OP-mode no. | Remark | Used detector | | | Result |
|-------------|-----------------|-----|-----------------|------------|-------------|-------------------------------|-------------------------------------|--------------------------|--------------------------|--------|
| | Range | No. | | | | | PK | AV | QP | |
| 2.01 | Low | 0 | 9 kHz-30 MHz | 1 | 1 | No critical frequencies found | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | passed |
| 2.02 | Middle | 39 | 9 kHz-30 MHz | 1 | 1 | No critical frequencies found | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | passed |
| 2.03 | High | 78 | 9 kHz-30 MHz | 1 | 1 | No critical frequencies found | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | passed |

4.1.5. Correction factors due to reduced meas. distance (f < 30 MHz)

The used correction factors when the measurement distance is reduced, are taken from IIEC Transaction EMC, Vol 47, No.3, Aug. 2005, Journal Paper “*EXTRAPOLATING NEAR-FIELD EMISSIONS OF LOW-FREQUENCY LOOP TRANSMITTERS*”.

| Used Transducer factors (f < 30 MHz) | | | | | |
|--------------------------------------|----------------|------------------|-----------|------------|-------------------|
| 1 | 2 | 3 | 4 | 5 | 6 |
| Frequency | Antenna factor | Corection factor | | Cable loss | Transducer factor |
| kHz | dB μ V/m | 300m to 3m | 30m to 3m | dB | dB μ V/m |
| 9,0 | 20,0 | -116,7 | | 0,0 | -96,7 |
| 10,6 | 20,0 | -116,7 | | 0,0 | -96,7 |
| 12,6 | 20,0 | -116,7 | | 0,0 | -96,7 |
| 14,8 | 20,0 | -116,7 | | 0,0 | -96,7 |
| 17,5 | 20,0 | -116,6 | | 0,0 | -96,6 |
| 20,7 | 20,0 | -116,6 | | 0,0 | -96,6 |
| 24,4 | 20,0 | -116,6 | | 0,0 | -96,6 |
| 28,9 | 20,0 | -116,6 | | 0,0 | -96,6 |
| 34,1 | 20,0 | -116,5 | | 0,0 | -96,5 |
| 40,3 | 20,0 | -116,4 | | 0,0 | -96,4 |
| 47,6 | 20,0 | -116,3 | | 0,0 | -96,3 |
| 56,2 | 20,0 | -116,2 | | 0,0 | -96,2 |
| 66,4 | 20,0 | -116,0 | | 0,0 | -96,0 |
| 78,4 | 20,0 | -115,8 | | 0,0 | -95,8 |
| 92,7 | 20,0 | -115,4 | | 0,0 | -95,4 |
| 109,4 | 20,0 | -115,0 | | 0,0 | -95,0 |
| 129,3 | 20,0 | -114,5 | | 0,0 | -94,5 |
| 152,7 | 20,0 | -113,9 | | 0,0 | -93,9 |
| 180,4 | 20,0 | -113,1 | | 0,0 | -93,1 |
| 213,1 | 20,0 | -112,2 | | 0,0 | -92,2 |
| 251,7 | 20,0 | -111,3 | | 0,0 | -91,3 |
| 297,3 | 20,0 | -108,3 | | 0,0 | -88,3 |
| 351,2 | 20,0 | -105,2 | | 0,0 | -85,2 |
| 414,8 | 20,0 | -102,1 | | 0,0 | -82,1 |
| 490,0 | 20,0 | -99,1 | | 0,0 | -79,1 |
| 490,0 | 20,0 | | -56,4 | 0,1 | -36,3 |
| 582,0 | 20,0 | | -56,2 | 0,1 | -36,1 |
| 690,0 | 20,0 | | -56,0 | 0,2 | -35,8 |
| 820,0 | 20,0 | | -55,7 | 0,2 | -35,5 |
| 973,0 | 20,0 | | -55,4 | 0,2 | -35,2 |
| 1.155,0 | 20,0 | | -54,9 | 0,3 | -34,6 |
| 1.371,0 | 20,0 | | -54,4 | 0,3 | -34,1 |
| 1.627,0 | 20,0 | | -53,7 | 0,3 | -33,4 |
| 1.931,0 | 20,0 | | -52,9 | 0,4 | -32,5 |
| 2.292,0 | 20,0 | | -52,0 | 0,4 | -31,6 |
| 2.721,0 | 20,0 | | -49,8 | 0,5 | -29,3 |
| 3.230,0 | 20,0 | | -46,6 | 0,5 | -26,1 |
| 3.834,0 | 20,0 | | -43,3 | 0,6 | -22,7 |
| 4.551,0 | 20,0 | | -40,1 | 0,6 | -19,5 |
| 5.402,0 | 20,0 | | -36,8 | 0,7 | -16,1 |
| 6.412,0 | 20,0 | | -33,5 | 0,7 | -12,8 |
| 7.612,0 | 20,0 | | -30,3 | 0,8 | -9,5 |
| 9.035,0 | 20,0 | | -27,0 | 0,8 | -6,2 |
| 10.725,0 | 20,0 | | -23,9 | 0,9 | -3,0 |
| 12.730,0 | 20,0 | | -21,2 | 0,9 | -0,3 |
| 15.111,0 | 20,0 | | -19,3 | 1,0 | 1,7 |
| 17.937,0 | 20,0 | | -18,4 | 1,0 | 2,6 |
| 21.292,0 | 20,0 | | -18,2 | 1,1 | 2,9 |
| 25.274,0 | 20,0 | | -18,3 | 1,1 | 2,8 |
| 30.000,0 | 20,0 | | -18,4 | 1,2 | 2,8 |

4.2. General Limit - Radiated field strength emissions, 30 MHz - 1 GHz

4.2.1. Test location and equipment

| | | | |
|-----------------|--|---|--|
| test location | <input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1) | <input type="checkbox"/> Please see Chapter. 2.2.2 | <input type="checkbox"/> Please see Chapter. 2.2.3 |
| test site | <input checked="" type="checkbox"/> 441 EMI SAR | <input checked="" type="checkbox"/> 487 SAR NSA | |
| receiver | <input type="checkbox"/> 377 ESCS30 | <input checked="" type="checkbox"/> 001 ESS | <input type="checkbox"/> 489 ESU 40 <input type="checkbox"/> 620 ESU 26 |
| spectr. analys. | <input type="checkbox"/> 584 FSU | <input type="checkbox"/> 120 FSEM | <input type="checkbox"/> 264 FSEK |
| antenna | <input checked="" type="checkbox"/> 574 BTA-L | <input type="checkbox"/> 133 EMCO3115 | <input type="checkbox"/> 302 BBHA9170 <input type="checkbox"/> 289 CBL 6141 <input type="checkbox"/> 030 HFH-Z2 <input type="checkbox"/> 477 GPS |
| signaling | <input type="checkbox"/> 392 MT8820A | <input type="checkbox"/> 371 CBT32 | <input type="checkbox"/> 547 CMU <input type="checkbox"/> 594 CMW |
| otherwise | <input type="checkbox"/> 400 FTC40x15E | <input type="checkbox"/> 401 FTC40x15E | <input type="checkbox"/> 110 USB LWL <input checked="" type="checkbox"/> 482 Filter Matrix |
| DC power | <input type="checkbox"/> 456 EA 3013A | <input checked="" type="checkbox"/> 457 EA 3013A | <input type="checkbox"/> 459 EA 2032-50 <input type="checkbox"/> 268 EA- 3050 <input type="checkbox"/> 494 AG6632A <input type="checkbox"/> 498 NGPE |
| line voltage | <input type="checkbox"/> 230 V 50 Hz via public mains | <input type="checkbox"/> 060 120 V 60 Hz via PAS 5000 | |

4.2.2. Requirements/Limits

| | | | |
|--------------|-----------------|---|---------------------------|
| FCC | | <input type="checkbox"/> Part 15 Subpart B, §15.109, class B <input checked="" type="checkbox"/> Part 15 Subpart C, §15.209 @ frequencies defined in §15.205 | |
| ANSI | | <input type="checkbox"/> C63.4-2009 <input checked="" type="checkbox"/> C63.10-2009 | |
| Limit | Frequency [MHz] | Radiated emissions limits, 3 meters | |
| | | QUASI Peak [μ V/m] | QUASI-Peak [dB μ V/m] |
| | 30 - 88 | 100 | 40.0 |
| | 88 - 216 | 150 | 43.5 |
| | 216 - 960 | 200 | 46.0 |
| | above 960 | 500 | 49.0 |

4.2.3. Restricted bands of operation, §15.205

| MHz | MHz | MHz | GHz |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110 | 16.42-16.423 | 399.9-410 | 4.5-5.15 |
| 0.495-0.505 | 16.69475-16.69525 | 608-614 | 5.35-5.46 |
| 2.1735-2.1905 | 16.80425-16.80475 | 960-1240 | 7.25-7.75 |
| 4.125-4.128 | 25.5-25.67 | 1300-1427 | 8.025-8.5 |
| 4.20725-4.20775 | 37.5-38.25 | 1645.5-1646.5 | 9.3-9.5 |
| 6.215-6.218 | 73-74.6 | 1660-1710 | 10.6-12.7 |
| 6.26775-6.26825 | 74.8-75.2 | 1718.8-1722.2 | 13.25-13.4 |
| 6.31175-6.31225 | 108-121.94 | 2200-2300 | 14.47-14.5 |
| 8.291-8.294 | 123-138 | 2310-2390 | 15.35-16.2 |
| 8.362-8.366 | 149.9-150.05 | 2483.5-2500 | 17.7-21.4 |
| 8.37625-8.38675 | 156.52475-156.52525 | 2690-2900 | 22.01-23.12 |
| 8.41425-8.41475 | 156.7-156.9 | 3260-3267 | 23.6-24.0 |
| 12.29-12.293 | 162.0125-167.17 | 3332-3339 | 31.2-31.8 |
| 12.51975-12.52025 | 167.72-173.2 | 3345.8-3358 | 36.43-36.5 |
| 12.57675-12.57725 | 240-285 | 3600-4400 | Above 38.6 |
| 13.36-13.41 | 322-335.4 | -- | -- |

Remark: only spurious emissions are allowed within these frequency bands not exceeding the limits per §15.209

4.2.4. Test condition and measurement test set-up

| | | | | |
|---------------------------------------|---|---|--|--|
| Signal link to test system (if used): | | <input type="checkbox"/> air link | <input type="checkbox"/> cable connection | <input checked="" type="checkbox"/> none |
| EUT-grounding | | <input checked="" type="checkbox"/> none | <input type="checkbox"/> with power supply | <input type="checkbox"/> additional connection |
| Equipment set up | | <input checked="" type="checkbox"/> table top 0.8m height | | <input type="checkbox"/> floor standing |
| Climatic conditions | | Temperature: (22±3°C) | | Rel. humidity: (40±20)% |
| EMI-Receiver (Analyzer) Settings | Scan frequency range: | <input checked="" type="checkbox"/> 30 – 1000 MHz <input type="checkbox"/> other: | | |
| | Scan-Mode | <input checked="" type="checkbox"/> 6 dB EMI-Receiver Mode <input type="checkbox"/> 3 dB spectrum analyser mode | | |
| | Detector | Peak / Quasi-peak | | |
| | RBW/VBW | 100 kHz/300 kHz | | |
| | Mode: | Repetitive-Scan, max-hold | | |
| Scan step | 80 kHz | | | |
| Sweep-Time | Coupled – calibrated display if continuous tx-signal otherwise adapted to EUT’s individual duty-cycle | | | |
| General measurement procedures | | Please see chapter “Test system set-up for electric field measurement in the range 30 MHz to 1 GHz” | | |

4.2.5. MEASUREMENT RESULTS

The results are presented below in summary form only. For more information please see diagrams enclosed in annex2.

Table of measurement results:

| Dia-gram no. | Carrier Channel | | Frequency range | Set-up no. | OP-mode no. | Remark | Used detector | | | Result |
|--------------|-----------------|-----|-----------------|------------|-------------|--------|-------------------------------------|--------------------------|-------------------------------------|--------|
| | Range | No. | | | | | PK | AV | QP | |
| 3.01 | Low | 0 | 30MHz to 1GHz | 1 | 1 | | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | passed |
| 3.02 | Middle | 39 | | 1 | 1 | | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | passed |
| 3.03 | High | 78 | | 1 | 1 | | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | passed |

Remark:

4.3. General Limit - Radiated emissions, above 1 GHz

4.3.1. Test location and equipment FAR

| | | | | | | |
|-----------------|---|--|---|--|--|--|
| test site | <input type="checkbox"/> 441 EMI SAR | <input type="checkbox"/> 348 EMI cond. | <input checked="" type="checkbox"/> 443 EMI FAR | <input type="checkbox"/> 347 Radio.lab. | <input type="checkbox"/> 337 OATS | <input type="checkbox"/> |
| spectr. analys. | <input type="checkbox"/> 584 FSU | <input type="checkbox"/> 120 FSEM | <input type="checkbox"/> 264 FSEK | <input checked="" type="checkbox"/> 489 ESU 40 | <input type="checkbox"/> | <input type="checkbox"/> |
| antenna meas | <input type="checkbox"/> 574 BTA-L | <input type="checkbox"/> 289 CBL 6141 | <input type="checkbox"/> 608 HL 562 | <input checked="" type="checkbox"/> 549 HL025 | <input checked="" type="checkbox"/> 302 BBHA9170 | <input type="checkbox"/> 477 GPS |
| antenna meas | <input type="checkbox"/> 123 HUF-Z2 | <input type="checkbox"/> 132 HUF-Z3 | <input type="checkbox"/> 030 HFH-Z2 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| antenna subst | <input type="checkbox"/> 071 HUF-Z2 | <input type="checkbox"/> 020 EMCO3115 | <input type="checkbox"/> 063 LP 3146 | <input type="checkbox"/> 303 BBHA9170 | <input type="checkbox"/> | <input type="checkbox"/> |
| multimeter | <input type="checkbox"/> 341 Fluke 112 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| signaling | <input type="checkbox"/> 392 MT8820A | <input type="checkbox"/> 371 CBT32 | <input type="checkbox"/> 547 CMU | <input type="checkbox"/> 594 CMW | <input type="checkbox"/> | <input type="checkbox"/> |
| DCpower | <input type="checkbox"/> 086 LNG50-10 | <input type="checkbox"/> 087 EA3013 | <input type="checkbox"/> 354 NGPE 40 | <input type="checkbox"/> 349 car battery | <input type="checkbox"/> 350 Car battery | <input checked="" type="checkbox"/> 611 E3632A |
| line voltage | <input type="checkbox"/> 230 V 50 Hz via public mains | | <input type="checkbox"/> 060 120 V 60 Hz via PAS 5000 | | | |

4.3.2. Requirements/Limits

| | | | | |
|-----------------|--|----------------|----------------|------------------|
| FCC | <input type="checkbox"/> Part 15 Subpart B, §15.109 class B <input checked="" type="checkbox"/> Part 15 subpart C, §15.209 @ frequencies defined in §15.205 | | | |
| ANSI | <input type="checkbox"/> C63.4-2009 <input checked="" type="checkbox"/> C63.10-2009 | | | |
| Frequency [MHz] | Limits, 3 meters | | | |
| | AV [µV/m] | AV [dBµV/m] | Peak [µV/m] | Peak [dBµV/m] |
| above 1 GHz | 500 | 54.0 | 5000 | 74.0 |

4.3.3. Test condition and measurement test set-up

| | | |
|---------------------------------------|---|---|
| Signal link to test system (if used): | <input type="checkbox"/> air link | <input type="checkbox"/> cable connection |
| EUT-grounding | <input checked="" type="checkbox"/> none | <input type="checkbox"/> with power supply <input type="checkbox"/> additional connection |
| Equipment set up | <input checked="" type="checkbox"/> table top 1.5m height | <input type="checkbox"/> floor standing |
| Climatic conditions | Temperature: (22±3°C) | Rel. humidity: (40±20)% |
| Spectrum-Analyzer settings | Scan frequency range: <input checked="" type="checkbox"/> 1 – 18 GHz <input checked="" type="checkbox"/> 18 – 25 GHz <input type="checkbox"/> 18 – 40 GHz <input type="checkbox"/> other: <input checked="" type="checkbox"/> 6 dB EMI-Receiver Mode <input type="checkbox"/> 3 dB Spectrum analyser Mode Peak and Average 1 MHz / 3 MHz Repetitive-Scan, max-hold 400 kHz Coupled – calibrated display if CW signal otherwise adapted to EUT’s individual duty-cycle | |
| General measurement procedures | Please see chapter “Test system set-up for radiated electric field measurements above 1 GHz” | |

4.3.4. Measurement Results

The results are presented below in summary form only. For more information please see diagrams in annex 2.

| Dia-gram no. | Carrier Channel | | Frequency range | Set-up no. | OP-mode no. | Remark | Used detector | | | Result |
|--------------|-----------------|-----|-----------------|------------|-------------|--------|-------------------------------------|-------------------------------------|--------------------------|--------|
| | Range | No. | | | | | PK | AV | QP | |
| 4.01 | Low | 0 | 1 to 18GHz | 1 | 1 | -- | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | passed |
| 4.04 | Low | 0 | 18 to 25 GHz | 1 | 1 | -- | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | passed |
| 4.02 | Middle | 39 | 1 to 18GHz | 1 | 1 | -- | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | passed |
| 4.05 | Middle | 39 | 18 to 25 GHz | 1 | 1 | -- | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | passed |
| 4.03 | High | 78 | 1 to 18GHz | 1 | 1 | -- | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | passed |
| 4.06 | High | 78 | 18 to 25 GHz | 1 | 1 | -- | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | passed |

Remark:

4.4. RF-Parameter - Radiated Band Edge compliance measurements

4.4.1. Test location and equipment FAR

| | | | | | | |
|-----------------|---|--|---|--|--|--|
| test site | <input type="checkbox"/> 441 EMI SAR | <input type="checkbox"/> 348 EMI cond. | <input checked="" type="checkbox"/> 443 EMI FAR | <input type="checkbox"/> 347 Radio.lab. | <input type="checkbox"/> 337 OATS | <input type="checkbox"/> |
| spectr. analys. | <input type="checkbox"/> 584 FSU | <input type="checkbox"/> 120 FSEM | <input type="checkbox"/> 264 FSEK | <input checked="" type="checkbox"/> 489 ESU 40 | <input type="checkbox"/> | <input type="checkbox"/> |
| antenna meas | <input type="checkbox"/> 574 BTA-L | <input type="checkbox"/> 289 CBL 6141 | <input type="checkbox"/> 608 HL 562 | <input checked="" type="checkbox"/> 549 HL025 | <input type="checkbox"/> 302 BBHA9170 | <input type="checkbox"/> 477 GPS |
| antenna meas | <input type="checkbox"/> 123 HUF-Z2 | <input type="checkbox"/> 132 HUF-Z3 | <input type="checkbox"/> 030 HFH-Z2 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| antenna subst | <input type="checkbox"/> 071 HUF-Z2 | <input type="checkbox"/> 020 EMCO3115 | <input type="checkbox"/> 063 LP 3146 | <input type="checkbox"/> 303 BBHA9170 | <input type="checkbox"/> | <input type="checkbox"/> |
| multimeter | <input type="checkbox"/> 341 Fluke 112 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| signaling | <input type="checkbox"/> 392 MT8820A | <input type="checkbox"/> 371 CBT32 | <input type="checkbox"/> 547 CMU | <input type="checkbox"/> 594 CMW | <input type="checkbox"/> | <input type="checkbox"/> |
| DC power | <input type="checkbox"/> 086 LNG50-10 | <input type="checkbox"/> 087 EA3013 | <input type="checkbox"/> 354 NGPE 40 | <input type="checkbox"/> 349 car battery | <input type="checkbox"/> 350 Car battery | <input checked="" type="checkbox"/> 611 E3632A |
| line voltage | <input type="checkbox"/> 230 V 50 Hz via public mains | | <input type="checkbox"/> 060 120 V 60 Hz via PAS 5000 | | | |

4.4.2. Requirements/Limits

| | |
|-------------|--|
| FCC | <input type="checkbox"/> Part 15 Subpart B, §15.109 class B <input checked="" type="checkbox"/> Part 15 subpart C, §15.209 @ frequencies defined in §15.205 |
| ANSI | <input type="checkbox"/> C63.4-2009 <input checked="" type="checkbox"/> C63.10-2009 |

4.4.3. Measurement Method

For uncritical results where a measurement bandwidth of 1MHz can clearly show the compliance without influencing the results, a field strength measurement was performed only to show compliance.

For critical results a Marker-Delta marker method was used for showing compliance to restricted bands according §15.205. The method is according ANSI 63.10:2009 “Marker-Delta method”. The method consists of three independent steps:

- 1. Step:** Prior to the measurement the fundamental radiated In-Band field strength was performed. The determined value is used as reference value.
- 2. Step:** Second step consist of finding the relative attenuation between the fundamental emission and the maximum local out-of-band emission (within 2 MHz range around the band edge either on the band-edge directly or some modulation product if the level is greater than that on the band-edge) when measured with lower resolution bandwidth.
- 3. Step:** The delta value recorded in step 2 will be subtracted from value recorded in step 1, thus giving the required field strength at the band-edge. This value must fulfil the requirements for radiated spurious emissions in restricted bands in §15.205 (RSS-Gen) with the general limits of §15.209 or RSS-Gen..

4.4.4. EUT settings

A fully loaded battery was used and changed if required in order to keep the voltage constant over the test time. The EUT was instructed to send with maximum power (if adjustable) according to applicants instructions.

4.4.5. Measurements results: for non-restricted bands near-by (§15.247)

| Channel no. | Restricted band ? | Fundamental Value [dBuV/m] | | Peak-Value at Band-Edge [dBuV/m] | Difference [dB] | Limit [dBc] | Margin [dB] | Verdict | Remark: |
|-------------|-------------------|----------------------------|---------------|----------------------------------|-----------------|-------------|-------------|---------|---------|
| | | Peak-Value | Average-Value | | | | | | |
| 0 | no | 87,75 | 82,05 | 51,05 | 36,7 | 20 | 16,7 | PASS | DH5 |
| 0 | no | 91,31 | 80,1 | 49,88 | 41,43 | 20 | 21,43 | PASS | 3DH5 |

Remark:

4.4.6. Measurements results: for restricted bands near-by (§15.205)

| Channel no. | Restricted band ? | Fundamental Value [dBuV/m] | | Value at Band-Edge [dBuV/m] | | Limits [dBuV/m] | | Margin [dB] | | Verdict | Remark: |
|-------------|-------------------|----------------------------|---------------|-----------------------------|----------------|-----------------|----------------|-------------|---------|---------|---------|
| | | Peak-Value | Average-Value | Peak -Value | Average -Value | Peak -Value | Average -Value | Peak | Average | | |
| 78 | yes | 88,72 | 88,72 | 57,06 | 45,99 | 74 | 54 | 16,94 | 8,01 | PASS | DH5 |
| 78 | yes | 86,82 | 83,5 | 57,1 | 45,99 | 74 | 54 | 16,9 | 8,01 | PASS | 3DH5 |

Remark:

4.4.7. Verdict: passed

4.5. Measurement uncertainties

The reported uncertainties are calculated based on the standard uncertainty multiplied with the appropriate coverage factor **k**, such that a confidence level of approximately 95% is achieved. For uncertainty determination, each component used in the concrete measurement set-up was taken in account and its contribution to the overall uncertainty according to its statistical distribution calculated.

| RF-Measurement | Reference | Frequency range | Calculated uncertainty based on a confidence level of 95% | Remarks |
|---|--------------|-------------------------------------|---|---|
| Conducted emissions (U _{CISPR}) | CISPR 16-2-1 | 9 kHz - 150 kHz 150 kHz - 30 MHz | 4.0 dB 3.6 dB | - |
| Radiated emissions Enclosure | CISPR 16-2-3 | 30 MHz - 1 GHz 1 GHz - 18 GHz | 4.2 dB 5.1 dB | E-Field |
| Disturbance power | CISPR 16-2-2 | 30 MHz - 300 MHz | - | - |
| Power Output radiated | - | 30 MHz - 4 GHz | 3.17 dB | Substitution |
| Power Output conducted | - | 9 kHz - 20 GHz | 1.0 dB | - |
| Conducted emissions on antenna ports | - | 9 kHz - 20 GHz 20 GHz - 40 GHz | 1.0 dB | - |
| Occupied bandwidth | - | 9 kHz - 4 GHz | 0.1272 ppm (Delta Marker) | Frequency error |
| | | | 1.0 dB | Power |
| Emission bandwidth | - | 9 kHz - 4 GHz | 0.1272 ppm (Delta Marker) | Frequency error |
| | | | 1.0 dB | Power |
| Frequency stability | - | 9 kHz - 20 GHz | 0.0636 ppm | - |
| Radiated emissions Enclosure | - | 150 kHz - 30 MHz | 5.0 dB | Magnetic field E-field Substitution (Power) |
| | | 30 MHz - 1 GHz | 4.2 dB | |
| | | 1 GHz - 20 GHz | 3.17 dB | |

Table: measurement uncertainties, valid for conducted/radiated measurements

5. Accreditation details of CETECOM's laboratories and test sites

| Ref.-No. | Accreditation Certificate | Valid for laboratory area or test site | Accreditation Body |
|---------------------------------|--|---|---|
| - | D-PL-12047-01-01 | All laboratories and test sites of CETECOM GmbH, Essen | DAkkS, Deutsche Akkreditierungsstelle GmbH |
| 337 487 558 348 348 | MRA US-EU 0003 | Radiated Measurements 30 MHz to 1 GHz, 3 m / 10 m (OATS) Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR) Radiated Measurements above 1 GHz, 3 m (FAR) Mains Ports Conducted Interference Measurements Telecommunication Ports Conducted Interference Measur. | FCC, Federal Communications Commission Laboratory Division, USA |
| 337 487 550 558 | 3462D-1 3462D-2 3462D-2 3462D-3 | Radiated Measurements 30 MHz to 1 GHz, 3 m / 10 m (OATS) Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR) Radiated Measurements 1 GHz to 6 GHz, 3 m (SAR) Radiated Measurements above 1 GHz, 3 m (FAR) | IC, Industry Canada Certification and Engineering Bureau |
| 487 550 348 348 | R-2666 G-301 C-2914 T-1967 | Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR) Radiated Measurements 1 GHz to 6 GHz, 3 m (SAR) Mains Ports Conducted Interference Measurements Telecommunication Ports Conducted Interference Measur. | VCCI, Voluntary Control Council for Interference by Information Technology Equipment, Japan |

OATS = Open Area Test Site, SAR = Semi Anechoic Room, FAR = Fully Anechoic Room

6. Instruments and Ancillary

6.1. Used equipment "CTC"

The "Ref.-No" in the left column of the following tables allows the clear identification of the laboratory equipment.

6.1.1. Test software and firmware of equipment

| Ref.-No. | Equipment | Type | Serial-No. | Version of Firmware or Software during the test |
|----------|---|------------------------|----------------|---|
| 001 | EMI Test Receiver | ESS | 825132/017 | Firm.= 1.21 , OTP=2.0, GRA=2.0 |
| 012 | Signal Generator (EMS-cond.) | SMY 01 | 839069/027 | Firm.= V 2.02 |
| 013 | Power Meter (EMS cond.) | NRVD | 839111/003 | Firm.= V 1.51 |
| 017 | Digital Radiocommunication Tester | CMD 60 M | 844365/014 | Firmware = V 3.52 .22.01.99, DECT = D2.87 13.01.99 |
| 053 | Audio Analyzer | UPA3 | 860612/022 | Firm. V 4.3 |
| 119 | RT Harmonics Analyzer dig. Flickermeter | B10 | G60547 | Firm.= V 3.1DHG |
| 140 | Signal Generator | SMHU | 831314/006 | Firm.= 3.21 |
| 261 | Thermal Power Sensor | NRV-Z55 | 825083/0008 | EPROM-Datum 02.12.04, SE EE 1 B |
| 262 | Power Meter | NRV-S | 825770/0010 | Firm.= 2.6 |
| 263 | Signal Generator | SMP 04 | 826190/0007 | Firm.=3.21 |
| 264 | Spectrum Analyzer | FSEK 30 | 826939/005 | Bios=2.1, Analyzer= 3.20 |
| 295 | Racal Digital Radio Test Set | 6103 | 1572 | UNIT Firmware= 4.04, SW-Main=4.04, SW-BBP=1.04, SW-DSP=1.02, Hardboot=1.02, Softboot=2.02 |
| 298 | Univ. Radio Communication Tester | CMU 200 | 832221/091 | R&S Test Firmware =3.53 /3.54 (current Testsoftw. f. all band used |
| 323 | Digital Radiocommunication Tester | CMD 55 | 825878/0034 | Firm.= 3.52 .22.01.99 |
| 331 | Climatic Test Chamber -40/+80 Grad | HC 4055 | 43146 | TSI 1.53 |
| 335 | CTC-EMS-Conducted | System EMS Conducted | - | EMC 32 V 8.52 |
| 340 | Digital Radiocommunication Tester | CMD 55 | 849709/037 | Firm.= 3.52 .22.01.99 |
| 355 | Power Meter | URV 5 | 891310/027 | Firm.= 1.31 |
| 365 | 10V Insertion Unit 50 Ohm | URV5-Z2 | 100880 | Eprom Data = 31.03.08 |
| 366 | Ultra Compact Simulator | UCS 500 M4 | V0531100594 | Firm. UCS 500=001925/3.06a02, rc=ISMIEC 4.10 |
| 371 | Bluetooth Tester | CBT32 | 100153 | CBT V5.30+ SW-Option K55, K57 |
| 377 | EMI Test Receiver | ESCS 30 | 100160 | Firm.= 2.30, OTP= 02.01, GRA= 02.36 |
| 378 | Broadband RF Field Monitor | RadiSense III | 03D00013SNO-08 | Firm.= V.03D13 |
| 389 | Digital Multimeter | Keithley 2000 | 0583926 | Firm. = A13 (Mainboard) A02 (Display) |
| 392 | Radio Communication Tester | MT8820A | 6K00000788 | Firm.= 4.50 #005, IPL=4.01#001, OS=4.02#001, GSM=4.41#013, W-CDMA= 4.54#004, scenario= 4.52#002 |
| 436 | Univ. Radio Communication Tester | CMU 200 | 103083 | R&S Test Firmware Base=5.14, Mess-Software= GSM:5.14 WCDMA:5.14 (current Testsoftw. F. all band |
| 441 | CTC-SAR-EMI Cable Loss | System EMI field (SAR) | - | EMC 32 Version 8.52 |
| 442 | CTC-SAR-EMS | System EMS field (SAR) | - | EMC 32 Version 8.40 |
| 443 | CTC-FAR-EMI-RSE | System CTC-FAR-EMI-RSE | - | Spuri 7.2.5 or EMC 32 Ver. 9.15.00 |
| 444 | CTC-FAR-EMS field | System-EMS-Field (FAR) | - | EMC 32 Version 9.15.00 |
| 460 | Univ. Radio Communication Tester | CMU 200 | 108901 | R&S Test Firmware Base=5.14, GSM=5.14 WCDMA=5.14 (current Testsoftw.,f. all band to be used, |
| 489 | EMI Test Receiver | ESU40 | 1000-30 | Firmware=4.43 SP3, Bios=V5.1-16-3, Spec. =01.00 |
| 491 | ESD Simulator dito | ESD dito | dito307022 | V 2.30 |
| 524 | Voltage Drop Simulator | VDS 200 | 0196-16 | Software Nr: 000037 Version V4.20a01 |
| 526 | Burst Generator | EFT 200 A | 0496-06 | Software Nr. 000034 Version V2.32 |
| 527 | Micro Pulse Generator | MPG 200 B | 0496-05 | Software-Nr. 000030 Version V2.43 |
| 528 | Load Dump Simulator | LD 200B | 0496-06 | Software-Nr. 000031 Version V2.35a01 |
| 546 | Univ. Radio Communication Tester | CMU 200 | 106436 | R&S Test Firmware Base=5.14, GSM=5.14 WCDMA=5.14 (current Testsoftw.,f. all band to be used |
| 547 | Univ. Radio Communication Tester | CMU 200 | 835390/014 | R&S Test Firmware Base=V5.1403 (current Testsoftw., f. all band used, GSM = 5.14 WCDMA: = 5.14 |
| 584 | Spectrum Analyzer | FSU 8 | 100248 | 2.82 SP3 |
| 597 | Univ. Radio Communication Tester | CMU 200 | 100347 | R&S Test Firmware Base=5.01, GSM=5.02 WCDMA= not installed, Mainboard= µP1=V.850 |
| 598 | Spectrum Analyzer | FSEM 30 (Reserve) | 831259/013 | Firmware Bios 3.40 , Analyzer 3.40 Sp 2 |
| 620 | EMI Test Receiver | ESU 26 | 100362 | 4.43 SP3 |
| 642 | Wideband Radio Communication Tester | CMW 500 | 126089 | Setup V03.26, Test programm component V03.02.20 |
| 692 | Bluetooth Tester | CBT 32 | 100236 | CBT V 5.40, FW: V.2.41 (FPGA Digital, V. 3.09 FPGA RF) |

6.1.2. Single instruments and test systems

| Ref.-No. | Equipment | Type | Serial-No. | Manufacturer | Interval of calibration | Remark | Cal due |
|----------|---|-------------------------------|-------------|-----------------------|-------------------------|--------|------------|
| 001 | EMI Test Receiver | ESS | 825132/017 | Rohde & Schwarz | 12 M | - | 30.04.2016 |
| 005 | AC - LISN (50 Ohm/50µH, test site 1) | ESH2-Z5 | 861741/005 | Rohde & Schwarz | 12 M | - | 30.04.2016 |
| 007 | Single-Line V-Network (50 Ohm/5µH) | ESH3-Z6 | 892563/002 | Rohde & Schwarz | 12 M | - | 30.04.2016 |
| 009 | Power Meter (EMS-radiated) | NRV | 863056/017 | Rohde & Schwarz | 24 M | - | 30.04.2017 |
| 016 | Line Impedance Simulating Network | Op. 24-D | B6366 | Spitzenberger+Spies | 36 M | - | 31.03.2016 |
| 020 | Horn Antenna 18 GHz (Subst 1) | 3115 | 9107-3699 | EMCO | 36/12 M | - | 31.03.2017 |
| 021 | Loop Antenna (H-Field) | 6502 | 9206-2770 | EMCO | 36 M | - | 30.04.2018 |
| 030 | Loop Antenna (H-field) | HFH-Z2 | 879604/026 | Rohde & Schwarz | 36 M | - | 30.04.2018 |
| 033 | RF-current probe (100kHz-30MHz) | ESH2-Z1 | 879581/18 | Rohde & Schwarz | 24 M | - | 30.04.2017 |
| 057 | relay-switch-unit (EMS system) | RSU | 494440/002 | Rohde & Schwarz | pre-m | 1a | |
| 060 | power amplifier (DC-2kHz) | PAS 5000 | B6363 | Spitzenberger+Spies | - | 3 | |
| 066 | notch filter (WCDMA; FDD1) | WRCT 1900/2200-5/40-10EEK | 5 | Wainwright GmbH | 12 M | 1g | 31.07.2015 |
| 086 | DC - power supply, 0 -10 A | LNG 50-10 | - | Heinzinger Electronic | pre-m | 2 | |
| 087 | DC - power supply, 0 -5 A | EA-3013 S | - | Elektro Automatik | pre-m | 2 | |
| 090 | Helmholtz coil: 2x10 coils in series | Helmholtz coil: 2x10 coils in | - | RWTÜV | 24 M | 4 | 31.03.2016 |
| 091 | USB-LWL-Converter | OLS-1 | 007/2006 | Ing. Büro Scheiba | - | 4 | |
| 099 | passive voltage probe | ESH2-Z3 | 299.7810.52 | Rohde & Schwarz | 36 M | - | 30.04.2018 |
| 100 | passive voltage probe | Probe TK 9416 | without | Schwarzbeck | 36 M | - | 30.04.2018 |
| 110 | USB-LWL-Converter | OLS-1 | - | Ing. Büro Scheiba | - | 4 | |
| 119 | RT Harmonics Analyzer dig. Flickermeter | B10 | G60547 | BOCONSULT | 36 M | - | 31.03.2016 |
| 136 | adjustable dipole antenna (Dipole 1) | 3121C-DB4 | 9105-0697 | EMCO | 36 M | - | 30.04.2018 |
| 140 | Signal Generator | SMHU | 831314/006 | Rohde & Schwarz | 24 M | - | 31.03.2016 |
| 248 | attenuator | SMA 6dB 2W | - | Radiall | pre-m | 2 | |
| 249 | attenuator | SMA 10dB 10W | - | Radiall | pre-m | 2 | |
| 252 | attenuator | N 6dB 12W | - | Radiall | pre-m | 2 | |
| 256 | attenuator | SMA 3dB 2W | - | Radiall | pre-m | 2 | |
| 257 | hybrid | 4031C | 04491 | Narda | pre-m | 2 | |
| 260 | hybrid coupler | 4032C | 11342 | Narda | pre-m | 2 | |
| 261 | Thermal Power Sensor | NRV-Z55 | 825083/0008 | Rohde & Schwarz | 24 M | - | 31.03.2016 |
| 262 | Power Meter | NRV-S | 825770/0010 | Rohde & Schwarz | 24 M | - | 31.03.2016 |
| 263 | Signal Generator | SMP 04 | 826190/0007 | Rohde & Schwarz | 36 M | - | 31.03.2016 |
| 264 | Spectrum Analyzer | FSEK 30 | 826939/005 | Rohde & Schwarz | 12 M | - | 30.04.2016 |
| 265 | peak power sensor | NRV-Z33, Model 04 | 840414/009 | Rohde & Schwarz | 24 M | - | 31.03.2016 |
| 266 | Peak Power Sensor | NRV-Z31, Model 04 | 843383/016 | Rohde & Schwarz | 24 M | - | 31.03.2016 |
| 267 | notch filter GSM 850 | WRCA 800/960-6EEK | 9 | Wainwright GmbH | pre-m | 2 | |
| 270 | termination | 1418 N | BB6935 | Weinschel | pre-m | 2 | |
| 271 | termination | 1418 N | BE6384 | Weinschel | pre-m | 2 | |
| 272 | attenuator (20 dB) 50 W | Model 47 | BF6239 | Weinschel | pre-m | 2 | |
| 273 | attenuator (10 dB) 100 W | Model 48 | BF9229 | Weinschel | pre-m | 2 | |
| 274 | attenuator (10 dB) 50 W | Model 47 (10 dB) 50 W | BG0321 | Weinschel | pre-m | 2 | |
| 275 | DC-Block | Model 7003 (N) | C5129 | Weinschel | pre-m | 2 | |
| 276 | DC-Block | Model 7006 (SMA) | C7061 | Weinschel | pre-m | 2 | |
| 279 | power divider | 1515 (SMA) | LH855 | Weinschel | pre-m | 2 | |
| 287 | pre-amplifier 25MHz - 4GHz | AMF-2D-100M4G-35-10P | 379418 | Miteq | 12 M | 1c | 31.07.2015 |
| 291 | high pass filter GSM 850/900 | WHJ 2200-4EE | 14 | Wainwright GmbH | 12 M | 1c | 31.07.2015 |
| 298 | Univ. Radio Communication Tester | CMU 200 | 832221/091 | Rohde & Schwarz | pre-m | 3 | |
| 300 | AC LISN (50 Ohm/50µH, 1-phase) | ESH3-Z5 | 892 239/020 | Rohde & Schwarz | 12 M | - | 30.04.2016 |
| 301 | attenuator (20 dB) 50W, 18GHz | 47-20-33 | AW0272 | Lucas Weinschel | pre-m | 2 | |
| 302 | horn antenna 40 GHz (Meas 1) | BBHA9170 | 155 | Schwarzbeck | 36 M | - | 31.03.2017 |
| 303 | horn antenna 40 GHz (Subst 1) | BBHA9170 | 156 | Schwarzbeck | 36 M | - | 31.03.2017 |
| 331 | Climatic Test Chamber -40/+80 Grad | HC 4055 | 43146 | Heraeus Vötsch | 24 M | - | 30.11.2014 |
| 341 | Digital Multimeter | Fluke 112 | 81650455 | Fluke | 24 M | - | 31.03.2016 |
| 342 | Digital Multimeter | Voltcraft M-4660A | 1B 255466 | Voltcraft | 24 M | - | 30.04.2017 |
| 347 | laboratory site | radio lab. | - | - | - | 5 | |
| 348 | laboratory site | EMI conducted | - | - | - | 5 | |
| 354 | DC - Power Supply 40A | NGPE 40/40 | 448 | Rohde & Schwarz | pre-m | 2 | |
| 355 | Power Meter | URV 5 | 891310/027 | Rohde & Schwarz | 24 M | - | 31.03.2016 |
| 356 | power sensor | NRV-Z1 | 882322/014 | Rohde & Schwarz | 24 M | - | 31.03.2015 |
| 357 | power sensor | NRV-Z1 | 861761/002 | Rohde & Schwarz | 24 M | - | 30.04.2017 |
| 371 | Bluetooth Tester | CBT32 | 100153 | R&S | 24 M | - | 31.03.2016 |
| 373 | Single-Line V-Network (50 Ohm/5µH) | ESH3-Z6 | 100535 | Rohde & Schwarz | 24 M | - | 30.04.2017 |
| 377 | EMI Test Receiver | ESCS 30 | 100160 | Rohde & Schwarz | 12 M | - | 30.04.2016 |
| 389 | Digital Multimeter | Keithley 2000 | 0583926 | Keithley | 24 M | - | 30.04.2017 |
| 392 | Radio Communication Tester | MT8820A | 6K00000788 | Anritsu | 12 M | - | 30.04.2016 |
| 431 | Model 7405 | Near-Field Probe Set | 9305-2457 | EMCO | - | 4 | |
| 436 | Univ. Radio Communication Tester | CMU 200 | 103083 | Rohde & Schwarz | 12 M | - | 30.04.2016 |
| 439 | UltraLog-Antenna | HL 562 | 100248 | Rohde & Schwarz | 36 M | - | 31.03.2017 |
| 441 | CTC-SAR-EMI Cable Loss | System EMI field (SAR) Cable | - | CETECOM | 12 M | 5 | 30.01.2016 |
| 443 | CTC-FAR-EMI-RSE | System CTC-FAR-EMI- | - | ETS-Lindgren / | 12 M | 5 | 31.07.2015 |

| Ref.-No. | Equipment | Type | Serial-No. | Manufacturer | Interval of calibration | Remark | Cal due |
|----------|---|-----------------------------|----------------------------|-----------------------------|-------------------------|--------|------------|
| | | RSE | | CETECOM | | | |
| 448 | notch filter WCDMA_FDD II | WRCT 1850.0/2170.0-5/40- | 5 | Wainwright Instruments GmbH | 12 M | 1c | 31.07.2015 |
| 449 | notch filter WCDMA FDD V | WRCT 824.0/894.0-5/40-8SSK | 1 | Wainwright | 12 M | 1c | 31.07.2015 |
| 454 | Oscilloscope | HM 205-3 | 9210 P 29661 | Hameg | - | 4 | |
| 456 | DC-Power supply 0-5 A | EA 3013 S | 207810 | Elektro Automatik | pre-m | 2 | |
| 459 | DC -Power supply 0-5 A , 0-32 V | EA-PS 2032-50 | 910722 | Elektro Automatik | pre-m | 2 | |
| 460 | Univ. Radio Communication Tester | CMU 200 | 108901 | Rohde & Schwarz | 12 M | - | 30.04.2016 |
| 463 | Universal source | HP3245A | 2831A03472 | Agilent | - | 4 | |
| 466 | Digital Multimeter | Fluke 112 | 89210157 | Fluke USA | 24 M | - | 31.03.2016 |
| 467 | Digital Multimeter | Fluke 112 | 89680306 | Fluke USA | 36 M | - | 30.04.2018 |
| 468 | Digital Multimeter | Fluke 112 | 90090455 | Fluke USA | 36 M | - | 30.04.2018 |
| 477 | ReRadiating GPS-System | AS-47 | - | Automotive Cons. Fink | - | 3 | |
| 480 | power meter (Fula) | NRVS | 838392/031 | Rohde & Schwarz | 24 M | - | 30.04.2017 |
| 482 | filter matrix | Filter matrix SAR 1 | - | CETECOM (Brl) | - | 1d | |
| 484 | pre-amplifier 2,5 - 18 GHz | AMF-5D-02501800-25-10P | 1244554 | Miteq | 12 M | - | 31.07.2015 |
| 487 | System CTC NSA-Verification SAR-EMI | System EMI field (SAR) NSA | - | ETS Lindgren / CETECOM | 24 M | - | 30.06.2015 |
| 489 | EMI Test Receiver | ESU40 | 1000-30 | Rohde & Schwarz | 12 M | - | 30.04.2016 |
| 502 | band reject filter | WRCG 1709/1786-1699/1796- | SN 9 | Wainwright | pre-m | 2 | |
| 503 | band reject filter | WRCG 824/849-814/859- | SN 5 | Wainwright | pre-m | 2 | |
| 512 | notch filter GSM 850 | WRCA 800/960-02/40-6EEK | SN 24 | Wainwright | 12 M | 1c | 31.07.2015 |
| 517 | relais switch matrix | HF Relais Box Keithley | SE 04 | Keithley | pre-m | 2 | |
| 523 | Digital Multimeter | L4411A | MY46000154 | Agilent | 24 M | - | 30.04.2017 |
| 529 | 6 dB Broadband resistive power divider | Model 1515 | LH 855 | Weinschel | pre-m | 2 | |
| 530 | 10 dB Broadband resistive power divider | R 416110000 | LOT 9828 | - | pre-m | 2 | |
| 546 | Univ. Radio Communication Tester | CMU 200 | 106436 | R&S | 12 M | - | 30.04.2016 |
| 547 | Univ. Radio Communication Tester | CMU 200 | 835390/014 | Rohde & Schwarz | 12 M | - | 30.04.2016 |
| 548 | Digital-Barometer | GBP 2300 | without | Greisinger GmbH | 36 M | - | 30.06.2015 |
| 549 | Log.Per-Antenna | HL025 | 1000060 | Rohde & Schwarz | 36/12 M | - | 31.03.2015 |
| 552 | high pass filter 2,8-18GHz | WHKX 2.8/18G-10SS | 4 | Wainwright | 12 M | 1c | 31.07.2015 |
| 557 | System CTC-OTA-2 | R&S TS8991 | - | Rohde & Schwarz | 12 M | 5 | 30.09.2015 |
| 558 | System CTC FAR S-VSWR | System CTC FAR S-VSWR | - | CTC | 24 M | - | 31.07.2015 |
| 574 | Biconilog Hybrid Antenna | BTA-L | 980026L | Frankonia | 36/12 M | - | 31.03.2016 |
| 584 | Spectrum Analyzer | FSU 8 | 100248 | Rohde & Schwarz | pre-m | - | |
| 594 | Wideband Radio Communication Tester | CMW 500 | 101757 | Rohde & Schwarz | 12 M | - | 30.04.2016 |
| 597 | Univ. Radio Communication Tester | CMU 200 | 100347 | Rohde & Schwarz | 36 M | - | 31.03.2016 |
| 598 | Spectrum Analyzer | FSEM 30 (Reserve) | 831259/013 | Rohde & Schwarz | 24 M | - | 30.04.2017 |
| 600 | power meter | NRVD (Reserve) | 834501/018 | Rohde & Schwarz | 24 M | - | 30.04.2017 |
| 601 | medium-sensitivity diode sensor | NRV-Z5 (Reserve) | 8435323/003 | Rohde & Schwarz | 24 M | - | 30.04.2017 |
| 602 | peak power sensor | NRV-Z32 (Reserve) | 835080 | Rohde & Schwarz | 24 M | - | |
| 611 | DC power supply | E3632A | KR 75305854 | Agilent | pre-m | 2 | |
| 612 | DC power supply | E3632A | MY 40001321 | Agilent | pre-m | 2 | |
| 613 | Attenuator | R416120000 20dB 10W | Lot. 9828 | Radiall | pre-m | 2 | |
| 616 | Digitalmultimeter | Fluke 177 | 88900339 | Fluke | 24 M | - | 31.03.2016 |
| 617 | Power Splitter/Combiner | ZFSC-2-2-S+ | S F987001108 | Mini Circuits | - | 2 | |
| 618 | Power Splitter/Combiner | 50PD-634 | 600994 | JFW Industries USA | - | 2 | |
| 619 | Power Splitter/Combiner | 50PD-634 | 600995 | JFW Industries, USA | - | 3 | |
| 620 | EMI Test Receiver | ESU 26 | 100362 | Rohde-Schwarz | 12 M | - | 01.12.2015 |
| 621 | Step Attenuator 0-139 dB | RSP | 100017 | Rohde & Schwarz | pre-m | 2 | |
| 625 | Generic Test Load USB | Generic Test Load USB | - | CETECOM | - | 2 | |
| 627 | data logger | OPUS 1 | 201.0999.9302.6.4.1.4 3 | G. Lufft GmbH | 24 M | - | 30.04.2017 |
| 634 | Spectrum Analyzer | FSM (HF-Unit) | 826188/010 | Rohde & Schwarz | pre-m | 2 | |
| 636 | Thermal Imaging camera | Ti32 | Ti32-12060213 | Fluke Corporation | 36 M | - | 31.07.2015 |
| 637 | High Speed HDMI with Ethernet 1m | HDMI cable with Ethernet 1m | - | KogiLink | - | 2 | |
| 638 | HDMI Kabel with Ethernet 1,5 m flach | HDMI cable with Ethernet | - | Reichelt | - | 2 | |
| 640 | HDMI cable 2m rund | HDMI cable 2m rund | - | Reichelt | - | 2 | |
| 641 | HDMI cable with Ethernet | Certified HDMI cable with | - | PureLink | - | 2 | |
| 642 | Wideband Radio Communication Tester | CMW 500 | 126089 | Rohde&Schwarz | 12 M | - | 30.04.2016 |
| 644 | Amplifierer | ZX60-2534M+ | SN865701299 | Mini-Circuits | - | - | |
| 670 | Univ. Radio Communication Tester | CMU 200 | 106833 | Rohde & Schwarz | 24 M | - | 31.03.2016 |
| 671 | DC-power supply 0-5 A | EA-3013S | - | Elektro Automatik | pre-m | 2 | |
| 678 | Power Meter | NRP | 101638 | Rohde&Schwarz | pre-m | - | |
| 683 | Spectrum Analyzer | FSU 26 | 200571 | Rohde & Schwarz | 12 M | - | 30.04.2016 |
| 686 | Field Analyzer | EHP-200A | 160WX30702 | Narda Safety Test Solutions | 24 M | - | 30.04.2017 |
| 687 | Signal Generator | SMF 100A | 102073 | Rohde&Schwarz | 12 M | - | 30.04.2016 |
| 688 | Pre Amp | JS-18004000-40-8P | 1750117 | Miteq | pre-m | - | |

| Ref.-No. | Equipment | Type | Serial-No. | Manufacturer | Interval of calibration | Remark | Cal due |
|----------|------------------|------------------------|------------|-----------------|-------------------------|--------|------------|
| 692 | Bluetooth Tester | CBT 32 | 100236 | Rohde & Schwarz | 24 M | - | 31.03.2016 |
| 693 | TS8997 | CTC-Radio Lab 1 TS8997 | - | Rohde&Schwarz | 12 M | 5 | 01.05.2015 |
| 697 | Power Splitter | ZN4PD-642W-S+ | 165001445 | Mini-Circuits | - | 2 | |
| | | | | | | | |

6.1.3. Legend

| Note / remarks | | Calibrated during system calibration: |
|----------------|-----|---|
| | 1a | System CTC-SAR-EMS (Ref.-No. 442) |
| | 1b | System-CTC-EMS-Conducted (Ref.-No. 335) |
| | 1c | System CTC-FAR-EMI-RSE (Ref.-No . 443) |
| | 1d | System CTC-SAR-EMI (Ref.-No . 441) |
| | 1e | System CTC-OATS (EMI radiated) (Ref.-No. 337) |
| | 1 f | System CTC-CTIA-OTA (Ref.-No . 420) |
| | 1 g | System CTC-FAR-EMS (Ref.-No . 444) |
| | 2 | Calibration or equipment check immediately before measurement |
| | 3 | Regulatory maintained equipment for functional check or support purpose |
| | 4 | Ancillary equipment without calibration e.g. mechanical equipment or monitoring equipment |
| | 5 | Test System |

| | | |
|-------------------------|---------|---|
| Interval of calibration | 12 M | 12 month |
| | 24 M | 24 month |
| | 36 M | 36 month |
| | 24/12 M | Calibration every 24 months, between this every 12 months internal validation |
| | 36/12 M | Calibration every 36 months, between this every 12 months internal validation |
| | Pre-m | Check before starting the measurement |
| | - | Without calibration |

7. Versions of test reports (change history)

| Version | Applied changes | Date of release |
|---------|-----------------|-----------------|
| | Initial release | 2015-05-26 |
| -- | -- | -- |