

## 5 TEST CONDITIONS AND RESULTS


### 5.1 Conducted emissions

For test instruments and accessories used see section 6 Part A 4.

#### 5.1.1 Description of the test location

Test location:               Shielded Room S2

#### 5.1.2 Photo documentation of the test set-up

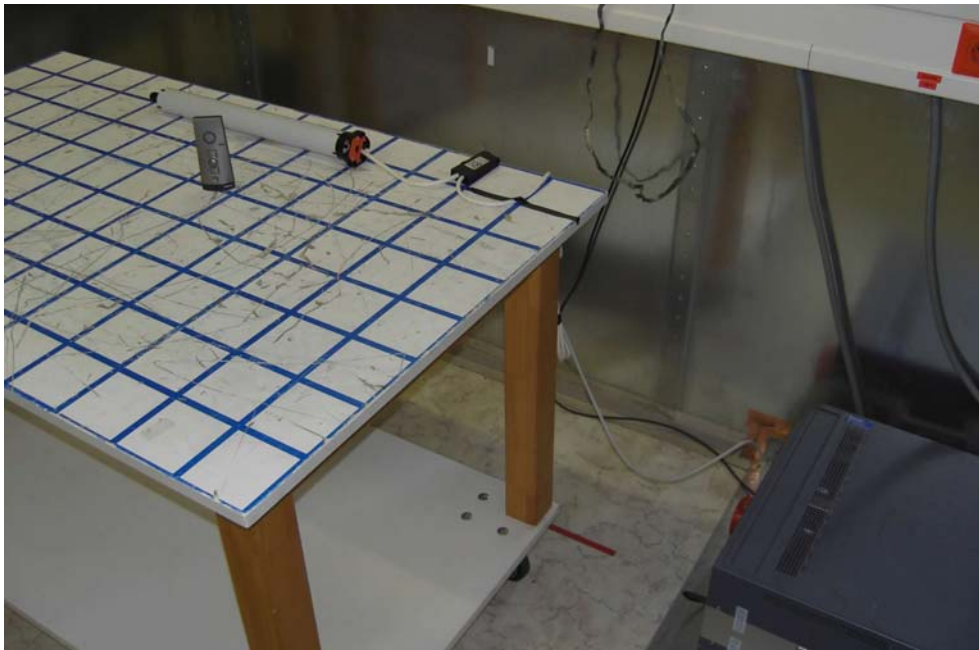

## 5.2 Radiated emission of the fundamental wave

For test instruments and accessories used see section 6 Part CPR 2.

### 5.2.1 Description of the test location

Test location: OATS1

Test distance: 3 metres

### 5.2.2 Photo documentation of the test set-up




### 5.3 Spurious emissions radiated

For test instruments and accessories used see section 6 Part SER 1, SER 2, SER 3.



#### 5.3.1 Description of the test location

Test location: OATS1  
Test location: Anechoic Chamber A2  
Test distance: 3 metres

#### 5.3.2 Photo documentation of the test set-up

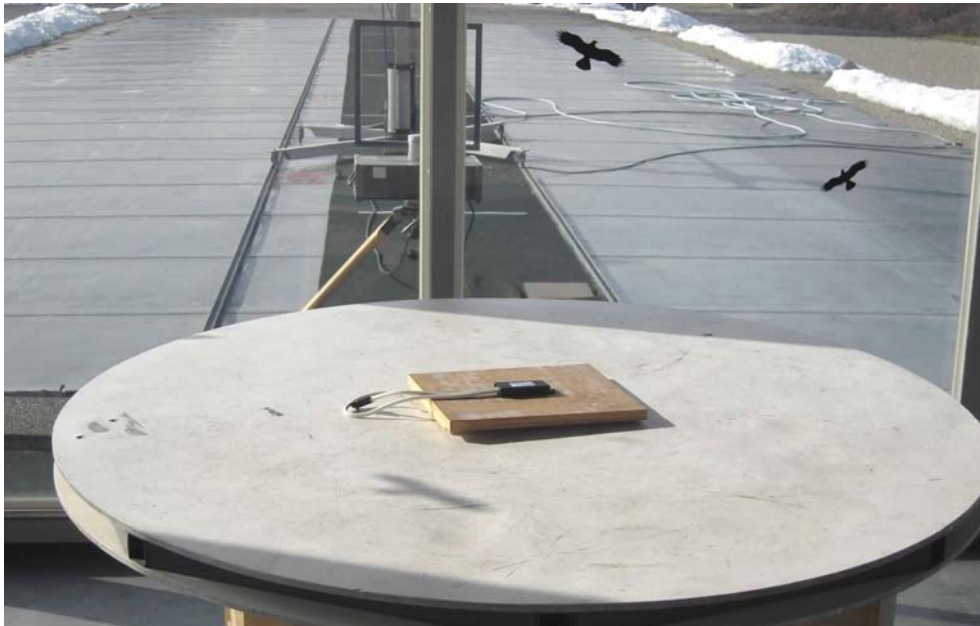



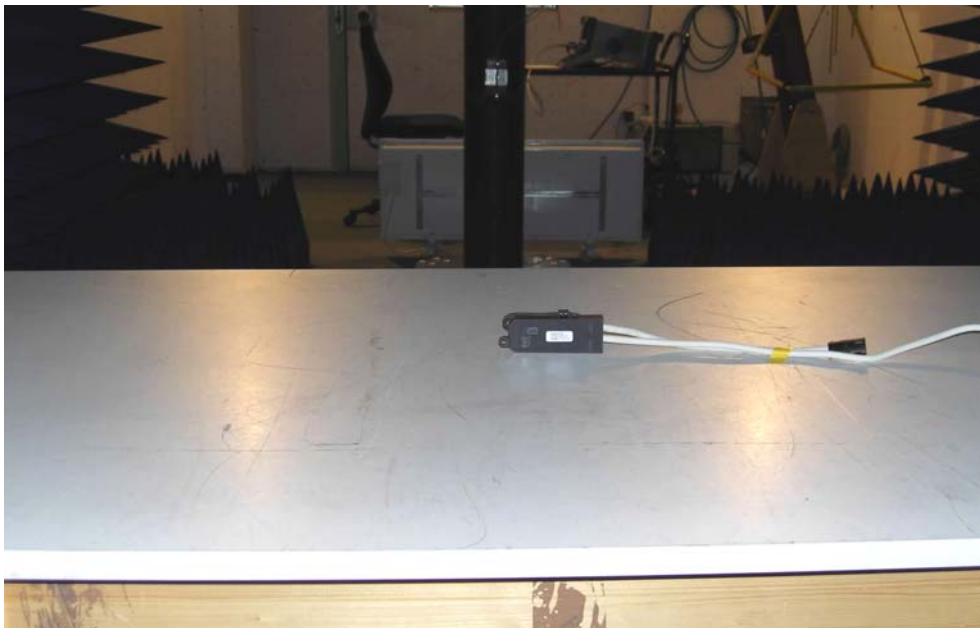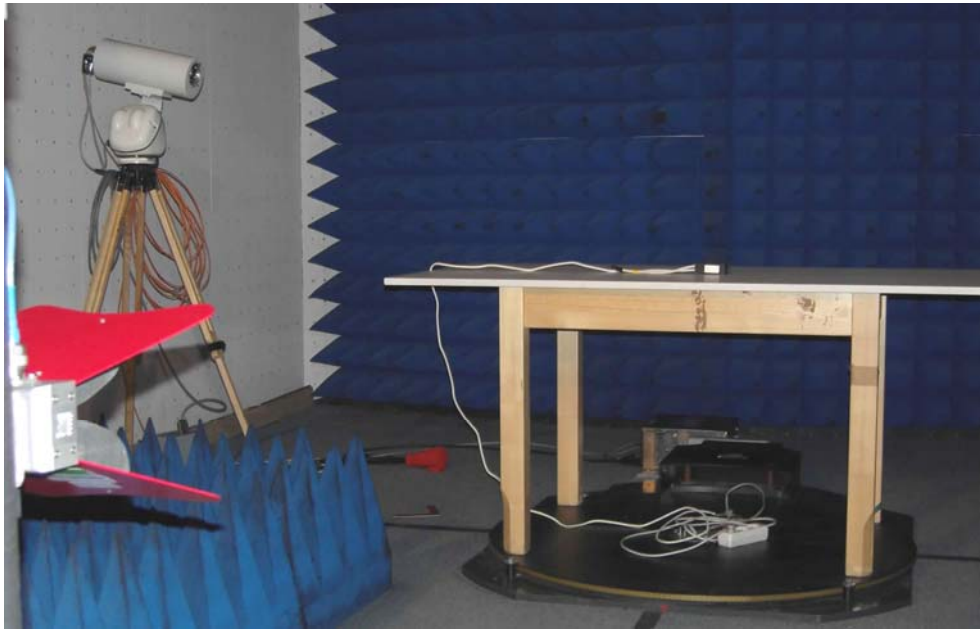

### 5.3.3 Applicable standard

According to FCC Part 15C, Section 15.249(d):

Emission radiated outside of the specified frequency bands, except harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated limit in §15.209, whichever is the lesser attenuation.