



# FCC 47 CFR PART 15 SUBPART C

## TEST REPORT

*For*

**Applicant :** Globalscale Technologies INC

**Address :** 5F, No. 2 Building, Minxing Industrial Park Minkang Road,  
Minzhi Street, Baoan District , Shenzhen, Guangdong, China

**Product Name :** GTcam

**Model Name :** 003-GTC001, 003-GTC002

**Brand Name :** GTCAM TM

**FCC ID :** YCJ003GT

**Report No. :** DPH130411F02

**Date of Issue :** May 3, 2013

**Issued by :** Shenzhen Top-cert Service Co., Ltd.

**Address :** Room 506, Hongyu Commercial Building, Gushu 2nd Road,  
Baoan District, Shenzhen, China

**Tel :** 0755-61196328

**Fax :** 0755-61196328

**E-mail :** [service@top-cert.com](mailto:service@top-cert.com)

**Web :** [www.top-cert.com](http://www.top-cert.com)

*The report consists 83 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by Top-cert. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver.*

**TABLE OF CONTENTS**

**1. VERIFICATION OF CONFORMITY ..... 3**

**2. GENERAL INFORMATION ..... 4**

2.1 Product Information ..... 4

2.2 Objective ..... 5

2.3 Test Standards and Results ..... 5

2.4 Environmental Conditions ..... 5

**3. TEST FACILITY ..... 6**

3.1 Test Facility ..... 6

3.2 General Test Procedures ..... 6

3.3 FCC Part 15.205 Restricted Bands of Operations ..... 7

**4. TEST EQUIPMENT LIST ..... 8**

**5. 47 CFR Part 15 C 15.247 Requirements ..... 9**

5.1 6dB Bandwidth ..... 9

5.2 Peak Output Power ..... 16

5.3 Conducted Spurious Emission ..... 24

5.4 Band Edge ..... 31

5.5 Power Spectral Density (PSD) ..... 36

5.6 Conducted Emission ..... 43

5.7 Radiated Emission ..... 46

**APPENDIX 1 ..... 74**

**PHOTOGRAPHS OF TEST SETUP ..... 74**

**APPENDIX 2 ..... 77**

**PHOTOGRAPHS OF EUT ..... 77**

Revision History		
Issue	Date	Reason for Revision
1.0	May 3, 2013	First edition

### 1. VERIFICATION OF CONFORMITY

<b>Equipment Under Test:</b>	GTcam
<b>Brand Name:</b>	GTCAM TM
<b>Model Number:</b>	003-GTC001
<b>Series Model Name:</b>	003-GTC002
<b>Difference description:</b>	Only the model name is different
<b>FCC ID:</b>	YCJ003GT
<b>Applicant:</b>	Globalscale Technologies INC
	5F, No. 2 Building, Minxing Industrial Park Minkang Road, Minzhi Street, Baoan District , Shenzhen, Guangdong, China
<b>Manufacturer:</b>	Globalscale Technologies INC
	5F, No. 2 Building, Minxing Industrial Park Minkang Road, Minzhi Street, Baoan District , Shenzhen, Guangdong, China
<b>Technical Standards:</b>	47 CFR Part 15 Subpart C
<b>File Number:</b>	DPH130411F01
<b>Date of test:</b>	April 20, 2013 - May 2, 2013
<b>Date of Issue:</b>	May 3, 2013
<b>Condition of Test Sample:</b>	Normal
<b>Test Result:</b>	PASS

The above equipment was tested by Top-cert. For compliance with the requirements set forth in FCC rules and the Technical Standards mentioned above. This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment and the level of the immunity endurance of the equipment are within the compliance requirements.

The test results of this report relate only to the tested sample identified in this report.

Tested by (+ signature):

*Rex Luo*

Rex Luo  
Test Engineer



Approved by (+ signature):

*Joe Jia*

Joe Jia  
Manager

## 2. GENERAL INFORMATION

### 2.1 Product Information

Description:	GTcam
Brand Name:	GTCAM <sup>TM</sup>
Model Name:	003-GTC001
Frequency Range:	2412MHz - 2462MHz
Number of Channels:	IEEE 802.11b/g mode: 11 Channels IEEE 802.11n Standard-20 MHz Channel mode: 11 Channels IEEE 802.11n Standard-40 MHz Channel mode: 9 Channels
Modulation Technique:	IEEE 802.11b mode: DSSS (1, 2, 5.5 and 11 Mbps) IEEE 802.11g mode: OFDM (6, 9, 12, 18, 24, 36, 48 and 54 Mbps) IEEE 802.11n Standard-20 MHz Channel mode: OFDM(6.5, 13, 19.5, 26, 39, 52, 58.5, 65.0Mbps) IEEE 802.11n Standard-40 MHz Channel mode: OFDM(13.5, 27, 40.5, 54, 81, 108, 121.5, 135Mbps)
Power Supply:	DC 12V by AC/DC adapter
Temperature Range:	-20°C ~ +50°C

**NOTE:**

1. For more detailed features description about the EUT, please refer to User's Manual.

## 2.2 Objective

The objective of the report is to perform tests according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15(10-1-09 Edition)	Radio Frequency Devices

## 2.3 Test Standards and Results

Test items and the results are as bellow:

No.	Section	Description	Result	Date of Test
1	15.247(a)(2)	6dB Bandwidth	PASS	2013-04-25
2	15.247(b)(3)	Peak Output Power	PASS	2013-04-25
3	15.247(d)	conducted spurious emission	PASS	2013-04-25
4	15.247(d)	Band Edge	PASS	2013-04-25
5	15.247(e)	Power Spectral Density	PASS	2013-04-25
6	15.207	Conducted Emission	PASS	2013-04-24
7	15.247(d) 15.205 15.209	Radiated Emission	PASS	2013-04-24

Note: 1. The test result judgment is decided by the limit of measurement standard  
2. The information of measurement uncertainty is available upon the customer's request.

## 2.4 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

- Temperature: 15-35°C
- Humidity: 30-60 %
- Atmospheric pressure: 86-106 kPa

### 3. TEST FACILITY

#### 3.1 Test Facility

Test Site:	Most Technology Service Co., Ltd.
Location:	No.5, Nangshan 2nd Rd., North Hi-Tech Industrial park, Nanshan, Shenzhen, Guangdong, China
Description:	There is one 3m semi-anechoic an area test sites and two line conducted labs for final test. The Open Area Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4 and CISPR 16 requirements. The FCC Registration Number is <b>490827</b> .
Site Filing:	The site description is on file with the Federal Communications Commission, 7435 Oakland Mills Road, Columbia, MD 21046.
Instrument Tolerance:	All measuring equipment is in accord with ANSI C63.4 and CISPR 16 requirements that meet industry regulatory agency and accreditation agency requirement.
Ground Plane:	Two conductive reference ground planes were used during the Line Conducted Emission, one in vertical and the other in horizontal. The dimensions of these ground planes are as below. The vertical ground plane was placed distancing 40 cm to the rear of the wooden test table on where the EUT and the support equipment were placed during test. The horizontal ground plane projected 50 cm beyond the footprint of the EUT system and distanced 80 cm to the wooden test table. For Radiated Emission Test, one horizontal conductive ground plane extended at least 1m beyond the periphery of the EUT and the largest measuring antenna, and covered the entire area between the EUT and the antenna. It has no holes or gaps having longitudinal dimensions larger than one-tenth of a wavelength at the highest frequency of measurement up to 1GHz.

#### 3.2 General Test Procedures

##### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4:2009,Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4:2009.

**3.3 FCC Part 15.205 Restricted Bands of Operations**

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 13.41			

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasipeak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

#### 4. TEST EQUIPMENT LIST

**Instrumentation:** The following list contains equipment used at MOST for testing. The equipment conforms to the CISPR 16-1/ANSI C63.2 Specifications for Electromagnetic Interference and Field Strength Instrumentation from 10 kHz to 1.0 GHz or above.

No.	Equipment	Manufacturer	Model No.	S/N	Calibration due date
1	Test Receiver	Rohde & Schwarz	ESCI	100492	2014/03/09
2	L.I.S.N.	Rohde & Schwarz	ENV216	100093	2014/03/09
3	Coaxial Switch	Anritsu Corp	MP59B	6200283933	2014/03/09
4	Terminator	Hubersuhner	50Ω	No.1	2014/03/09
5	RF Cable	SchwarzBeck	N/A	No.1	N/A
6	Test Receiver	Rohde & Schwarz	ESPI	101202	2014/03/09
7	Test Antenna – Horn	Schwarzbeck	BBHA 9120C	--	2014/03/02
8	Test Antenna – Bi-Log	Schwarzbeck	VULB 9163	--	2014/03/02
9	Power Splitter	Weinschel	1506A	NW521	N/A
10	Spectrum Analyzer	Agilent	4408B	MY41440460	2014/03/09
11	Cable	Resenberger	N/A	NO.1	N/A
12	Cable	SchwarzBeck	N/A	NO.2	N/A
13	Cable	SchwarzBeck	N/A	NO.3	N/A
14	Signal Generator	IFR	2032	203002/100	2014/03/09
15	Universal Radio Communication Tester	ROHDE&SCHWARZ	CMU200	0304789	2014/03/09
16	Telecommunication Antenna	European Antennas	PSA 75301R/170	0304213	2014/03/02
17	DC Power Supply	Good Will	GPS-3030DD	EF920938	2014/03/09
18	Full-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2014/03/09

**NOTE:** Equipments listed above have been calibrated and are in the period of validation.



## 5. 47 CFR Part 15 C 15.247 Requirements

### 5.1 6dB Bandwidth

#### 5.1.1 Definition

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

#### 5.1.2 Test Description

The EUT is powered by the Battery, is coupled to the Spectrum Analyzer (SA) through the Attenuator/DC Block. The path loss as the factor is calibrated to correct the reading. During the measurement, the EUT is activated and is set to operate at maximum power. The RF load attached to the EUT antenna terminal is 50Ohm.

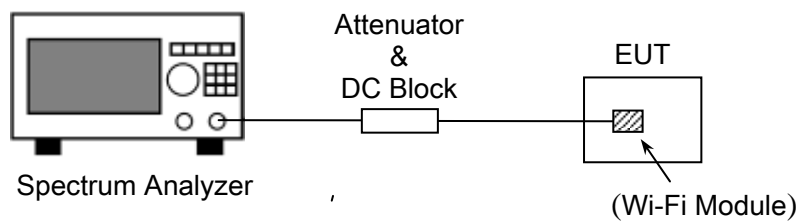


Figure 1: RF Test Setup


#### 5.1.3 Test Result

The lowest, middle and highest channels are selected to perform testing to record the 6 dB bandwidth of the Module.

802.11b Test Mode

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
1	2412	9.088	≥500	PASS
6	2437	9.061	≥500	PASS
11	2462	9.084	≥500	PASS

Agilent 17:12:21 Apr 25, 2013 R T S

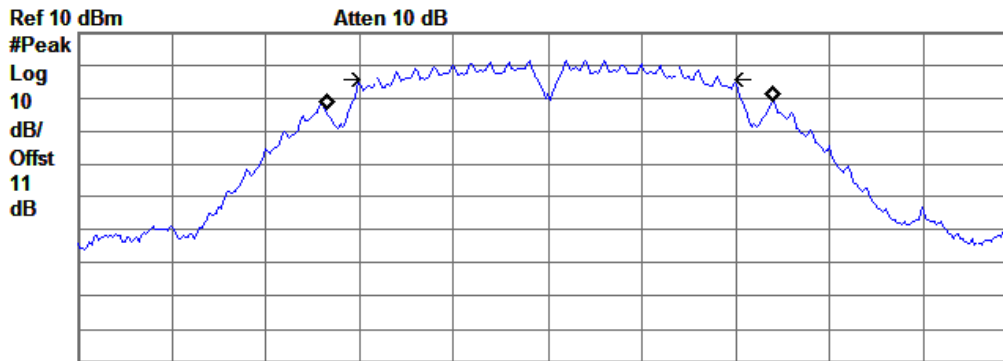

Center 2.412 GHz Span 25 MHz  
 #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)

Occupied Bandwidth  
 11.8770 MHz


Occ BW % Pwr 99.00 %  
 x dB -6.00 dB

Transmit Freq Error 32.974 kHz  
 x dB Bandwidth 9.088 MHz



(CH Low)

Agilent 17:13:02 Apr 25, 2013 R T S

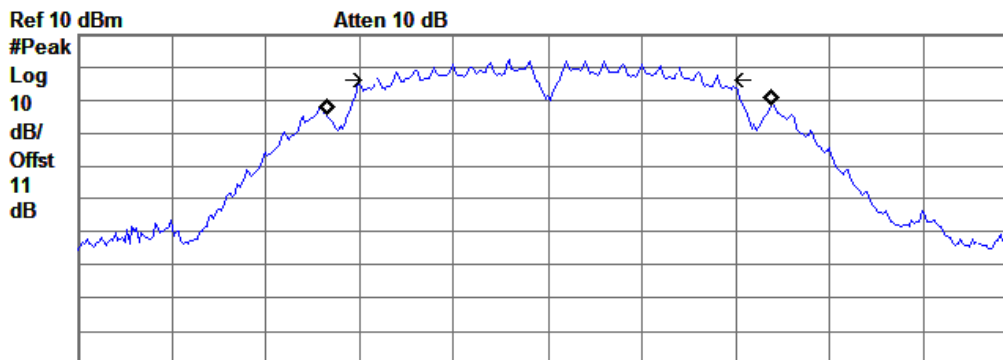

Center 2.437 GHz Span 25 MHz  
 #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)

Occupied Bandwidth  
 11.8372 MHz


Occ BW % Pwr 99.00 %  
 x dB -6.00 dB

Transmit Freq Error 39.579 kHz  
 x dB Bandwidth 9.061 MHz



(CH Mid)

Agilent 17:14:04 Apr 25, 2013 R T S

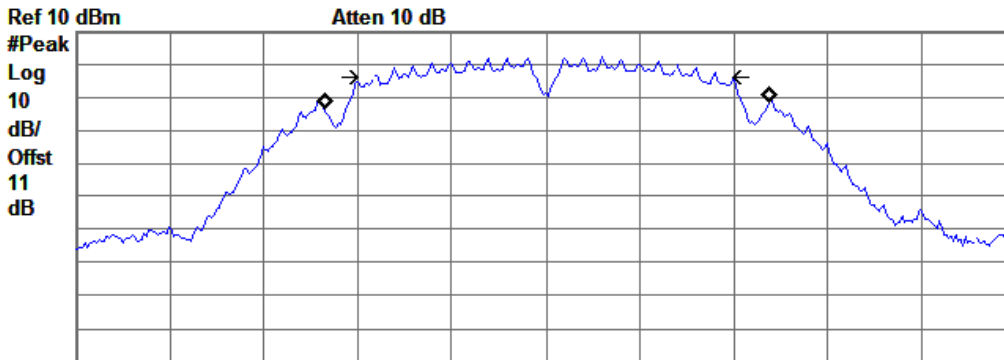

Center 2.462 GHz Span 25 MHz  
 #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)

**Occupied Bandwidth**  
 11.8368 MHz

Occ BW % Pwr 99.00 %  
 x dB -6.00 dB

Transmit Freq Error 21.699 kHz  
 x dB Bandwidth 9.084 MHz




(CH High)

802.11g Test Mode

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
1	2412	16.140	≥500	PASS
6	2437	16.327	≥500	PASS
11	2462	16.009	≥500	PASS

Agilent 17:16:20 Apr 25, 2013 R T S

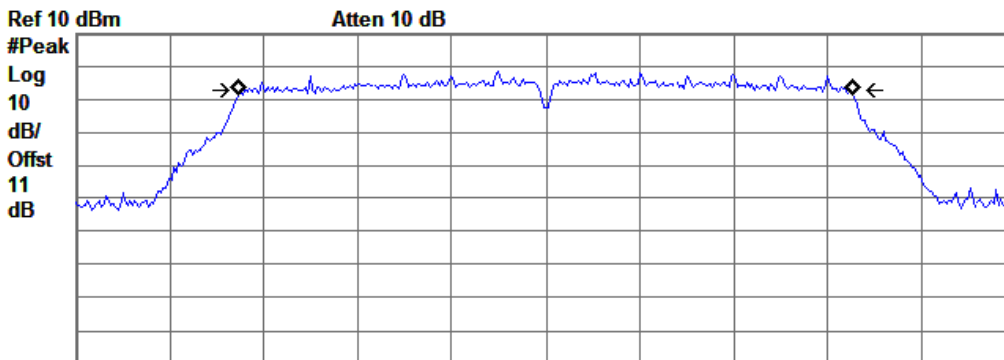

Center 2.412 GHz Span 25 MHz  
 #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)

**Occupied Bandwidth**  
 16.3729 MHz


Occ BW % Pwr 99.00 %  
 x dB -6.00 dB

Transmit Freq Error 9.871 kHz  
 x dB Bandwidth 16.140 MHz



(CH Low)

Agilent 17:15:39 Apr 25, 2013 R T S

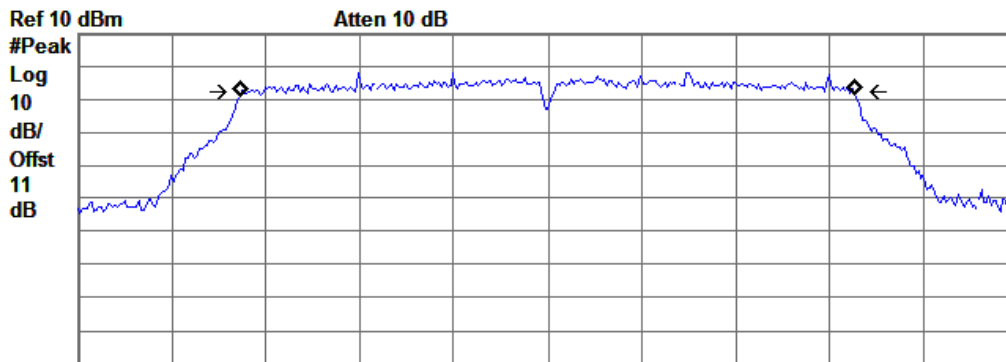

Center 2.437 GHz Span 25 MHz  
 #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)

Occupied Bandwidth  
 16.3818 MHz


Occ BW % Pwr 99.00 %  
 x dB -6.00 dB

Transmit Freq Error 13.799 kHz  
 x dB Bandwidth 16.327 MHz



(CH Mid)

Agilent 17:15:12 Apr 25, 2013 R T S

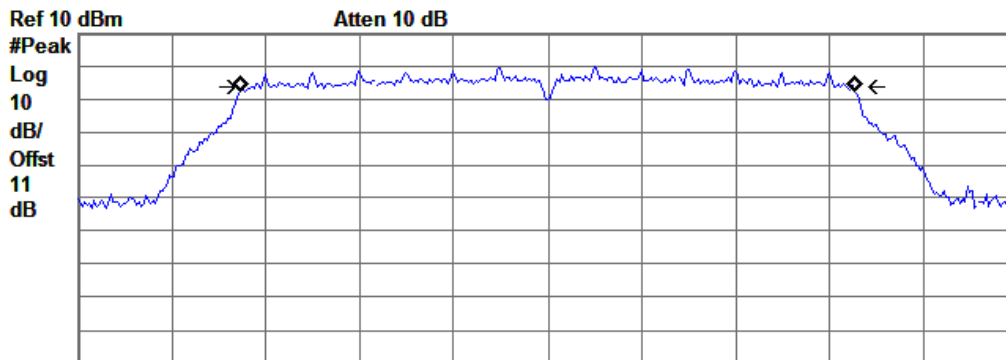

Center 2.462 GHz Span 25 MHz  
 #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)

Occupied Bandwidth  
 16.3844 MHz

Occ BW % Pwr 99.00 %  
 x dB -6.00 dB

Transmit Freq Error 13.348 kHz  
 x dB Bandwidth 16.009 MHz




(CH High)

802.11n-20 Test Mode

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
1	2412	16.929	≥500	PASS
6	2437	17.093	≥500	PASS
11	2462	16.926	≥500	PASS

Agilent 17:35:34 Apr 25, 2013 R T S

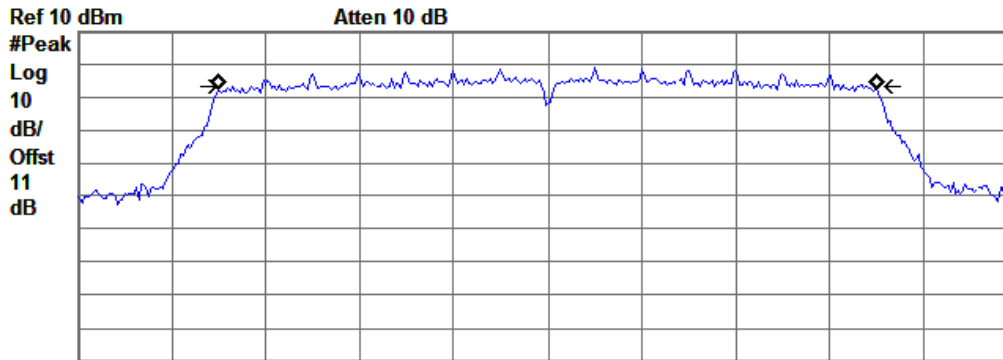

Center 2.412 GHz Span 25 MHz  
 #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)


Occupied Bandwidth 17.5144 MHz  
 Occ BW % Pwr 99.00 %  
 x dB -6.00 dB

Transmit Freq Error 11.085 kHz  
 x dB Bandwidth 16.929 MHz



(CH Low)

Agilent 17:37:45 Apr 25, 2013 R T S

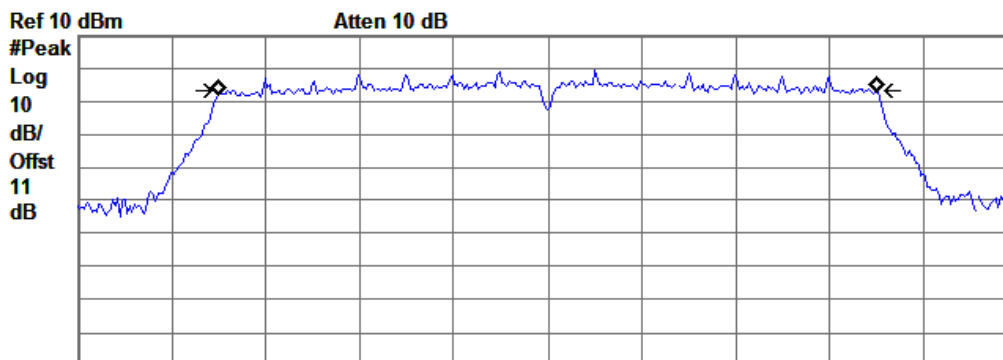


Center 2.437 GHz Span 25 MHz  
 #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)

Occupied Bandwidth 17.5242 MHz  
 Occ BW % Pwr 99.00 %  
 x dB -6.00 dB

Transmit Freq Error 13.547 kHz  
 x dB Bandwidth 17.093 MHz




(CH Mid)

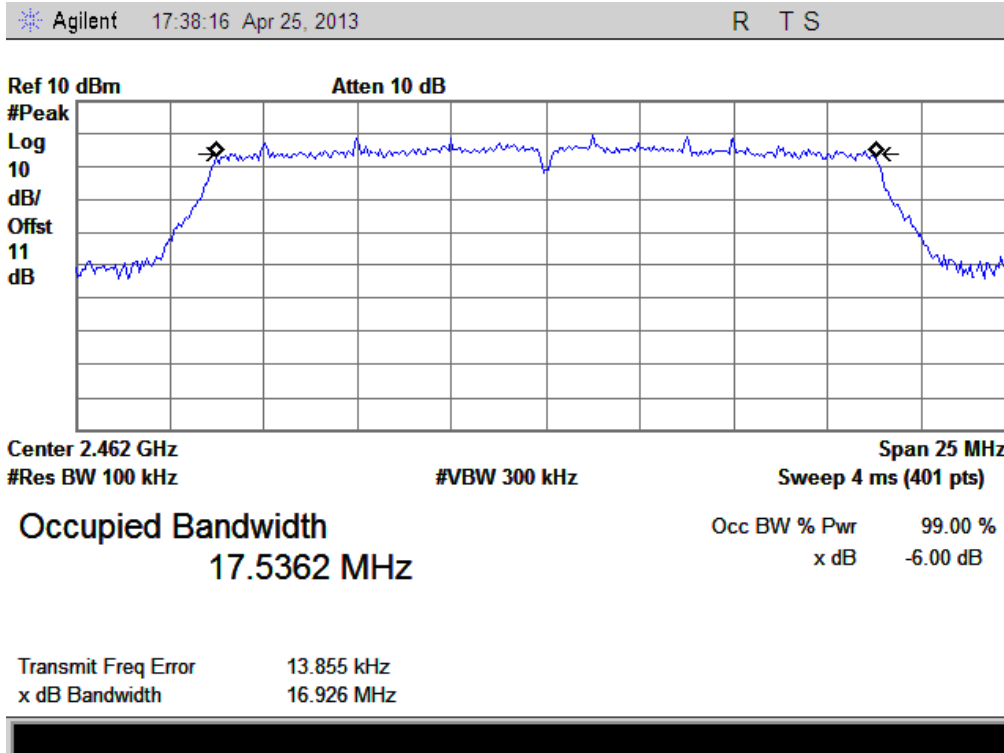

(CH High)


802.11n-40 Test Mode

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
3	2422	35.567	≥500	PASS
6	2437	35.524	≥500	PASS
9	2462	35.485	≥500	PASS

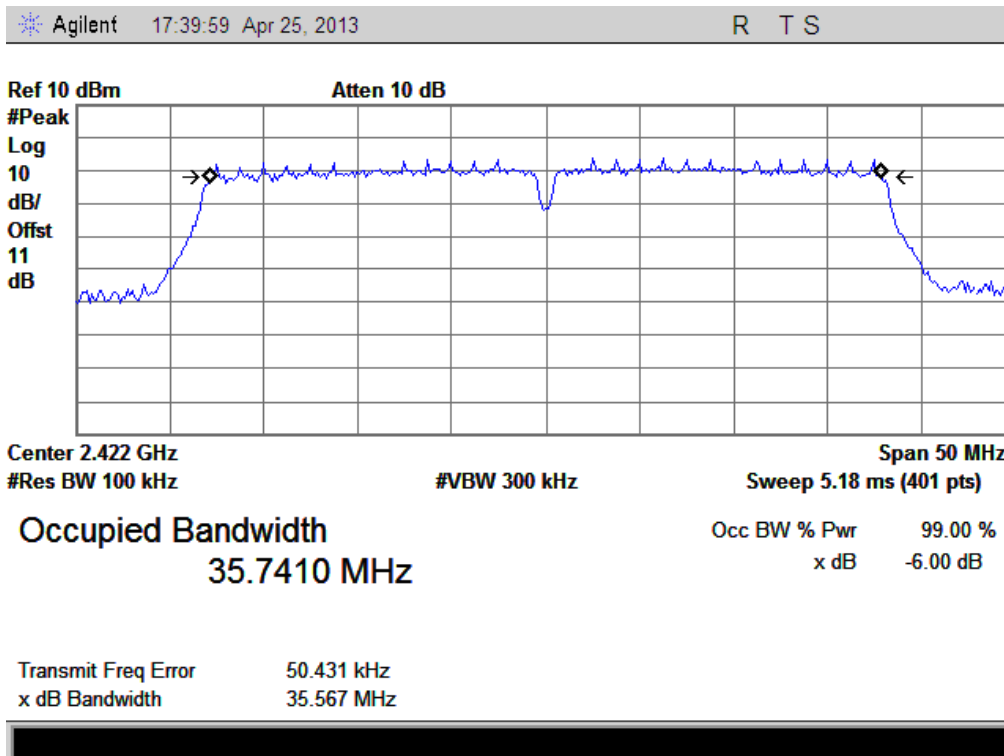

(CH Low)

Agilent 17:40:22 Apr 25, 2013 R T S

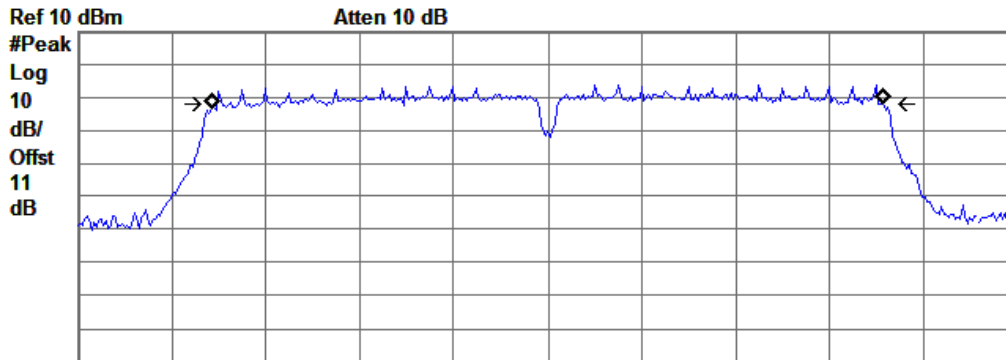

Center 2.437 GHz Span 50 MHz  
#Res BW 100 kHz #VBW 300 kHz Sweep 5.18 ms (401 pts)


Occupied Bandwidth  
35.7230 MHz

Occ BW % Pwr 99.00 %  
x dB -6.00 dB

Transmit Freq Error 43.636 kHz  
x dB Bandwidth 35.524 MHz

(CH Mid)

Agilent 17:40:53 Apr 25, 2013 R T S

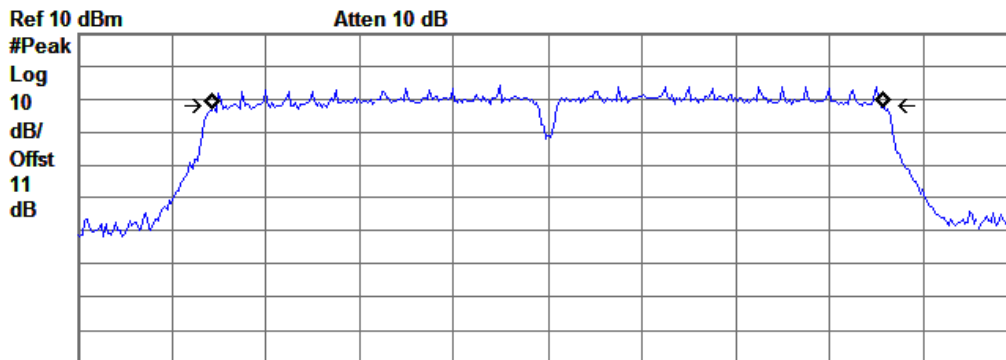

Center 2.452 GHz Span 50 MHz  
#Res BW 100 kHz #VBW 300 kHz Sweep 5.18 ms (401 pts)

Occupied Bandwidth  
35.7396 MHz

Occ BW % Pwr 99.00 %  
x dB -6.00 dB

Transmit Freq Error 40.893 kHz  
x dB Bandwidth 35.485 MHz

(CH High)

## 5.2 Peak Output Power

### 5.2.1 Definition

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.

### 5.2.2 Test Description


See section 5.1.2 of this report.

### 5.2.3 Test Result

The lowest and highest data rate are selected to perform testing to verify the conducted RF output peak power of the Module. Only the maximum conducted RF output peak power recorded in the report.


#### 802.11b Test Mode

Channel	Frequency (MHz)	Rate (Mbps)	Measured Output Peak Power		Limit		Verdict
			dBm	W	dBm	W	
1	2412	1Mbps	16.43	0.044	30	1	PASS
6	2437	1Mbps	16.19	0.042			PASS
11	2462	1Mbps	16.53	0.045			PASS

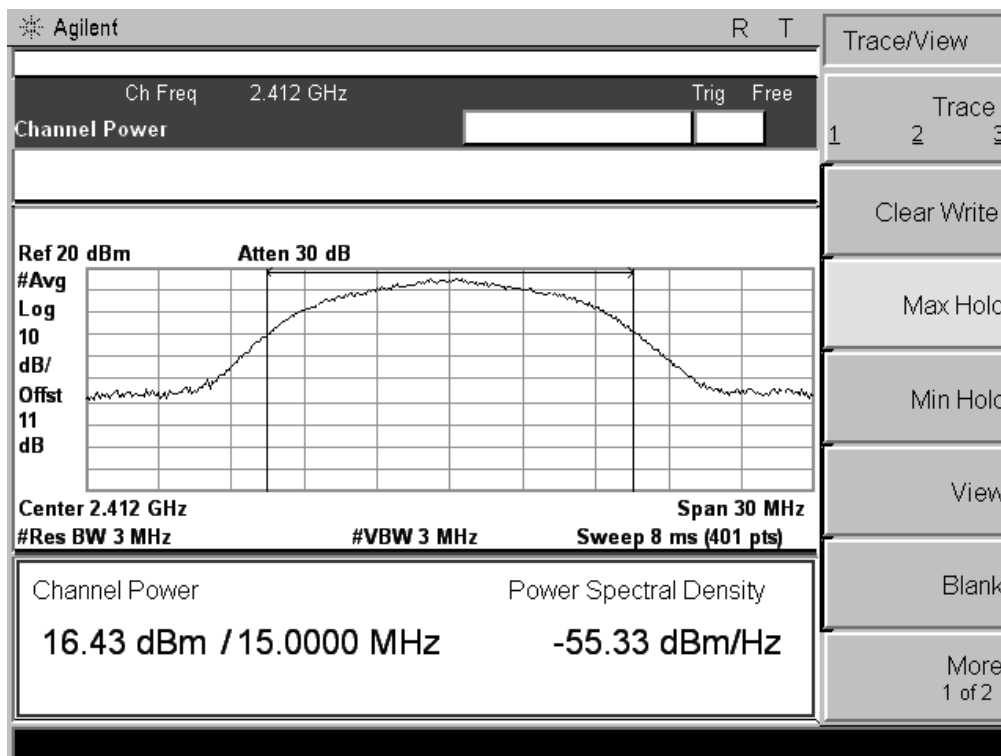


(CH Low)



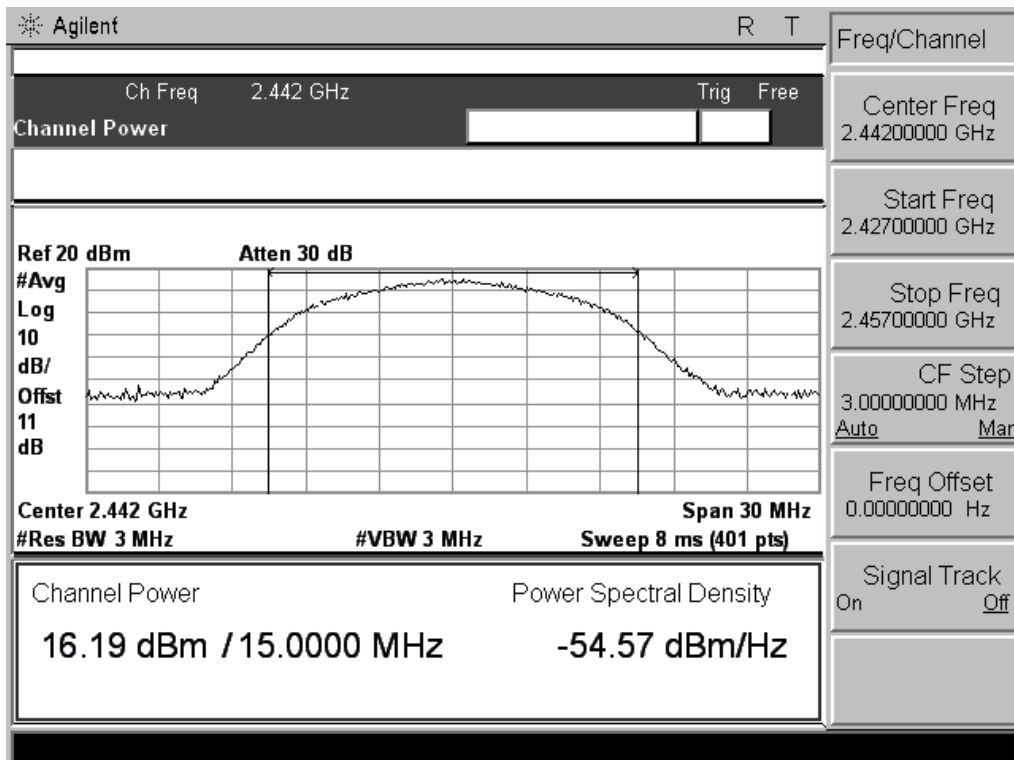


(CH Mid)

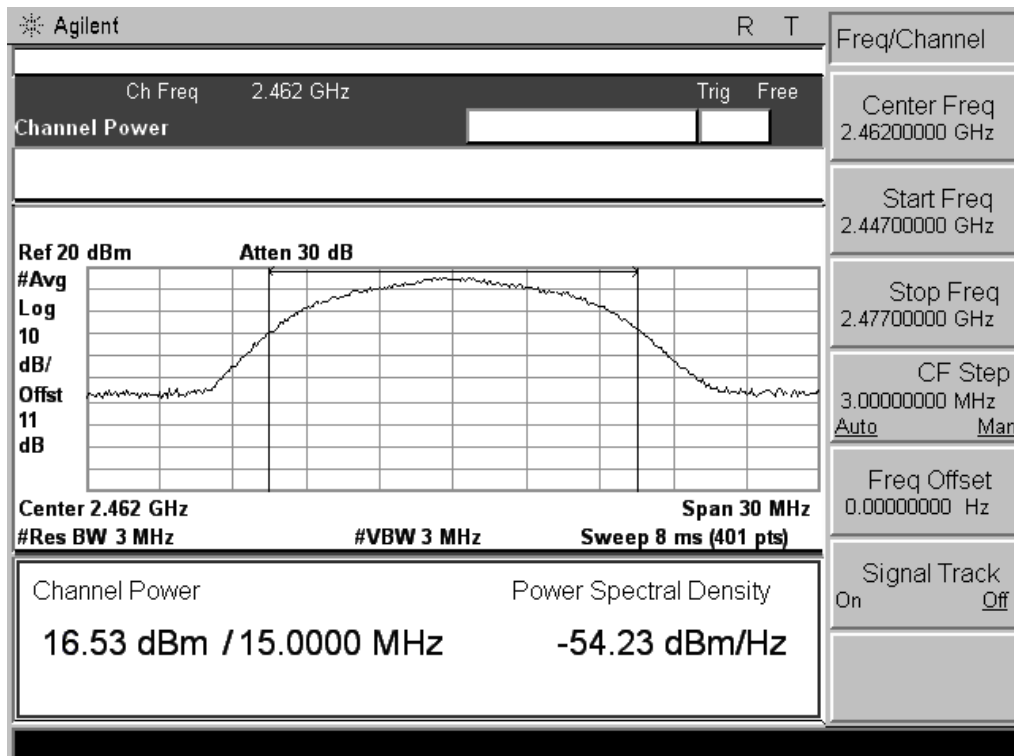


(CH High)

802.11g Test Mode


Channel	Frequency (MHz)	Rate (Mbps)	Measured Output Peak Power		Limit		Verdict
			dBm	W	dBm	W	
1	2412	6Mbps	13.21	0.021	30	1	PASS
6	2437	6Mbps	13.14	0.021			PASS
11	2462	6Mbps	13.54	0.023			PASS

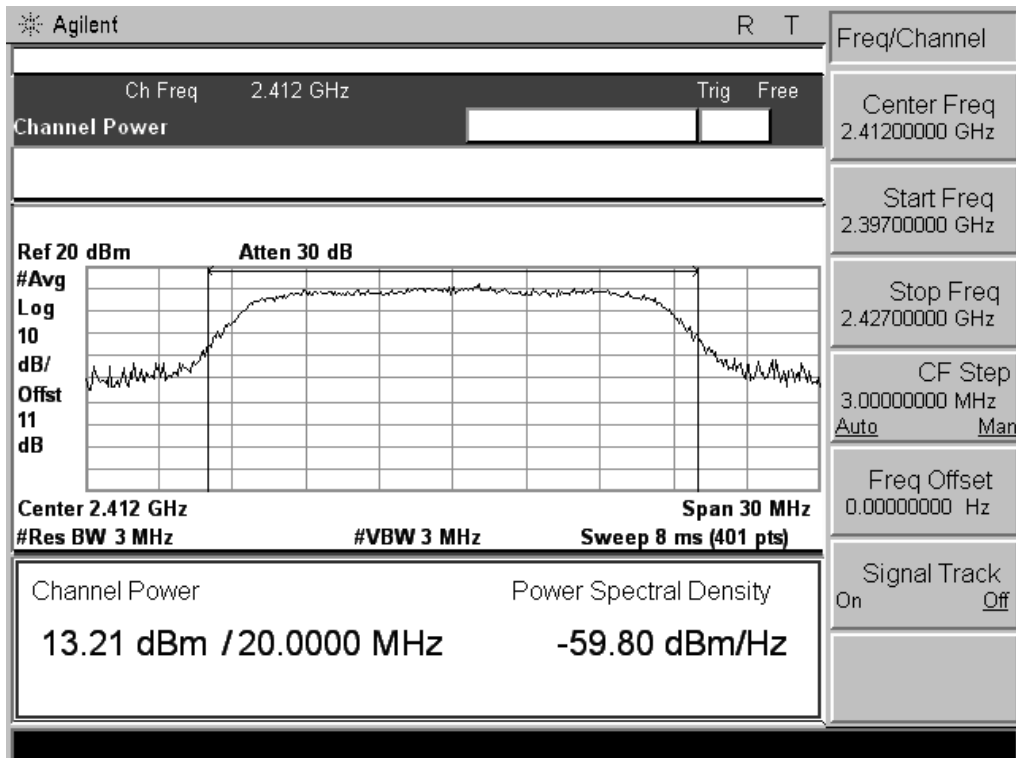

(CH Low)

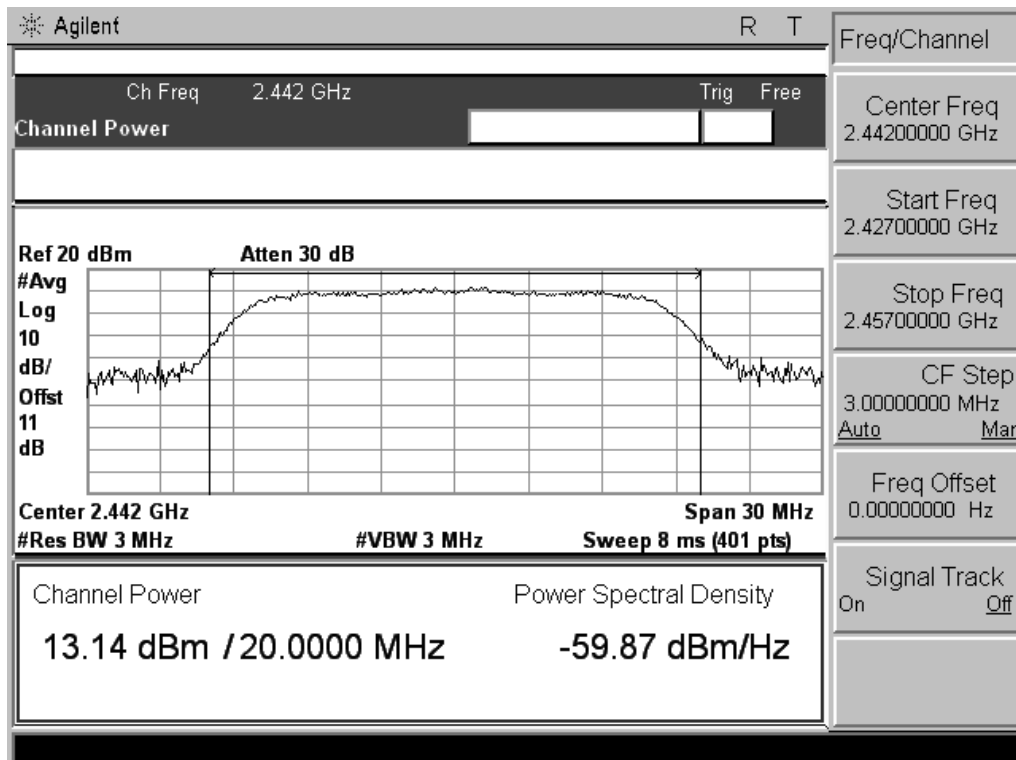


(CH Mid)

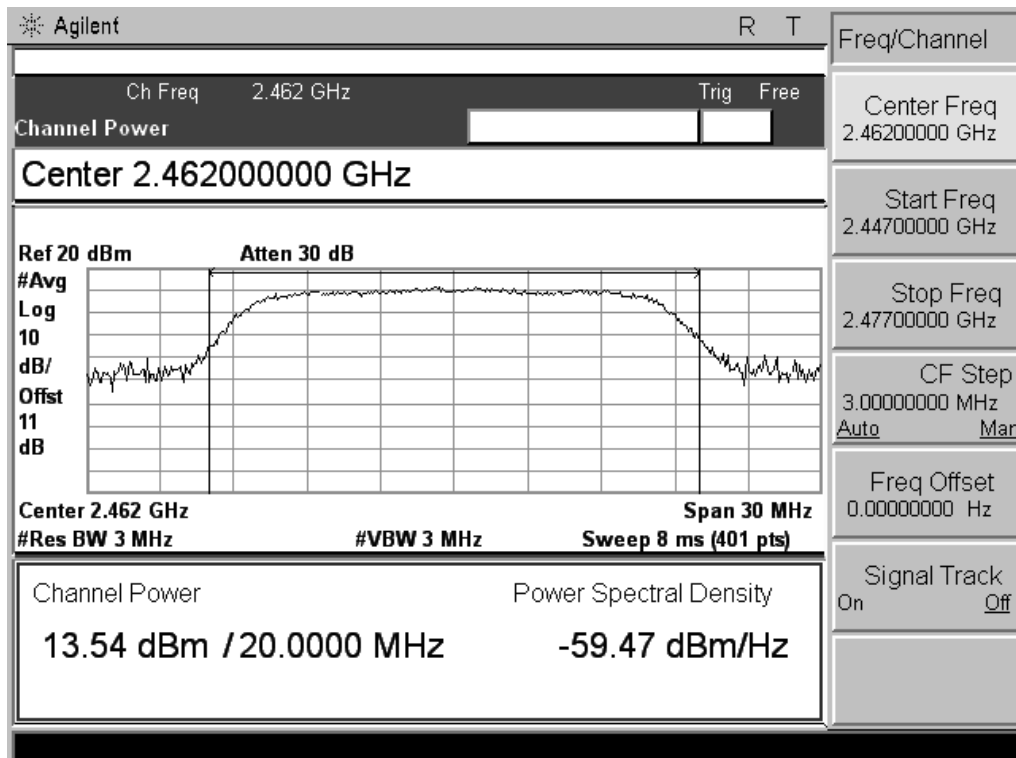


(CH High)

802.11n-20 Test Mode


Channel	Frequency (MHz)	Rate (Mbps)	Measured Output Peak Power		Limit		Verdict
			dBm	W	dBm	W	
1	2412	6.5Mbps	12.23	0.017	30	1	PASS
6	2437	6.5Mbps	12.31	0.017			PASS
11	2462	6.5Mbps	12.83	0.019			PASS

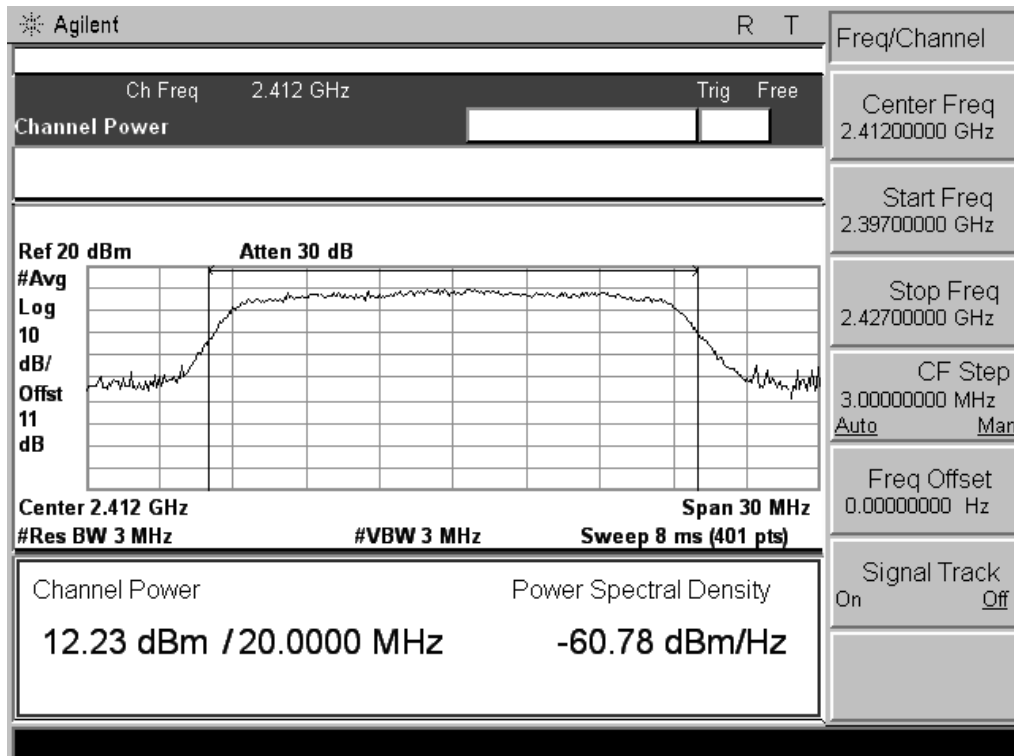

(CH Low)

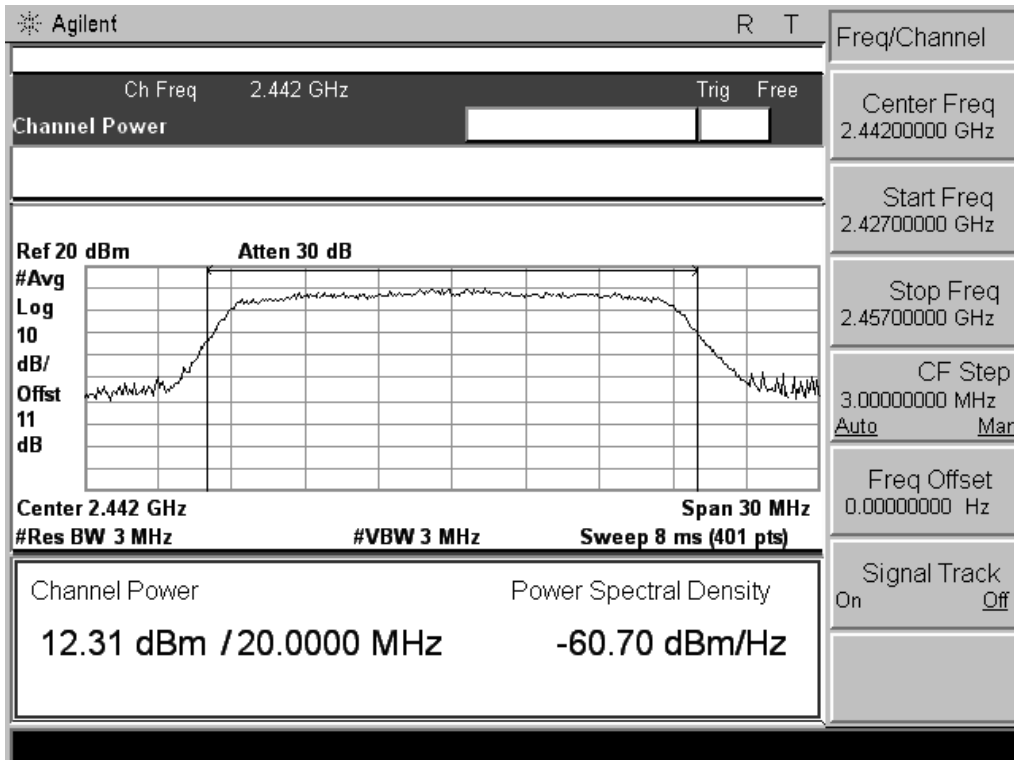

(CH Mid)

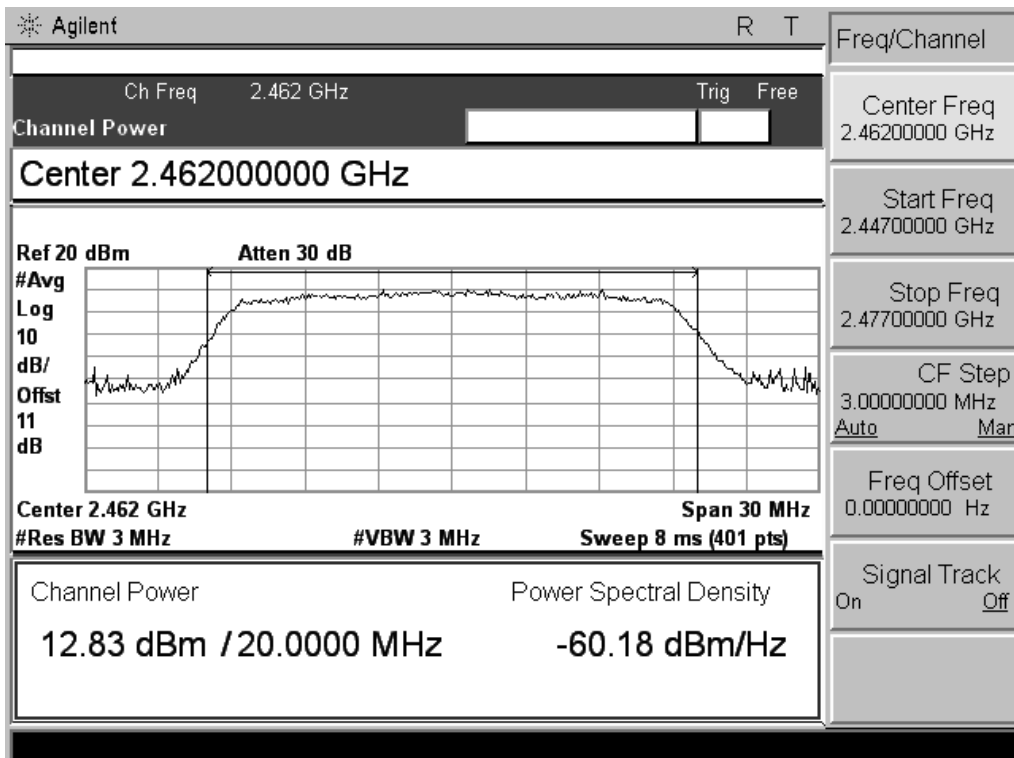


(CH High)

802.11n-40 Test Mode

Channel	Frequency (MHz)	Rate (Mbps)	Measured Output Peak Power		Limit		Verdict
			dBm	W	dBm	W	
2	2422	13.5Mbps	14.16	0.026	30	1	PASS
3	2437	13.5Mbps	13.36	0.022			PASS
9	2452	13.5Mbps	12.04	0.016			PASS

Agilent 14:22:27 Apr 28, 2013 R T

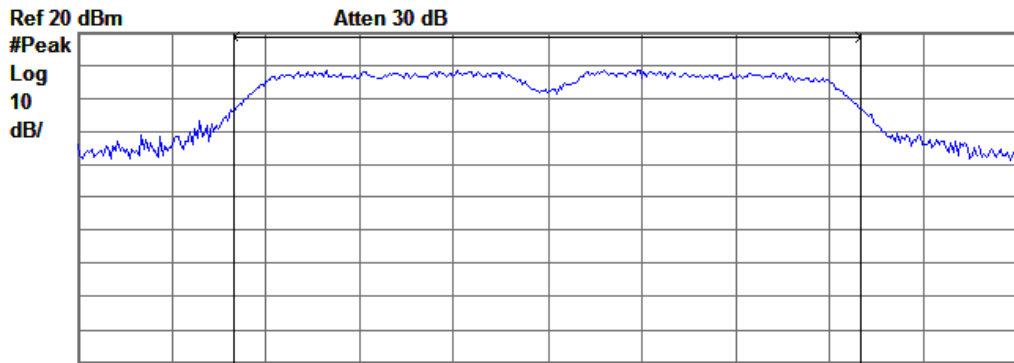

Center 2.422 GHz #Res BW 3 MHz #VBW 3 MHz Span 60 MHz Sweep 4 ms (401 pts)

Channel Power

14.16 dBm / 40.0000 MHz


Power Spectral Density

-61.87 dBm/Hz



(CH Low)

Agilent 14:21:53 Apr 28, 2013 R T

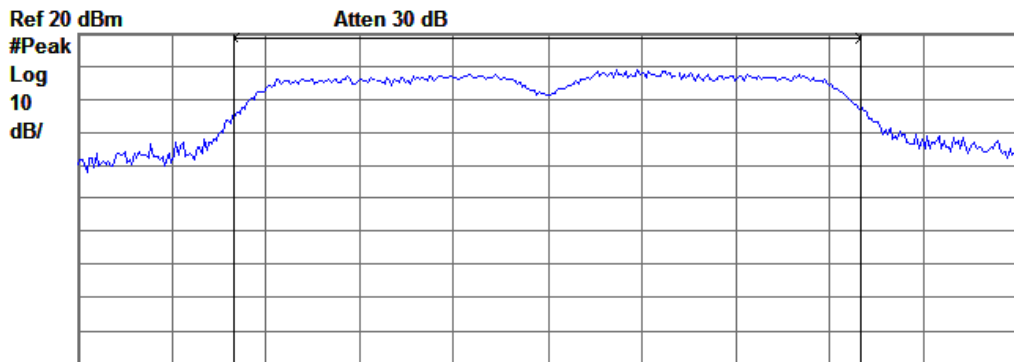


Center 2.437 GHz Span 60 MHz  
#Res BW 3 MHz #VBW 3 MHz Sweep 4 ms (401 pts)

Channel Power Power Spectral Density  
13.36 dBm / 40.0000 MHz -62.66 dBm/Hz



(CH Mid)

Agilent 14:21:08 Apr 28, 2013 R T

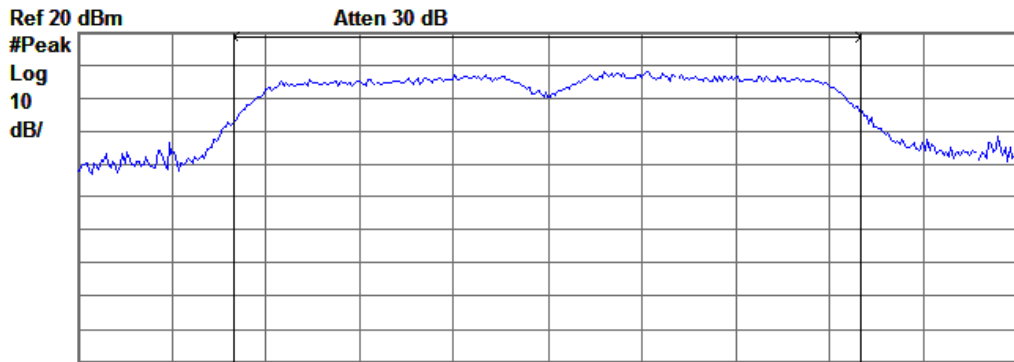

Center 2.452 GHz Span 60 MHz  
#Res BW 3 MHz #VBW 3 MHz Sweep 4 ms (401 pts)

Channel Power Power Spectral Density  
12.04 dBm / 40.0000 MHz -63.98 dBm/Hz



(CH High)

### 5.3 Conducted Spurious Emission

#### 5.3.1 Definition

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.


#### 5.3.2 Test Description

See section 5.1.2 of this report.

#### 5.3.3 Test Result


The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.

#### 802.11b Test Mode

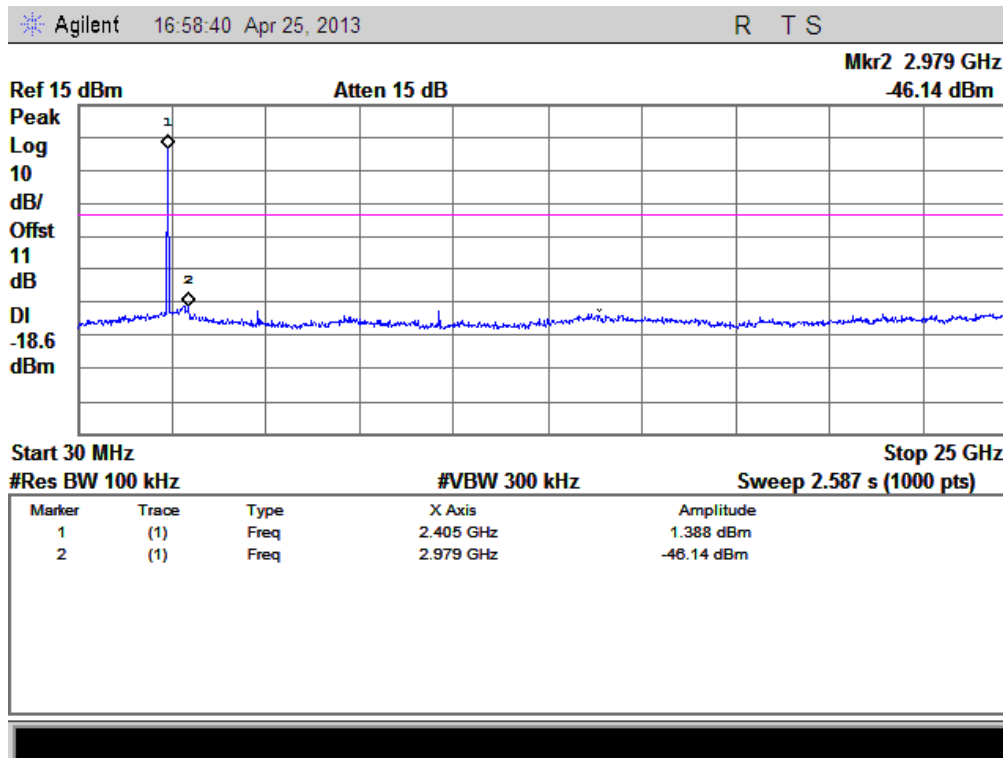


(CH Low, 30MHz to 25GHz)



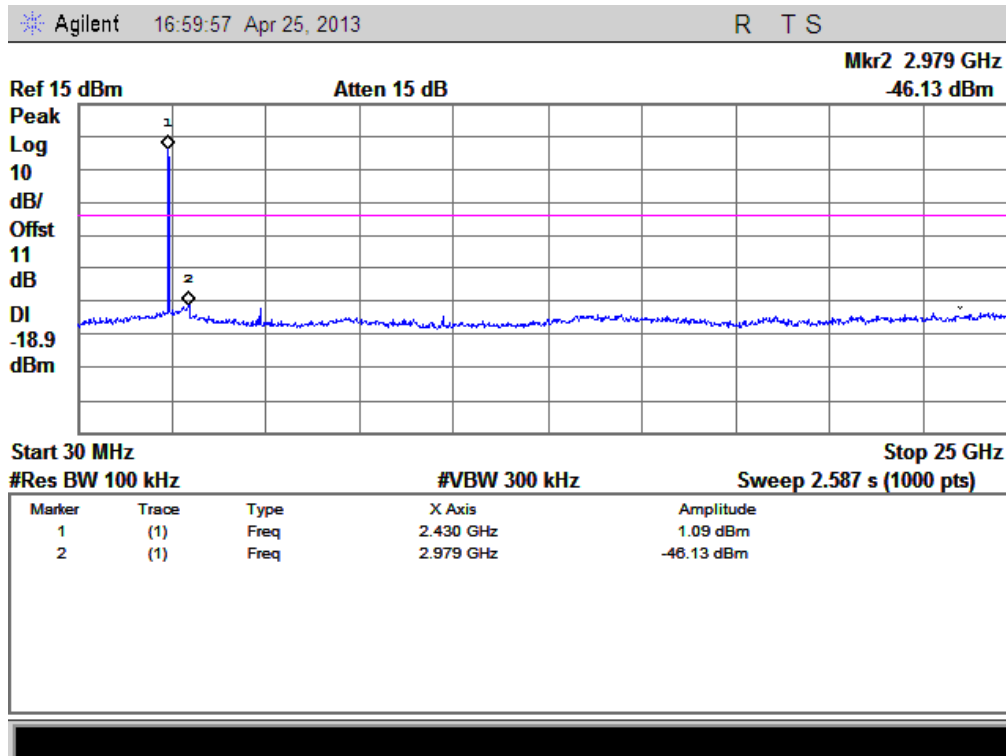


(CH Mid, 30MHz to 25GHz)

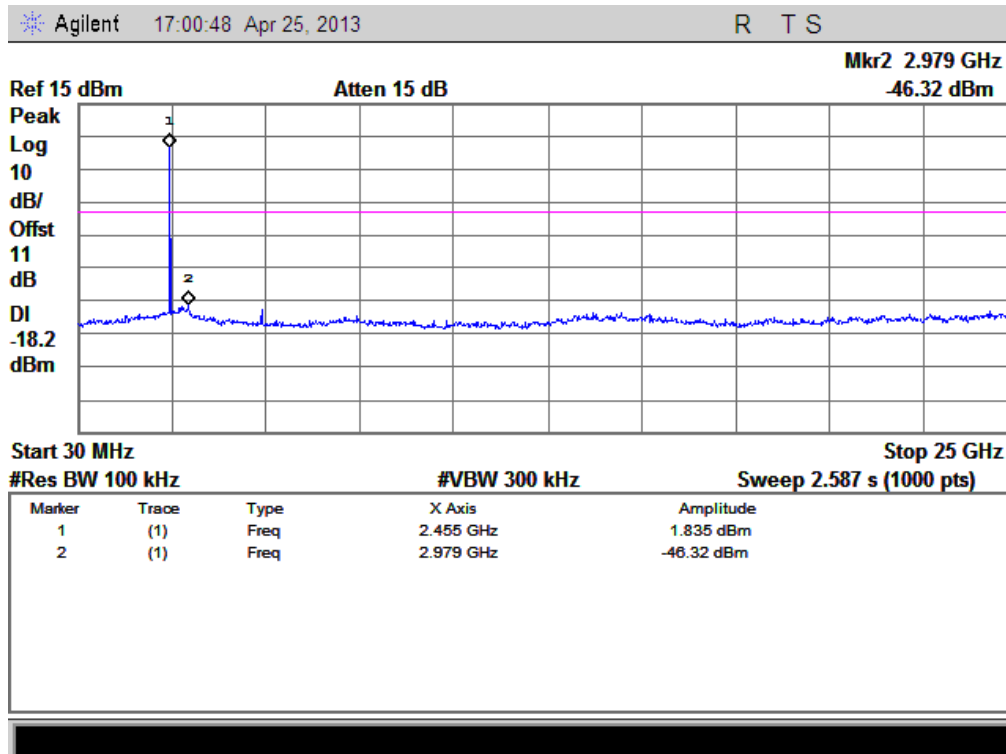


(CH High, 30MHz to 25GHz)

Note: The power of the Module transmitting frequency should be ignored.


802.11g Test Mode

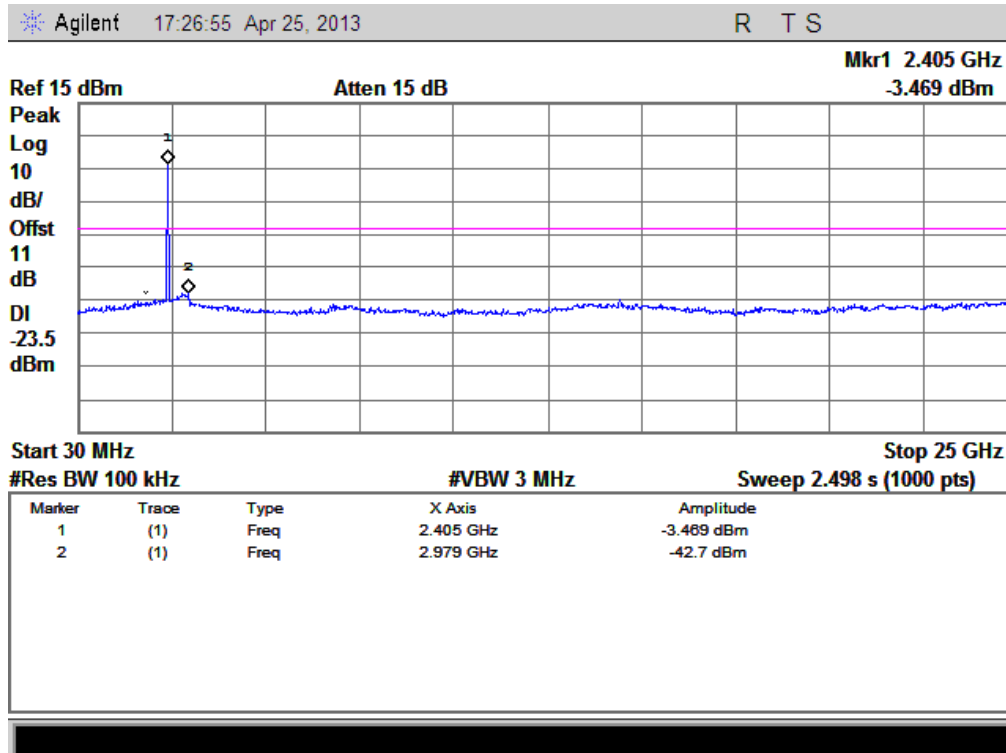

(CH Low, 30MHz to 25GHz)

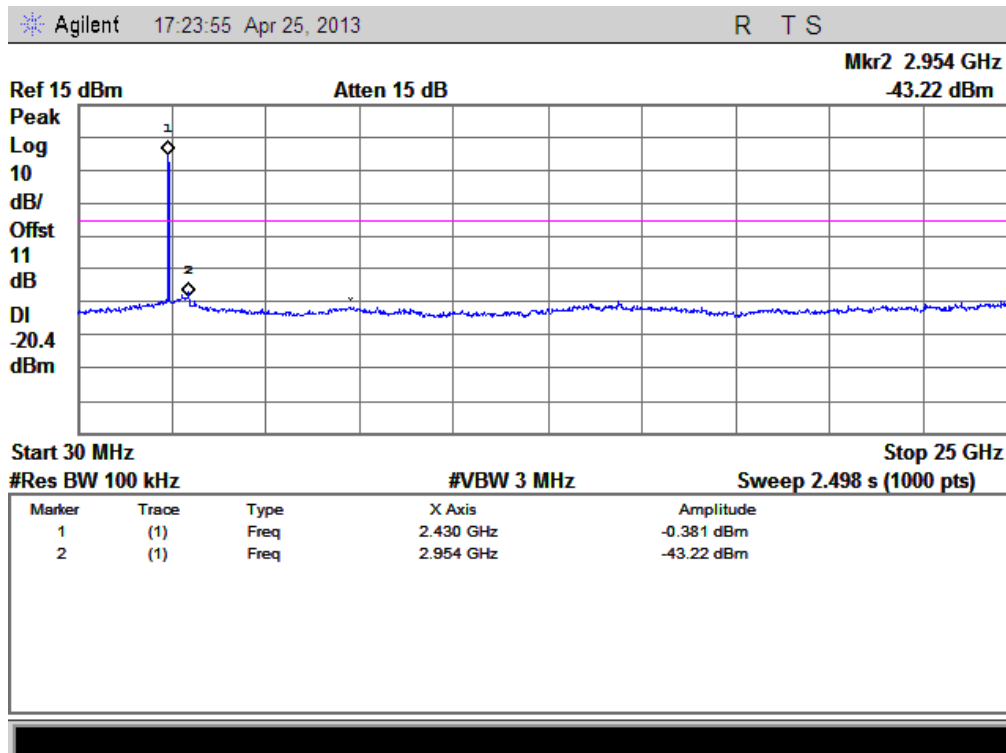


(CH Mid, 30MHz to 25GHz)

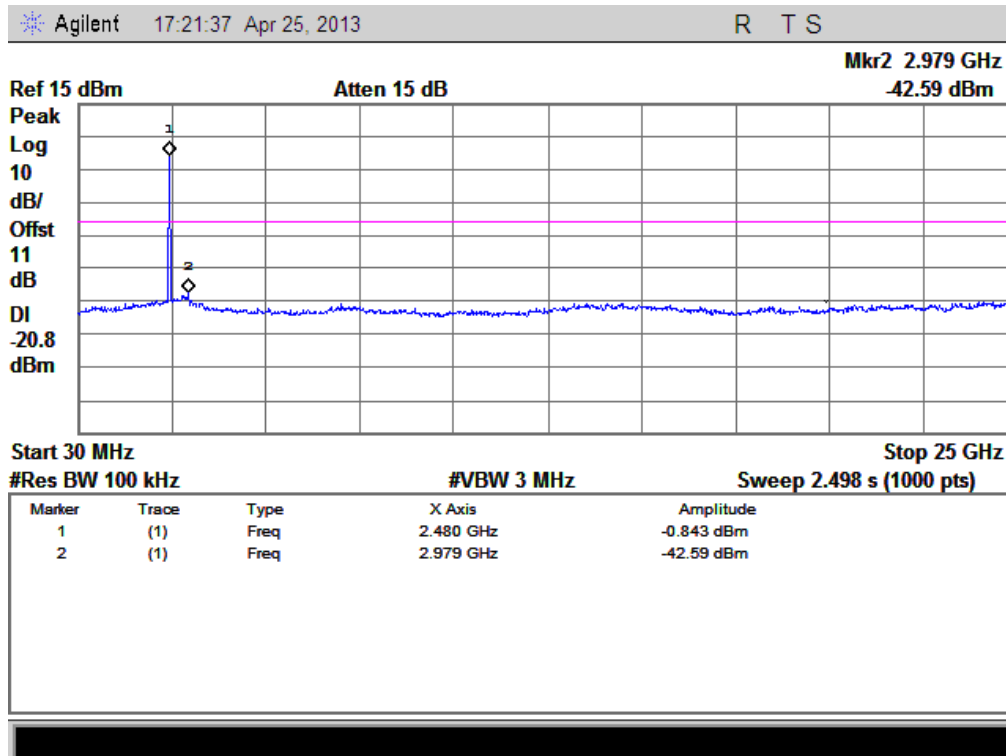


(CH High, 30MHz to 25GHz)

Note: The power of the Module transmitting frequency should be ignored.


802.11n-20 Test Mode

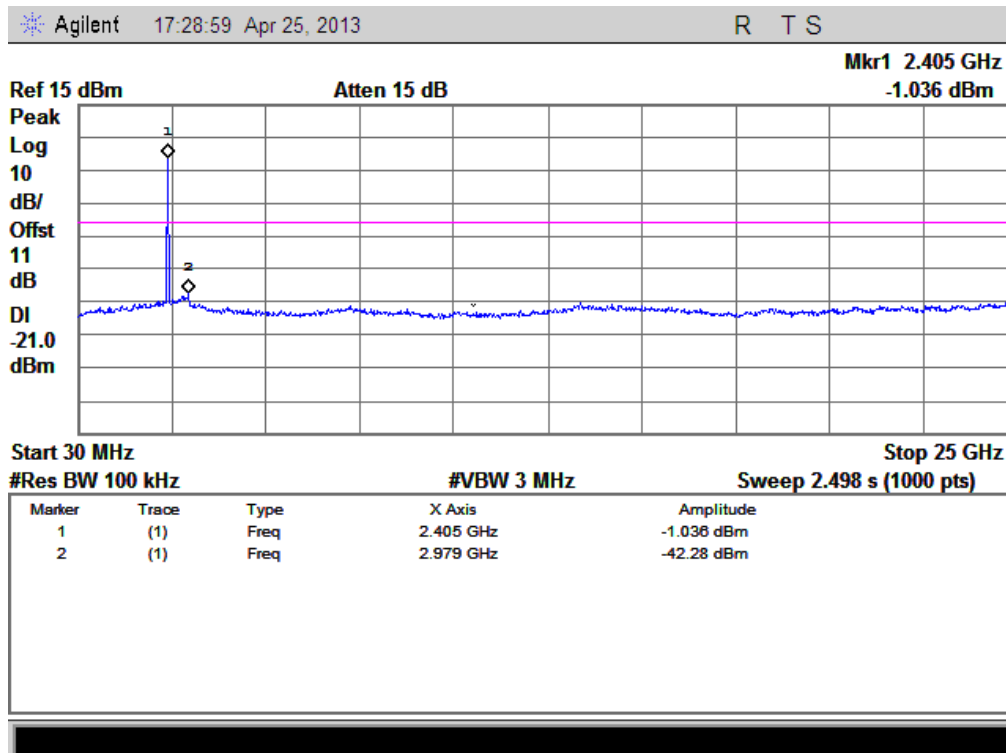

(CH Low, 30MHz to 25GHz)

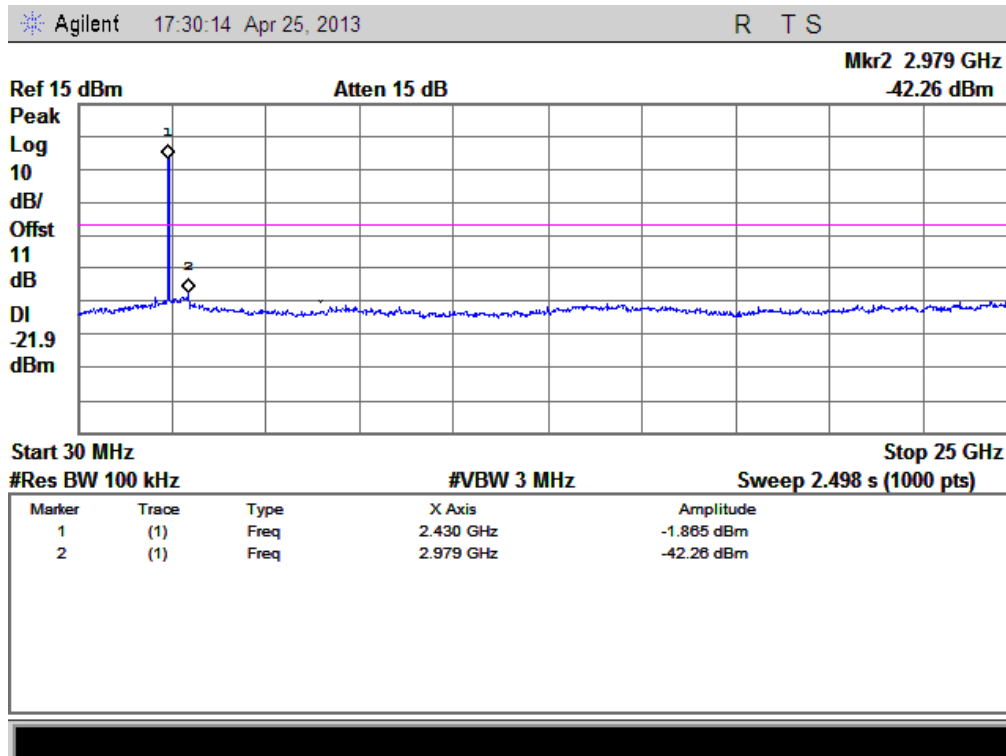


(CH Mid, 30MHz to 25GHz)

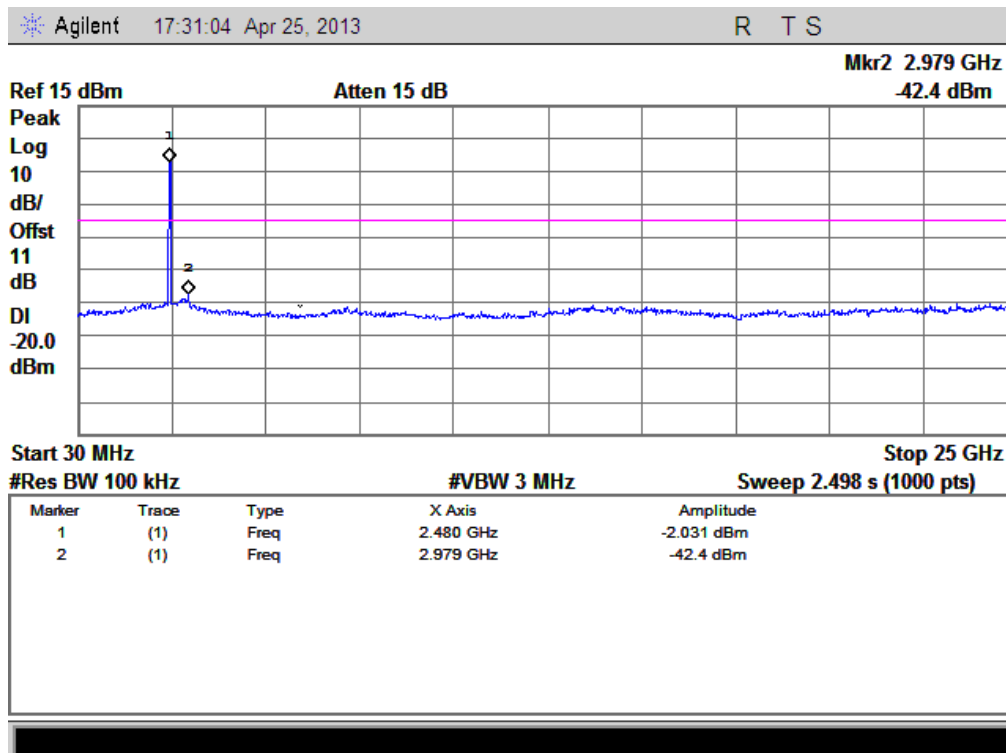


(CH High, 30MHz to 25GHz)

Note: The power of the Module transmitting frequency should be ignored.


802.11n-40 Test Mode

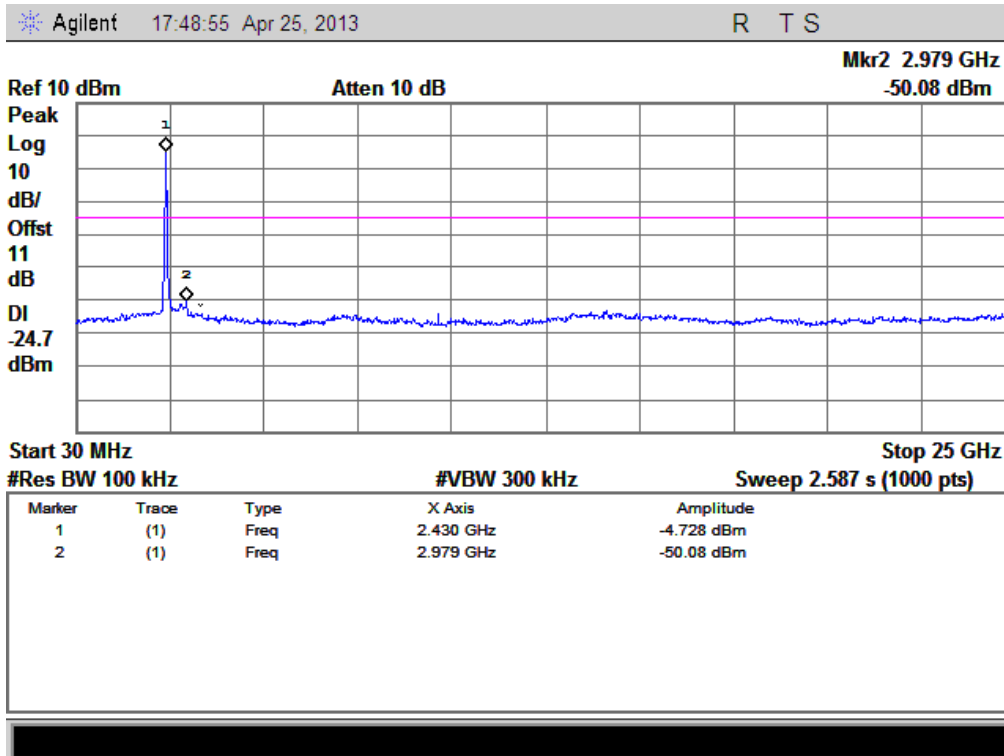

(CH Low, 30MHz to 25GHz)

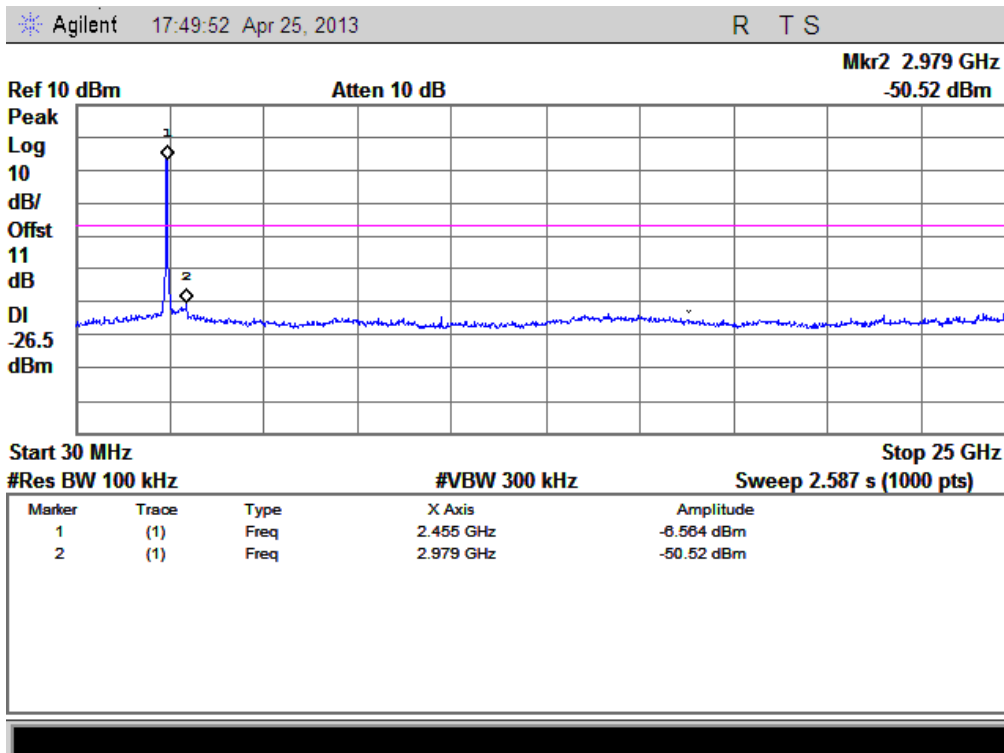

(CH Mid, 30MHz to 25GHz)

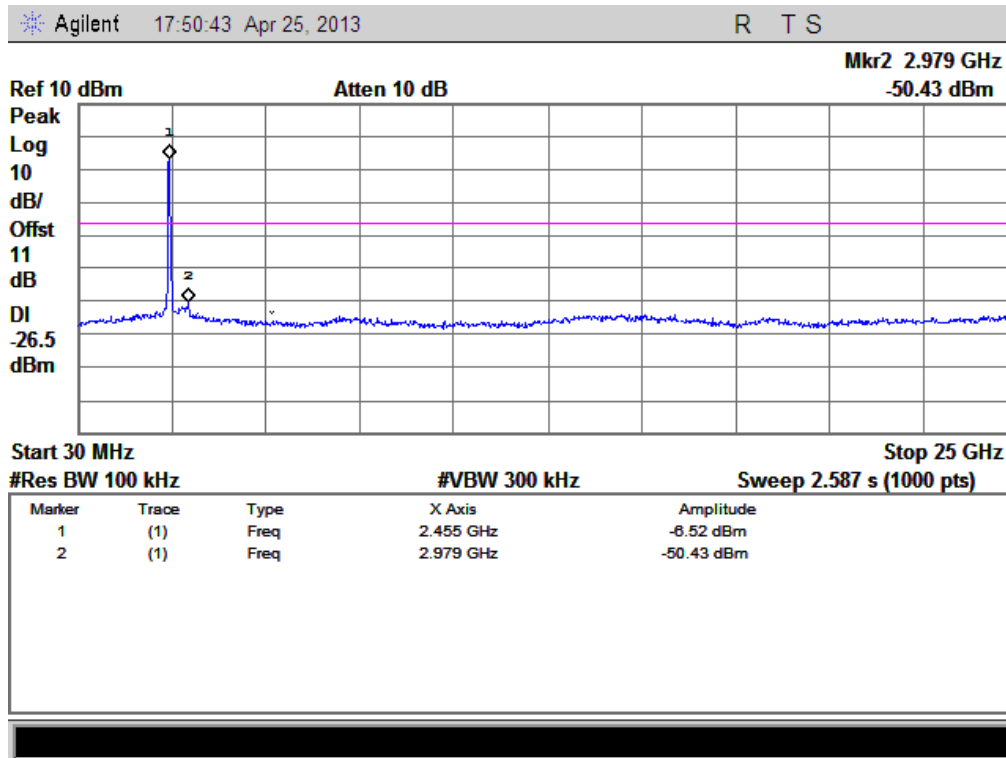

(CH High, 30MHz to 25GHz)

Note: The power of the Module transmitting frequency should be ignored.

## 5.4 Band Edge

### 5.4.1 Definition

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.


### 5.4.2 Test Description

See section 5.1.2 of this report.


### 5.4.3 Test Result

The EUT operates at continuous transmit test mode. The test data of the lowest and highest channels are tested to verify the band edge emissions.

#### 802.11b Test Mode

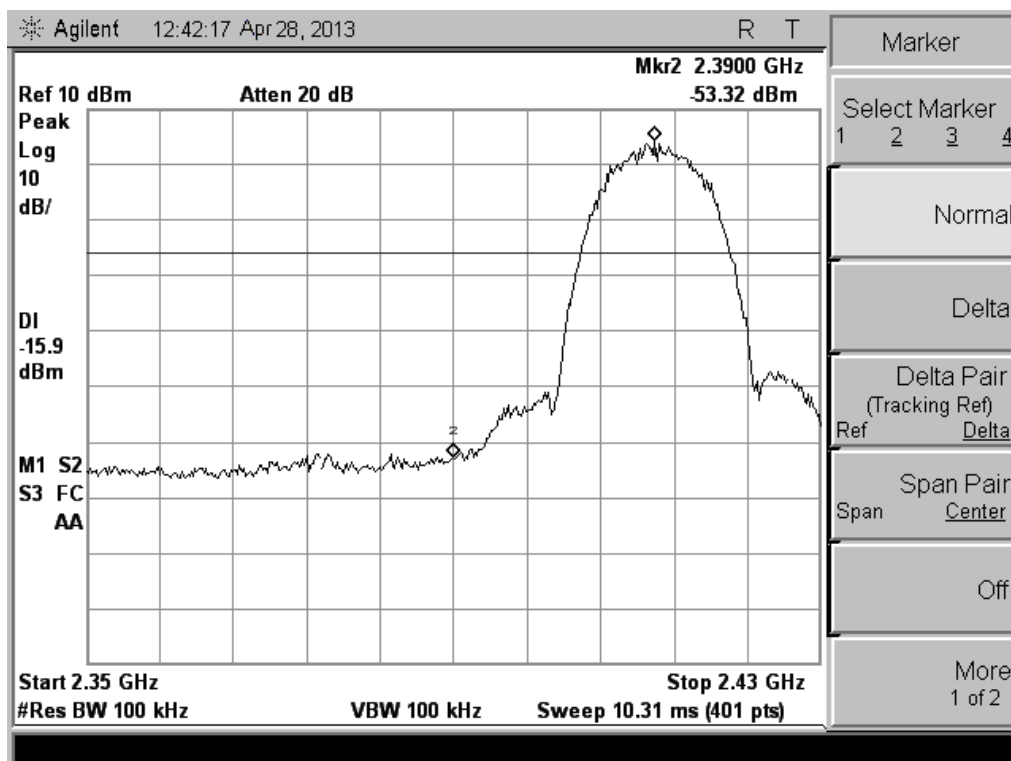


(CH Low)

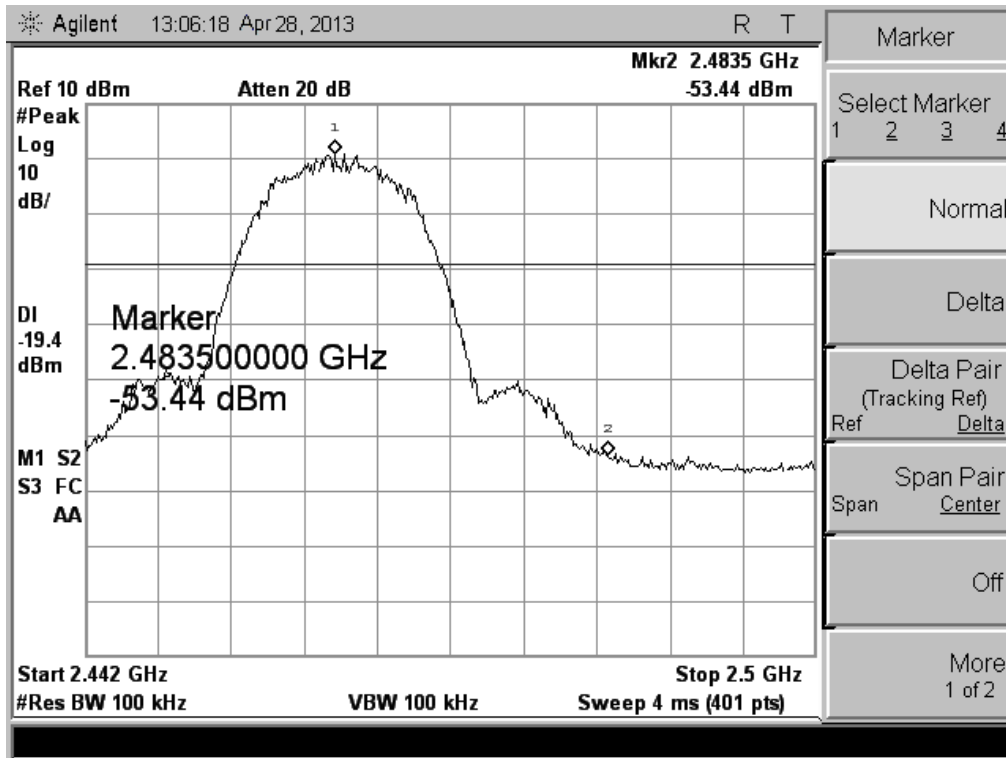


(CH High)

802.11g Test Mode

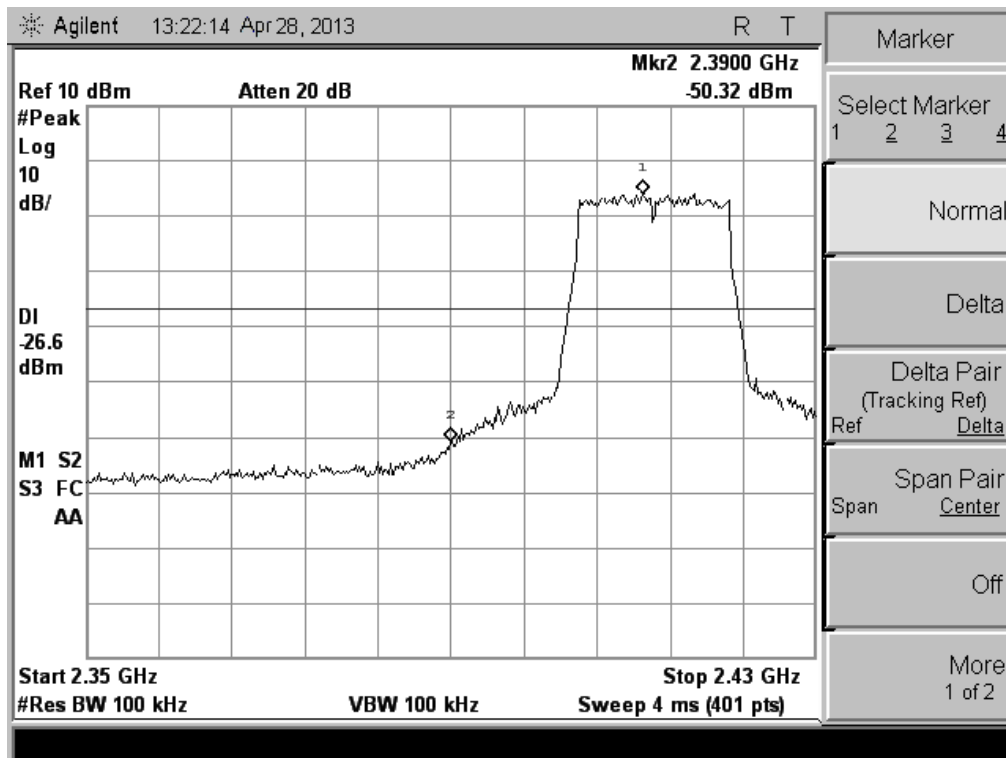


(CH Low)



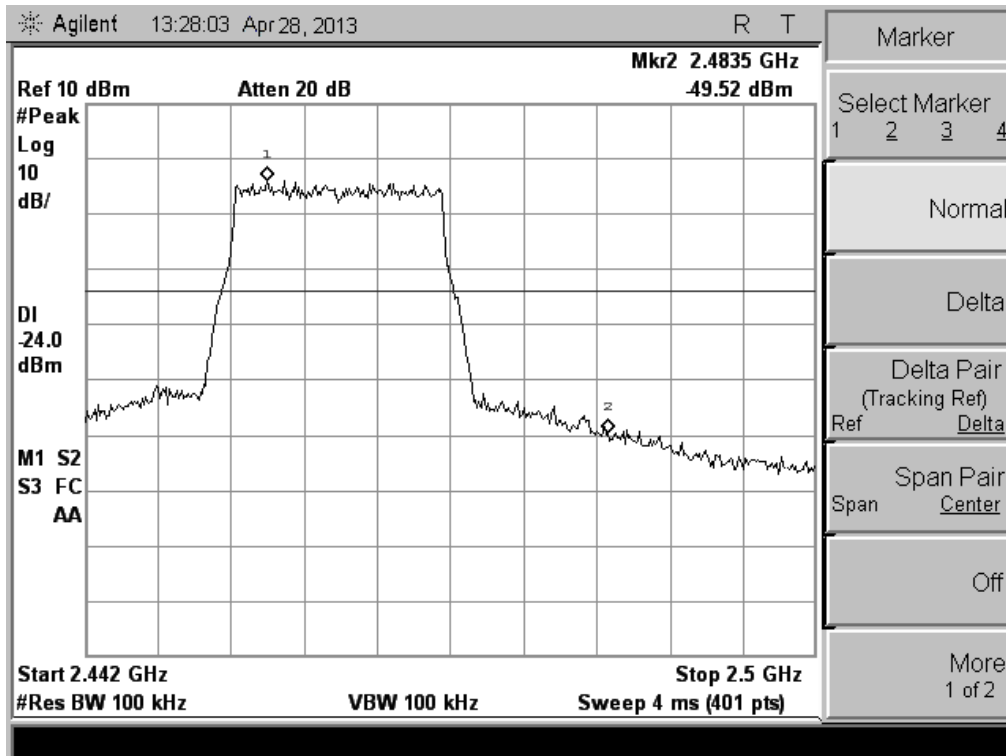


(CH High, Peak)

802.11n-20 Test Mode

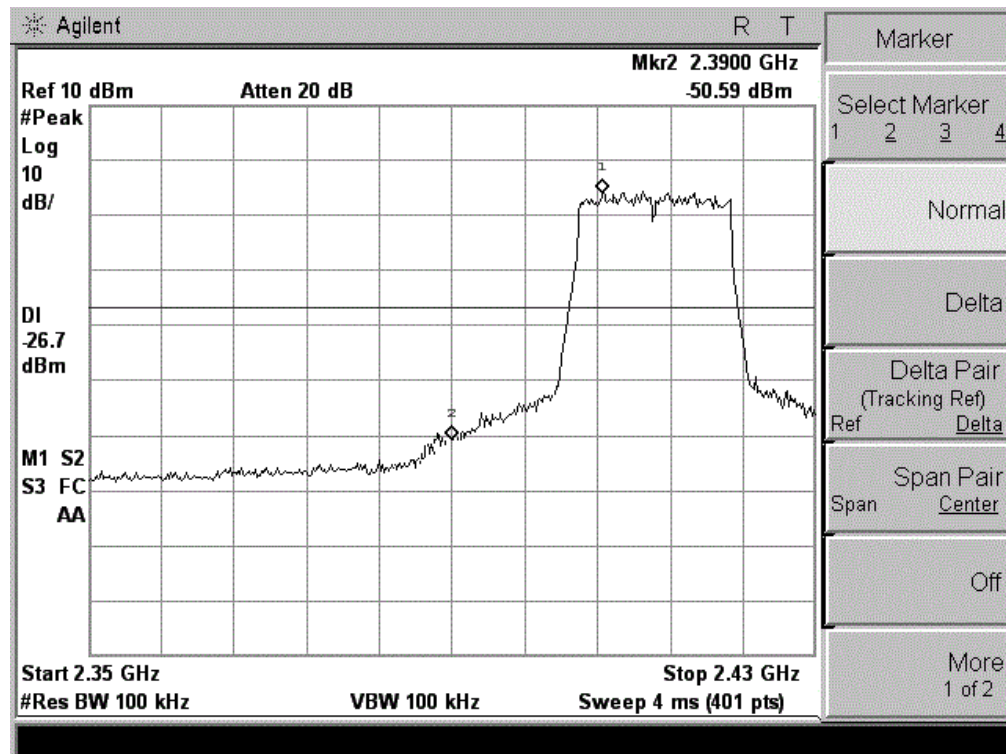


(CH Low)

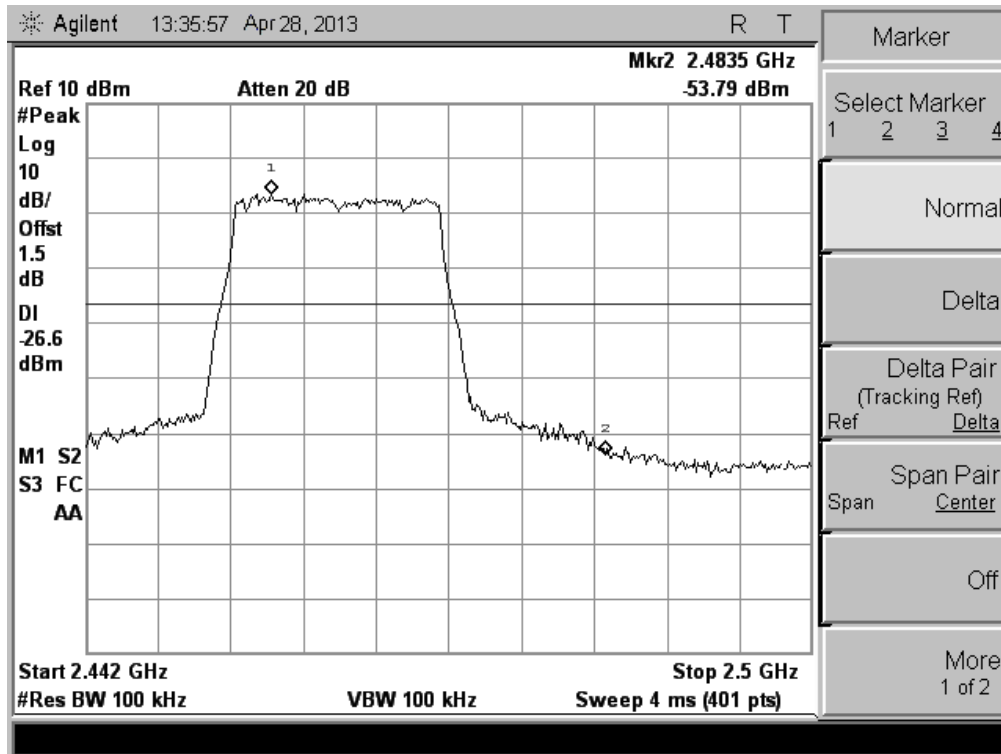


(CH High, Peak)

802.11n-40 Test Mode

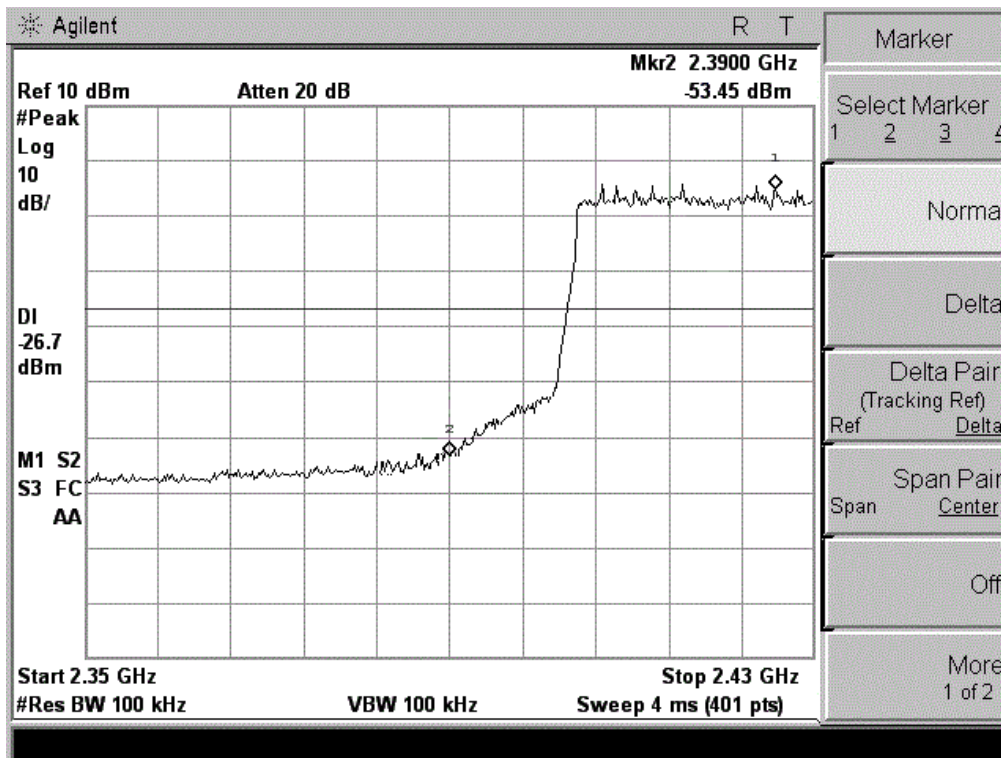

(CH Low)

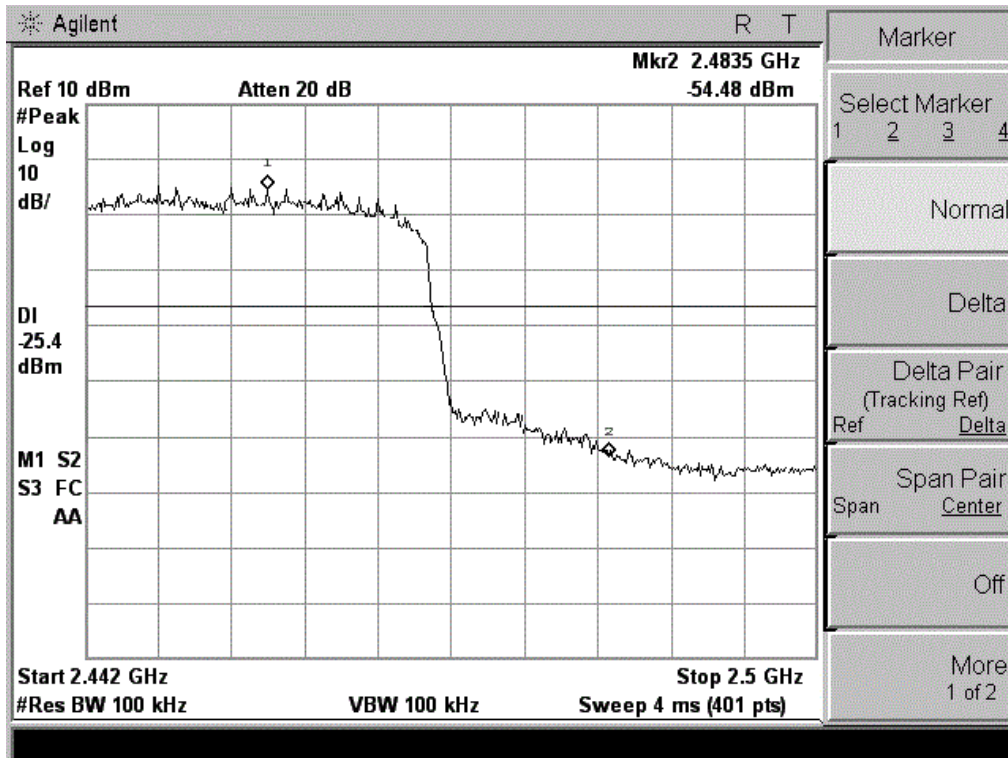

(CH High, Peak)

## 5.5 Power Spectral Density (PSD)

### 5.5.1 Definition

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 5.5.2 Test Description


See section 5.1.2 of this report.


### 5.5.3 Test Result

The lowest, middle and highest channels are tested to verify the power spectral density.


#### 802.11b Test Mode

Channel	Frequency (MHz)	PSD (dBm)	Limits(dBm)	Result
1	2412	-12.50	≤8	PASS
6	2437	-11.39	≤8	PASS
11	2462	-11.98	≤8	PASS

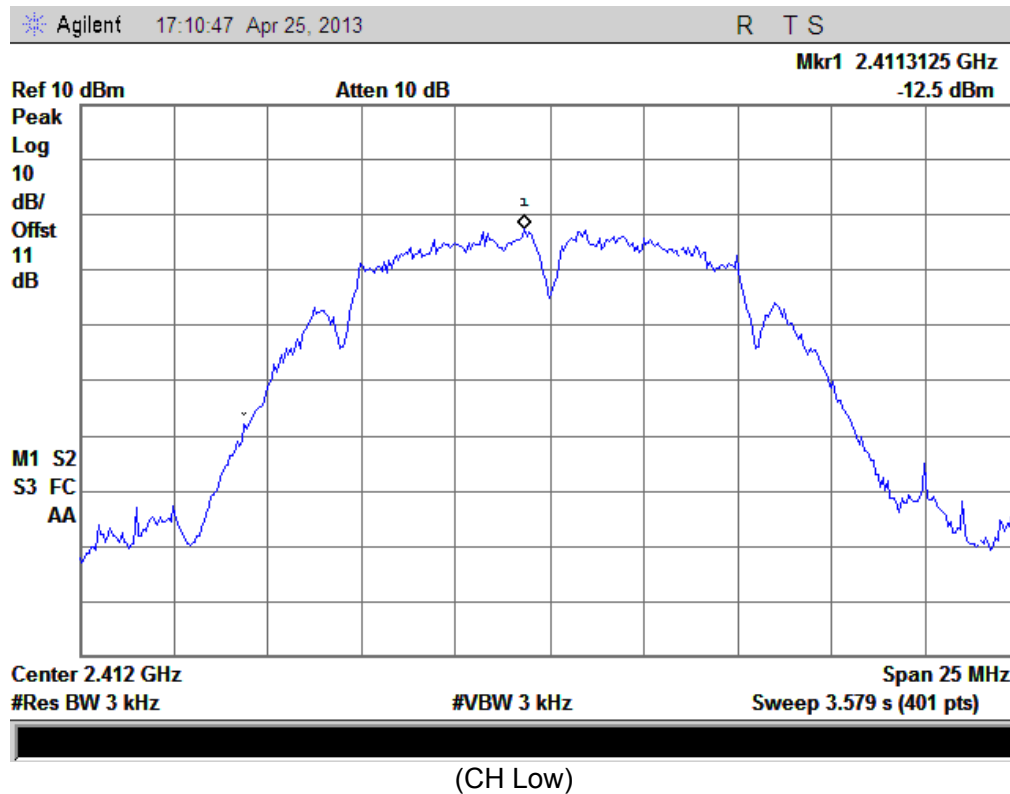

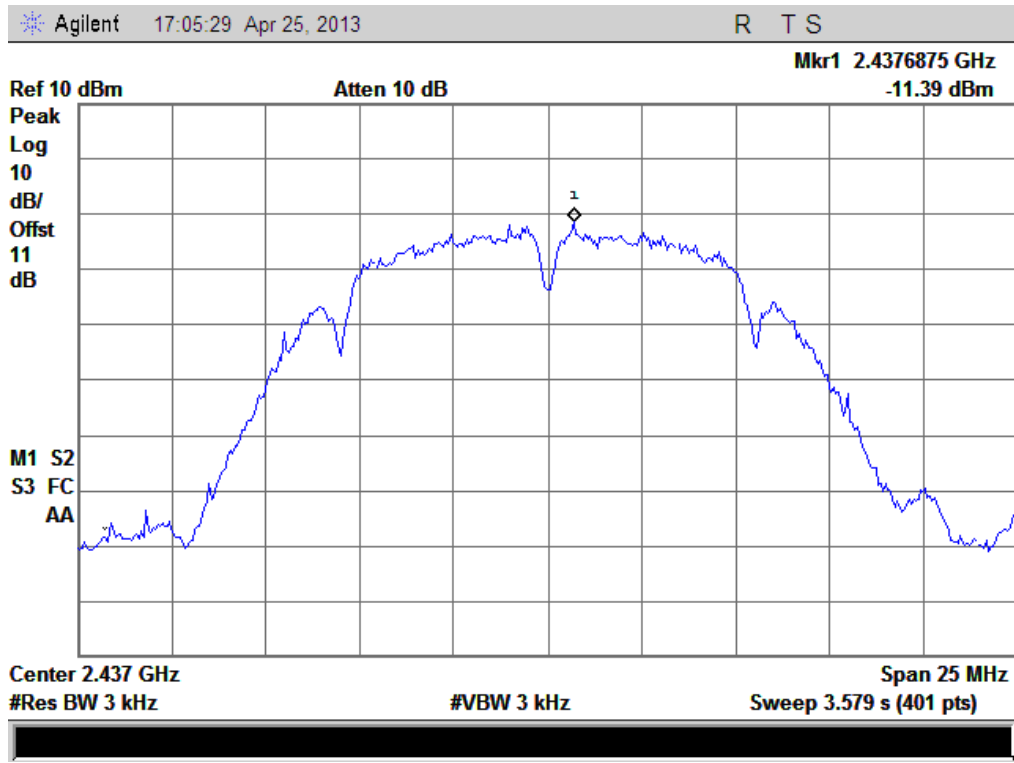



(CH Mid)

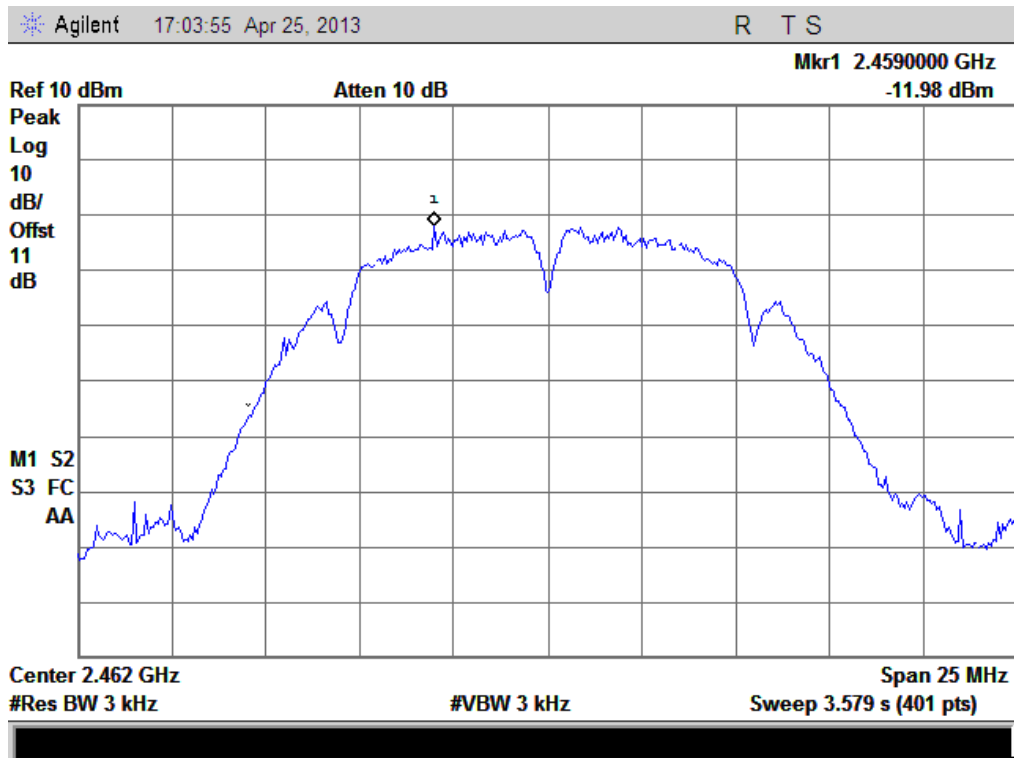


(CH High)

802.11g Test Mode

Channel	Frequency (MHz)	PSD (dBm)	Limits(dBm)	Result
1	2412	-16.30	≤8	PASS
6	2437	-14.78	≤8	PASS
11	2462	-15.28	≤8	PASS

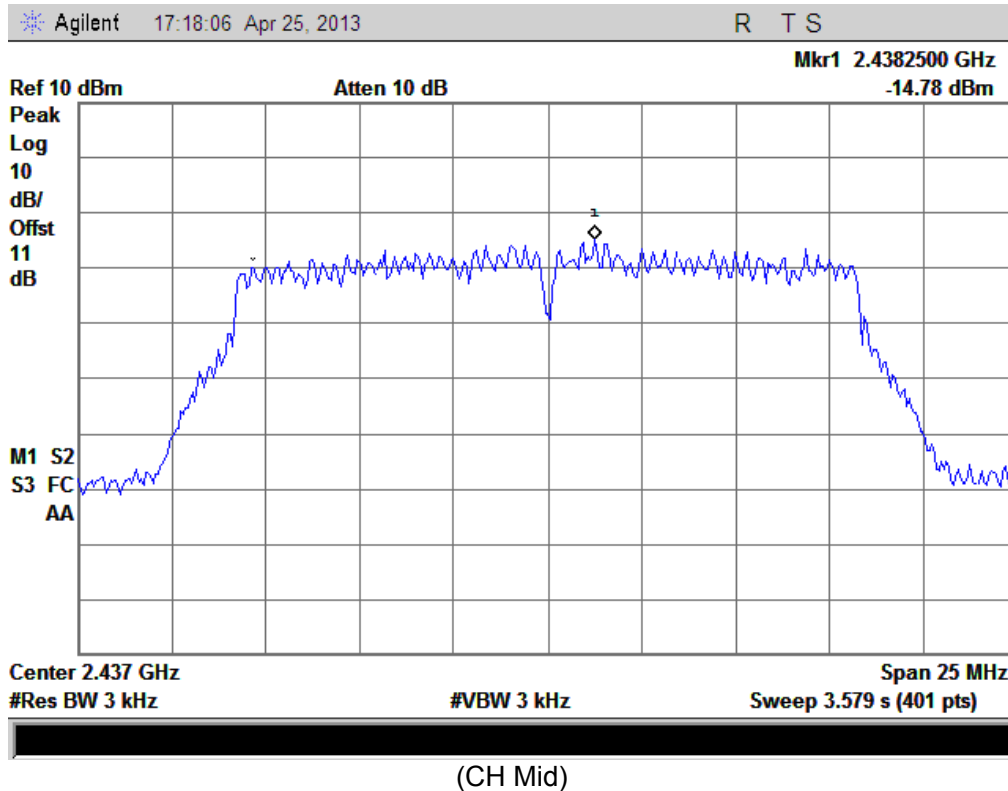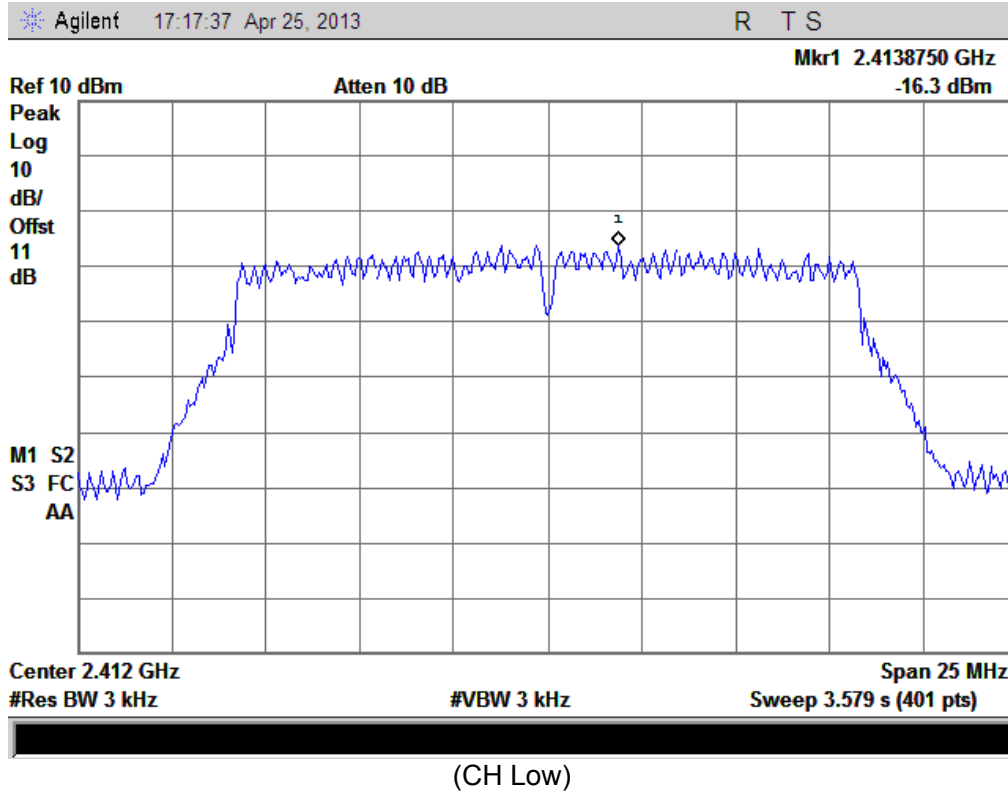


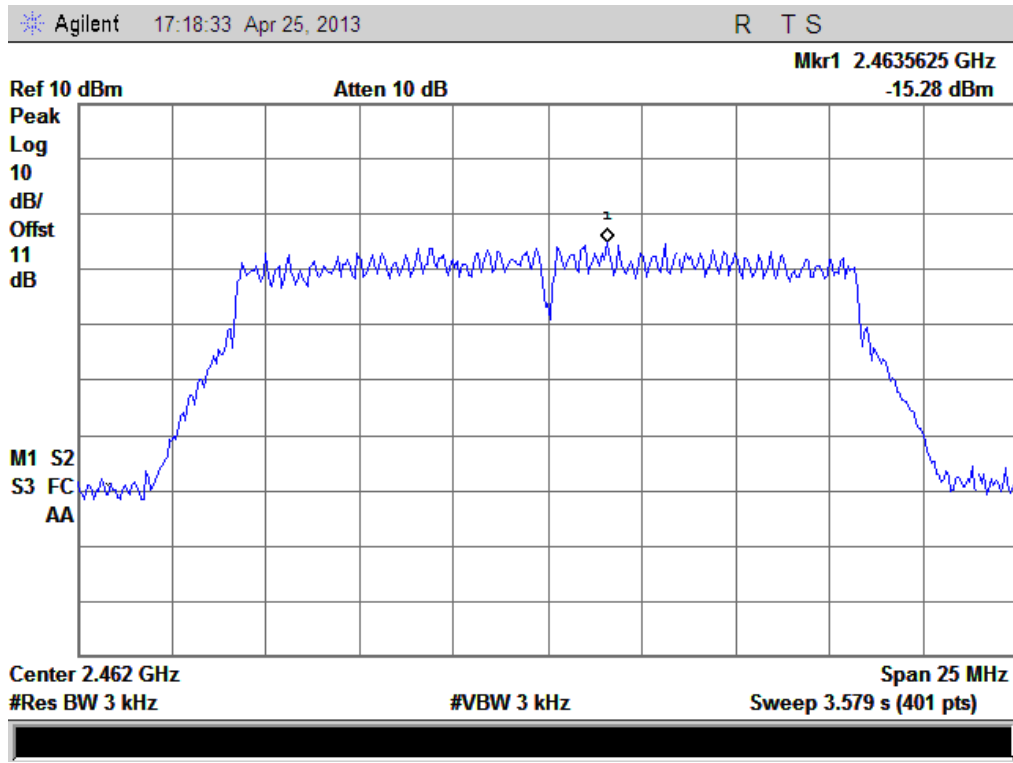


(CH High)

802.11n-20 Test Mode


Channel	Frequency (MHz)	PSD (dBm)	Limits(dBm)	Result
1	2412	-16.67	≤8	PASS
6	2437	-16.09	≤8	PASS
11	2462	-14.50	≤8	PASS

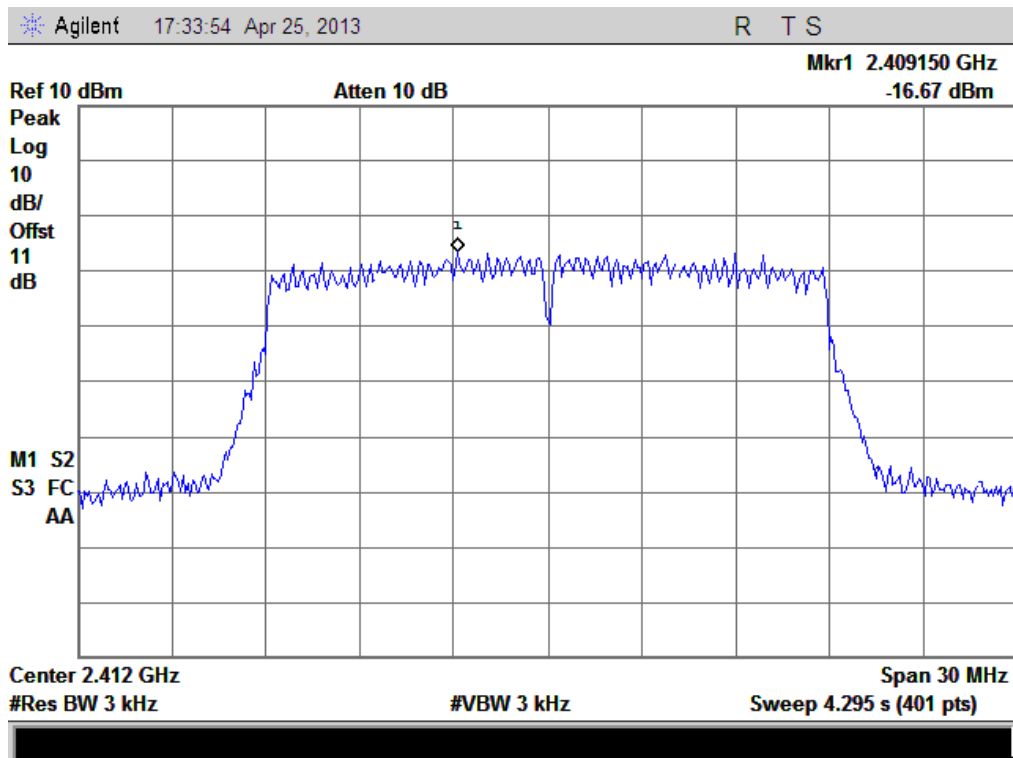

(CH Low)

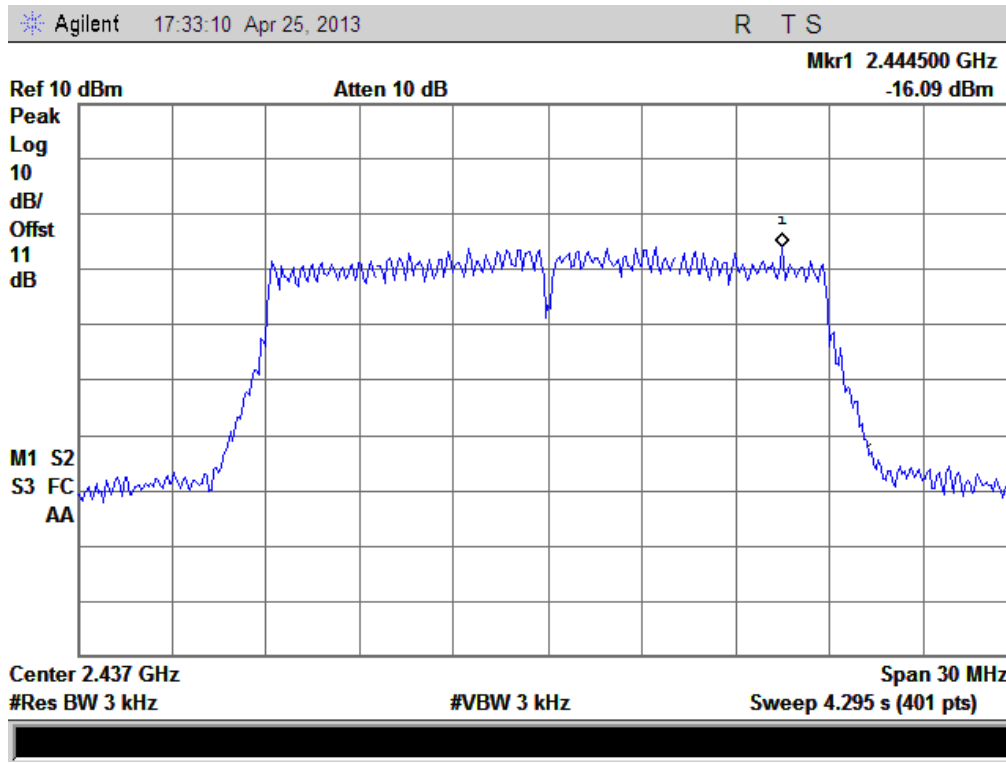

(CH Mid)


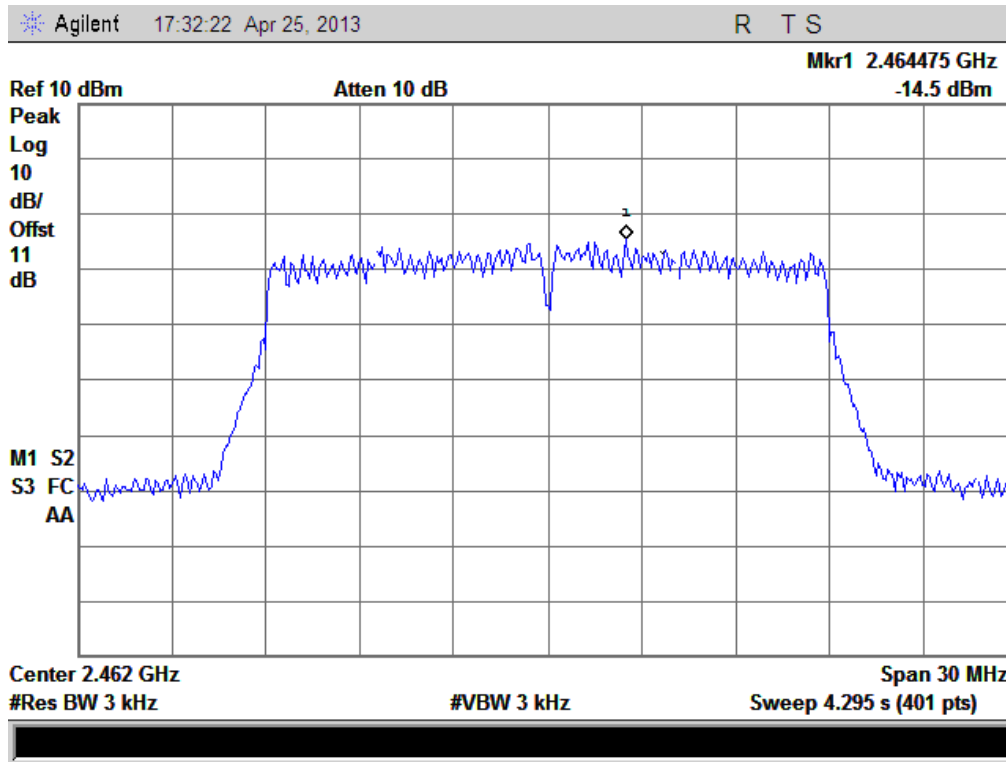



(CH High)



802.11n-40 Test Mode

Channel	Frequency (MHz)	PSD (dBm)	Limits(dBm)	Result
3	2422	-7.512	≤8	PASS
6	2437	-6.724	≤8	PASS
9	2452	-6.553	≤8	PASS

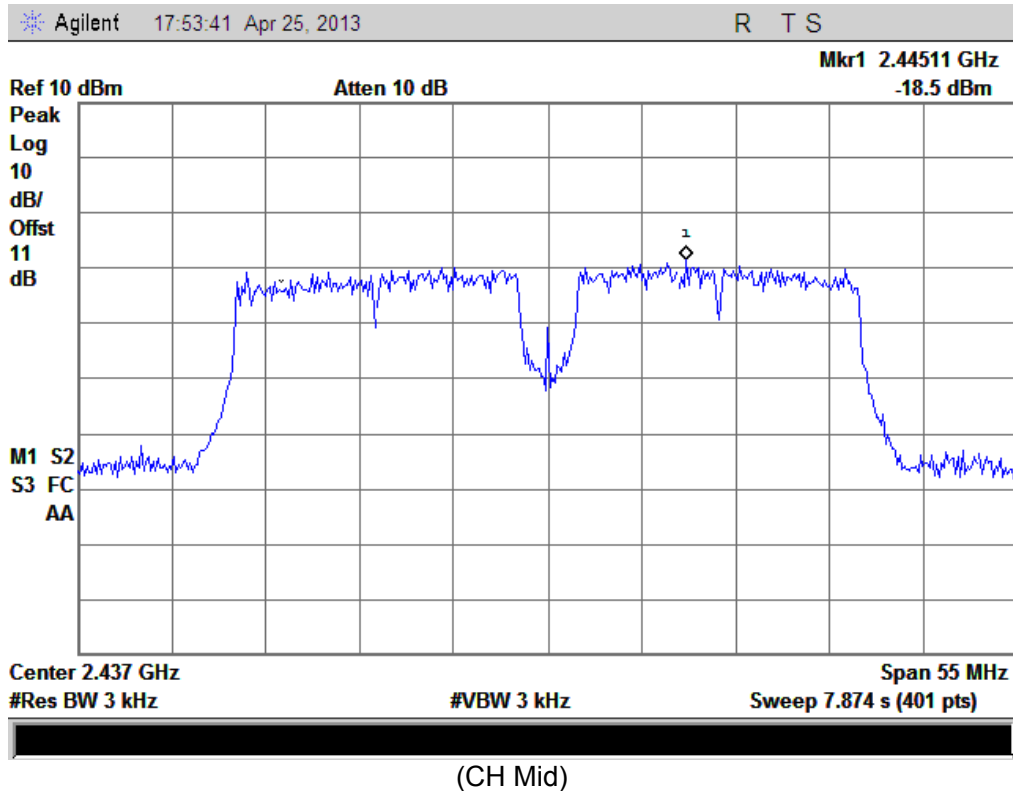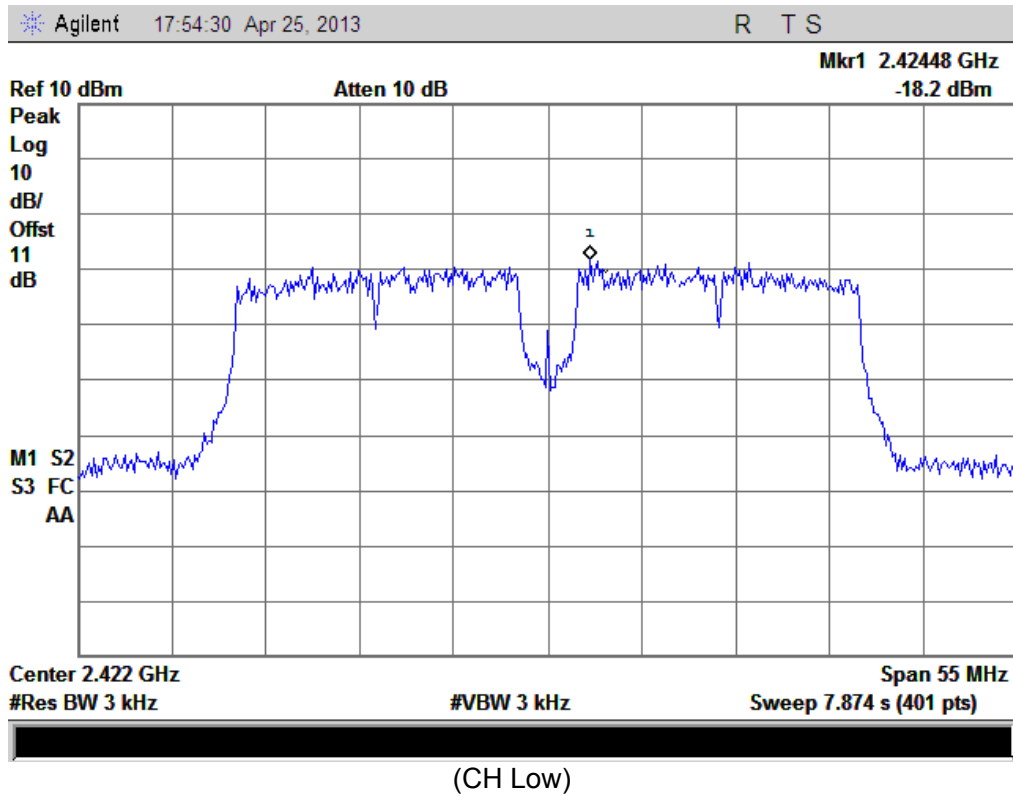

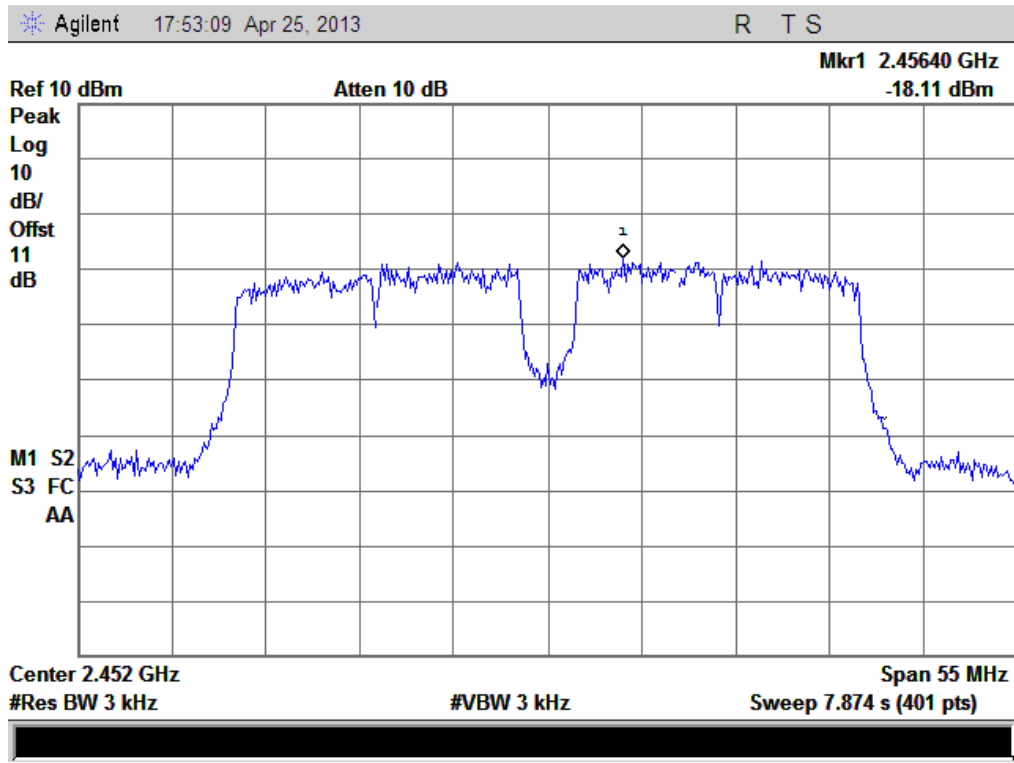

(CH High)

## 5.6 Conducted Emission

### 5.6.1 Definition

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN).


Frequency	Maximum RF Line Voltage	
	Q.P.( dBuV)	Average( dBuV)
150kHz-500kHz	66-56	56-46
500kHz-5MHz	56	46
5MHz-30MHz	60	50

**Note:**

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz


### 5.6.2 Test Description

The EUT is powered by the Battery charged with the AC Adapter which is powered by 120V, 60Hz AC mains supply. The path loss as the factor is calibrated to correct the reading. During the measurement, the EUT is activated and is set to operate at maximum power.

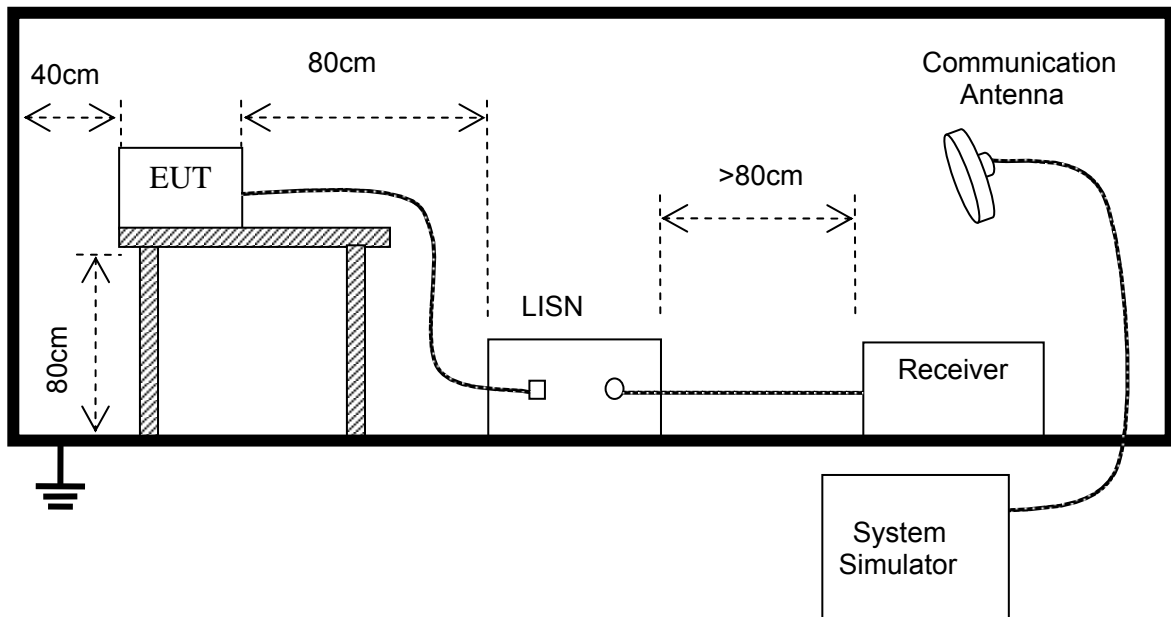

### 5.6.3 Test Result

#### Conducted Emission Measurement

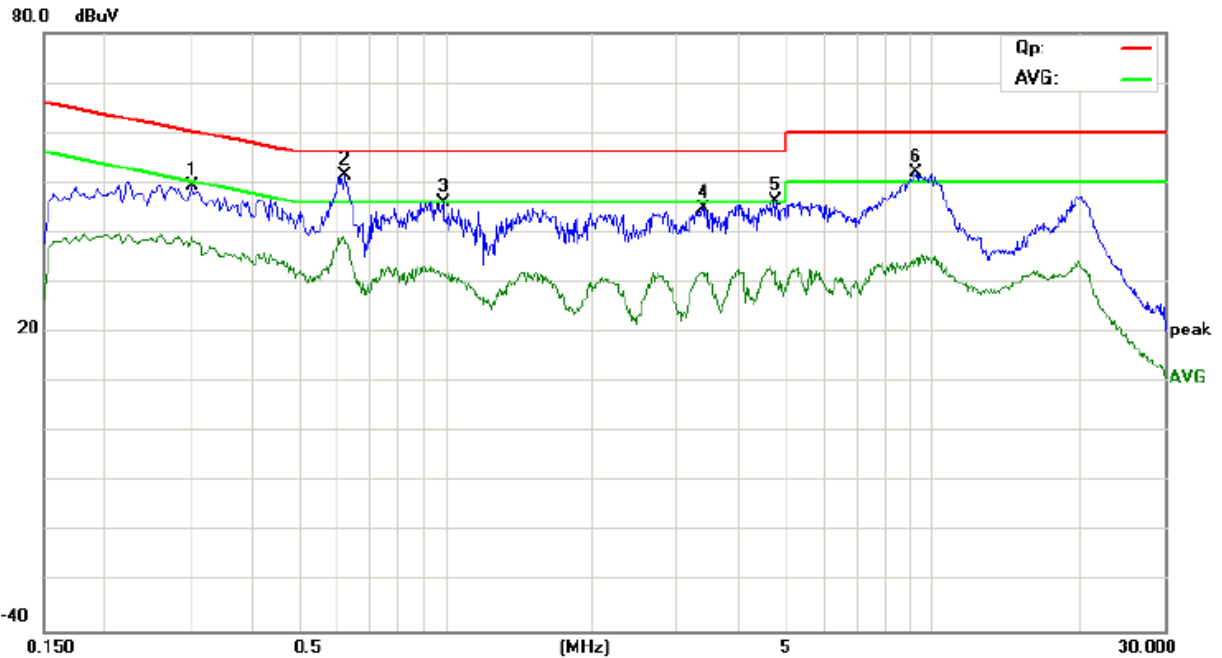


Site site #1 Phase: **N** Temperature: 26  
 Limit: FCC Part15 B Class B QP Power: AC 120V/60Hz Humidity: 60 %  
 EUT: GT CAM  
 M/N: GTCAM  
 Mode: WIFI Mode  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.3020	38.04	11.32	49.36	60.19	-10.83	peak	
2	*	0.6220	41.26	10.00	51.26	56.00	-4.74	peak	
3		0.9900	36.05	10.00	46.05	56.00	-9.95	peak	
4		3.3660	34.53	10.37	44.90	56.00	-11.10	peak	
5		4.7380	34.49	11.74	46.23	56.00	-9.77	peak	
6		9.2260	42.46	9.46	51.92	60.00	-8.08	peak	

\*:Maximum data x:Over limit !:over margin

### Conducted Emission Measurement

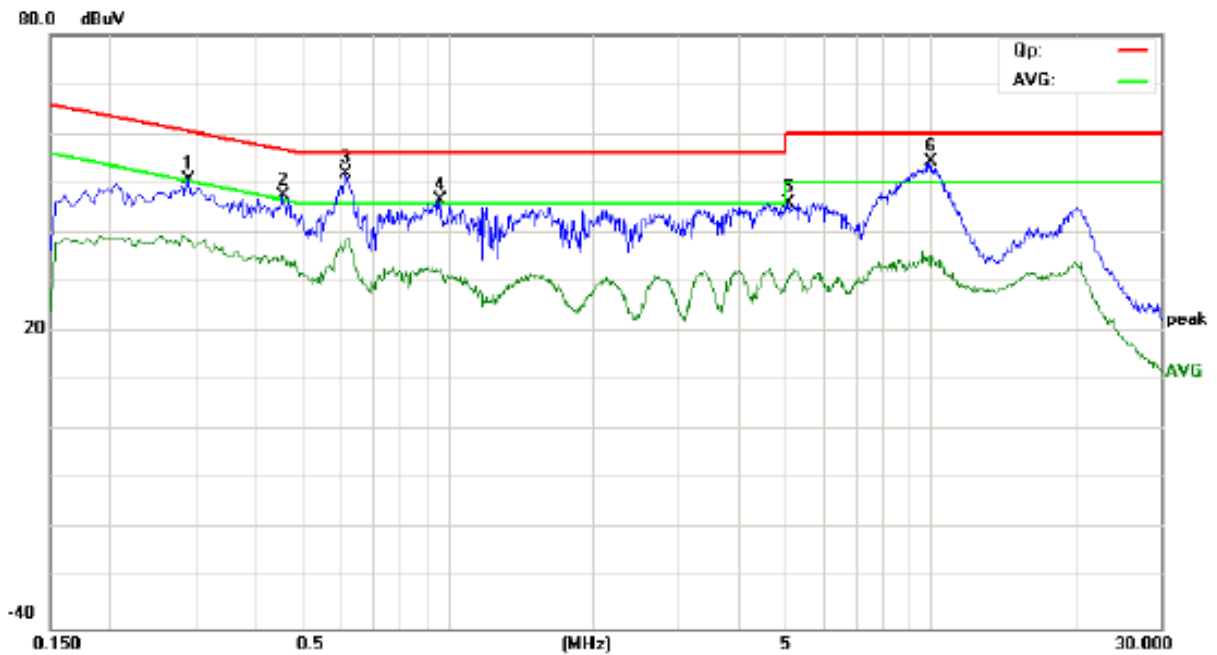

Site site #1 Phase: *L1* Temperature: 28  
 Limit: FCC Part15 B Class B QP Power: AC 120V/60Hz Humidity: 60 %  
 EUT: GT CAM  
 M/N: GTCAM  
 Mode: WIFI Mode  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.2900	39.21	11.40	50.61	60.52	-9.91	peak	
2		0.4540	37.13	10.31	47.44	56.80	-9.36	peak	
3	*	0.6140	41.90	10.00	51.90	56.00	-4.10	peak	
4		0.9620	36.42	10.00	46.42	56.00	-9.58	peak	
5		5.0380	33.91	11.98	45.89	60.00	-14.11	peak	
6		9.9580	45.28	9.03	54.31	60.00	-5.69	peak	

\*:Maximum data    x:Over limit    !:over margin

## 5.7 Radiated Emission

### 5.7.1 Definition

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).


According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3


As shown in FCC section 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.


### 5.7.2 Test Description

#### A. Test Setup:

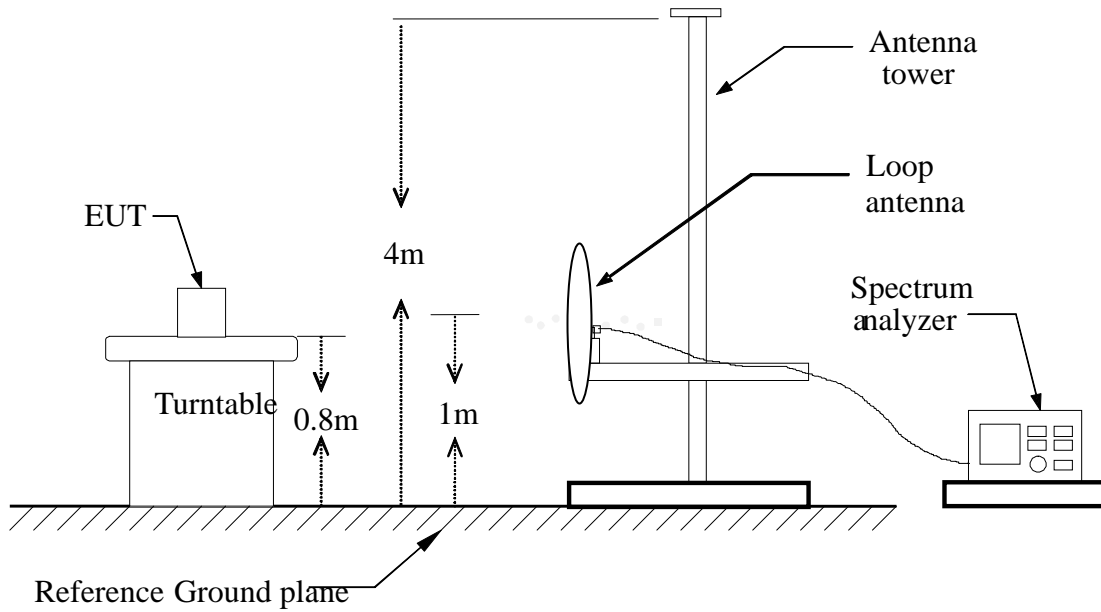

#### Blow 1GHz:

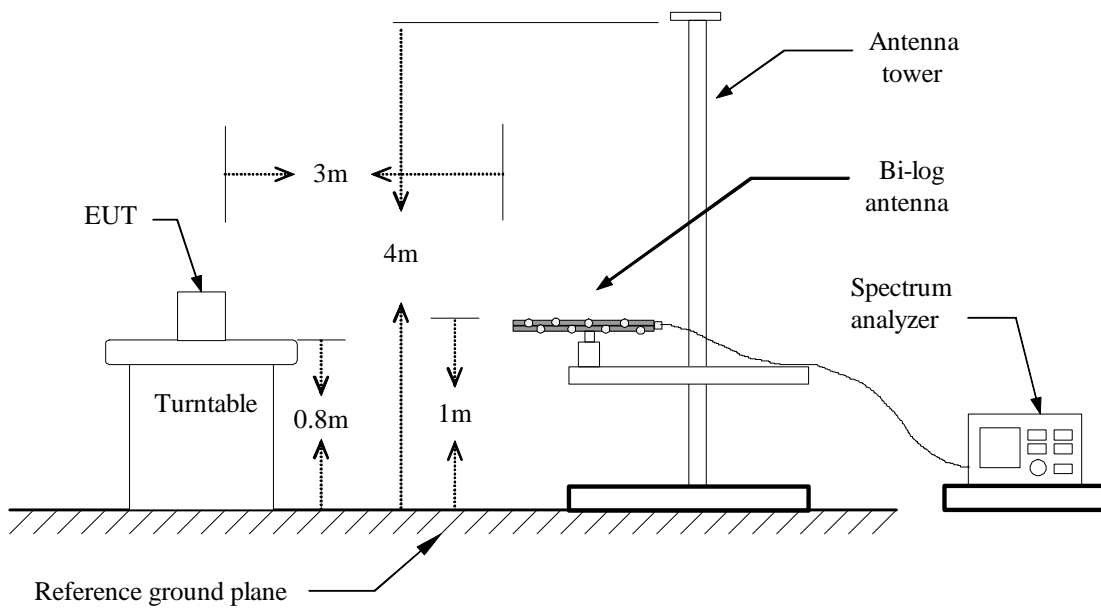

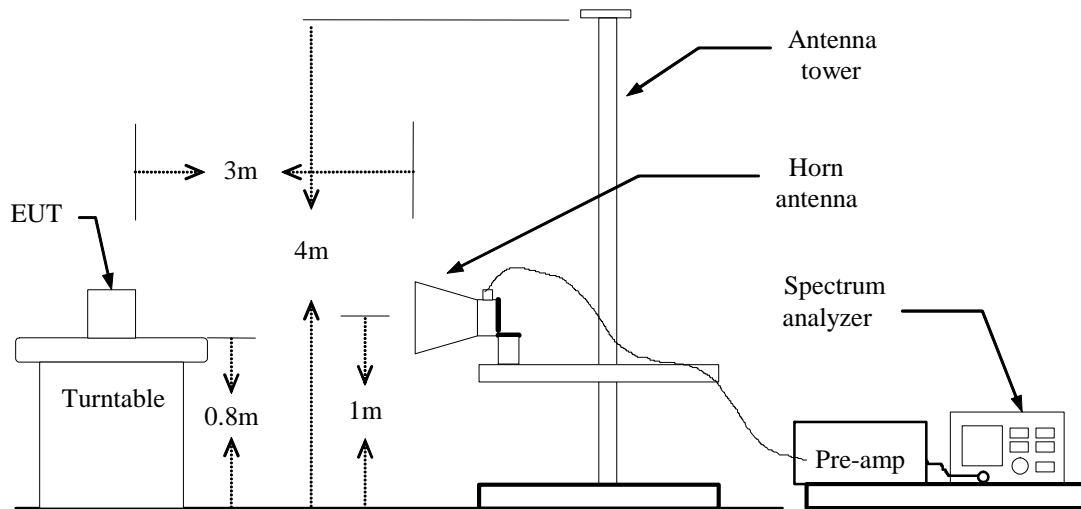**Above 1GHz:****B. Test procedures**

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
  - Below 1GHz: RBW=100 kHz / VBW=300 kHz / Sweep=AUTO
  - Above 1GHz : (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
  - (b) AVERAGE: RBW=1MHz / VBW=1MHz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.



**5.7.3 Test Result**


Form 9 KHz to 30MHz:

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs Peak (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)
	H					
	H					
	H					
N/A						>20
	V					
	V					
	V					
N/A						>20

**-Note: No test data was detected in below 30MHz.**

**Below 1 GHz**

**Radiated Emission Measurement**

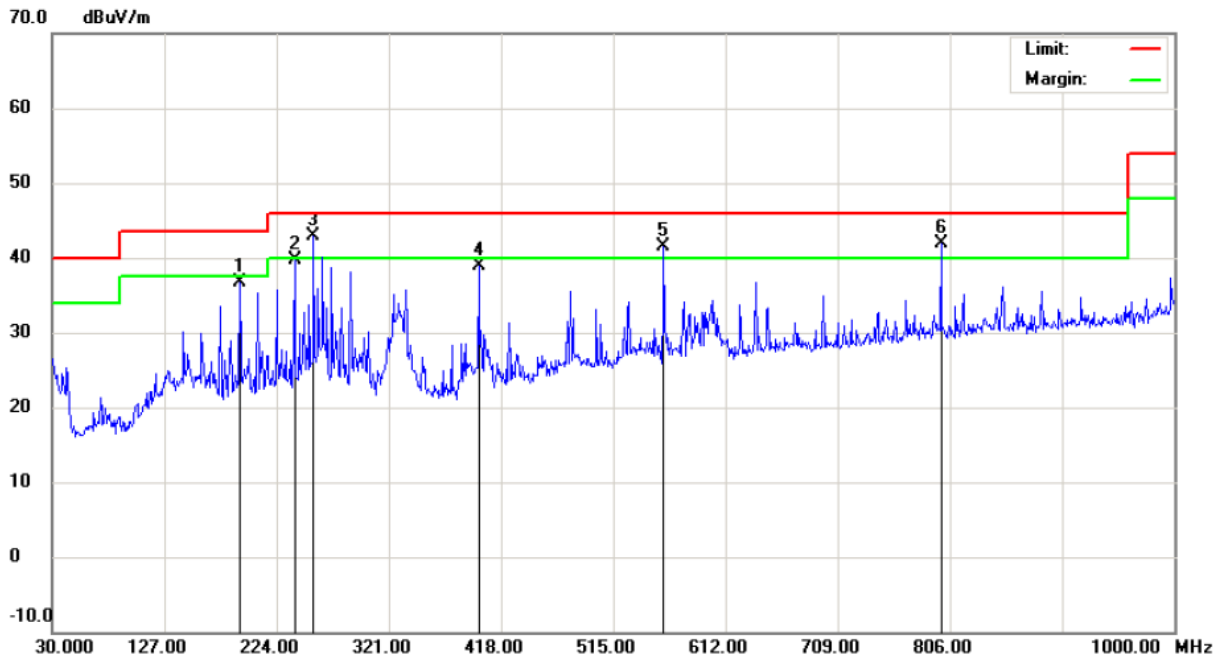

Site site MOST 3M

Polarization: *Horizontal*

Temperature: 26

Limit: FCC Part15 B 3M Radiation

Power: AC 120V/60Hz

Humidity: 61 %

EUT: GT-CAM

Distance:

M/N: GT-CAM


Mode: WIFI

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		191.9900	20.02	16.76	36.78	43.50	-6.72			peak
2		239.5200	22.60	17.17	39.77	46.00	-6.23			peak
3	*	256.0099	25.41	17.52	42.93	46.00	-3.07			peak
4		398.6000	20.26	18.65	38.91	46.00	-7.09			peak
5	!	558.6499	18.90	22.67	41.57	46.00	-4.43			peak
6	!	798.2400	15.93	25.92	41.85	46.00	-4.15			peak

\*:Maximum data    x:Over limit    !:over margin

Radiated Emission Measurement

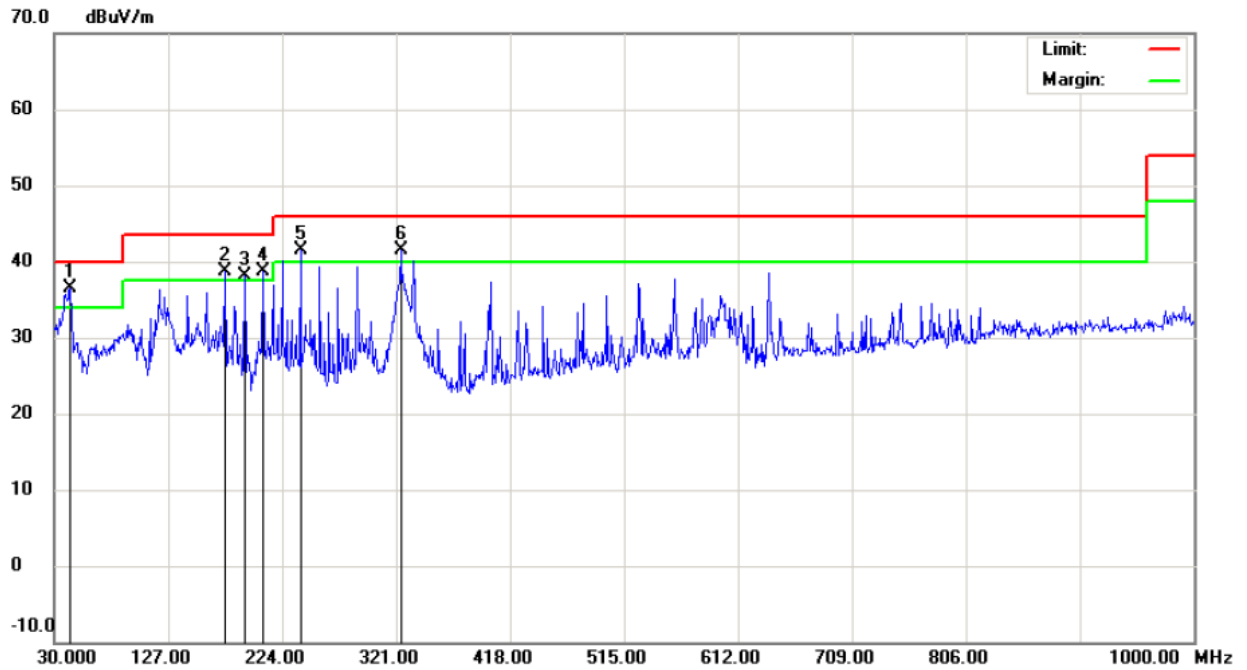

Site site MOST 3M Polarization: *Vertical* Temperature: 26  
 Limit: FCC Part15 B 3M Radiation Power: AC 120V/60Hz Humidity: 61 %  
 EUT: GT-CAM Distance:  
 M/N: GT-CAM  
 Mode: WIFI  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	*	43.5799	22.55	13.96	36.51	40.00	-3.49	peak			
2	!	175.5000	21.73	16.92	38.65	43.50	-4.85	peak			
3	!	191.9900	21.42	16.76	38.18	43.50	-5.32	peak			
4	!	207.5099	22.41	16.28	38.69	43.50	-4.81	peak			
5	!	239.5200	24.29	17.17	41.46	46.00	-4.54	peak			
6	!	324.8798	24.45	17.00	41.45	46.00	-4.55	peak			

\*:Maximum data x:Over limit !:over margin

**Above 1 GHz**

**Operation Mode:** TX/ IEEE 802.11b/CH Low      **Test Date:** 2013-04-24  
**Temperature:** 20°C      **Humidity:** 65 % RH

Freq. (MHz)	Ant. Pol H/V	Peak Reading dBuV	AV Reading dBuV	Ant. / CL CF dB)	Actual Fs		Peak Limit dBuV/m	AV Limit dBuV/m	AV Margin dB
					Peak dBuV/m	AV dBuV/m			
4824.5	V	46.33	21.97	23.05	69.38	45.02	74.00	54.00	-8.98
N/A	H								
4824.5	H	44.12	23.87	23.05	67.17	46.92	74.00	54.00	-7.08
N/A	H								

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX/ IEEE 802.11b/CH Mid      **Test Date:** 2013-04-24  
**Temperature:** 20°C      **Humidity:** 65 % RH

Freq. (MHz)	Ant. Pol H/V	Peak Reading dBuV	AV Reading dBuV	Ant. / CL CF dB	Actual Fs		Peak Limit dBuV/m	AV Limit dBuV/m	AV Margin dB
					Peak dBuV/m	AV dBuV/m			
4874.5	V	44.87	22.24	23.98	68.85	46.22	74.00	54.00	-7.78
N/A	V								
4874.5	H	42.39	21.76	23.98	66.37	45.74	74.00	54.00	-8.26
N/A	H								

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX/ IEEE 802.11b/CH High      **Test Date:** 2013-04-24  
**Temperature:** 20°C      **Humidity:** 65 % RH

Freq. (MHz)	Ant. Pol H/V	Peak	AV	Ant. / CL	Actual Fs		Peak	AV	AV
		Reading	Reading	CF	Peak dBuV/m	AV dBuV/m	Limit	Limit	Margin
		dBuV	dBuV	dB			dBuV/m	dBuV/m	dB
4924.5	V	43.60	22.97	24.86	68.46	47.83	74.00	54.00	-6.17
N/A	V								
4924.5	H	42.65	21.36	24.86	67.51	46.22	74.00	54.00	-7.78
N/A	H								

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX/ IEEE 802.11g/CH Low      **Test Date:** 2013-04-24  
**Temperature:** 20°C      **Humidity:** 65 % RH

Freq. (MHz)	Ant. Pol H/V	Peak Reading dBuV	AV Reading dBuV	Ant. / CL CF dB)	Actual Fs		Peak Limit dBuV/m	AV Limit dBuV/m	AV Margin dB
					Peak dBuV/m	AV dBuV/m			
4824.5	V	44.14	22.26	23.05	67.19	45.31	74.00	54.00	-8.69
N/A	V								
4824.5	H	45.47	23.99	23.05	68.52	47.04	74.00	54.00	-6.96
N/A	H								

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX/ IEEE 802.11g/CH Mid      **Test Date:** 2013-04-24  
**Temperature:** 20°C      **Humidity:** 65 % RH

Freq. (MHz)	Ant. Pol H/V	Peak	AV	Ant. / CL	Actual Fs		Peak	AV	AV
		Reading dBuV	Reading dBuV	CF dB)	Peak dBuV/m	AV dBuV/m	Limit dBuV/m	Limit dBuV/m	Margin dB
4874.5	V	43.23	21.90	23.98	67.21	45.88	74.00	54.00	-8.12
N/A	V								
4874.5	H	41.76	22.31	23.98	65.74	46.29	74.00	54.00	-7.71
N/A	H								

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX/ IEEE 802.11g/CH High      **Test Date:** 2013-04-24  
**Temperature:** 20°C      **Humidity:** 65 % RH

Freq. (MHz)	Ant. Pol H/V	Peak Reading dBuV	AV Reading dBuV	Ant. / CL CF dB)	Actual Fs		Peak Limit dBuV/m	AV Limit dBuV/m	AV Margin dB
					Peak dBuV/m	AV dBuV/m			
4924.5	V	42.19	20.80	24.86	67.05	45.66	74.00	54.00	-8.34
N/A	V								
4924.5	H	40.28	22.46	24.86	65.14	47.32	74.00	54.00	-6.68
N/A	H								

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX/ IEEE 802.11n-20/CH Low      **Test Date:** 2013-04-24  
**Temperature:** 20°C      **Humidity:** 65 % RH

Freq. (MHz)	Ant. Pol H/V	Peak Reading dBuV	AV Reading dBuV	Ant. / CL CF dB)	Actual Fs		Peak Limit dBuV/m	AV Limit dBuV/m	AV Margin dB
					Peak dBuV/m	AV dBuV/m			
4824.5	V	43.07	23.80	23.05	66.12	46.85	74.00	54.00	-7.15
N/A	V								
4824.5	H	44.04	22.56	23.05	67.09	45.61	74.00	54.00	-8.39
N/A	H								

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX/ IEEE 802.11n-20/CH Mid      **Test Date:** 2013-04-24  
**Temperature:** 20°C      **Humidity:** 65 % RH

Freq. (MHz)	Ant. Pol H/V	Peak	AV	Ant. / CL	Actual Fs		Peak	AV	AV
		Reading dBuV	Reading dBuV	CF dB)	Peak dBuV/m	AV dBuV/m	Limit dBuV/m	Limit dBuV/m	Margin dB
4874.5	V	44.27	22.81	23.98	68.25	46.79	74.00	54.00	-7.21
N/A	V								
4874.5	H	42.85	23.07	23.98	66.83	47.05	74.00	54.00	-6.95
N/A	H								

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX/ IEEE 802.11n-20/CH High      **Test Date:** 2013-04-24  
**Temperature:** 20°C      **Humidity:** 65 % RH

Freq. (MHz)	Ant. Pol H/V	Peak	AV	Ant. / CL	Actual Fs		Peak	AV	AV
		Reading	Reading	CF	Peak	AV	Limit	Limit	Margin
		dBuV	dBuV	dB)			dBuV/m	dBuV/m	dB
4924.5	V	42.05	22.72	24.86	66.91	47.58	74.00	54.00	-6.42
N/A	V								
4924.5	H	42.25	20.60	24.86	67.11	45.46	74.00	54.00	-8.54
N/A	H								

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX/ IEEE 802.11n-40/CH Low      **Test Date:** 2013-04-24

**Temperature:** 20°C      **Humidity:** 65 % RH

Freq. (MHz)	Ant. Pol H/V	Peak Reading dBuV	AV Reading dBuV	Ant. / CL CF dB)	Actual Fs		Peak Limit dBuV/m	AV Limit dBuV/m	AV Margin dB
					Peak dBuV/m	AV dBuV/m			
4844.5	V	43.81	21.83	23.58	67.39	45.41	74.00	54.00	-8.59
N/A	V								
4844.5	H	44.47	23.75	23.58	68.05	47.33	74.00	54.00	-6.67
N/A	H								

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX/ IEEE 802.11n-40/CH Mid      **Test Date:** 2013-04-24  
**Temperature:** 20°C      **Humidity:** 65 % RH

Freq. (MHz)	Ant. Pol H/V	Peak	AV	Ant. / CL	Actual Fs		Peak	AV	AV
		Reading	Reading	CF	Peak	AV	Limit	Limit	Margin
		dBuV	dBuV	dB)			dBuV/m	dBuV/m	dB
4874.5	V	42.41	22.20	23.98	66.39	46.18	74.00	54.00	-7.82
N/A	V								
4874.5	H	41.59	23.85	23.98	65.57	47.83	74.00	54.00	-6.17
N/A	H								

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX/ IEEE 802.11n-40/CH High      **Test Date:** 2013-04-24  
**Temperature:** 20°C      **Humidity:** 65 % RH

Freq. (MHz)	Ant. Pol H/V	Peak	AV	Ant. / CL	Actual Fs		Peak	AV	AV
		Reading	Reading	CF	Peak	AV	Limit	Limit	Margin
		dBuV	dBuV	dB)			dBuV/m	dBuV/m	dB
4904.50	V	43.27	21.89	24.14	67.41	46.03	74.00	54.00	-7.97
N/A	V								
4904.50	H	41.25	21.61	24.14	65.39	45.75	74.00	54.00	-8.25
N/A	H								


**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Test Range of "2.31GHz to 2.5GHz"**


**802.11b Test Mode**

Fre. (MHz)	Measured Level (dBuV)	Limit (dBuV)	Margin (dB)	Height (cm)	Azimuth (deg)	Polarization	Detector
2400.00	40.84	74.00	33.16	100.00	90.00	Vertical	Peak
	36.01	54.00	17.99	100.00	90.00	Vertical	Average
2483.50	38.72	74.00	35.28	100.00	90.00	Vertical	Peak
	36.07	54.00	17.93	100.00	90.00	Vertical	Average

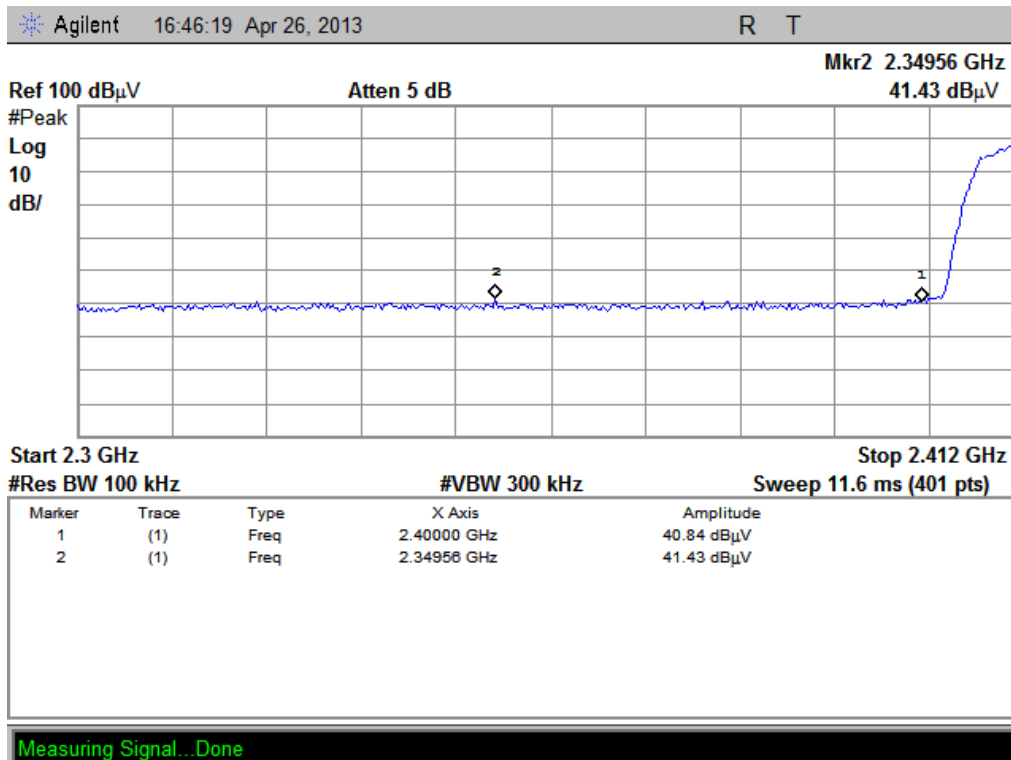


(CH Low, Peak)




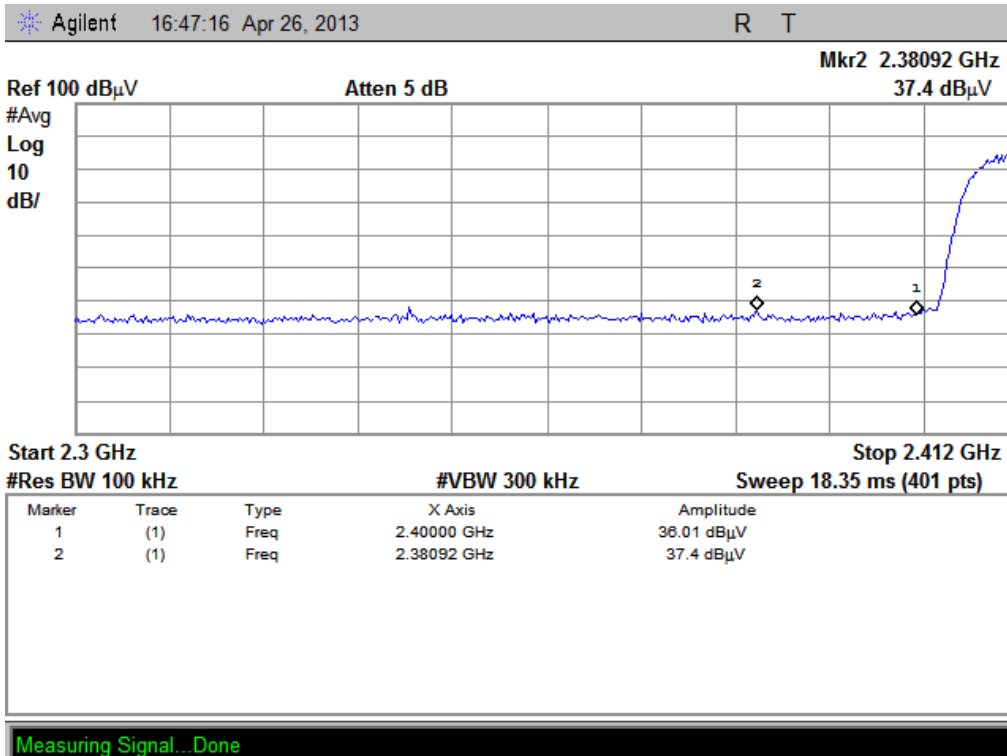

(CH Low, Average)

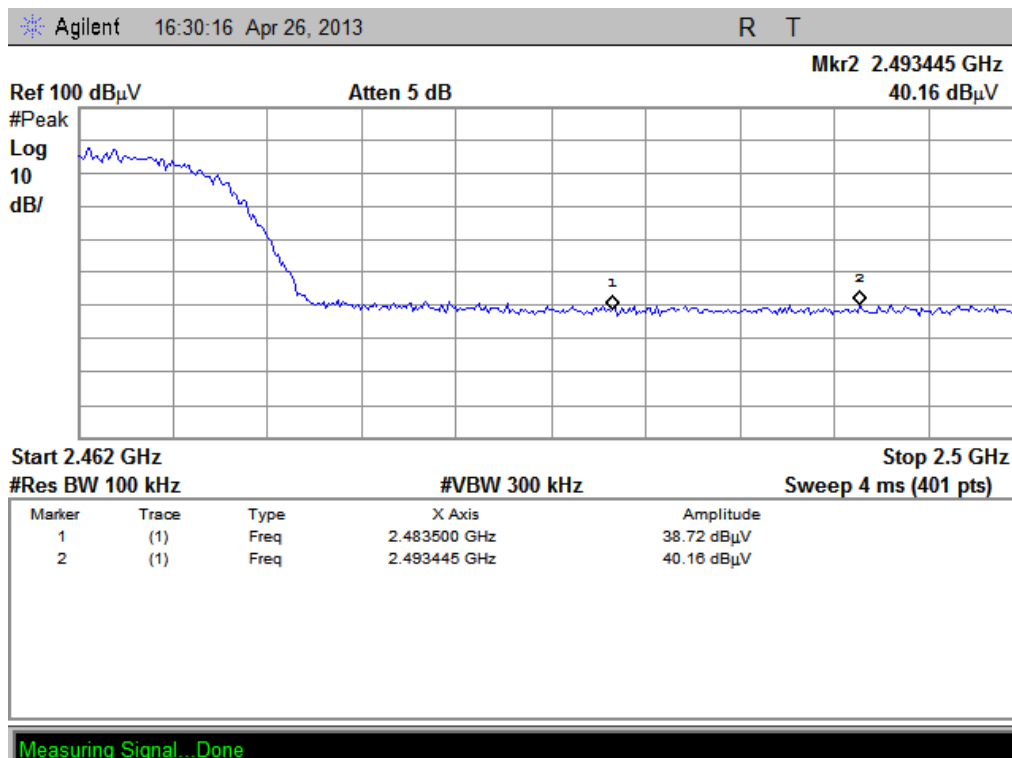


(CH High, Peak)

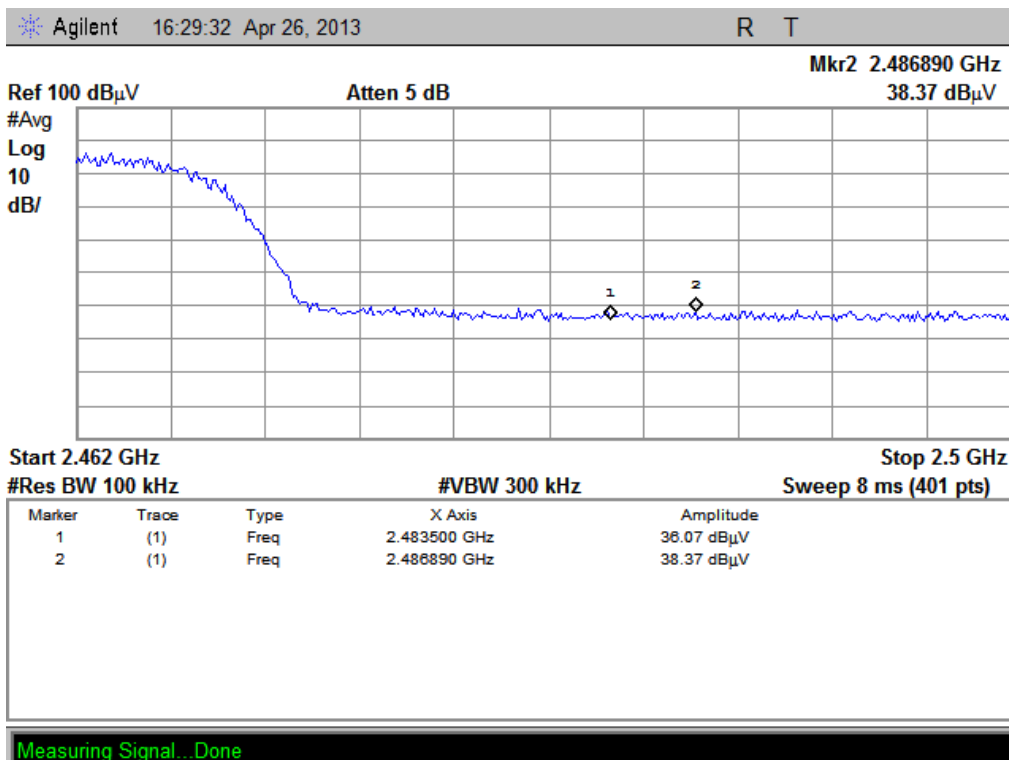


(CH High, Average)

802.11g Test Mode


Fre. (MHz)	Measured Level (dBuV)	Limit (dBuV)	Margin (dB)	Height (cm)	Azimuth (deg)	Polarization	Detector
2400.00	42.67	74.00	31.33	100.00	90.00	Vertical	Peak
	40.02	54.00	13.98	100.00	90.00	Vertical	Average
2483.50	39.26	74.00	34.74	100.00	90.00	Vertical	Peak
	37.25	54.00	16.75	100.00	90.00	Vertical	Average

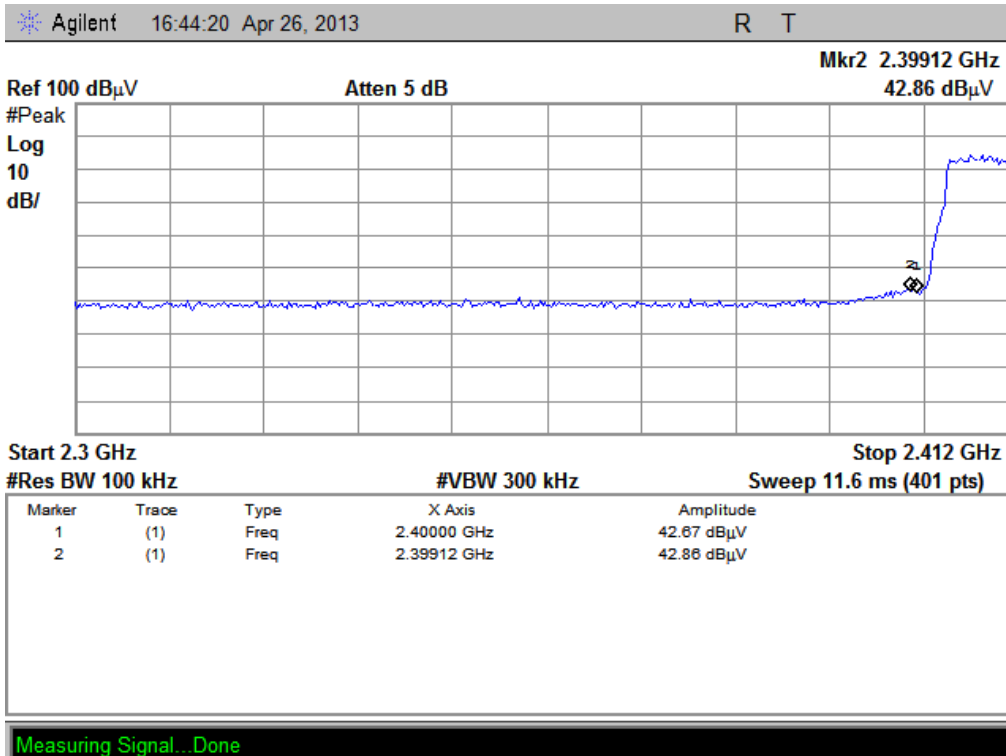


(CH Low, Peak)

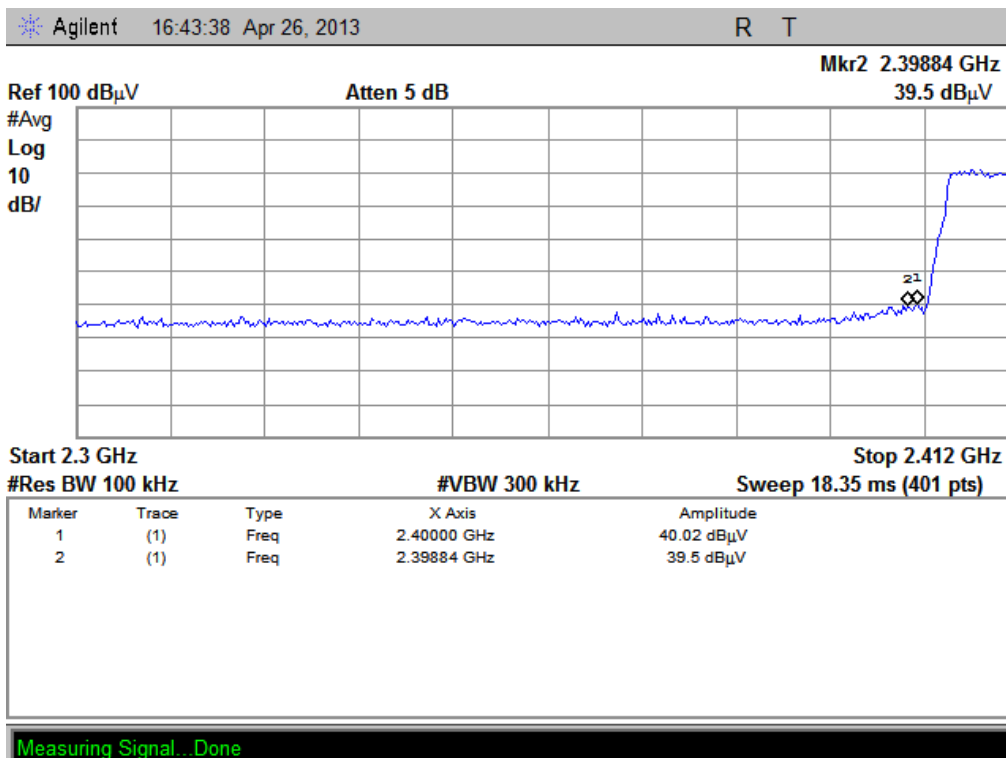

(CH Low, Average)

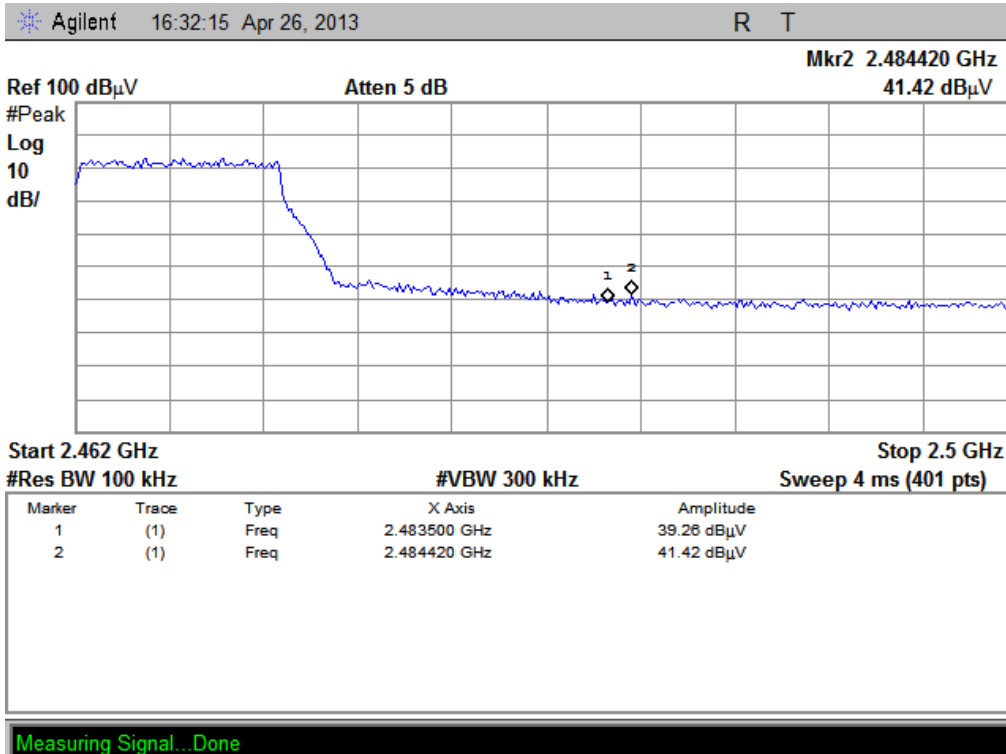

(CH High, Peak)

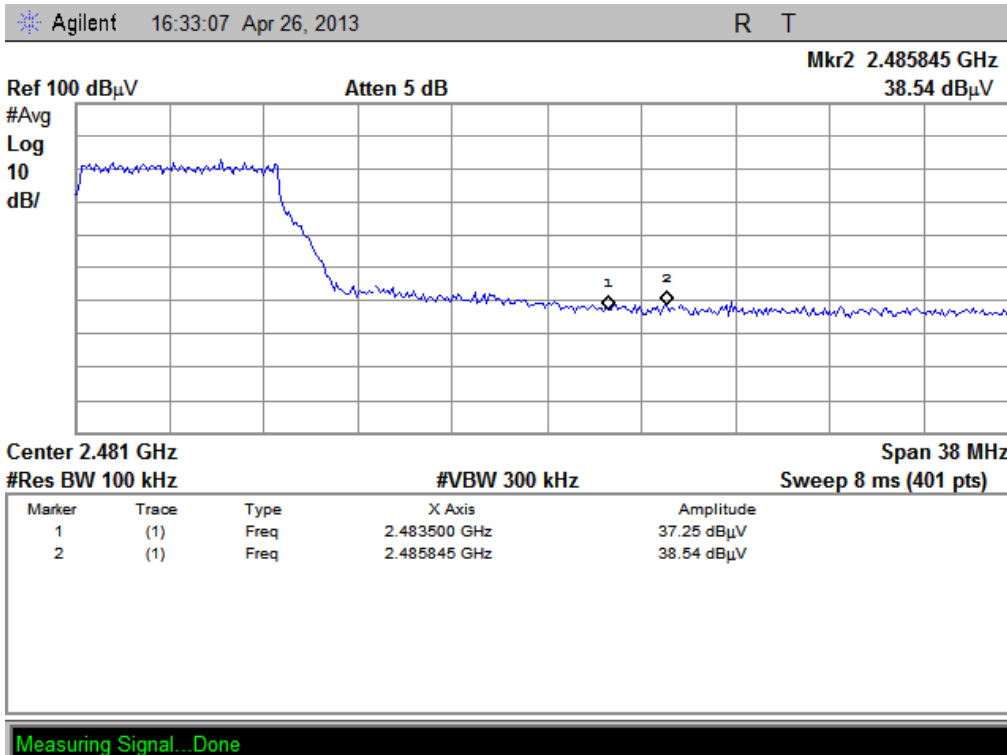


(CH High, Average)

802.11n-20 Test Mode

Fre. (MHz)	Measured Level (dBuV)	Limit (dBuV)	Margin (dB)	Height (cm)	Azimuth (deg)	Polarization	Detector
2400.00	43.90	74.00	12.74	100.00	90.00	Vertical	Peak
	39.70	54.00	5.74	100.00	90.00	Vertical	Average
2483.50	39.78	74.00	12.87	100.00	90.00	Vertical	Peak
	38.49	54.00	6.14	100.00	90.00	Vertical	Average

Agilent 16:41:11 Apr 26, 2013 R T

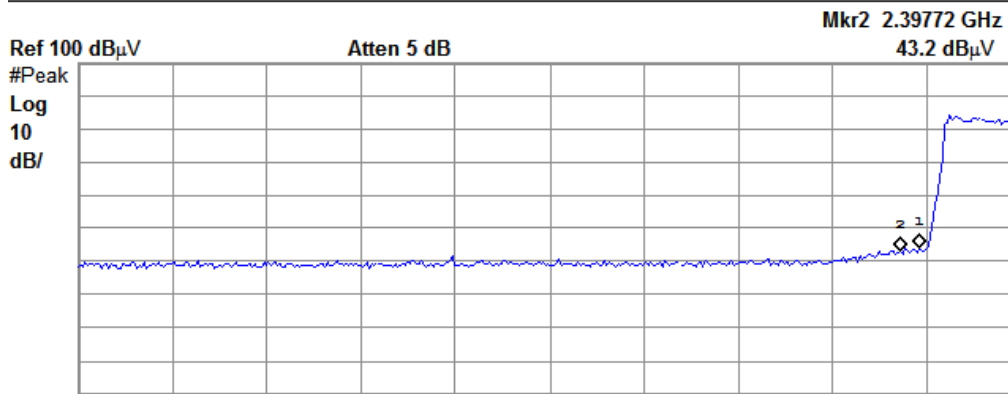


Start 2.3 GHz Stop 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 11.6 ms (401 pts)


Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.40000 GHz	43.9 dBμV
2	(1)	Freq	2.39772 GHz	43.2 dBμV

Measuring Signal...Done


(CH Low, Peak)

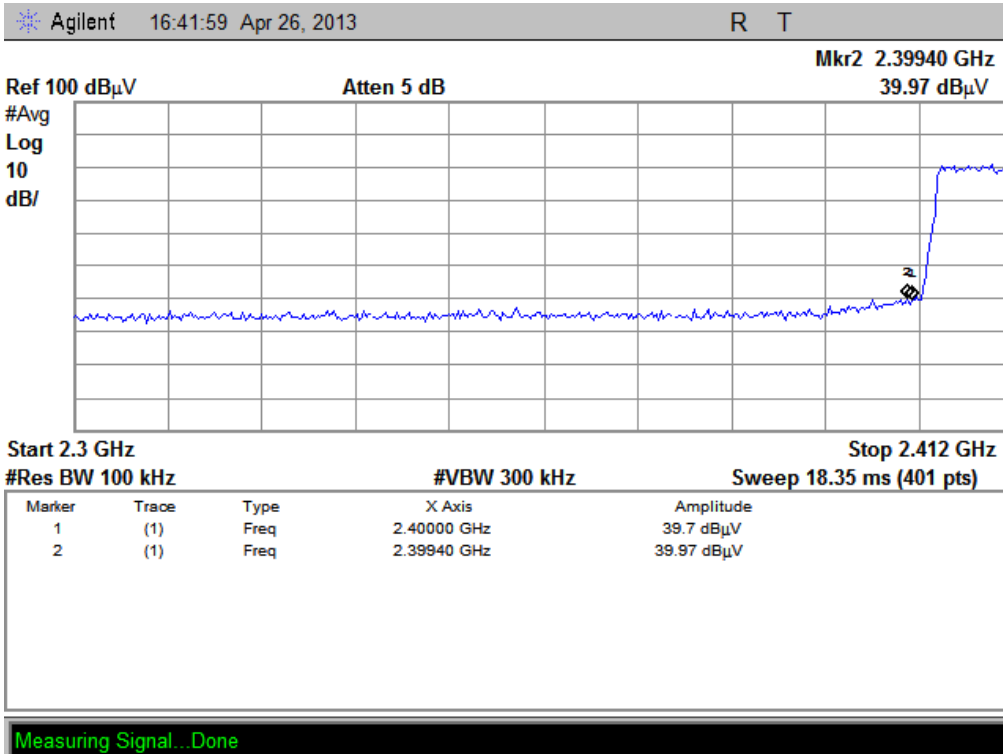

(CH Low, Average)

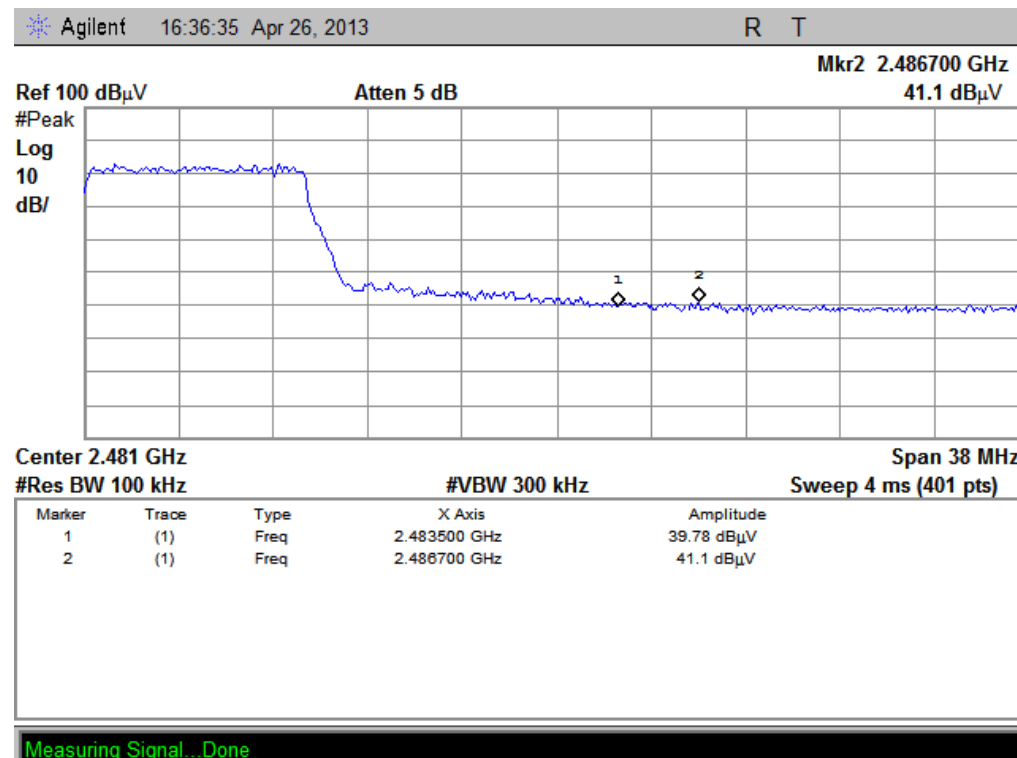


(CH High, Peak)

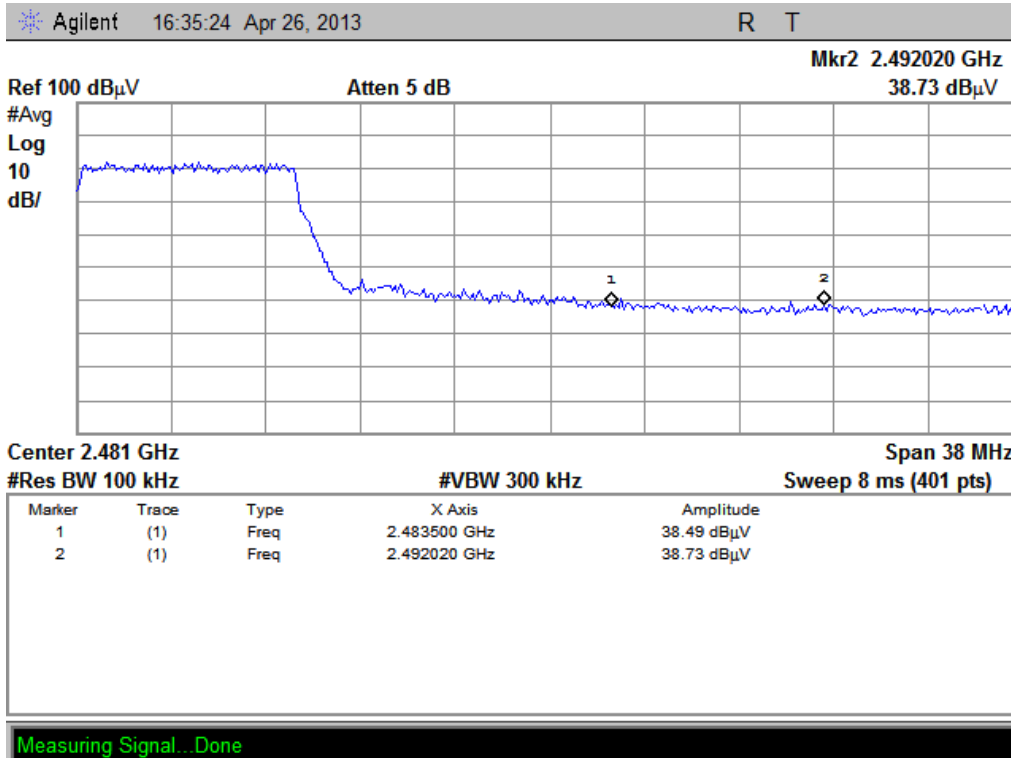


(CH High, Average)

802.11n-40 Test Mode

Fre. (MHz)	Measured Level (dBuV)	Limit (dBuV)	Margin (dB)	Height (cm)	Azimuth (deg)	Polarization	Detector
2400.00	47.31	74.00	26.69	100.00	135.00	Vertical	Peak
	41.99	54.00	12.01	100.00	135.00	Vertical	Average
2483.50	43.68	74.00	30.32	100.00	135.00	Vertical	Peak
	43.27	54.00	10.73	100.00	135.00	Vertical	Average

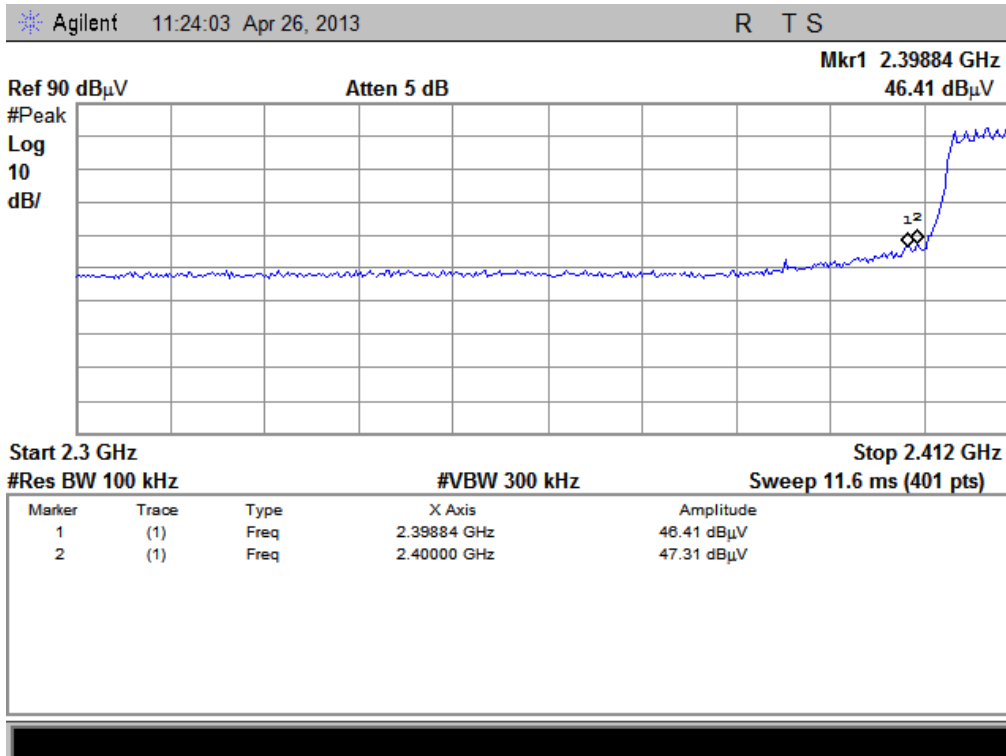


(CH Low, Peak)

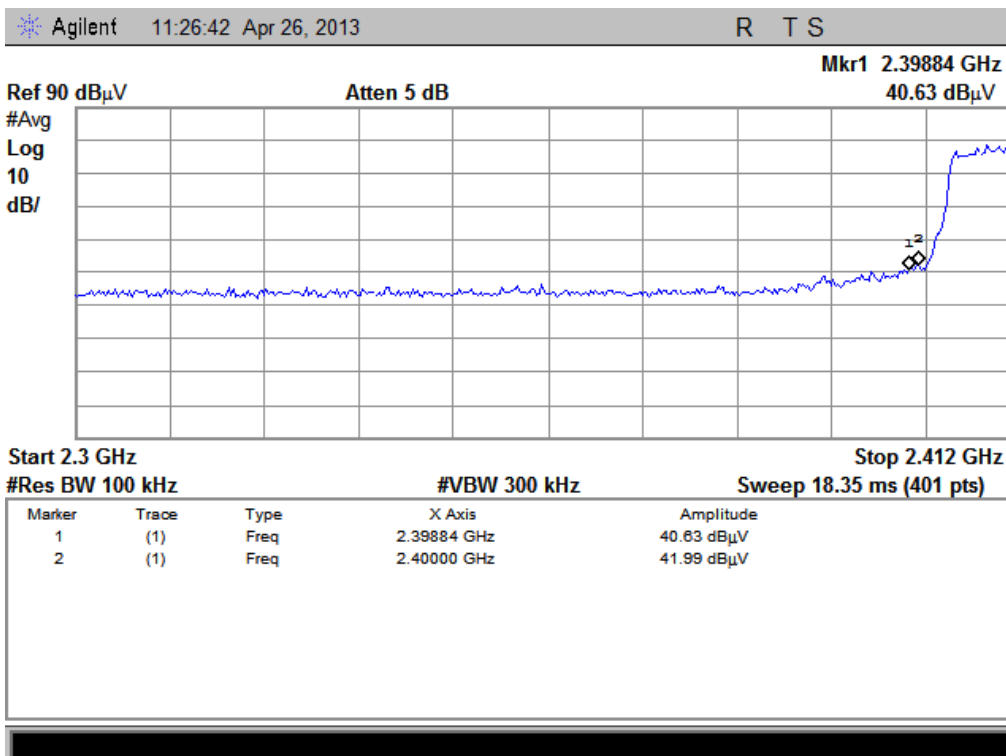


(CH Low, Average)



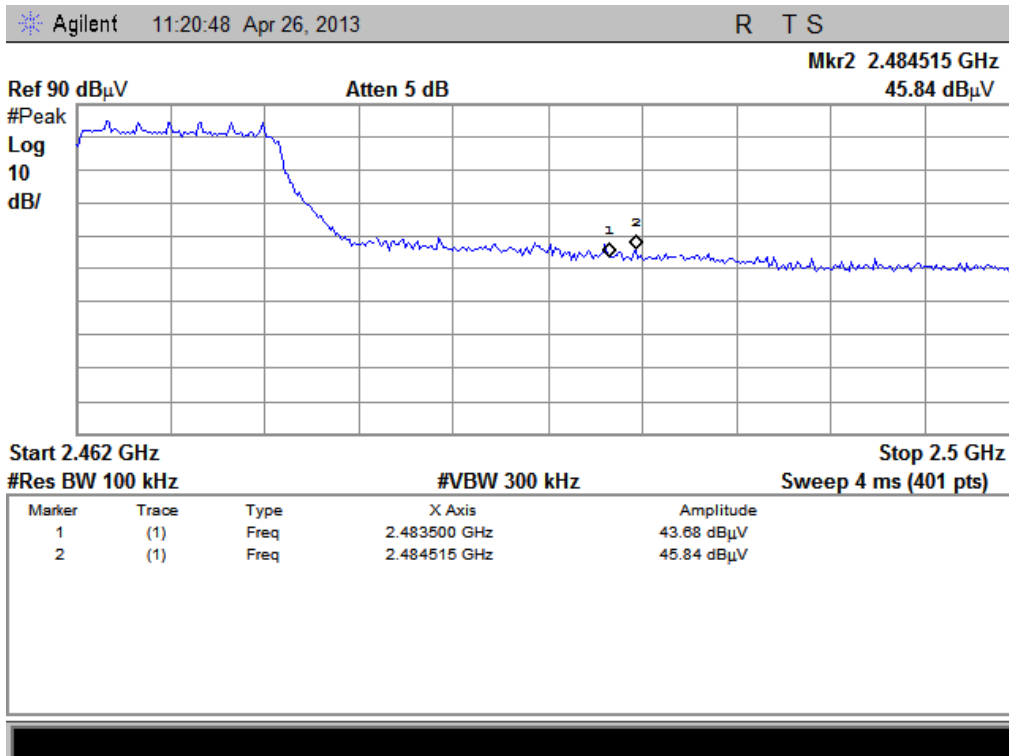

(CH High, Peak)

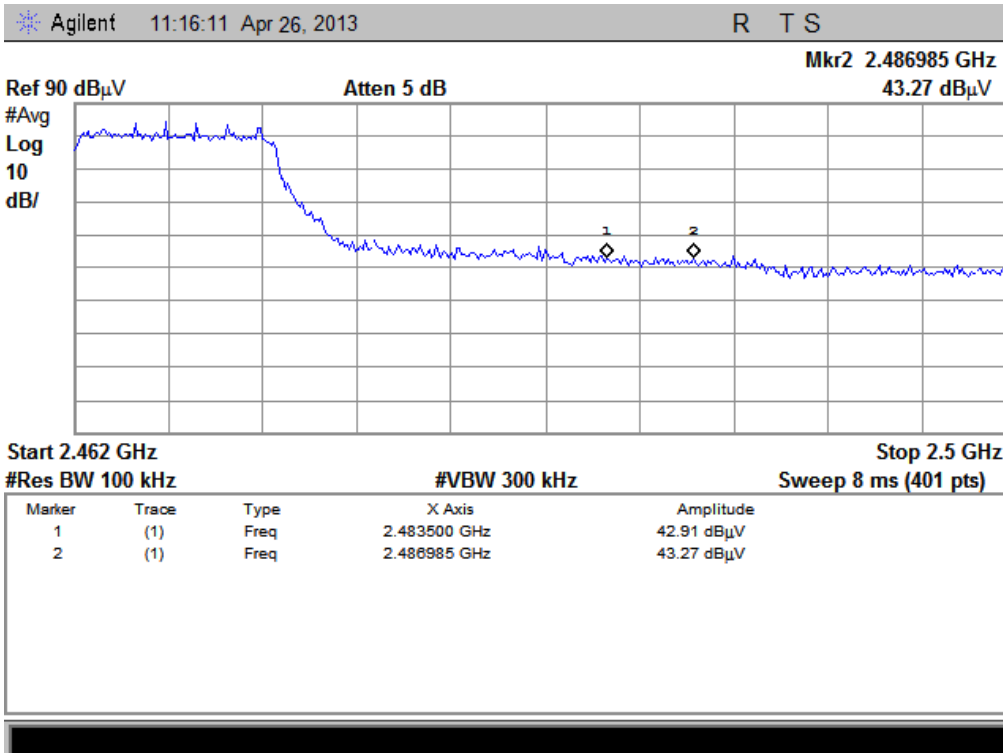


(CH High, Average)


**APPENDIX 1**  
**PHOTOGRAPHS OF TEST SETUP**

CE TEST SETUP




RE TEST SETUP

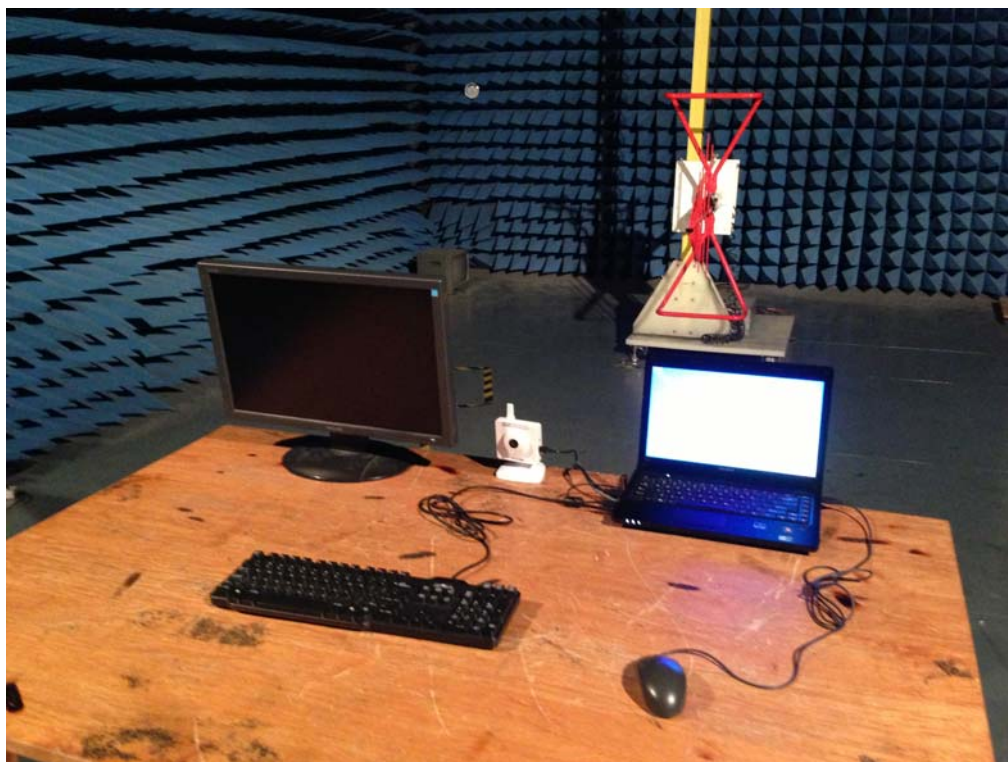

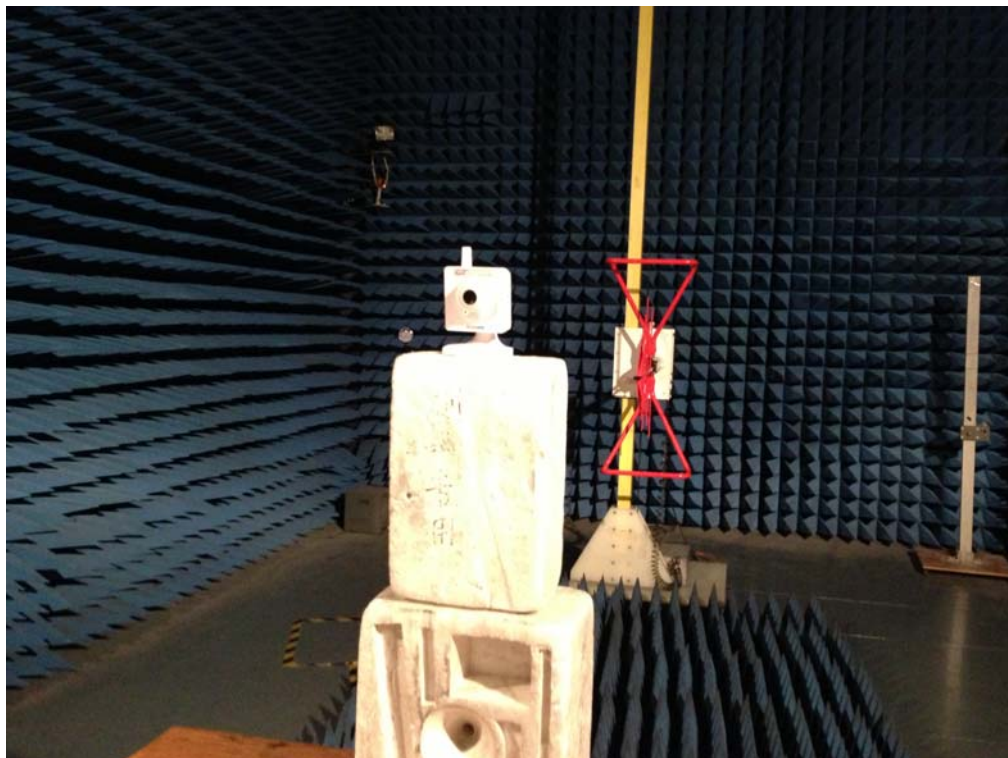

CONDUCTED TEST SETUP

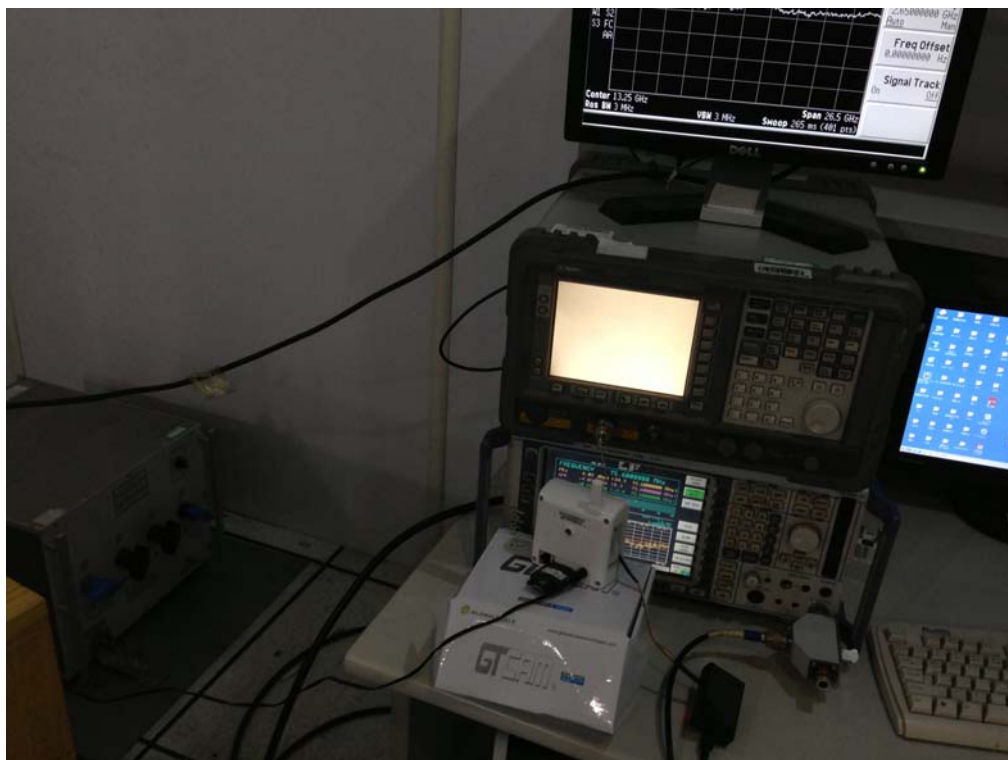

**APPENDIX 2**  
**PHOTOGRAPHS OF EUT**

FRONT VIEW OF SAMPLE



BACK VIEW OF SAMPLE




LEFT VIEW OF SAMPLE



RIGHT VIEW OF SAMPLE



UP VIEW OF SAMPLE

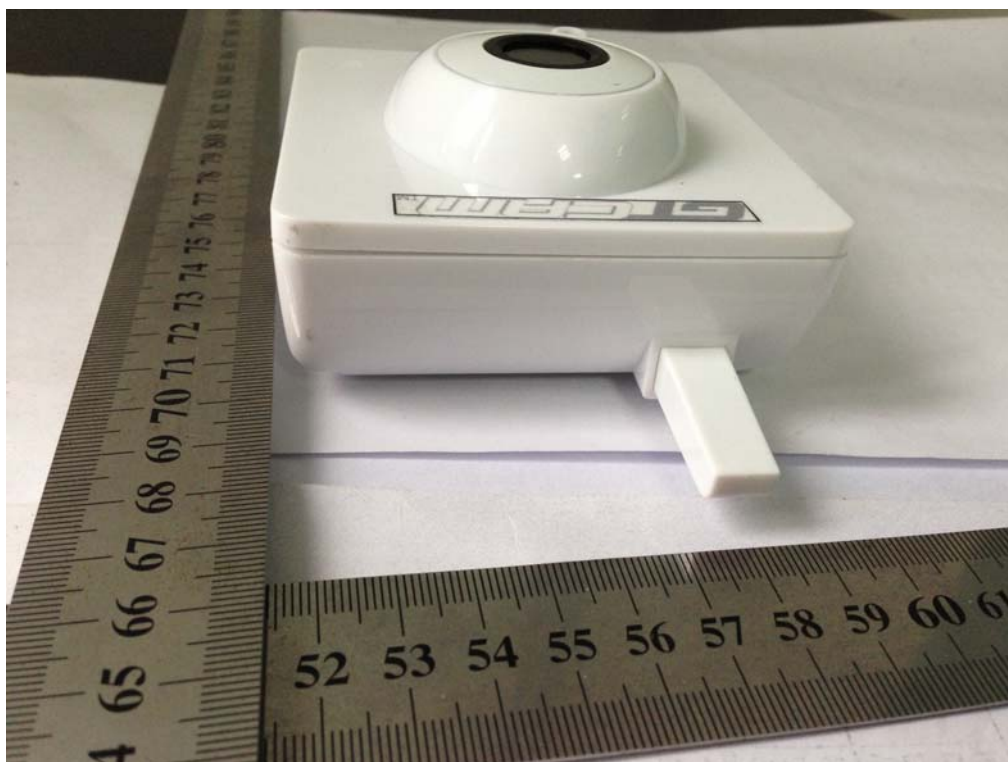



DOWN VIEW OF SAMPLE




PHOTO OF CHARGER




INTERNAL PHOTO OF SAMPLE - 1



INTERNAL PHOTO OF SAMPLE -2

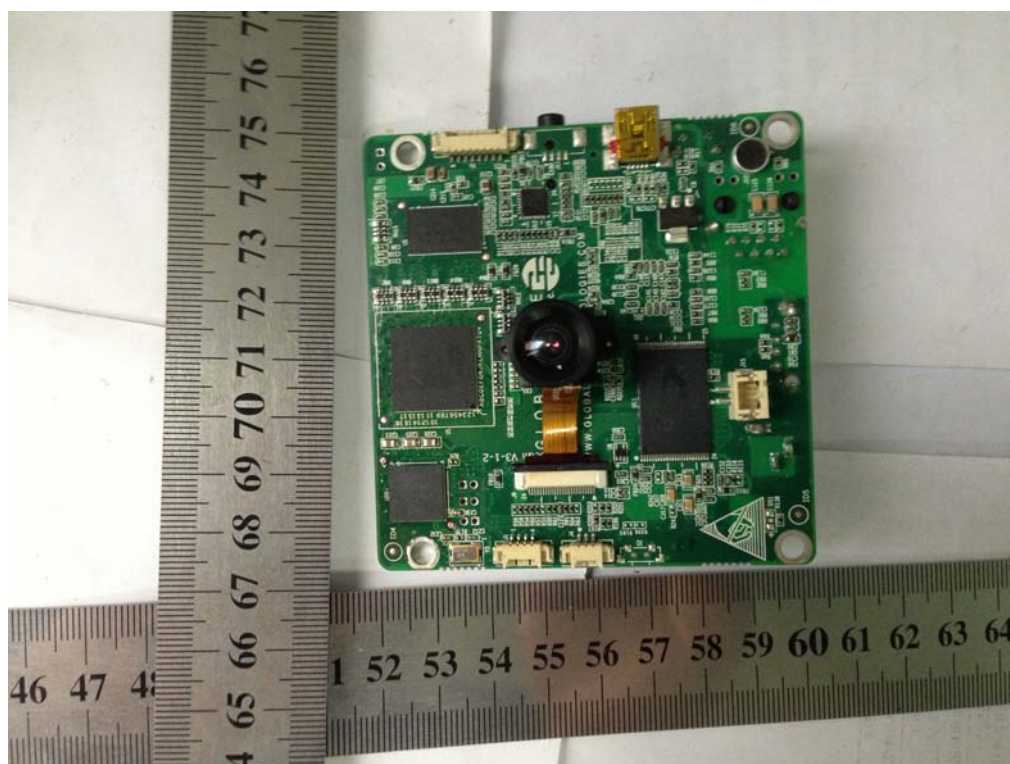

INTERNAL PHOTO OF SAMPLE - 3

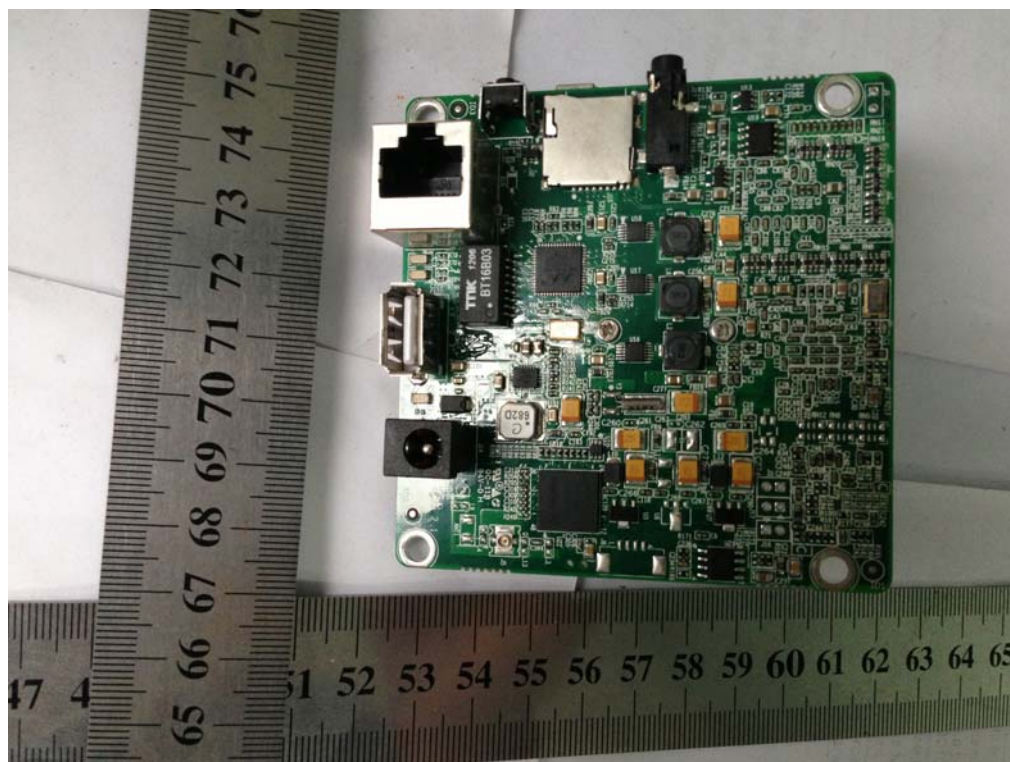

-----END OF REPORT-----