

TEST REPORT



DT&C Co., Ltd.

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042

Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRTFCC2203-0062

2. Customer

• Name (FCC) : Pittasoft Co., Ltd. / Name (IC) : PITTASOFT CO., LTD.

• Address (FCC) : A 4th floor, ABN Tower, 331, Pangyo-ro, Bundang-gu Seongnam-si, Gyeonggi-do
South Korea 13488

Address (IC) : A 4th floor, ABN Tower, 331, Pangyo-ro, Bundang-gu, Seongnam-si Gyeonggi-do
08506 Korea (Republic Of)

3. Use of Report : FCC & IC Certification

4. Product Name / Model Name : Car dashcam / BlackVue 9

FCC ID : YCK-BV9

IC : 23402-BV9

5. FCC Regulation(s): Part 15.247

IC Standard(s): RSS-247 Issue 2, RSS-Gen Issue 5

Test Method used: KDB558074 D01v05r02, ANSI C63.10-2013

6. Date of Test : 2021.12.24 ~ 2022.01.14



7. Location of Test : Permanent Testing Lab On Site Testing

8. Testing Environment : See appended test report.

9. Test Result : Refer to the attached test result.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test report is not related to KOLAS accreditation.

Affirmation	Tested by	Reviewed by
	Name : SeungMin Gil  (Signature)	Name : JaeJin Lee  (Signature)

2022 . 03 . 16 .

DT&C Co., Ltd.

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

Test Report Version

Test Report No.	Date	Description	Revised by	Reviewed by
DRTFCC2203-0062	Mar, 16. 2022	Initial issue	SeungMin Gil	JaeJin Lee

Table of Contents

1. General Information	4
1.1. Description of EUT	4
1.2. Declaration by the applicant / manufacturer	4
1.3. Testing Laboratory	5
1.4. Testing Environment	5
1.5. Measurement Uncertainty	5
1.6. Test Equipment List	6
2. Test Methodology	8
2.1. EUT Configuration	8
2.2. EUT Exercise	8
2.3. General Test Procedures	8
2.4. Instrument Calibration	8
2.5. Description of Test Modes	9
3. Antenna Requirements	10
4. Summary of Test Result	11
5. Test Result	12
5.1. Maximum Peak Conducted Output Power	12
5.1.1. Test Setup	12
5.1.2. Test Procedures	12
5.1.3. Test Results	12
5.2. 6 dB Bandwidth	17
5.2.1. Test Setup	17
5.2.2. Test Procedures	17
5.2.3. Test Results	17
5.3. Power Spectral Density	34
5.3.1. Test Setup	34
5.3.2. Test Procedures	34
5.3.3. Test Results	34
5.4. Unwanted Emissions (Conducted)	51
5.4.1. Test Setup	51
5.4.2. Test Procedures	51
5.4.3. Test Results	52
5.5. Unwanted Emissions (Radiated)	116
5.5.1. Test Setup	118
5.5.2. Test Procedures	118
5.5.3. Test Results	119
5.6. AC Power-Line Conducted Emissions	122
5.7. Occupied Bandwidth	123
5.7.1. Test Setup	123
5.7.2. Test Procedures	123
5.7.3. Test Results	123
APPENDIX I	140
APPENDIX II	141
APPENDIX III	144

1. General Information

1.1. Description of EUT

Equipment Class	Digital Transmission System (DTS)
Product Name	Car dashcam
Model Name	BlackVue 9
Add Model Name	BlackVue 9-2CH, BlackVue 9-1CH, BlackVue 9-2CH IR, BlackVue 9-2CH Truck, BlackVue 9-2CH DMS, BlackVue 9-2CH ELD, BlackVue 9-1CH ELD
Firmware Version Identification Number	v1.000
EUT Serial Number	Radiated: BK9NS3K9E00051, Conducted: BK9NS3K9E00017
Power Supply	DC 12 V, DC 24 V
Modulation Technique	<ul style="list-style-type: none"> ▪ 802.11b: CCK, DSSS ▪ 802.11g/n/ac: OFDM
Antenna Specification	Antenna Type: CHIP Antenna Gain: 2.97 dBi (PK)

Band	Mode	Tx. frequency(MHz)	Max. conducted power(dBm)	Antenna Gain(dBi)	Max. e.i.r.p (dBm)
2.4 GHz	802.11b	2 412 ~ 2 462	17.15	2.97	20.12
	802.11g	2 412 ~ 2 462	21.18	2.97	24.15
	802.11n (HT20)	2 412 ~ 2 462	20.63	2.97	23.60
	802.11ac (VHT20)	2 412 ~ 2 462	20.12	2.97	23.09
	802.11n (HT40)	2 422 ~ 2 452	21.26	2.97	24.23
	802.11ac (VHT40)	2 422 ~ 2 452	20.98	2.97	23.95

Note: $e.i.r.p = P_{cond} + G_{EUT}$

P_{cond} = measured power at feedpoint of the EUT antenna, in dBm (Peak Conducted Output Power)

G_{EUT} = gain of the EUT radiating element (antenna), in dBi

1.2. Declaration by the applicant / manufacturer

N/A

1.3. Testing Laboratory

DT&C Co., Ltd.	
The 3 m test site and conducted measurement facility used to collect the radiated data are located at the 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 17042.	
The test site complies with the requirements of Part 2.948 according to ANSI C63.4-2014.	
- FCC & IC MRA Designation No. : KR0034	
- ISED#: 5740A	
www.dtnet.net	
Telephone	: + 82-31-321-2664
FAX	: + 82-31-321-1664

1.4. Testing Environment

Ambient Condition	
▪ Temperature	+21 °C ~ +26 °C
▪ Relative Humidity	+38 % ~ +45 %

1.5. Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with requirements of ANSI C63.4-2014 and ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.

Parameter	Measurement uncertainty
Antenna-port conducted emission	0.9 dB (The confidence level is about 95 %, $k = 2$)
Radiated emission (1 GHz Below)	4.9 dB (The confidence level is about 95 %, $k = 2$)
Radiated emission (1 GHz ~ 18 GHz)	5.0 dB (The confidence level is about 95 %, $k = 2$)
Radiated emission (18 GHz Above)	5.3 dB (The confidence level is about 95 %, $k = 2$)

1.6. Test Equipment List

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent Technologies	N9020A	21/06/24	22/06/24	US47360812
Spectrum Analyzer	Agilent Technologies	N9020A	21/12/16	22/12/16	MY48011700
Spectrum Analyzer	Agilent Technologies	N9020A	21/12/16	22/12/16	MY48010133
DC Power Supply	SM techno	SDP30-5D	21/06/24	22/06/24	305DNF079
DC Power Supply	SM techno	SDP30-5D	21/06/24	22/06/24	305DMG305
DC Power Supply	SM techno	SDP30-5D	21/12/16	22/12/16	305DKA013
Multimeter	FLUKE	17B+	21/12/16	22/12/16	36390701WS
Signal Generator	Rohde Schwarz	SMBV100A	21/12/16	22/12/16	255571
Signal Generator	ANRITSU	MG3695C	21/12/16	22/12/16	173501
Thermohygrometer	BODYCOM	BJ5478	21/12/16	22/12/16	120612-2
Thermohygrometer	XIAOMI	MHO-C201	21/12/16	22/12/16	00089675
Thermohygrometer	BODYCOM	BJ5478	21/06/24	22/06/24	N/A
Loop Antenna	ETS-Lindgren	6502	21/01/28	23/01/28	00226186
Hybrid Antenna	Schwarzbeck	VULB9163	21/06/24	23/06/24	9163-572
Horn Antenna	ETS-Lindgren	3117	21/06/24	22/06/24	00143278
Horn Antenna	A.H.Systems Inc.	SAS-574	21/06/24	22/06/24	155
PreAmplifier	tsj	MLA-0118-B01-40	21/12/16	22/12/16	1852267
PreAmplifier	tsj	MLA-1840-J02-45	21/06/24	22/06/24	16966-10728
PreAmplifier	H.P	8447D	21/12/16	22/12/16	2944A07774
High Pass Filter	Wainwright Instruments	WHKX12-935-1000-15000-40SS	21/06/24	22/06/24	8
High Pass Filter	Wainwright Instruments	WHKX10-2838-3300-18000-60SS	21/06/24	22/06/24	1
High Pass Filter	Wainwright Instruments	WHNX8.0/26.5-6SS	21/06/24	22/06/24	3
Attenuator	Hefei Shunze	SS5T2.92-10-40	21/06/24	22/06/24	16012202
Attenuator	Aeroflex/Weinschel	56-3	21/06/24	22/06/24	Y2370
Attenuator	SMAJK	SMAJK-2-3	21/06/24	22/06/24	3
Attenuator	SMAJK	SMAJK-2-3	21/06/24	22/06/24	2
Attenuator	Aeroflex/Weinschel	86-10-11	21/06/24	22/06/24	408
Power Meter & Wide Bandwidth Sensor	Anritsu	ML2496A MA2490A	21/12/16	22/12/16	1338004 1249303
Power Meter Wide Bandwidth Sensor	Agilent Technologies	N1911A N1921A	21/06/24	22/06/24	MY53360016 MY53360018

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
Cable	DT&C	Cable	21/01/08	22/01/08	G-1
			22/01/04	23/01/04	
Cable	DT&C	Cable	21/01/08	22/01/08	G-2
			22/01/04	23/01/04	
Cable	HUBER+SUHNER	SUCOFLEX 100	21/01/08	22/01/08	G-3
			22/01/04	23/01/04	
Cable	DT&C	Cable	21/01/08	22/01/08	G-4
			22/01/04	23/01/04	
Cable	Junkosha	MWX241	21/01/08	22/01/08	mmW-1
			22/01/04	23/01/04	
Cable	Junkosha	MWX241	21/01/08	22/01/08	mmW-4
			22/01/04	23/01/04	
Cable	HUBER+SUHNER	SUCOFLEX100	21/01/08	22/01/08	M-01
			22/01/04	23/01/04	
Cable	HUBER+SUHNER	SUCOFLEX100	21/01/08	22/01/08	M-02
			22/01/04	23/01/04	
Cable	JUNFLON	MWX241	21/01/08	22/01/08	M-03
			22/01/04	23/01/04	
Cable	JUNFLON	J12J101757-00	21/01/08	22/01/08	M-07
			22/01/04	23/01/04	
Cable	HUBER+SUHNER	SUCOFLEX106	21/01/08	22/01/08	M-09
			22/01/04	23/01/04	
Cable	DT&C	Cable	21/01/05	22/01/05	RFC-44
			22/01/04	23/01/04	
Test Software	tsj	Radiated Emission Measurement	NA	NA	Version 2.00.0177

Note1: The measurement antennas were calibrated in accordance to the requirements of ANSI C63.5-2017.

Note2: The cable is not a regular calibration item, so it has been calibrated by DT & C itself.

2. Test Methodology

The measurement procedures described in the ANSI C63.10-2013 and the guidance provided in KDB558074 D01v05r02 were used in measurement of the EUT.

The EUT was tested per the guidance of KDB558074 D01v05r02. And ANSI C63.10-2013 was used to reference appropriate EUT setup and maximizing procedures of radiated spurious emission and AC line conducted emission testing.

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT was operated in the test mode to fix the TX frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

2.3. General Test Procedures

Conducted Emissions

The power-line conducted emission test procedure is not described on the KDB558074 D01v05r02.

So this test was fulfilled with the requirements in Section 6.2 of ANSI C63.10-2013.

The EUT is placed on the wooden table, which is 0.8 m above ground plane and the conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and Average detector.

Radiated Emissions

Basically the radiated tests were performed with KDB558074 D01v05r02. But some requirements and procedures like test site requirements, EUT setup and maximizing procedure were fulfilled with the requirements in Section 5 and 6 of the ANSI C63.10-2013 as stated on section 12.1 of the KDB558074 D01v05r02.

The EUT is placed on a non-conductive table. For emission measurements at or below 1 GHz, the table height is 80 cm. For emission measurements above 1 GHz, the table height is 1.5 m. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

2.4. Instrument Calibration

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.5. Description of Test Modes

The EUT has been tested with the operating condition for maximizing the emission characteristics. A test program is used to control the EUT for staying in continuous transmitting.

Transmitting Configuration of EUT

Mode	Data rate
802.11b	1 Mbps ~ 11 Mbps
802.11g	6 Mbps ~ 54 Mbps
802.11n(HT20)	MCS 0 ~ MCS 7
802.11ac(VHT20)	MCS 0 ~ MCS 8
802.11n(HT40)	MCS 0 ~ MCS 7
802.11ac(VHT40)	MCS 0 ~ MCS 9

EUT Operation test setup

- Test Software: MPTool(1.0.0.10)
- Power setting: Refer to the table below.

Test Mode

Test mode	Worst case data rate	Tested Frequency (MHz)	Power Setting
TM 1	802.11b 1 Mbps	2 412	33
		2 437	34
		2 462	36
TM 2	802.11g 6 Mbps	2 412	44
		2 437	44
		2 462	44
TM 3	802.11n(HT20) MCS 0	2 412	41
		2 437	41
		2 462	41
TM 4	802.11n(HT40) MCS 0	2 422	41
		2 437	41
		2 452	40

Note1: The worst case data rate was determined according to the power measurements.

Note2: The power measurement results for all modes and data rate were reported.

3. Antenna Requirements

▣ **According to Part 15.203**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

The antenna is permanently attached on the device.

Therefore this E.U.T complies with the requirement of Part 15.203

4. Summary of Test Result

FCC part section(s)	RSS section(s)	Test Description	Limit	Test Condition	Status Note 1
15.247(a)	RSS-247[5.2]	6 dB Bandwidth	> 500 kHz	Conducted	C
15.247(b)	RSS-247[5.4]	Maximum Peak Output Power	< 1 Watt (conducted), FCC & IC < 4 Watt (e.i.r.p), IC		C
15.247(d)	RSS-247[5.5]	Unwanted Emissions(Conducted)	20 dBc in any 100 kHz BW		C
15.247(e)	RSS-247[5.2]	Power Spectral Density	< 8 dBm / 3 kHz		C
-	RSS-Gen[6.7]	Occupied Bandwidth (99 %)	NA		C
15.247(d) 15.205 15.209	RSS-247[5.5] RSS-Gen[8.9] RSS-Gen[8.10]	Unwanted Emissions(Radiated)	Part 15.209 limits (Refer to section 5.5)	Radiated	C Note3, 4
15.207	RSS-Gen[8.8]	AC Power-Line Conducted Emissions	Part 15.207 limits (Refer to section 5.6)	AC Line Conducted	NA Note5
15.203	-	Antenna Requirements	Part 15.203 (Refer to section 3)	-	C

Note 1: **C**=Comply **NC**=Not Comply **NT**=Not Tested **NA**=Not Applicable
 Note 2: For radiated emission tests below 30 MHz were performed on semi-anechoic chamber which is correlated with OATS.
 Note 3: This test item was performed in three orthogonal EUT positions and the worst case data was reported.
 Note 4: The radiated test items were performed at DC 12 V and DC 24 V. And the worst case data are reported.
 Note 5 This device is installed in a car. Therefore the power source is a battery of car.

5. Test Result


5.1. Maximum Peak Conducted Output Power

■ Test Requirements and limit, Part 15.247(b) & RSS-247 [5.4]

The maximum permissible conducted output power is 1 Watt.

The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e) of RSS-247.

5.1.1. Test Setup

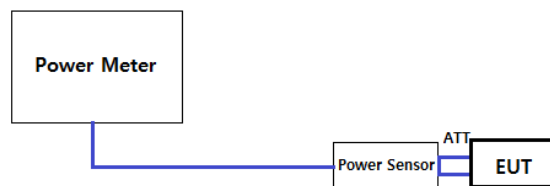

5.1.2. Test Procedures

- KDB558074 D01v05r02 - Section 8.3.1.3
- ANSI C63.10-2013 – Section 11.9.1.3

RBW ≥ DTSPKPM1 Peak-reading power meter method

The maximum conducted output powers were measured using a broadband peak RF power meter which has greater video bandwidth than DUT's DTS bandwidth and utilize a fast-responding diode detector.

- KDB558074 D01v05r02 - Section 8.3.2.3
- ANSI C63.10-2013 – Section 11.9.2.3

Method AVGPM-G

The average conducted output powers were measured using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

5.1.3. Test Results

- Refer to the next page

- Power Supply: 24 V

Mode	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm)							
			Data Rate (Mbps)							
			1	2	5.5	11	-	-	-	-
802.11b	2 412	PK	15.57	14.88	14.95	15.16	-	-	-	-
		AV	13.04	12.43	12.52	12.79	-	-	-	-
	2 437	PK	15.68	15.05	15.27	15.43	-	-	-	-
		AV	13.06	12.52	12.65	12.83	-	-	-	-
	2 462	PK	17.15	16.71	16.73	16.37	-	-	-	-
		AV	14.68	14.20	14.46	14.13	-	-	-	-

Mode	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm)							
			Data Rate (Mbps)							
			6	9	12	18	24	36	48	54
802.11g	2 412	PK	21.18	19.98	19.83	20.80	19.39	20.75	21.08	20.91
		AV	13.14	12.98	12.94	13.11	13.13	12.95	13.09	12.77
	2 437	PK	21.05	19.87	19.71	20.68	19.27	20.66	20.95	20.79
		AV	12.89	12.73	12.71	12.84	12.86	12.71	12.83	12.53
	2 462	PK	21.01	19.81	19.65	20.66	19.22	20.61	20.89	20.73
		AV	12.83	12.68	12.65	12.78	12.81	12.66	12.75	12.47

Mode	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm)							
			Data Rate (MCS)							
			0	1	2	3	4	5	6	7
802.11n (HT20)	2 412	PK	20.63	20.24	20.31	20.43	20.47	20.50	20.15	20.53
		AV	11.91	11.52	11.66	11.72	11.69	11.87	11.48	11.83
	2 437	PK	20.36	19.97	20.06	20.18	20.20	20.25	19.89	20.26
		AV	11.62	11.24	11.37	11.42	11.38	11.59	11.21	11.54
	2 462	PK	20.24	19.85	19.94	20.05	20.06	20.13	19.76	20.15
		AV	11.49	11.11	11.25	11.30	11.27	11.46	11.09	11.43

Mode	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm)								
			Data Rate (MCS)								
			0	1	2	3	4	5	6	7	8
802.11ac (VHT20)	2 412	PK	20.12	19.01	18.92	19.17	19.39	19.85	19.68	18.44	20.01
		AV	11.81	11.62	11.71	11.69	11.75	11.76	11.35	11.74	11.78
	2 437	PK	19.85	18.92	18.88	19.06	19.24	19.53	19.47	18.38	19.75
		AV	11.55	11.22	11.31	11.36	11.28	11.52	11.18	11.45	11.49
	2 462	PK	19.81	18.87	18.85	18.96	19.14	19.28	19.31	18.33	19.71
		AV	11.42	11.08	11.23	11.28	11.25	11.36	11.12	11.29	11.31

Mode	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm)							
			Data Rate (MCS)							
			0	1	2	3	4	5	6	7
802.11n (HT40)	2 422	PK	21.26	21.11	20.97	21.06	21.07	21.13	21.17	21.16
		AV	11.52	11.59	11.72	11.77	11.84	11.86	11.81	11.93
	2 437	PK	21.22	21.08	20.83	20.93	20.91	21.02	21.04	21.01
		AV	11.42	11.45	11.58	11.61	11.63	11.65	11.59	11.62
	2 452	PK	20.62	20.48	20.31	20.43	20.45	20.52	20.55	20.53
		AV	10.74	10.77	10.81	10.83	10.76	10.74	10.68	10.60

Mode	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm)									
			Data Rate (MCS)									
			0	1	2	3	4	5	6	7	8	9
802.11ac (VHT40)	2 422	PK	20.98	20.81	20.88	20.91	20.92	20.95	20.73	20.85	20.74	20.83
		AV	11.85	11.62	11.63	11.69	11.75	11.78	11.51	11.69	11.72	11.77
	2 437	PK	20.88	20.76	20.79	20.81	20.80	20.83	20.65	20.72	20.66	20.74
		AV	11.69	11.51	11.48	11.55	11.59	11.62	11.36	11.47	11.51	11.54
	2 452	PK	20.42	20.25	20.13	20.27	20.29	20.21	20.34	20.35	20.21	20.28
		AV	10.68	10.71	10.73	10.77	10.72	10.67	10.60	10.58	10.62	10.66

- Power Supply: 12 V

Mode	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm)							
			Data Rate (Mbps)							
			1	2	5.5	11	-	-	-	-
802.11b	2 412	PK	15.52	14.83	14.89	15.11	-	-	-	-
		AV	13.01	12.42	12.49	12.75	-	-	-	-
	2 437	PK	15.63	15.01	15.23	15.37	-	-	-	-
		AV	13.03	12.49	12.58	12.77	-	-	-	-
	2 462	PK	17.07	16.66	16.68	13.31	-	-	-	-
		AV	14.65	14.15	14.42	14.09	-	-	-	-

Mode	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm)							
			Data Rate (Mbps)							
			6	9	12	18	24	36	48	54
802.11g	2 412	PK	21.15	19.95	19.78	20.76	19.35	20.71	21.04	20.87
		AV	13.11	12.96	12.91	13.08	13.09	12.93	13.04	12.76
	2 437	PK	21.01	19.88	19.65	20.62	19.20	20.58	20.89	20.75
		AV	12.88	12.71	12.66	12.83	12.85	12.69	12.81	12.52
	2 462	PK	20.97	19.85	19.60	20.56	19.13	20.52	20.86	20.69
		AV	12.81	12.65	12.59	12.76	12.78	12.62	12.75	12.45

Mode	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm)							
			Data Rate (MCS)							
			0	1	2	3	4	5	6	7
802.11n (HT20)	2 412	PK	20.45	20.13	20.25	20.34	20.36	20.42	20.03	20.43
		AV	11.86	11.47	11.62	11.66	11.63	11.82	11.41	11.79
	2 437	PK	20.25	19.96	20.04	20.15	20.14	20.22	19.85	20.25
		AV	11.59	11.16	11.35	11.38	11.35	11.51	11.14	11.50
	2 462	PK	20.18	19.89	19.97	20.09	20.07	20.15	19.76	20.18
		AV	11.47	11.04	11.25	11.29	11.26	11.40	11.05	11.41

Mode	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm)								
			Data Rate (MCS)								
			0	1	2	3	4	5	6	7	8
802.11ac (VHT20)	2 412	PK	20.01	18.96	18.88	19.14	19.35	19.76	19.60	19.35	19.85
		AV	11.76	11.48	11.63	11.64	11.68	11.72	11.29	11.68	11.75
	2 437	PK	19.83	18.78	18.69	18.95	19.14	19.58	19.40	19.16	19.64
		AV	11.54	11.25	11.43	11.45	11.47	11.51	11.11	11.50	11.52
	2 462	PK	19.78	18.72	18.64	18.88	19.07	19.52	19.35	19.11	19.58
		AV	11.40	11.12	11.30	11.33	11.35	11.38	10.97	11.34	11.36

Mode	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm)							
			Data Rate (MCS)							
			0	1	2	3	4	5	6	7
802.11n (HT40)	2 422	PK	21.21	21.02	20.89	20.92	20.95	21.12	20.88	21.01
		AV	11.53	11.73	11.74	11.79	11.84	11.91	11.92	11.75
	2 437	PK	21.19	20.98	19.87	20.76	20.70	21.09	20.33	19.95
		AV	11.41	11.61	11.63	11.71	11.76	11.80	11.84	11.64
	2 452	PK	20.58	20.41	20.23	20.37	20.41	20.49	20.52	20.51
		AV	10.71	10.74	10.66	10.72	10.70	10.69	10.64	10.56

Mode	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm)									
			Data Rate (MCS)									
			0	1	2	3	4	5	6	7	8	9
802.11ac (VHT40)	2 422	PK	20.94	20.76	20.81	20.83	20.85	20.88	20.65	20.84	20.70	20.82
		AV	11.81	11.61	11.62	11.67	11.74	11.76	11.48	11.67	11.69	11.74
	2 437	PK	20.86	20.68	20.75	20.76	20.78	20.83	20.52	20.77	20.61	20.71
		AV	11.67	11.48	11.49	11.55	11.69	11.62	11.35	11.56	11.55	11.62
	2 452	PK	20.38	20.21	20.09	20.25	20.27	20.16	20.28	20.26	20.14	20.23
		AV	10.66	10.68	10.70	10.73	10.70	10.64	10.58	10.53	10.57	10.65

5.2. 6 dB Bandwidth

▣ Test Requirements and limit, Part 15.247(a) & RSS-247 [5.2]

The bandwidth at 6 dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the EUT's antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

The minimum permissible 6 dB bandwidth is 500 kHz.

5.2.1. Test Setup

Refer to the APPENDIX I.

5.2.2. Test Procedures

- KDB558074 D01v05r02 - Section 8.2
- ANSI C63.10-2013 – Section 11.8.2

1. Set resolution bandwidth (RBW) = 100 kHz
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = **Peak**.
4. Trace mode = **max hold**.
5. Sweep = **auto couple**.
6. Allow the trace to stabilize.
7. Option 1 - Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Option 2 - The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW $\geq 3 \times$ RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

5.2.3. Test Results


Test Mode	Frequency	Test Results (MHz)	
		24 V	12 V
TM 1	2 412	10.12	10.12
	2 437	10.14	10.13
	2 462	10.12	10.14
TM 2	2 412	16.37	16.35
	2 437	16.36	16.36
	2 462	16.37	16.37
TM 3	2 412	17.14	17.14
	2 437	17.38	17.07
	2 462	17.34	17.15
TM 4	2 422	35.86	35.62
	2 437	35.78	35.71
	2 452	35.77	35.76

RESULT PLOTS

- Power Supply: 24 V


6 dB Bandwidth

TM 1 & 2412

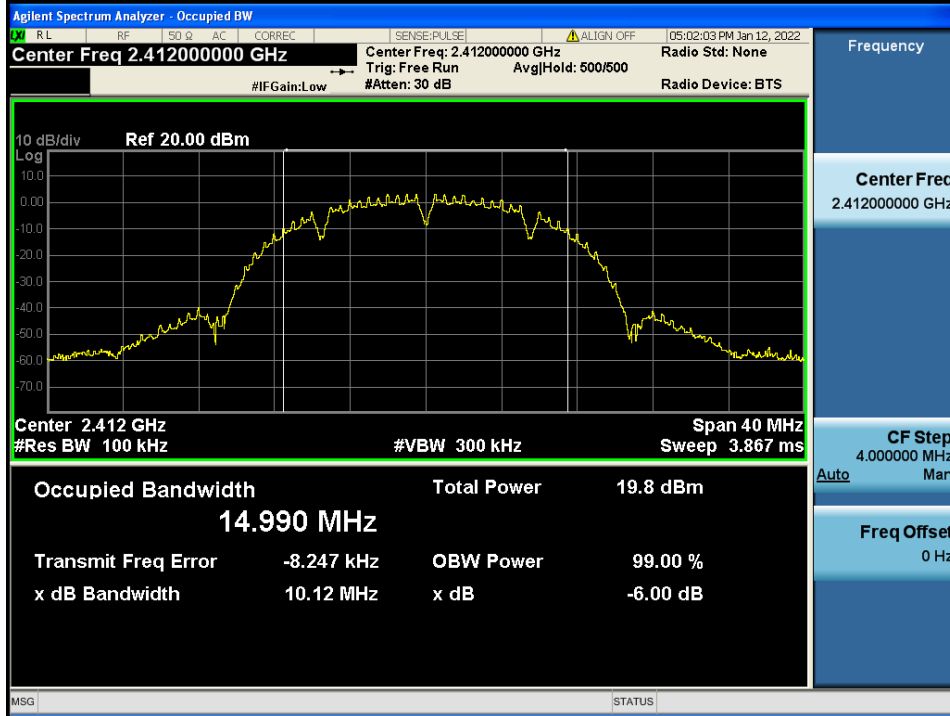


6 dB Bandwidth

TM 1 & 2437

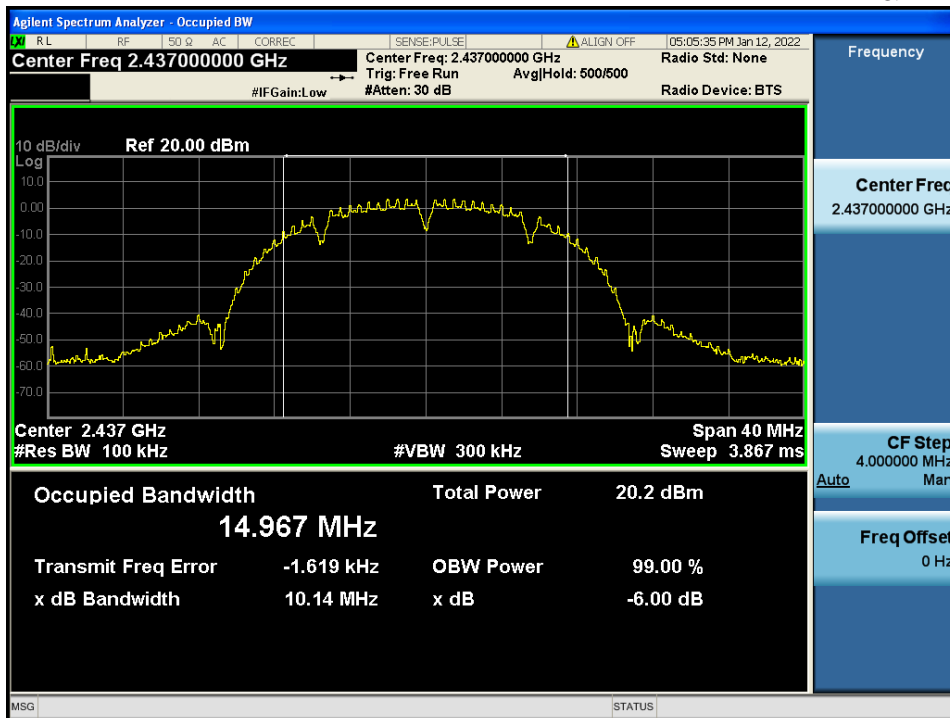


6 dB Bandwidth

TM 1 & 2.462

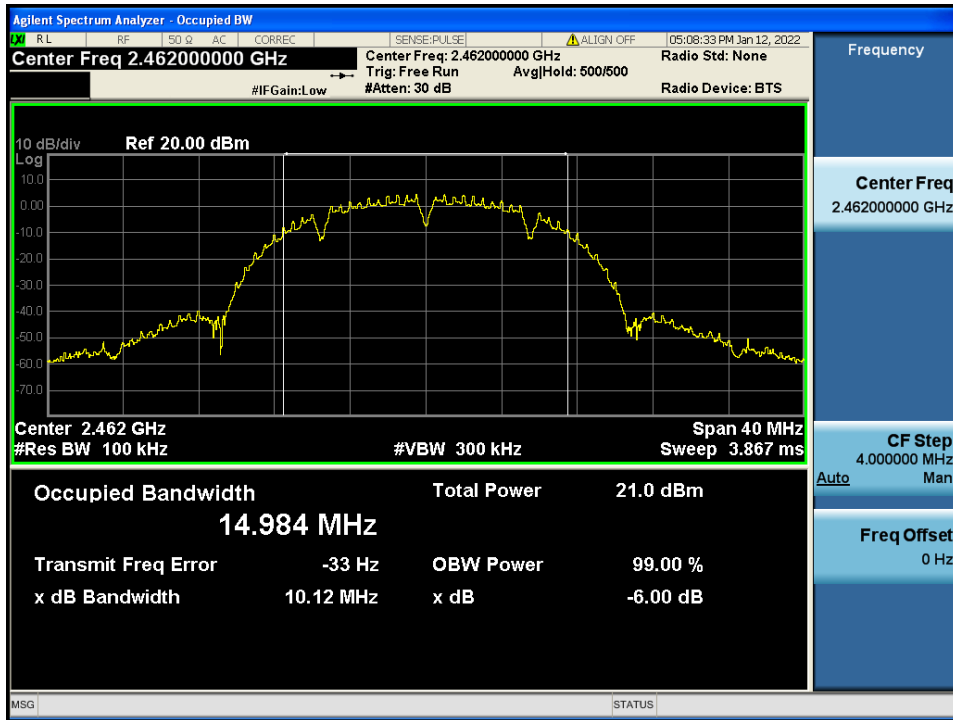


6 dB Bandwidth

TM 2 & 2412

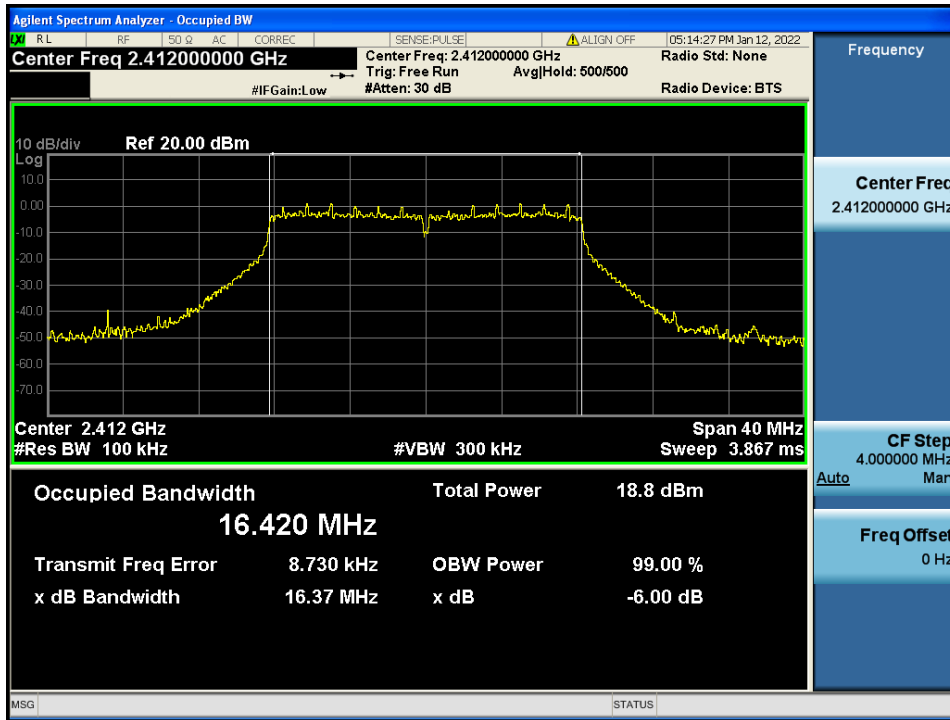


6 dB Bandwidth

TM 2 & 2437

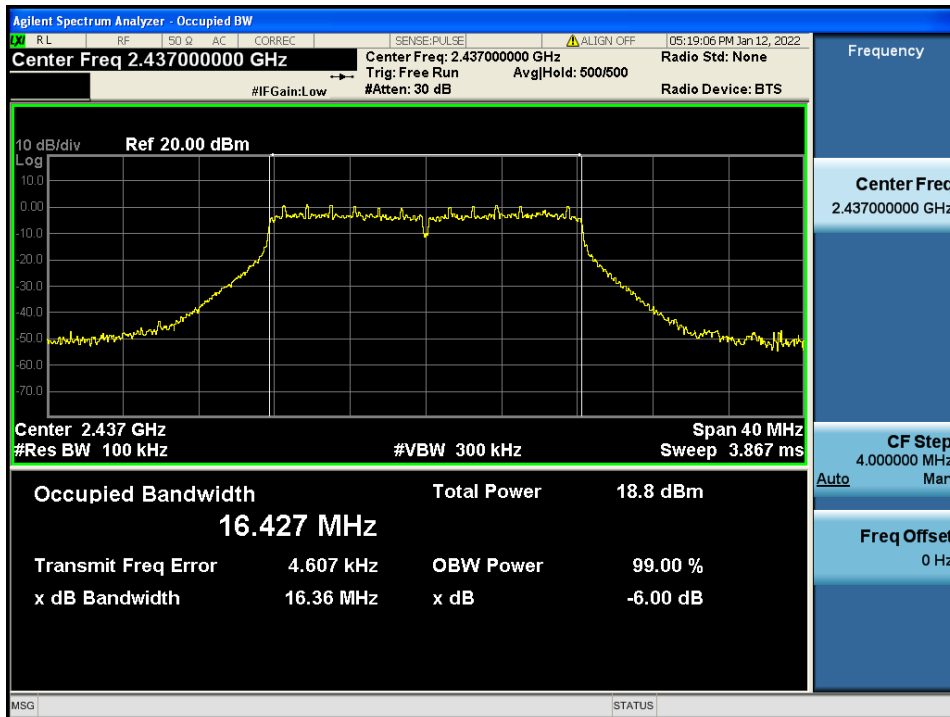


6 dB Bandwidth

TM 2 & 2.462

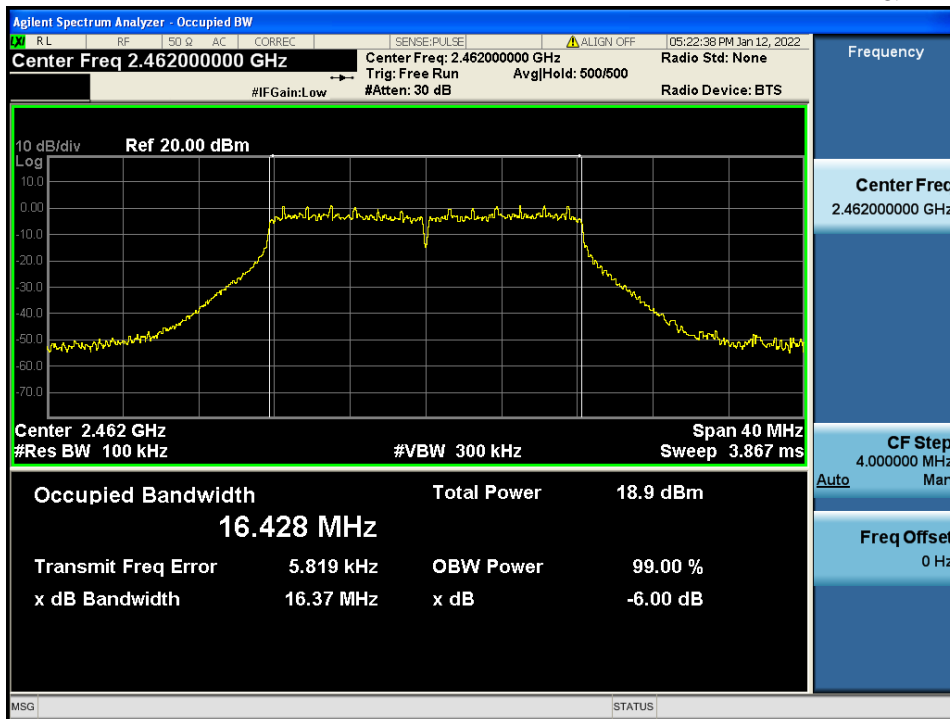


6 dB Bandwidth

TM 3 & 2 412

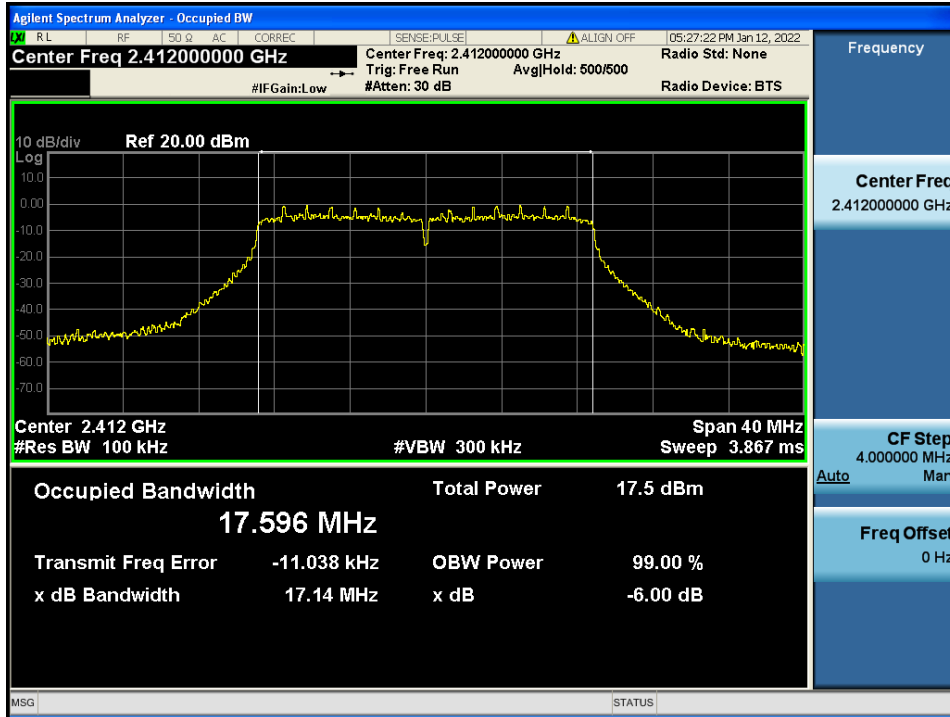


6 dB Bandwidth

TM 3 & 2 437

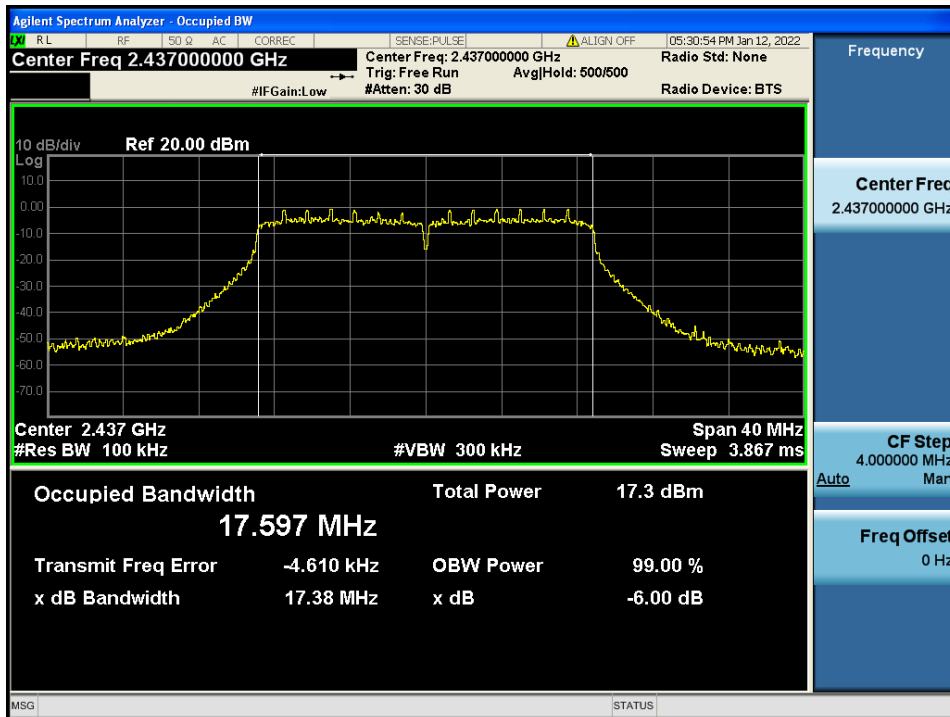


6 dB Bandwidth

TM 3 & 2 462

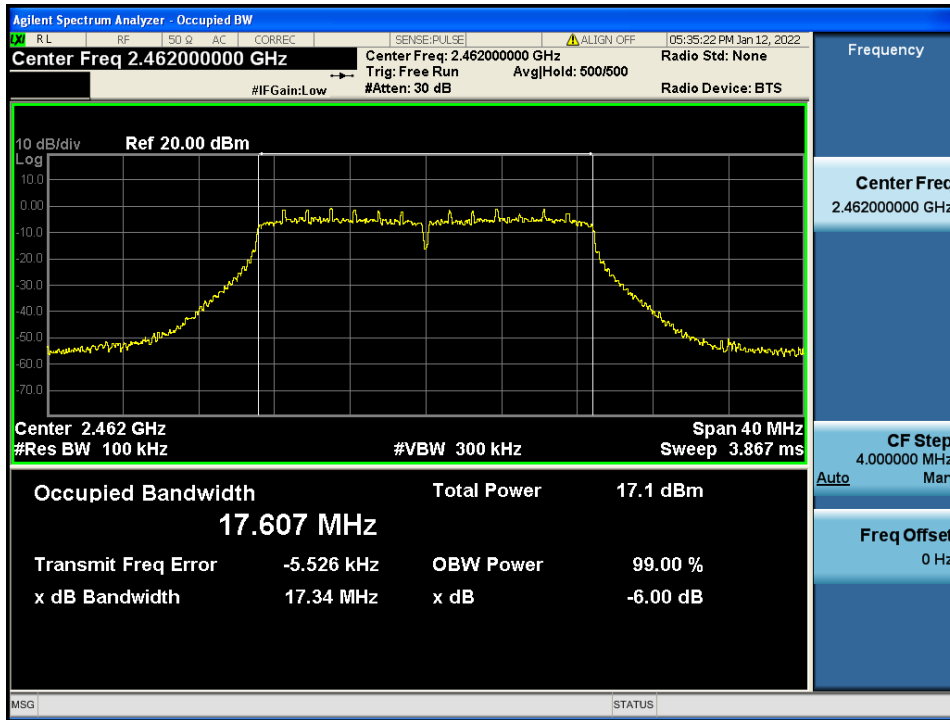


6 dB Bandwidth

TM 4 & 2 422

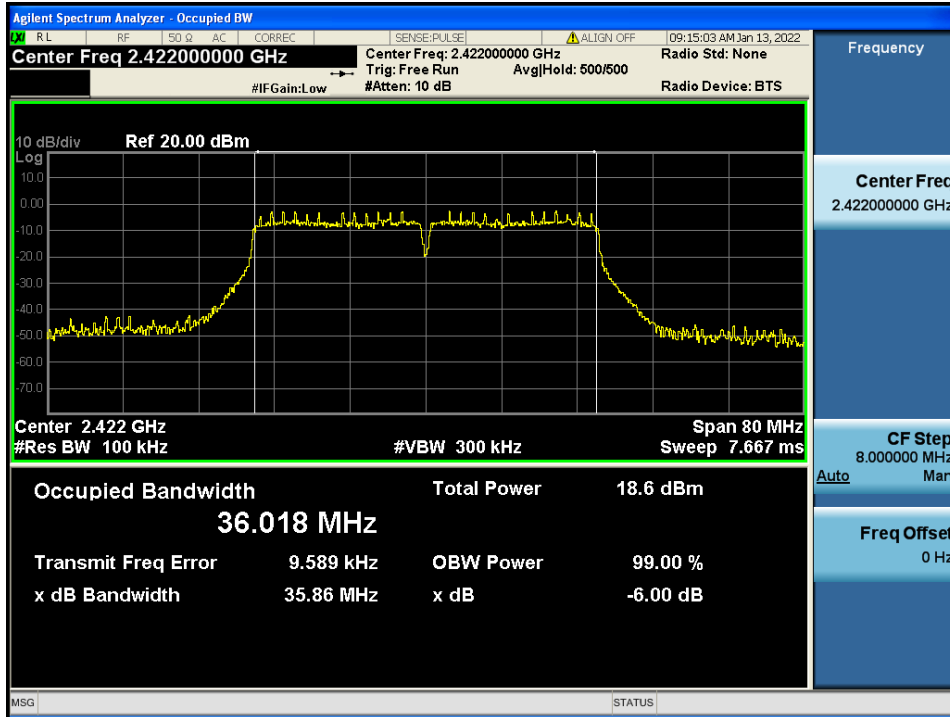


6 dB Bandwidth

TM 4 & 2 437

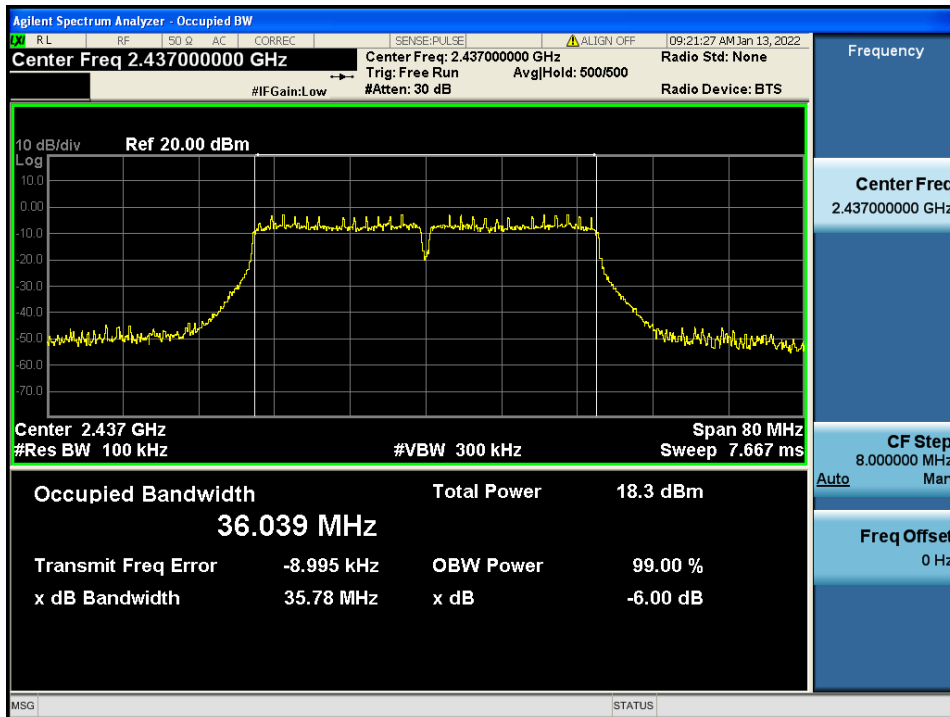

6 dB Bandwidth


TM 4 & 2.452

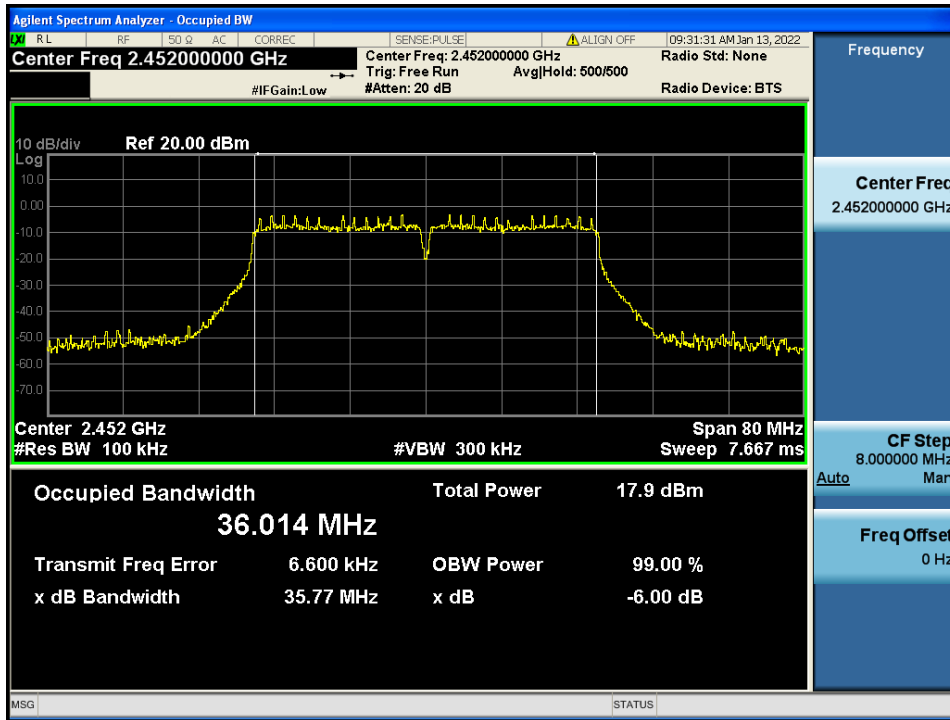

- Power Supply: 12 V


6 dB Bandwidth

TM 1 & 2 412

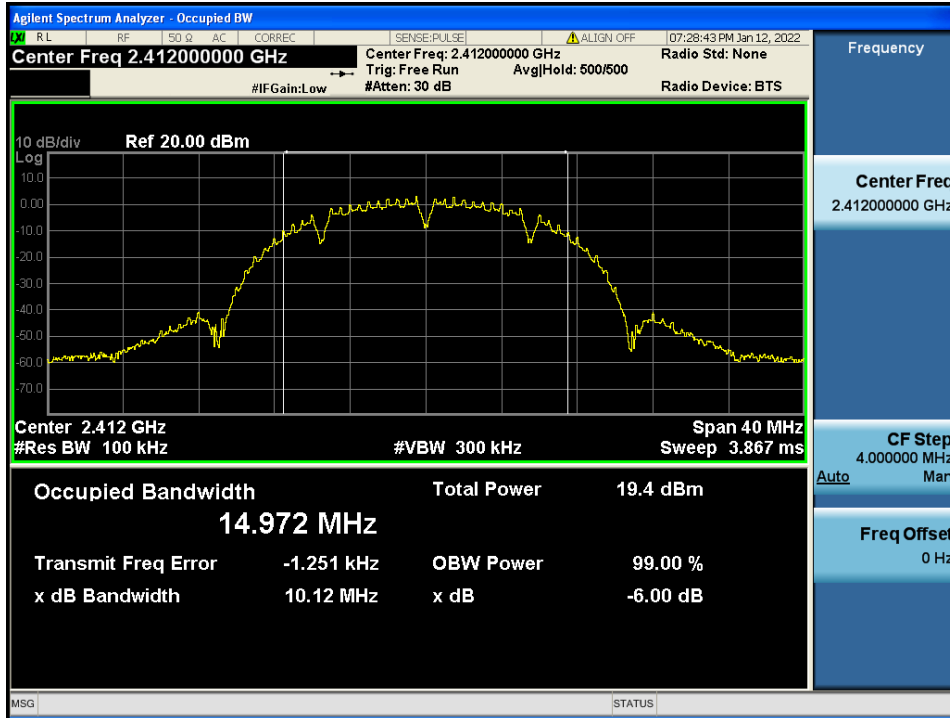

6 dB Bandwidth

TM 1 & 2 437

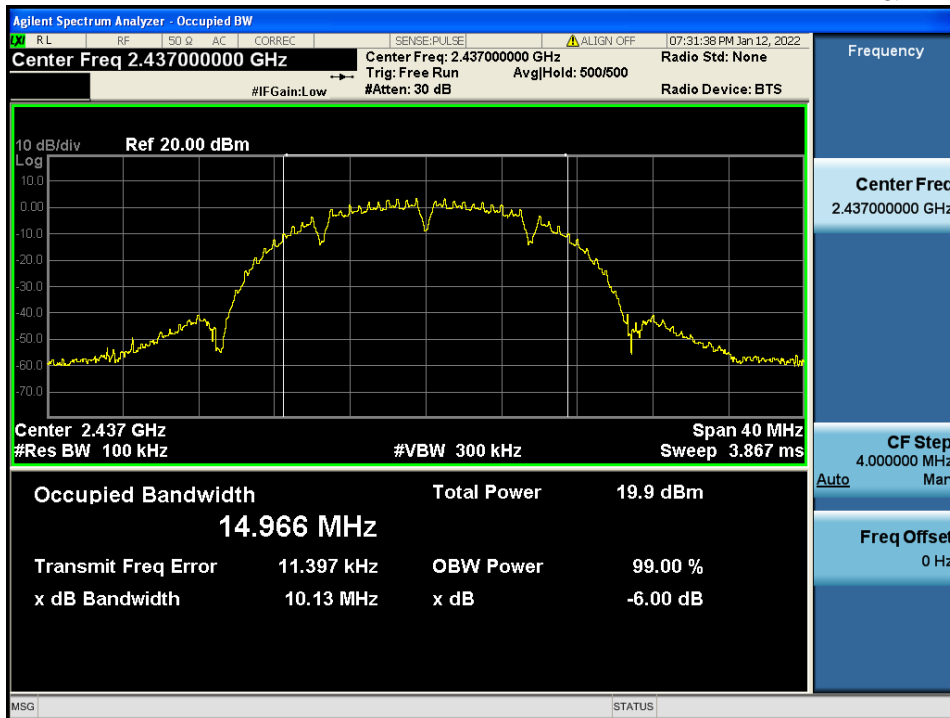


6 dB Bandwidth

TM 1 & 2.462




6 dB Bandwidth

TM 2 & 2412

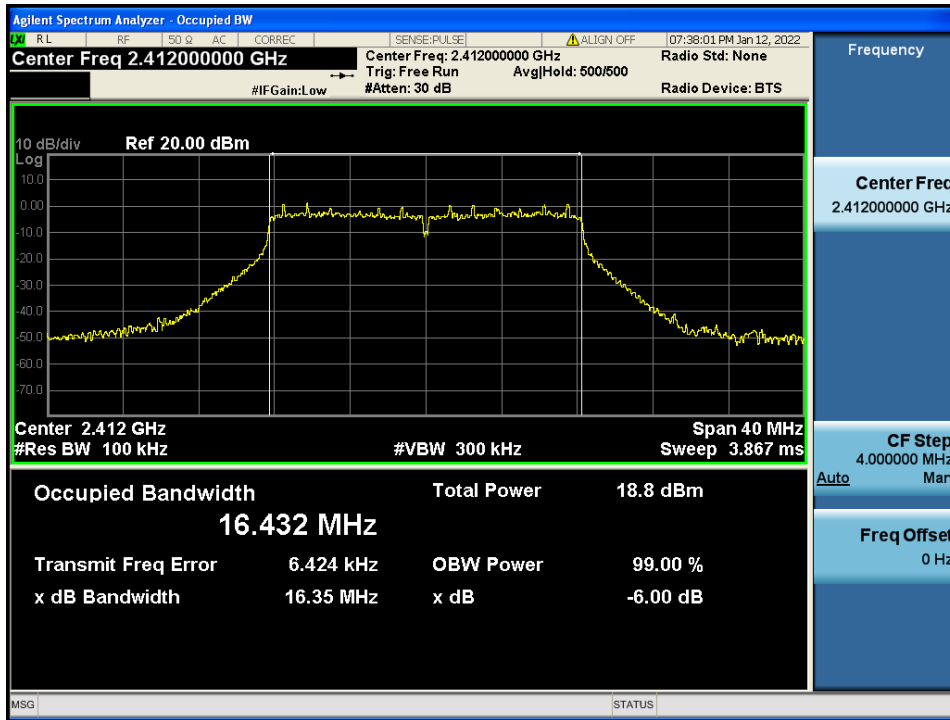


6 dB Bandwidth

TM 2 & 2437

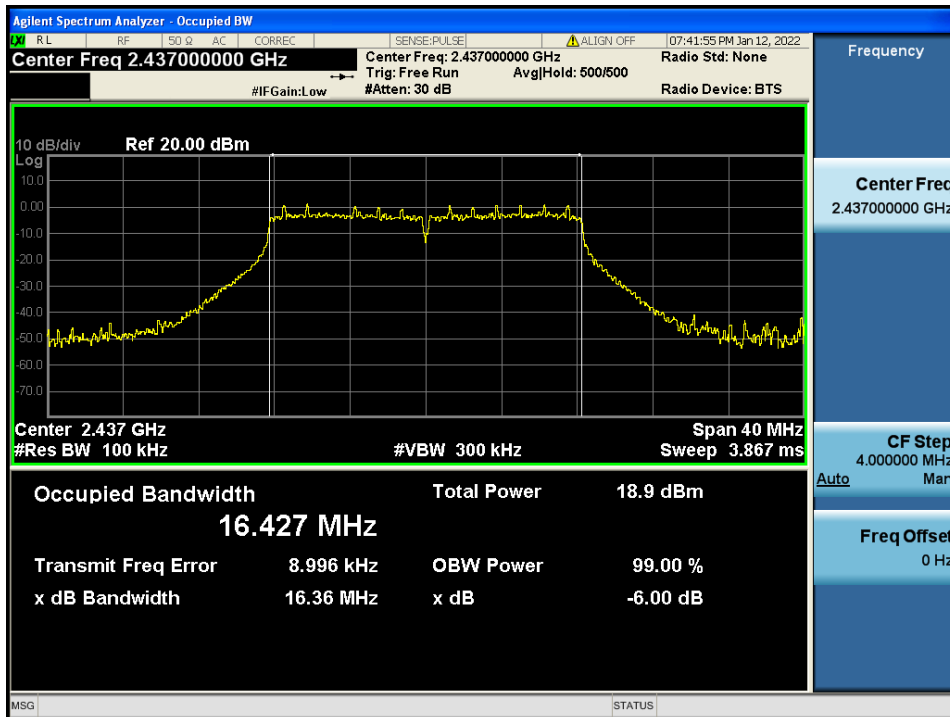


6 dB Bandwidth

TM 2 & 2.462

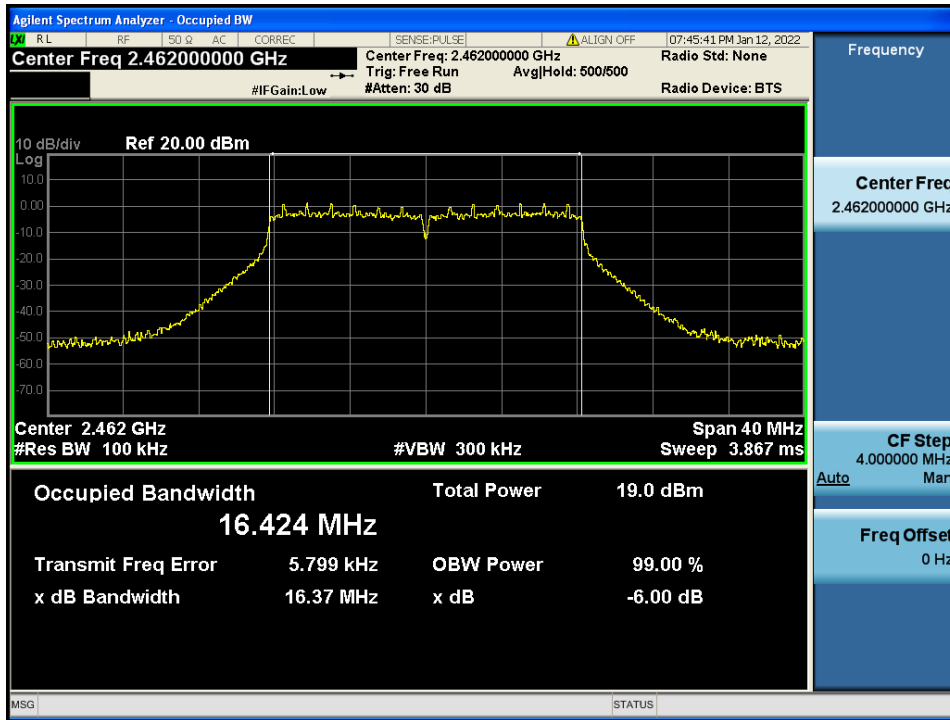


6 dB Bandwidth

TM 3 & 2 412

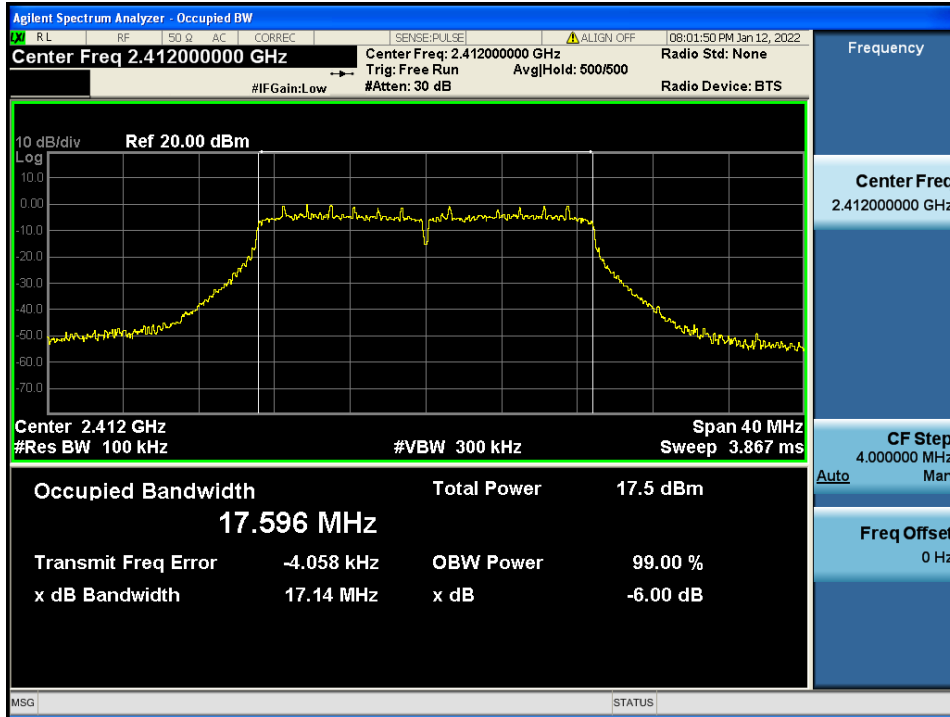


6 dB Bandwidth

TM 3 & 2 437

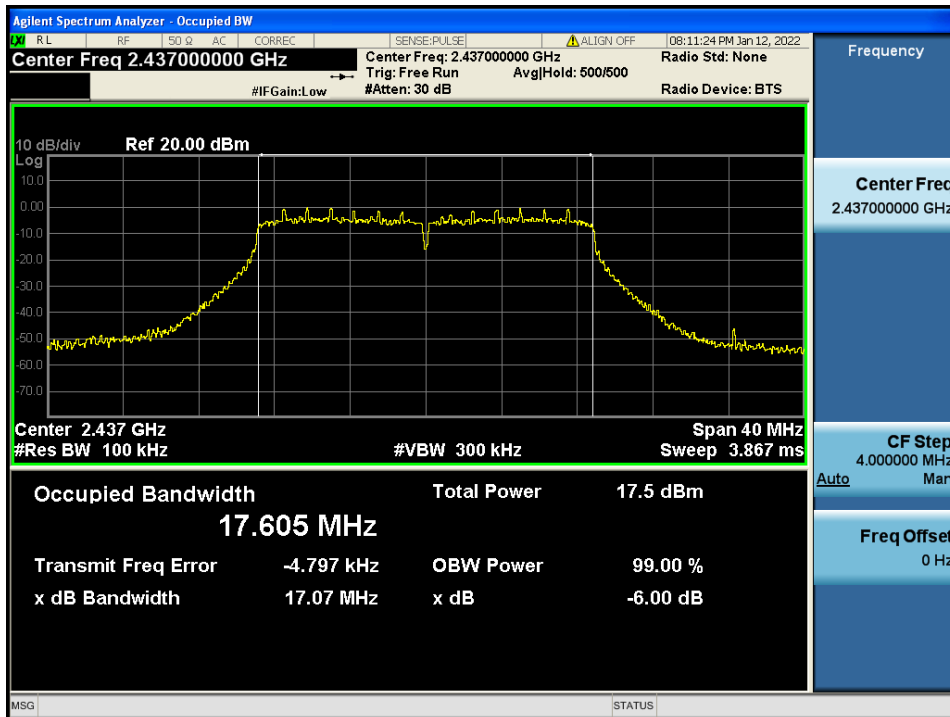


6 dB Bandwidth

TM 3 & 2 462

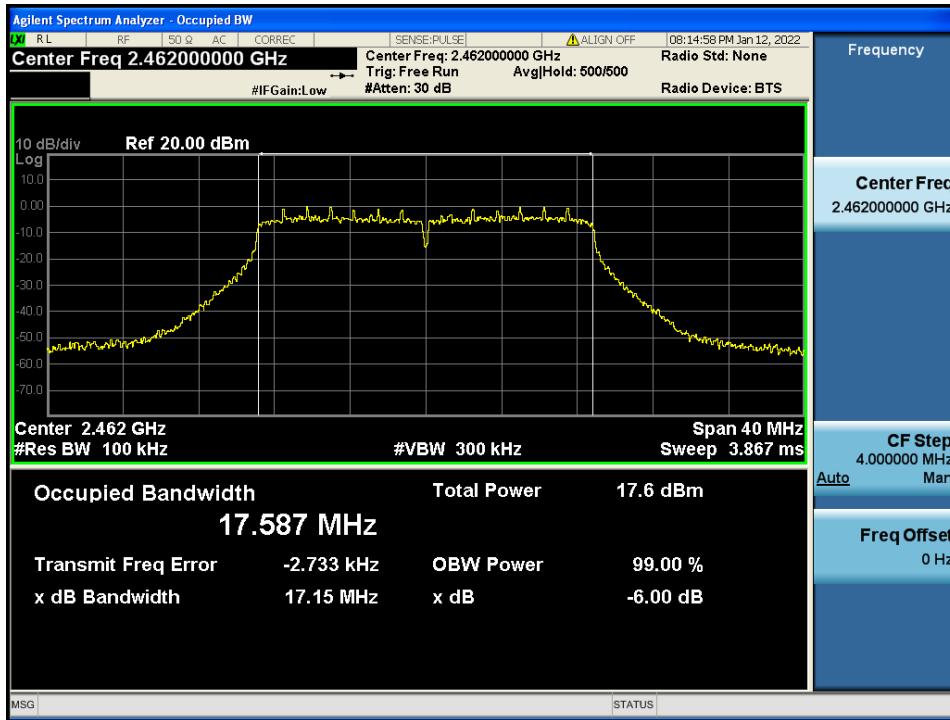


6 dB Bandwidth

TM 4 & 2 422

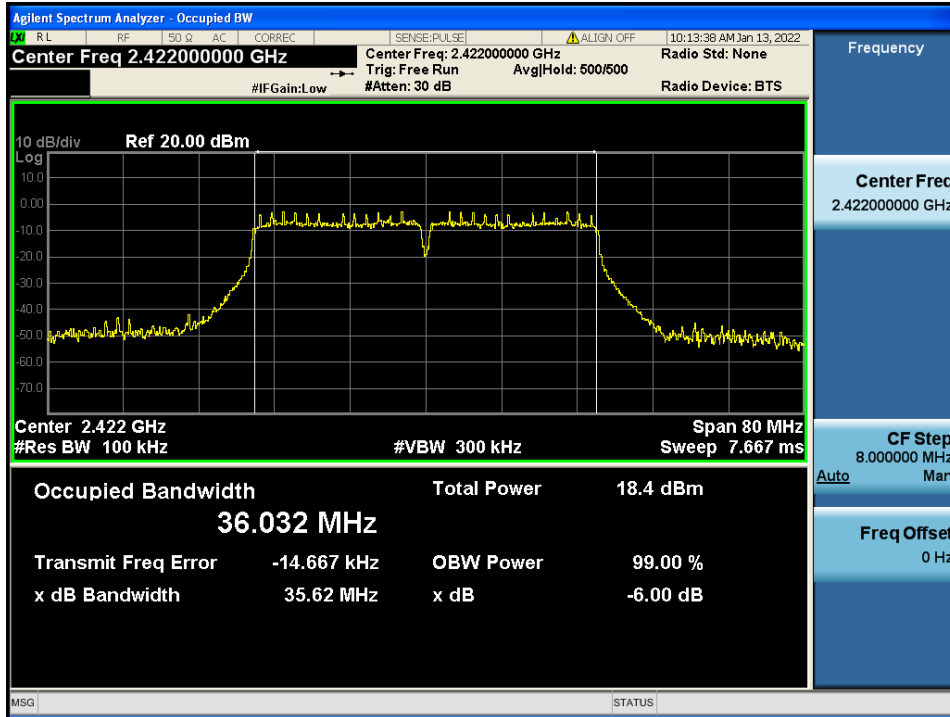


6 dB Bandwidth

TM 4 & 2 437

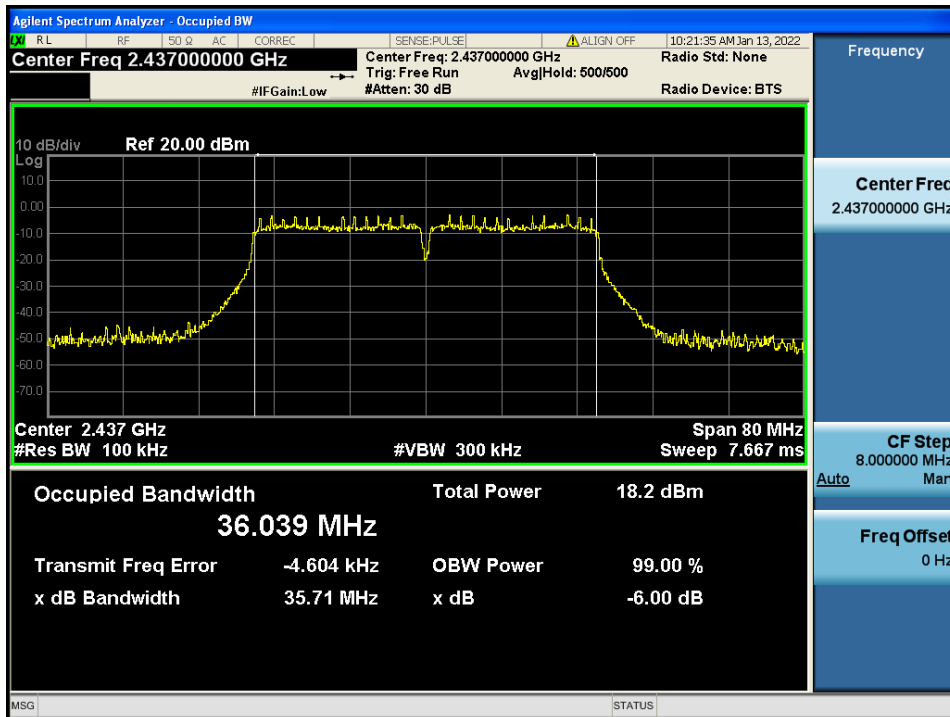

6 dB Bandwidth

TM 4 & 2.452

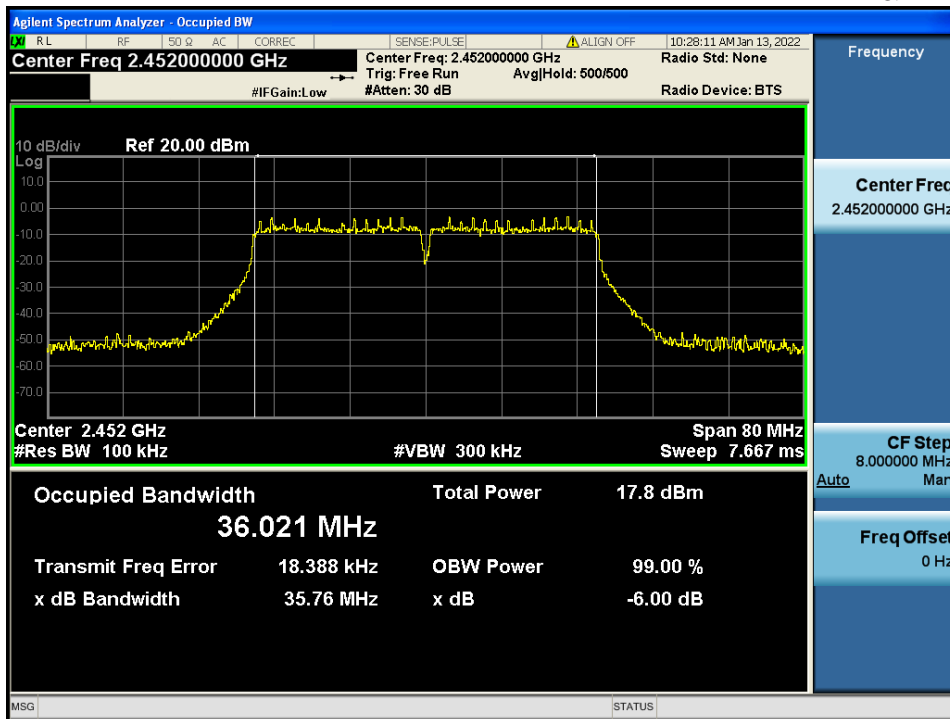

5.3. Power Spectral Density

■ Test requirements and limit, Part 15.247(e) & RSS-247 [5.2]

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

Minimum Standard

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission

5.3.1. Test Setup

Refer to the APPENDIX I.

5.3.2. Test Procedures

- KDB558074 D01v05r02 - Section 8.4
- ANSI C63.10-2013 – Section 11.10.2

Method PKPSD (peak PSD)

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to **1.5 times** the DTS bandwidth.
3. Set the RBW : **3 kHz ≤ RBW ≤ 100 kHz**.
4. Set the VBW ≥ **3 x RBW**.
5. Detector = **peak**.
6. Sweep time = **auto couple**.
7. Trace mode = **max hold**.
8. Allow trace to fully stabilize.
9. Use the **peak marker function** to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.3.3. Test Results


Test Mode	Frequency	RBW	PKPSD (dBm)		Limit (dBm)
			24 V	12 V	
TM 1	2 412	3 kHz	-10.62	-10.67	8.00
	2 437	3 kHz	-10.33	-10.23	8.00
	2 462	3 kHz	-9.22	-9.15	8.00
TM 2	2 412	3 kHz	-12.98	-12.84	8.00
	2 437	3 kHz	-12.90	-12.89	8.00
	2 462	3 kHz	-12.74	-12.68	8.00
TM 3	2 412	3 kHz	-15.10	-14.91	8.00
	2 437	3 kHz	-15.08	-15.00	8.00
	2 462	3 kHz	-15.48	-14.84	8.00
TM 4	2 422	3 kHz	-16.84	-17.25	8.00
	2 437	3 kHz	-17.19	-17.27	8.00
	2 452	3 kHz	-17.85	-17.45	8.00

RESULT PLOTS

- Power Supply: 24 V


Power Spectral Density

TM 1 & 2 412

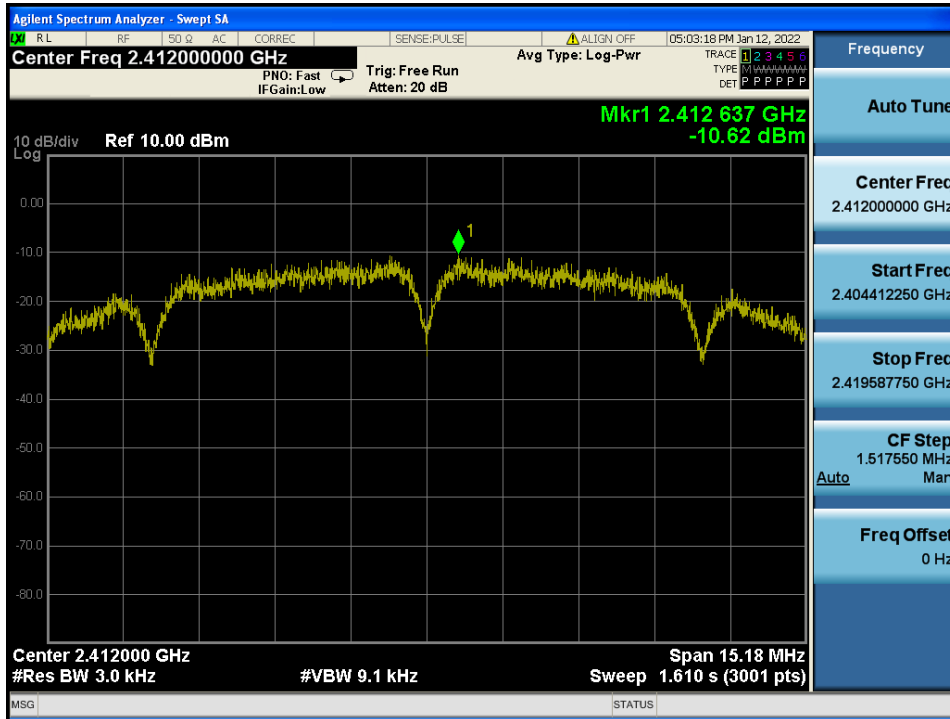


Power Spectral Density

TM 1 & 2 437

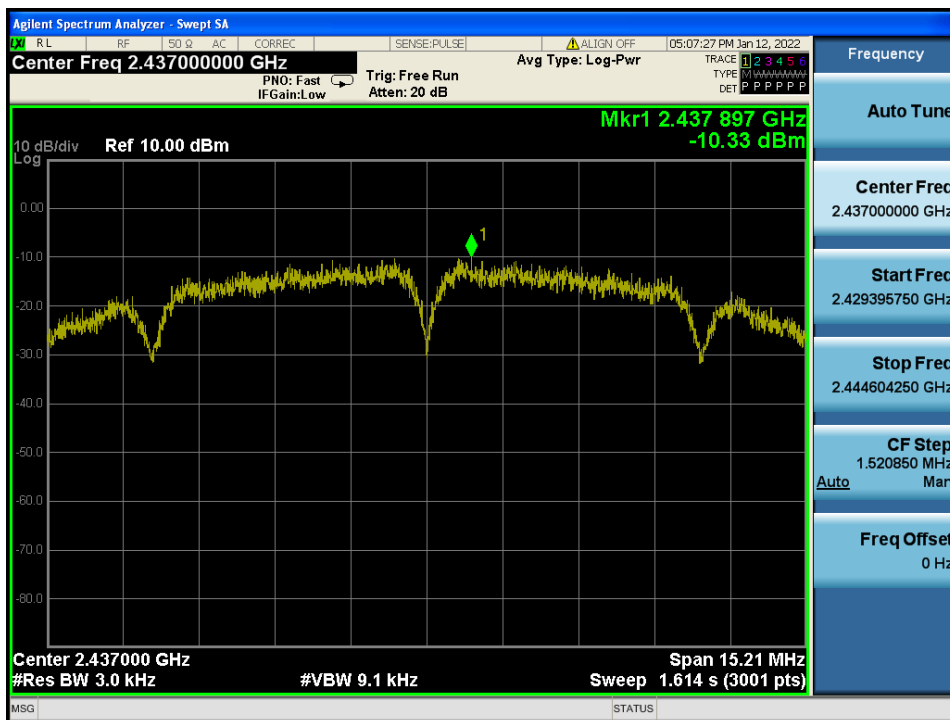


Power Spectral Density

TM 1 & 2 462

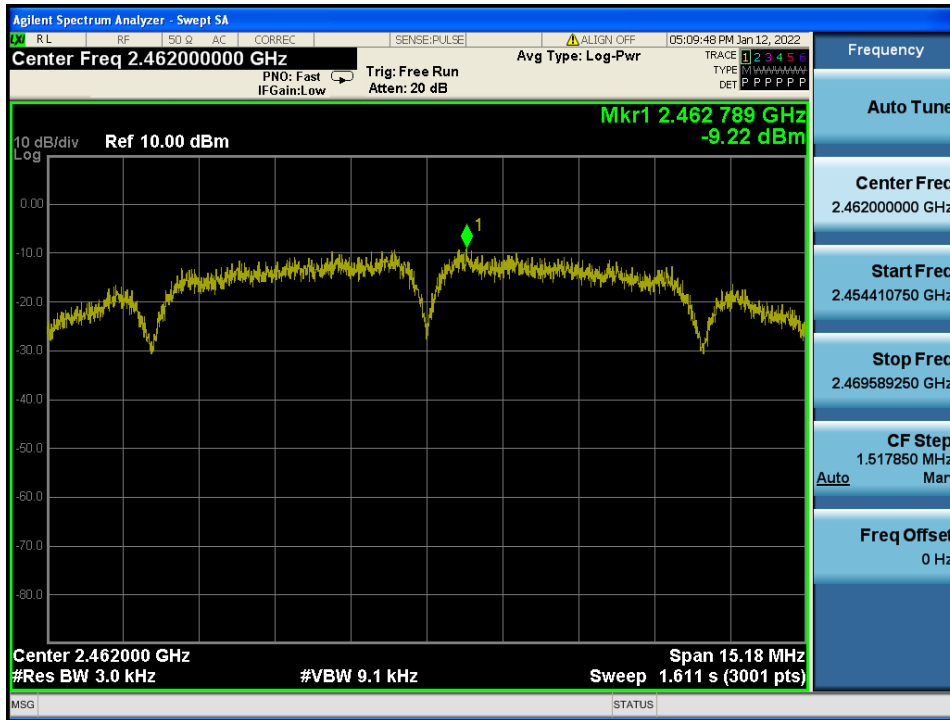


Power Spectral Density

TM 2 & 2 412

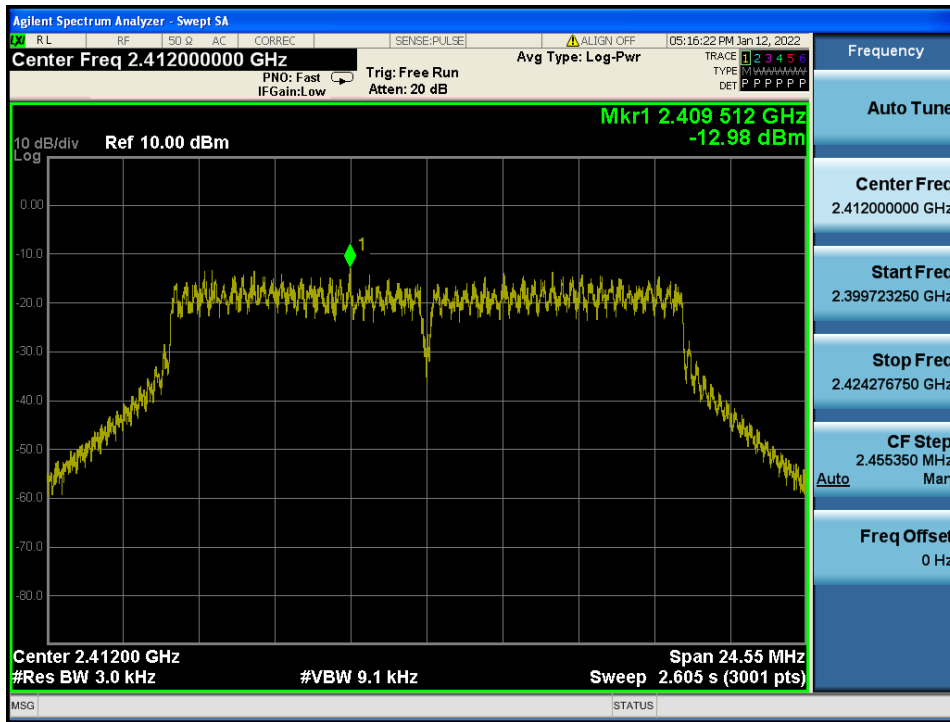


Power Spectral Density

TM 2 & 2 437

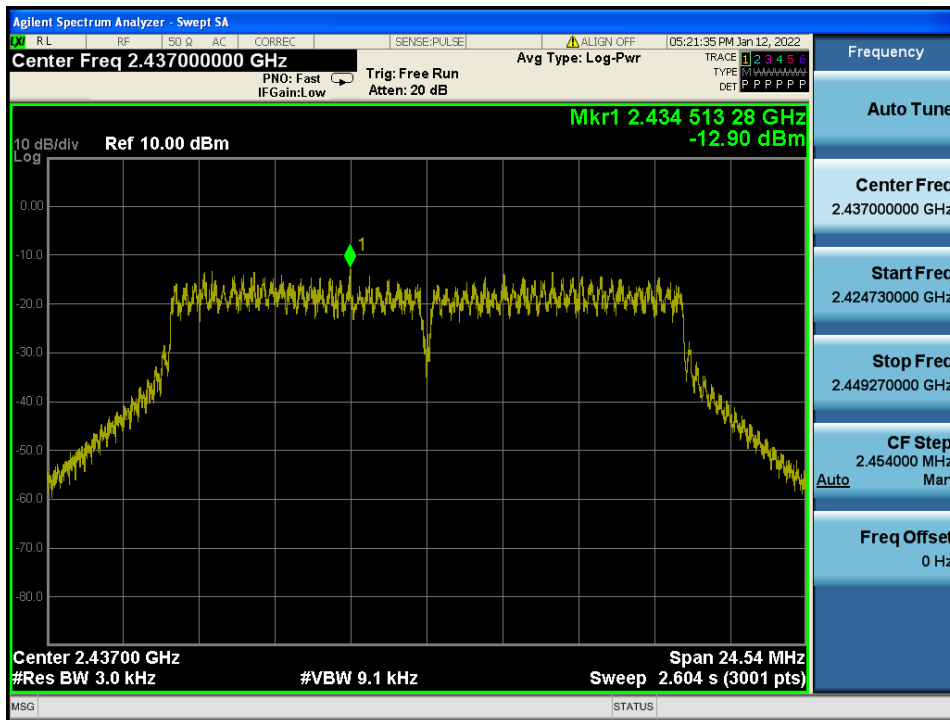


Power Spectral Density

TM 2 & 2 462

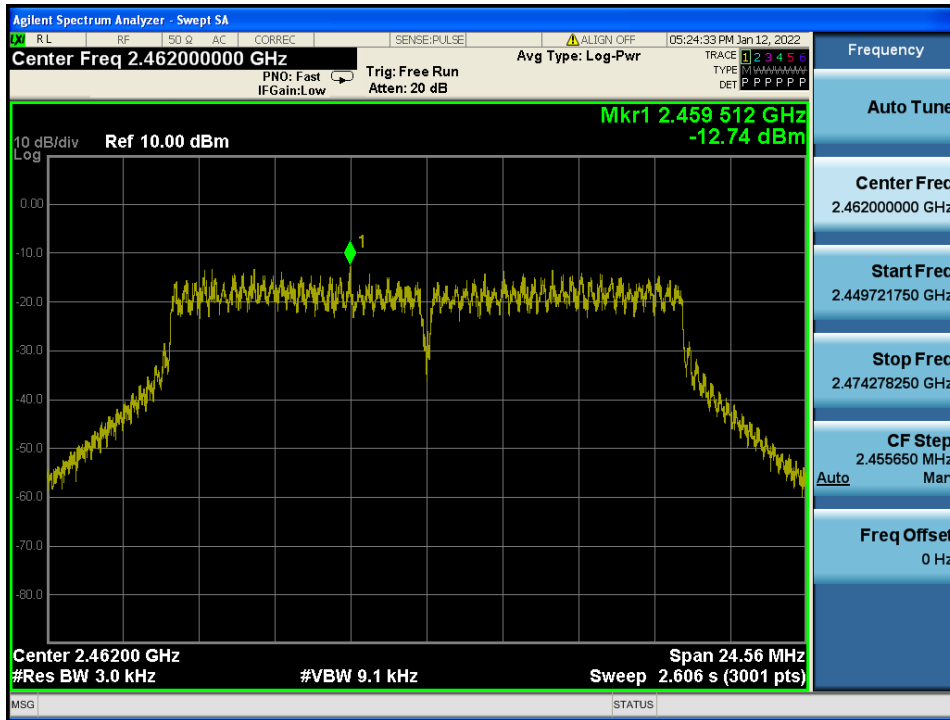


Power Spectral Density

TM 3 & 2 412

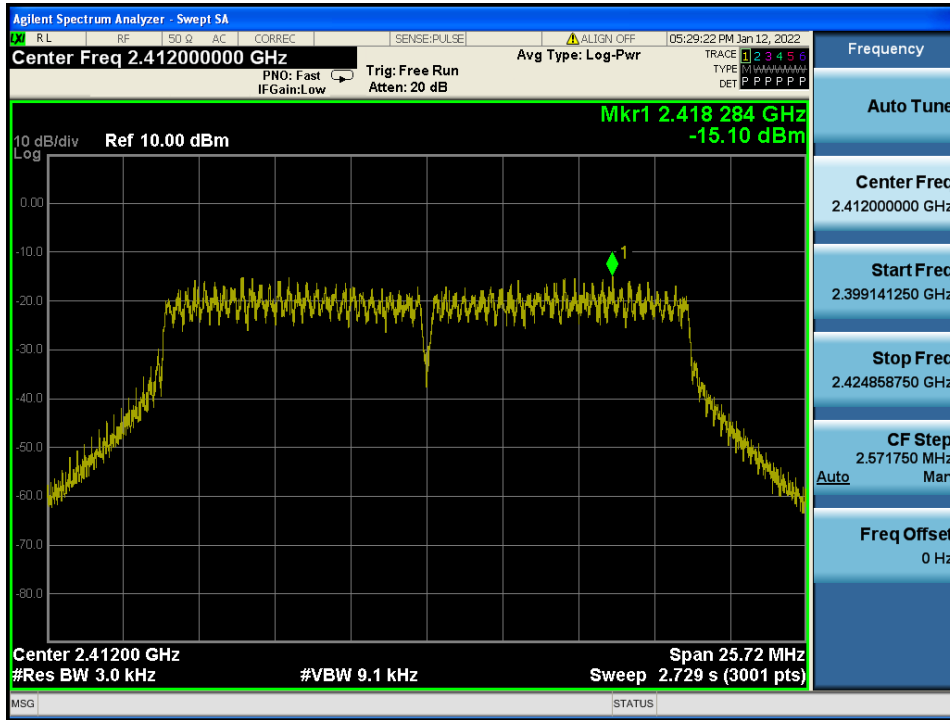


Power Spectral Density

TM 3 & 2 437

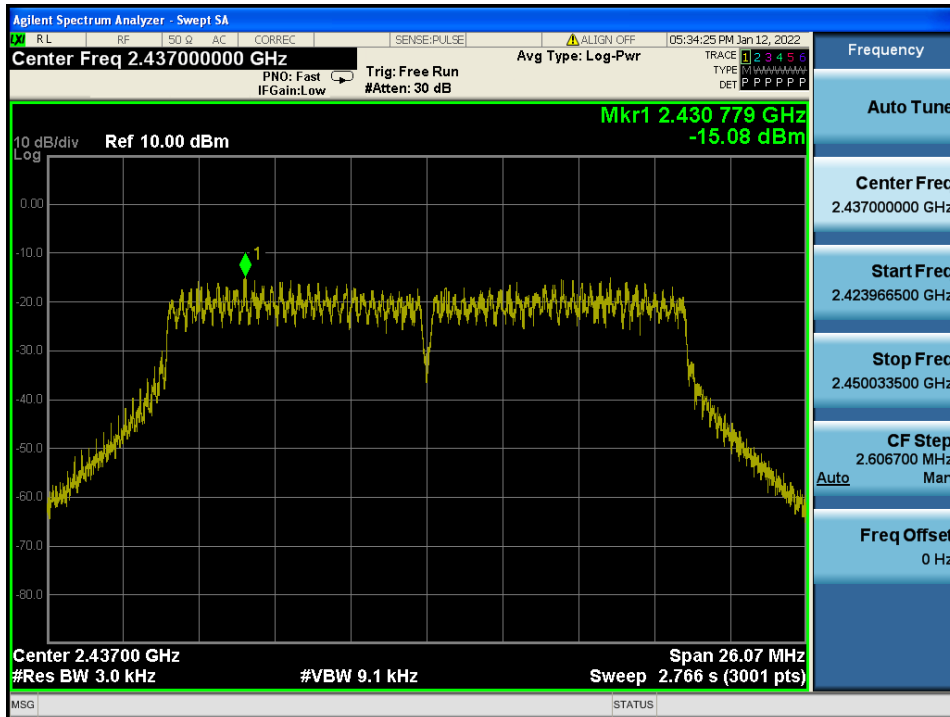


Power Spectral Density

TM 3 & 2 462

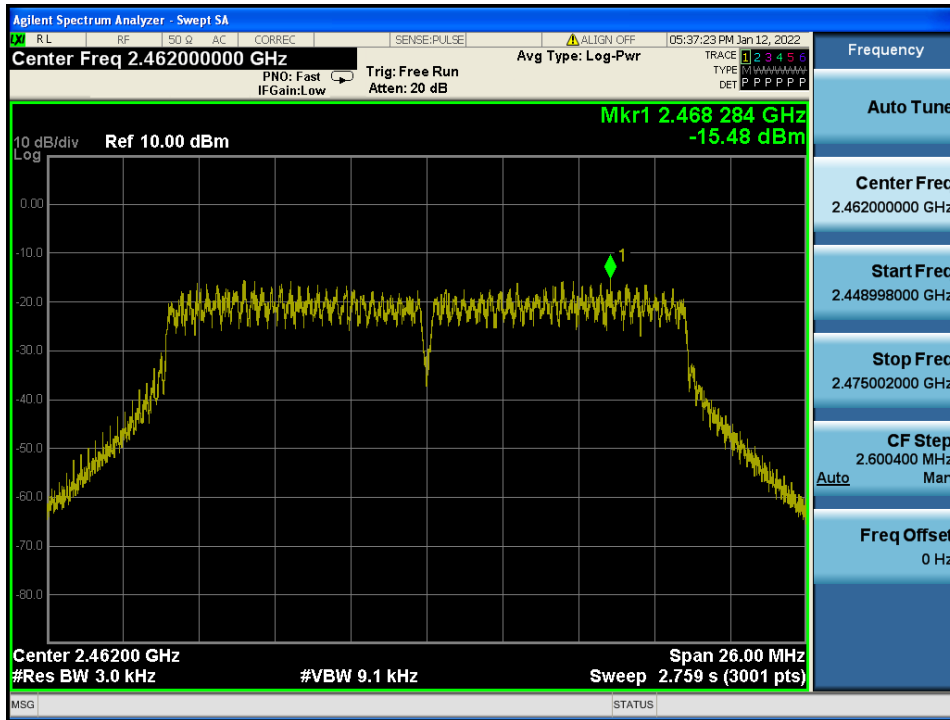


Power Spectral Density

TM 4 & 2 422

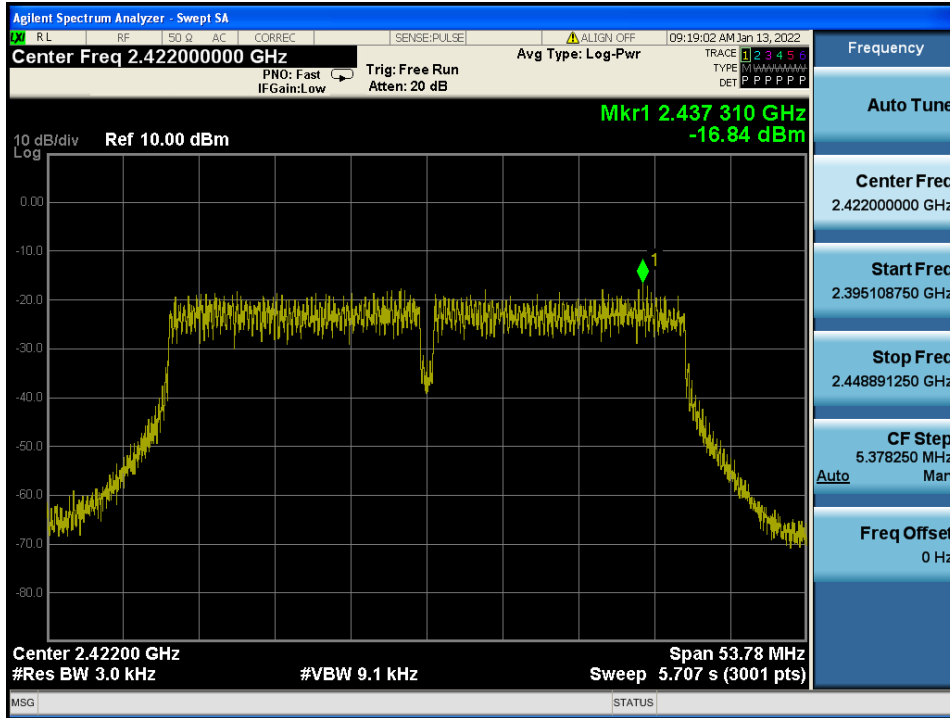


Power Spectral Density

TM 4 & 2 437

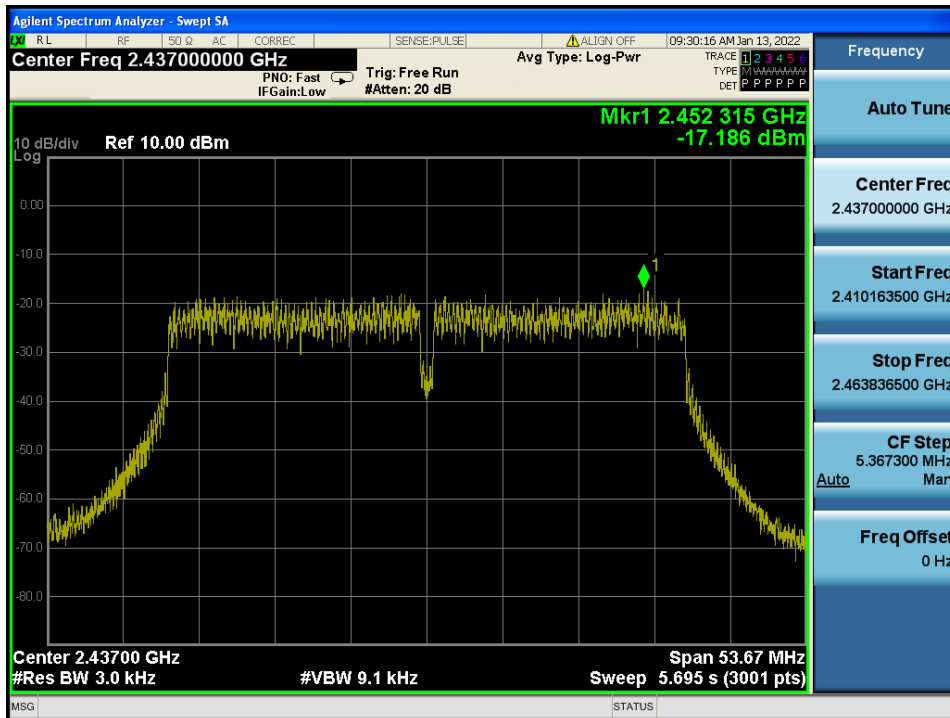

Power Spectral Density

TM 4 & 2 452

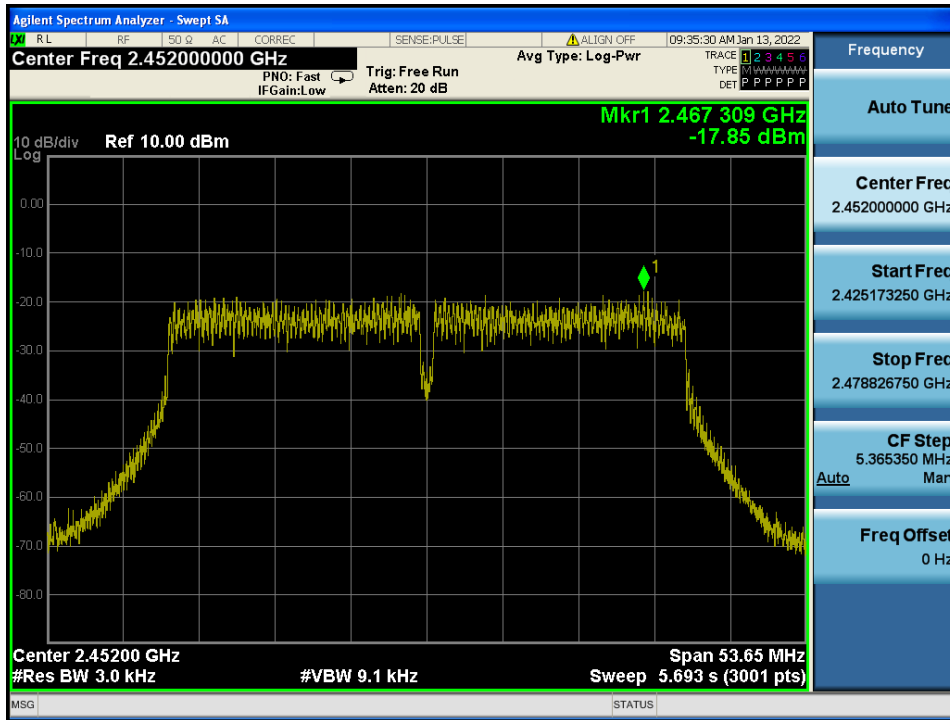

- Power Supply: 12 V


Power Spectral Density

TM 1 & 2 412




Power Spectral Density

TM 1 & 2 437

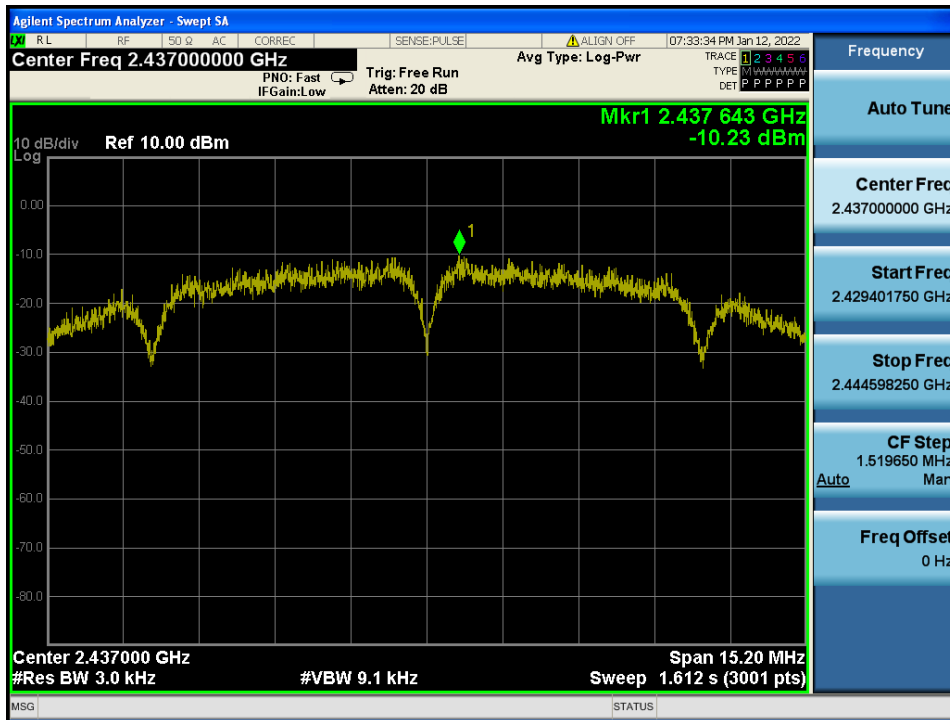


Power Spectral Density

TM 1 & 2 462

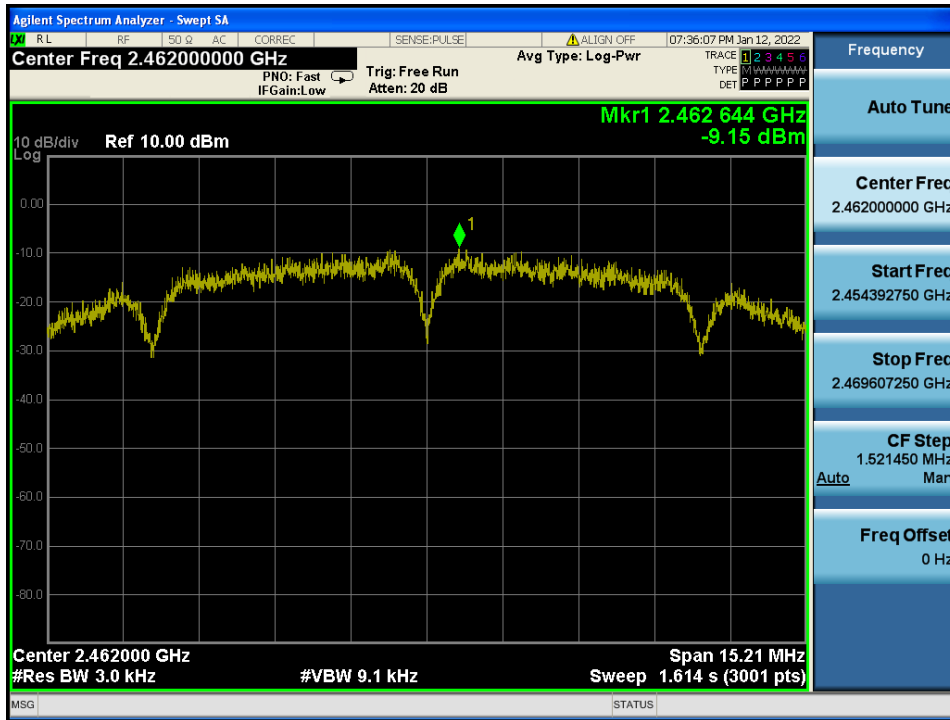


Power Spectral Density

TM 2 & 2 412

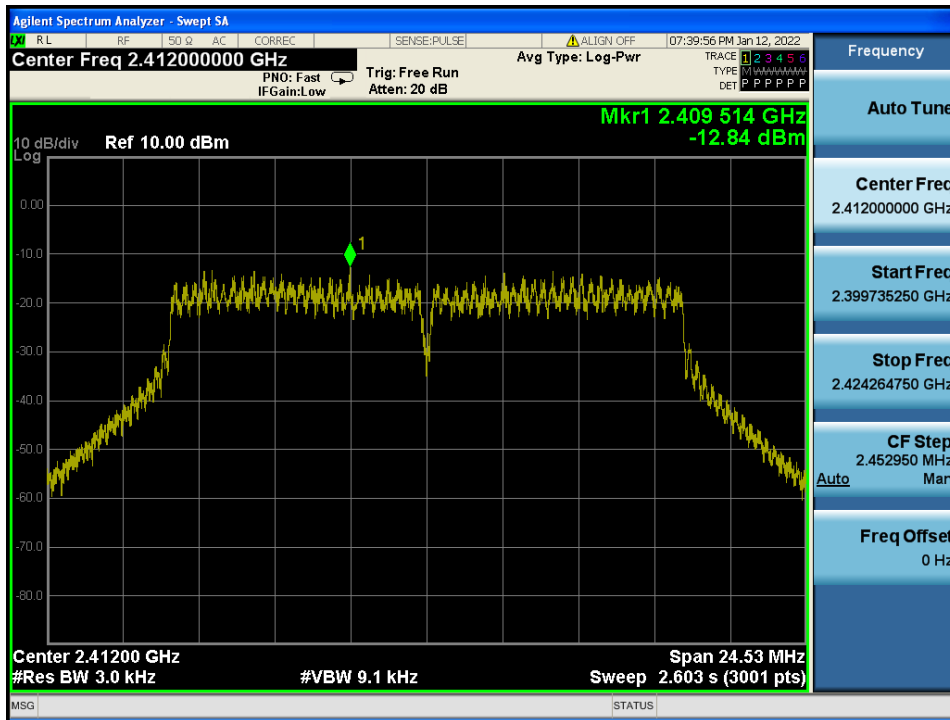


Power Spectral Density

TM 2 & 2 437

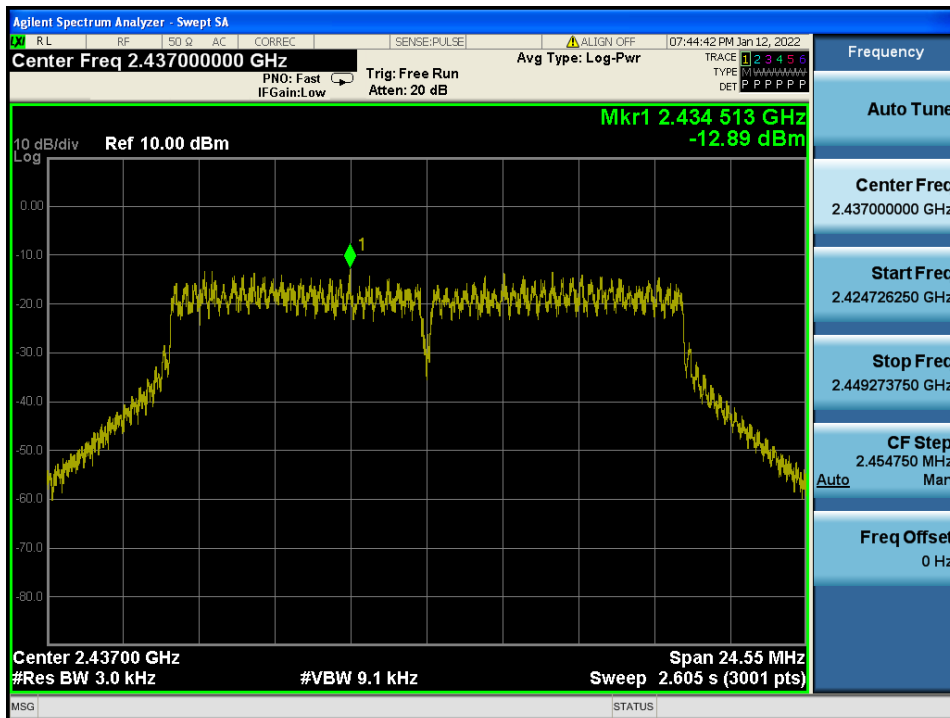


Power Spectral Density

TM 2 & 2 462

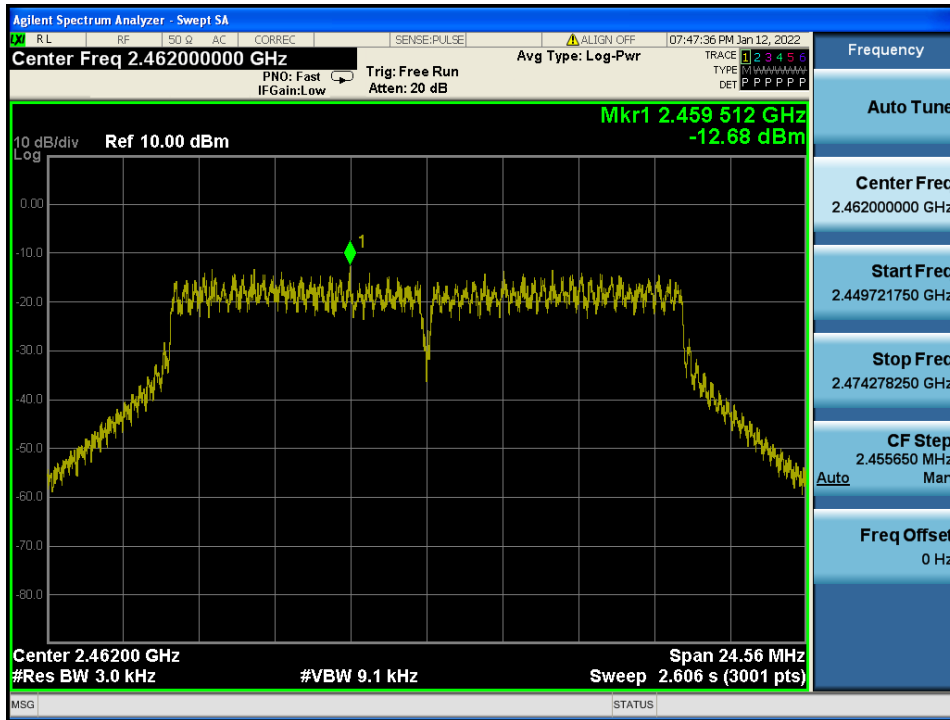


Power Spectral Density

TM 3 & 2 412

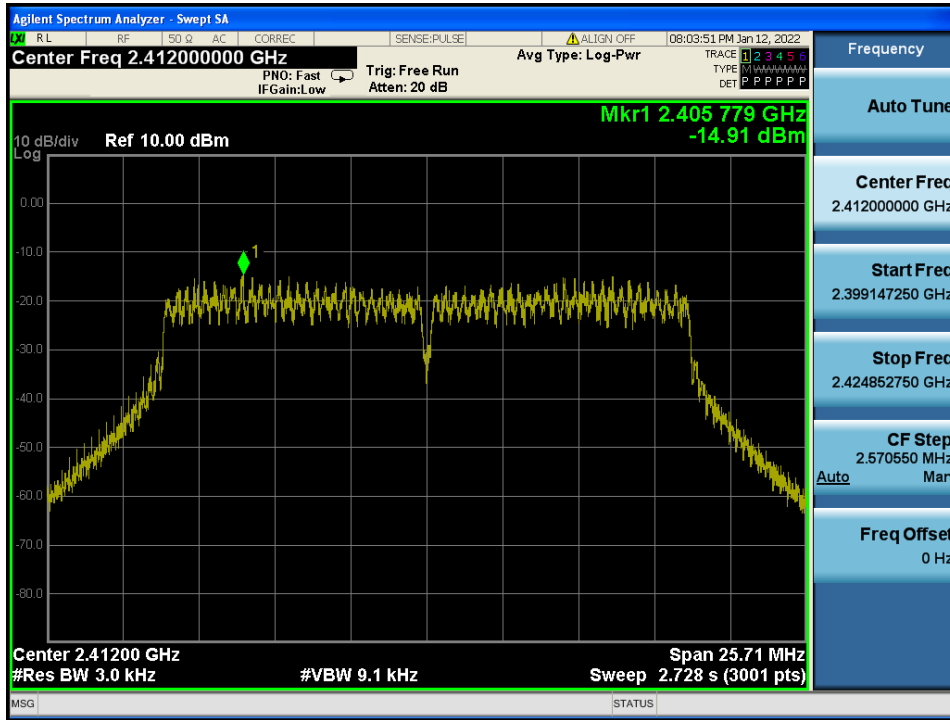


Power Spectral Density

TM 3 & 2 437

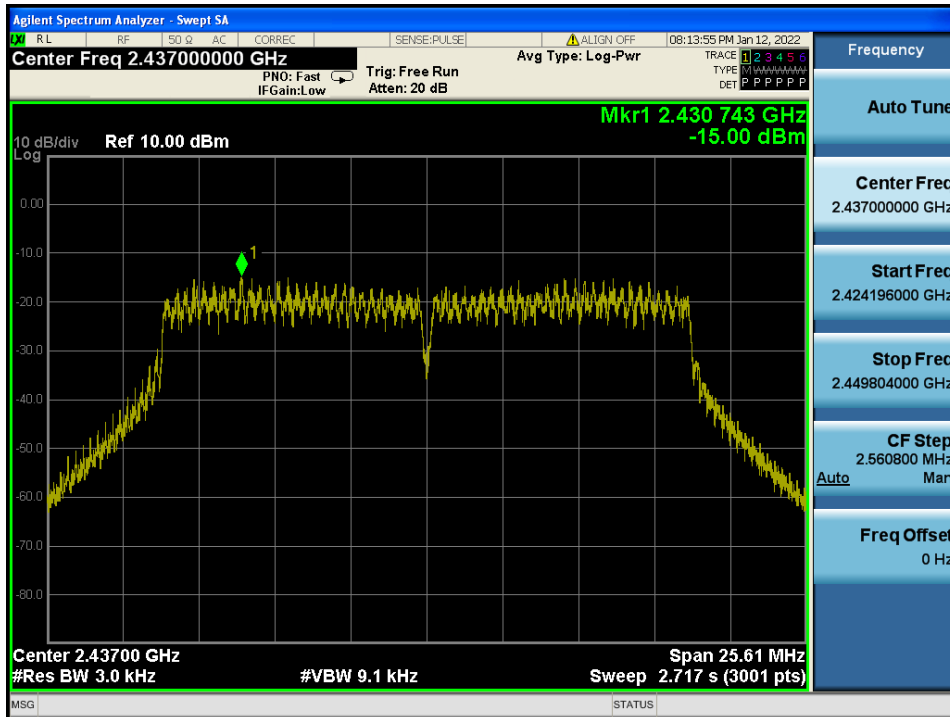


Power Spectral Density

TM 3 & 2 462

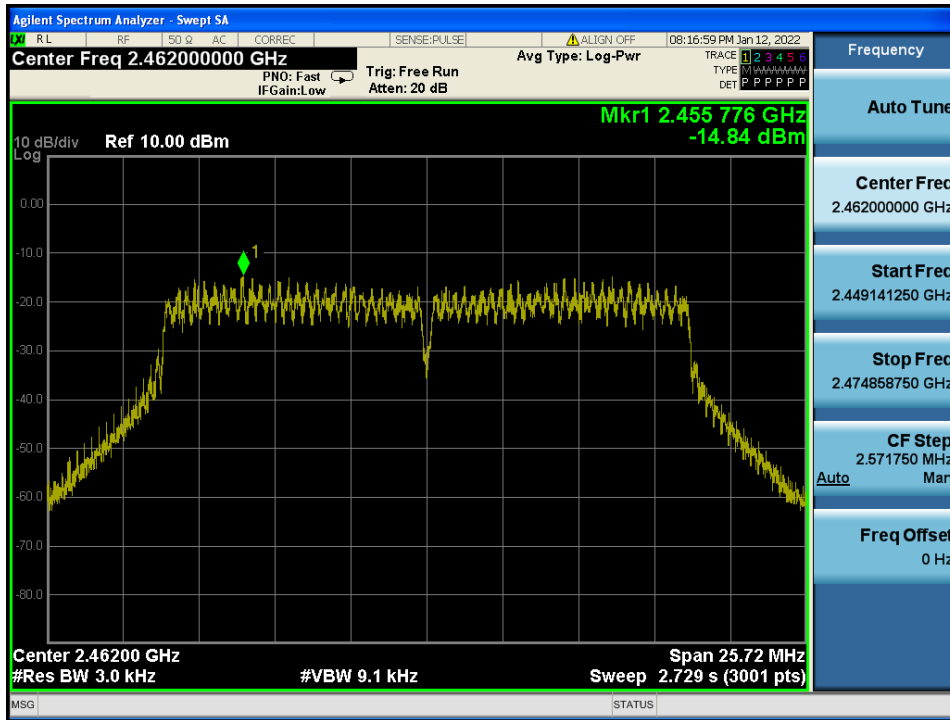


Power Spectral Density

TM 4 & 2 422

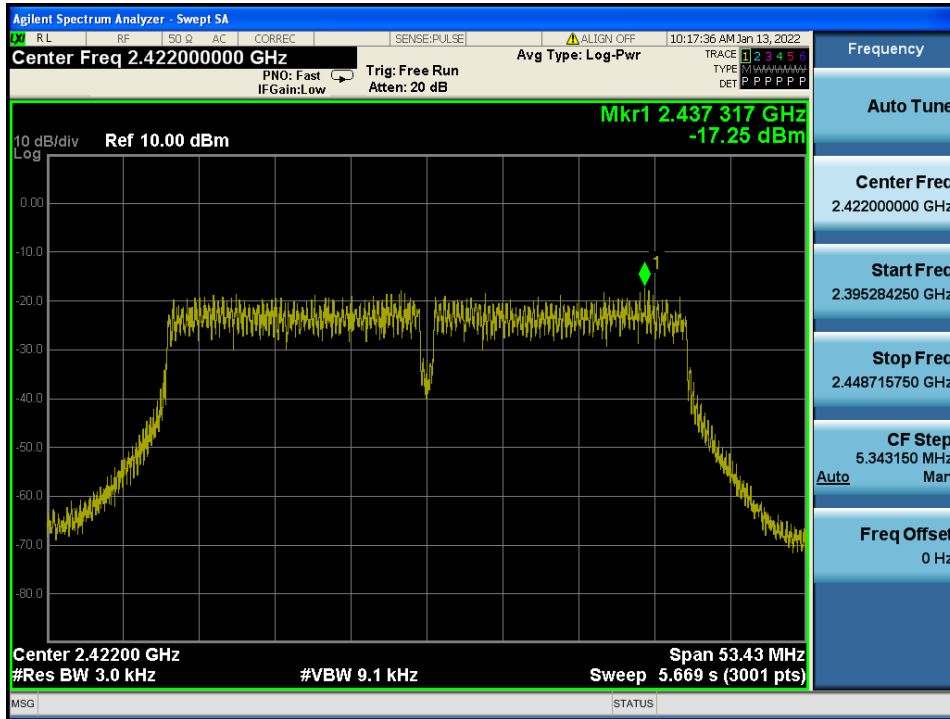


Power Spectral Density

TM 4 & 2 437

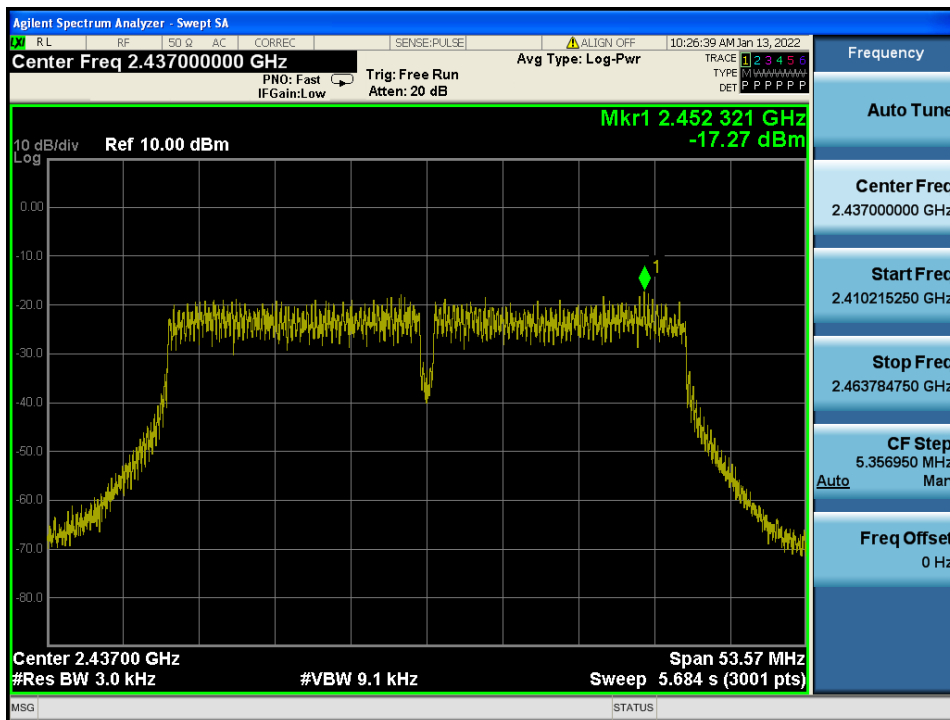

Power Spectral Density

TM 4 & 2 452

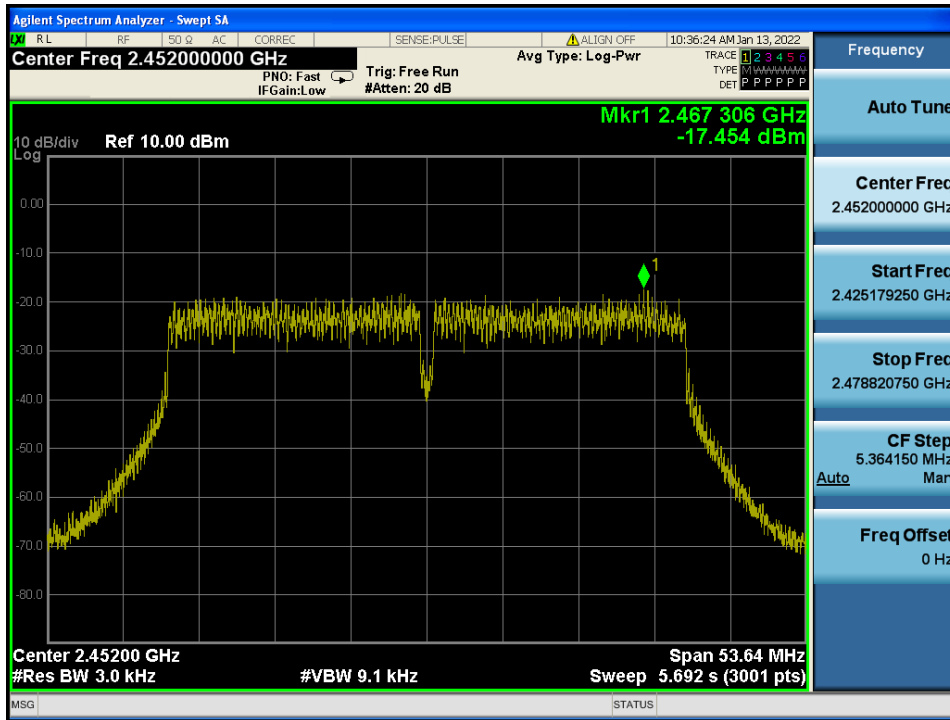

5.4. Unwanted Emissions (Conducted)

■ Test requirements and limit, Part 15.247(d) & RSS-247 [5.5]

In any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions :

If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to 15.247(b)(3) requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to 15.247(b)(3) requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured inband average PSD level.

In either case, attenuation to levels below the general emission limits specified in §15.209(a) is not required.

5.4.1. Test Setup

Refer to the APPENDIX I including path loss

5.4.2. Test Procedures

- KDB558074 D01v05r02 - Section 8.5
- ANSI C63.10-2013 – Section 11.11

Reference level measurement

1. Set instrument center frequency to DTS channel center frequency.
2. Set the span to ≥ 1.5 times the DTS bandwidth.
3. Set the RBW = 100 kHz.
4. Set the VBW $\geq 3 \times$ RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum PSD level
LIMIT LINE = 20 dB below of the reference level.

Emission level measurement

1. Set the center frequency and span to encompass frequency range to be measured.
2. Set the RBW = 100 kHz.(Actual 1 MHz , See below note)
3. Set the VBW $\geq 3 \times$ RBW.(Actual 3 MHz, See below note)
4. Detector = peak.
5. Ensure that the number of measurement points \geq span / RBW
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
9. Use the peak marker function to determine the maximum amplitude level.

Note: The conducted spurious emission was tested with below settings.

Frequency range	RBW	VBW	Detector	Trace	Sweep Point
9 kHz ~ 30 MHz	100 kHz	300 kHz	Peak	Max Hold	40 001
30 MHz ~ 10 GHz	1 MHz	3 MHz			
10 GHz ~ 25 GHz	1 MHz	3 MHz			

If the emission level with above setting was close to the limit (ie, less than 3 dB margin) then zoom scan is required using RBW = 100 kHz, VBW = 300 kHz, SPAN = 100 MHz and BINS = 2 001 to get accurate emission level within 100 kHz BW.


5.4.3. Test Results

RESULT PLOTS


- Power Supply: 24 V

TM 1 & 2 412



Reference

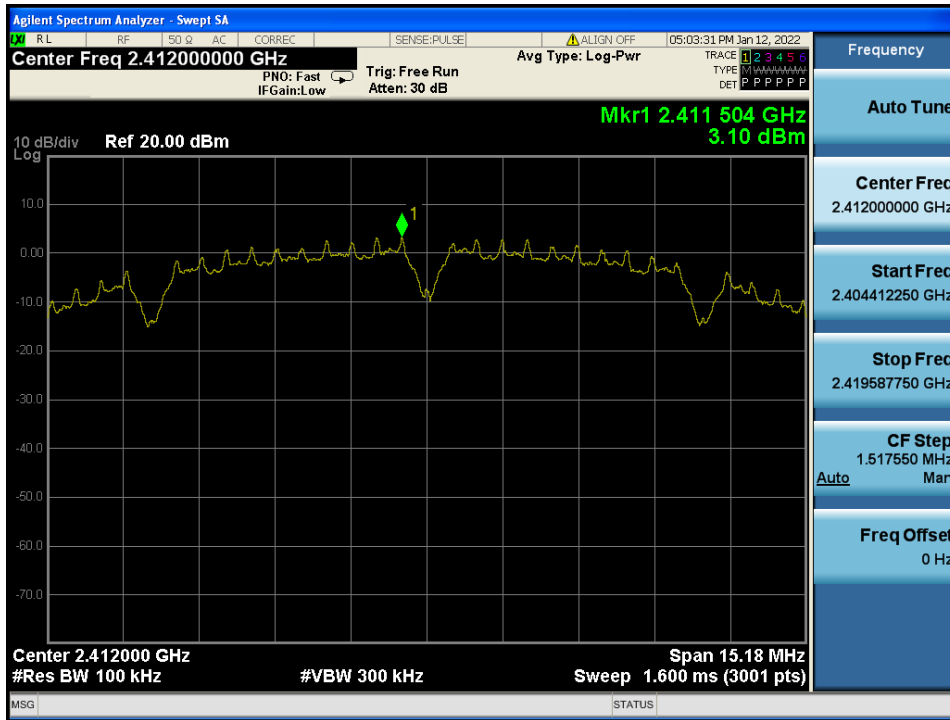


Low Band-edge

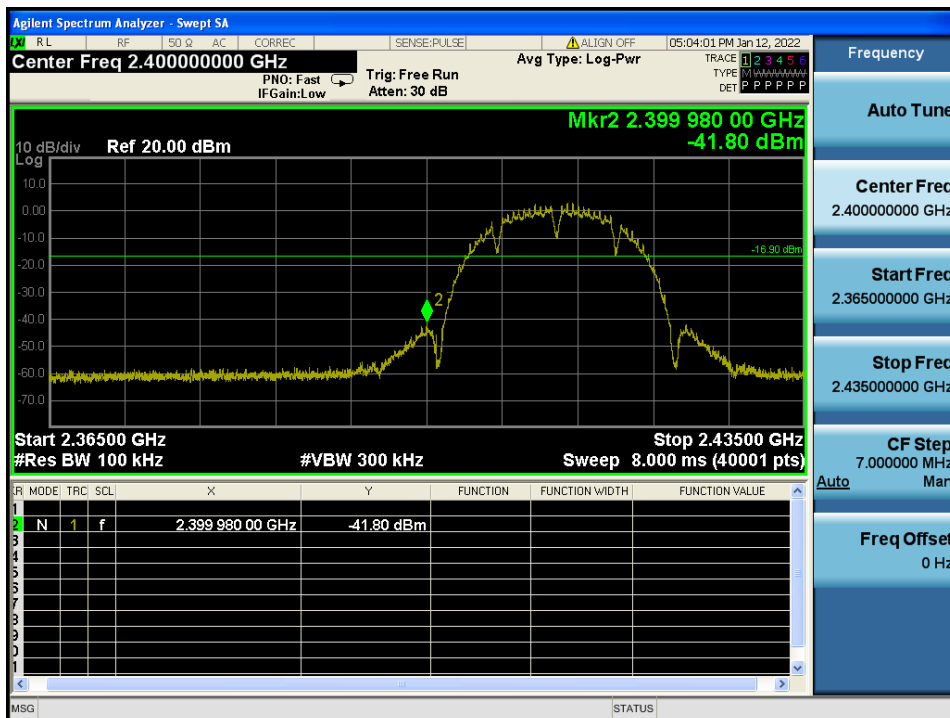

Conducted Spurious Emissions

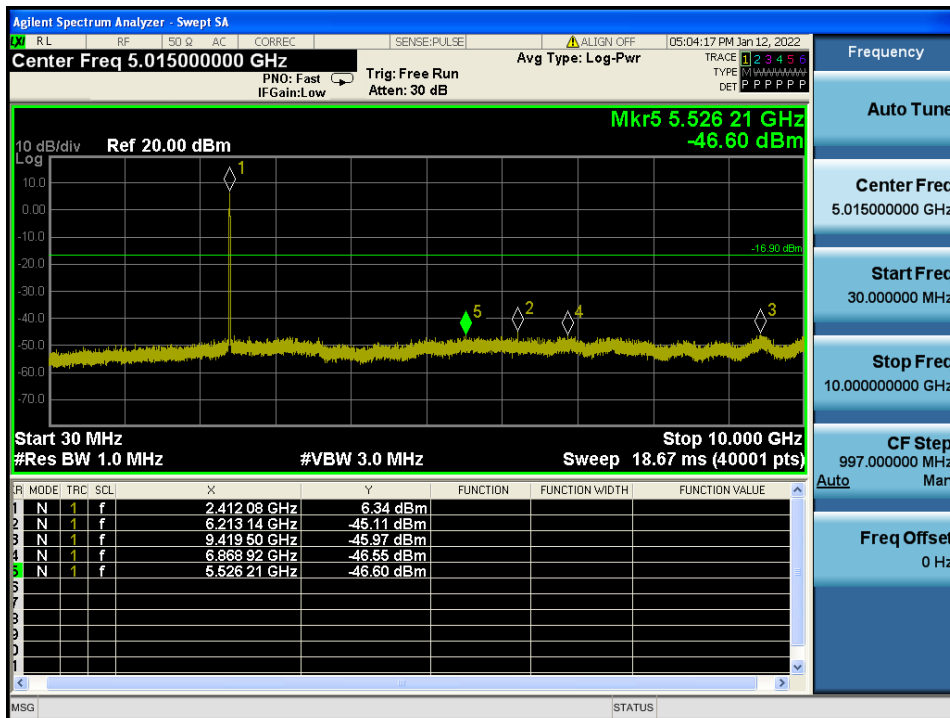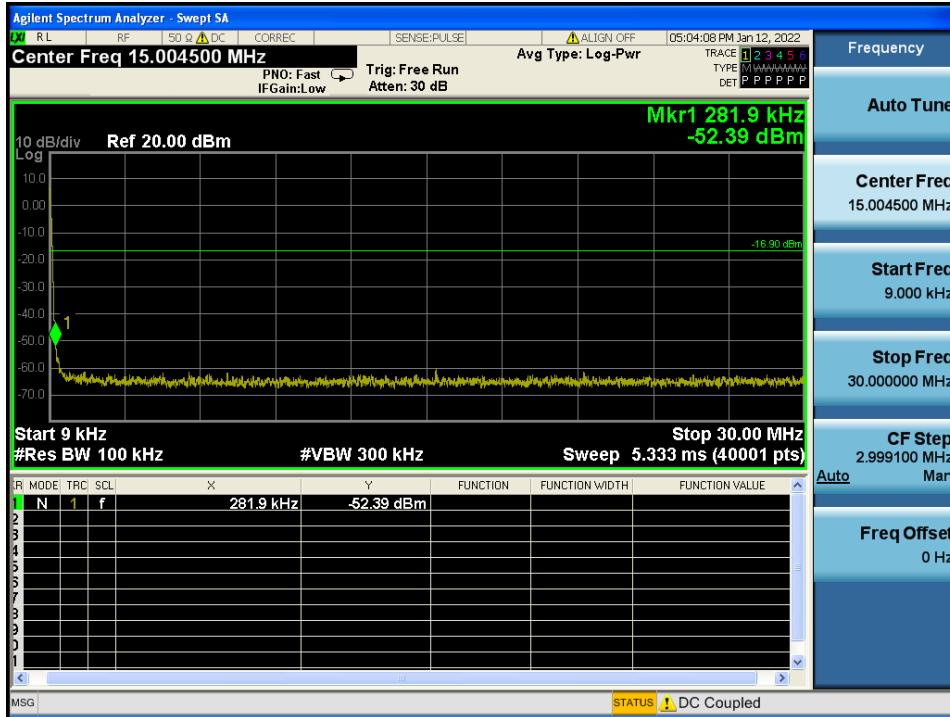


Conducted Spurious Emissions

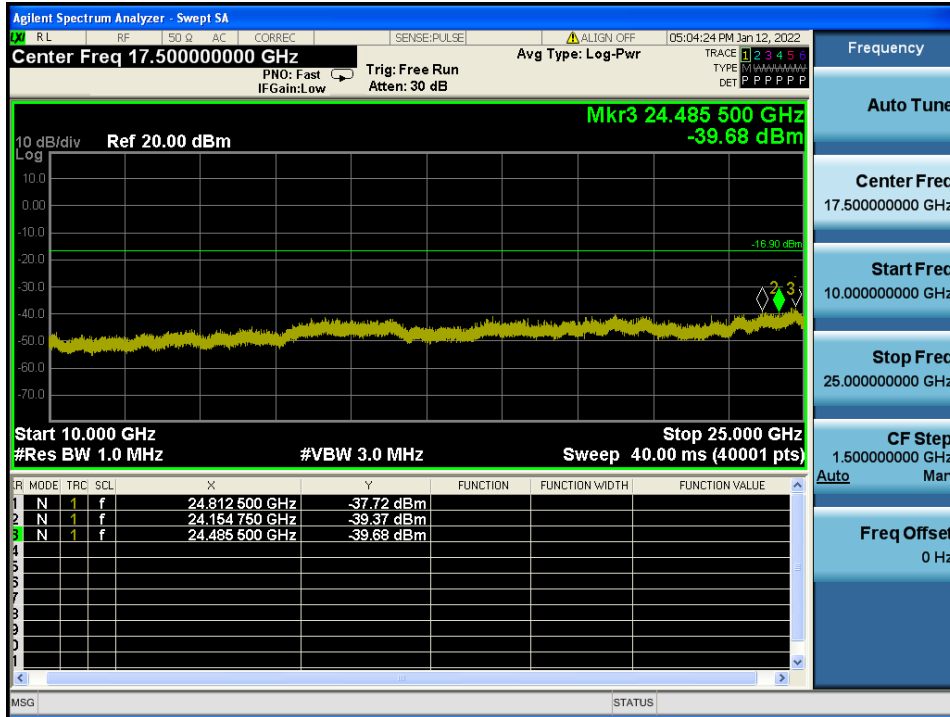


TM 1 & 2 437



Reference

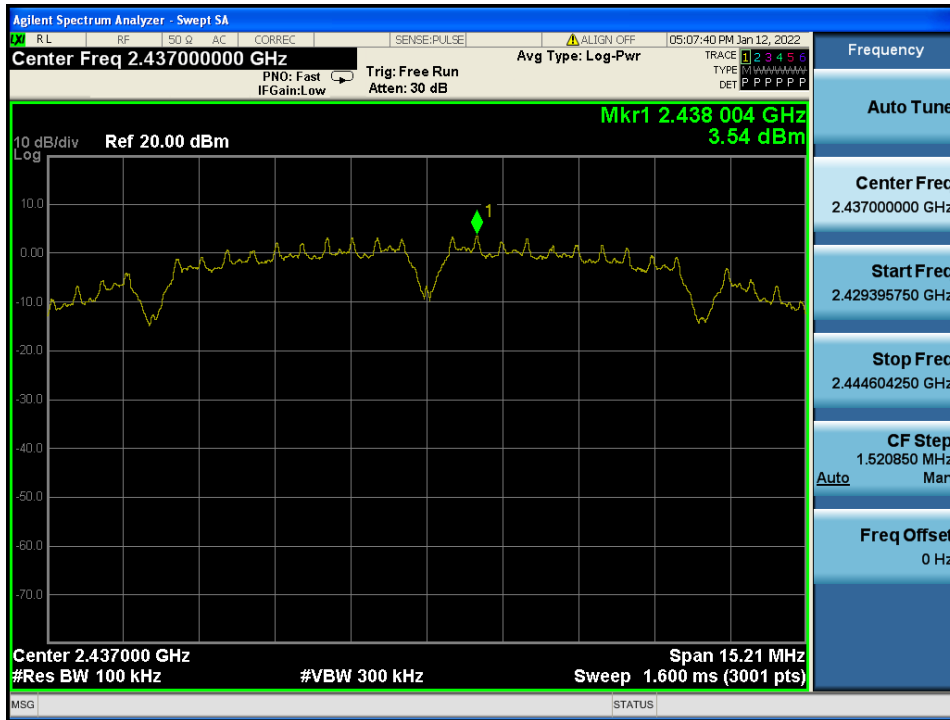

Conducted Spurious Emissions

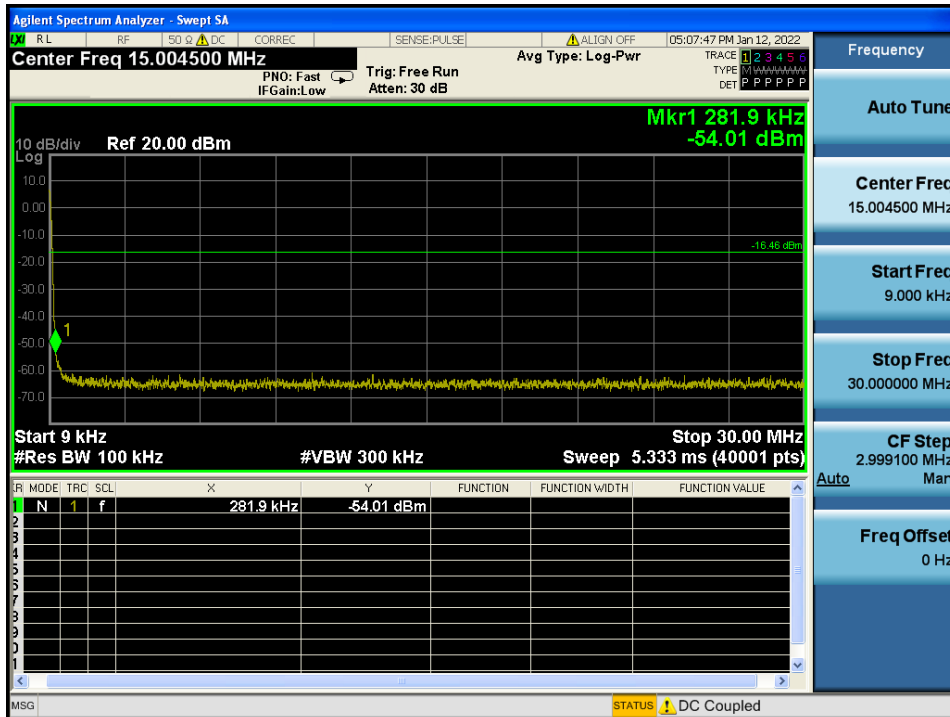


Conducted Spurious Emissions

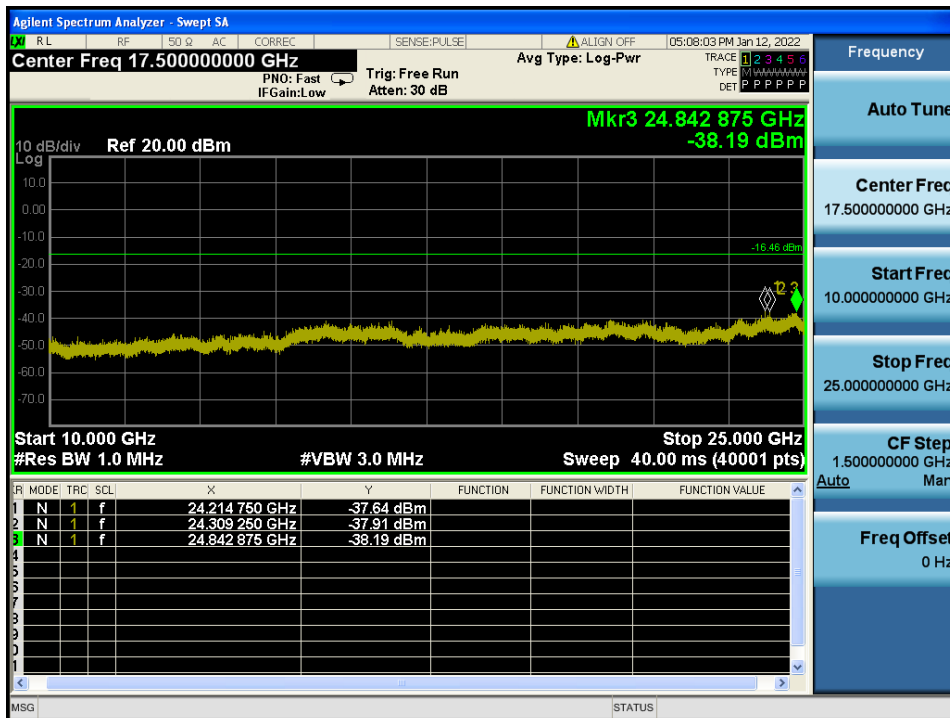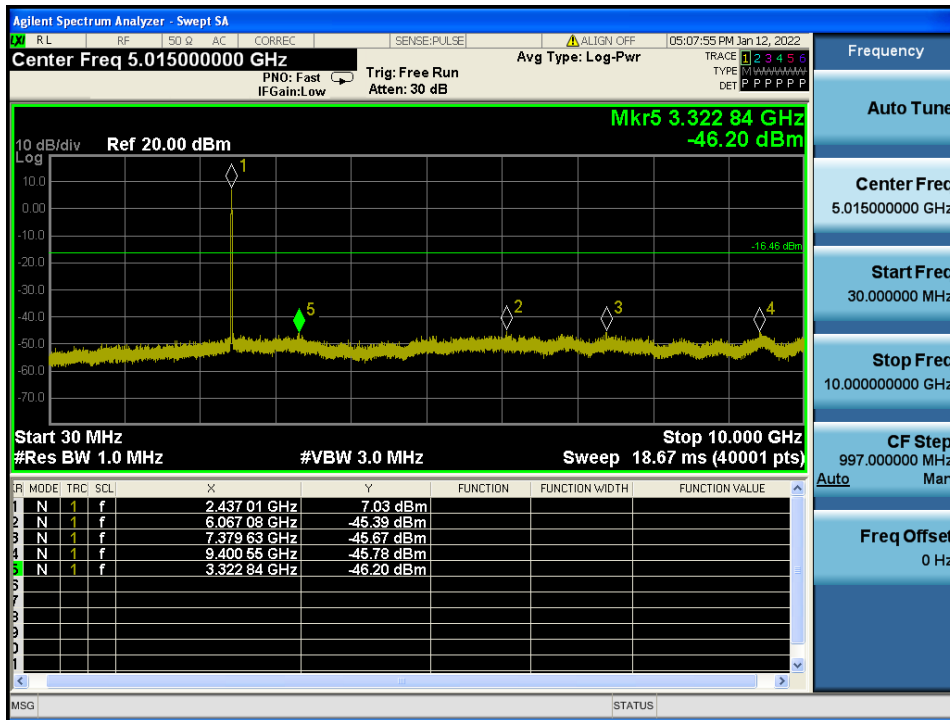


TM 1 & 2 462



Reference

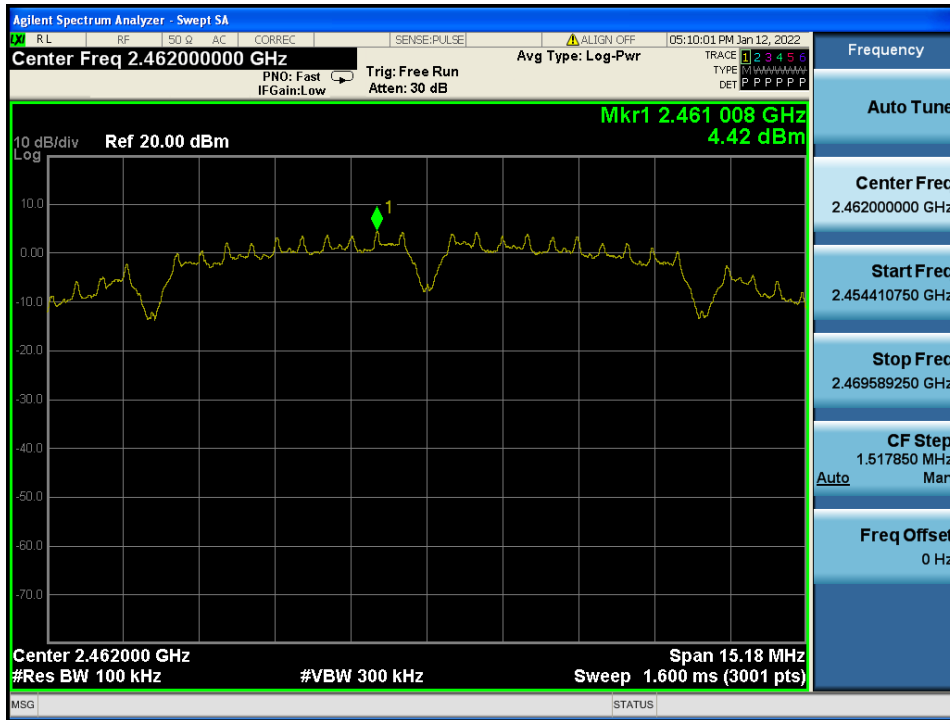


High Band-edge

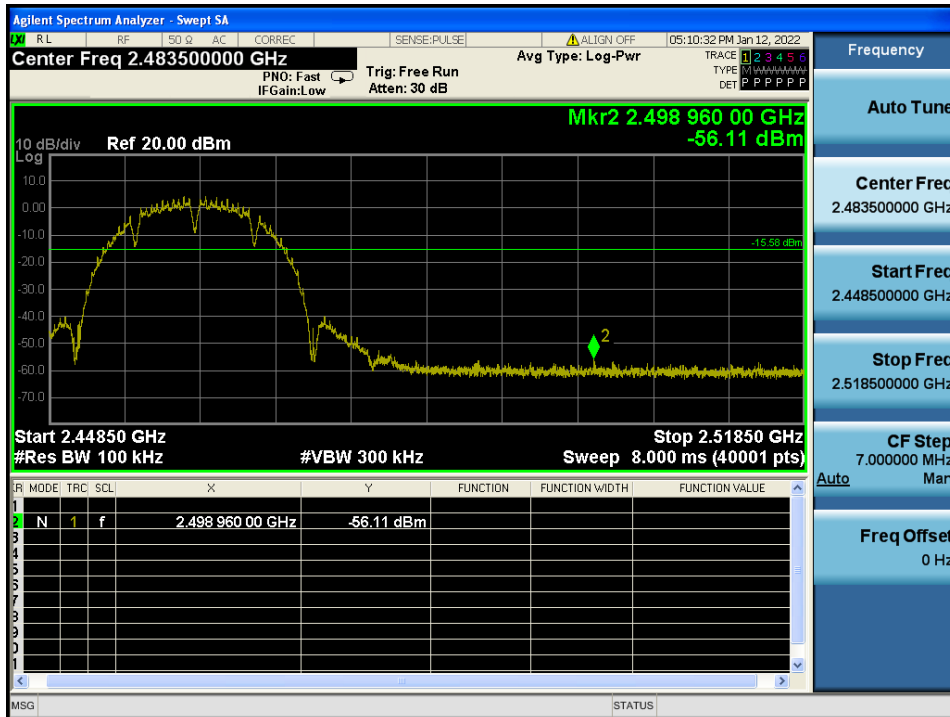

Conducted Spurious Emissions

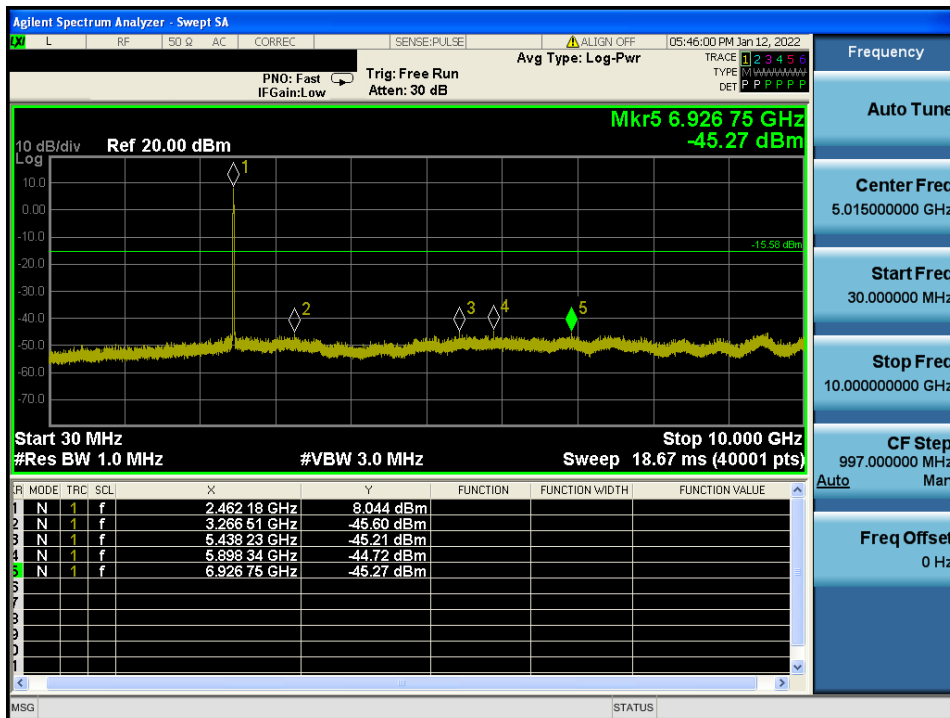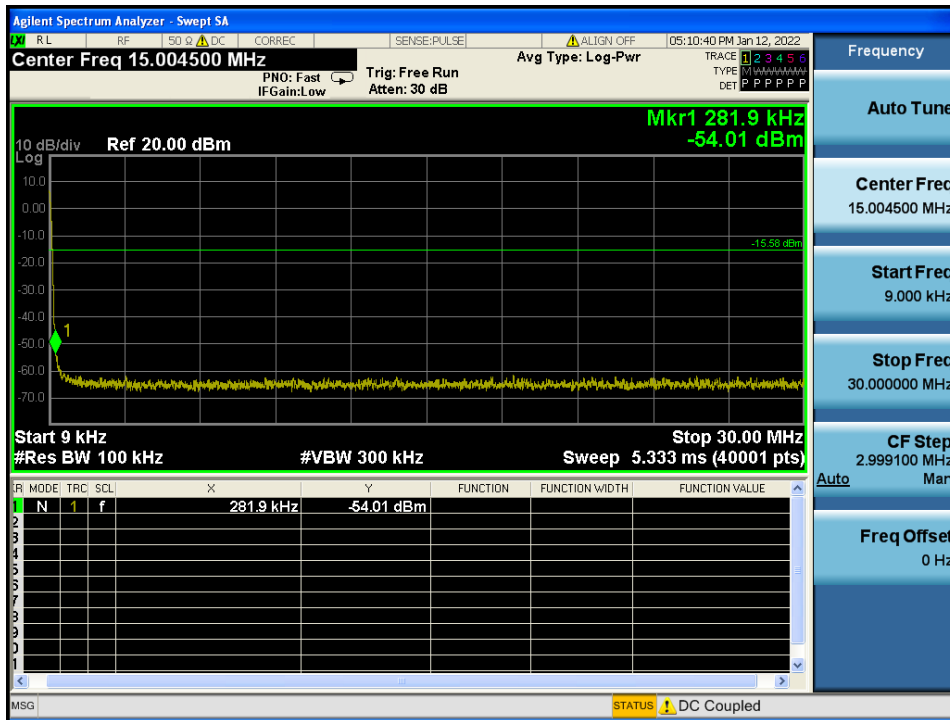


Conducted Spurious Emissions

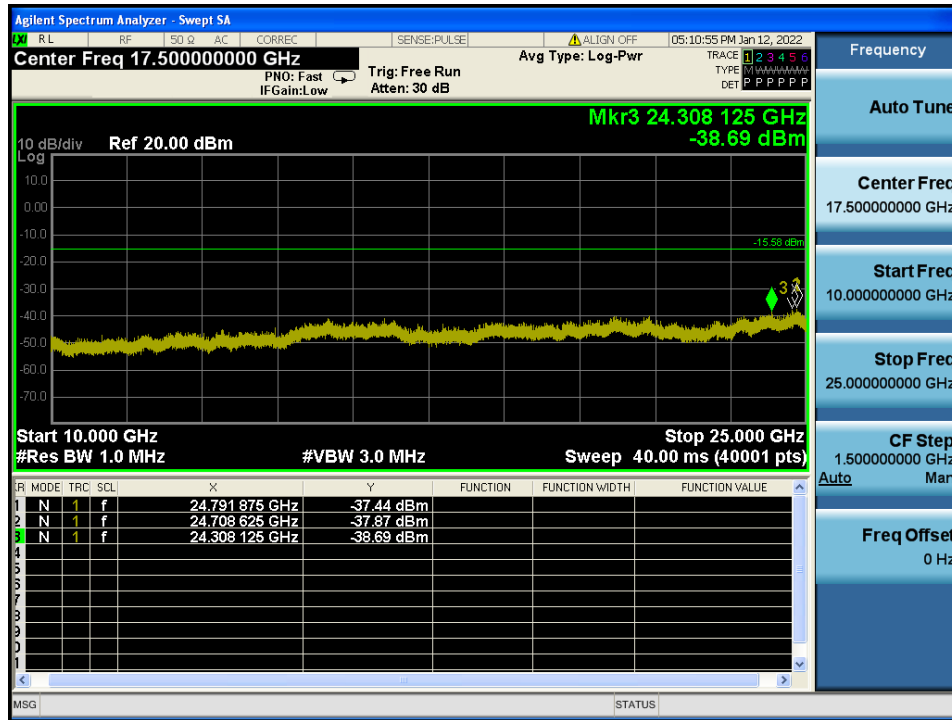


TM 2 & 2 412



Reference

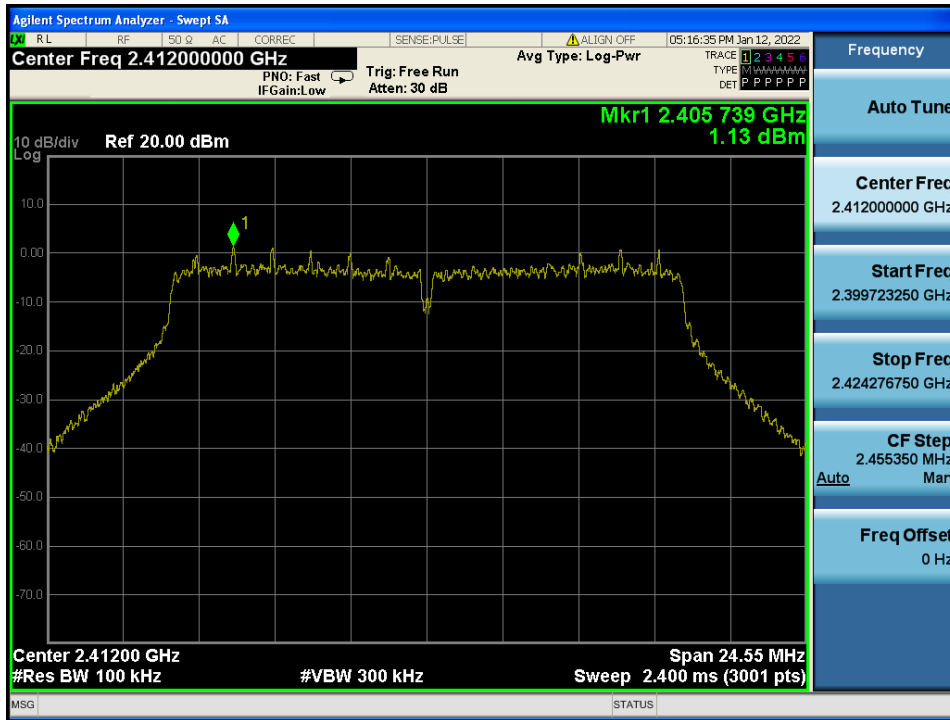


Low Band-edge

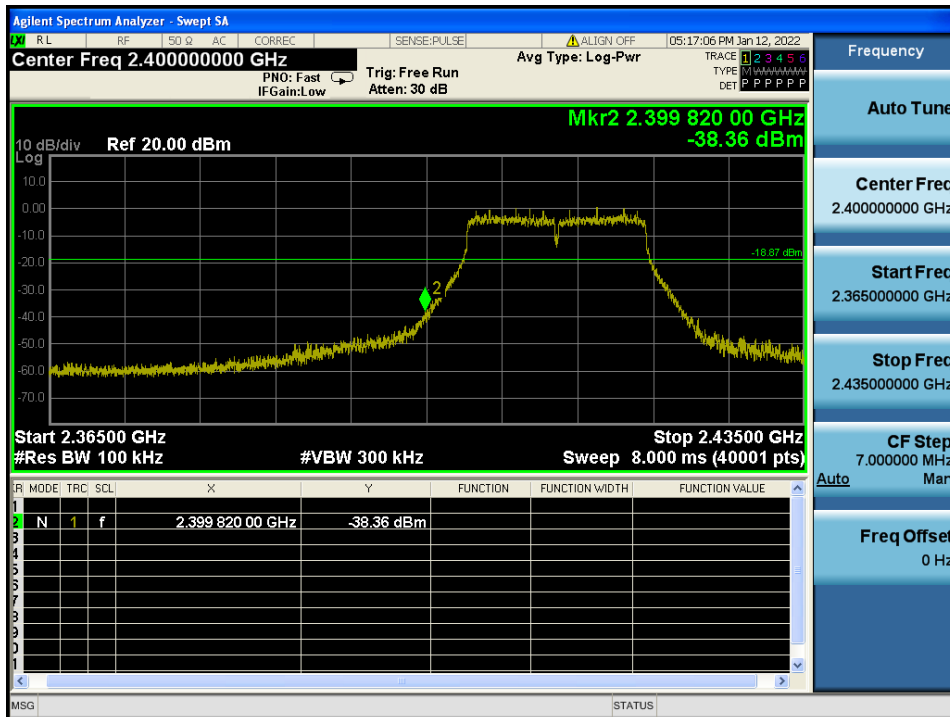

Conducted Spurious Emissions

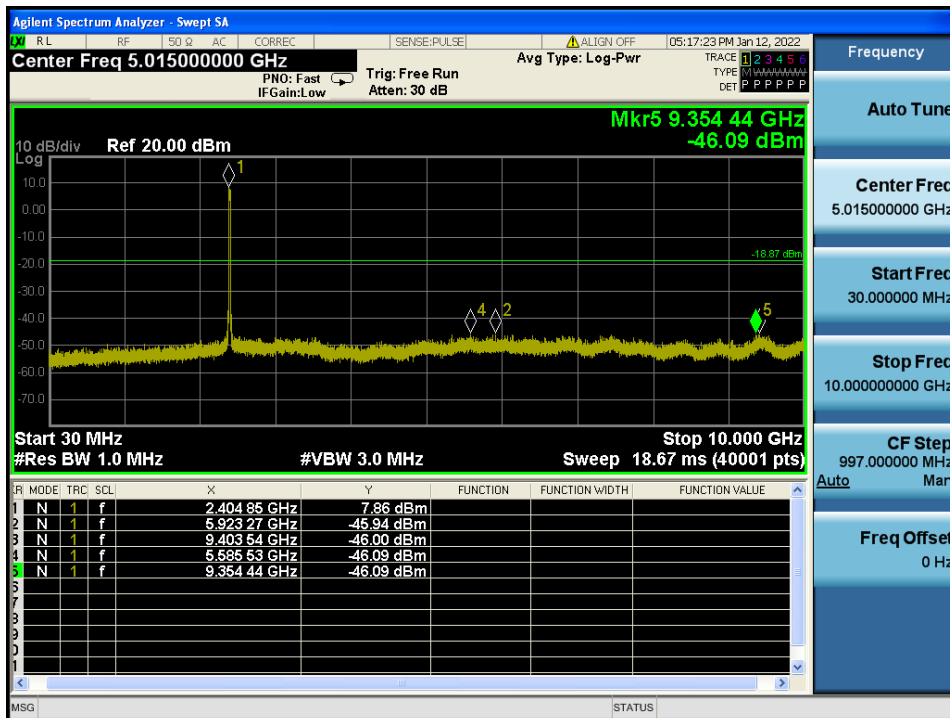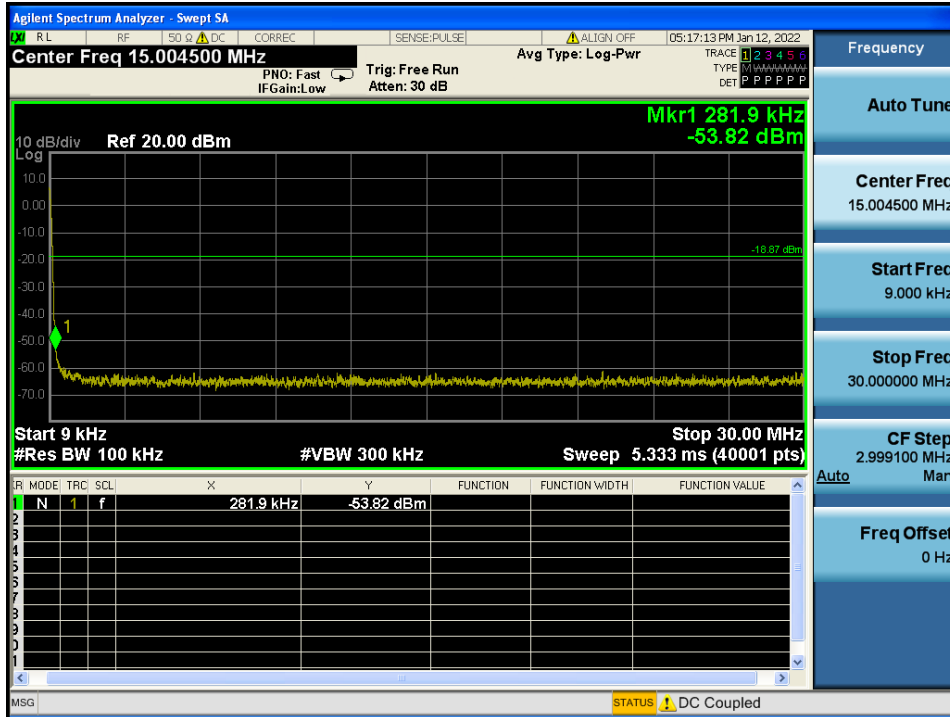


Conducted Spurious Emissions

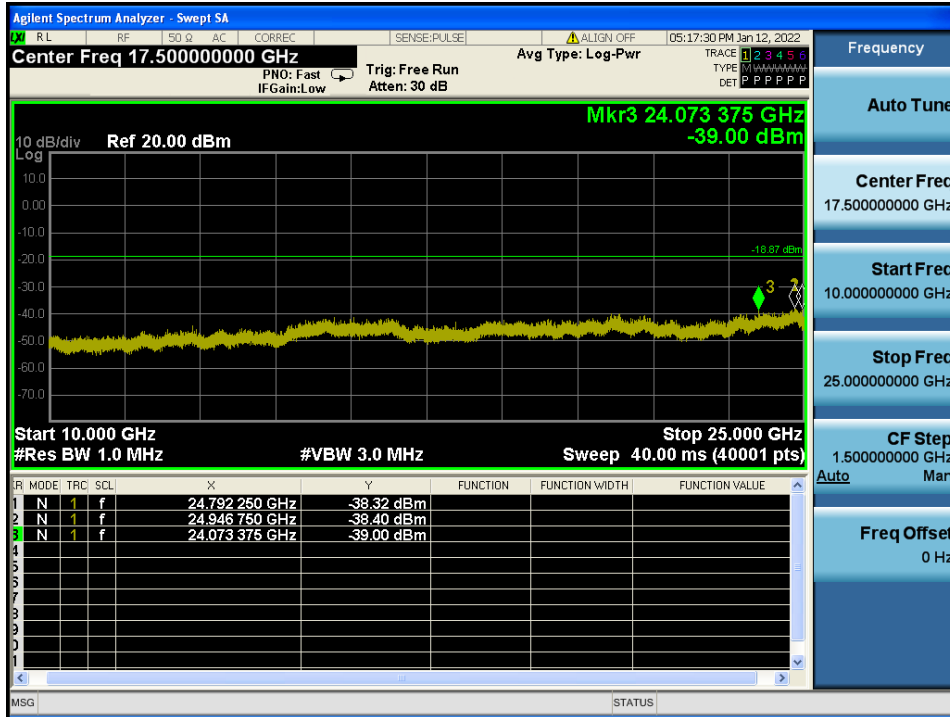


TM 2 & 2 437



Reference

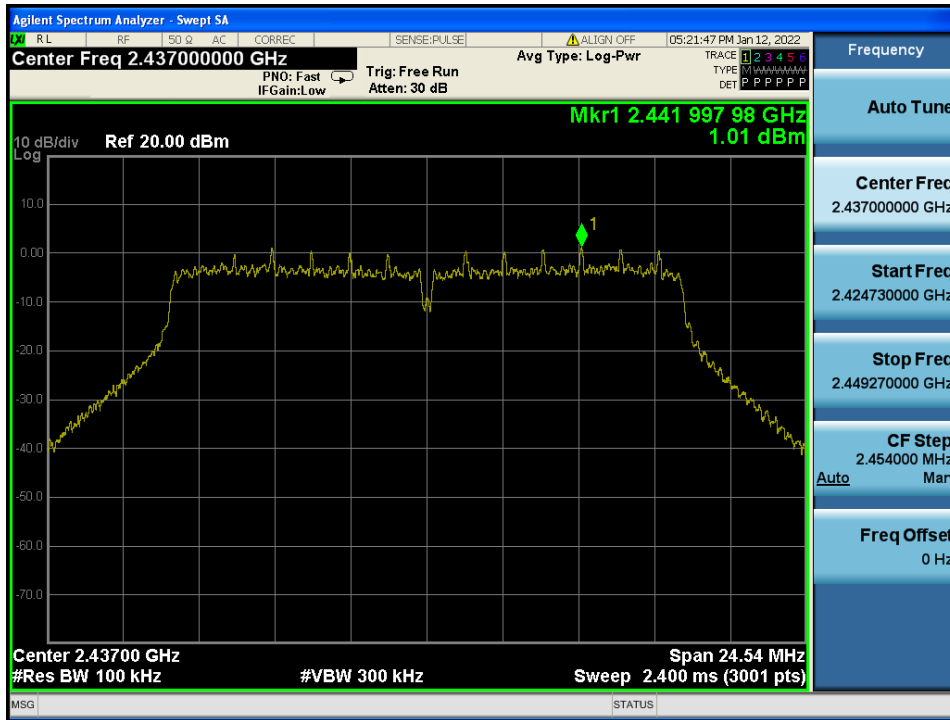

Conducted Spurious Emissions

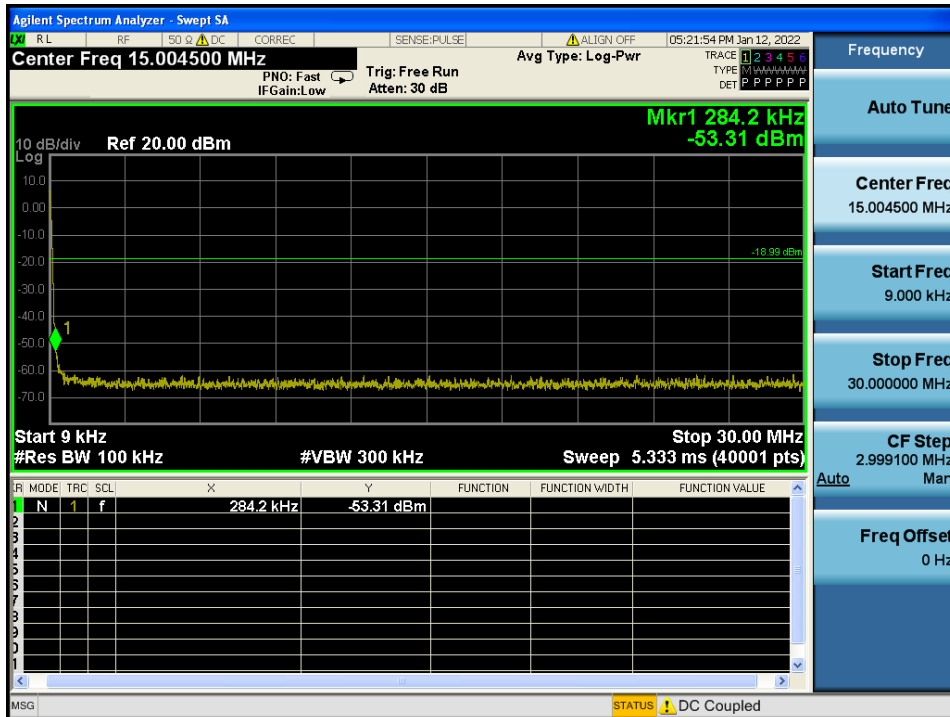


Conducted Spurious Emissions

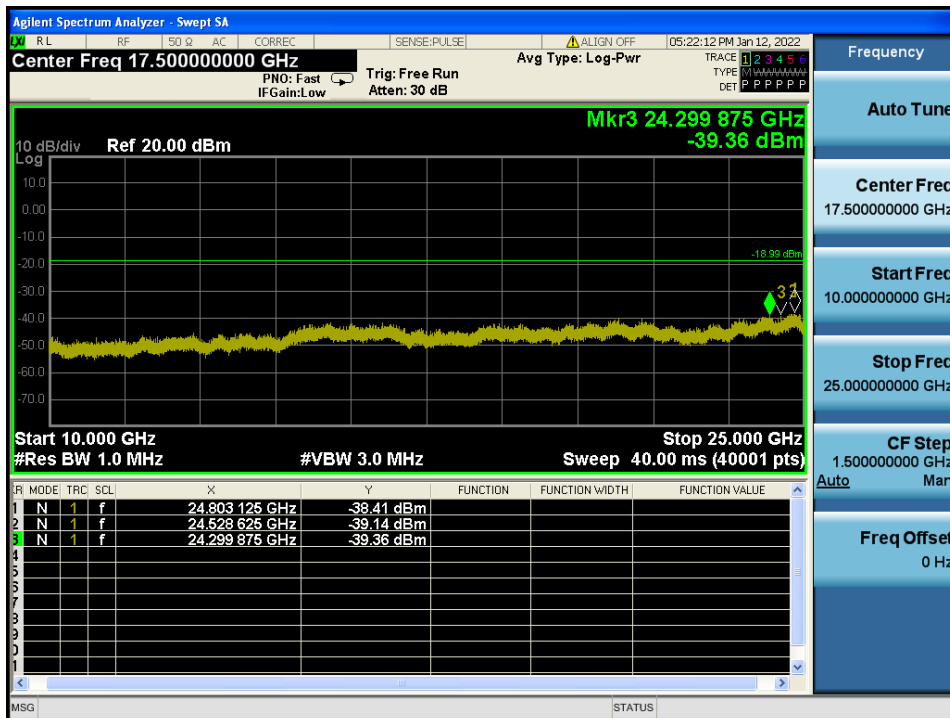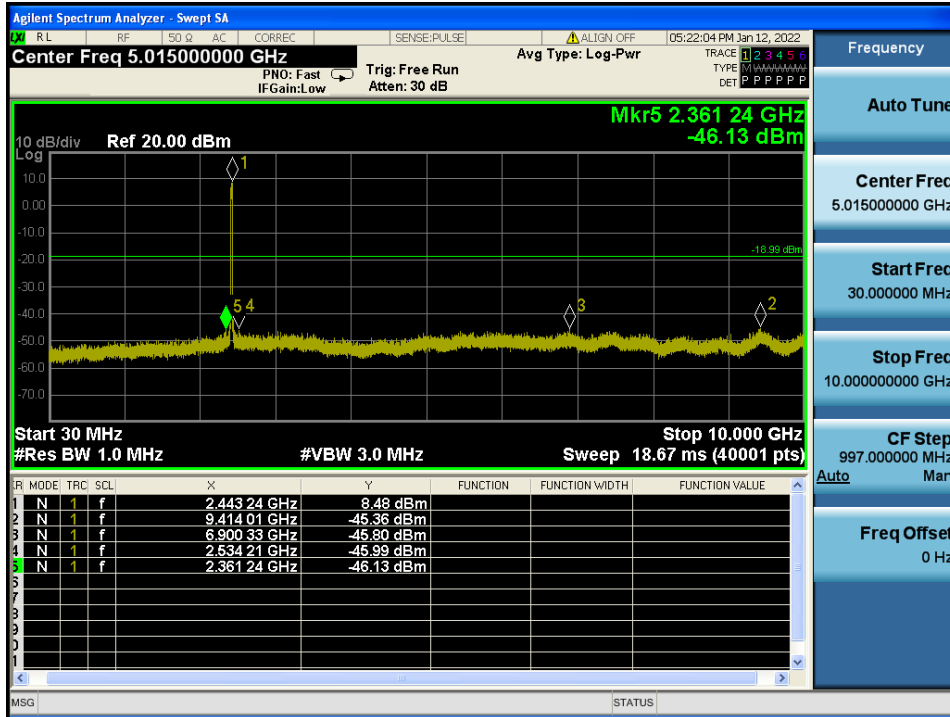


TM 2 & 2 462



Reference

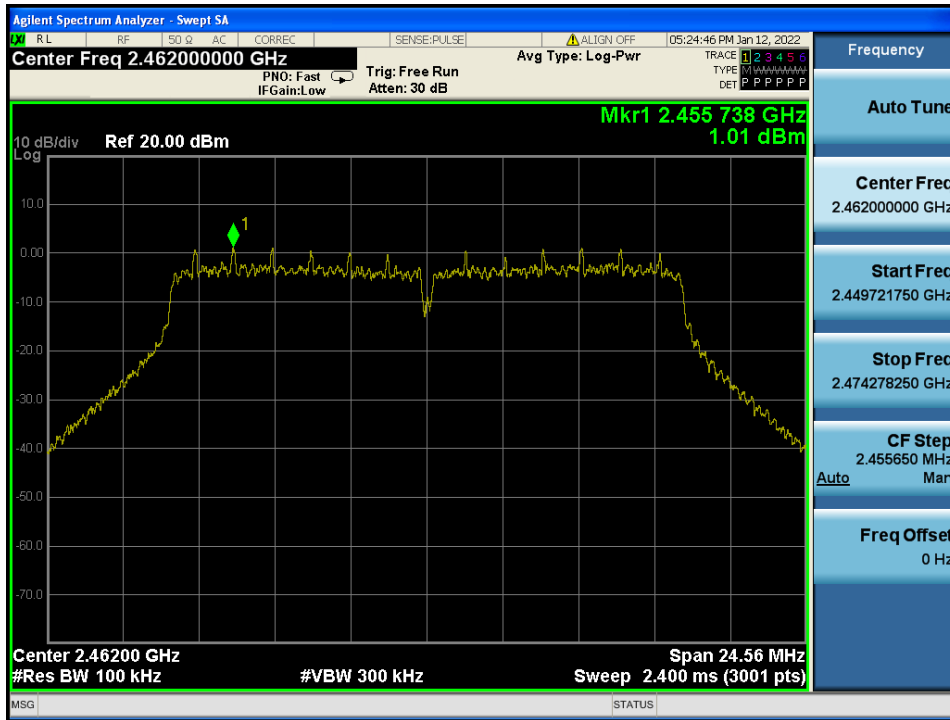


High Band-edge

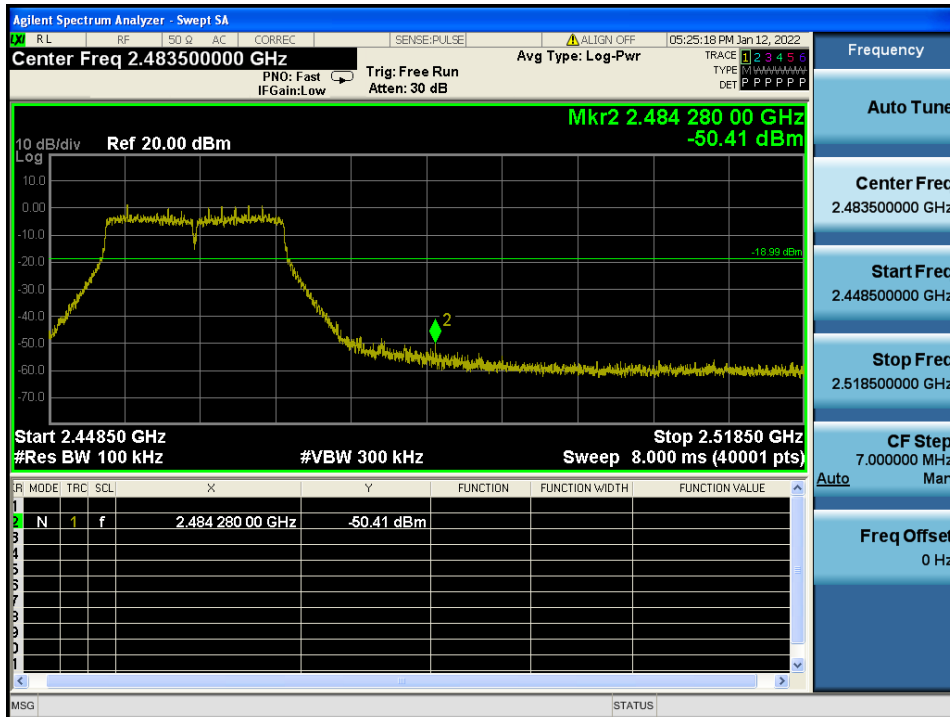

Conducted Spurious Emissions

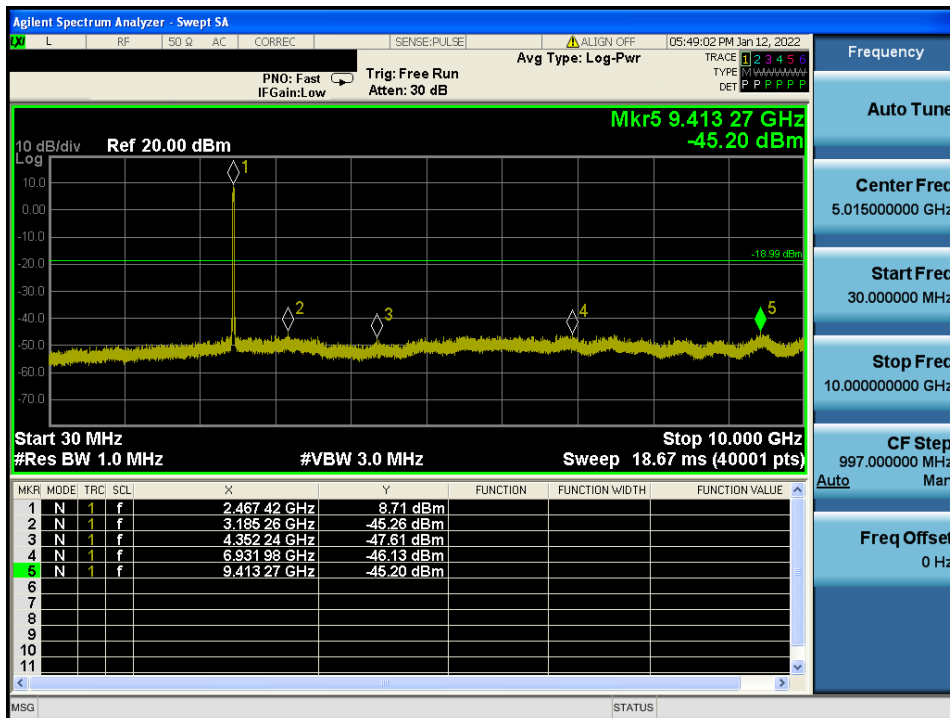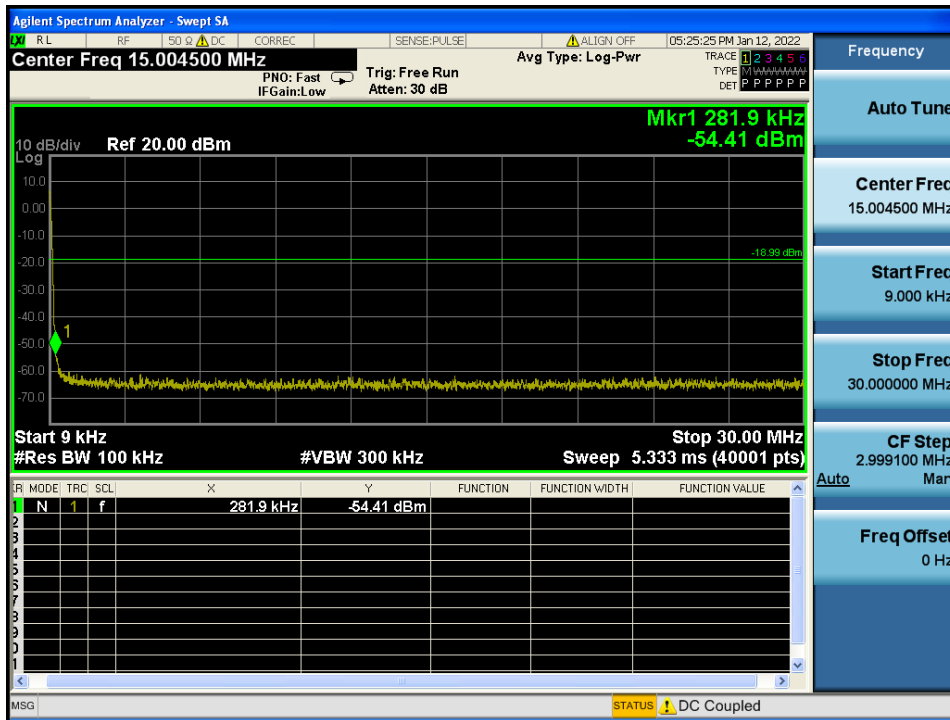


Conducted Spurious Emissions

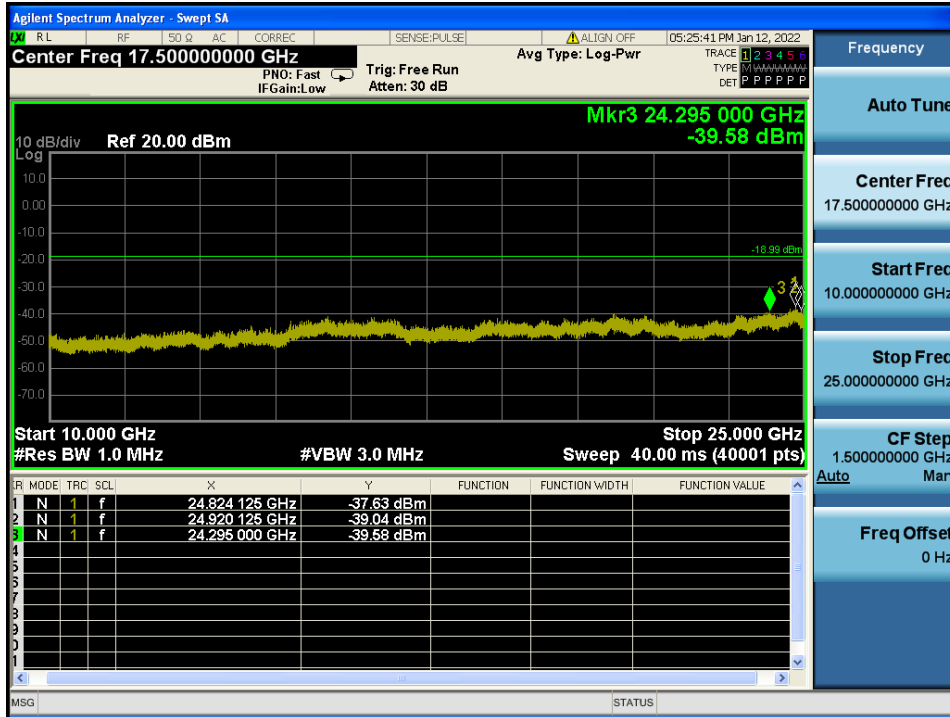


TM 3 & 2 412



Reference

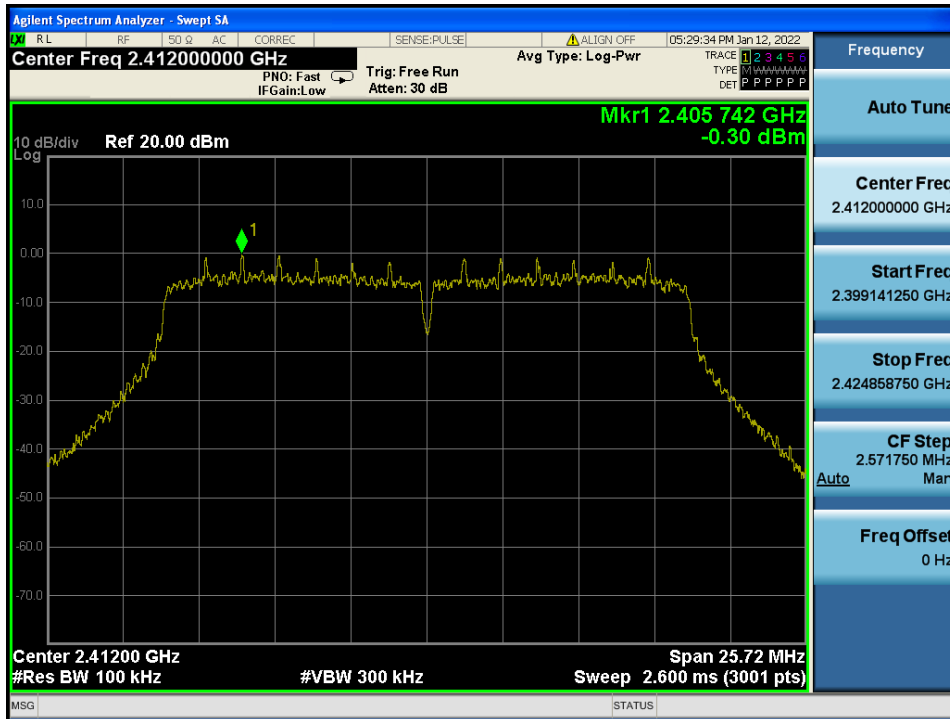


Low Band-edge

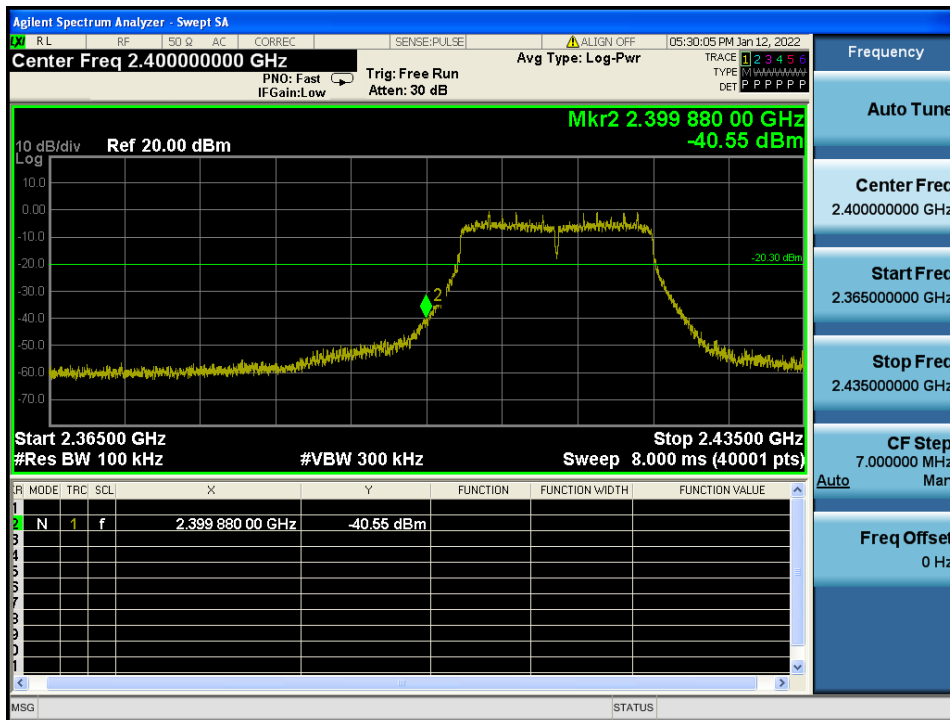

Conducted Spurious Emissions

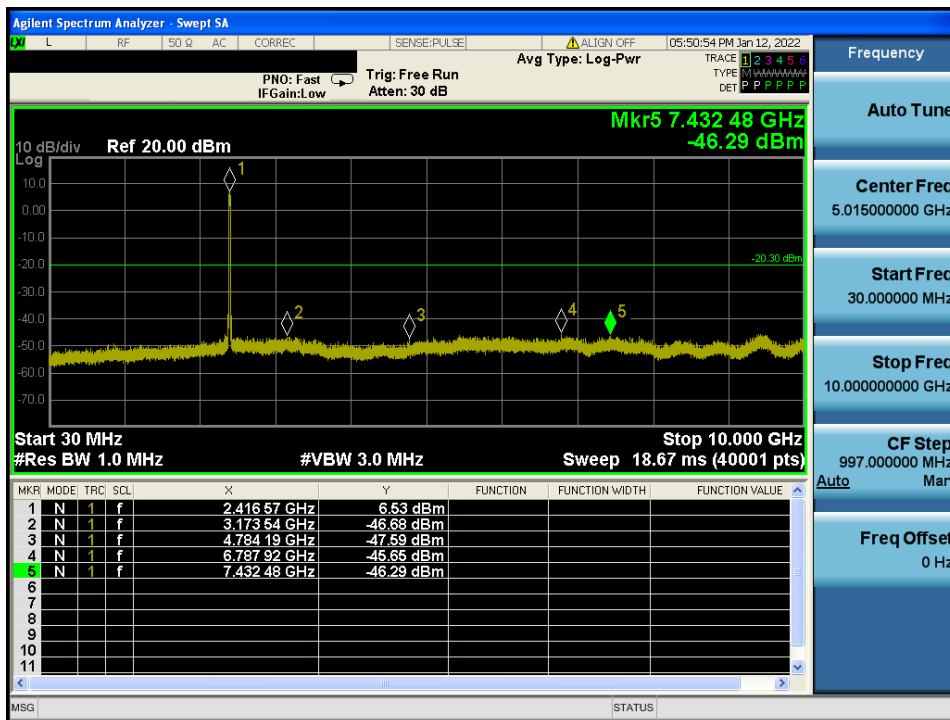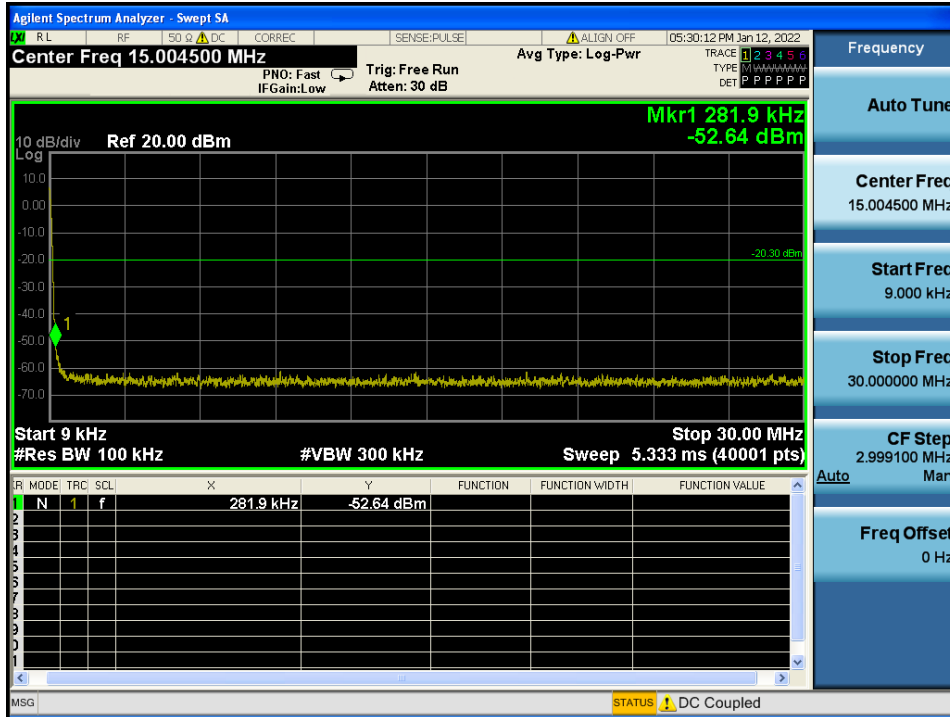


Conducted Spurious Emissions

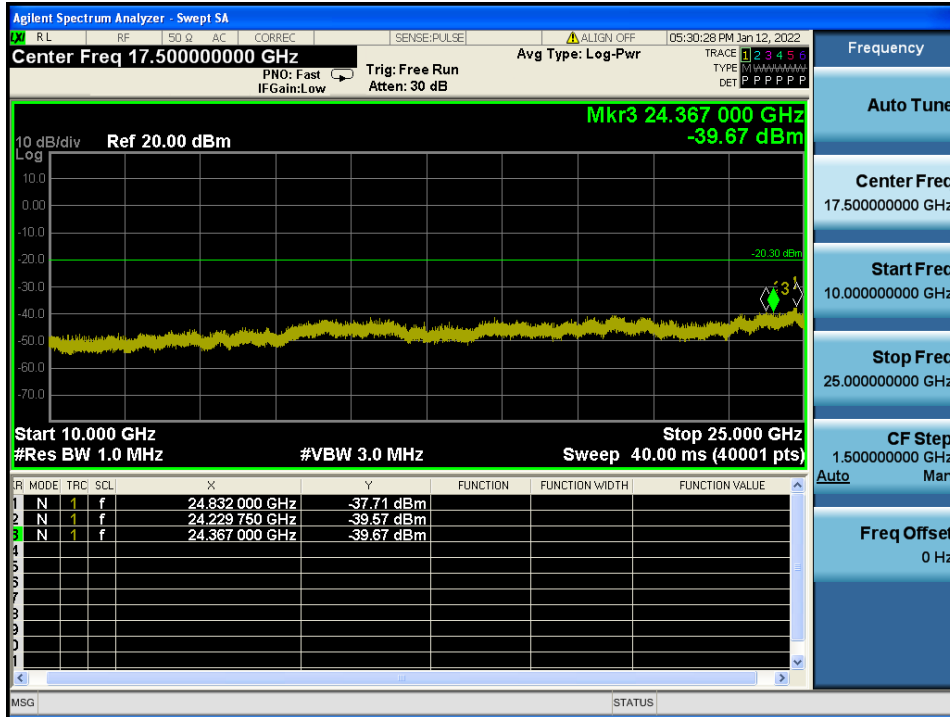


TM 3 & 2 437



Reference

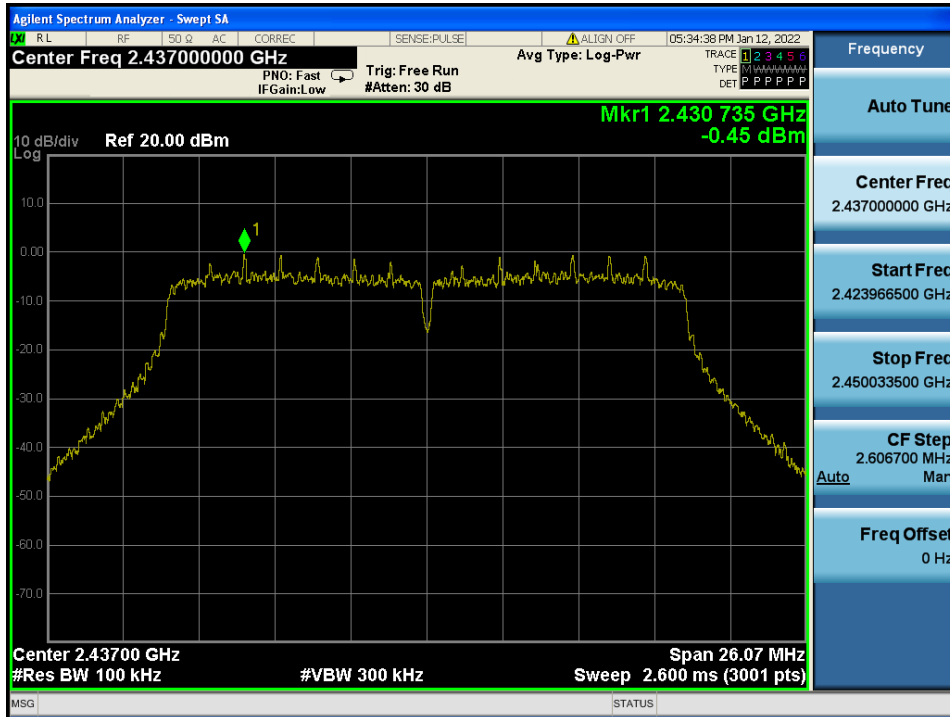

Conducted Spurious Emissions

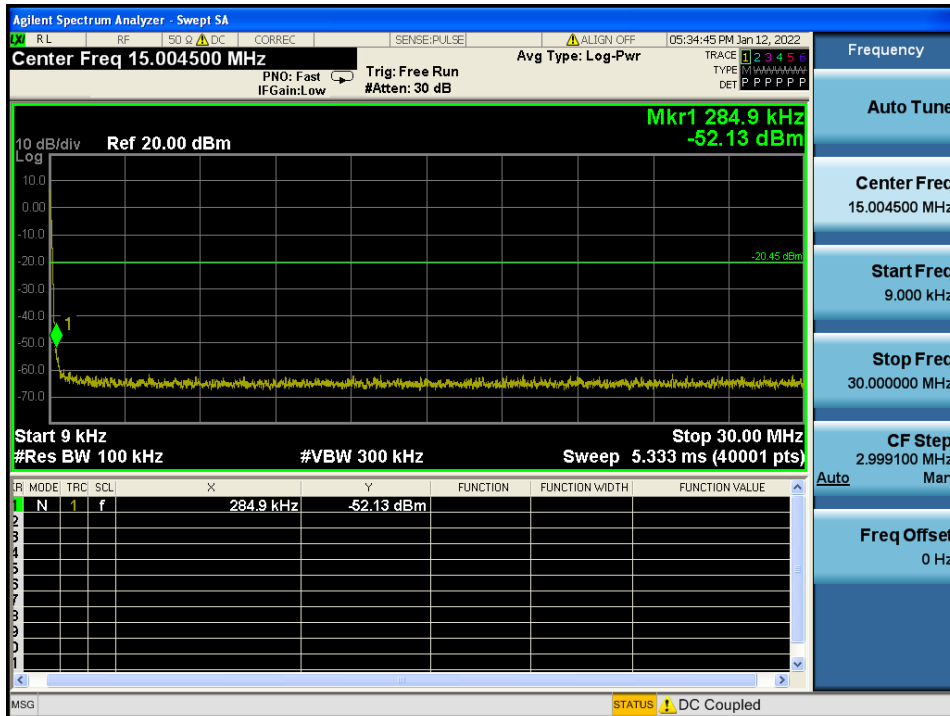


Conducted Spurious Emissions

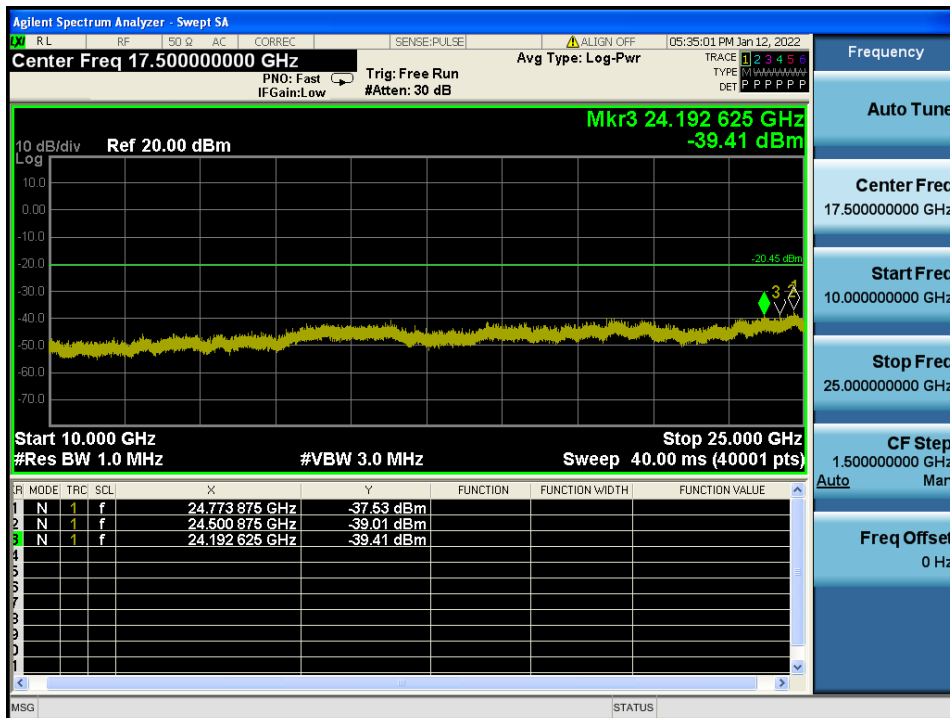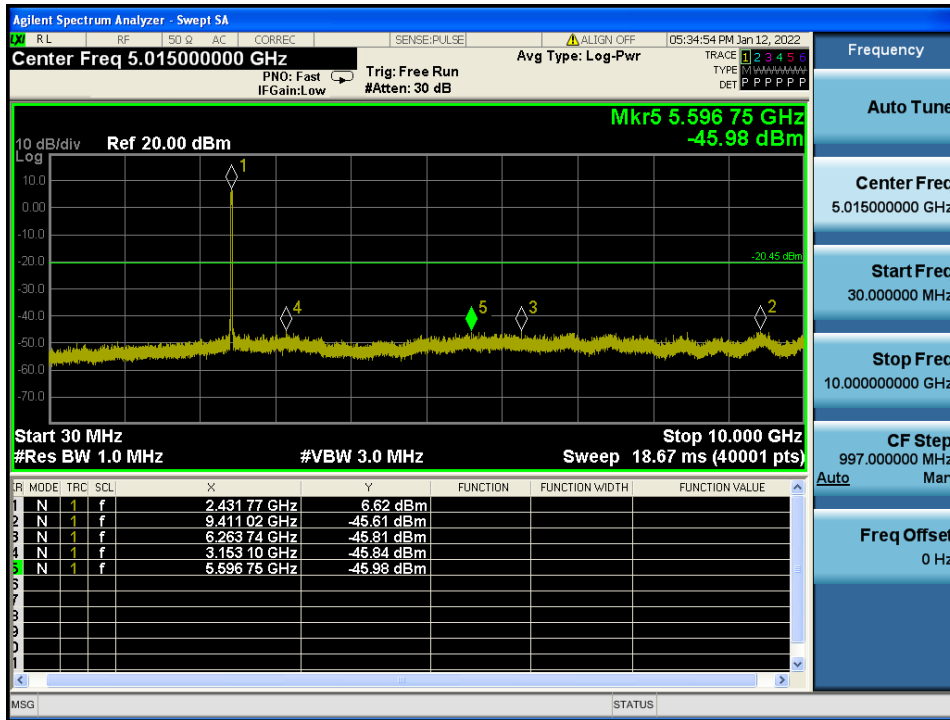


TM 3 & 2 462



Reference

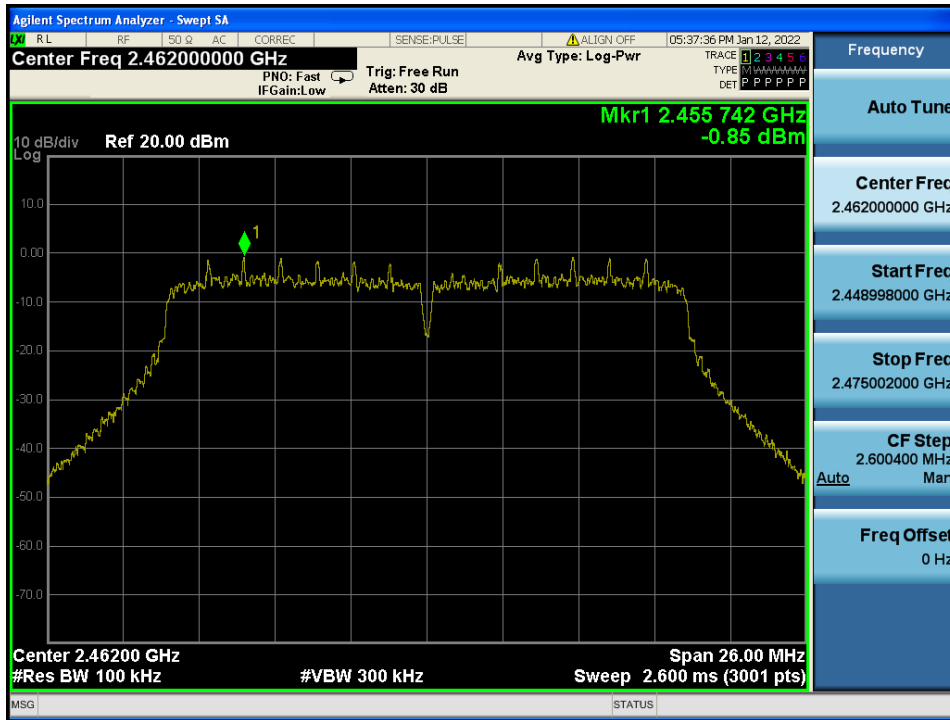


High Band-edge

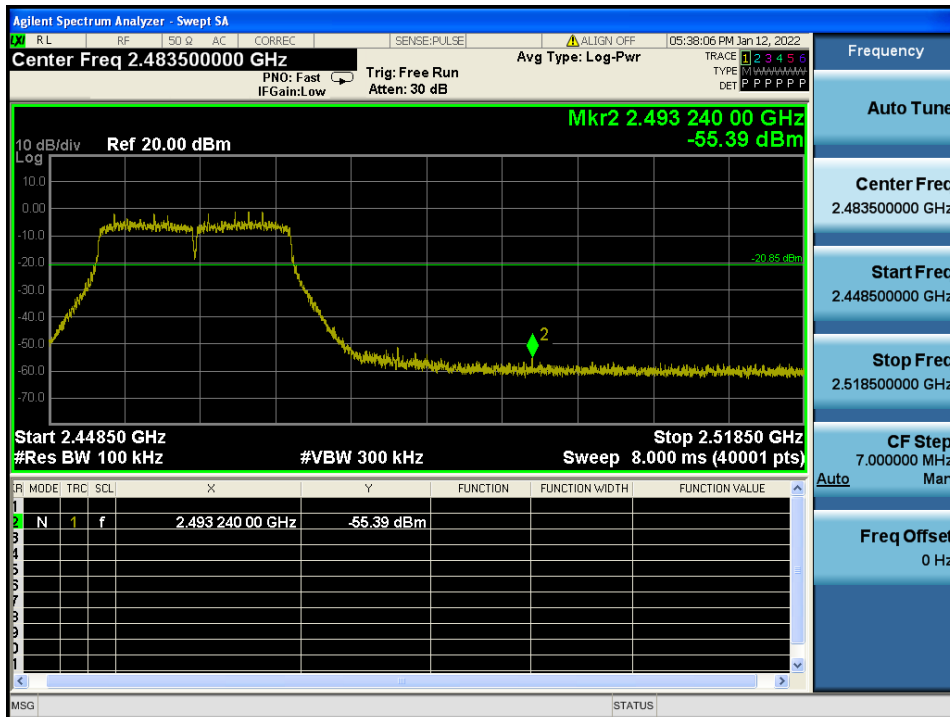

Conducted Spurious Emissions

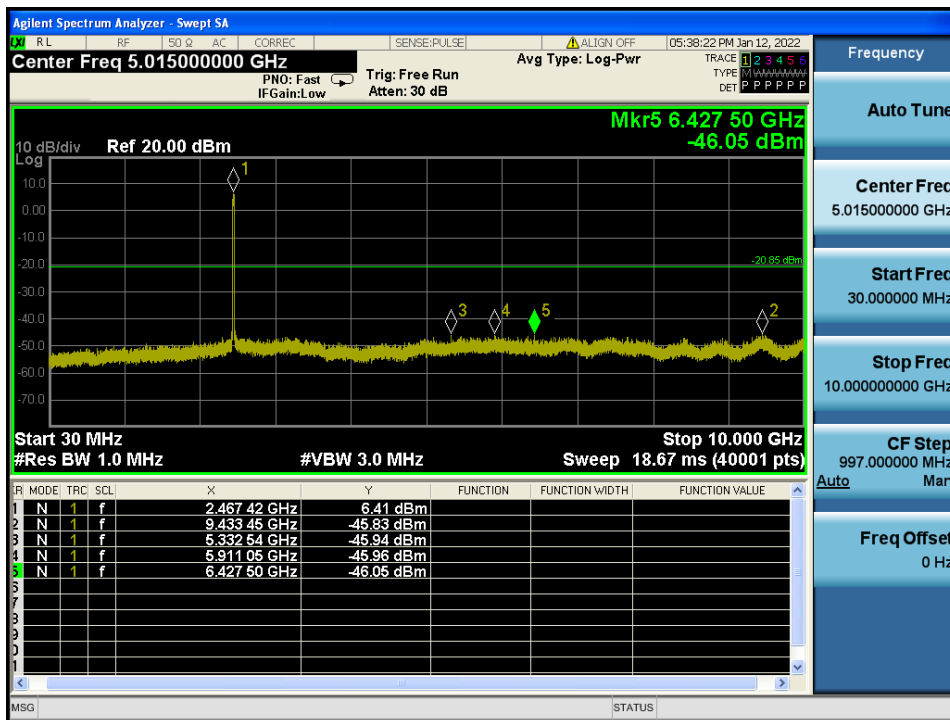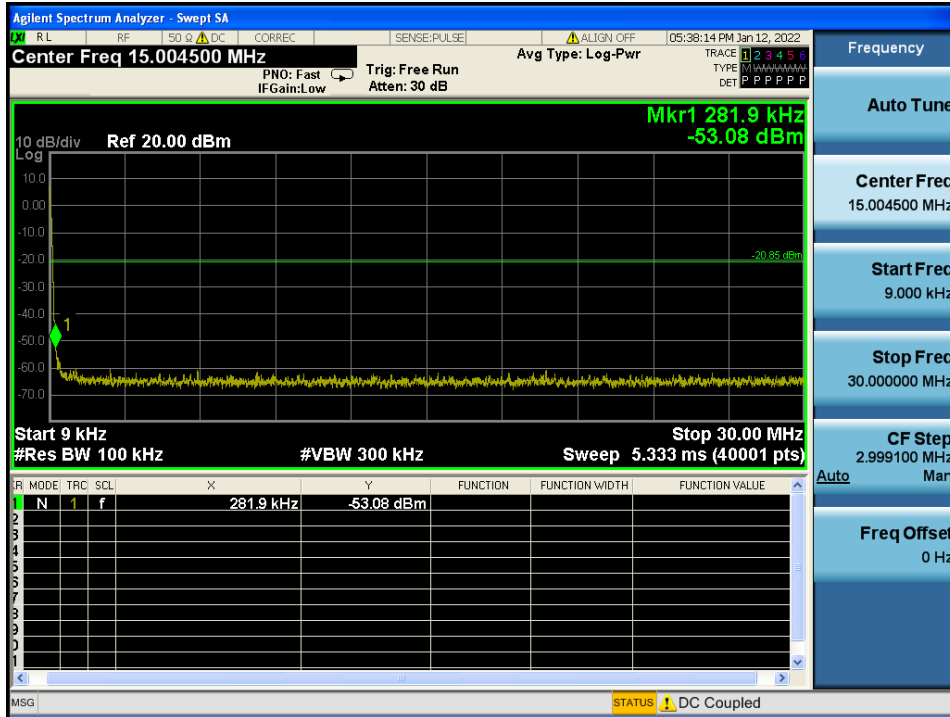


Conducted Spurious Emissions

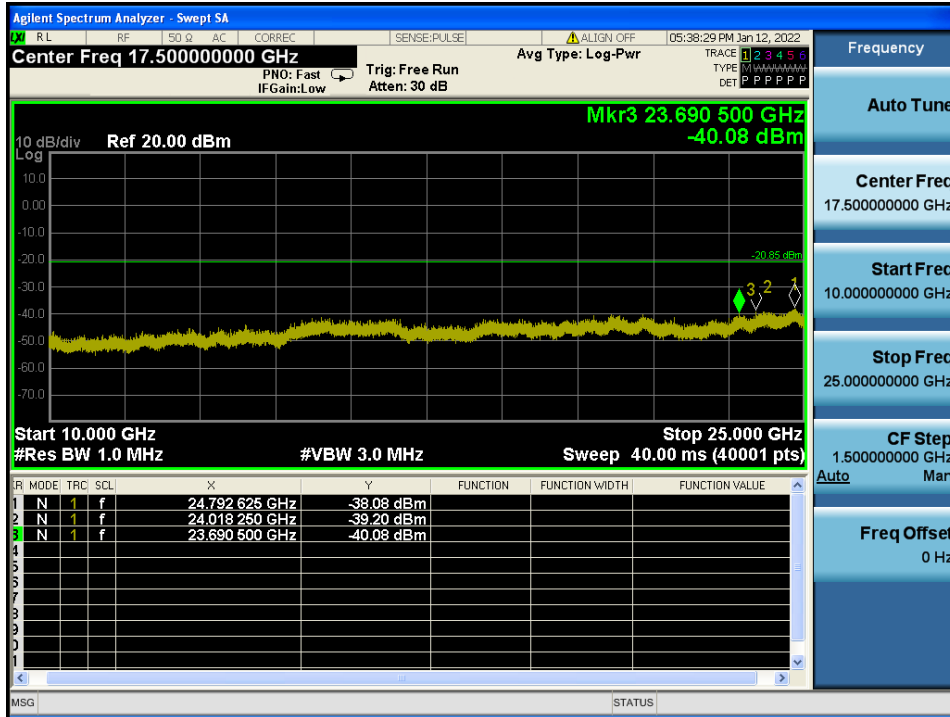


TM 4 & 2 422



Reference

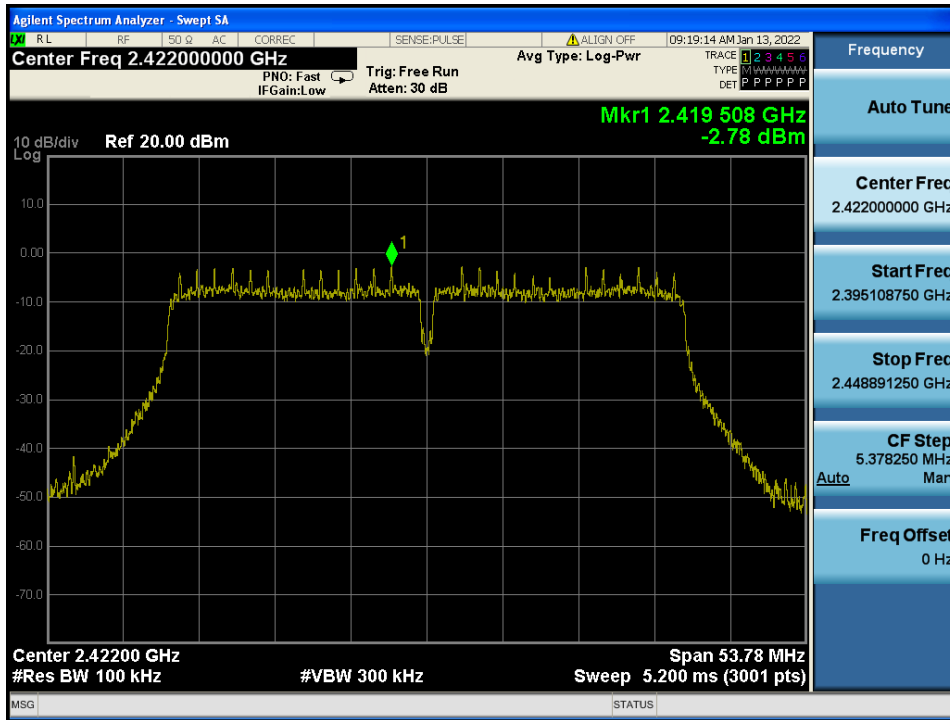


Low Band-edge

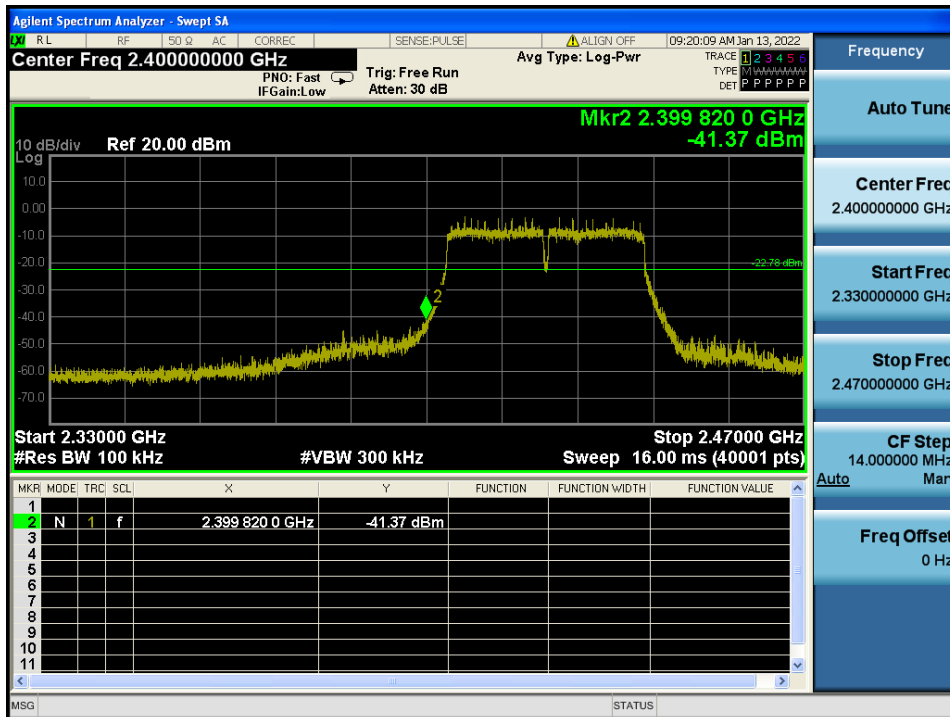

Conducted Spurious Emissions

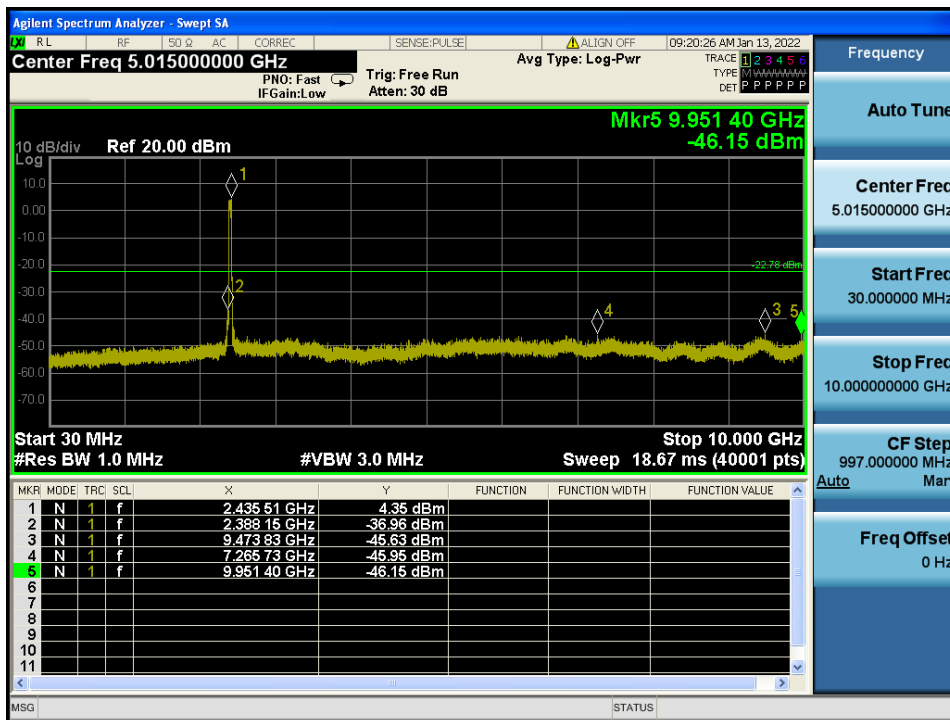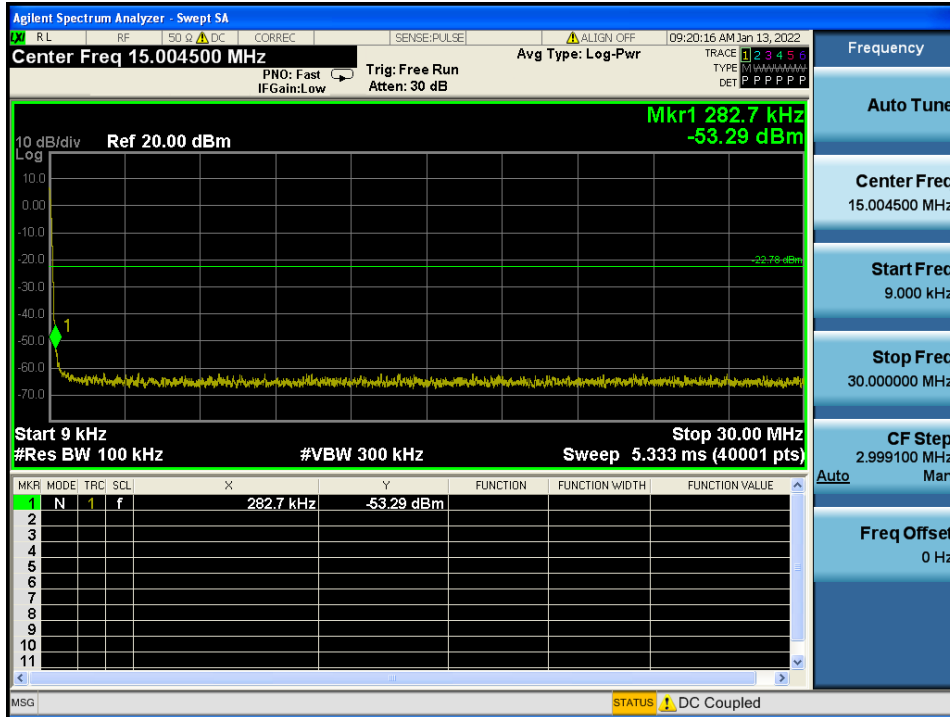


Conducted Spurious Emissions

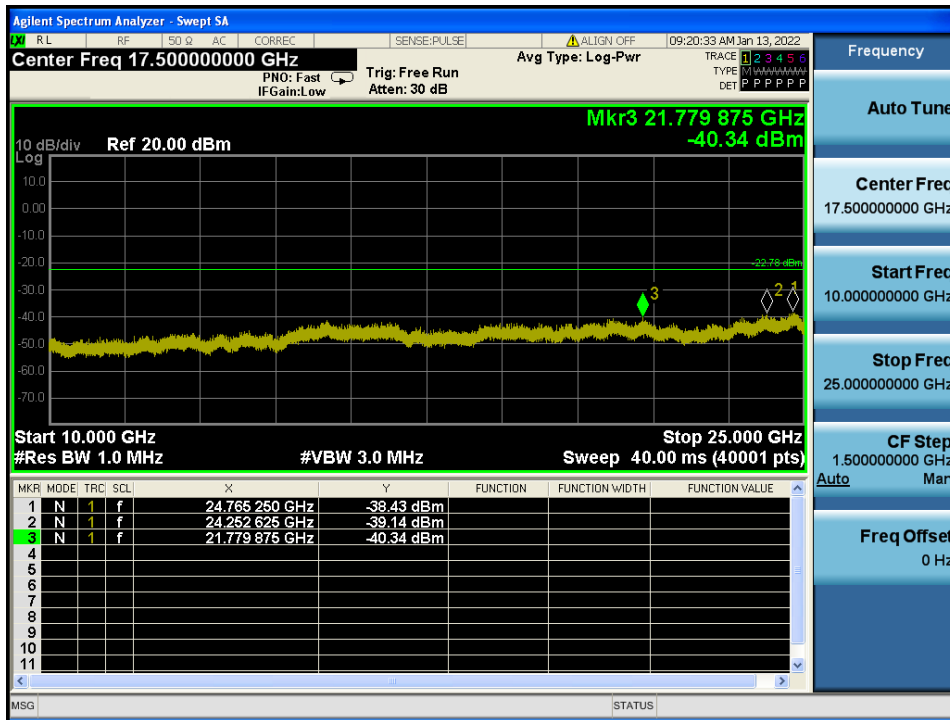


TM 4 & 2 437

Reference

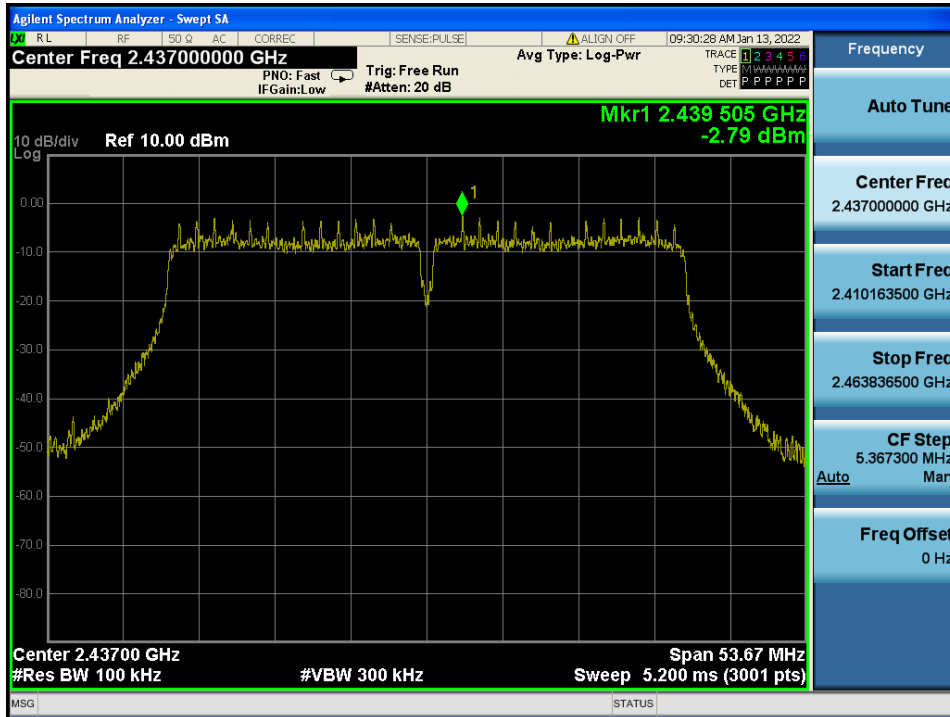

Conducted Spurious Emissions

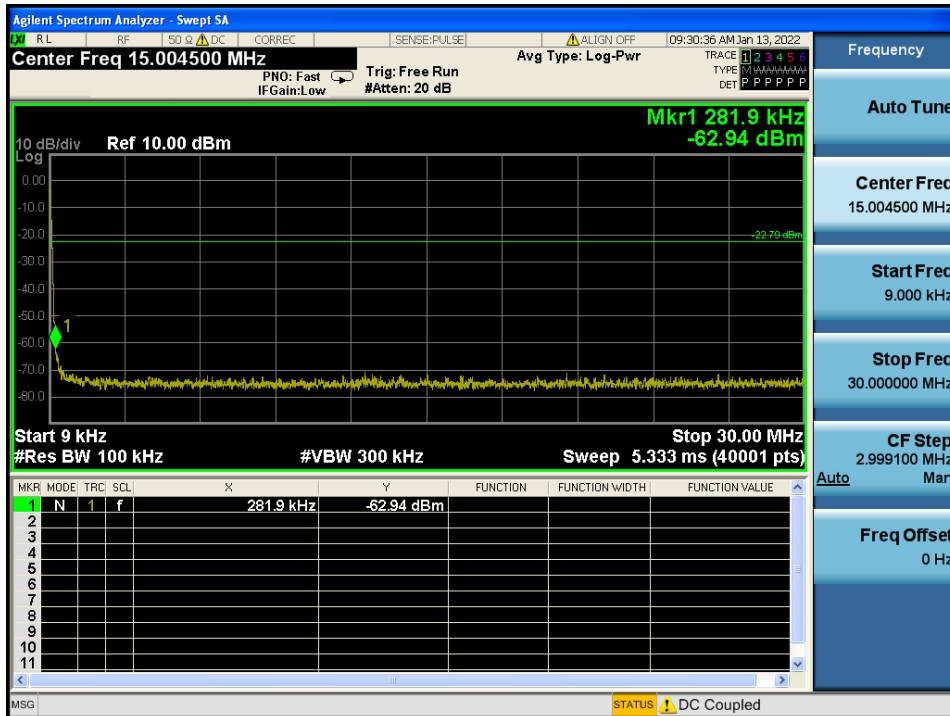

Conducted Spurious Emissions

