

Electromagnetic Emission


FCC MEASUREMENT REPORT


CERTIFICATION OF COMPLIANCE

FCC Part 15 Certification Measurement

PRODUCT : Car Dashcam
MODEL/Serial No. : DR750LW-2CH / Proto type
MULTIPLE MODEL : -
FCC ID : YCK-DR750LW-2CH
APPLICANT : Pittasoft Co., Ltd.
BYC HIGH CITY A-7th floor, 371-17 Gasan-Dong,
Geumcheon-Gu, Seoul, 153-803, Korea
Attn.: Kyungtae Ko / Senior Engineer
MANUFACTURER : Pittasoft Co., Ltd.
BYC HIGH CITY A-7th floor, 371-17 Gasan-Dong,
Geumcheon-Gu, Seoul, 153-803, Korea
FCC CLASSIFICATION : DTS (Part 15 Digital Transmission System)
TYPE OF MODULATION : DSSS (CCK), OFDM (QAM)
FREQUENCY CHANNEL : 802.11b/g/n(HT20): 2 412 MHz to 2 472 MHz and Channel Spacing 5 MHz (13 Ch)
802.11n(HT40): 2 422 MHz to 2 462 MHz and Channel Spacing 5 MHz (9 Ch)
AIR DATA RATE : 11 Mbps (802.11b), 54 Mbps (802.11g), 150 Mbps (802.11n)
ANTENNA TYPE : Internal Antenna (Integral)
ANTENNA GAIN : 3.50 dBi max
RF POWER : 16.22 mW
RULE PART(S) : FCC Part 15 Subpart C
FCC PROCEDURE : ANSI C63.4-2009
TEST REPORT No. : ETLE140714.1032
DATES OF TEST : April 07, 2014 to April 10, 2014
REPORT ISSUE DATE : August 27, 2014
TEST LABORATORY : ETL Inc. (FCC Designation Number : KR0022)

The Car Dashcam, Model DR750LW-2CH has been tested in accordance with the measurement procedures specified in ANSI C63.4-2009 at the ETL Test Laboratory and has been shown to be complied with the electromagnetic radiated emission limits specified in FCC Rule Part15 Subpart C section 15.247. I attest to the accuracy of data. All measurement herein was performed by me or was made under my supervision and is correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Prepared by: 
Jeong Hwan, Pyo (Test Engineer)
August 27, 2014

Reviewed by: 
Kug Kyoung, Yoon (Chief Engineer)
August 27, 2014

ETL Inc.

114, Gasan digital 2-ro, Geumcheon-gu, Seoul, 153-803, Korea

Tel: 82-2-858-0786 Fax: 82-2-858-0788

The test report merely corresponds to the test sample(s).

This report shall not be reproduced, in whole or in part without the written approval of ETL Inc.

Table of Contents

FCC Measurement Report

- 1. Introduction**
- 2. Product Information**
- 3. Description of Tests**
- 4. Test Condition**
- 5. Test Results**
 - 5.1 Summary of Test Results**
 - 5.2 6 dB Bandwidth**
 - 5.3 Maximum Peak Output Power**
 - 5.4 Bandwidth of Frequency Band Edges**
 - 5.5 Power Spectral Density**
 - 5.6 Spurious Emissions**
 - 5.7 Radio Frequency Exposure**
- 6. Sample Calculation**
- 7. List of test Equipment used for Measurement**

Appendix A. FCC ID Label and Location

Appendix B. Test Setup Photographs

Appendix C. External Photographs

Appendix D. Internal Photographs

Appendix E. Block Diagram

Appendix F. Circuit Diagram

Appendix G. User Manual

Appendix H. Operational Description

Appendix I. Antenna Requirement

Appendix J. Radio Frequency Exposure

FCC MEASUREMENT REPORT

Scope – Measurement and determination of electromagnetic emission (EME) of radio frequency devices including intentional radiators and/or unintentional radiators for compliance with the technical rules and regulations of the U.S Federal Communications Commission(FCC)

General Information

Applicant Name	: Pittasoft Co., Ltd.
Address	: BYC HIGH CITY A-7th floor, 371-17 Gasan-Dong, Geumcheon-Gu, Seoul, 153-803, Korea
Attention	: Kyungtae Ko / Senior Engineer

- **EUT Type** : Car Dashcam
- **Model Number** : DR750LW-2CH
- **S/N** : Proto type
- **Modulation Technique** : DSSS (CCK), OFDM (QAM)
- **Frequency Channel** : 802.11b/g/n(HT20) : 2 412 MHz to 2 472 MHz and Channel Spacing 5 MHz (13 Ch)
802.11n(HT40): 2 422 MHz to 2 462 MHz and Channel Spacing 5 MHz (9 Ch)
- **Air Data Rate** : 11 Mbps (802.11b), 54 Mbps (802.11g), 150 Mbps (802.11n)
- **Antenna Type** : Internal Antenna (Integral)
- **Antenna Gain** : 3.50 dBi max
- **RF Power** : 16.22 mW
- **Environmental of Tests** : Temperature: (26.2 ± 3.8) °C
: Humidity: (60 ± 13) % R.H.
: Atmospheric Pressure: (100.5 ± 0.4) kPa
- **FCC Rule Part(s)** : FCC Part 15 Subpart C
- **Test Procedure** : ANSI C63.4-2009
- **FCC Classification** : DTS (Part 15 Digital Transmission System)
- **Place of Tests** : ETL Inc. Testing Lab. (FCC Designation Number : KR0022)

Radiated Emission test 1;
97-4, Gureomae-gil, Seosin-myeon, Hwaseong-si,
Gyeonggi-do, 445-882, Korea

Radiated Emission test 2 and Conducted Emission test;
114, Gasan digital 2-ro, Geumcheon-gu, Seoul, 153-803, Korea

1. INTRODUCTION

The measurement test for radiated and conducted emission test was conducted at the ETL Inc. The site is constructed in conformance with the requirements of the ANSI C63.4-2009 and CISPR Publication 16. The ETL has site descriptions on file with the FCC for 3 m and 10 m site configurations. Detailed description of test facility was found to be in compliance with FCC Rules according to the ANSI C63.4-2009 and registered to the Federal Communications Commission (FCC Designation Number : KR0022).

The measurement procedure described in American National Standard for Method of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2009) was used in determining radiated and conducted emissions from the Pittasoft Co., Ltd. Model: DR750LW-2CH

2. PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the Car Dashcam (model: DR750LW-2CH).

The model DR750LW-2CH is basic model that was tested.

2.2 General Specification

Item	Specification	
Color	Front: Black	
	Rear: Black	
Size	Front: 107.2 mm (Width) x 67.5 mm (Height) x 20.5 mm (Thickness)	
	Rear: 67.4 mm (Width) x 27.6 mm (Height)	
Weight	Front: 136 g	
	Rear: 30 g	
Memory	Micro SD Card (16 GB/32 GB/64 GB)	
Recording Mode	Emergency Recording, Normal Recording, Event Recording (Impact Detection), and Parking Mode Recording (Motion + Impact Detection) * For parking mode recording, a battery discharge prevention device is required.	
Camera	Front: CMOS Sensor 2 million pixel	
	Rear: CMOS Sensor 2 million pixel	
Viewing Angle	Front: Diagonal 146°, Horizontal 115°, Vertical 85°	
	Rear: Diagonal 129°, Horizontal 108°, Vertical 57°	
Resolution / Frame	Front	Rear
	Full HD (1 920 x 1 080) @ 30 fps	Full HD (1 920 x 1 080) @ 30 fps
	Full HD (1 920 x 1 080) @ 30 fps	HD (1 280 x 720) @ 30 fps
	HD (1 280 x 720) @ 30 fps	HD (1 280 x 720) @ 30 fps
	* The resolution/frame can be changed.	
LCD	4 Inch WVGA (800 x 480) Touch Screen * Front/rear PIP enabled	
Video Compression Type	MP4	

Item	Specification
Wi-Fi	Internal (802.11b/g/n (2.4 GHz – 2.483 5 GHz))
GPS	External
Microphone	Built-in
Speaker	Built-in * Voice Announcement
LED Indicators	Front: Front Security LED, Wi-Fi LED, GPS LED, Recording Status (REC) LED
	Rear: Rear Security LED
Sensor	3-Axis Acceleration Sensor
Button	Power Button * Pressing Short: Starts and stops voice recording * Pressing Long: Turns on or off the power.
Backup Battery	Built-in Super Capacitor
Input Power	DC 12 V – DC 24 V
Power Consumption	Approx. 10 W (Avg. 6.6 W) * Depending on the usage condition, it is subject to change.
Continuous Power	Cut-off Voltage: 11.8 V/12.0 V/22.8 V/23.2 V can be selected.
	Voltage Cut-off Timer: 12 hours/24 hours/36 hours/48 hours/72 hours can be selected.
Operation Temperature	(20 ± 40) °C
Storage Temperature	(25 ± 45) °C
High Temp. Cut-Off	Approx. 70 °C
Software	BlackVue Viewer * Windows XP or higher (Windows 8 supported) and Mac Leopard OS X(10.5) or higher)
Application	BlackVue Application (Android 2.3 or higher, iOS 5.0 or higher, and Windows 8.0 or higher)
High Internal Frequency	X-tal → 40 MHz

3. DESCRIPTION OF TESTS

The tests documented in this report were performed in accordance with ANSI C63.4-2009 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

3.1 Radiated Emission Measurement

Radiated emission measurements were made in accordance with § 13 in ANSI C63.4-2009 "Measurement of Intentional radiators" The measurements were performed over the frequency range of 30 MHz to 40 GHz using antenna as the input transducer to a Spectrum analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Peak, Quasi-peak, Average" within a bandwidth of 120 kHz and above 1 GHz is 1 MHz.

Preliminary measurements were made at 3 m using broadband antennas, and spectrum analyzer to determine the frequency producing the maximum emission in shielded room. Appropriate precaution was taken to ensure that all emission from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 MHz to 1 000 MHz using Log-Bicon antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used. Final measurements were made open site or SVSWR chamber at 3 m. The test equipment was placed on a styrofoam table. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8 m high nonmetallic 1.0 m x 1.5 m table. The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 m to 4 m and stopped at the azimuth or height producing the maximum emission.

Varying the mode of operating frequencies of the EUT maximized each emission. The system was tested in all the three orthogonal planes and changing the polarity of the antenna. The worst-case emissions are recorded in the data tables. If necessary, the radiated emission measurement could be performed at a closer distance to ensure higher accuracy and the results were extrapolated to the specified distance using an inverse linear distance extrapolation factor (20 dB/decade) as per section 15.31(f).

Photographs of the worst-case emission can be seen in Photographs of the worst-case emission test setup can be seen in Appendix B.

3.2 Conducted Emission Measurement

Conducted emissions measurements were made in accordance with section § 13 in ANSI C63.4-2009 "measurement of intentional radiators" The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a 50 Ω /50 μ H LISN as the input transducer to a Spectrum Analyzer or a Test Receiver. The measurements were made with the detector set for "Peak" amplitude within a bandwidth of 9 kHz or for "quasi-peak" within a bandwidth of 9 kHz.

The line-conducted emission test is conducted inside a shielded anechoic chamber room with 1 m x 1.5 m x 0.8 m wooden table which is placed 0.4 m away from the vertical wall and 1.5 m away from the side wall of the chamber room. Two LISN are bonded to the shielded room. The EUT is powered from the LISN and the support equipment is powered from the other LISN. Power to the LISNs are filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner ϕ 1.2 cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and these supply lines will be connected to the LISN. Non-inductive bundling to a 1 m length shortened all interconnecting cables more than 1 m. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the EMI Test Receiver to determine the frequency producing the maximum emission from the EUT. The frequency producing the maximum level was reexamined using to set Quasi-Peak mode by manual, after scanned by automatic Peak mode from 0.15 MHz to 30 MHz. The bandwidth of the spectrum analyzer was set to 9 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission.

Photographs of the worst-case emission can be seen in Photographs of the worst-case emission test setup can be seen in Appendix B.

3.3 FCC Part 15.205 Restricted Bands of Operations

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.694 75 - 16.695 25	608 - 614	5.35 - 5.46
2.173 5 - 2.190 5	16.804 25 - 16.804 75	960 - 1 240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1 300 - 1 427	8.025 - 8.5
4.177 25 - 4.177 75	37.5 - 38.25	1 435 - 1 626.5	9.0 - 9.2
4.207 25 - 4.207 75	73 - 74.6	1 645.5 - 1 646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1 660 - 1 710	10.6 - 12.7
6.267 75 - 6.268 25	108 - 121.94	1 718.8 - 1 722.2	13.25 - 13.4
6.311 75 - 6.312 25	123 - 138	2 200 - 2 300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2 310 - 2 390	15.35 - 16.2
8.362 - 8.366	156.524 75 - 156.525 25	2 483.5 - 2 500	17.7 - 21.4
8.376 25 - 8.386 75	156.7 - 156.9	2 690 - 2 900	22.01 - 23.12
8.414 25 - 8.414 75	162.012 5 - 167.17	3 260 - 3 267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3 332 - 3 339	31.2 - 31.8
12.519 75 - 12.520 25	240 - 285	3 345.8 - 3 358	36.43 - 36.5
12.576 75 - 12.577 25	322 - 335.4	3 600 - 4 400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490 MHz - 0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1 000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1 000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

4. TEST CONDITION


4.1 Test Configuration

The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the following conditions and configurations were used.

4.2 Description of Test modes

BLACKVUE LCD that has the control software. (Test power: 33)

4.3 The setup drawing(s)

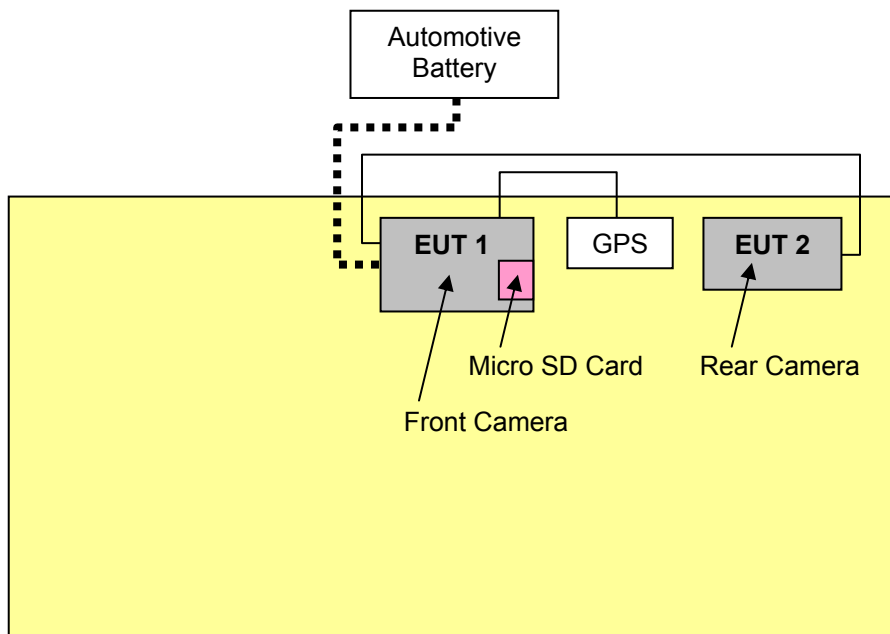

- : Signal line
- : AC Power line
- : DC Power line (Cigar Jack)
- : Adapter

5. TEST RESULTS

5.1 Summary of Test Results

The measurement results were obtained with the EUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum emission of the EUT are reported.

47 CFR Part 15, Subpart C	Measurement Required	Result
15.247(a)(2)	6 dB Bandwidth	Pass
15.247(b)(3)	Maximum Peak Output Power	Pass
15.247(d)	Bandwidth of Frequency Band Edges	Pass
15.247(e)	Power Spectral Density	Pass
15.209(a)	Spurious Emissions	Pass
15.207	Conducted Emissions	N/A *
1.1307(b)(1)	RF Exposure	Pass

* This test was not applied. Because, EUT power supplies from an automotive battery.
(DC 12 V – DC 24 V)

The data collected shows that the **Pittasoft Co., Ltd. / Car Dashcam / DR750LW-2CH** complied with technical requirements of above rules part 15.207, 209 and 15.247 Limits.

The equipment is not modified anything, mechanical or circuits to improve EMI status during a measurement. No EMI suppression device(s) was added and/or modified during testing.

5.2 6 dB Bandwidth

EUT	Car Dashcam / DR750LW-2CH
Limit apply to	FCC Part 15.247(a)(2)
Test Date	August 05, 2014
Environmental of Test	(24.0 ± 0.0) °C, (47 ± 0) % R.H., (100.1 ± 0.0) kPa
Operating Condition	RF transmitting continuously during the tested.
Result	Passed

Limit

The maximum 6 dB bandwidth shall be at least 500 kHz.

Test Data


Mode	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit
802.11b	2 412	10.60	> 500 kHz
	2 442	10.37	
	2 472	11.03	
802.11g	2 412	16.53	
	2 442	16.53	
	2 472	16.57	
802.11n(HT20)	2 412	17.80	
	2 442	17.77	
	2 472	17.73	
802.11n(HT40)	2 422	36.50	
	2 442	36.42	
	2 462	36.42	

NOTES:


1. This test was applied both to DC 12 V and DC 24 V. (Worst case: DC 24 V)
2. Measure frequency separation of relevant channel using spectrum analyzer.
3. RBW 300 kHz, VBW 1 MHz, Sweep time Auto.
4. Please see the measured plot in next page.

Plots of 6 dB Bandwidth (802.11b)


[2 412 MHz]

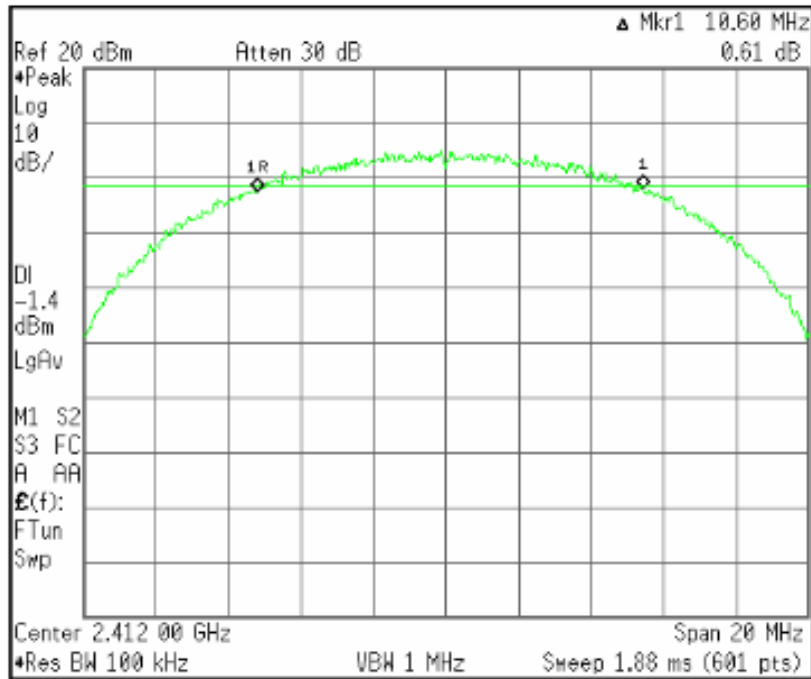

[2 442 MHz]

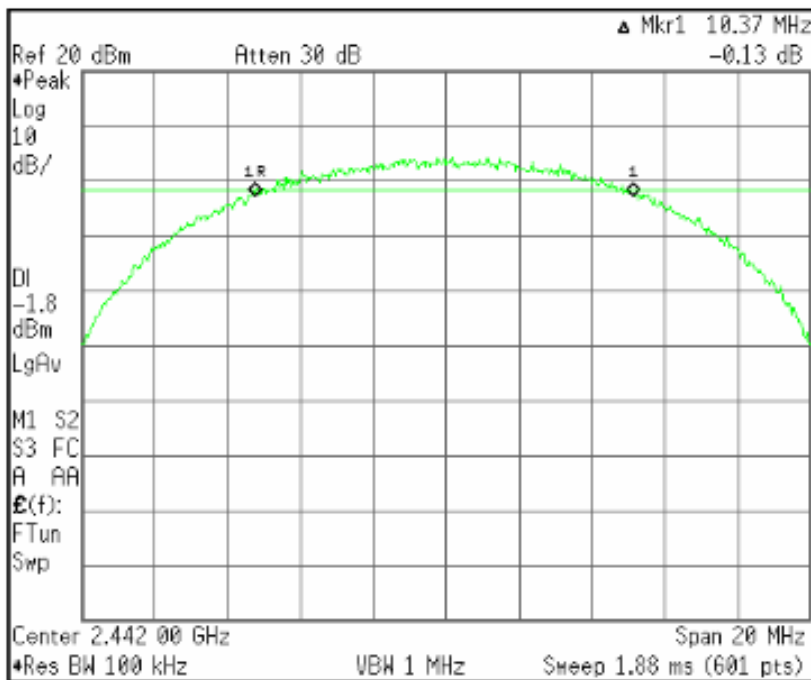


[2 472 MHz]

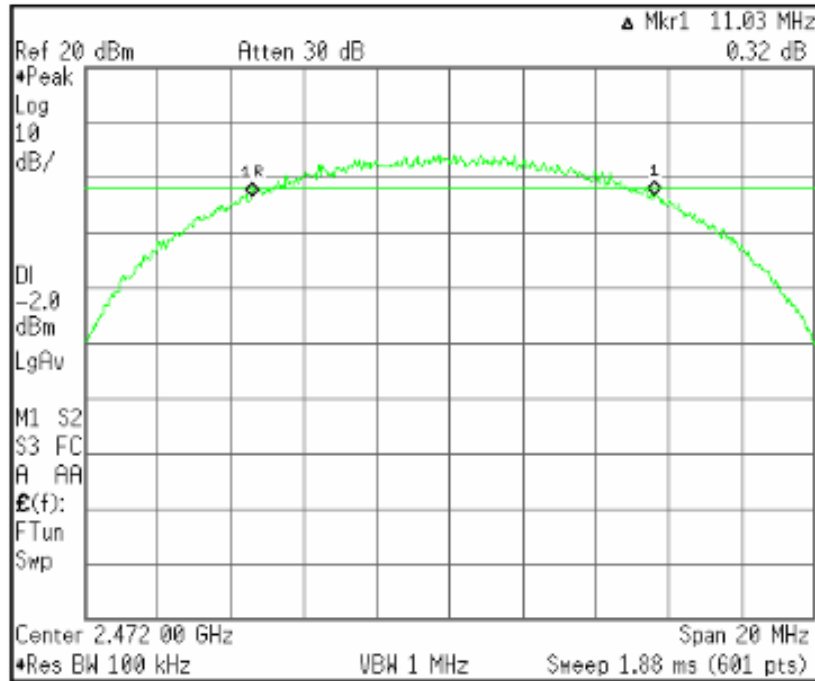


Plots of 6 dB Bandwidth (802.11g)


[2 412 MHz]

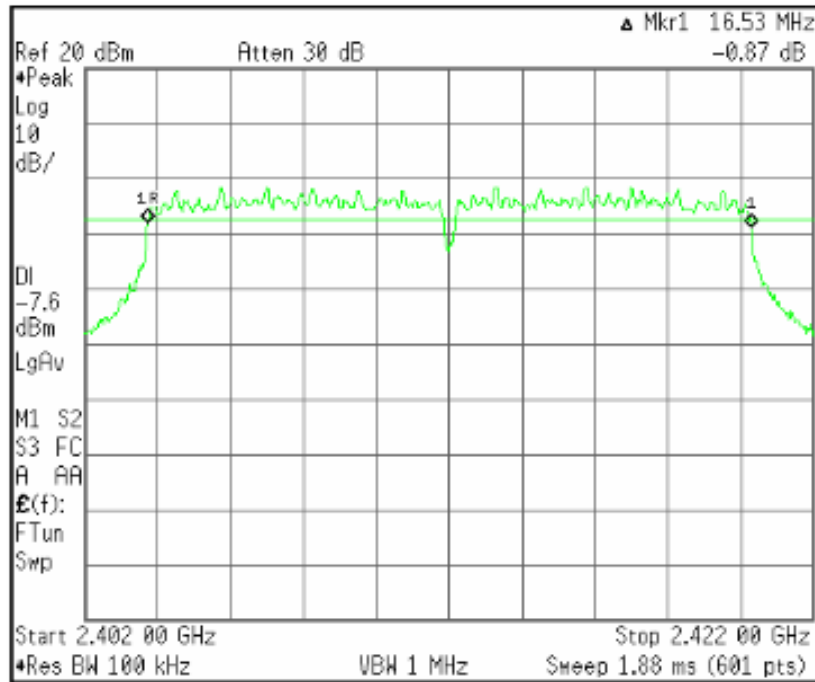

[2 442 MHz]

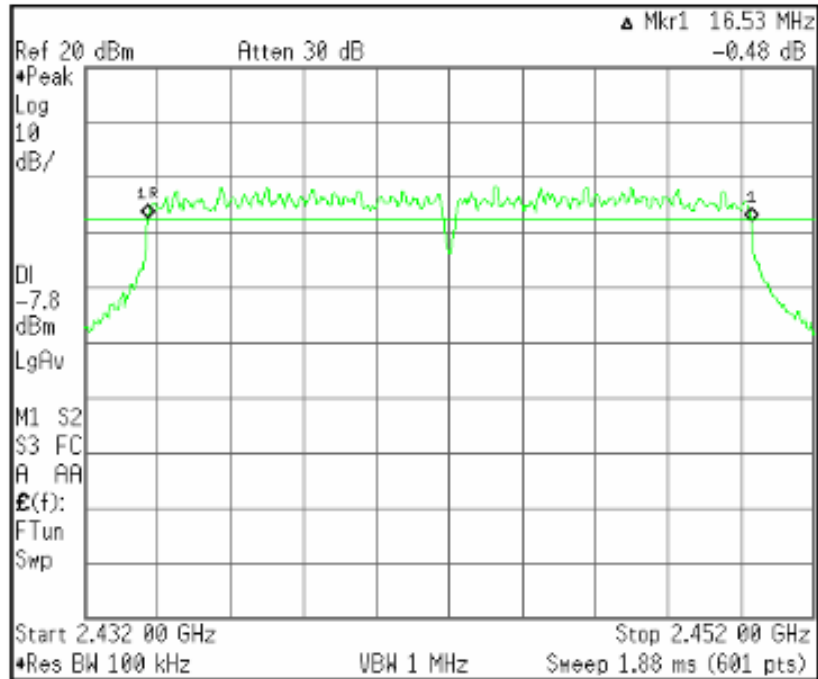


[2 472 MHz]

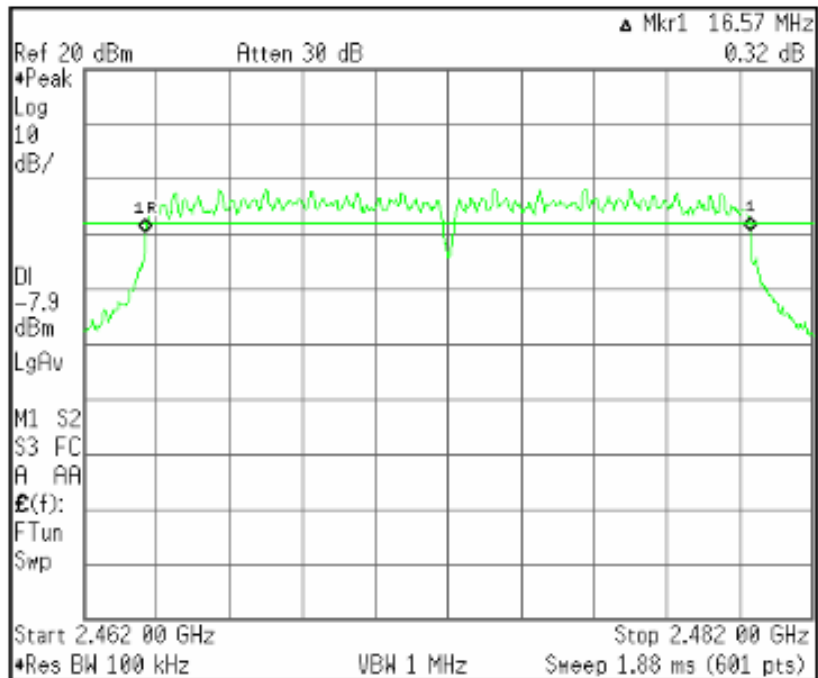


Plots of 6 dB Bandwidth (802.11n(HT20))


[2 412 MHz]

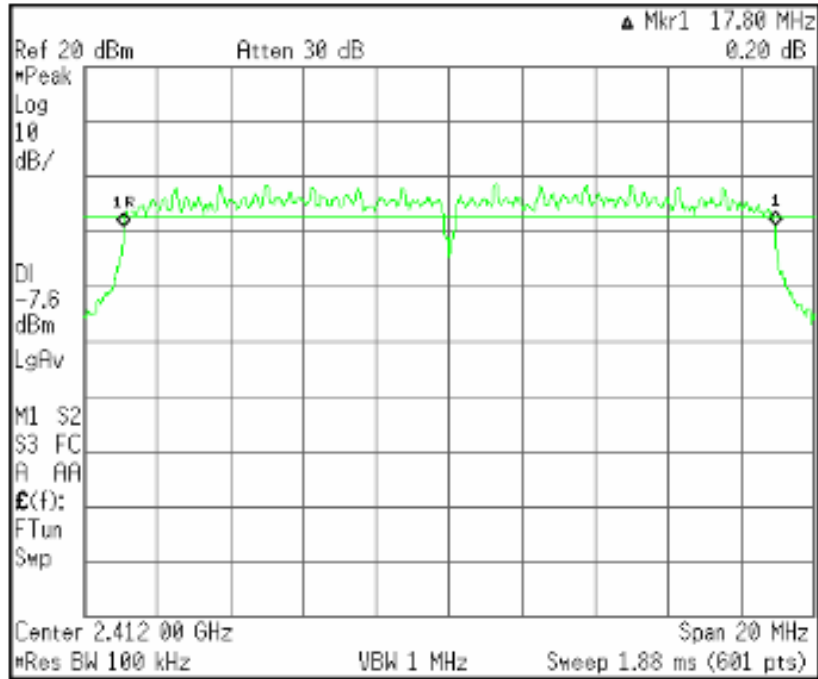

[2 442 MHz]

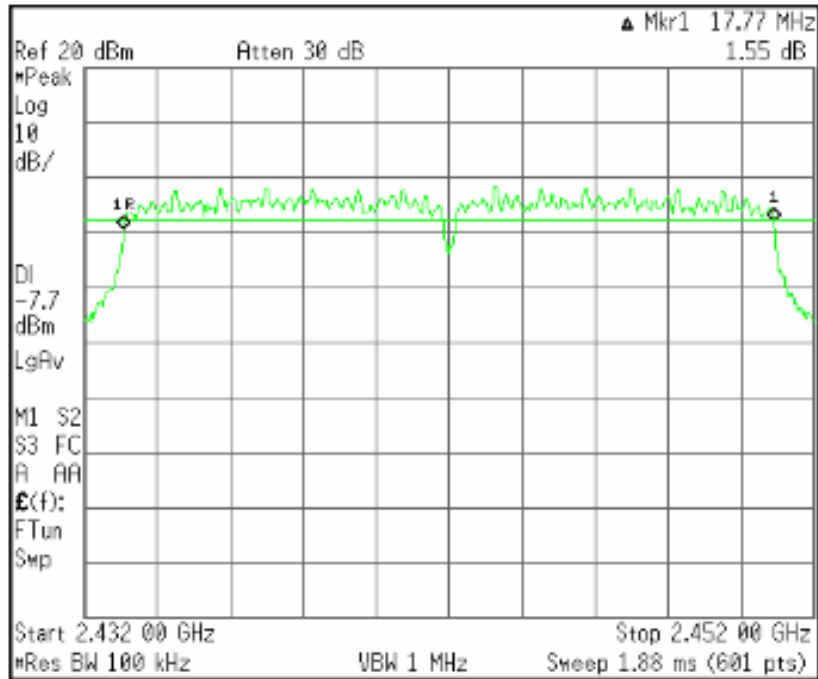


[2 472 MHz]

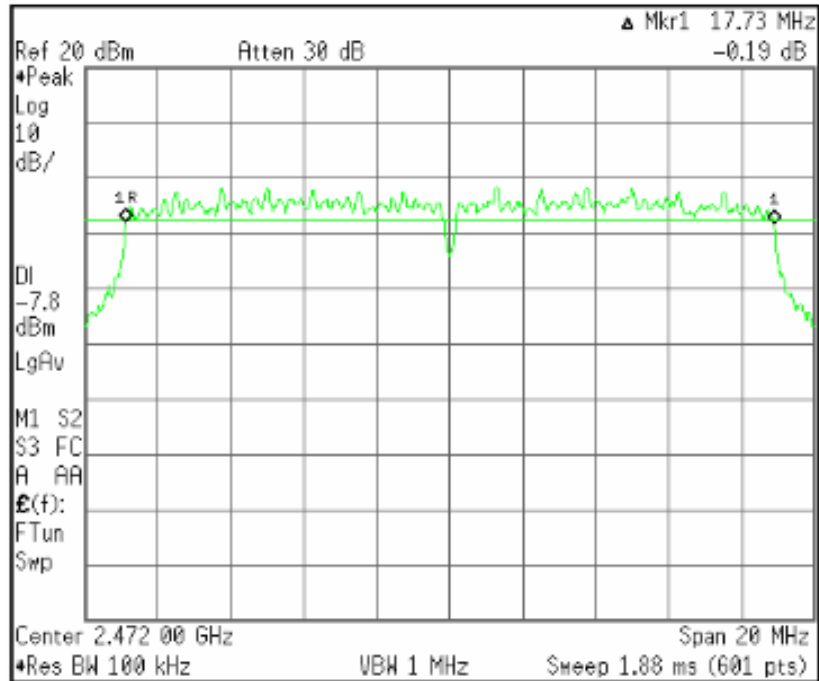


Plots of 6 dB Bandwidth (802.11n(HT40))


[2 422 MHz]

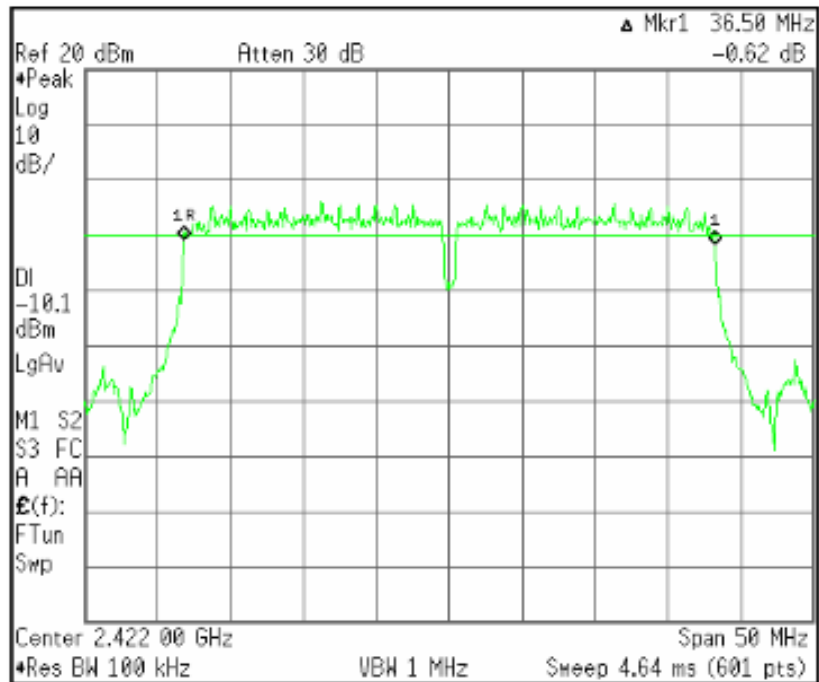

[2 442 MHz]

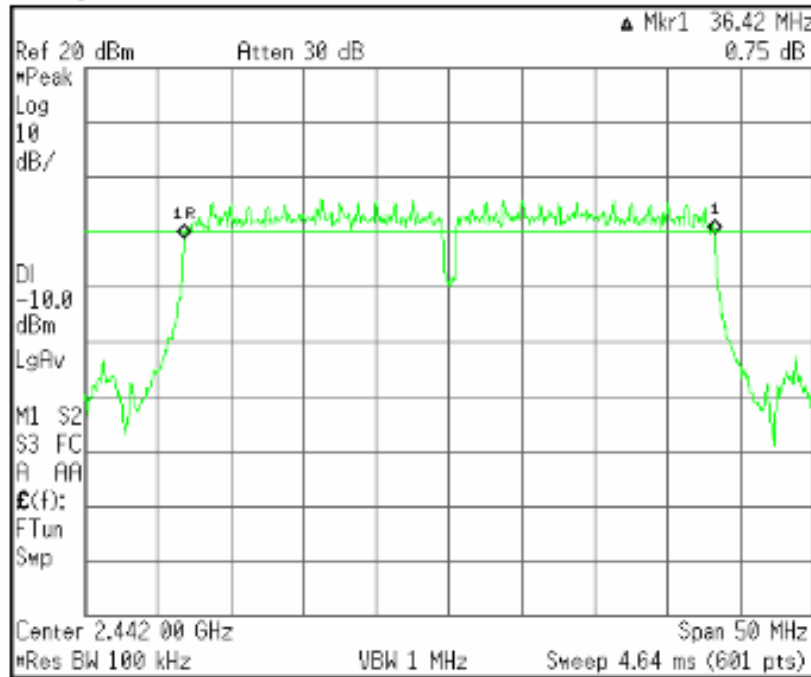

[2 462 MHz]

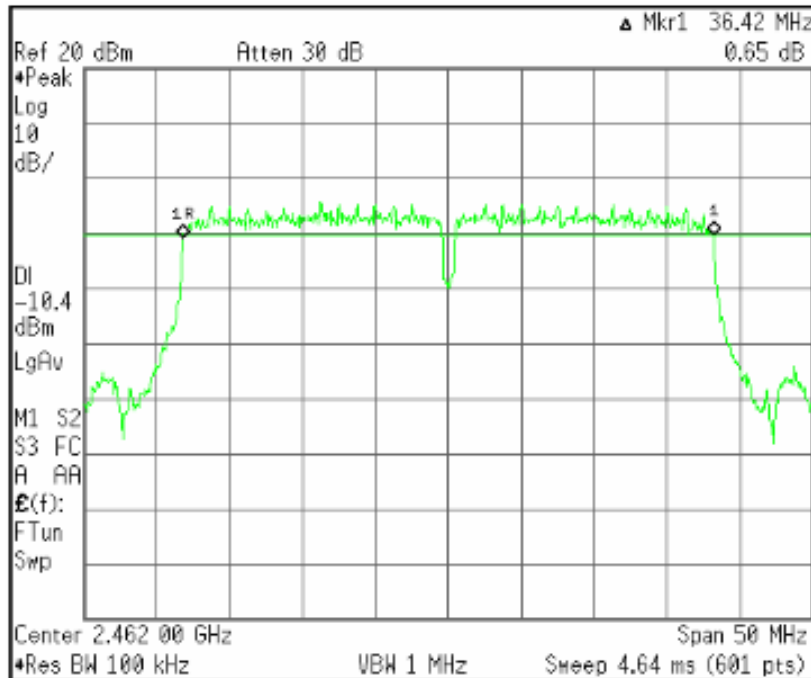

5.3 Maximum Peak Conducted Output Power

EUT	Car Dashcam / DR750LW-2CH
Limit apply to	FCC Part 15.247(b)(3)
Test Date	August 05, 2014
Environmental of Test	(23.5 ± 0.1) °C, (48 ± 0) % R.H., (100.1 ± 0.0) kPa
Operating Condition	RF transmitting continuously during the tested.
Result	Passed

Limit

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

For frequency hopping systems operating in the 2 400.0 MHz - 2 483.5 MHz band: 1 Watt

Test Data


Mode	Frequency [MHz]	Output Power [dBm]	Limit
802.11b	2 412	12.10	< 30.00 dBm (1 W)
	2 442	10.16	
	2 472	11.63	
802.11g	2 412	5.26	
	2 442	5.65	
	2 472	5.62	
802.11n(HT20)	2 412	0.08	
	2 442	2.08	
	2 472	2.70	
802.11n(HT40)	2 422	3.18	
	2 442	3.54	
	2 462	3.49	

NOTES:


1. This test was applied both to DC 12 V and DC 24 V. (Worst case: DC 24 V)
2. Measure conducted Channel power of relevant channel using spectrum analyzer.
3. RBW 1 MHz, VBW 8 MHz
4. Please see the measured plot in next page.

Plots of Maximum Peak Output Power Bandwidth (802.11b)


[2 412 MHz]

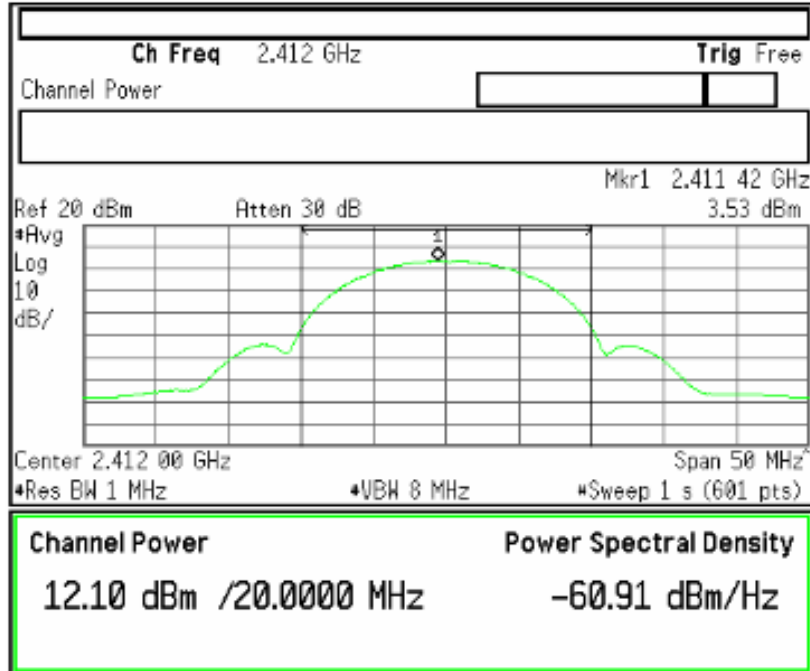

[2 442 MHz]

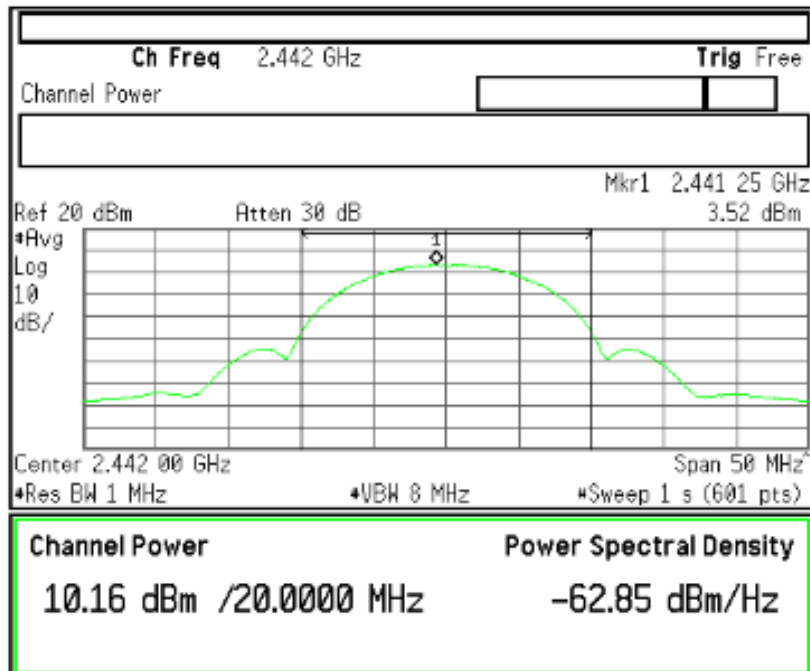


[2 472 MHz]

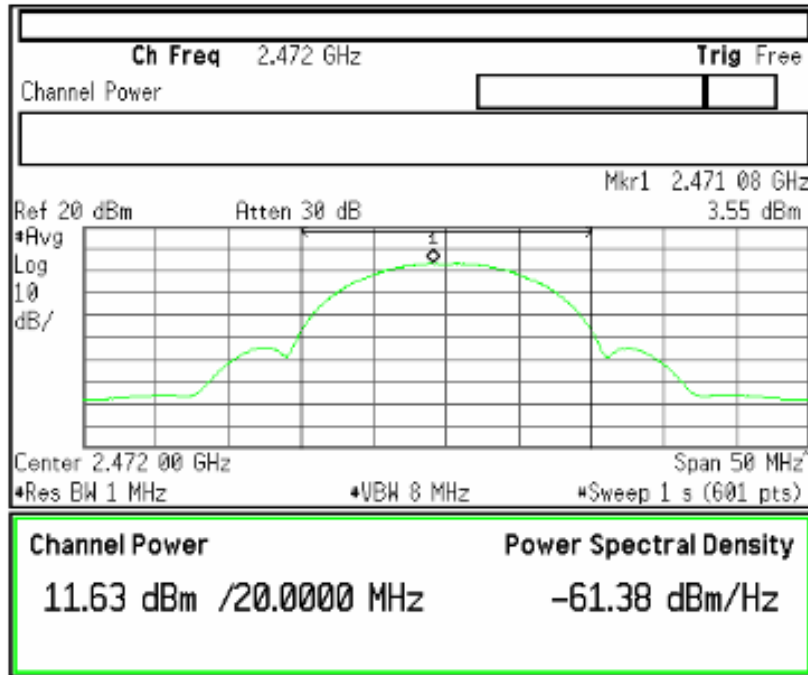


Plots of Maximum Peak Output Power Bandwidth (802.11g)


[2 412 MHz]

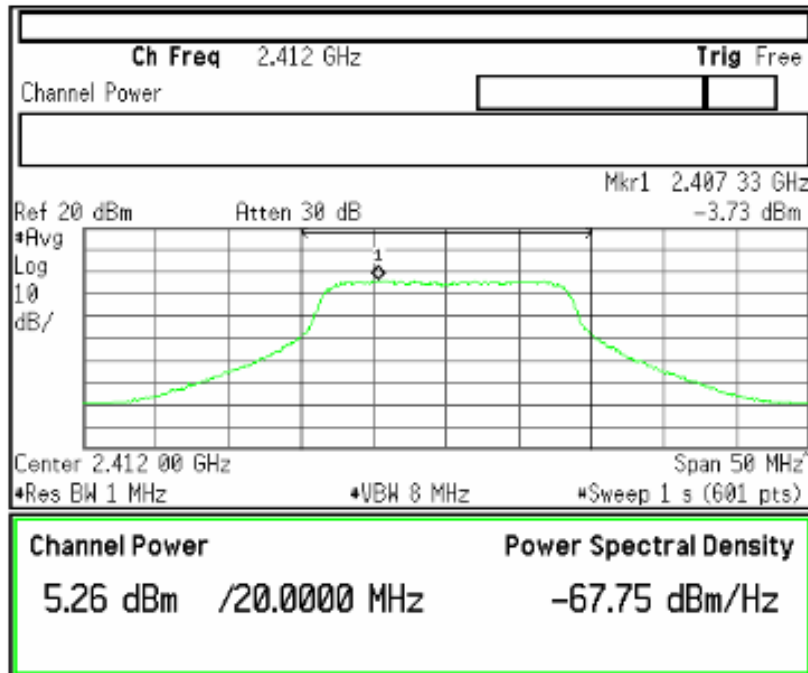

[2 442 MHz]

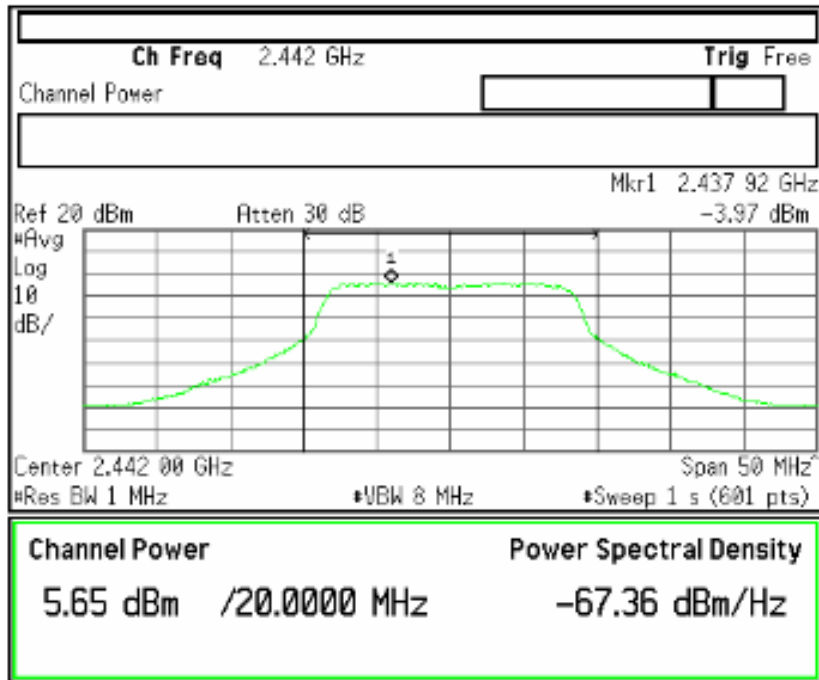


[2 472 MHz]

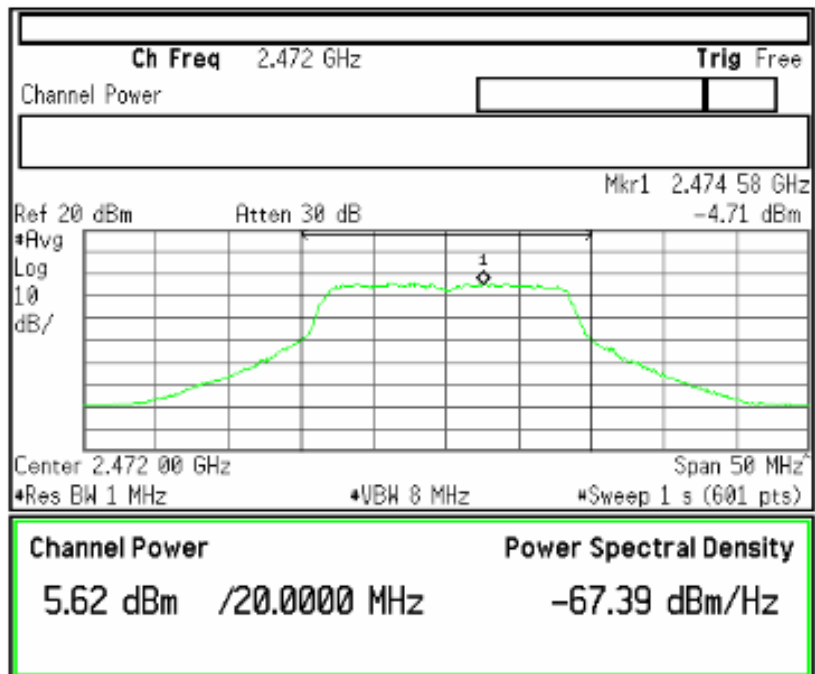


Plots of Maximum Peak Output Power Bandwidth (802.11n(HT20))


[2 412 MHz]

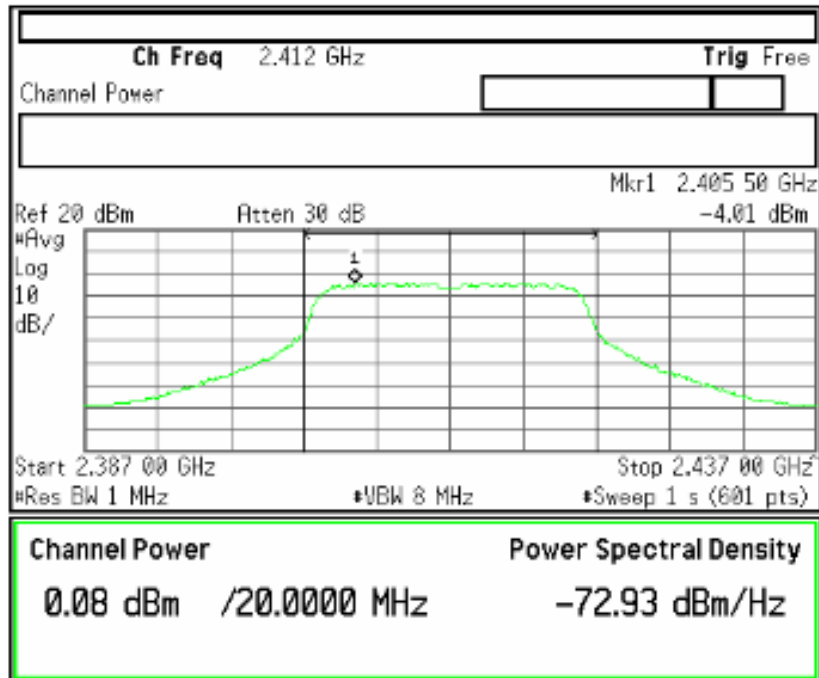

[2 442 MHz]

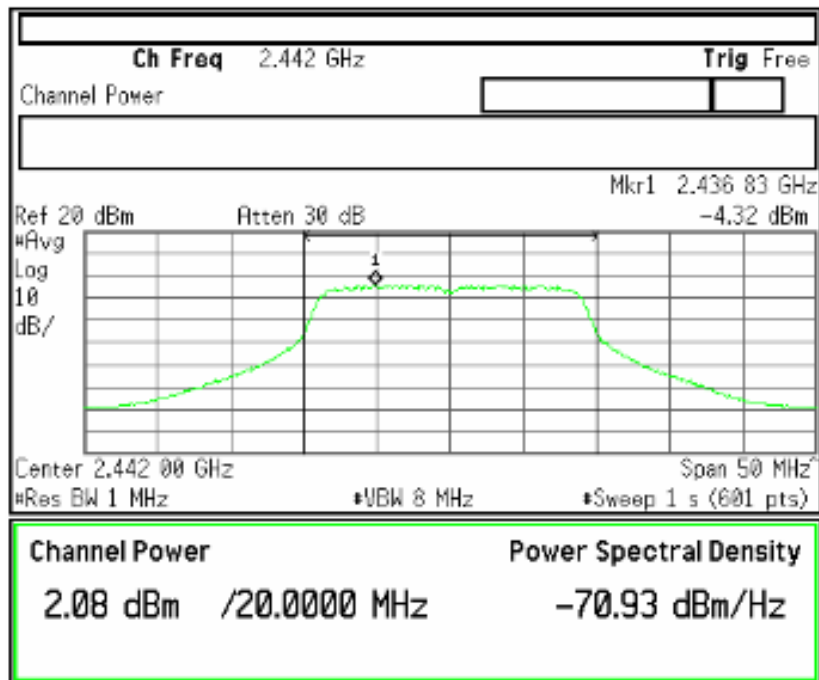


[2 472 MHz]

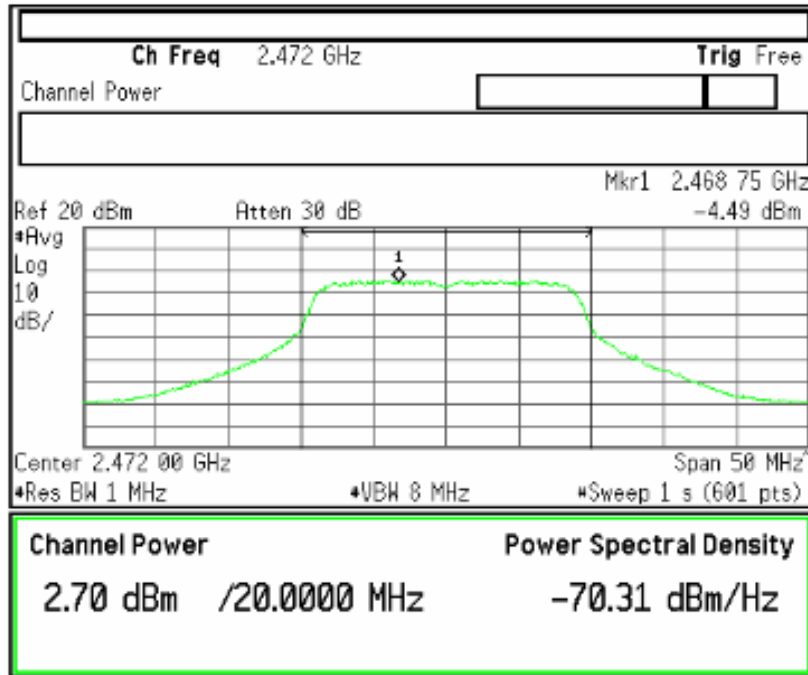


Plots of Maximum Peak Output Power Bandwidth (802.11n(HT40))


[2 422 MHz]

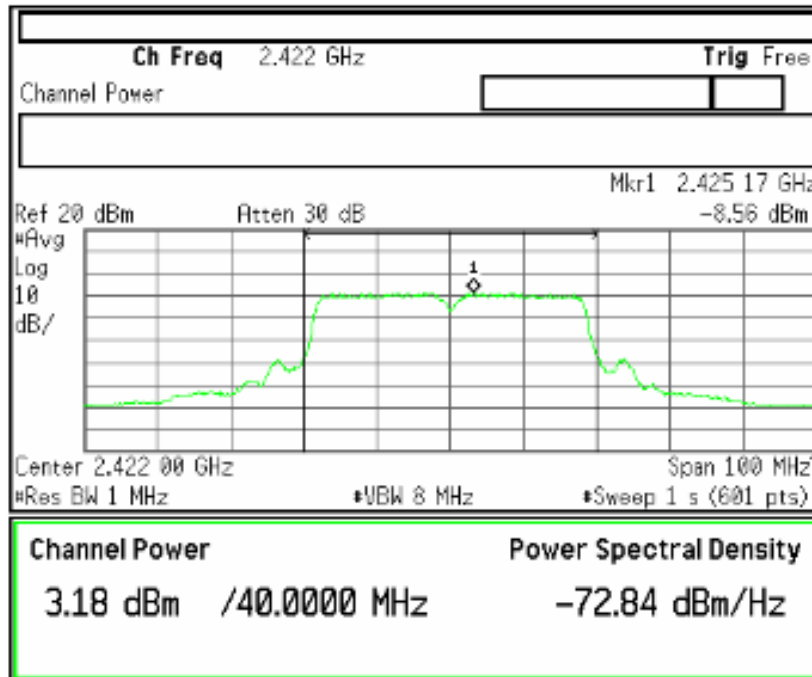

[2 442 MHz]

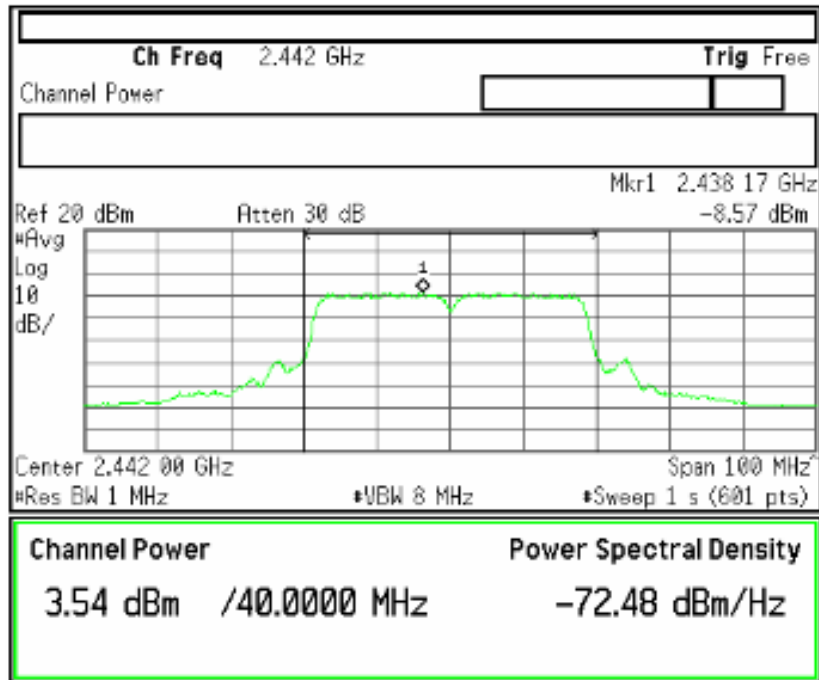

[2 462 MHz]

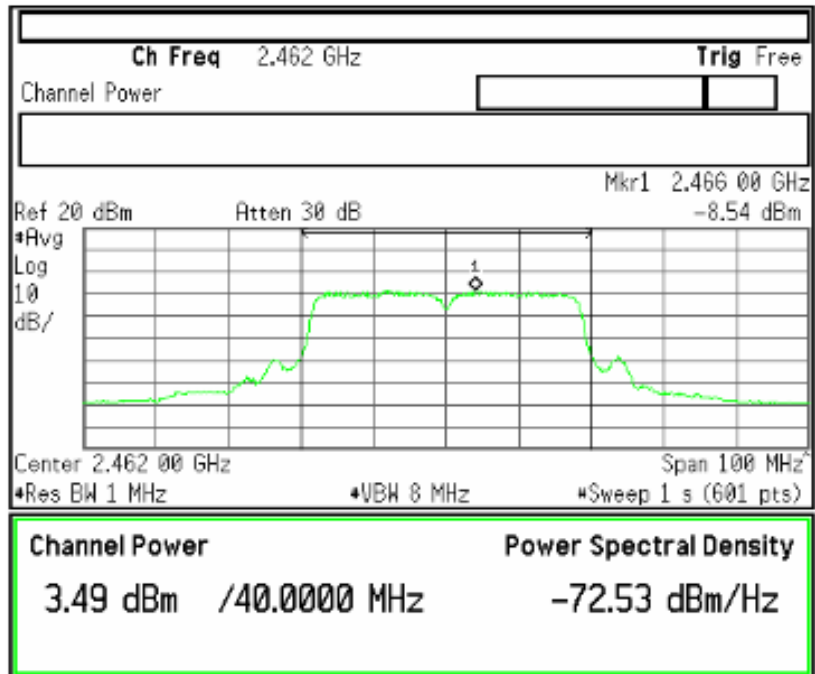

5.4 Bandwidth of Frequency Band Edges

EUT	Car Dashcam / DR750LW-2CH
Limit apply to	FCC Part 15.247(d)
Test Date	August 06, 2014
Environmental of Test	(22.7 ± 0.2) °C, (47 ± 0) % R.H., (100.4 ± 0.0) kPa
Operating Condition	RF transmitting continuously during the tested.
Result	Passed

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Test Results



- Refer to see the measured plot in next page.

NOTES:

1. This test was applied both to DC 12 V and DC 24 V. (Worst case: DC 24 V)
2. The test was performed to make a direct field strength measurement at the band edge frequencies.

Plots of Bandwidth of Frequency Band Edges (802.11b)


Conducted

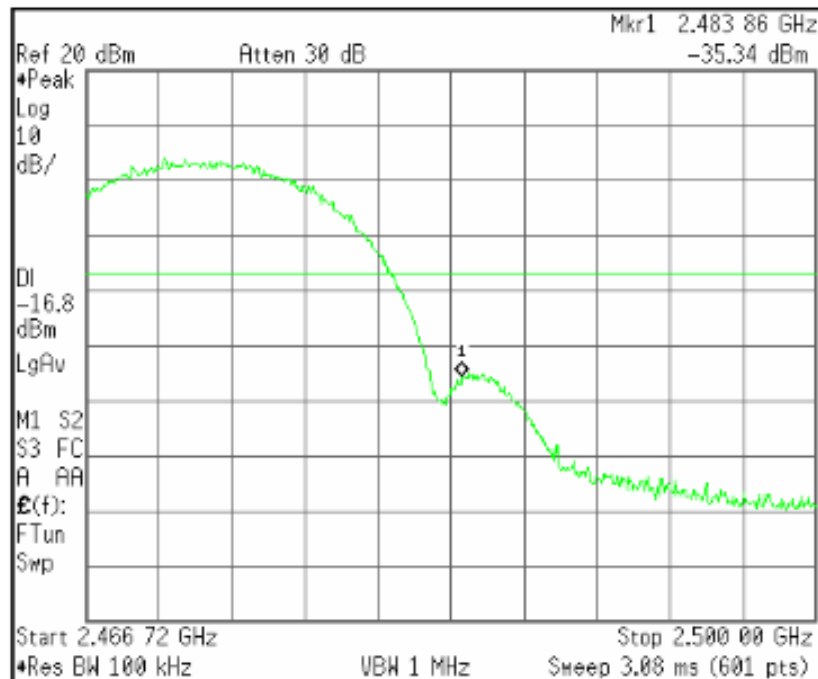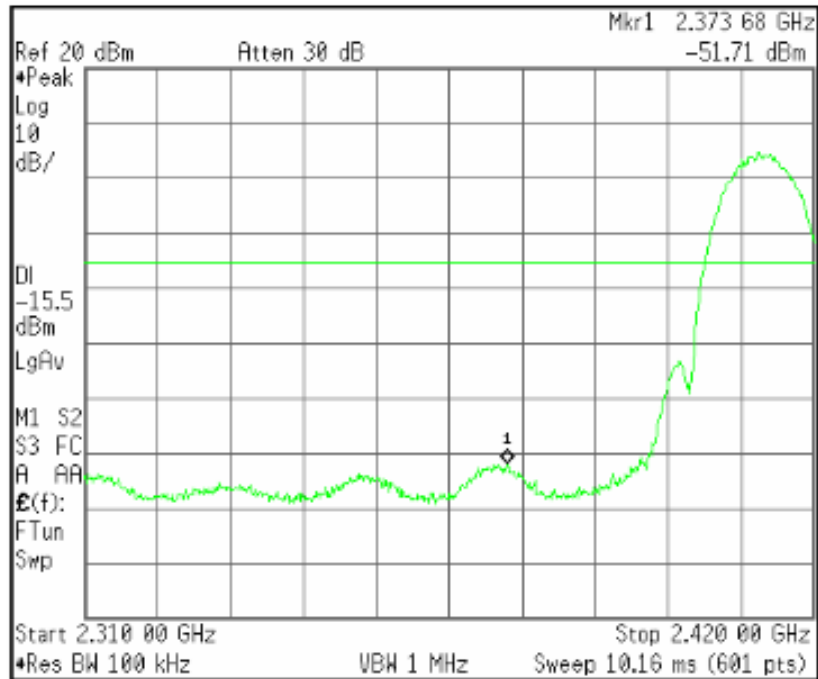

Radiated


Peak Detector: RBW: 1 MHz, VBW: 1 MHz (2 310 MHz - 2 390 MHz), Worst case (Low, Horizontal)

— Peak Limit Line
— AV Limit Line

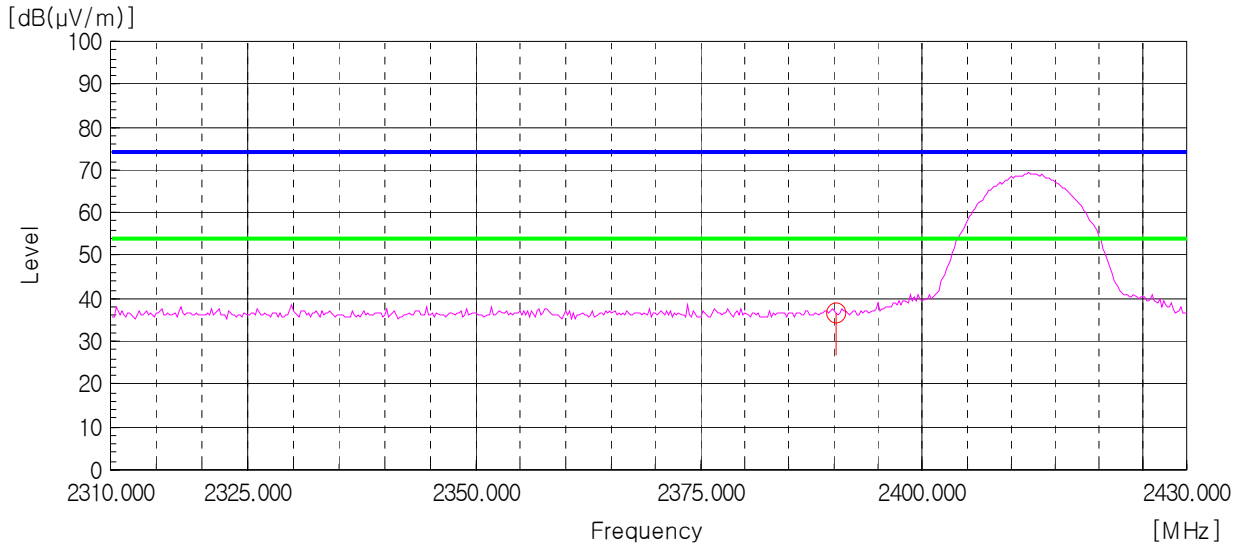


AV Detector: RBW: 1 MHz, VBW: 10 Hz (2 310 MHz - 2 390 MHz), Worst case (Low, Horizontal)

— Peak Limit Line
— AV Limit Line

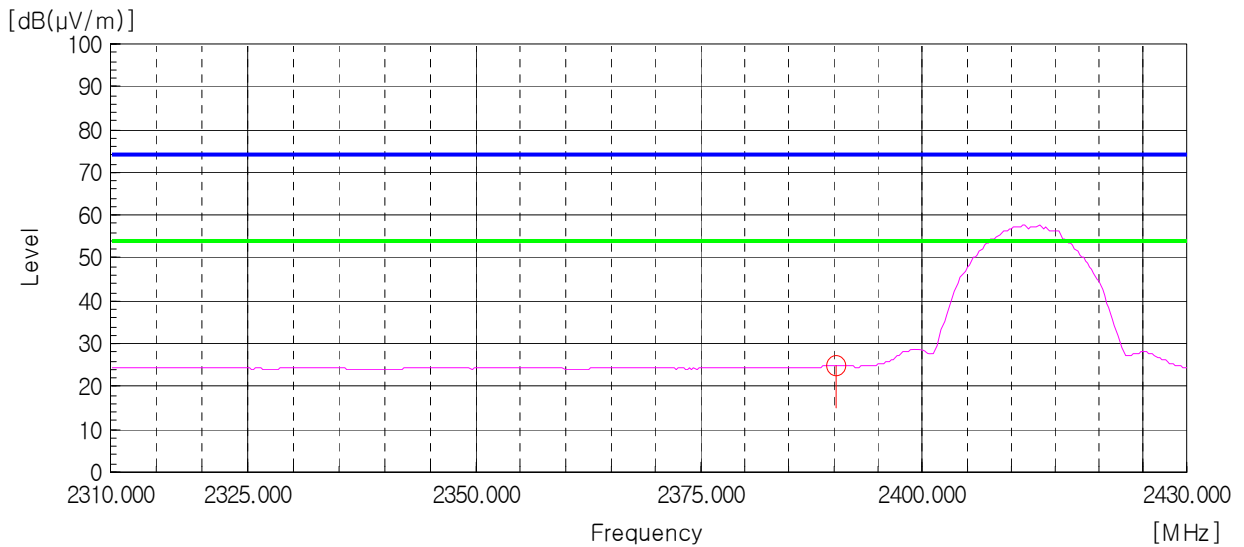


Peak Detector: RBW: 1 MHz, VBW: 1 MHz (2 483.5 MHz - 2 500 MHz), Worst case (High, Horizontal)

— Peak Limit Line
— AV Limit Line

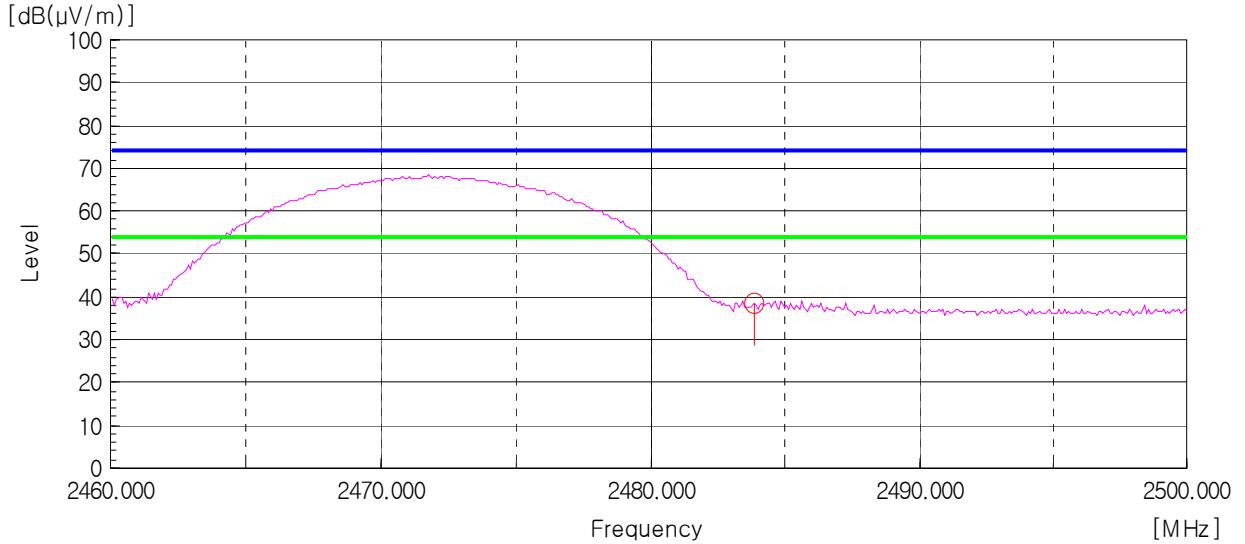



AV Detector: RBW: 1 MHz, VBW: 10 Hz (2 483.5 MHz - 2 500 MHz), Worst case (High, Horizontal)

— Peak Limit Line
— AV Limit Line

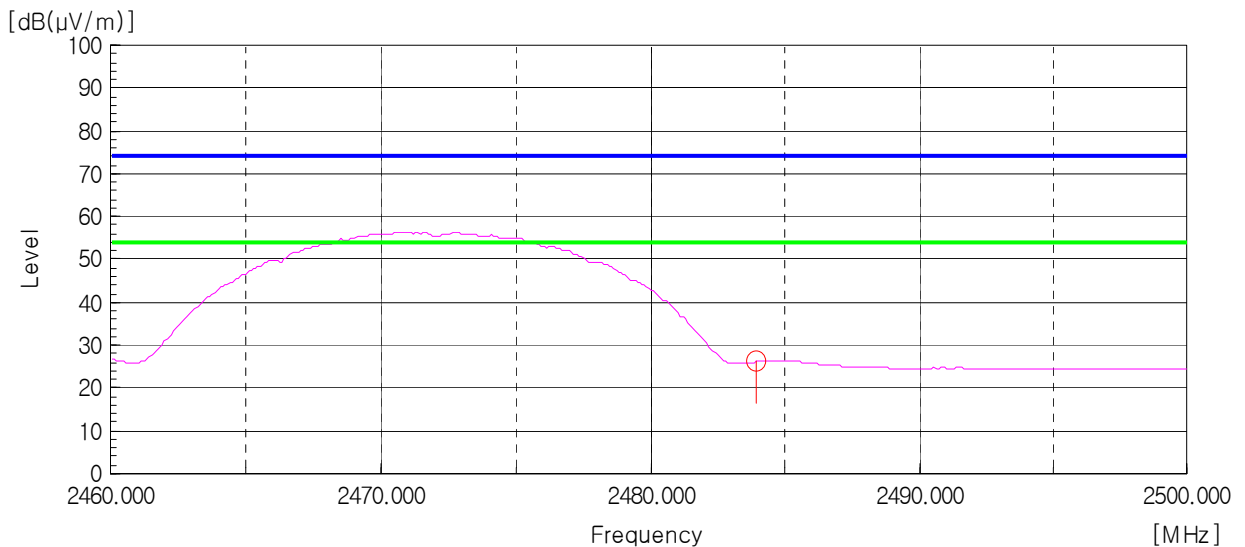

Plots of Bandwidth of Frequency Band Edges (802.11g)


Conducted

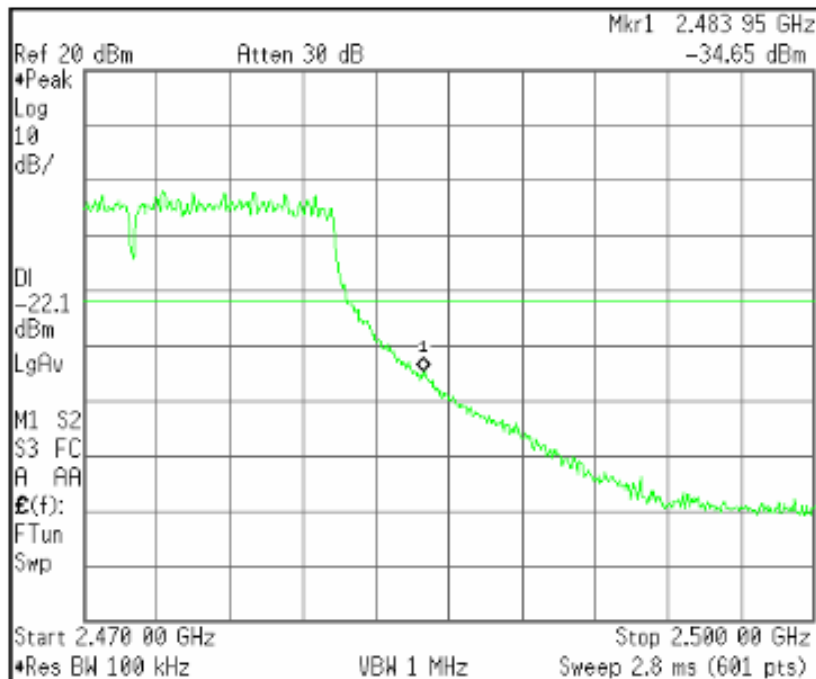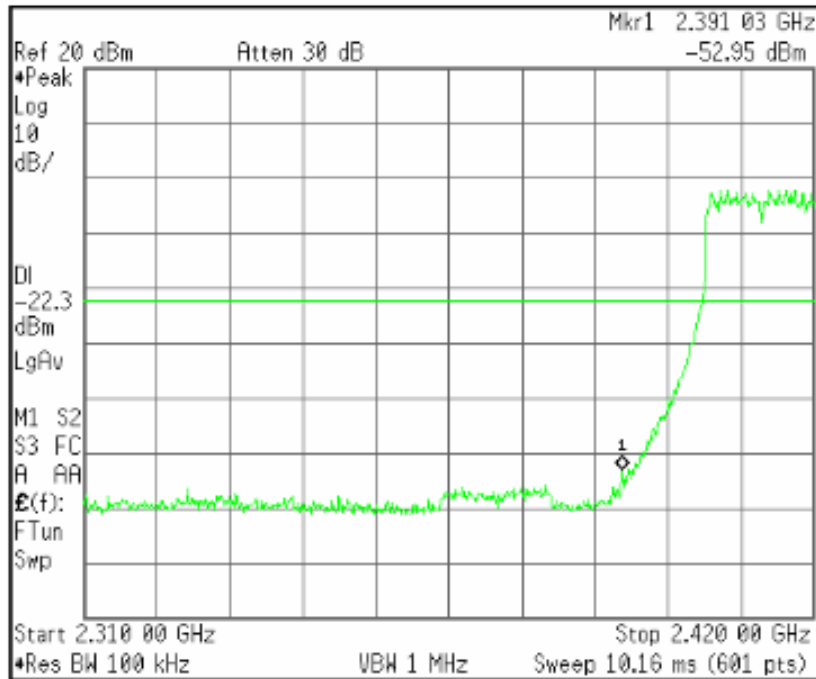

Radiated


Peak Detector: RBW: 1 MHz, VBW: 1 MHz (2 310 MHz - 2 390 MHz), Worst case (Low, Horizontal)

— Peak Limit Line
— AV Limit Line

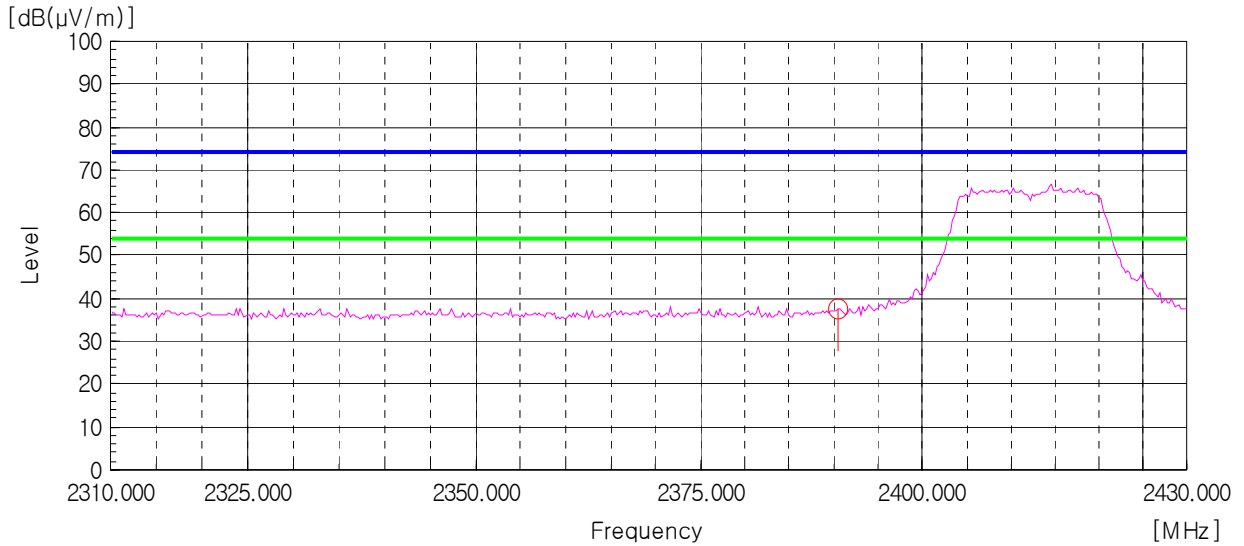


AV Detector: RBW: 1 MHz, VBW: 10 Hz (2 310 MHz - 2 390 MHz), Worst case (Low, Horizontal)

— Peak Limit Line
— AV Limit Line

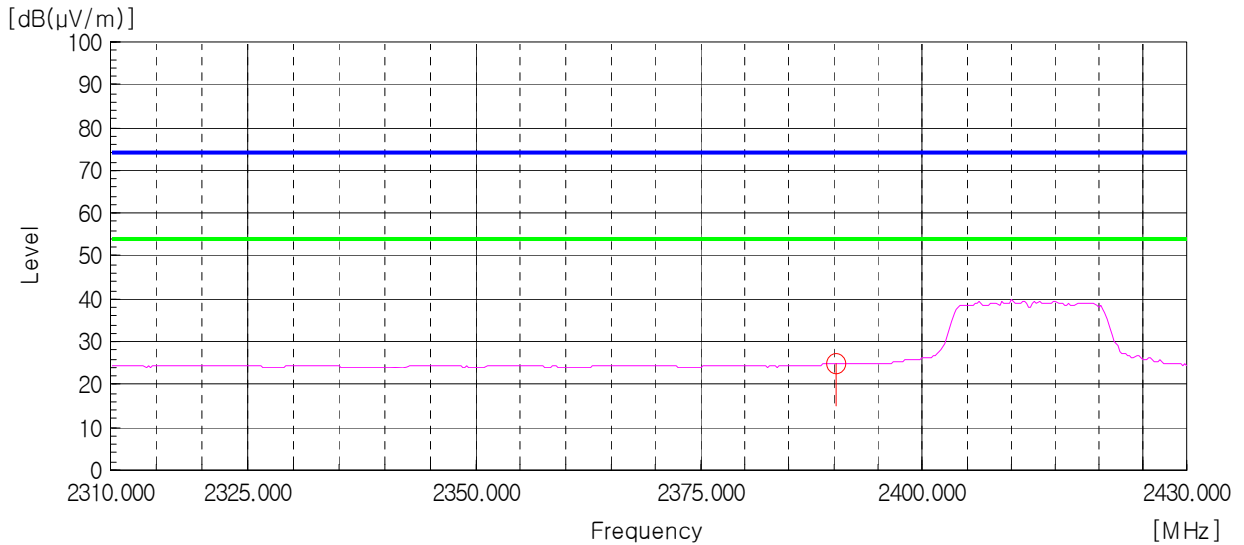


Peak Detector: RBW: 1 MHz, VBW: 1 MHz (2 483.5 MHz - 2 500 MHz), Worst case (High, Horizontal)

— Peak Limit Line
— AV Limit Line

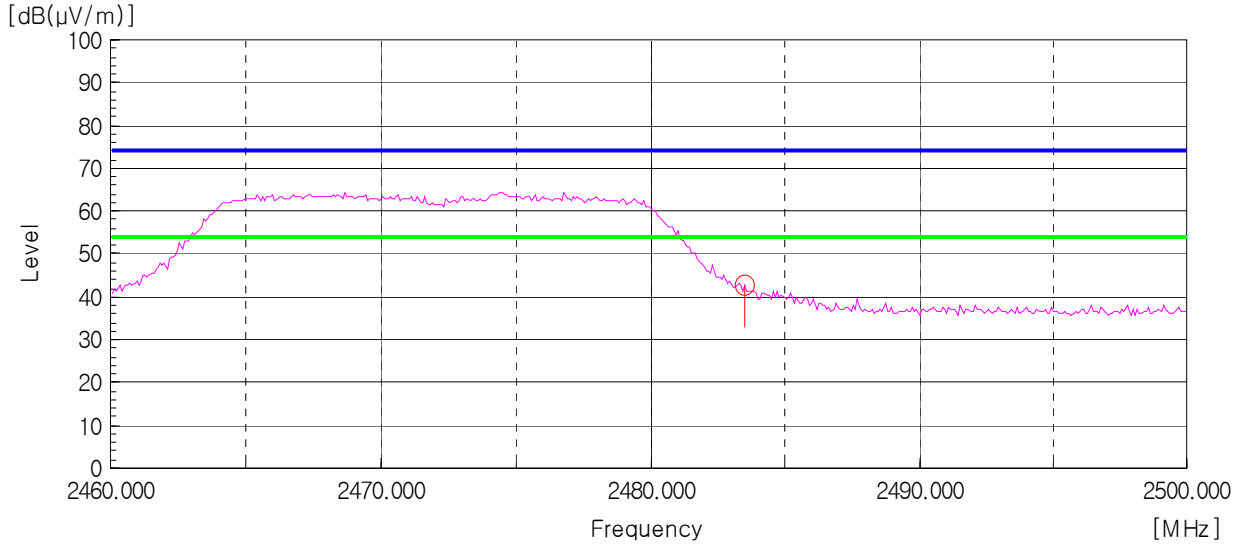

AV Detector: RBW: 1 MHz, VBW: 10 Hz (2 483.5 MHz - 2 500 MHz), Worst case (High, Horizontal)


— Peak Limit Line
— AV Limit Line

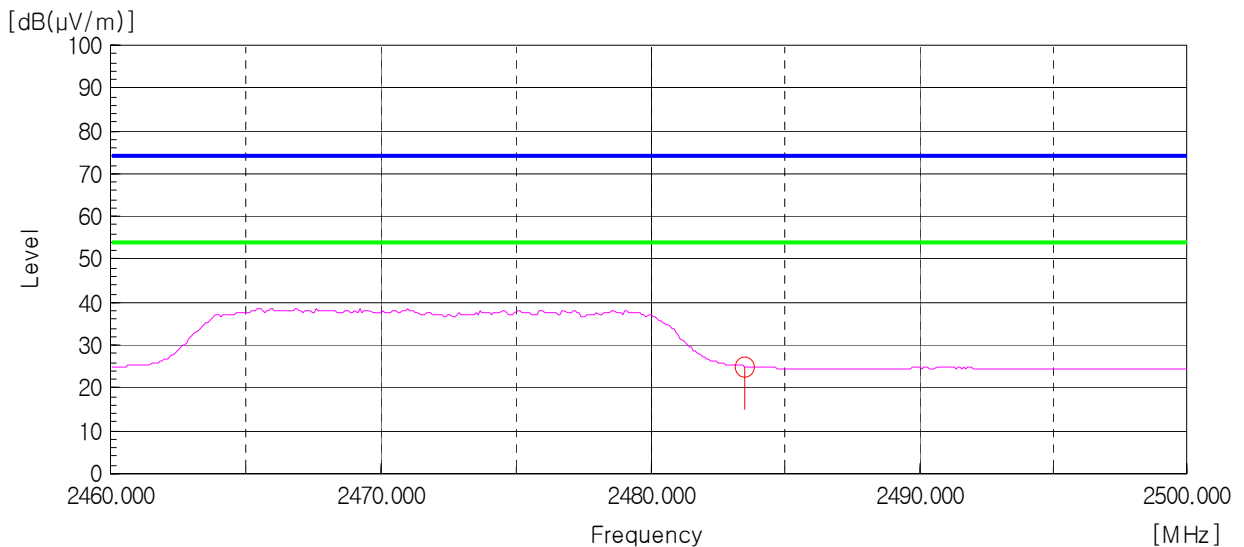

Radiated


Peak Detector: RBW: 1 MHz, VBW: 1 MHz (2 310 MHz - 2 390 MHz), Worst case (Low, Horizontal)

— Peak Limit Line
— AV Limit Line

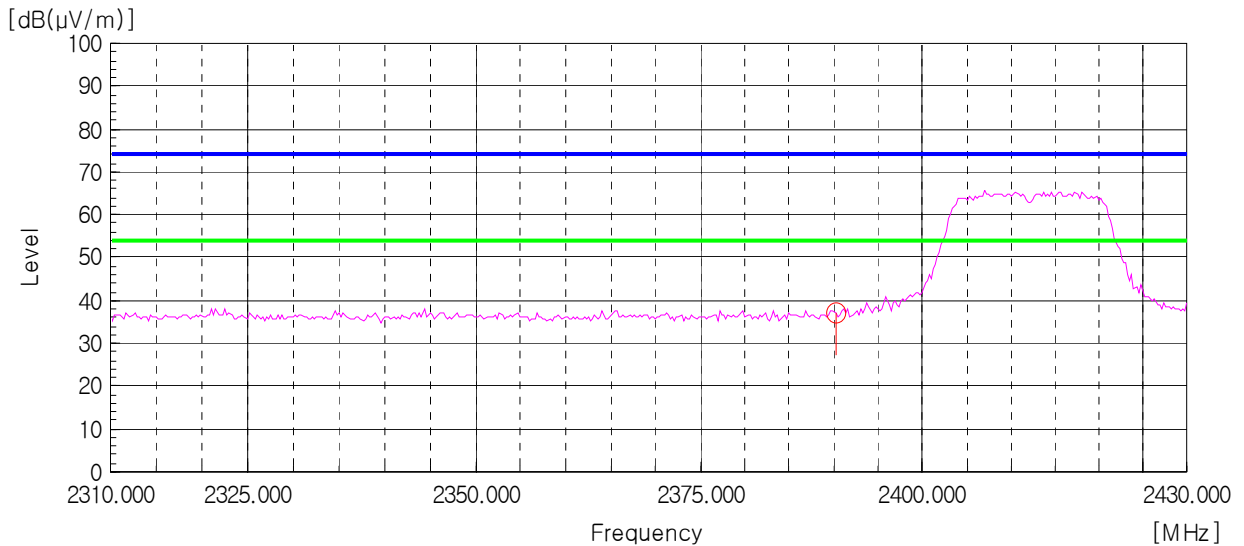


AV Detector: RBW: 1 MHz, VBW: 10 Hz (2 310 MHz - 2 390 MHz), Worst case (Low, Horizontal)

— Peak Limit Line
— AV Limit Line

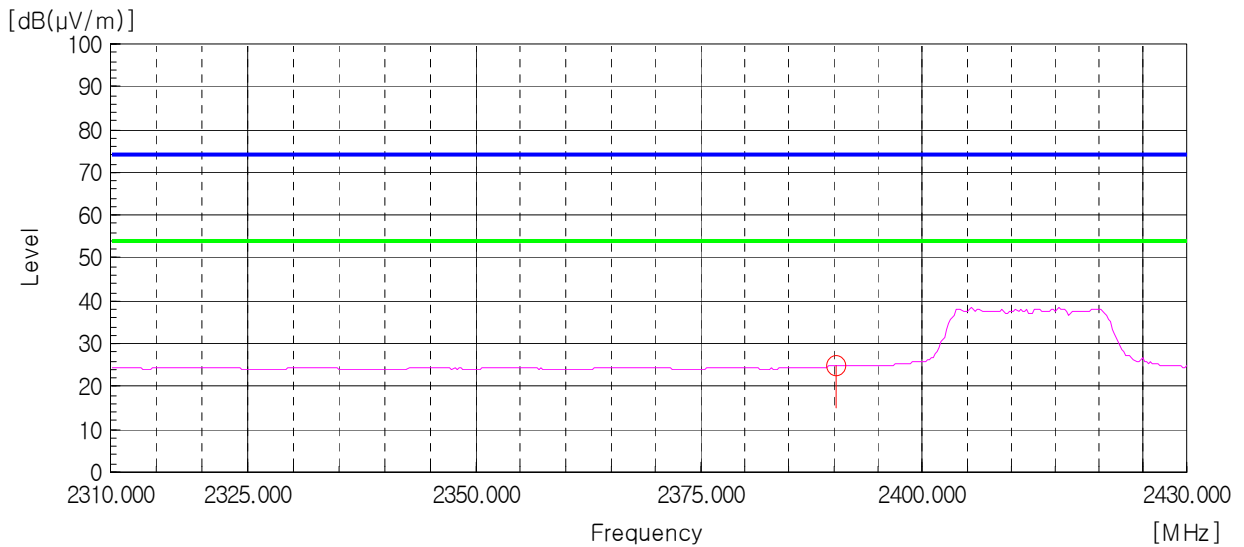


Peak Detector: RBW: 1 MHz, VBW: 1 MHz (2 483.5 MHz - 2 500 MHz), Worst case (High, Horizontal)

— Peak Limit Line
— AV Limit Line

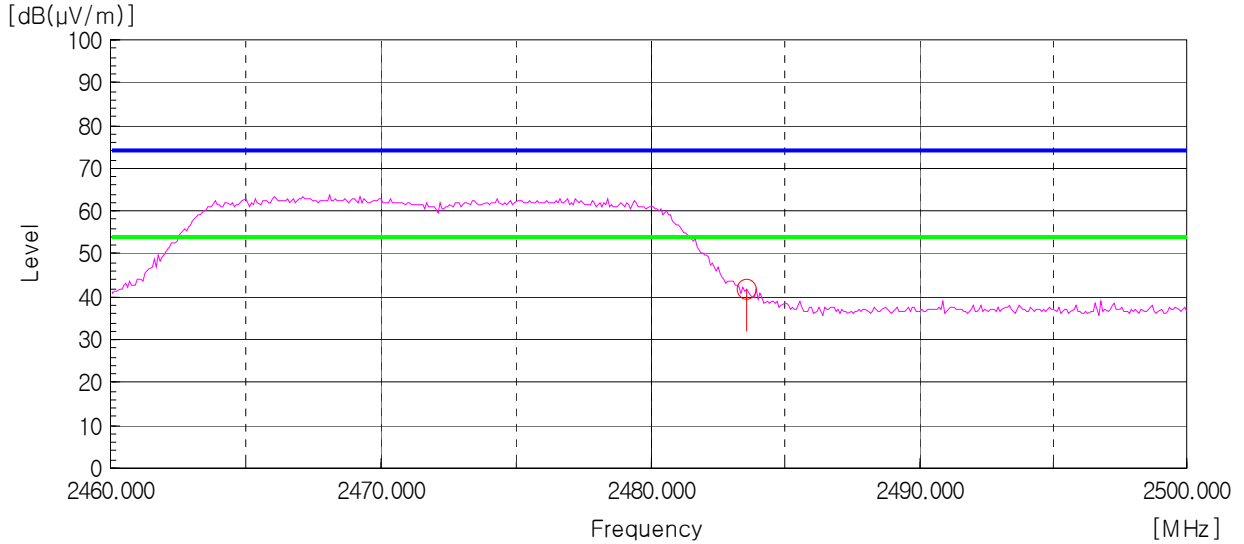



AV Detector: RBW: 1 MHz, VBW: 10 Hz (2 483.5 MHz - 2 500 MHz), Worst case (High, Horizontal)

— Peak Limit Line
— AV Limit Line

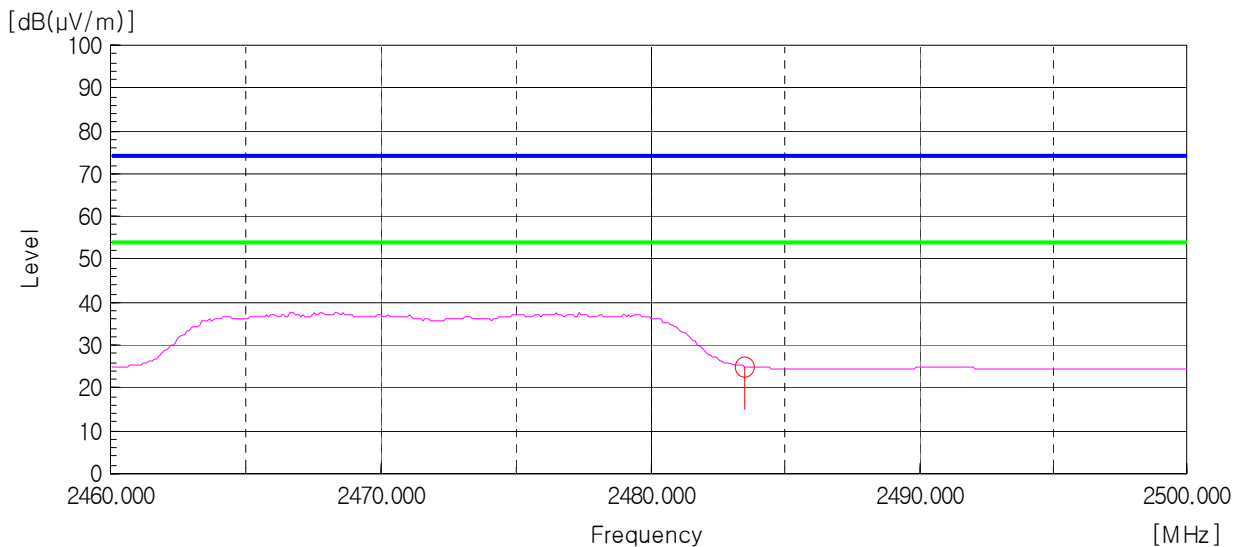

Plots of Bandwidth of Frequency Band Edges (802.11n(HT40))


Conducted

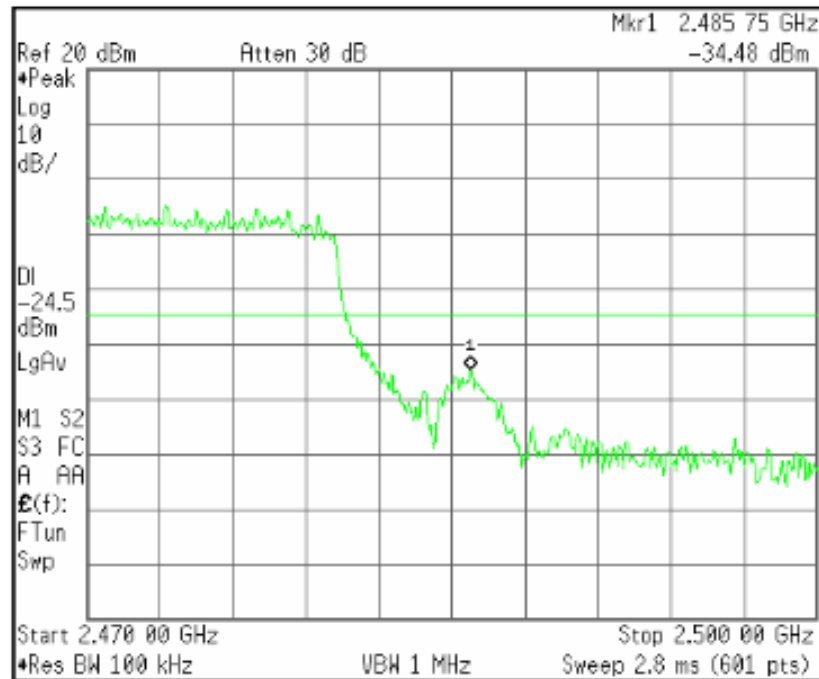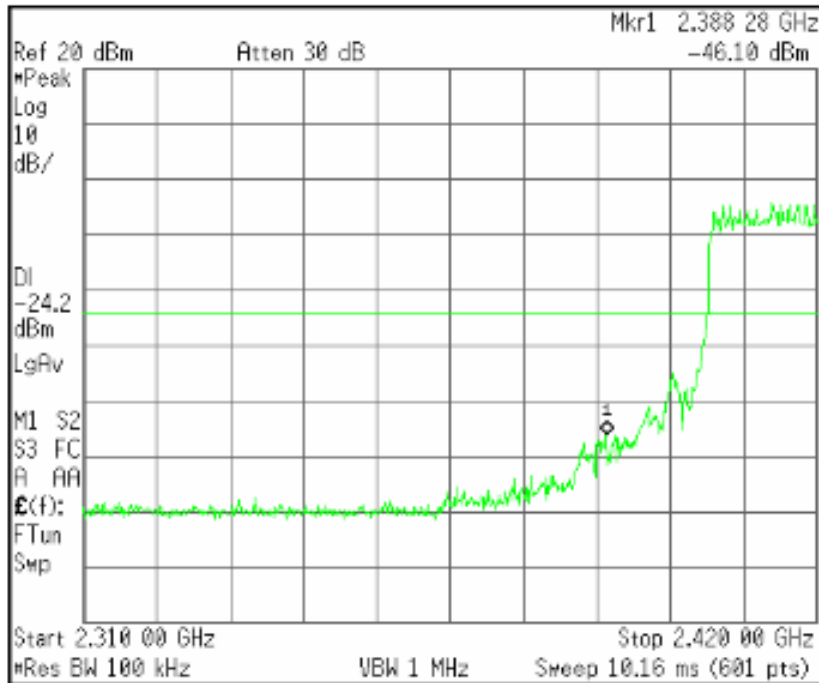

Radiated


Peak Detector: RBW: 1 MHz, VBW: 1 MHz (2 310 MHz - 2 390 MHz), Worst case (Low, Horizontal)

— Peak Limit Line
— AV Limit Line

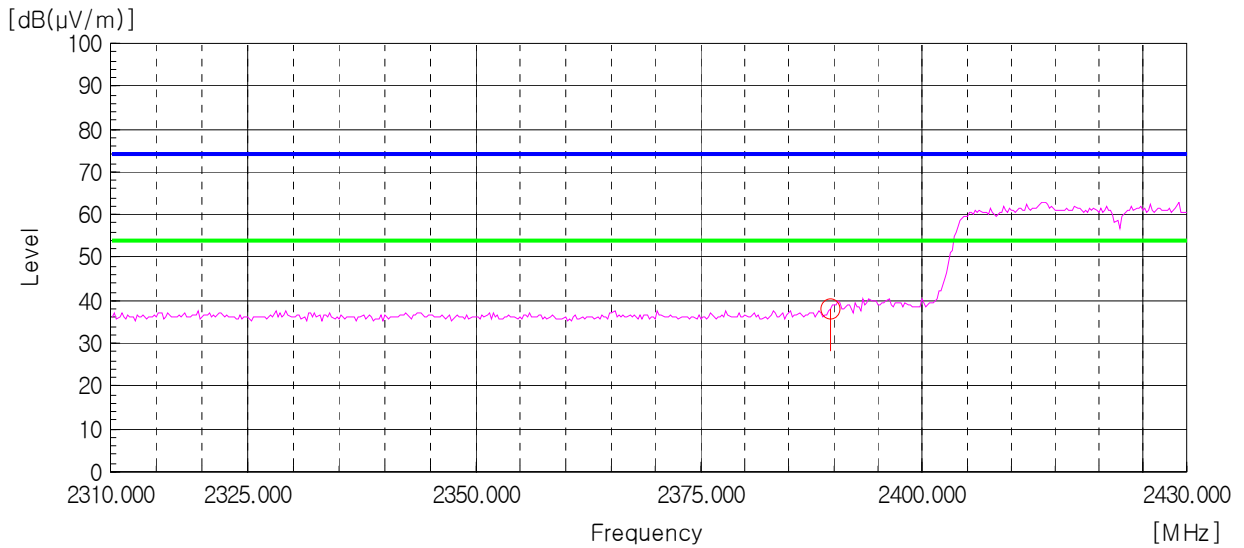


AV Detector: RBW: 1 MHz, VBW: 10 Hz (2 310 MHz - 2 390 MHz), Worst case (Low, Horizontal)

— Peak Limit Line
— AV Limit Line

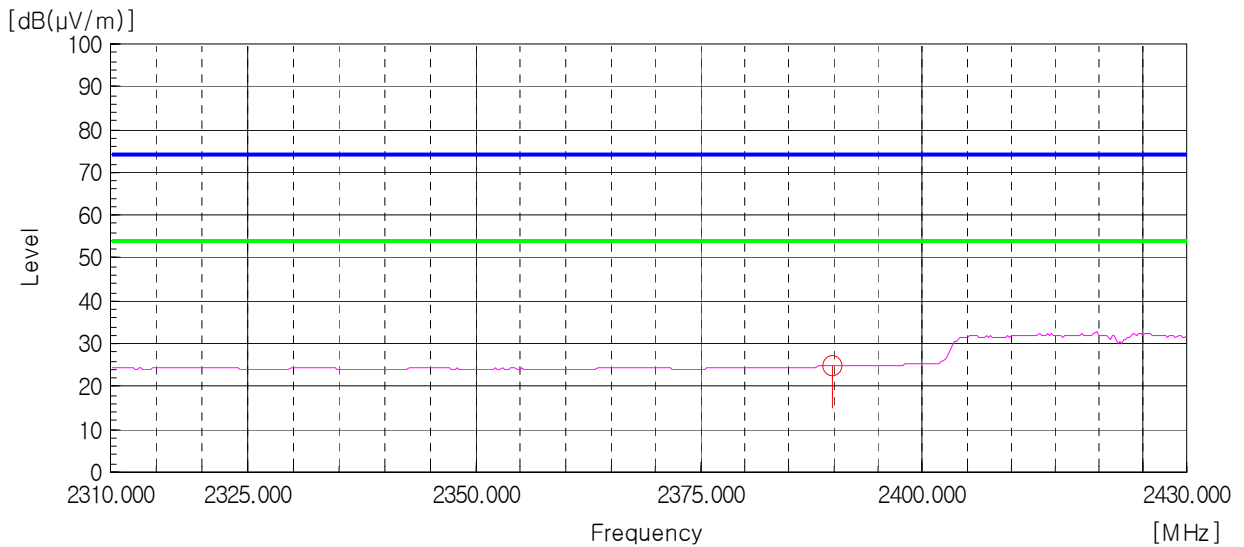


Peak Detector: RBW: 1 MHz, VBW: 1 MHz (2 483.5 MHz - 2 500 MHz), Worst case (High, Horizontal)

— Peak Limit Line
— AV Limit Line

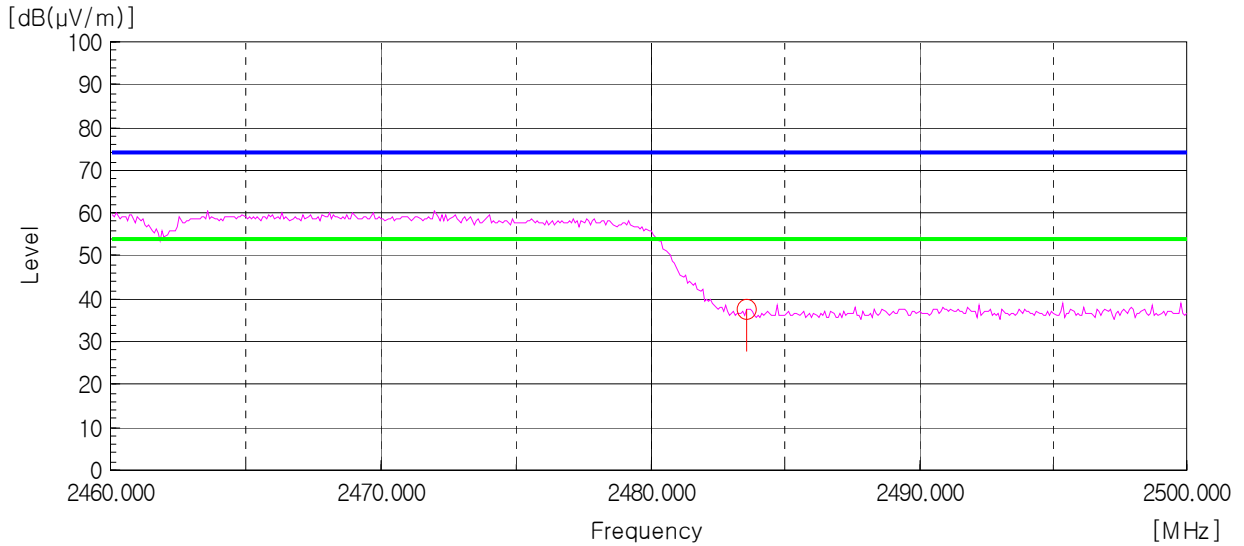

AV Detector: RBW: 1 MHz, VBW: 10 Hz (2 483.5 MHz - 2 500 MHz), Worst case (High, Horizontal)

— Peak Limit Line
— AV Limit Line

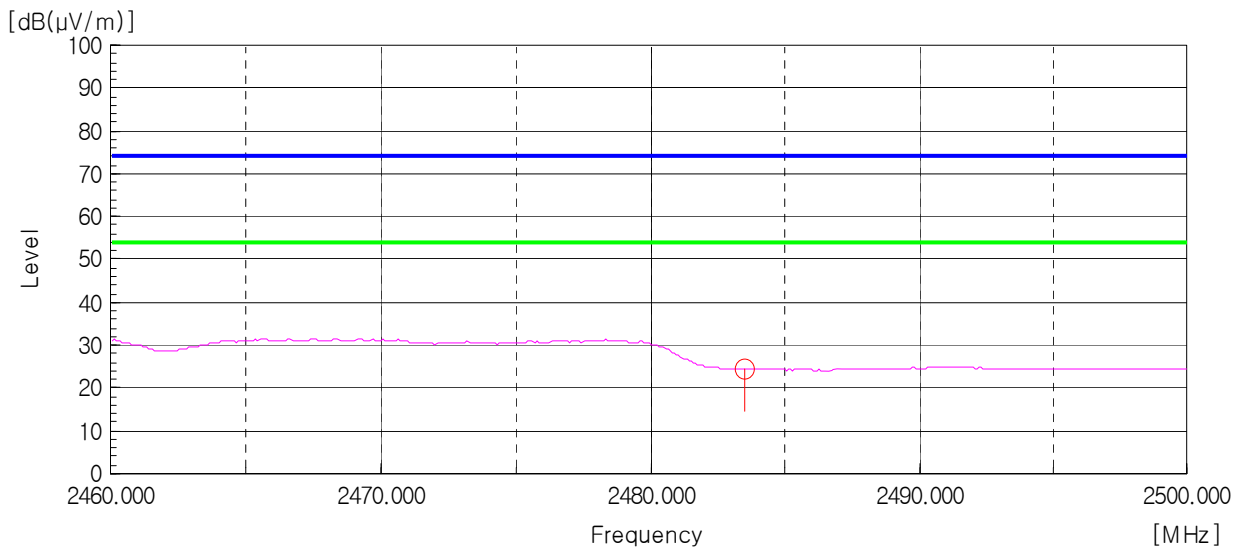

5.5 Power Spectral Density

EUT	Car Dashcam / DR750LW-2CH
Limit apply to	FCC Part 15.247(e)
Test Date	August 05, 2014
Environmental of Test	(23.1 ± 0.1) °C, (47 ± 0) % R.H., (100.1 ± 0.0) kPa
Operating Condition	RF transmitting continuously during the tested.
Result	Passed

Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.


Test Data

Mode	Frequency [MHz]	PSD [dBm]	Limit
802.11b	2 412	4.51	8.00 dBm
	2 442	4.07	
	2 472	3.83	
802.11g	2 412	-1.89	
	2 442	-2.16	
	2 472	-2.46	
802.11n(HT20)	2 412	-1.81	
	2 442	-1.93	
	2 472	-1.97	
802.11n(HT40)	2 422	-4.34	
	2 442	-4.44	
	2 462	-4.63	

NOTES:


1. This test was applied both to DC 12 V and DC 24 V. (Worst case: DC 24 V)
2. Measure power spectral density of relevant channel using spectrum analyzer.
3. RBW 100 kHz, VBW 300 kHz, span 1 MHz, Sweep time (= span / 3 kHz).
4. Please see the measured plot in next page.

[2 472 MHz]

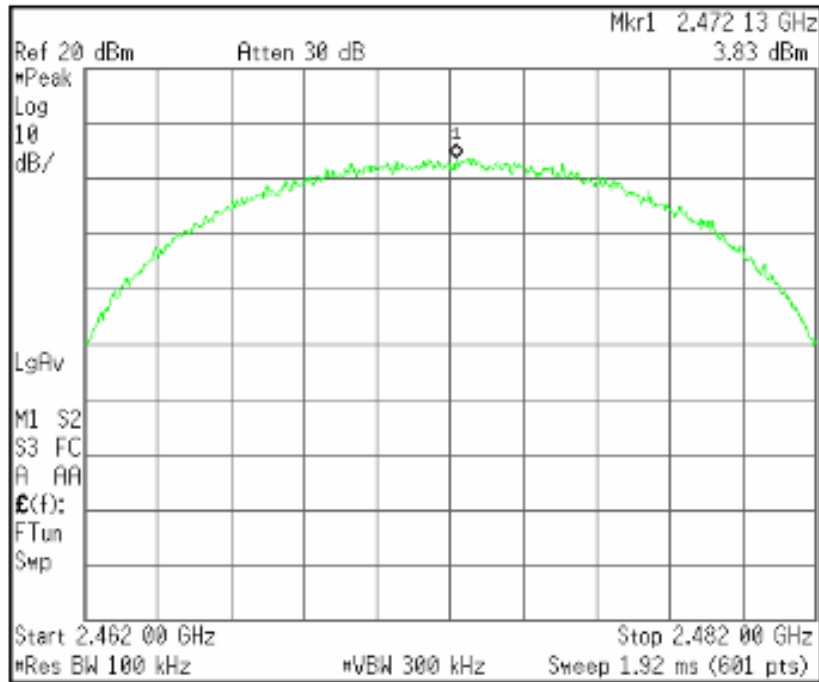


Plots of Power Spectral Density (802.11g)


[2 412 MHz]

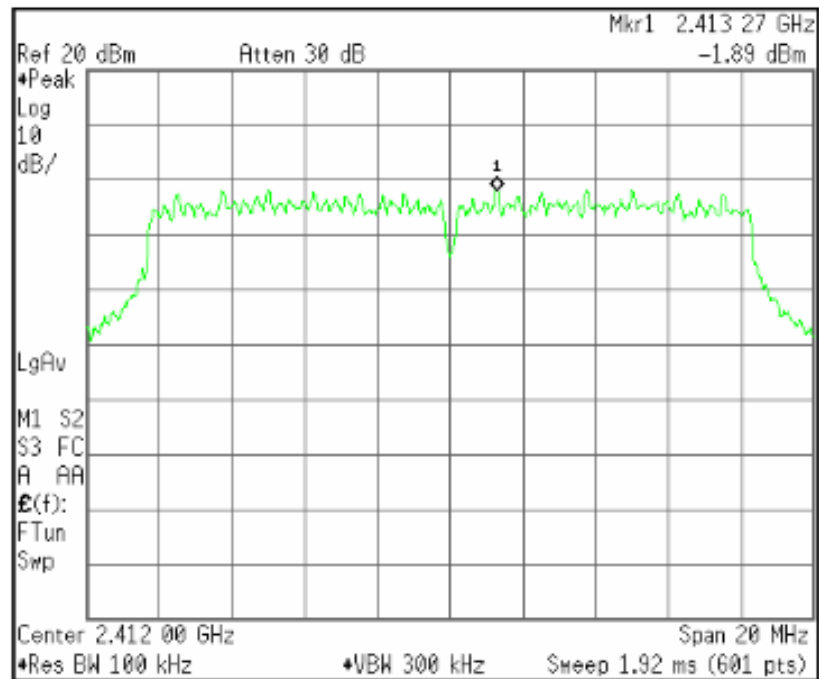

[2 442 MHz]

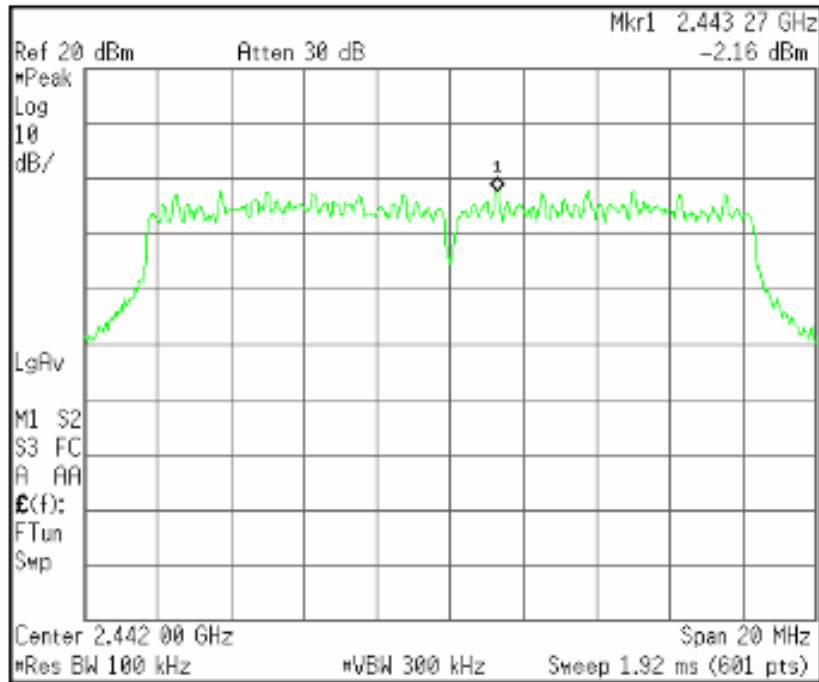


[2 472 MHz]

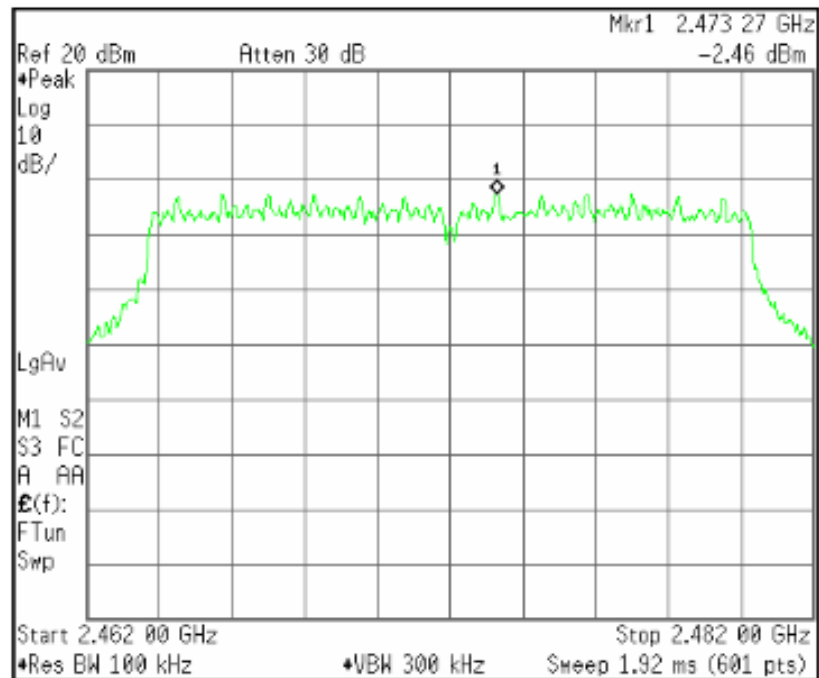


Plots of Power Spectral Density (802.11n(HT20))


[2 412 MHz]

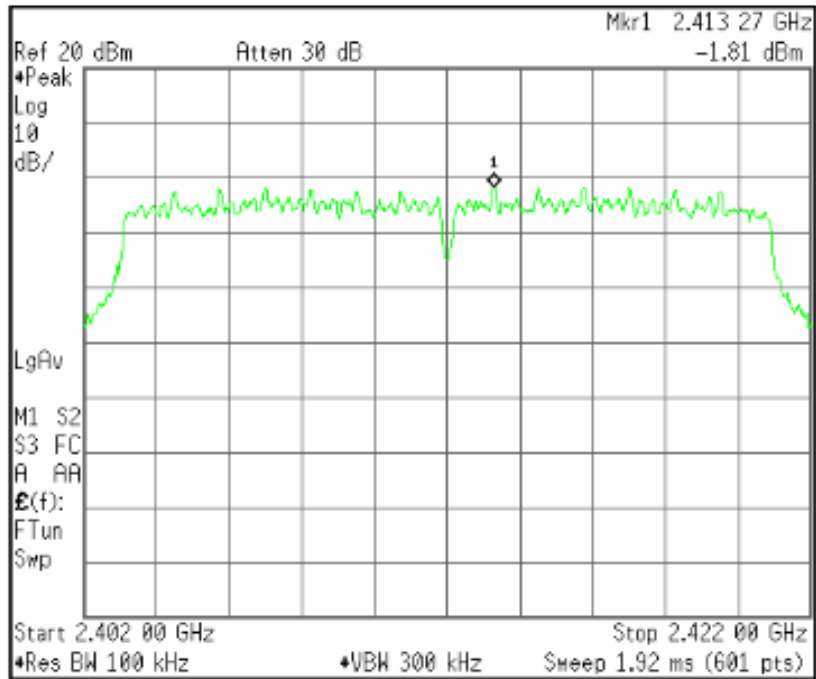

[2 442 MHz]

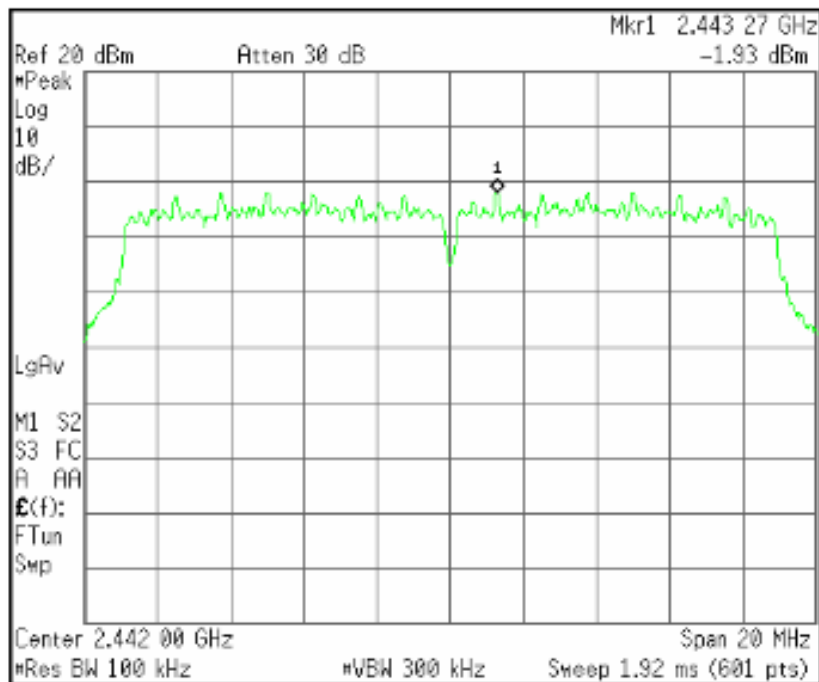


[2 472 MHz]

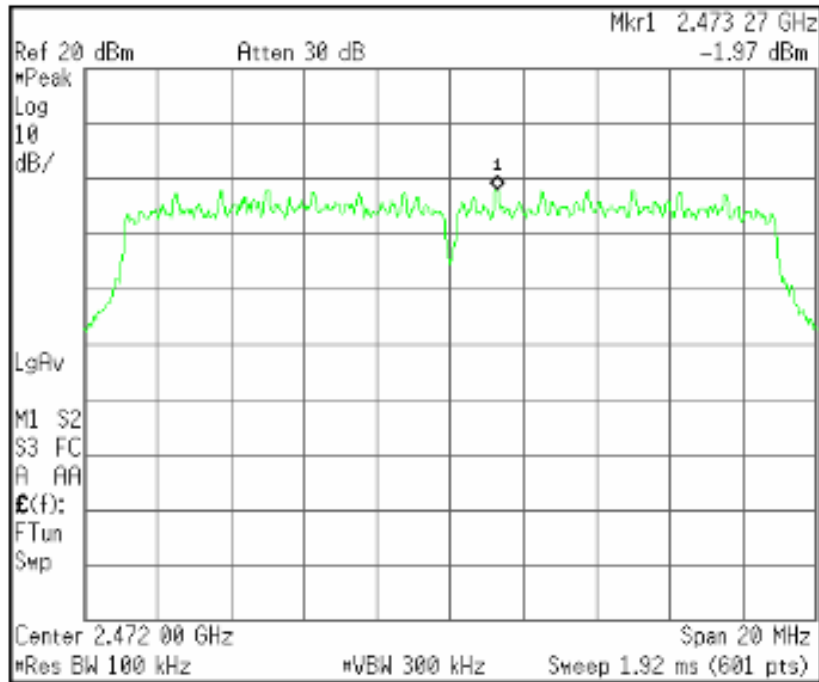


Plots of Power Spectral Density (802.11n(HT40))


[2 422 MHz]

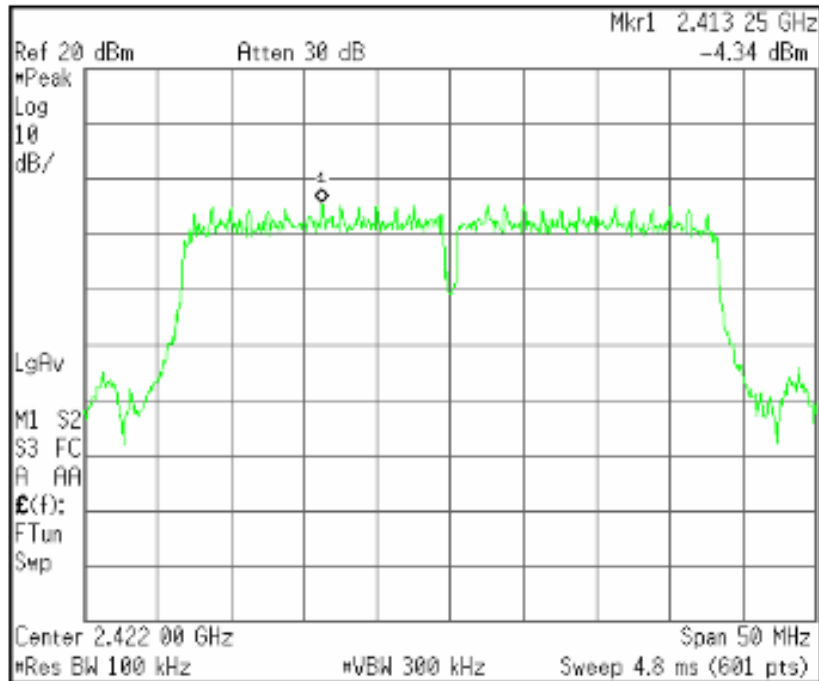

[2 442 MHz]

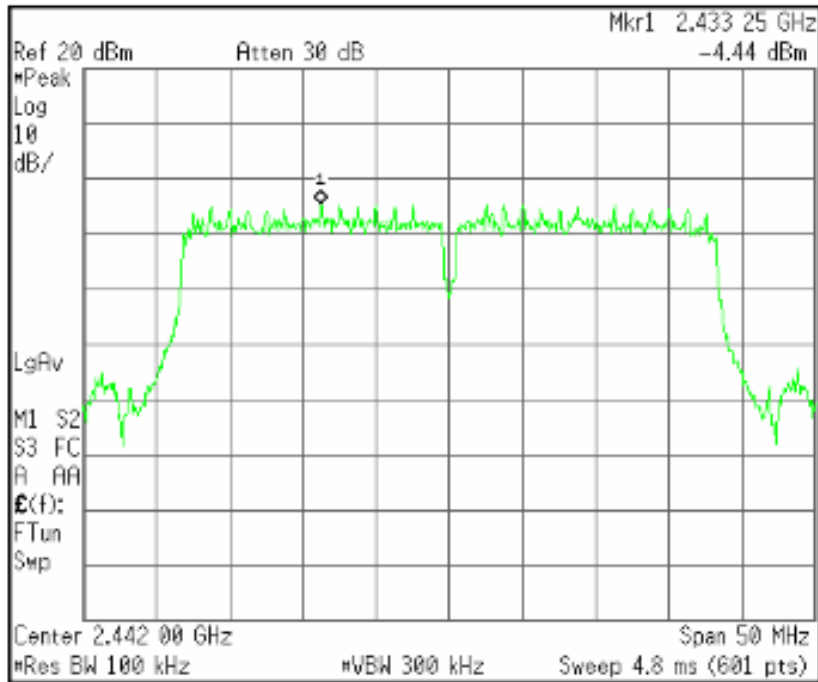

[2 462 MHz]

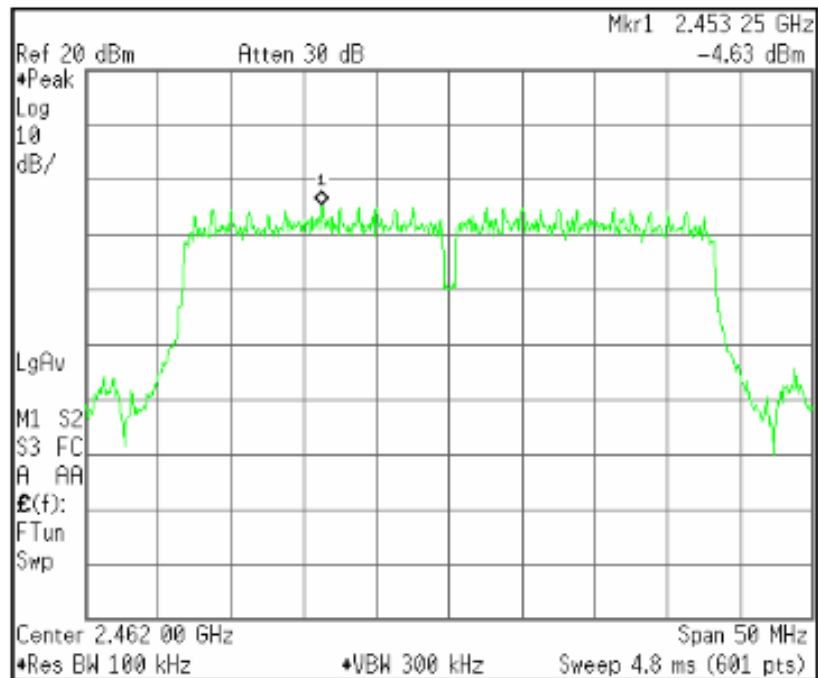

5.6 Spurious Emissions

EUT	Car Dashcam / DR750LW-2CH
Limit apply to	FCC Part 15.209
Test Date	July 28, 2014 to August 06, 2014
Environmental of Test	(26.2 ± 3.8) °C, (60 ± 13) % R.H., (100.6 ± 0.3) kPa
Operating Condition	Low CH, Middle CH, High CH Transmission
Result	Passed

Limit

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequencies [MHz]	Field Strength [μ V/m]	Measurement Distance [m]
0.009 - 0.490	2 400/F(kHz)	300
0.490 - 1.705	24 000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 MHz - 72 MHz, 76 MHz - 88 MHz, 174 MHz - 216 MHz or 470 MHz - 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

Test Results

- Refer to see the measured plot in next page.

Radiated Emissions Test data

- 9 kHz to 30 MHz

Test Date	July 28, 2014
Environmental of Test	(28.4 ± 0.4) °C, (68 ± 4) % R.H., (100.8 ± 0.1) kPa

- 802.11b, 802.11g, 802.11n(HT20) and 802.11n(HT40) mode

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.
 Detector mode: CISPR Quasi-Peak mode (100 Hz, 9 kHz)

Frequency [MHz]	Reading [dB(μV)]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
	Emission attenuated more than 20 dB below the limit are not reported.						

Result: All emissions below noise floor of 20 dB(μV/m).

NOTES:

1. This test was applied both to DC 12 V and DC 24 V.
2. * H : Horizontal polarization , ** V : Vertical polarization
3. Result = Reading + Antenna factor + Cable loss
4. Margin = Limit - Result
5. The measurement was performed for the frequency range 9 kHz to 30 MHz according to FCC Part 15.209.

- Below 1 GHz (30 MHz to 1 GHz)

Test Date	July 28, 2014
Environmental of Test	(29.3 ± 0.6) °C, (65 ± 2) % R.H., (100.8 ± 0.0) kPa


- 802.11b mode

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.
 Detector mode: CISPR Quasi-Peak mode (6 dB Bandwidth: 120 kHz)

Frequency [MHz]	Reading [dB(μV)]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB(μV)]	Height [cm]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
160.21	17.95	H	12.41	1.64	186	32.00	43.50	11.50
321.21	18.60	H	13.64	2.26	377	34.50	46.00	11.50
400.74	24.13	V	15.63	2.54	152	42.30	46.00	3.70

NOTES:

1. This test was applied both to DC 12 V and DC 24 V. (Worst case: DC 24 V)
2. * H : Horizontal polarization , ** V : Vertical polarization
3. Result = Reading + Antenna factor + Cable loss
4. Margin value = Limit - Result
5. The measurement was performed for the frequency range above 30 MHz according to FCC Part 15.209.

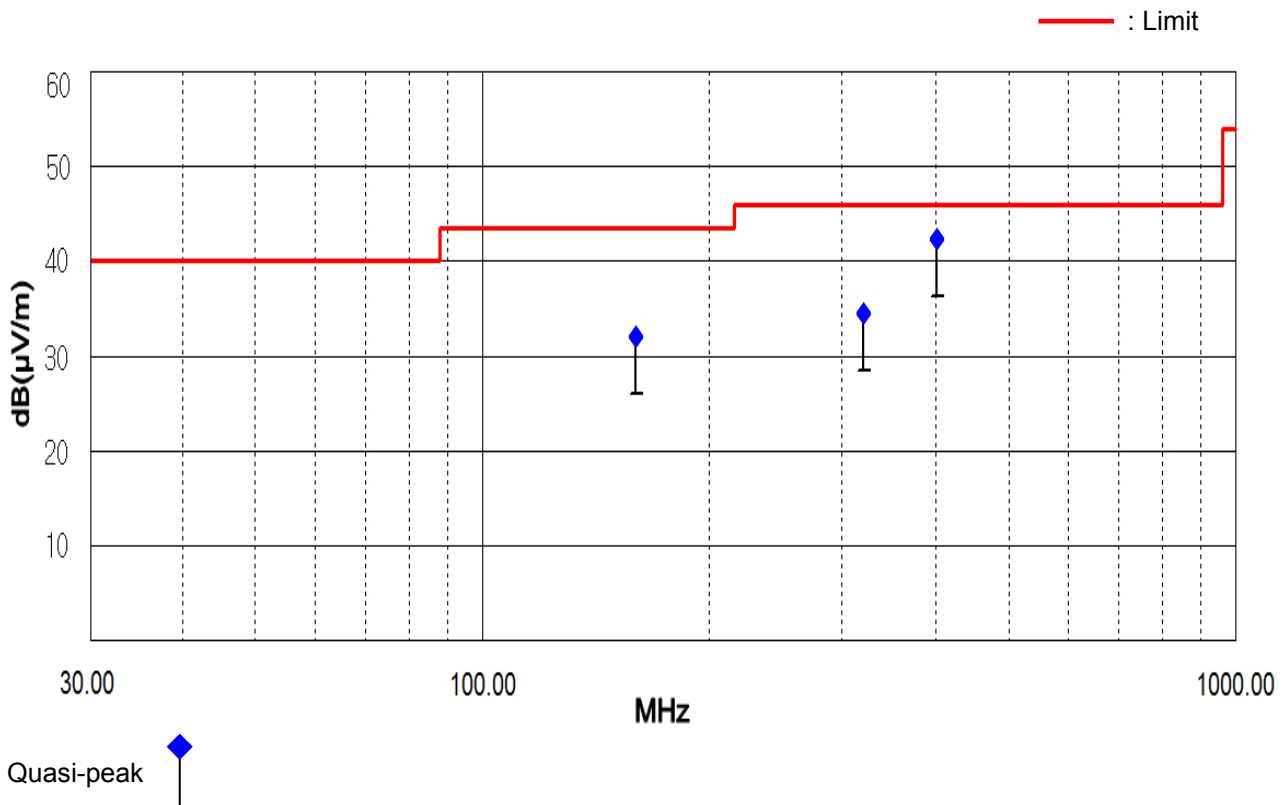


- 802.11g mode

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.
 Detector mode: CISPR Quasi-Peak mode (6 dB Bandwidth: 120 kHz)

Frequency [MHz]	Reading [dB(μV)]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB(μV)]	Height [cm]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
160.51	18.07	H	12.39	1.64	187	32.10	43.50	11.40
321.27	18.70	H	13.64	2.26	375	34.60	46.00	11.40
400.74	24.33	V	15.63	2.54	150	42.50	46.00	3.50

NOTES:

1. This test was applied both to DC 12 V and DC 24 V. (Worst case: DC 24 V)
2. * H : Horizontal polarization , ** V : Vertical polarization
3. Result = Reading + Antenna factor + Cable loss
4. Margin value = Limit - Result
5. The measurement was performed for the frequency range above 30 MHz according to FCC Part 15.209.

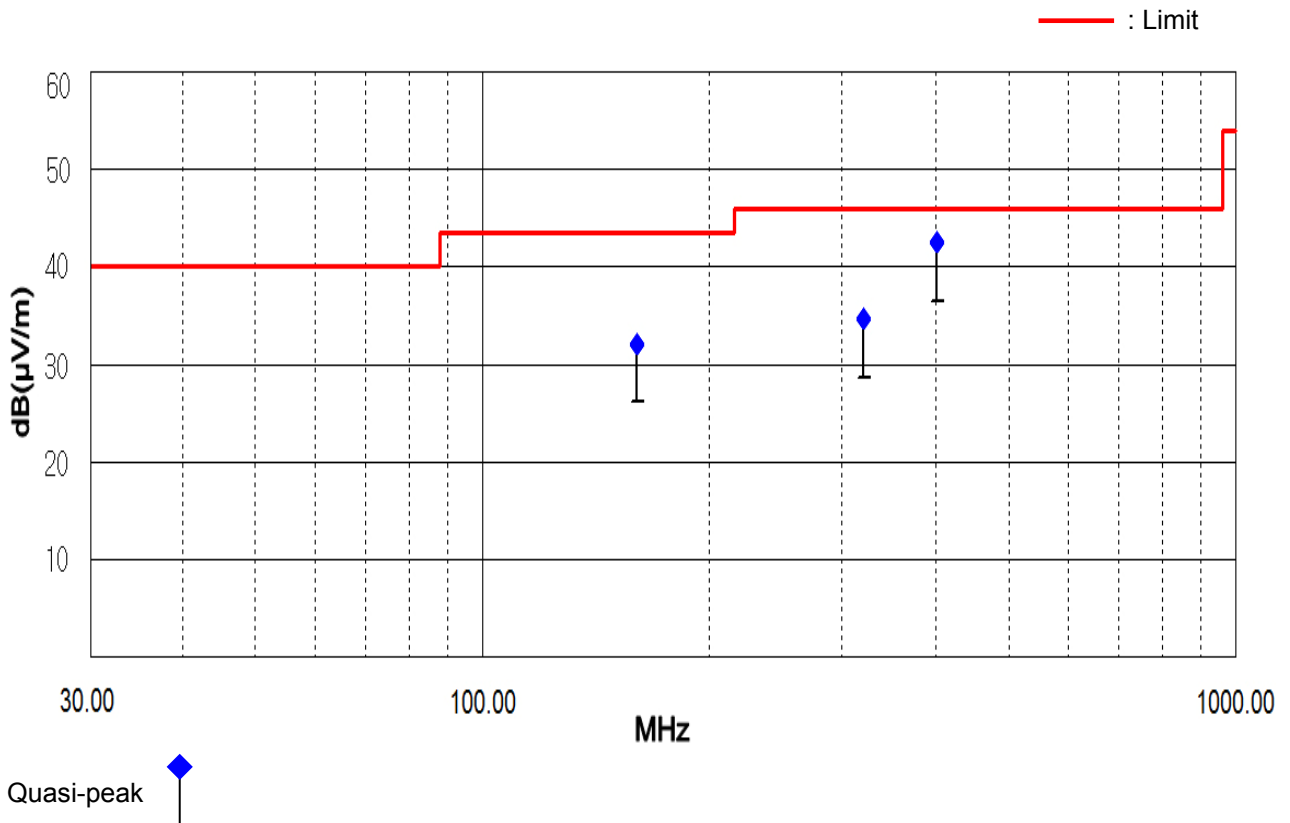


- 802.11n(HT20) mode

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.
 Detector mode: CISPR Quasi-Peak mode (6 dB Bandwidth: 120 kHz)

Frequency [MHz]	Reading [dB(μV)]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB(μV)]	Height [cm]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
160.19	18.15	H	12.41	1.64	186	32.20	43.50	11.30
320.22	18.63	H	13.62	2.25	375	34.50	46.00	11.50
400.74	24.43	V	15.63	2.54	153	42.60	46.00	3.40

NOTES:

1. This test was applied both to DC 12 V and DC 24 V. (Worst case: DC 24 V)
2. This test was applied both to 802.11n(HT20) and 802.11n(HT40). (Worst case: 802.11n(HT20))
3. * H : Horizontal polarization , ** V : Vertical polarization
4. Result = Reading + Antenna factor + Cable loss
5. Margin value = Limit - Result
6. The measurement was performed for the frequency range above 30 MHz according to FCC Part 15.209.

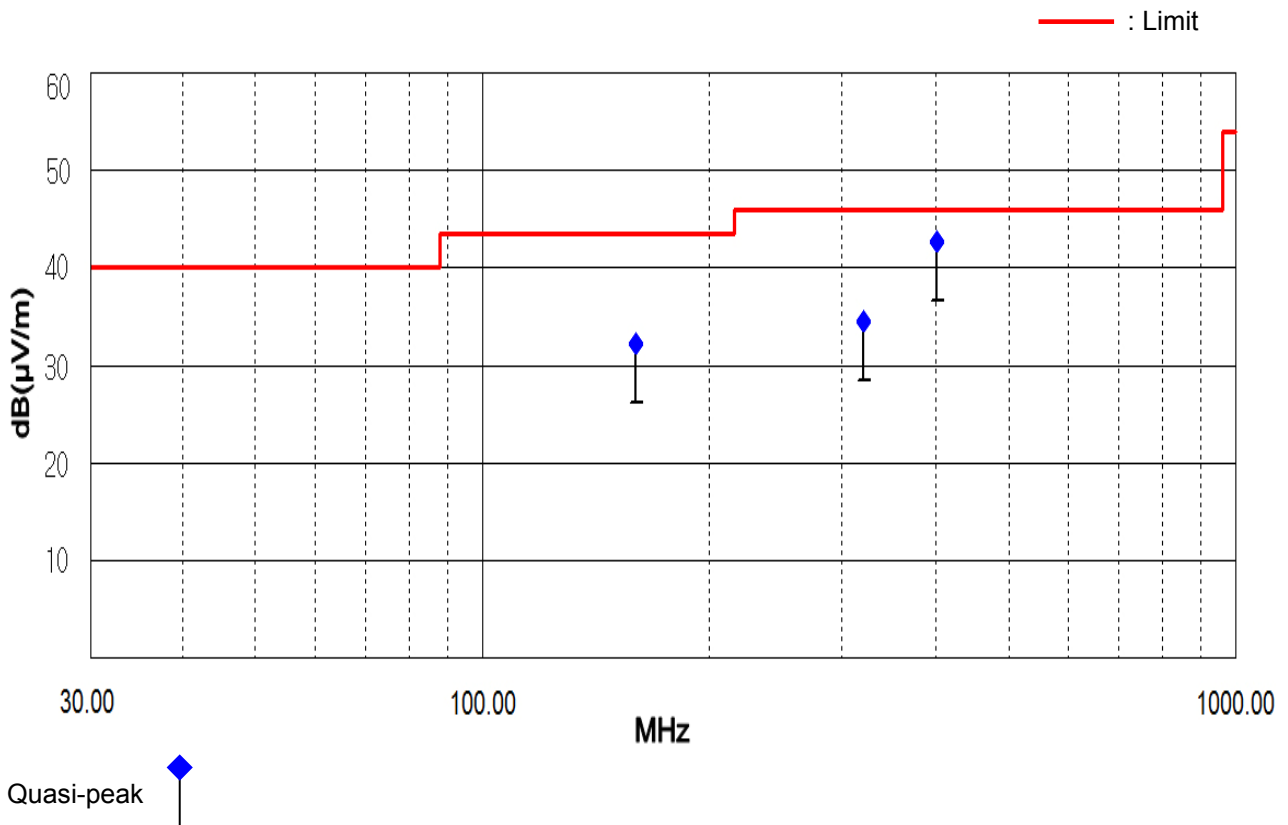

- Above 1 GHz (1 GHz to 25 GHz)

Test Date	August 06, 2014
Environmental of Test	(22.5 ± 0.1) °C, (47 ± 0) % R.H., (100.4 ± 0.1) kPa

- 802.11b mode

1. Low CH

Frequency [MHz]	Reading [dB(μV)]		Polarity (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB]	Result [dB(μV/m)]		Limit [dB(μV/m)]		Margin [dB]	
	Peak	Average				Peak	Average	Peak	Average	Peak	Average
4 824.00	55.07	35.87	H	31.87	-34.65	52.30	33.10	73.97	53.97	21.67	20.87

2. Middle CH

Frequency [MHz]	Reading [dB(μV)]		Polarity (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB]	Result [dB(μV/m)]		Limit [dB(μV/m)]		Margin [dB]	
	Peak	Average				Peak	Average	Peak	Average	Peak	Average
4 884.00	53.47	35.57	H	32.09	-34.66	50.90	33.00	73.97	53.97	23.07	20.97

3. High CH

Frequency [MHz]	Reading [dB(μV)]		Polarity (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB]	Result [dB(μV/m)]		Limit [dB(μV/m)]		Margin [dB]	
	Peak	Average				Peak	Average	Peak	Average	Peak	Average
4 944.00	53.17	35.47	H	32.30	-34.67	50.80	33.10	73.97	53.97	23.17	20.87

Result: No signal detect above second harmonic.

- 802.11g mode

1. Low CH

Frequency [MHz]	Reading [dB(μV)]		Polarity (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB]	Result [dB(μV/m)]		Limit [dB(μV/m)]		Margin [dB]	
	Peak	Average				Peak	Average	Peak	Average	Peak	Average
4 824.00	53.87	34.87	H	31.87	-34.65	51.10	32.10	73.97	53.97	22.87	21.87

2. Middle CH

Frequency [MHz]	Reading [dB(μV)]		Polarity (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB]	Result [dB(μV/m)]		Limit [dB(μV/m)]		Margin [dB]	
	Peak	Average				Peak	Average	Peak	Average	Peak	Average
4 884.00	51.47	33.07	H	32.09	-34.66	48.90	30.50	73.97	53.97	25.07	23.47

3. High CH

Frequency [MHz]	Reading [dB(μV)]		Polarity (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB]	Result [dB(μV/m)]		Limit [dB(μV/m)]		Margin [dB]	
	Peak	Average				Peak	Average	Peak	Average	Peak	Average
4 944.00	51.27	32.97	H	32.30	-34.67	48.90	30.60	73.97	53.97	25.07	23.37

Result: No signal detect above second harmonic.

- 802.11n(HT20) mode

1. Low CH

Frequency [MHz]	Reading [dB(μV)]		Polarity (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB]	Result [dB(μV/m)]		Limit [dB(μV/m)]		Margin [dB]	
	Peak	Average				Peak	Average	Peak	Average	Peak	Average
4 824.00	53.97	35.17	H	31.87	-34.65	51.20	32.40	73.97	53.97	22.77	21.57

2. Middle CH

Frequency [MHz]	Reading [dB(μV)]		Polarity (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB]	Result [dB(μV/m)]		Limit [dB(μV/m)]		Margin [dB]	
	Peak	Average				Peak	Average	Peak	Average	Peak	Average
4 884.00	51.67	34.67	H	32.09	-34.66	49.10	32.10	73.97	53.97	24.87	21.87

3. High CH

Frequency [MHz]	Reading [dB(μV)]		Polarity (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB]	Result [dB(μV/m)]		Limit [dB(μV/m)]		Margin [dB]	
	Peak	Average				Peak	Average	Peak	Average	Peak	Average
4 944.00	51.57	34.67	H	32.30	-34.67	49.20	32.30	73.97	53.97	24.77	21.67

Result: No signal detect above second harmonic.

- 802.11n(HT40) mode

1. Low CH

Frequency [MHz]	Reading [dB(μV)]		Polarity (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB]	Result [dB(μV/m)]		Limit [dB(μV/m)]		Margin [dB]	
	Peak	Average				Peak	Average	Peak	Average	Peak	Average
4 842.00	49.01	35.01	H	31.94	-34.65	46.30	32.30	73.97	53.97	27.67	21.67

2. Middle CH

Frequency [MHz]	Reading [dB(μV)]		Polarity (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB]	Result [dB(μV/m)]		Limit [dB(μV/m)]		Margin [dB]	
	Peak	Average				Peak	Average	Peak	Average	Peak	Average
4 884.00	47.77	34.37	H	32.09	-34.66	45.20	31.80	73.97	53.97	28.77	22.17

3. High CH

Frequency [MHz]	Reading [dB(μV)]		Polarity (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB]	Result [dB(μV/m)]		Limit [dB(μV/m)]		Margin [dB]	
	Peak	Average				Peak	Average	Peak	Average	Peak	Average
4 926.00	47.93	33.93	H	32.24	-34.67	45.50	31.50	73.97	53.97	28.47	22.47

Result: No signal detect above second harmonic.

NOTES:



1. This test was applied both to DC 12 V and DC 24 V. (Worst case: DC 24 V)
2. * H : Horizontal polarization , ** V : Vertical polarization
3. Factor = Antenna factor + Cable loss + Preamp
4. Result = Reading + Factor
5. Margin = Limit - Result
6. Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
7. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
8. Spectrum setting:
 - a. Peak Setting 1 GHz to 10th harmonics of fundamental, RBW = 1 MHz, VBW = 1 MHz, Sweep = Auto
 - b. AV Setting 1 GHz to 10th harmonics of fundamental, RBW = 1 MHz, VBW = 10 Hz, Sweep = Auto

Plots of Spurious Emissions (Conducted Measurement)



Test Date	August 06, 2014
Environmental of Test	(23.4 ± 0.0) °C, (48 ± 0) % R.H., (100.4 ± 0.0) kPa

- 802.11b mode



[CH Low]

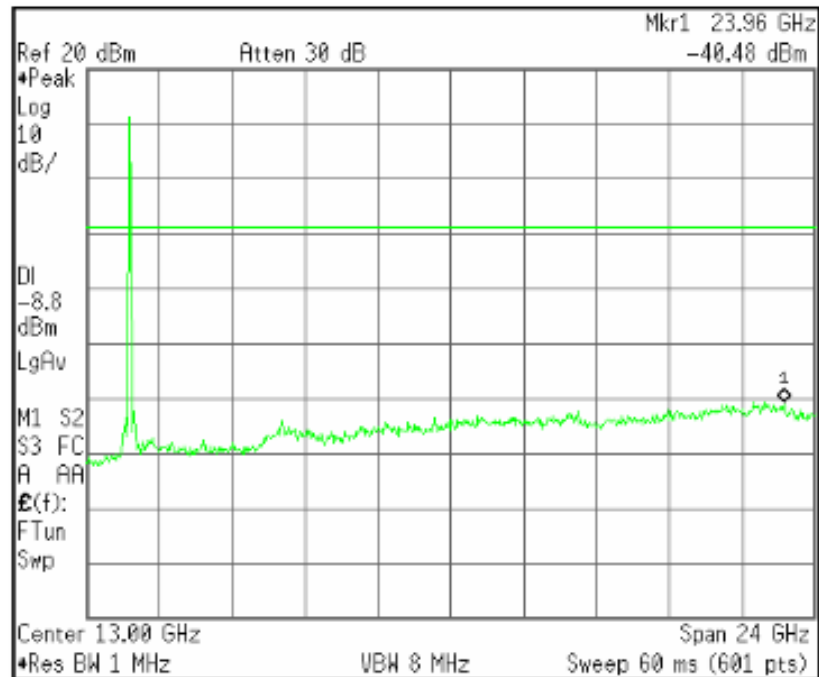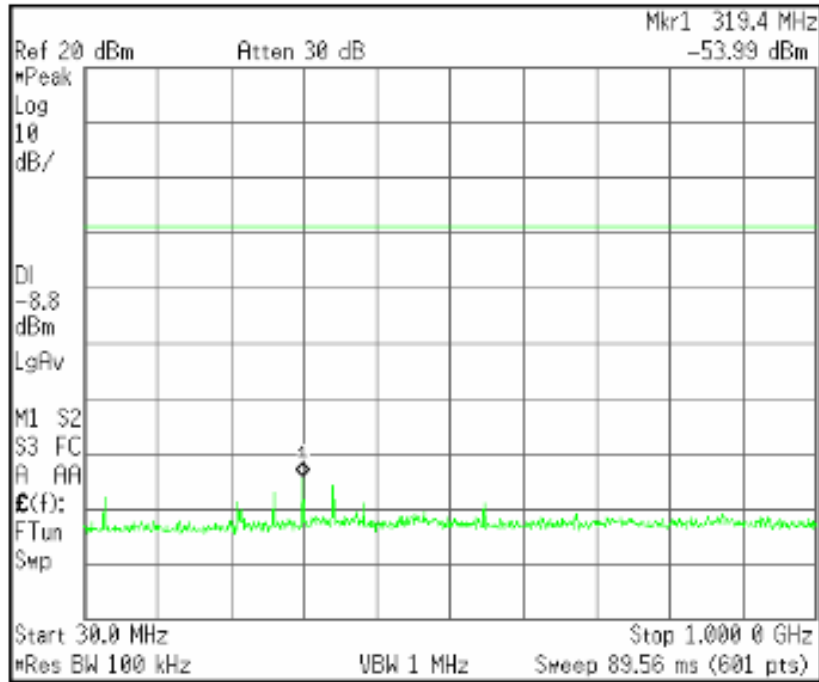

[CH Mid]

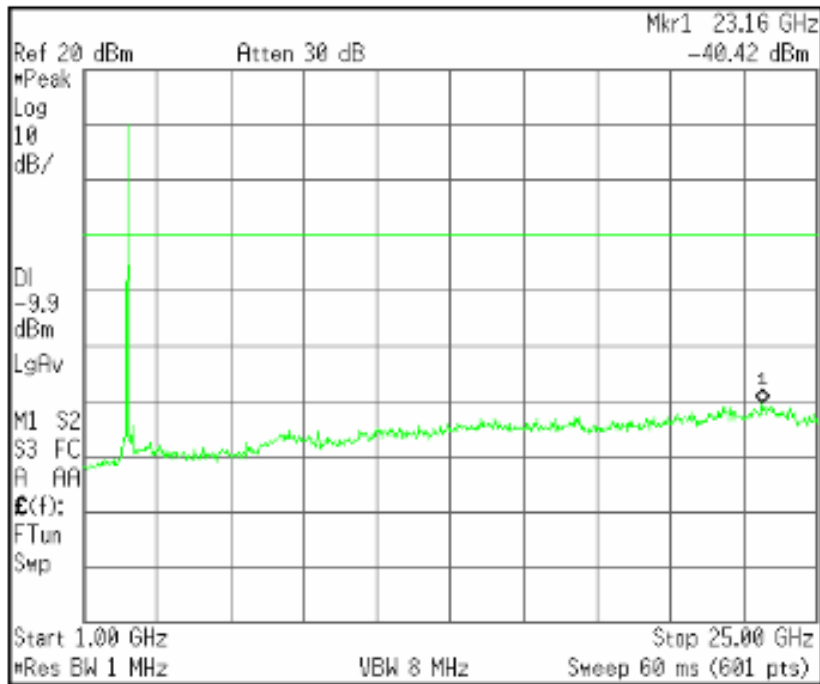
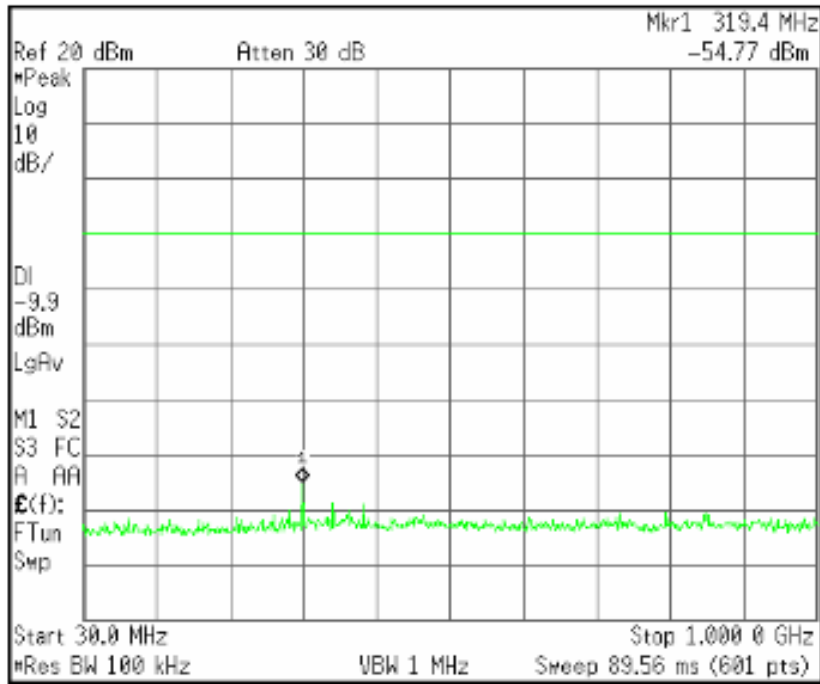


[CH High]

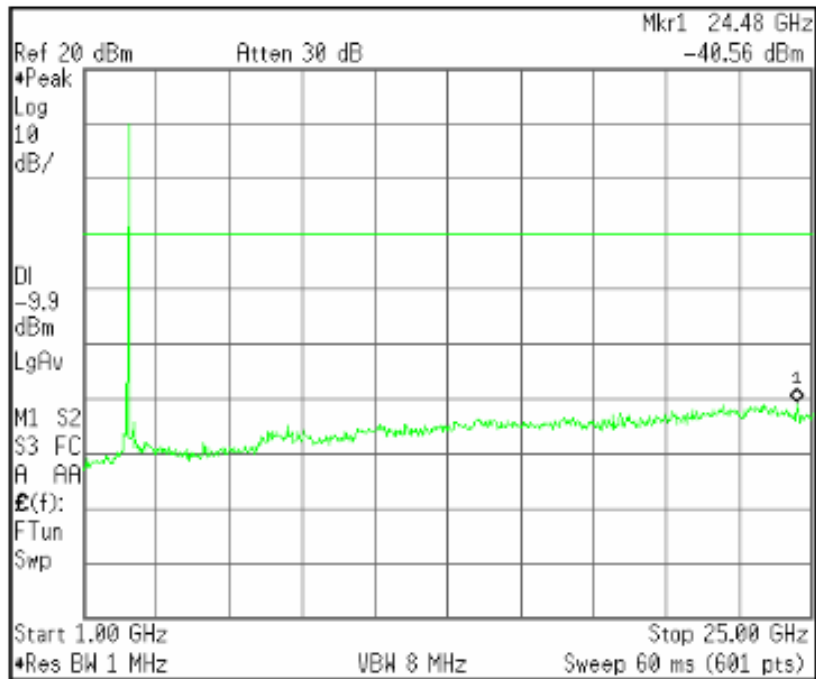
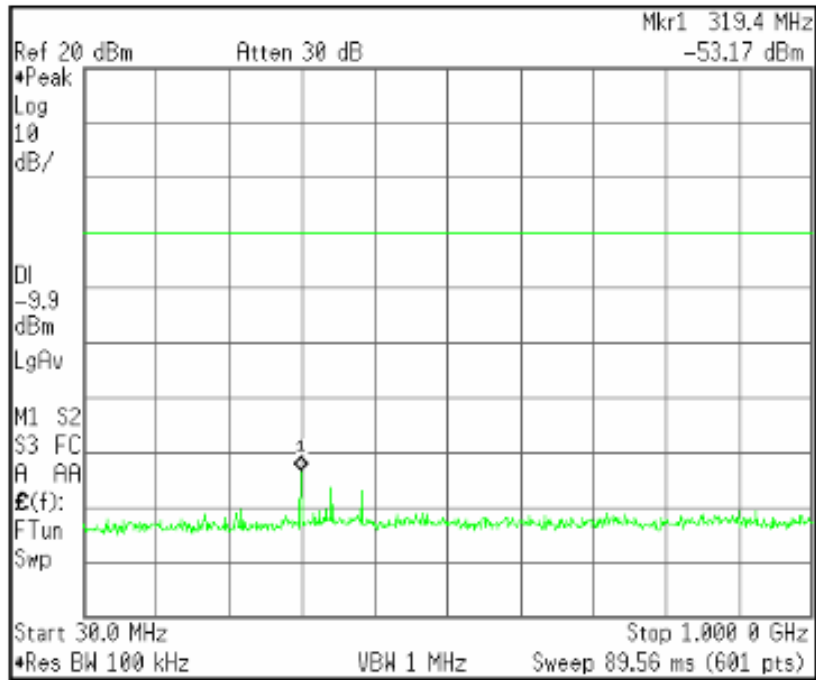


- 802.11g mode

[CH Low]

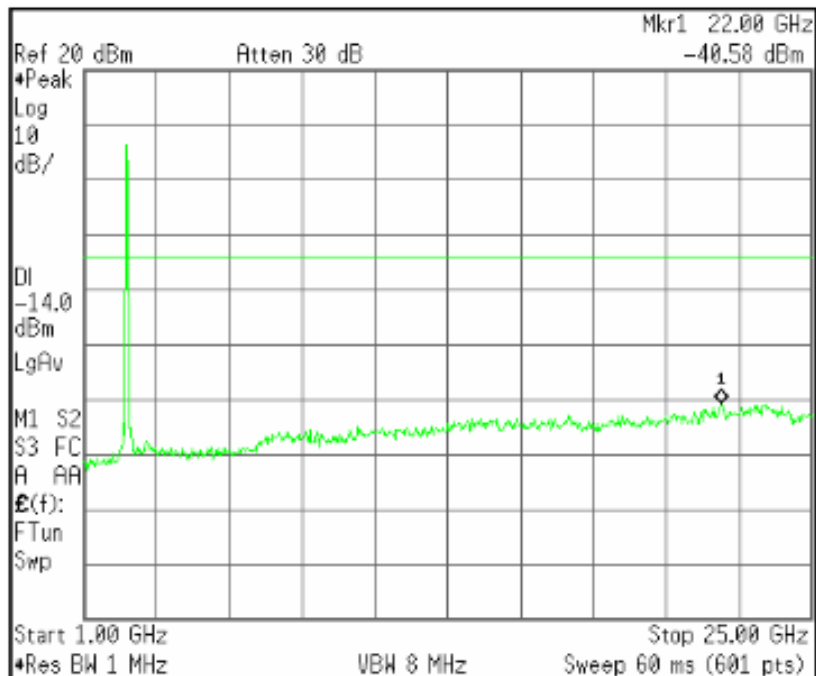
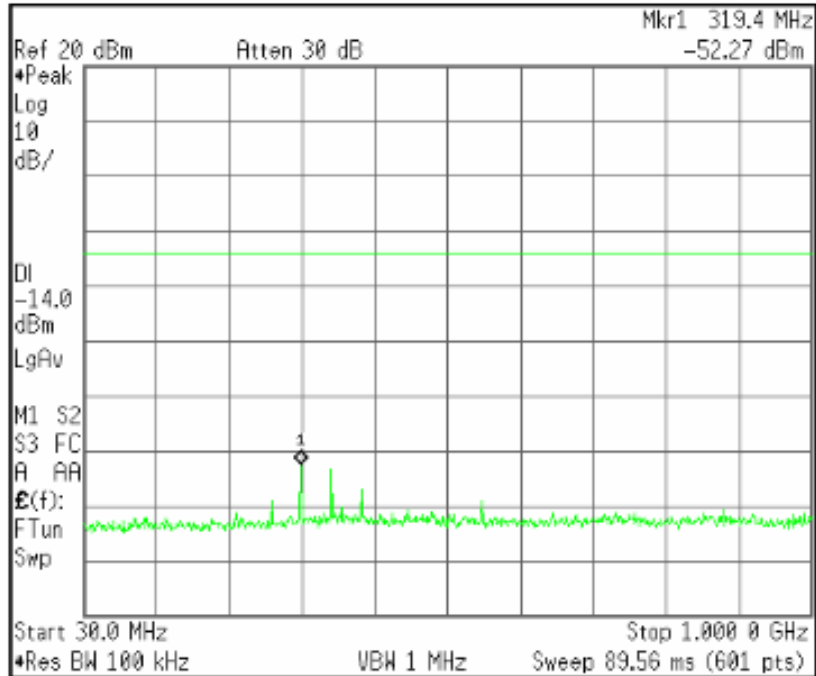


[CH High]

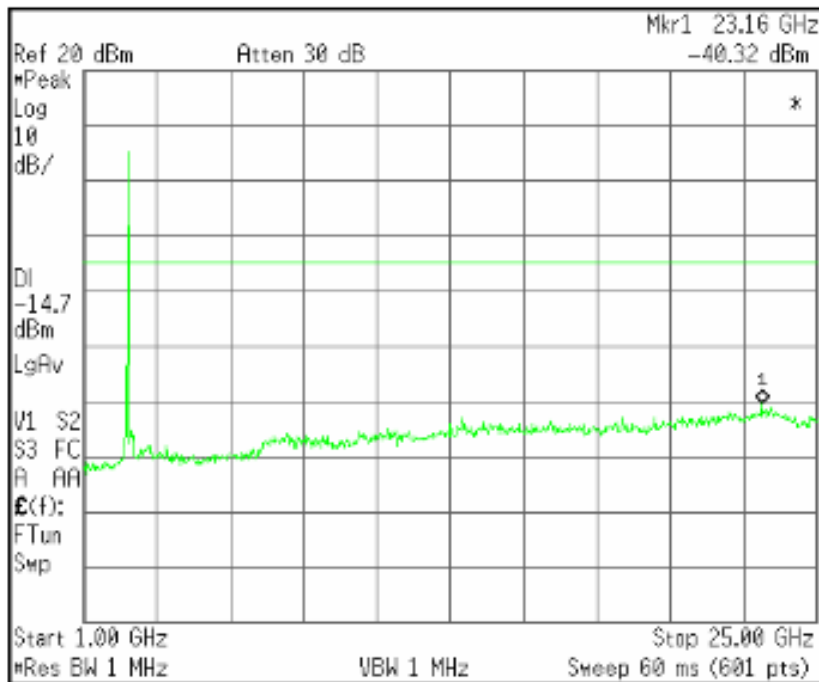
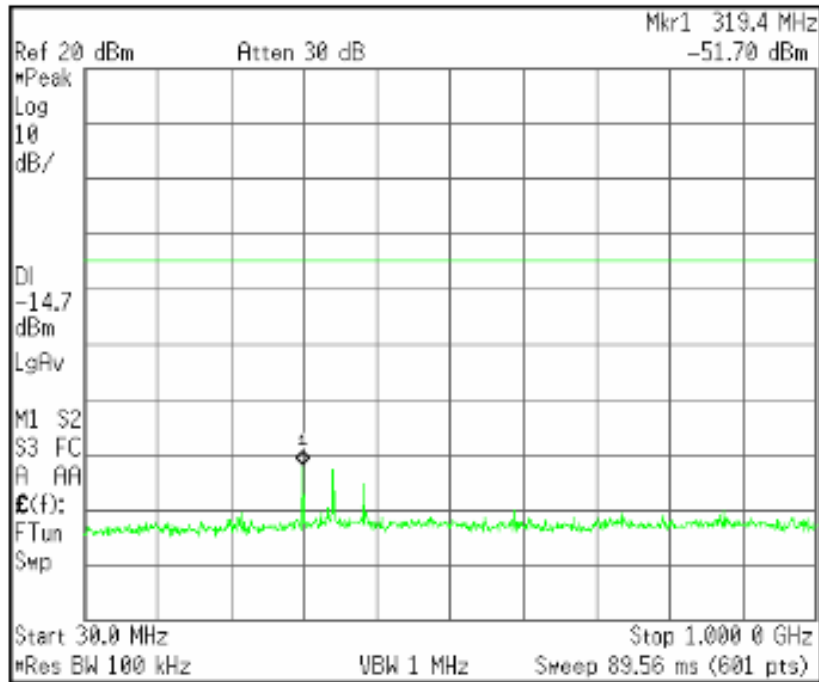


- 802.11n(HT20) mode

[CH Low]

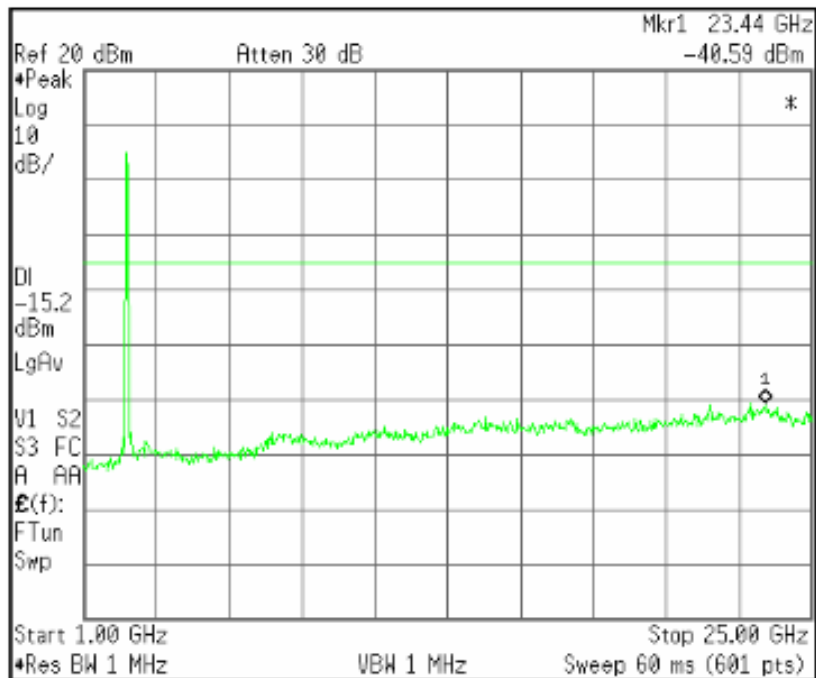
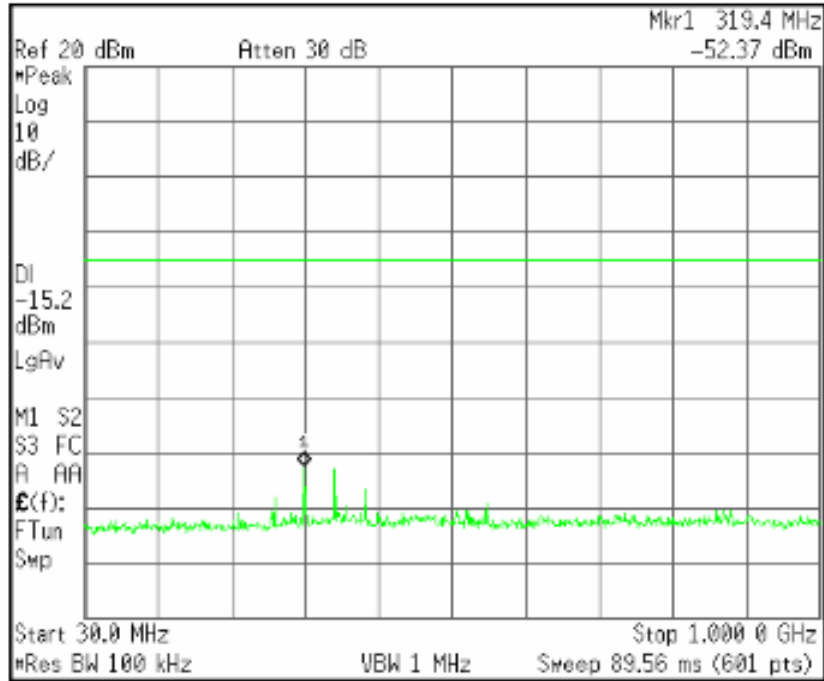


[CH High]

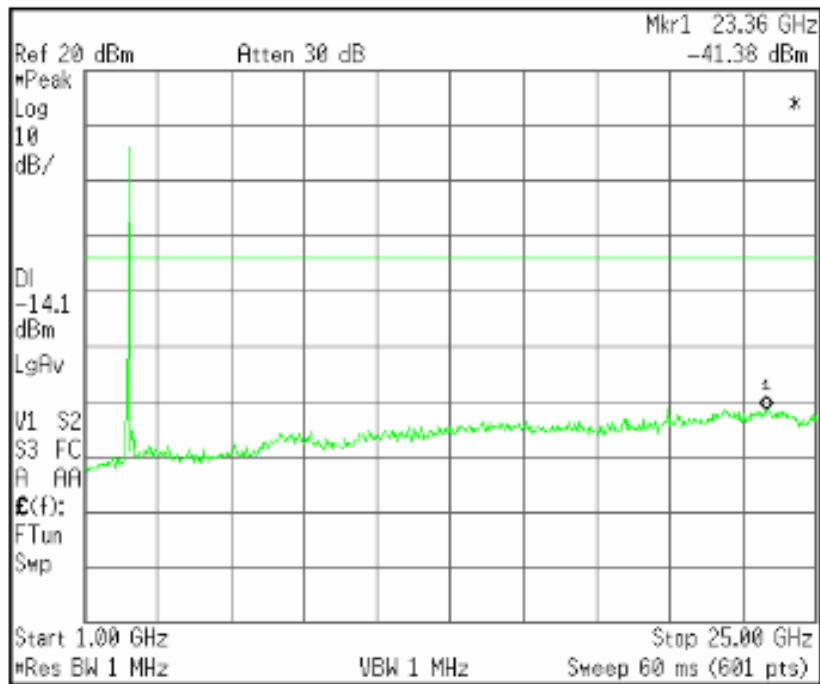
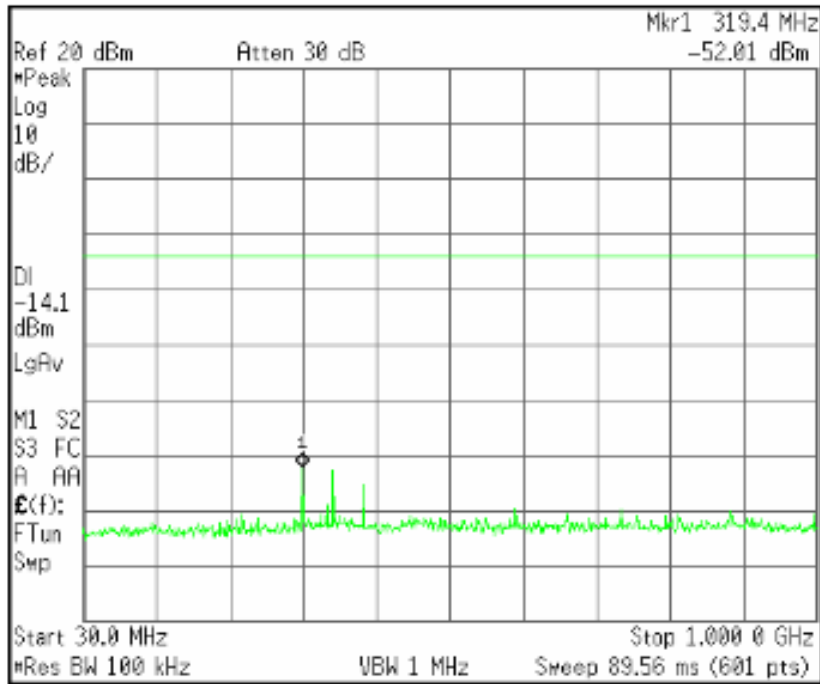


- 802.11n(HT40) mode



[CH Low]

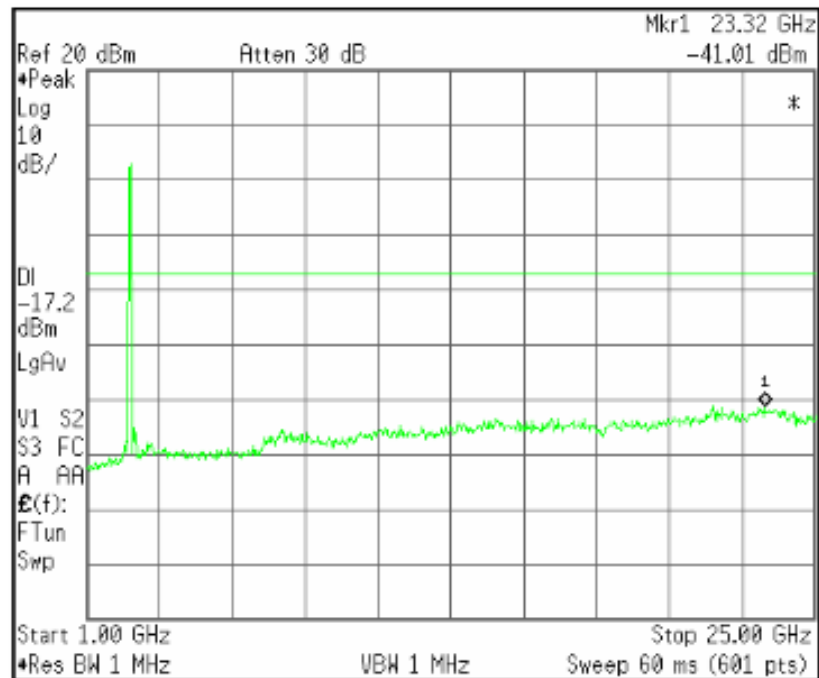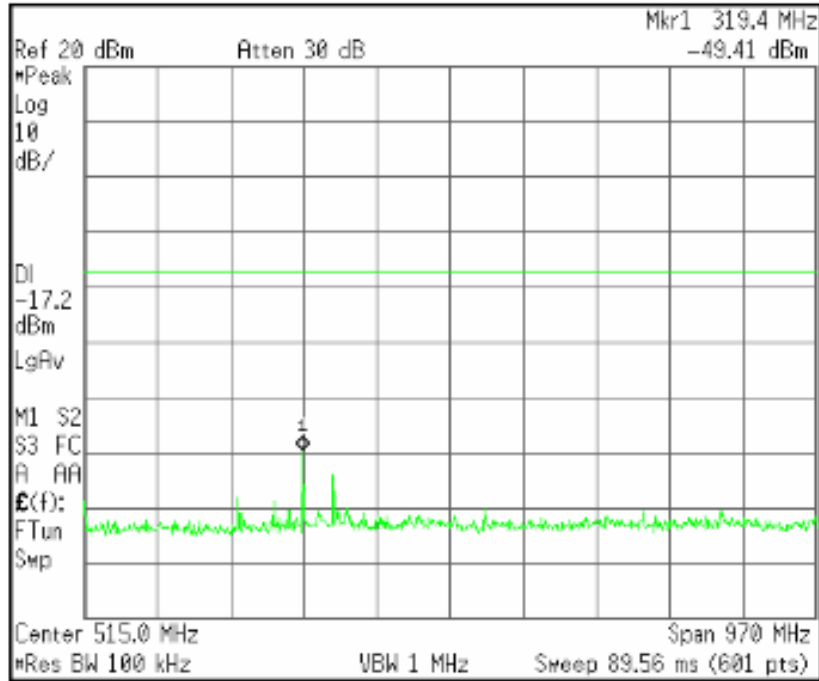

[CH Mid]

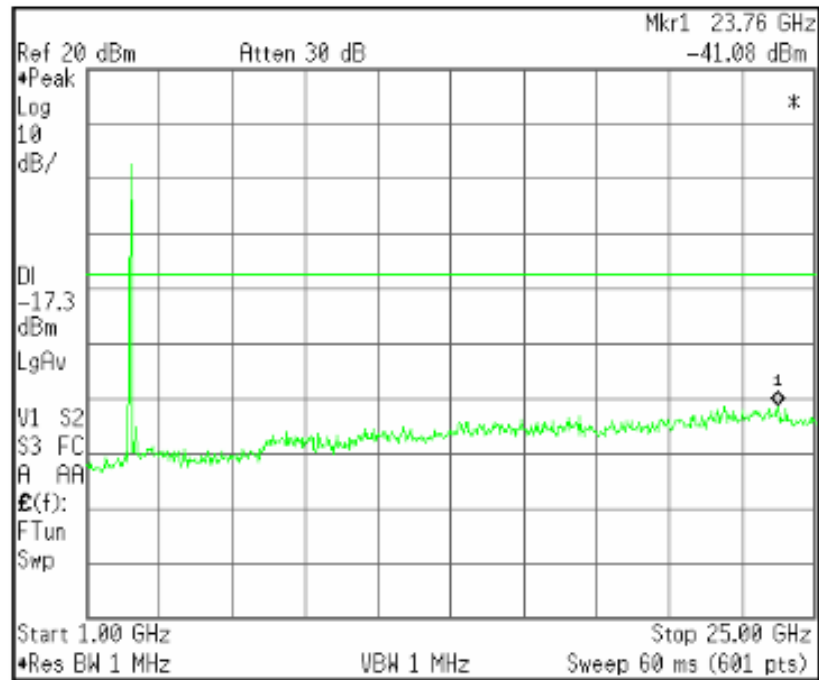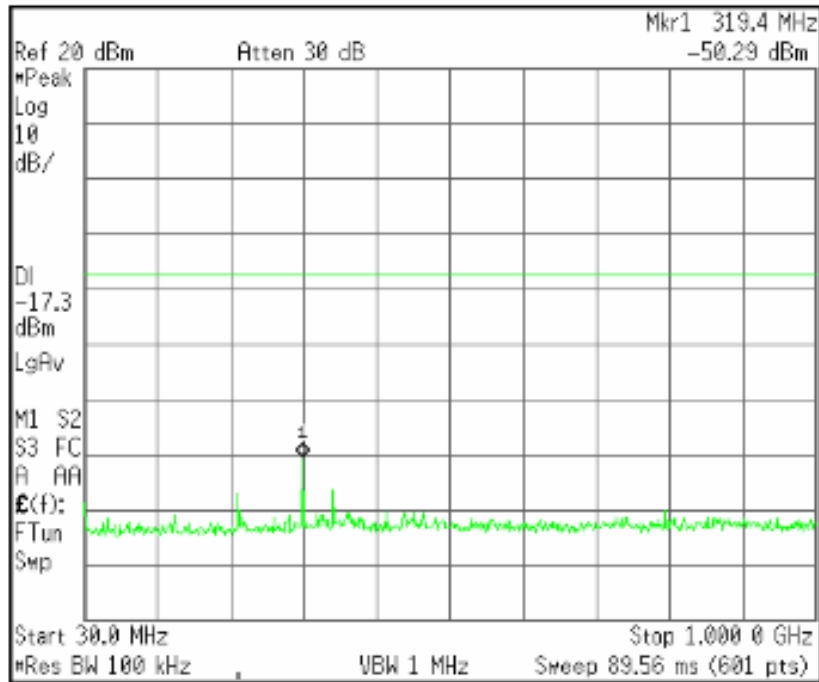

[CH High]

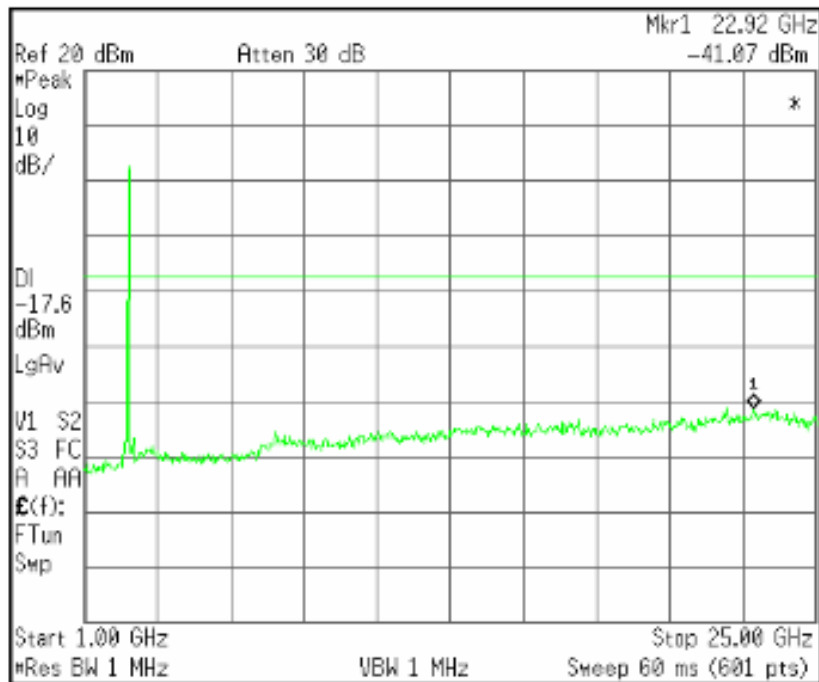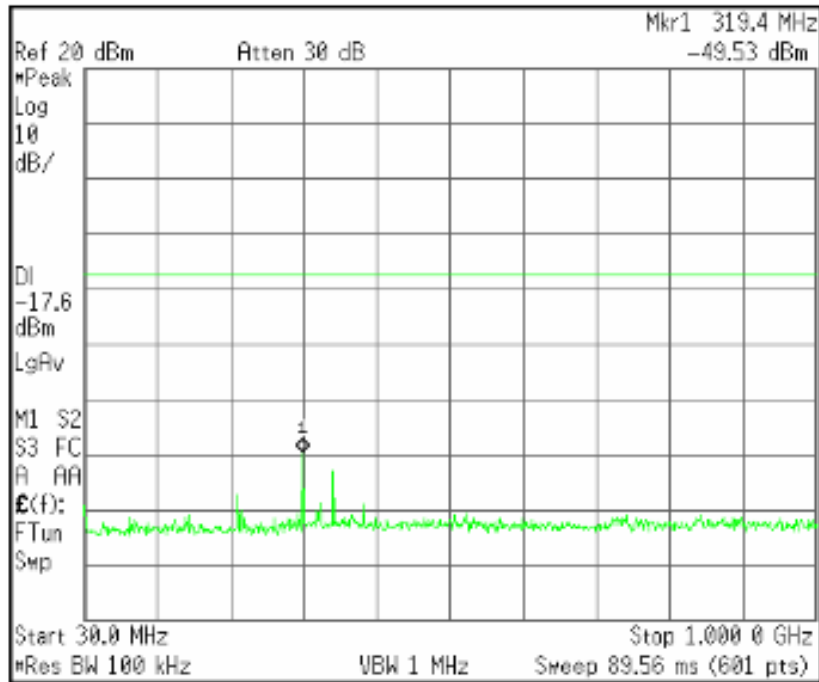

5.7 Radio Frequency Exposure

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this Chapter.

Limit

Limits for general population/Uncontrolled exposure

Frequency Range [MHz]	Electric Field Strength (E) [V/m]	Magnetic Field Strength (H) [A/m]	Power Density (S) [mW/cm ²]	Averaging Time E ² , H ² or S [minutes]
0.3 - 1.34	614	1.63	(100)	30
1.34 - 30	824/f	2.19/f	(180/f ²)	30
30 - 300	27.5	0.073	0.2	30
300 - 1 500	--	--	f/1 500	30
1 500 - 100 000	--	--	1.0	30

f = frequency in MHz

*Plane-wave equivalent power density

MPE Prediction

Predication of MPE limit at a given distance.

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG / 4\pi R^2$$

Where: S = power density (in appropriate units, e.g. mW/cm²)
P = power input to the antenna (in appropriate units, e.g., mW)
G = power gain of the antenna in the direction of interest relative to an isotropic radiator
R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

- 802.11b mode

Maximum peak output power at antenna input : 12.10 dBm (16.22 mW)
Prediction distance : 20 cm
Predication frequency : 2 412 MHz
Antenna gain(Max) : 3.50 dBi (2.24 numeric)
Power density at predication frequency at 20 cm : 0.007 22 mW/cm²

MPE Limit for : 1 mW/cm²

- 802.11g mode

Maximum peak output power at antenna input : 5.65 dBm (3.67 mW)
Prediction distance : 20 cm
Predication frequency : 2 442 MHz
Antenna gain(Max) : 3.50 dBi (2.24 numeric)
Power density at predication frequency at 20 cm : 0.001 64 mW/cm²

MPE Limit for : 1 mW/cm²

- 802.11n(HT20) mode

Maximum peak output power at antenna input : 2.70 dBm (1.86 mW)
Prediction distance : 20 cm
Predication frequency : 2 472 MHz
Antenna gain(Max) : 3.50 dBi (2.24 numeric)
Power density at predication frequency at 20 cm : 0.000 83 mW/cm²

MPE Limit for : 1 mW/cm²

- 802.11n(HT40) mode

Maximum peak output power at antenna input : 3.54 dBm (2.26 mW)
Prediction distance : 20 cm
Predication frequency : 2 442 MHz
Antenna gain(Max) : 3.50 dBi (2.24 numeric)
Power density at predication frequency at 20 cm : 0.001 01 mW/cm²

MPE Limit for : 1 mW/cm²

Test Result

The power density level at 20 cm is 0.007 22 mW/cm², 0.001 64 mW/cm², 0.000 83 mW/cm² and 0.001 01 mW/cm² which is below the uncontrolled exposure limit of 1 mW/cm² at 2 412 MHz to 2 472 MHz.

6. SAMPLE CALCULATION

Sample Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor.
The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - PA$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

PA* = Preamplifier Factor

* PA is only be used for the measuring frequency above 1 GHz.

$$dB(\mu V) = 20 \log_{10} (\mu V) : \text{Equation}$$

$$dB(\mu V) = dBm + 107$$

Example : @ 400.74 MHz

Class B Limit	=	46.00 dB(μ V/m)
Reading	=	24.43 dB(μ V)
Antenna Factor + Cable Loss	=	15.63 + 2.54 = 18.17 dB(μ V/m)
Total	=	42.60 dB(μ V/m)
Margin	=	46.00 – 42.60 = 3.40 dB
	=	3.40 dB below Limit

7. List of test equipments used for measurements

	Test Equipment	Model	Mfg.	Serial No.	Cal. Date	Cal. Due Date
<input checked="" type="checkbox"/>	EMI Test Receiver	ESVS 10	R&S	835165/001	14.03.18	15.03.18
<input checked="" type="checkbox"/>	EMI Test Receiver	ESCI7	R&S	100851	13.09.05	14.09.05
<input checked="" type="checkbox"/>	Loop Antenna	AL-130	COM-POWER	121025	14.04.08	16.04.08
<input checked="" type="checkbox"/>	LogBicon Antenna	VULB9160	Schwarzbeck	3082	13.07.25	15.07.25
<input checked="" type="checkbox"/>	Horn Antenna	BBHA 9120D	Schwarzbeck	826	14.04.02	16.04.02
<input checked="" type="checkbox"/>	Spectrum Analyzer	E7405A	H.P.	US41160290	13.09.05	14.09.05
<input checked="" type="checkbox"/>	PSA Series Spectrum Analyzer	E4440A	Agilent	US40420382	13.09.11	14.09.11
<input checked="" type="checkbox"/>	Amplifier	TK-PA18	TESTEK	120020	13.09.05	14.09.05
<input checked="" type="checkbox"/>	DC Power Supply	HYP-3030	HAN YOUNG	990554	14.03.17	15.03.17
<input checked="" type="checkbox"/>	Band Reject Filter	WRCGV 2402/2480-2382/2500-52/10SS	Wainwright Instrument	2	13.09.05	14.09.05
<input checked="" type="checkbox"/>	Highpass Filter	WHKX3.0 /18G-6SS	Wainwright Instrument	15	14.03.18	15.03.18
<input checked="" type="checkbox"/>	Power Meter	NRVS	R&S	834053/060	13.09.05	14.09.05
<input checked="" type="checkbox"/>	Turn-Table	DS1200-S	Innco Systems GmbH	2740311	N/A	N/A
<input checked="" type="checkbox"/>	Turn-Table	TT 1.35 SI	SES	-	N/A	N/A
<input checked="" type="checkbox"/>	Antenna Master	AM 4.5	SES	-	N/A	N/A