Report No.: **DRTFCC2109-0102** IC : **23402- DR750XLTEP**

FCC ID: YCK-DR750XLTEP

5.4. Unwanted Emissions (Conducted)

■ Test requirements and limit, Part 15.247(d) & RSS-247 [5.5]

In any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to 15.247(b)(3) requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level. If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to 15.247(b)(3) requirements, then the power in any 100 kHz outside of the authorized frequency band

In either case, attenuation to levels below the general emission limits specified in §15.209(a) is not required.

shall be attenuated by at least 30 dB relative to the maximum measured inband average PSD level.

5.4.1. Test Setup

Refer to the APPENDIX I including path loss

5.4.2. Test Procedures

- KDB558074 D01v05r02 Section 8.5
- ANSI C63.10-2013 Section 11.11

Reference level measurement

- 1. Set instrument center frequency to DTS channel center frequency.
- 2. Set the span to ≥ 1.5 times the DTS bandwidth.
- 3. Set the RBW = 100 kHz.
- 4. Set the VBW \geq 3 x RBW.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum PSD level LIMIT LINE = 20 dB below of the reference level.

Emission level measurement

- 1. Set the center frequency and span to encompass frequency range to be measured.
- 2. Set the RBW = 100 kHz.(Actual 1 MHz, See below note)
- 3. Set the VBW ≥ 3 x RBW.(Actual 3 MHz, See below note)
- 4. Detector = peak.
- 5. Ensure that the number of measurement points ≥ span / RBW
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
- 9. Use the peak marker function to determine the maximum amplitude level.

Note: The conducted spurious emission was tested with below settings.

Frequency range	RBW	VBW	Detector	Trace	Sweep Point
9 kHz ~ 30 MHz	100 kHz	300 kHz			
30 MHz ~ 10 GHz	1 MHz	3 MHz	Peak	Max Hold	40 001
10 GHz ~ 25 GHz	1 MHz	3 MHz			

If the emission level with above setting was close to the limit (ie, less than 3 dB margin) then zoom scan is required using RBW = 100 kHz, VBW = 300 kHz, SPAN = 100 MHz and BINS = 2 001 to get accurate emission level within 100 kHz BW.



FCC ID: YCK-DR750XLTEP IC: 23402- DR750XLTEP



5.4.3. Test Results

RESULT PLOTS


- Power Supply: 24 V

TM 1 & 2412

Reference



Low Band-edge

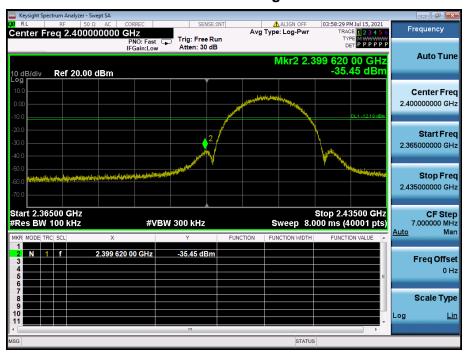


TRF-RF-232(04)210316 Pages: 49 / 151




IC: 23402- DR750XLTEP



Report No.: DRTFCC2109-0102

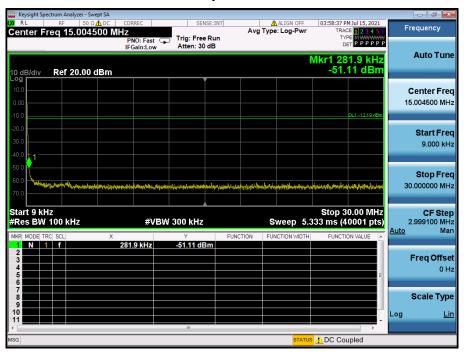

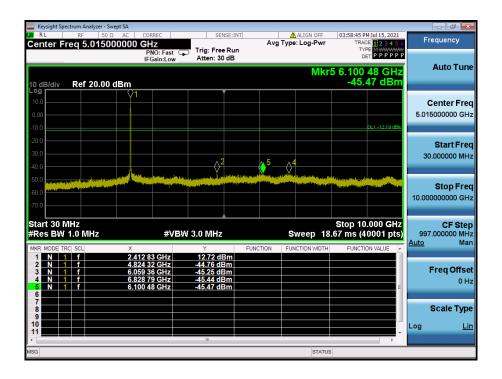








Conducted Spurious Emissions

Report No.: DRTFCC2109-0102

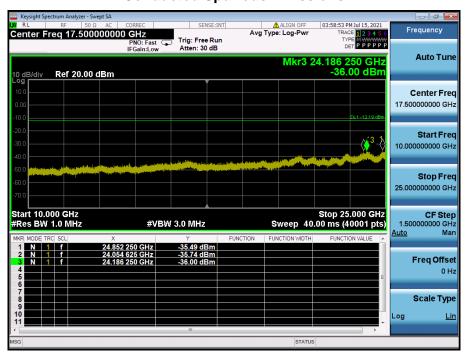

TRF-RF-232(04)210316 Pages: 51 / 151






TM 1 & 2437

Reference




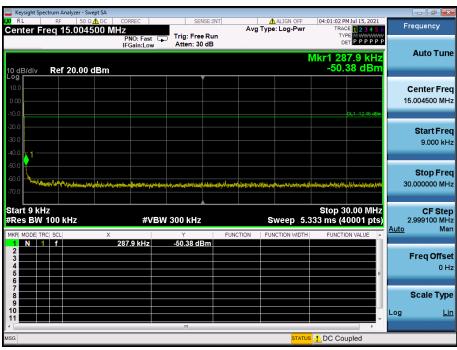








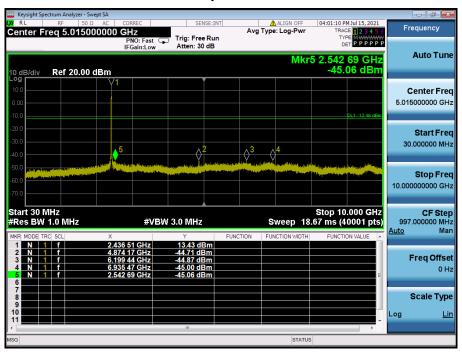

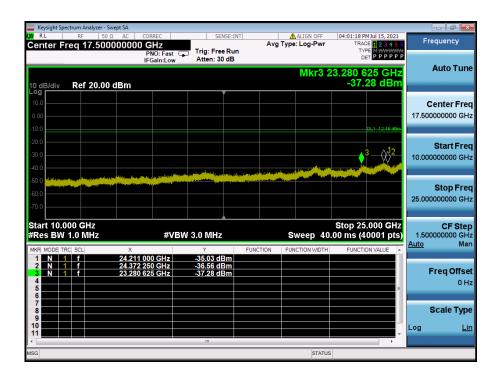






TM 1 & 2462

Reference



High Band-edge

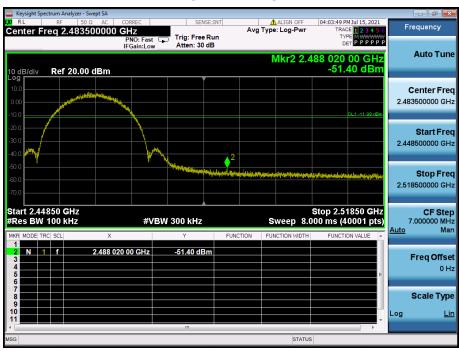





IC: 23402- DR750XLTEP



Report No.: DRTFCC2109-0102

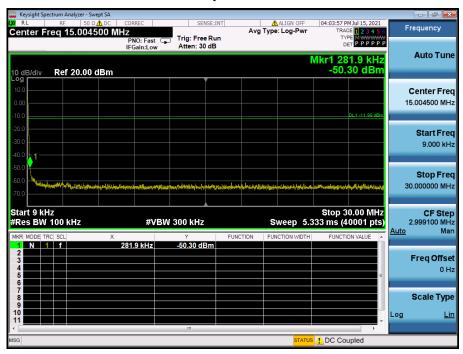

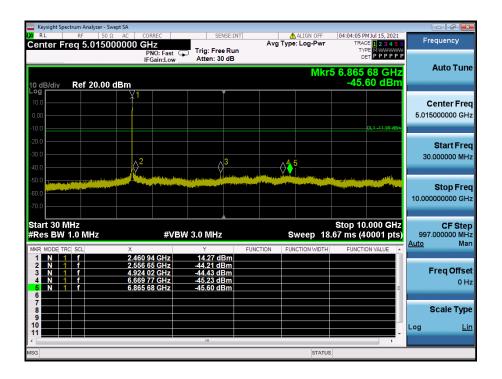








Conducted Spurious Emissions

Report No.: DRTFCC2109-0102

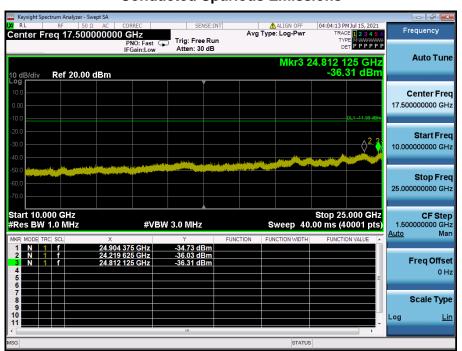


TRF-RF-232(04)210316 Pages: 56 / 151






TM 2 & 2412

Reference

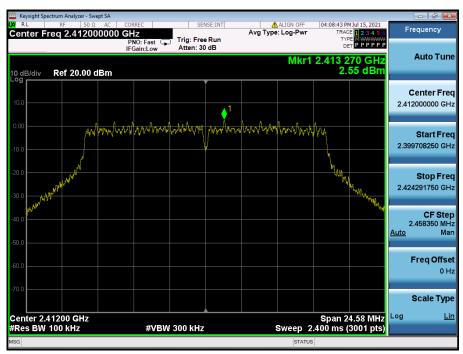

Low Band-edge

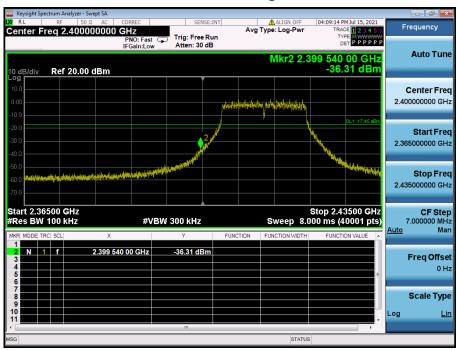





IC: 23402- DR750XLTEP



Report No.: DRTFCC2109-0102

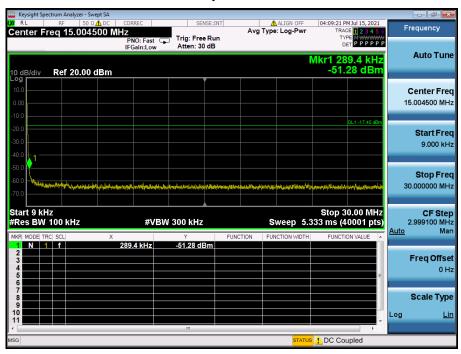

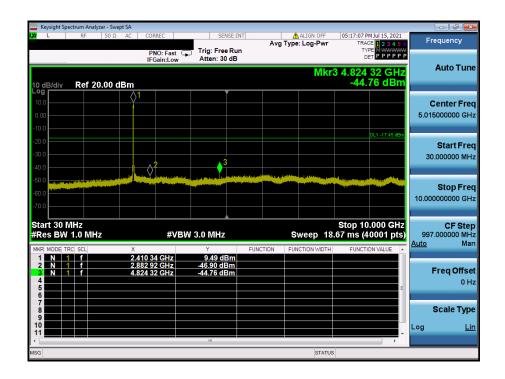




IC: 23402- DR750XLTEP



Report No.: DRTFCC2109-0102

Conducted Spurious Emissions

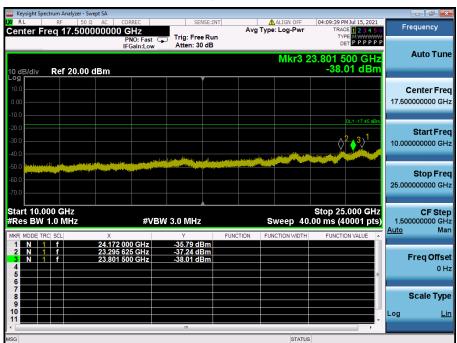

TRF-RF-232(04)210316 Pages: 59 / 151









TM 2 & 2437

Reference

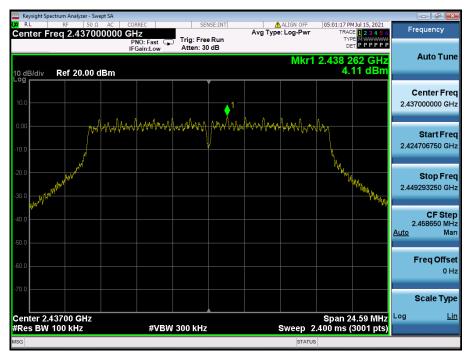

Conducted Spurious Emissions

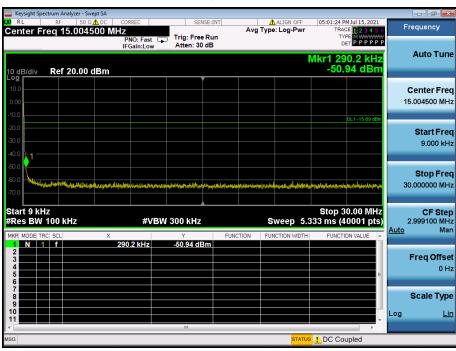

This test report is prohibited to copy or reissue in whole or in part without the approval of DT&C Co., Ltd.









Conducted Spurious Emissions

Report No.: DRTFCC2109-0102

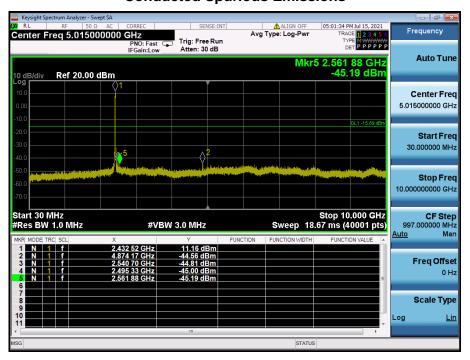

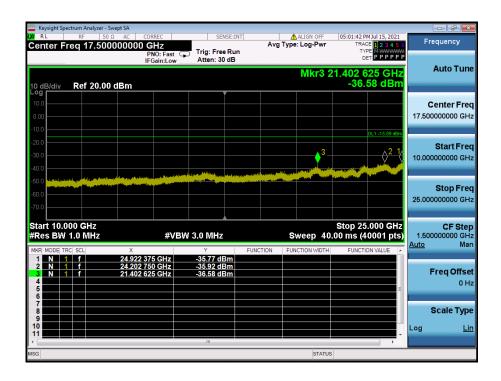







TM 2 & 2462

Reference

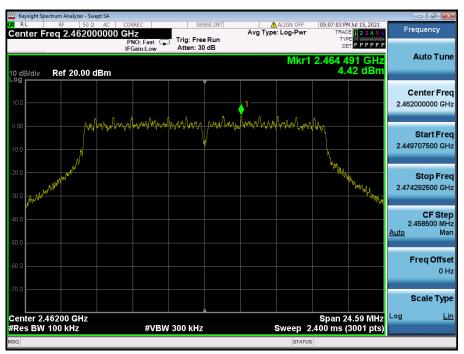


High Band-edge

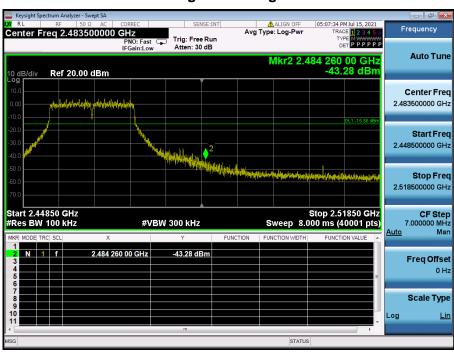








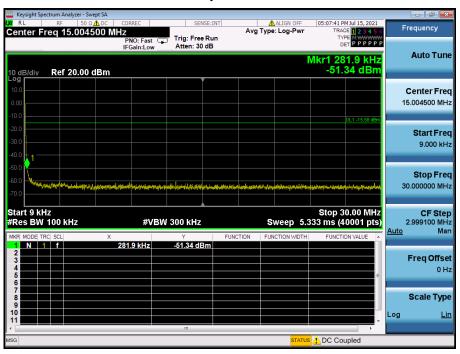

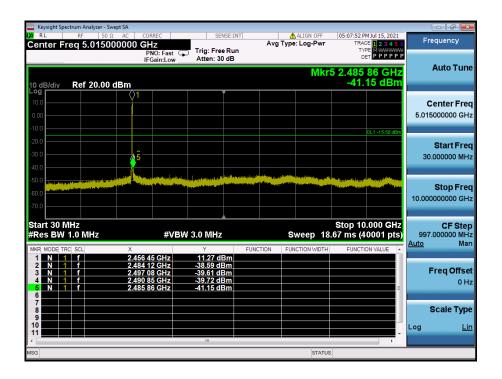








Conducted Spurious Emissions

Report No.: DRTFCC2109-0102

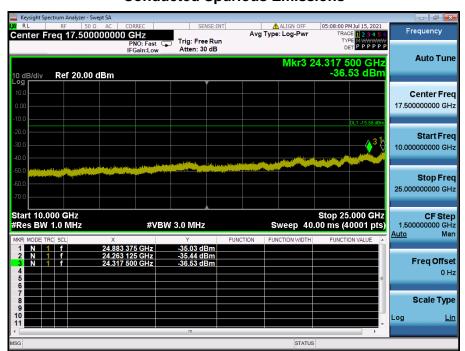


TRF-RF-232(04)210316 Pages: 64 / 151






TM 3 & 2412

Reference

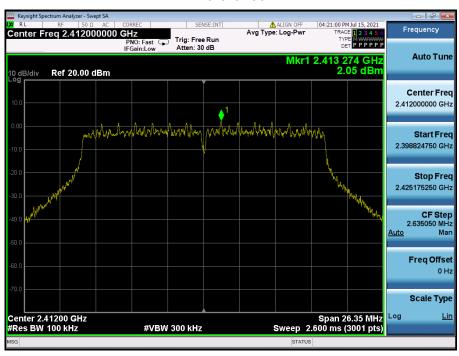

Low Band-edge

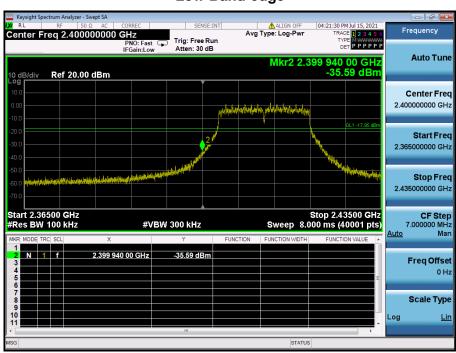



TRF-RF-232(04)210316







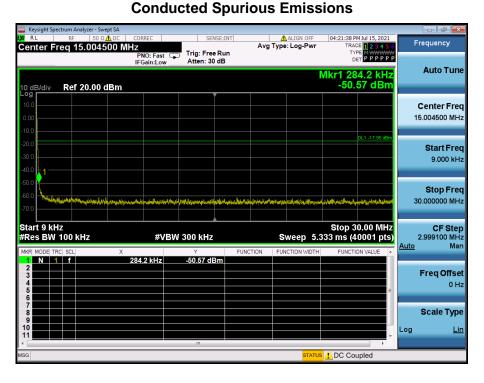

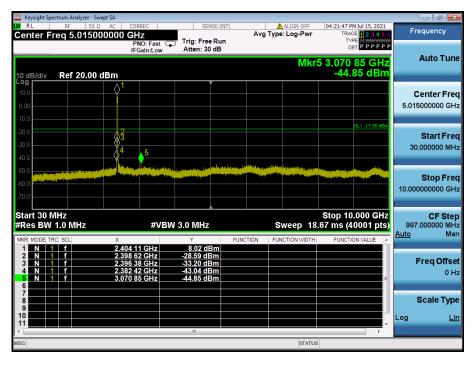




IC: 23402- DR750XLTEP



Report No.: DRTFCC2109-0102

Conducted Spurious Emissions

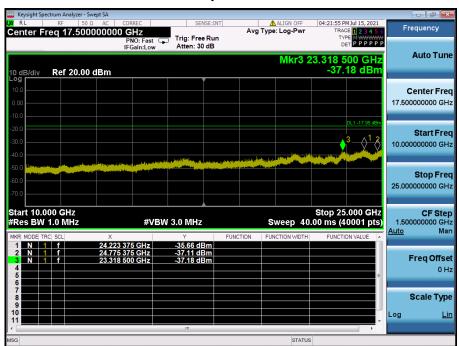


TRF-RF-232(04)210316 Pages: 67 / 151






TM 3 & 2437


Reference

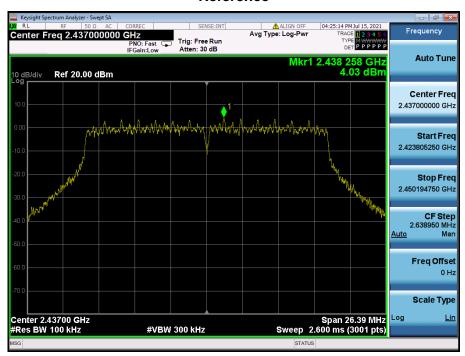


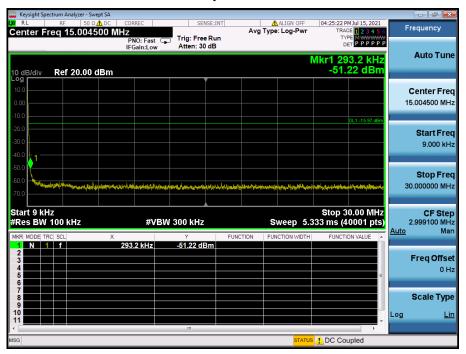





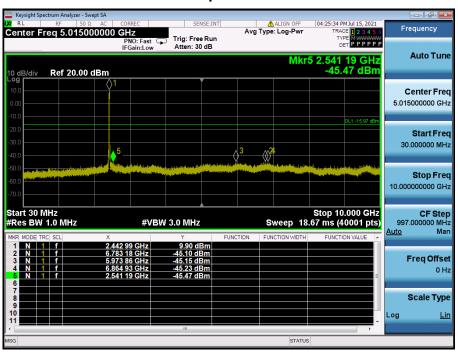

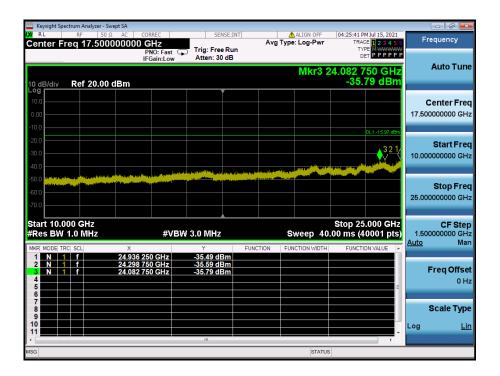







TM 3 & 2462

Reference

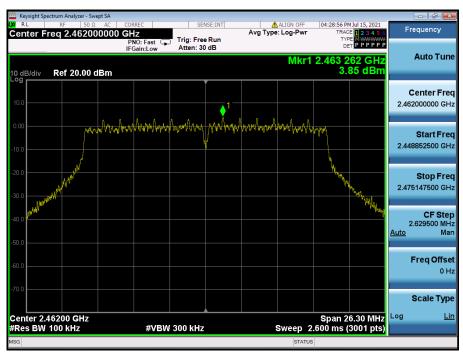


High Band-edge

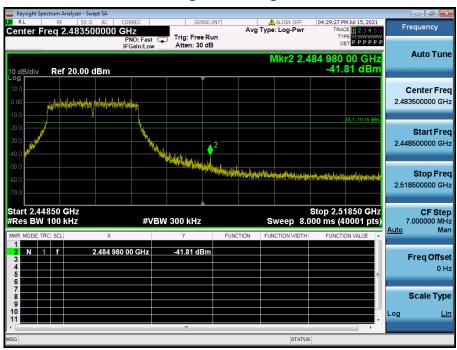









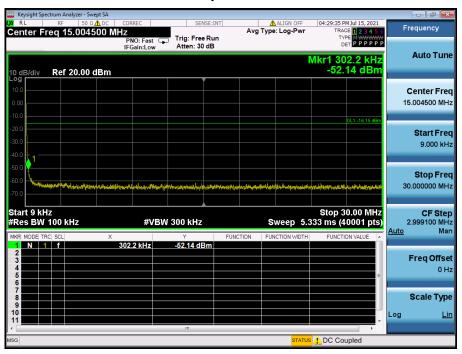

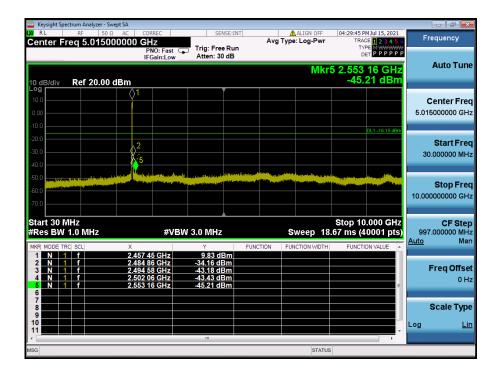








Conducted Spurious Emissions

Report No.: DRTFCC2109-0102

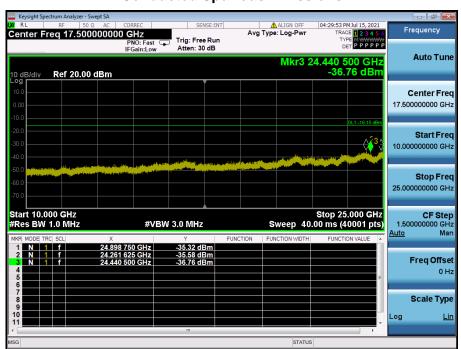


TRF-RF-232(04)210316 Pages: 72 / 151






TM 4 & 2422

Reference

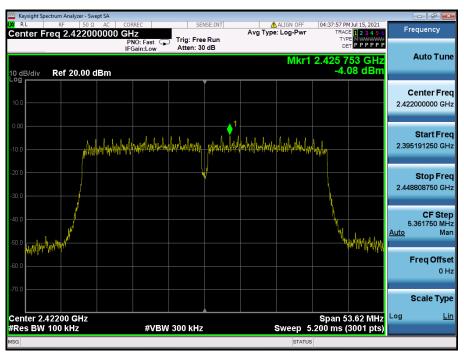


Low Band-edge

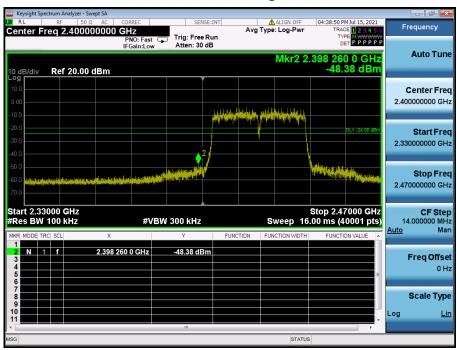









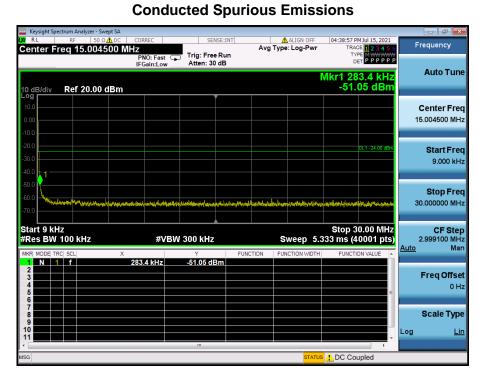

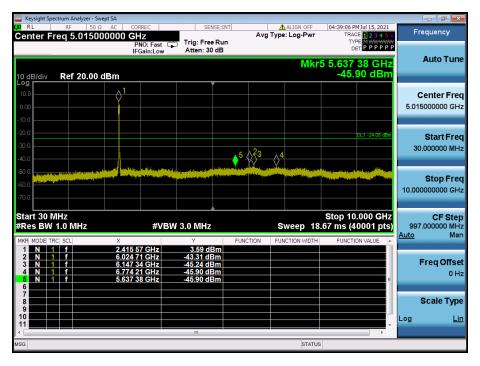








Conducted Spurious Emissions

Report No.: DRTFCC2109-0102

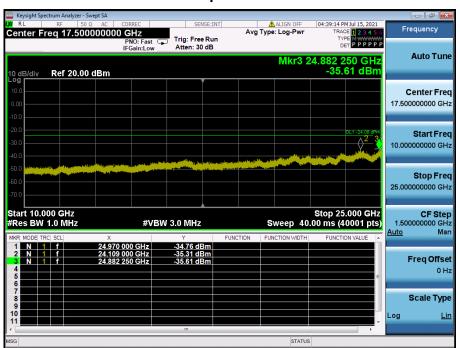


TRF-RF-232(04)210316 Pages: 75 / 151






TM 4 & 2437

Reference

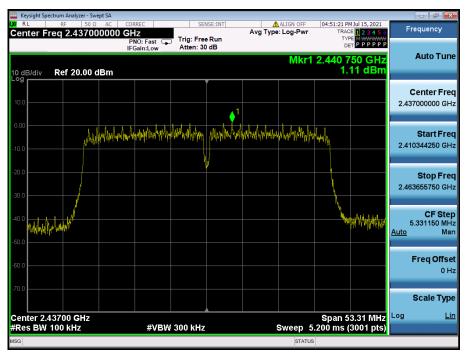


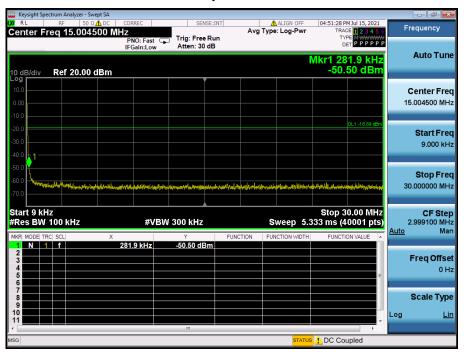








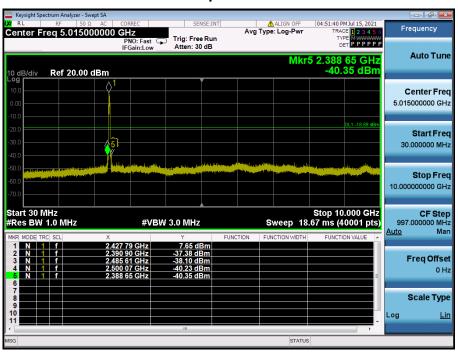

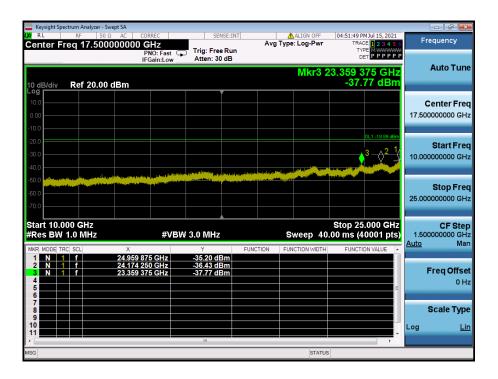







TM 4 & 2452

Reference

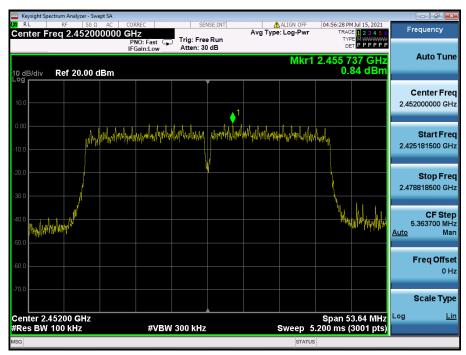


High Band-edge

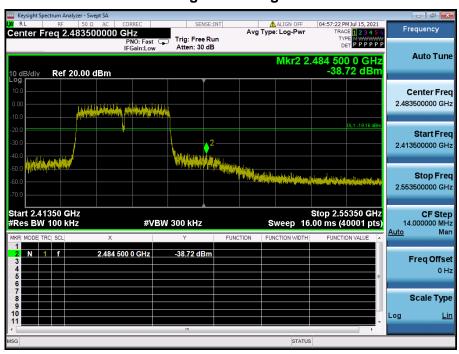








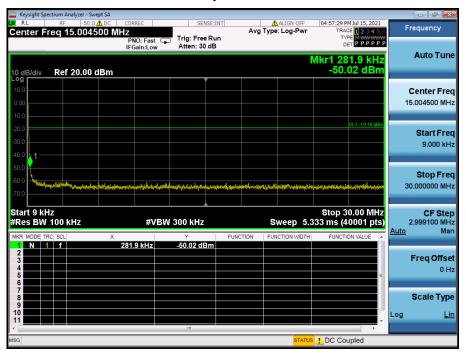

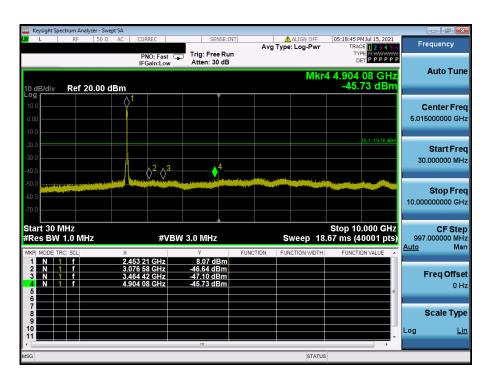




IC: 23402- DR750XLTEP



Report No.: DRTFCC2109-0102

Conducted Spurious Emissions

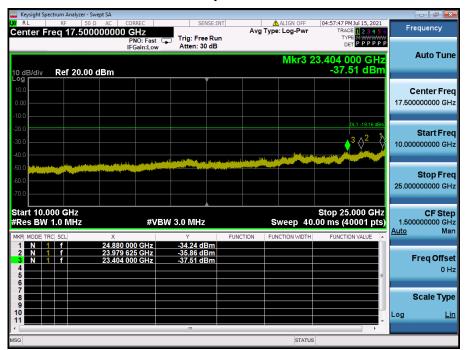

TRF-RF-232(04)210316 Pages: 80 / 151