

TEST REPORT



DT&C Co., Ltd.

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRTFCC2109-0102

2. Customer

• Name (FCC) : Pittasoft Co., Ltd. / Name (IC) : PITTASOFT CO., LTD.

• Address (FCC) : A 4th floor, ABN Tower, 331, Pangyo-ro, Bundang-gu Seongnam-si, Gyeonggi-do
South Korea 13488

Address (IC) : A 4th floor, ABN Tower, 331, Pangyo-ro, Bundang-gu, Seongnam-si Gyeonggi-do
08506 Korea (Republic Of)

3. Use of Report : FCC & IC Certification

4. Product Name / Model Name : Car dashcam / DR750X LTE Plus

FCC ID : YCK-DR750XLTEP

IC : 23402-DR750XLTEP

5. FCC Regulation(s): Part 15.247

IC Standard(s): RSS-247 Issue 2

Test Method used: KDB558074 D01v05r02, ANSI C63.10-2013

6. Date of Test : 2021.07.06 ~ 2021.09.06



7. Location of Test : Permanent Testing Lab On Site Testing

8. Testing Environment : See appended test report.

9. Test Result : Refer to the attached test result.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test report is not related to KOLAS accreditation.

Affirmation	Tested by	Reviewed by
	Name : SeungMin Gil 	Name : JaeJin Lee 

2021. 09. 08.

DT&C Co., Ltd.

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

Test Report Version

Test Report No.	Date	Description	Revised by	Reviewed by
DRTFCC2109-0102	Sep, 08. 2021	Initial issue	SeungMin Gil	JaeJin Lee

Table of Contents

1. General Information	4
1.1. Description of EUT	4
1.2. Declaration by the applicant / manufacturer	4
1.3. Testing Laboratory	5
1.4. Testing Environment.....	5
1.5. Measurement Uncertainty.....	5
1.6. Test Equipment List	6
2. Test Methodology	7
2.1. EUT Configuration	7
2.2. EUT Exercise.....	7
2.3. General Test Procedures	7
2.4. Instrument Calibration	7
2.5. Description of Test Modes.....	8
3. Antenna Requirements	9
4. Summary of Test Result	10
5. Test Result	11
5.1. Maximum Peak Conducted Output Power	11
5.1.1. Test Setup.....	11
5.1.2. Test Procedures	11
5.1.3. Test Results.....	11
5.2. 6 dB Bandwidth	14
5.2.1. Test Setup.....	14
5.2.2. Test Procedures	14
5.2.3. Test Results.....	14
5.3. Power Spectral Density.....	31
5.3.1. Test Setup.....	31
5.3.2. Test Procedures	31
5.3.3. Test Results.....	31
5.4. Unwanted Emissions (Conducted)	48
5.4.1. Test Setup.....	48
5.4.2. Test Procedures	48
5.4.3. Test Results.....	49
5.5. Unwanted Emissions (Radiated).....	113
5.5.1. Test Setup.....	115
5.5.2. Test Procedures	115
5.5.3. Test Results.....	116
5.6. AC Power-Line Conducted Emissions	119
5.7. Occupied Bandwidth.....	120
5.7.1. Test Setup.....	120
5.7.2. Test Procedures	120
5.7.3. Test Results.....	120
APPENDIX I	137
APPENDIX II	138
APPENDIX III	141

1. General Information

1.1. Description of EUT

Equipment Class	Digital Transmission System (DTS)
Product Name	Car dashcam
Model Name	DR750X LTE Plus
Add Model Name	DR750X-2CH LTE Plus, DR750X-1CH LTE Plus, DR750X-2CH IR LTE Plus, DR750X-2CH Truck LTE Plus, DR750X-2CH DMS LTE Plus
Firmware Version Identification Number	V1.000
EUT Serial Number	Radiated: 75LPNAAK400014, Conducted: 75LPNAAK400009
Power Supply	DC 12 V, DC 24 V
Frequency Range	<ul style="list-style-type: none"> ▪ 802.11b/g/n(20 MHz) : 2 412 MHz ~ 2 462 MHz ▪ 802.11n(40 MHz) : 2 422 MHz ~ 2 452 MHz
Max. RF Output Power	2.4 GHz Band <ul style="list-style-type: none"> ▪ 802.11b : 17.96 dBm ▪ 802.11g : 22.53 dBm ▪ 802.11n (HT20) : 22.76 dBm ▪ 802.11n (HT40) : 20.50 dBm
Modulation Technique	<ul style="list-style-type: none"> ▪ 802.11b: CCK, DSSS ▪ 802.11g/n: OFDM
Antenna Specification	Antenna Type: CHIP Antenna Gain: 1.99 dBi (PK)

1.2. Declaration by the applicant / manufacturer

N/A

1.3. Testing Laboratory

DT&C Co., Ltd.	
The 3 m test site and conducted measurement facility used to collect the radiated data are located at the 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 17042.	
The test site complies with the requirements of Part 2.948 according to ANSI C63.4-2014.	
- FCC & IC MRA Designation No. : KR0034	
- ISED#: 5740A	
www.dtnet.net	
Telephone	: + 82-31-321-2664
FAX	: + 82-31-321-1664

1.4. Testing Environment

Ambient Condition	
▪ Temperature	+22 °C ~ +26 °C
▪ Relative Humidity	+40 % ~ +45 %

1.5. Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with requirements of ANSI C63.4-2014 and ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.

Parameter	Measurement uncertainty
Antenna-port conducted emission	1.0 dB (The confidence level is about 95 %, $k = 2$)
AC power-line conducted emission	3.4 dB (The confidence level is about 95 %, $k = 2$)
Radiated emission (1 GHz Below)	4.9 dB (The confidence level is about 95 %, $k = 2$)
Radiated emission (1 GHz ~ 18 GHz)	5.0 dB (The confidence level is about 95 %, $k = 2$)
Radiated emission (18 GHz Above)	5.3 dB (The confidence level is about 95 %, $k = 2$)

1.6. Test Equipment List

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent Technologies	N9020A	21/03/22	22/03/22	MY52091063
Spectrum Analyzer	Agilent Technologies	N9020A	20/12/16	21/12/16	MY48011700
Spectrum Analyzer	Agilent Technologies	N9020A	21/06/24	22/06/24	US47360812
DC Power Supply	SM techno	SDP30-5D	21/06/24	22/06/24	305DNF079
DC Power Supply	H.P	6633A	20/12/16	21/12/16	3524A06634
Multimeter	FLUKE	17B+	20/12/16	21/12/16	36390701WS
Signal Generator	Rohde Schwarz	SMBV100A	20/12/16	21/12/16	255571
Signal Generator	ANRITSU	MG3695C	20/12/16	21/12/16	173501
Thermohygrometer	BODYCOM	BJ5478	20/12/16	21/12/16	120612-1
Thermohygrometer	BODYCOM	BJ5478	20/12/16	21/12/16	120612-2
Thermohygrometer	BODYCOM	BJ5478	21/06/24	22/06/24	N/A
Loop Antenna	ETS-Lindgren	6502	21/01/28	23/01/28	00226186
BILOG ANTENNA	Schwarzbeck	VULB 9160	20/12/16	21/12/16	3362
Horn Antenna	ETS-Lindgren	3115	20/12/16	21/12/16	6419
Horn Antenna	A.H.Systems Inc.	SAS-574	21/06/24	22/06/24	155
PreAmplifier	tsj	MLA-0118-B01-40	20/12/16	21/12/16	1852267
PreAmplifier	tsj	MLA-1840-J02-45	21/06/24	22/06/24	16966-10728
PreAmplifier	H.P	8447D	20/12/16	21/12/16	2944A07774
High Pass Filter	Wainwright Instruments	WHKX12-935-1000-15000-40SS	21/06/24	22/06/24	8
High Pass Filter	Wainwright Instruments	WHKX10-2838-3300-18000-60SS	21/06/24	22/06/24	1
High Pass Filter	Wainwright Instruments	WHNX8.0/26.5-6SS	21/06/24	22/06/24	3
Attenuator	Hefei Shunze	SS5T2.92-10-40	21/06/24	22/06/24	16012202
Attenuator	SRTechnology	F01-B0606-01	21/06/24	22/06/24	13092403
Attenuator	SMAJK	SMAJK-2-3	21/06/24	22/06/24	3
Attenuator	SMAJK	SMAJK-2-3	21/06/24	22/06/24	2
Attenuator	Aeroflex/Weinschel	86-10-11	21/06/24	22/06/24	408
Power Meter & Wide Bandwidth Sensor	Anritsu	ML2495A MA2490A	21/06/24	22/06/24	1306007 1249001
Power Meter & Wide Bandwidth Sensor	Agilent Technologies	N1911A N1921A	21/06/24	22/06/24	MY53360016 MY53360018
Cable	DT&C	Cable	21/01/08	22/01/08	G-1
Cable	DT&C	Cable	21/01/08	22/01/08	G-2
Cable	HUBER+SUHNER	SUCOFLEX 100	21/01/08	22/01/08	G-3
Cable	DT&C	Cable	21/01/08	22/01/08	G-4
Cable	Junkosha	MWX241	21/01/08	22/01/08	mmW-1
Cable	Junkosha	MWX241	21/01/08	22/01/08	mmW-4
Cable	HUBER+SUHNER	SUCOFLEX100	21/01/08	22/01/08	M-01
Cable	HUBER+SUHNER	SUCOFLEX100	21/01/08	22/01/08	M-02
Cable	JUNFLON	MWX241	21/01/08	22/01/08	M-03
Cable	JUNFLON	J12J101757-00	21/01/08	22/01/08	M-07
Cable	HUBER+SUHNER	SUCOFLEX106	21/01/08	22/01/08	M-09
Cable	DT&C	Cable	21/01/05	22/01/05	RFC-44
Test Software	tsj	Radiated Emission Measurement	NA	NA	Version 2.00.0177

Note1: The measurement antennas were calibrated in accordance to the requirements of ANSI C63.5-2017.

Note2: The cable is not a regular calibration item, so it has been calibrated by DT & C itself.

2. Test Methodology

The measurement procedures described in the ANSI C63.10-2013 and the guidance provided in KDB558074 D01v05r02 were used in measurement of the EUT.

The EUT was tested per the guidance of KDB558074 D01v05r02. And ANSI C63.10-2013 was used to reference appropriate EUT setup and maximizing procedures of radiated spurious emission and AC line conducted emission testing.

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT was operated in the test mode to fix the TX frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

2.3. General Test Procedures

Conducted Emissions

The power-line conducted emission test procedure is not described on the KDB558074 D01v05r02.

So this test was fulfilled with the requirements in Section 6.2 of ANSI C63.10-2013.

The EUT is placed on the wooden table, which is 0.8 m above ground plane and the conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and Average detector.

Radiated Emissions

Basically the radiated tests were performed with KDB558074 D01v05r02. But some requirements and procedures like test site requirements, EUT setup and maximizing procedure were fulfilled with the requirements in Section 5 and 6 of the ANSI C63.10-2013 as stated on section 12.1 of the KDB558074 D01v05r02.

The EUT is placed on a non-conductive table. For emission measurements at or below 1 GHz, the table height is 80 cm. For emission measurements above 1 GHz, the table height is 1.5 m. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

2.4. Instrument Calibration

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.5. Description of Test Modes

The EUT has been tested with the operating condition for maximizing the emission characteristics. A test program is used to control the EUT for staying in continuous transmitting.

Transmitting Configuration of EUT

Mode	Data rate
802.11b	1 Mbps ~ 11 Mbps
802.11g	6 Mbps ~ 54 Mbps
802.11n(HT20)	MCS 0 ~ MCS 7
802.11n(HT40)	MCS 0 ~ MCS 7

EUT Operation test setup

- Test Software: MPTool_1.2.0.5
- Power setting: Refer to the table below.

Test Mode

Test mode	Worst case data rate	Tested Frequency (MHz)	Power Setting
TM 1	802.11b 11 Mbps	2 412	36
		2 437	36
		2 462	36
TM 2	802.11g 54 Mbps	2 412	37
		2 437	40
		2 462	40
TM 3	802.11n(HT20) MCS 7	2 412	36
		2 437	39
		2 462	38
TM 4	802.11n(HT40) MCS 7	2 422	28
		2 437	39
		2 452	38

Note1: The worst case data rate was determined according to the power measurements.

Note2: The power measurement results for all modes and data rate were reported.

3. Antenna Requirements

▣ **According to Part 15.203**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

The antenna is permanently attached on the device.

Therefore this E.U.T complies with the requirement of Part 15.203

4. Summary of Test Result

FCC part section(s)	RSS section(s)	Test Description	Limit	Test Condition	Status Note 1
15.247(a)	RSS-247[5.2]	6 dB Bandwidth	> 500 kHz	Conducted	C
15.247(b)	RSS-247[5.4]	Maximum Peak Conducted Output Power	< 1 Watt		C
15.247(d)	RSS-247[5.5]	Out of Band Emissions / Band Edge	20 dBc in any 100 kHz BW		C
15.247(e)	RSS-247[5.2]	Power Spectral Density	< 8 dBm/3 kHz		C
-	RSS-Gen[6.7]	Occupied Bandwidth (99 %)	NA		C
15.247(d) 15.205 15.209	RSS-247[5.5] RSS-Gen[8.9] RSS-Gen[8.10]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Part 15.209 limits (Refer to section 5.5)	Radiated	C Note3, 4
15.207	RSS-Gen[8.8]	AC Power-Line Conducted Emissions	Part 15.207 limits (Refer to section 5.6)	AC Line Conducted	NA Note5
15.203	-	Antenna Requirements	Part 15.203 (Refer to section 3)	-	C
Note 1: C =Comply NC =Not Comply NT =Not Tested NA =Not Applicable Note 2: For radiated emission tests below 30 MHz were performed on semi-anechoic chamber which is correlated with OATS. Note 3: This test item was performed in three orthogonal EUT positions and the worst case data was reported. Note 4: The radiated test items were performed at DC 12 V and DC 24 V. And the worst case data are reported. Note 5 This device is installed in a car. Therefore the power source is a battery of car.					


5. Test Result

5.1. Maximum Peak Conducted Output Power

■ Test Requirements and limit, Part 15.247(b) & RSS-247 [5.4]

The maximum permissible conducted output power is **1 Watt**.

5.1.1. Test Setup

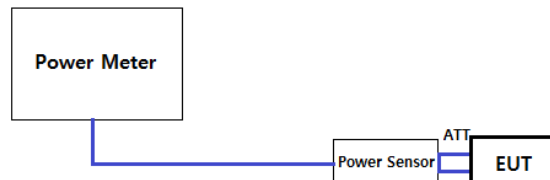

5.1.2. Test Procedures

- KDB558074 D01v05r02 - Section 8.3.1.3
- ANSI C63.10-2013 – Section 11.9.1.3

RBW ≥ DTSPKPM1 Peak-reading power meter method

The maximum conducted output powers were measured using a broadband peak RF power meter which has greater video bandwidth than DUT's DTS bandwidth and utilize a fast-responding diode detector.

- KDB558074 D01v05r02 - Section 8.3.2.3
- ANSI C63.10-2013 – Section 11.9.2.3

Method AVGPM-G

The average conducted output powers were measured using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

5.1.3. Test Results

- Refer to the next page

- Power Supply: 24 V

Mode	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm)							
			Data Rate (Mbps)							
			1	2	5.5	11	-	-	-	-
802.11b	2 412	PK	15.84	15.86	16.11	16.78	-	-	-	-
		AV	13.84	13.67	13.75	14.28	-	-	-	-
	2 437	PK	17.51	17.50	17.56	17.92	-	-	-	-
		AV	14.66	14.73	14.92	15.23	-	-	-	-
	2 462	PK	17.48	17.61	17.68	17.96	-	-	-	-
		AV	14.73	14.70	15.05	15.33	-	-	-	-

Mode	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm)							
			Data Rate (Mbps)							
			6	9	12	18	24	36	48	54
802.11g	2 412	PK	20.23	20.86	20.94	21.12	21.35	21.55	21.96	22.18
		AV	10.96	11.34	11.47	11.76	11.83	11.97	12.06	12.11
	2 437	PK	20.89	21.30	21.28	21.45	21.69	21.85	22.16	22.35
		AV	12.53	12.64	12.88	12.99	13.13	13.15	13.18	13.44
	2 462	PK	20.52	21.13	21.17	21.58	21.74	21.95	22.12	22.53
		AV	12.76	13.02	13.04	13.29	13.33	13.37	13.56	13.93

Mode	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm)							
			Data Rate (MCS)							
			0	1	2	3	4	5	6	7
802.11n (HT20)	2 412	PK	20.02	20.19	20.48	20.69	20.70	20.71	21.03	21.62
		AV	10.10	10.46	10.96	11.14	11.31	11.46	11.49	11.53
	2 437	PK	20.56	20.77	21.35	21.44	21.56	21.60	21.75	22.26
		AV	11.99	12.23	12.51	12.85	12.94	12.99	13.08	13.12
	2 462	PK	21.32	21.64	21.97	22.00	22.04	22.25	22.69	22.76
		AV	12.14	12.18	12.53	12.74	12.85	13.00	12.97	13.06

Mode	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm)							
			Data Rate (MCS)							
			0	1	2	3	4	5	6	7
802.11n (HT40)	2 422	PK	14.52	14.62	14.84	14.85	14.93	15.13	15.66	15.84
		AV	6.37	6.61	6.72	6.78	6.85	6.95	6.97	7.01
	2 437	PK	18.84	18.90	18.97	19.15	19.26	19.45	20.04	20.06
		AV	11.53	11.68	11.79	11.86	11.98	12.01	12.15	12.25
	2 452	PK	19.27	19.35	19.41	19.58	19.73	19.89	20.24	20.50
		AV	11.52	11.63	11.74	11.76	11.72	11.80	11.90	11.94

- Power Supply: 12 V

Mode	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm)							
			Data Rate (Mbps)							
			1	2	5.5	11	-	-	-	-
802.11b	2 412	PK	15.56	15.64	16.08	16.68	-	-	-	-
		AV	13.42	13.54	13.72	14.22	-	-	-	-
	2 437	PK	17.50	17.46	17.52	17.83	-	-	-	-
		AV	14.66	14.69	14.81	15.19	-	-	-	-
	2 462	PK	17.39	17.55	17.56	17.91	-	-	-	-
		AV	14.65	14.60	14.97	15.23	-	-	-	-

Mode	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm)							
			Data Rate (Mbps)							
			6	9	12	18	24	36	48	54
802.11g	2 412	PK	20.17	20.74	20.87	21.05	21.26	21.45	21.76	22.02
		AV	10.84	11.21	11.34	11.67	11.78	11.86	11.98	12.04
	2 437	PK	20.49	21.10	21.04	21.42	21.57	21.74	21.92	22.24
		AV	12.42	12.59	12.72	12.98	13.01	13.05	13.16	13.31
	2 462	PK	20.46	21.01	21.08	21.52	21.65	21.86	22.00	22.43
		AV	12.55	12.76	12.94	13.09	13.12	13.19	13.25	13.46

Mode	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm)							
			Data Rate (MCS)							
			0	1	2	3	4	5	6	7
802.11n (HT20)	2 412	PK	19.98	20.07	20.31	20.56	20.68	20.74	21.01	21.57
		AV	9.89	10.26	10.75	11.02	11.28	11.39	11.42	11.47
	2 437	PK	20.54	20.69	21.29	21.38	21.43	21.53	21.69	22.16
		AV	11.98	12.19	12.49	12.75	12.92	13.01	13.04	13.08
	2 462	PK	21.18	21.22	21.74	21.89	21.92	22.04	22.56	22.63
		AV	12.04	12.11	12.53	12.77	12.94	12.97	13.00	13.02

Mode	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm)							
			Data Rate (MCS)							
			0	1	2	3	4	5	6	7
802.11n (HT40)	2 422	PK	14.43	14.58	14.76	14.84	14.91	15.08	15.57	15.72
		AV	6.29	6.57	6.64	6.71	6.83	6.91	6.95	7.02
	2 437	PK	18.74	18.82	18.94	19.02	19.18	19.33	19.75	19.94
		AV	11.48	11.65	11.71	11.78	11.84	11.96	12.06	12.18
	2 452	PK	19.16	19.25	19.33	19.47	19.67	19.83	20.16	20.46
		AV	11.43	11.66	11.75	11.80	11.86	12.04	12.19	12.28

5.2. 6 dB Bandwidth

■ Test Requirements and limit, Part 15.247(a) & RSS-247 [5.2]

The bandwidth at 6 dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the EUT's antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

The minimum permissible 6 dB bandwidth is 500 kHz.

5.2.1. Test Setup

Refer to the APPENDIX I.

5.2.2. Test Procedures

- KDB558074 D01v05r02 - Section 8.2
- ANSI C63.10-2013 – Section 11.8.2

1. Set resolution bandwidth (RBW) = 100 kHz
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = **Peak**.
4. Trace mode = **max hold**.
5. Sweep = **auto couple**.
6. Allow the trace to stabilize.
7. Option 1 - Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Option 2 - The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW $\geq 3 \times$ RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

5.2.3. Test Results

Test Mode	Frequency	Test Results (MHz)	
		24 V	12 V
TM 1	2 412	9.12	9.51
	2 437	9.96	9.98
	2 462	9.76	9.86
TM 2	2 412	16.39	16.39
	2 437	16.39	16.38
	2 462	16.39	16.41
TM 3	2 412	17.57	17.56
	2 437	17.59	17.58
	2 462	17.53	17.56
TM 4	2 422	35.74	35.83
	2 437	35.54	35.78
	2 452	35.76	35.80

RESULT PLOTS

- Power Supply: 24 V


6 dB Bandwidth

TM 1 & 2 412



6 dB Bandwidth

TM 1 & 2 437

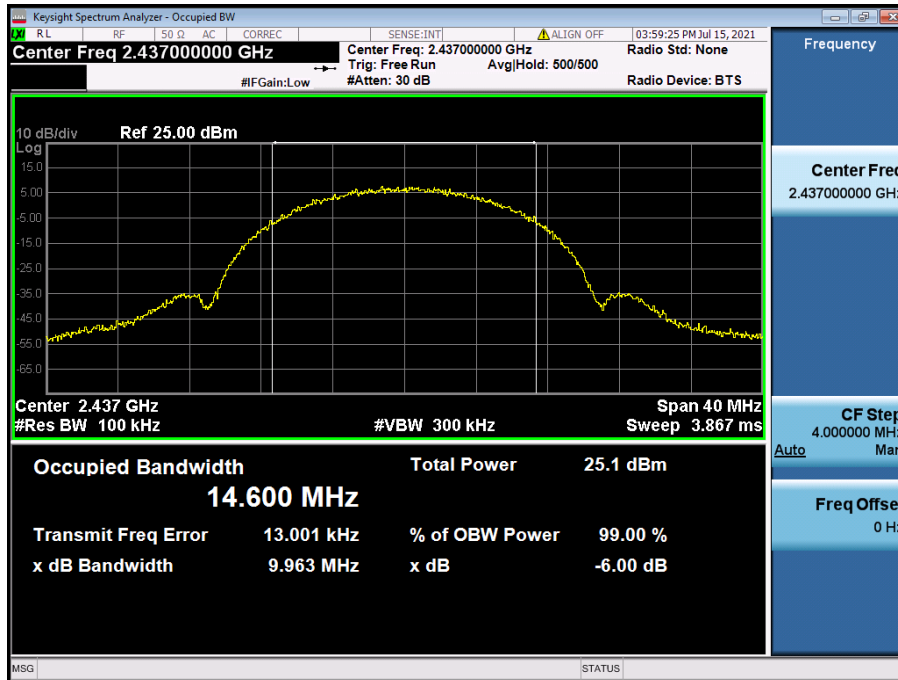


6 dB Bandwidth

TM 1 & 2 462




6 dB Bandwidth

TM 2 & 2 412

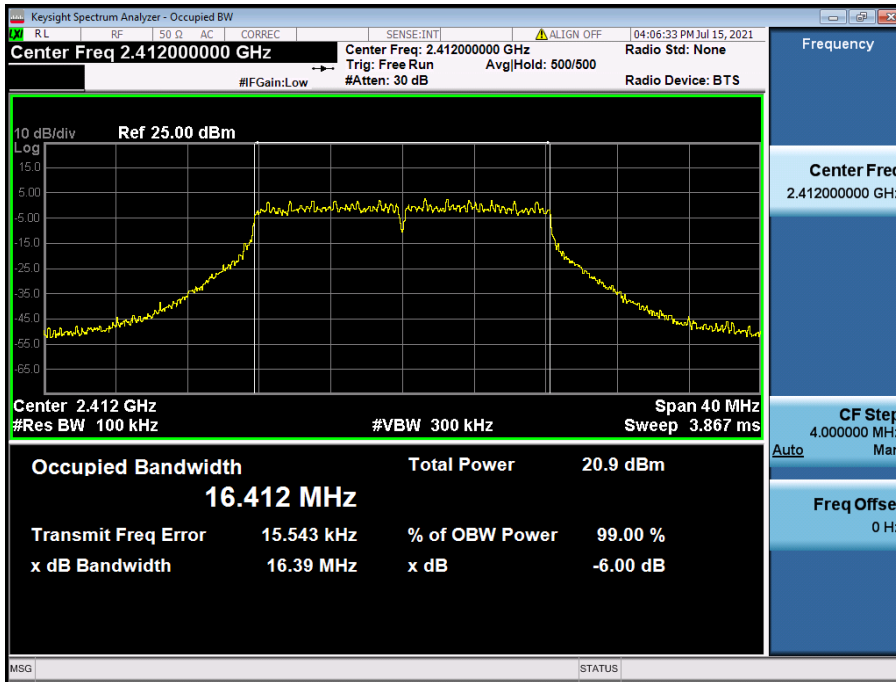


6 dB Bandwidth

TM 2 & 2 437

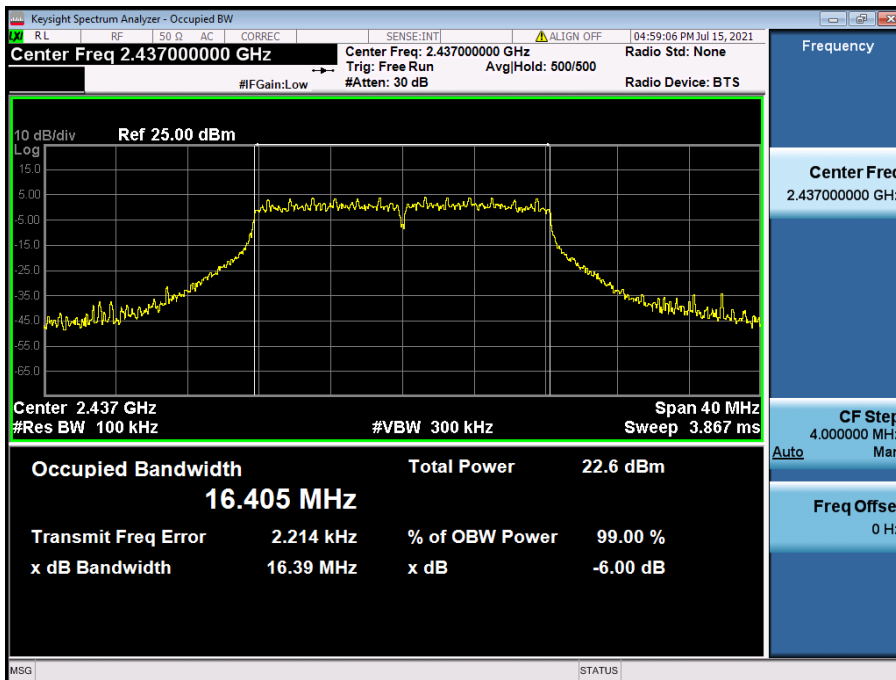


6 dB Bandwidth

TM 2 & 2 462

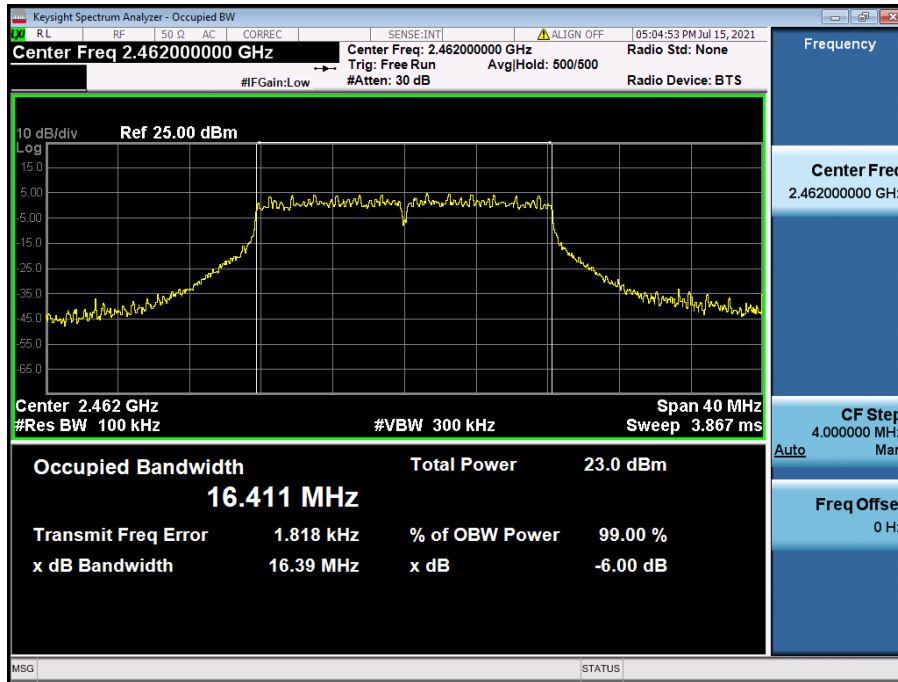


6 dB Bandwidth

TM 3 & 2 412

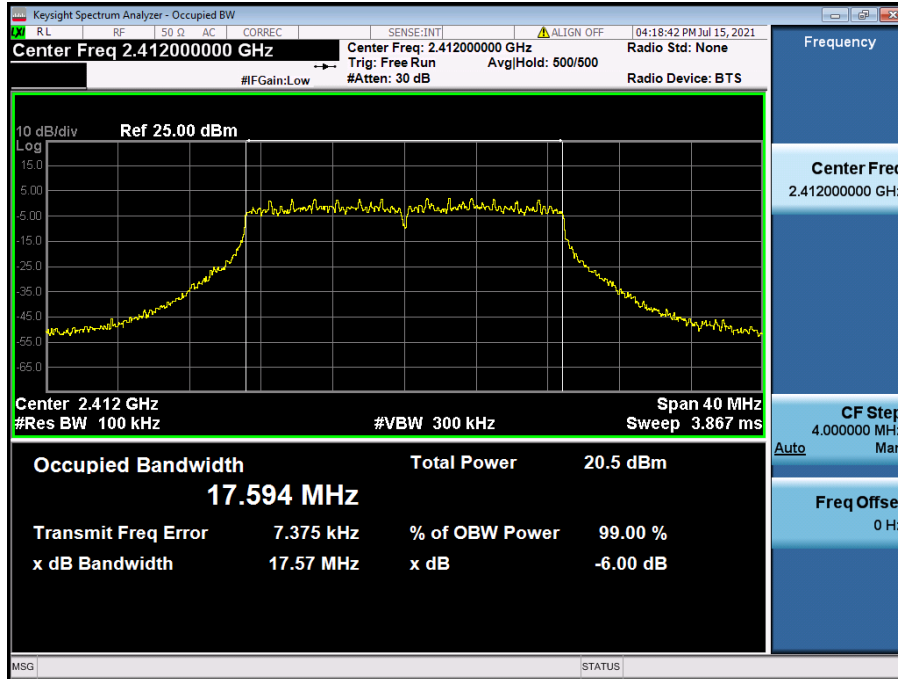


6 dB Bandwidth

TM 3 & 2 437

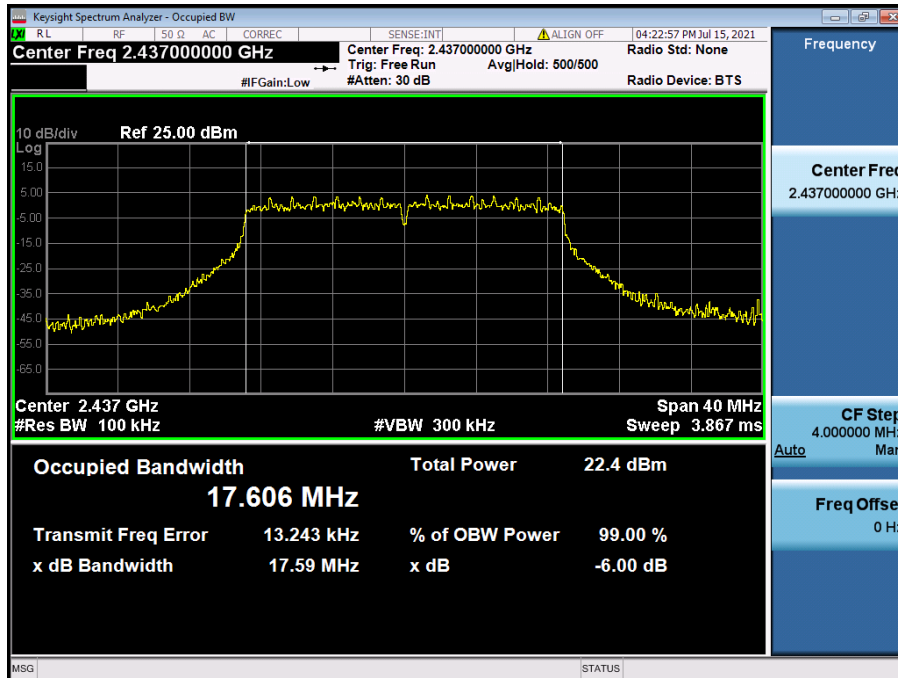


6 dB Bandwidth

TM 3 & 2 462

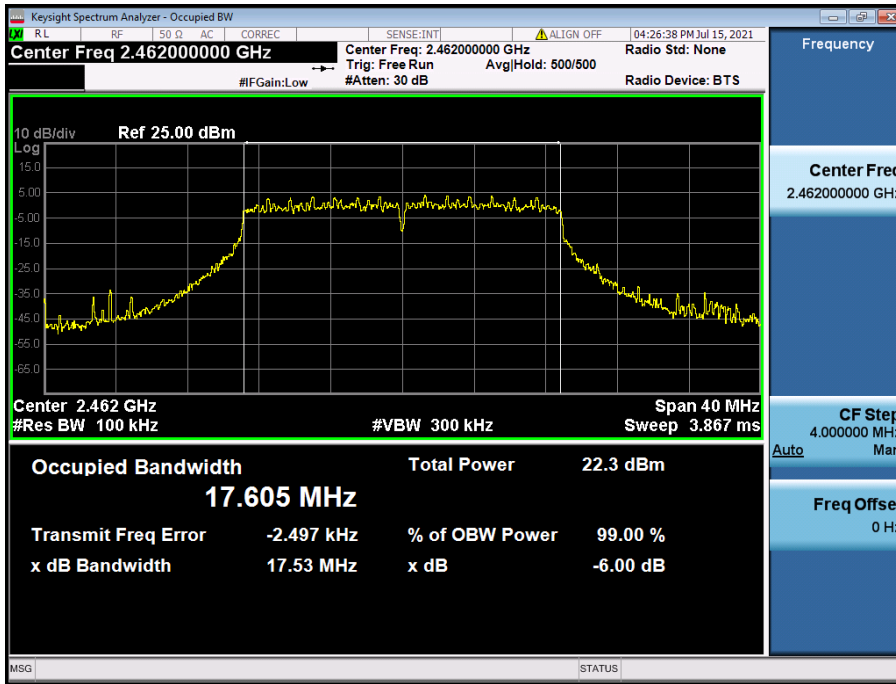


6 dB Bandwidth

TM 4 & 2 422

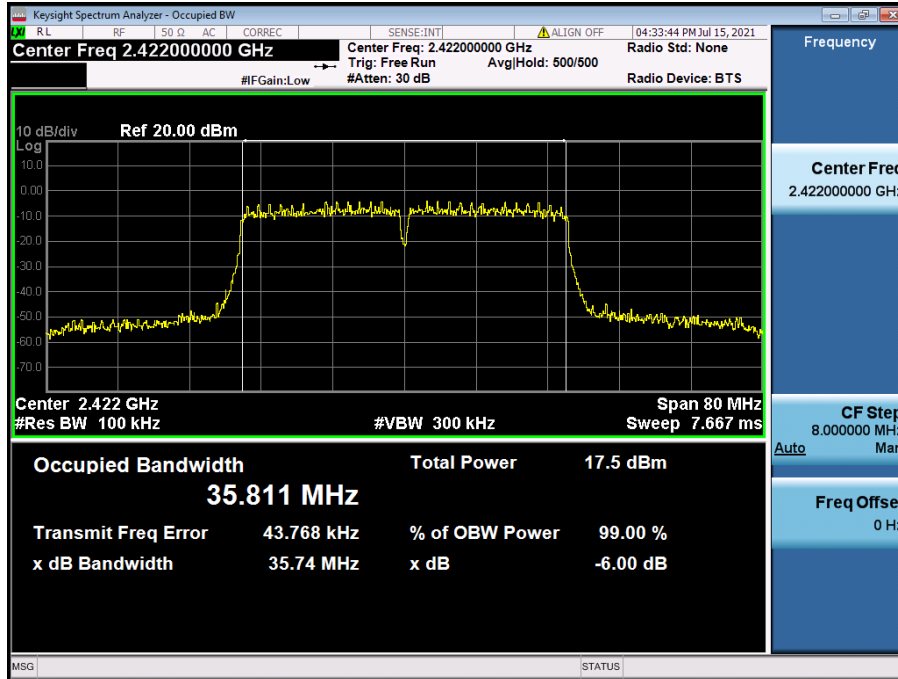


6 dB Bandwidth

TM 4 & 2 437

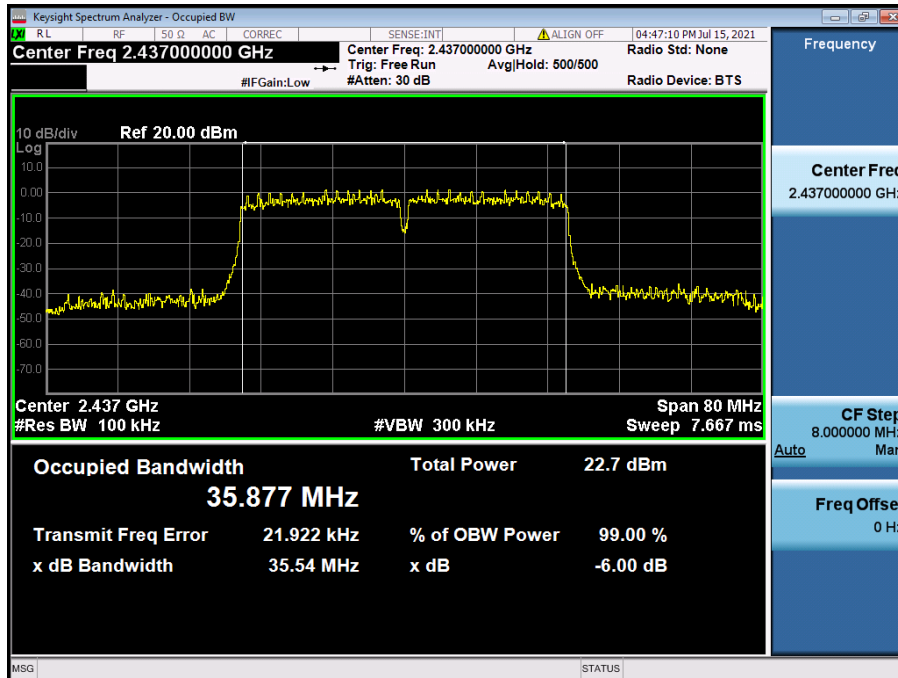

6 dB Bandwidth


TM 4 & 2 452

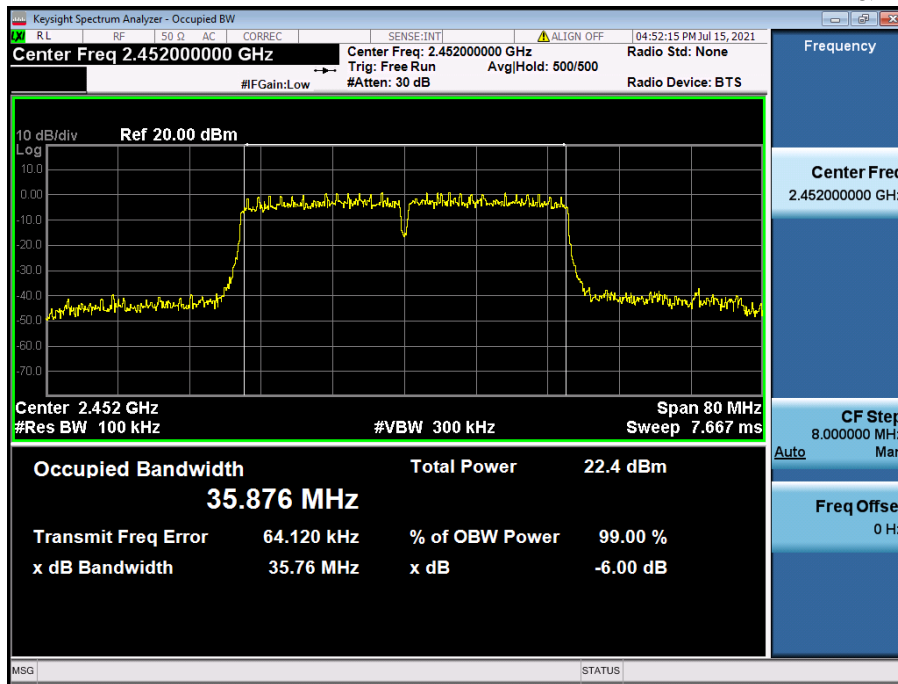

- Power Supply: 12 V


6 dB Bandwidth

TM 1 & 2 412

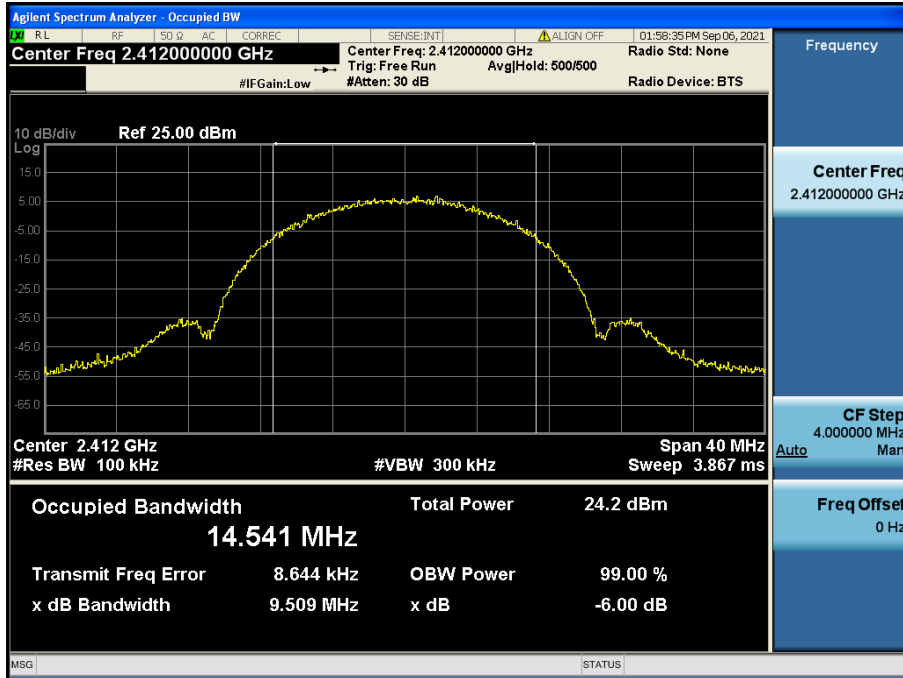


6 dB Bandwidth

TM 1 & 2 437

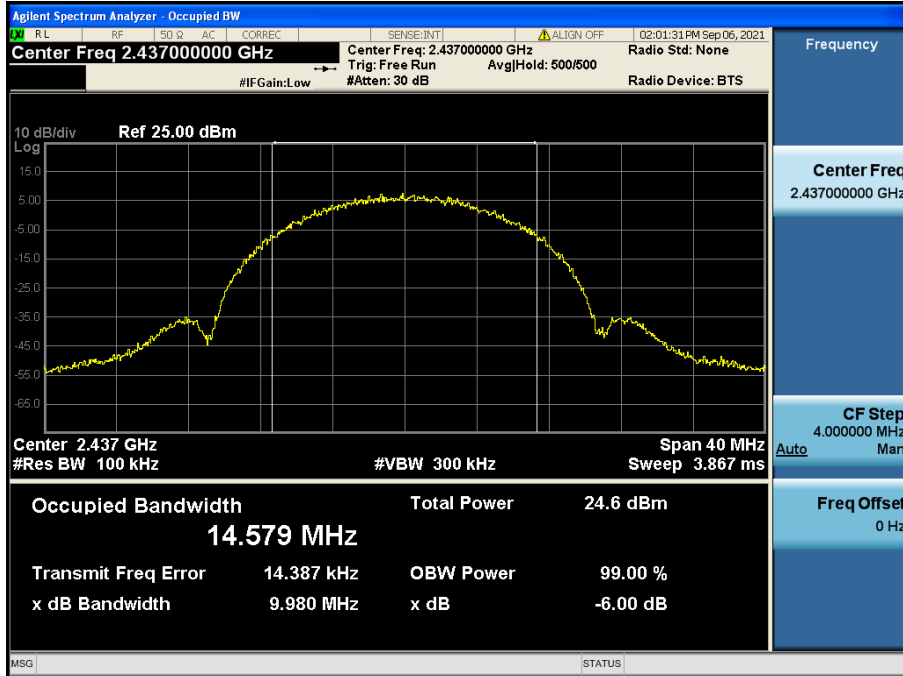


6 dB Bandwidth

TM 1 & 2 462

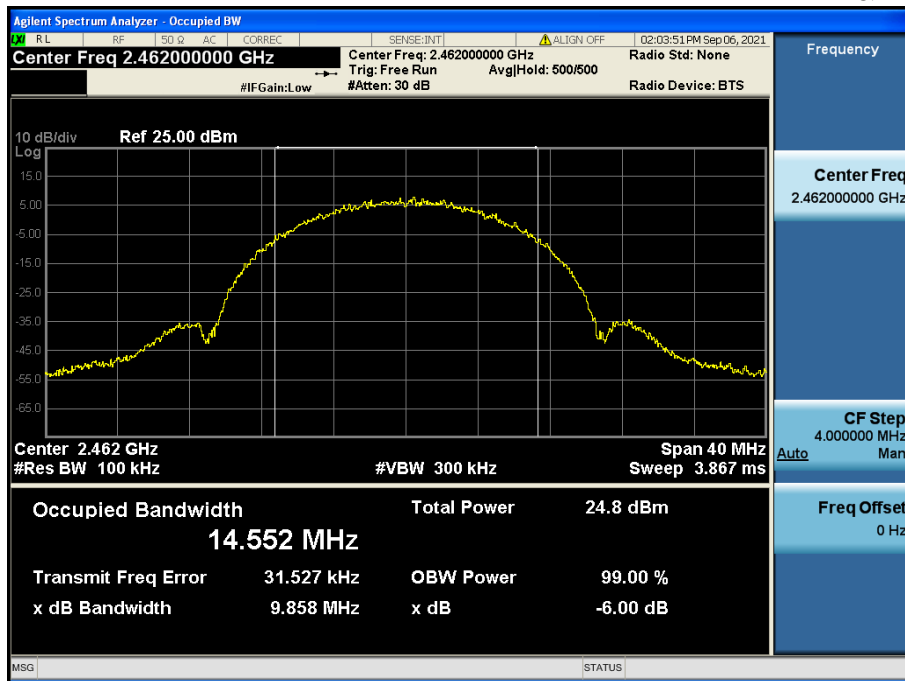


6 dB Bandwidth

TM 2 & 2 412

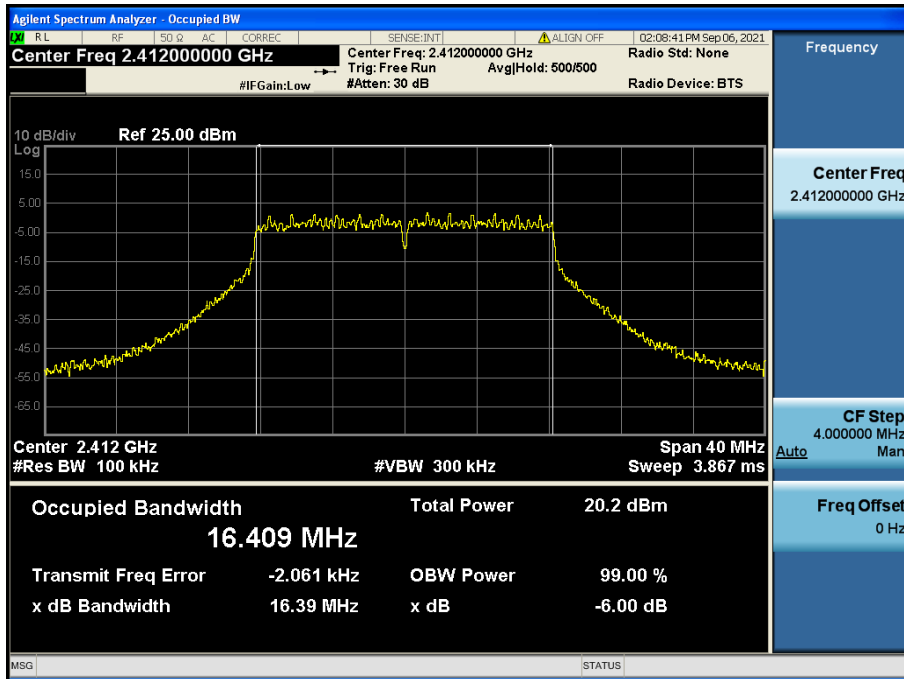


6 dB Bandwidth

TM 2 & 2 437

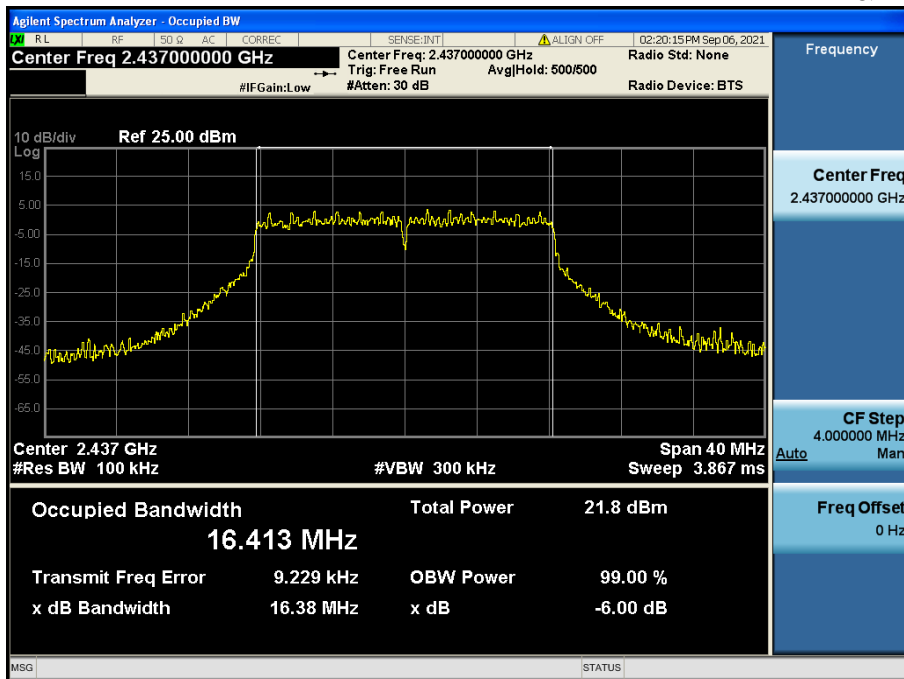


6 dB Bandwidth

TM 2 & 2 462

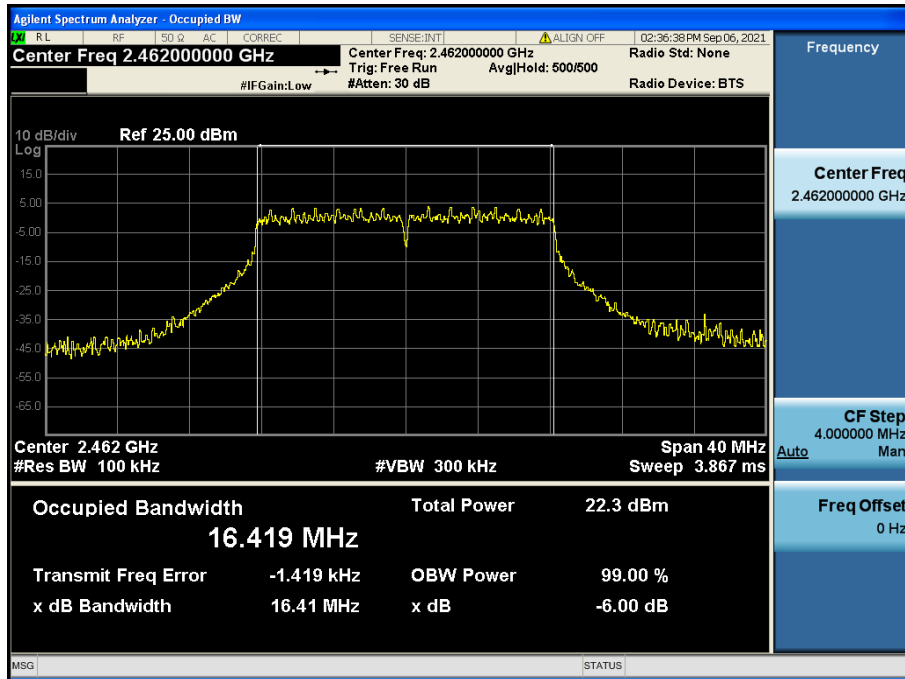


6 dB Bandwidth

TM 3 & 2 412

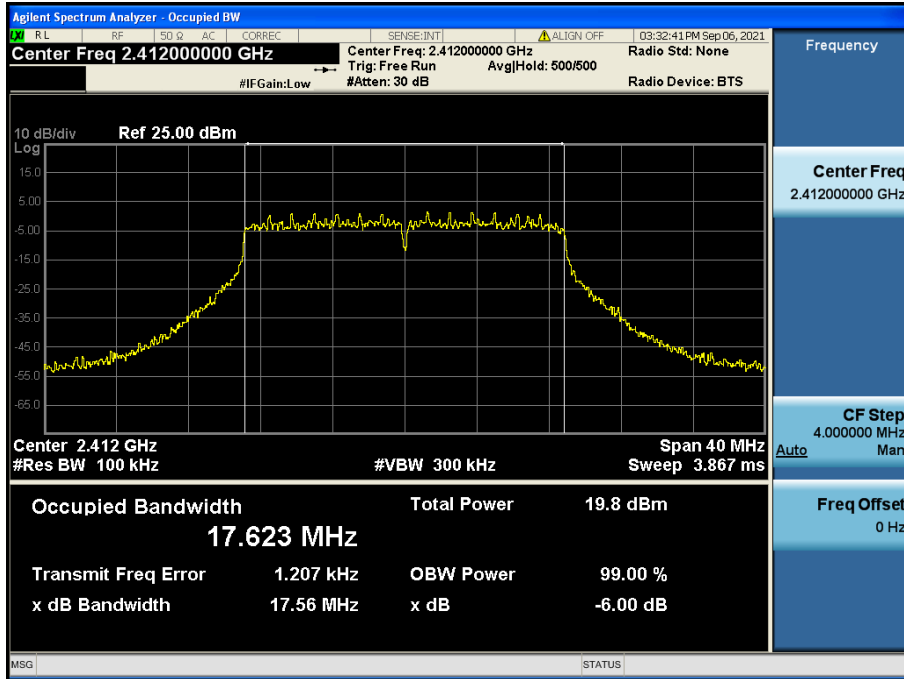


6 dB Bandwidth

TM 3 & 2 437

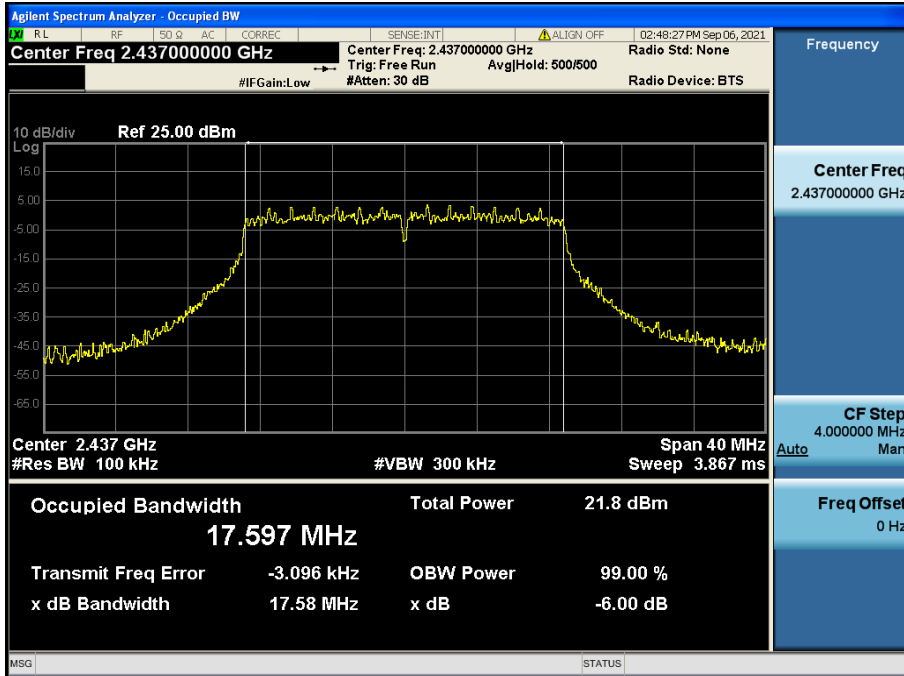


6 dB Bandwidth

TM 3 & 2 462

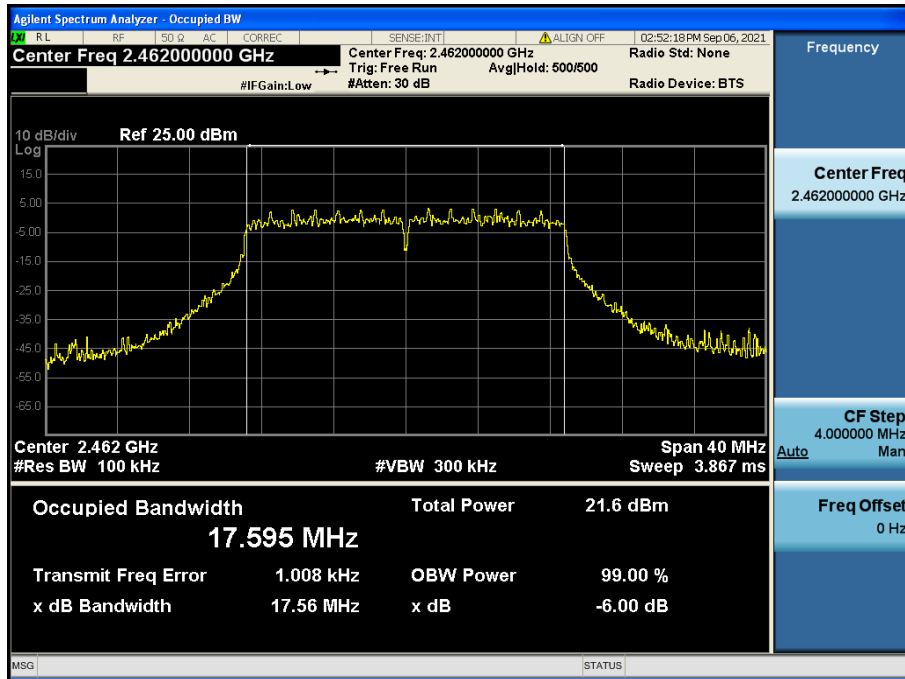


6 dB Bandwidth

TM 4 & 2 422

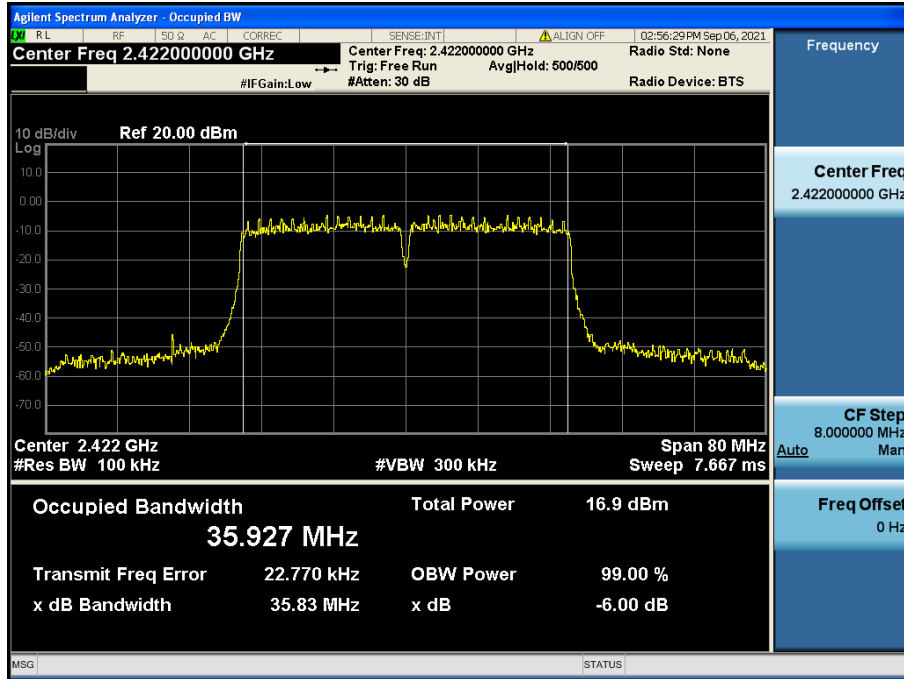


6 dB Bandwidth

TM 4 & 2 437

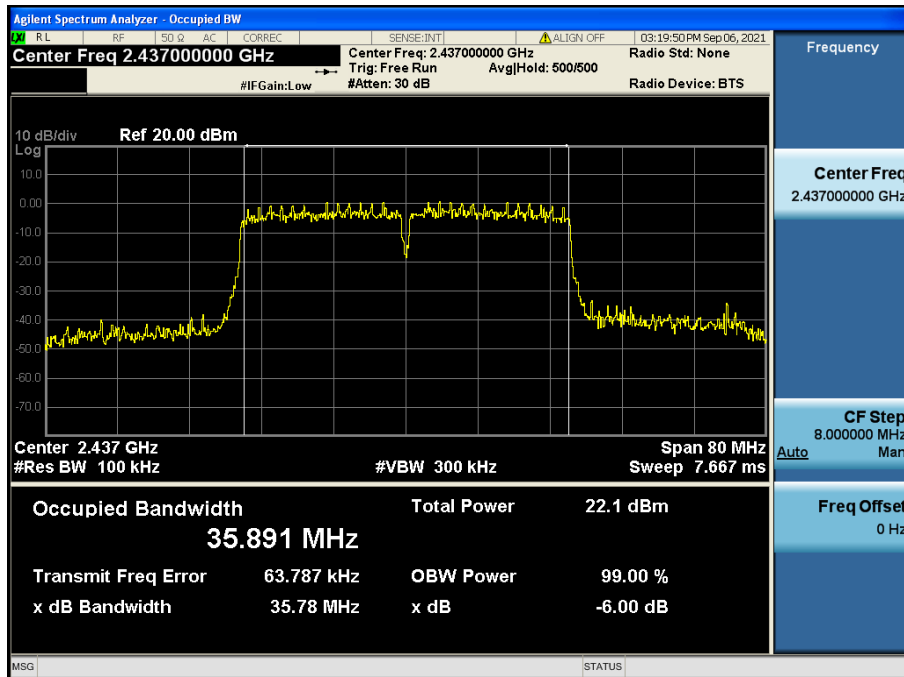

6 dB Bandwidth

TM 4 & 2 452

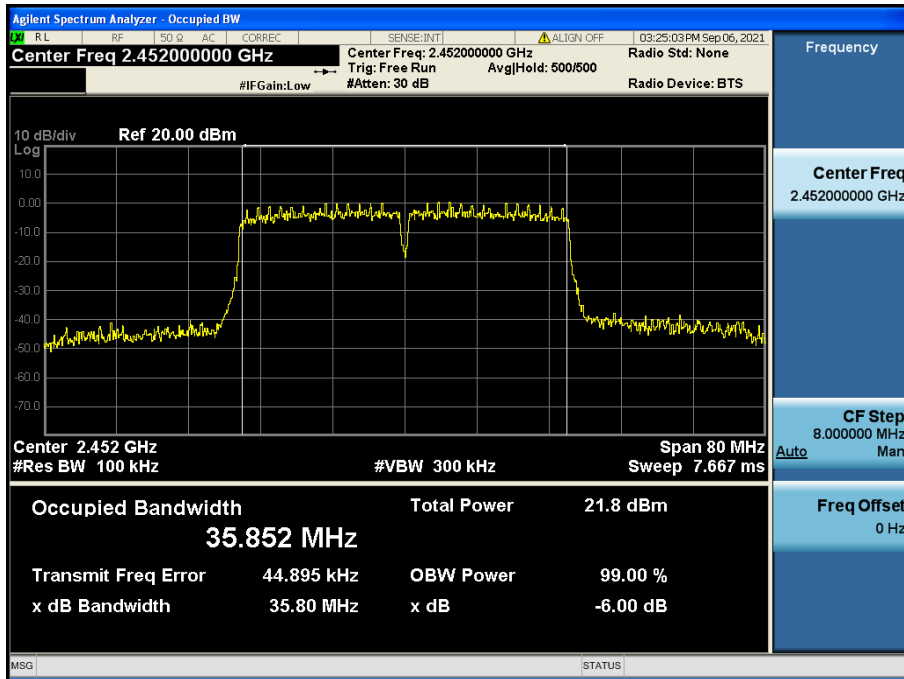

5.3. Power Spectral Density

■ Test requirements and limit, Part 15.247(e) & RSS-247 [5.2]

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

Minimum Standard

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission

5.3.1. Test Setup

Refer to the APPENDIX I.

5.3.2. Test Procedures

- KDB558074 D01v05r02 - Section 8.4
- ANSI C63.10-2013 – Section 11.10.2

Method PKPSD (peak PSD)

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to **1.5 times** the DTS bandwidth.
3. Set the RBW : **3 kHz ≤ RBW ≤ 100 kHz**.
4. Set the VBW ≥ **3 x RBW**.
5. Detector = **peak**.
6. Sweep time = **auto couple**.
7. Trace mode = **max hold**.
8. Allow trace to fully stabilize.
9. Use the **peak marker function** to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.3.3. Test Results


Test Mode	Frequency	RBW	PKPSD (dBm)		Limit (dBm)
			24 V	12 V	
TM 1	2 412	3 kHz	-6.92	-6.89	8.00
	2 437	3 kHz	-6.45	-6.98	8.00
	2 462	3 kHz	-5.91	-6.13	8.00
TM 2	2 412	3 kHz	-11.74	-12.62	8.00
	2 437	3 kHz	-10.17	-11.34	8.00
	2 462	3 kHz	-10.21	-10.23	8.00
TM 3	2 412	3 kHz	-13.11	-13.56	8.00
	2 437	3 kHz	-11.39	-11.50	8.00
	2 462	3 kHz	-10.96	-11.36	8.00
TM 4	2 422	3 kHz	-20.51	-20.38	8.00
	2 437	3 kHz	-15.30	-15.88	8.00
	2 452	3 kHz	-15.55	-16.05	8.00

RESULT PLOTS

- Power Supply: 24 V


Power Spectral Density

TM 1 & 2 412

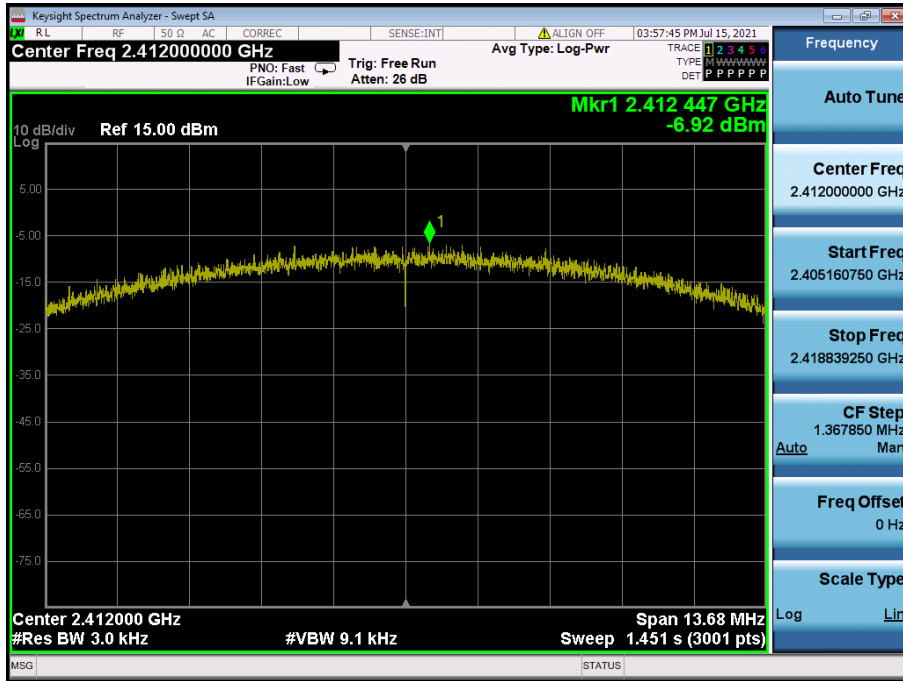


Power Spectral Density

TM 1 & 2 437

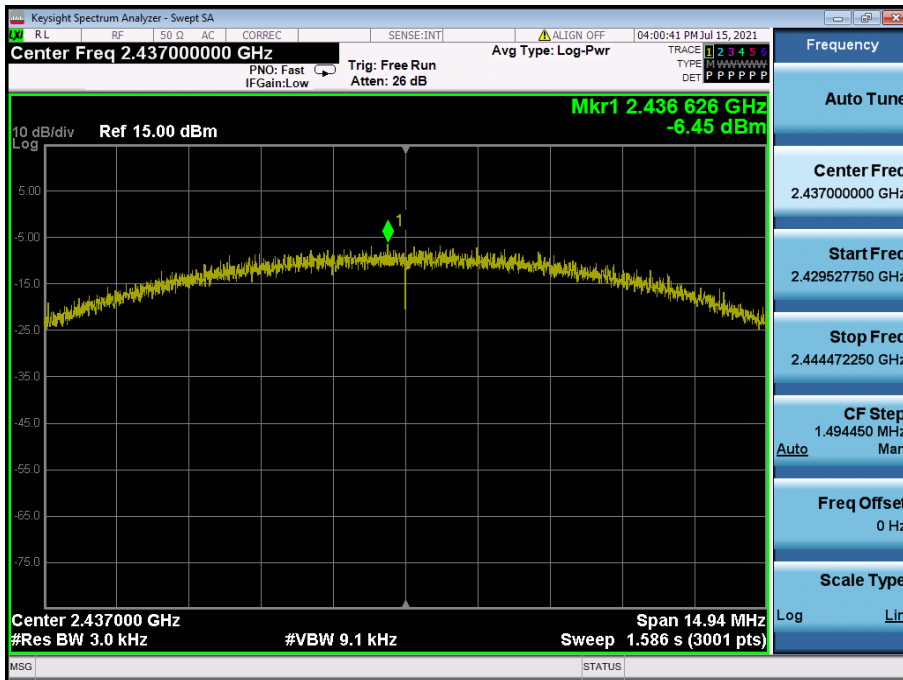


Power Spectral Density

TM 1 & 2 462

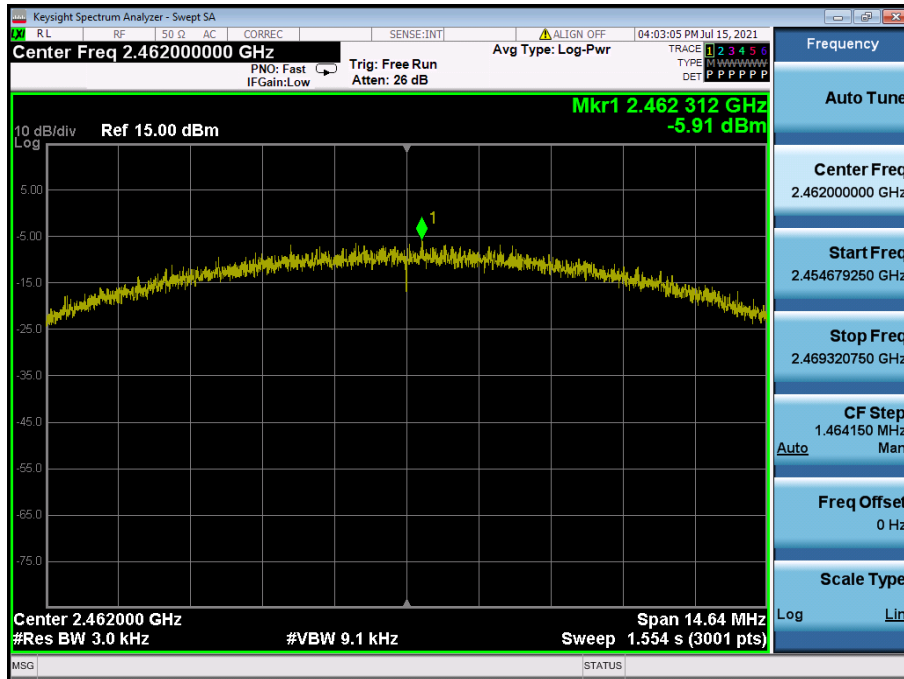


Power Spectral Density

TM 2 & 2 412

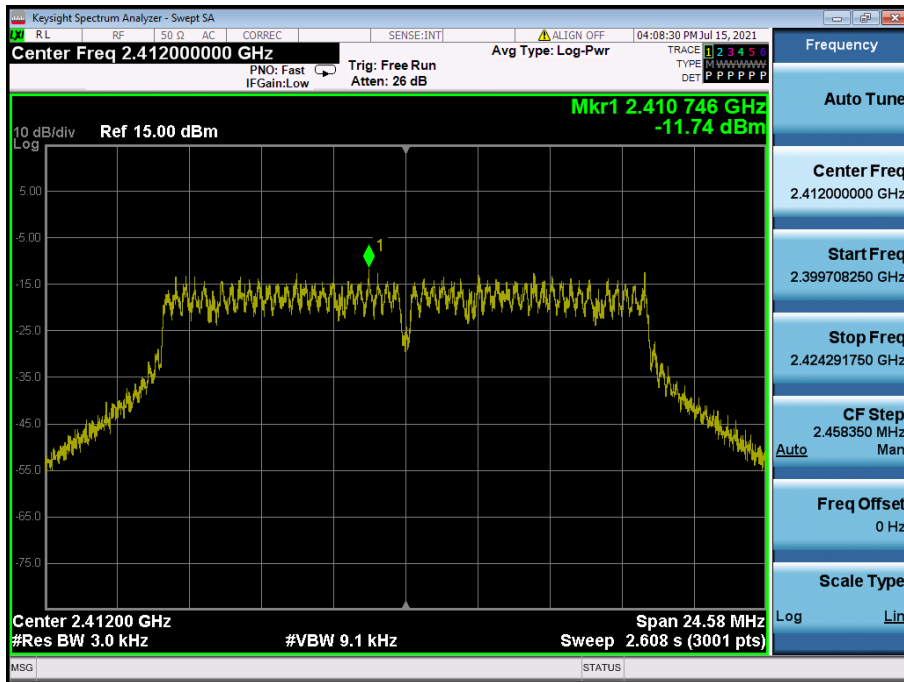


Power Spectral Density

TM 2 & 2 437

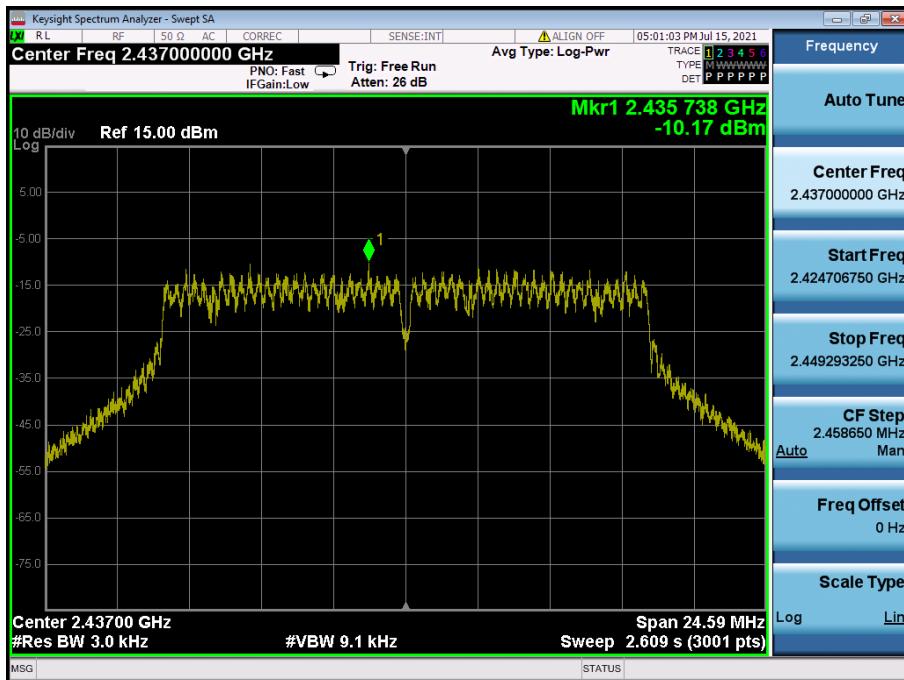


Power Spectral Density

TM 2 & 2 462

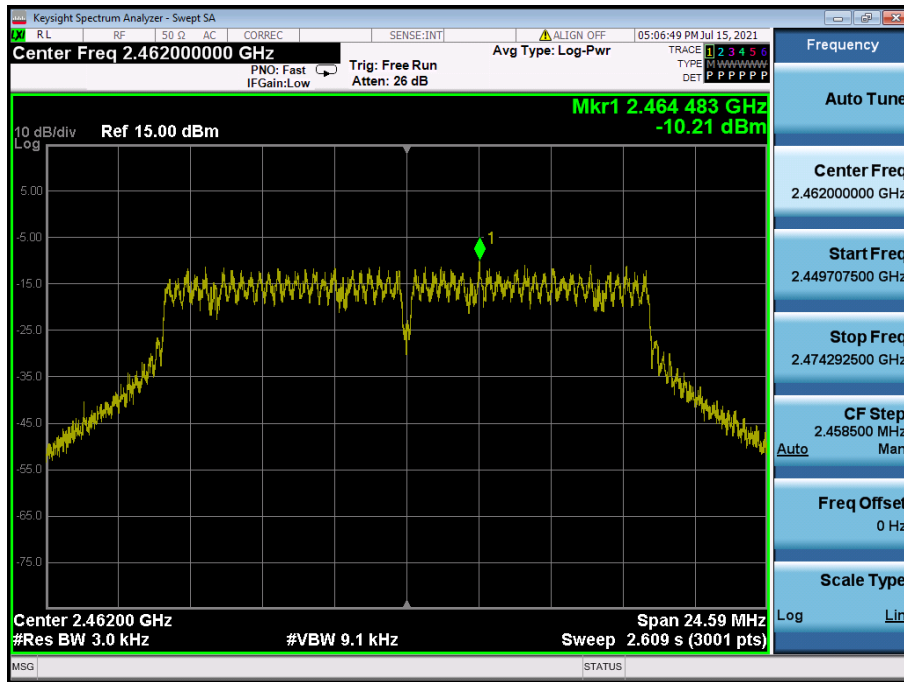


Power Spectral Density

TM 3 & 2 412

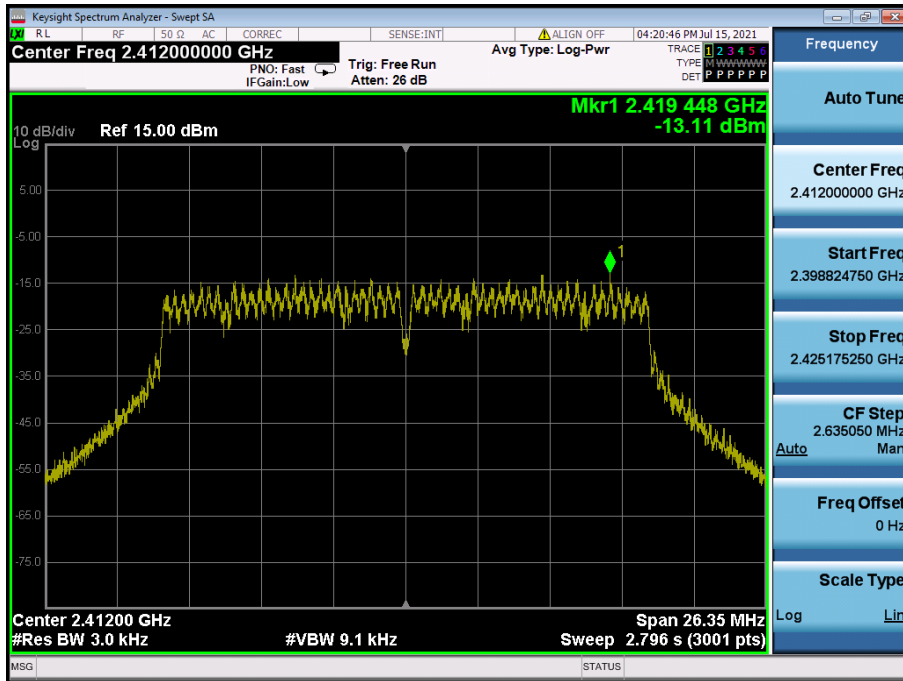


Power Spectral Density

TM 3 & 2 437

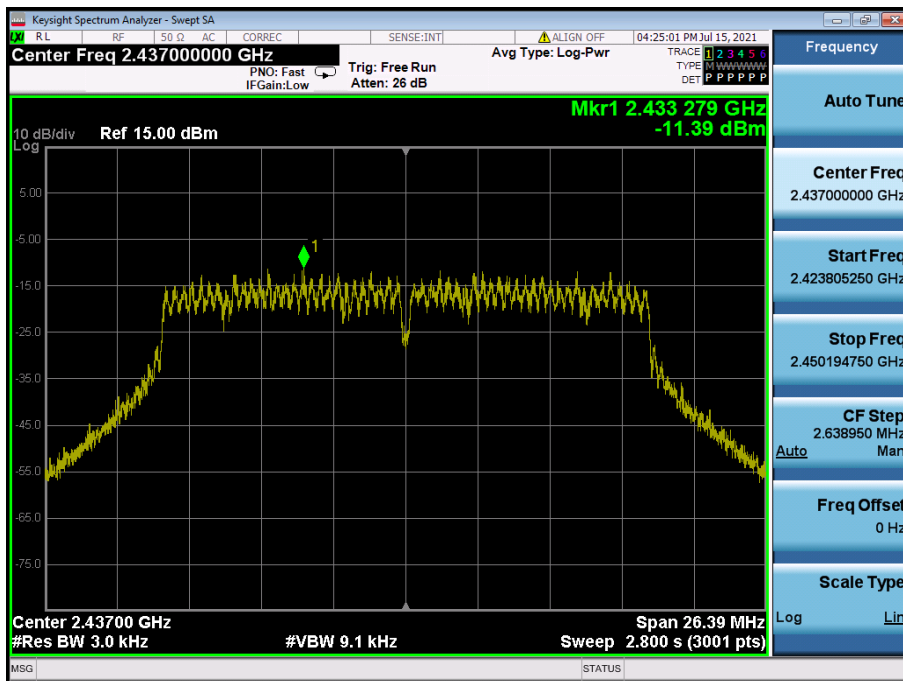


Power Spectral Density

TM 3 & 2 462

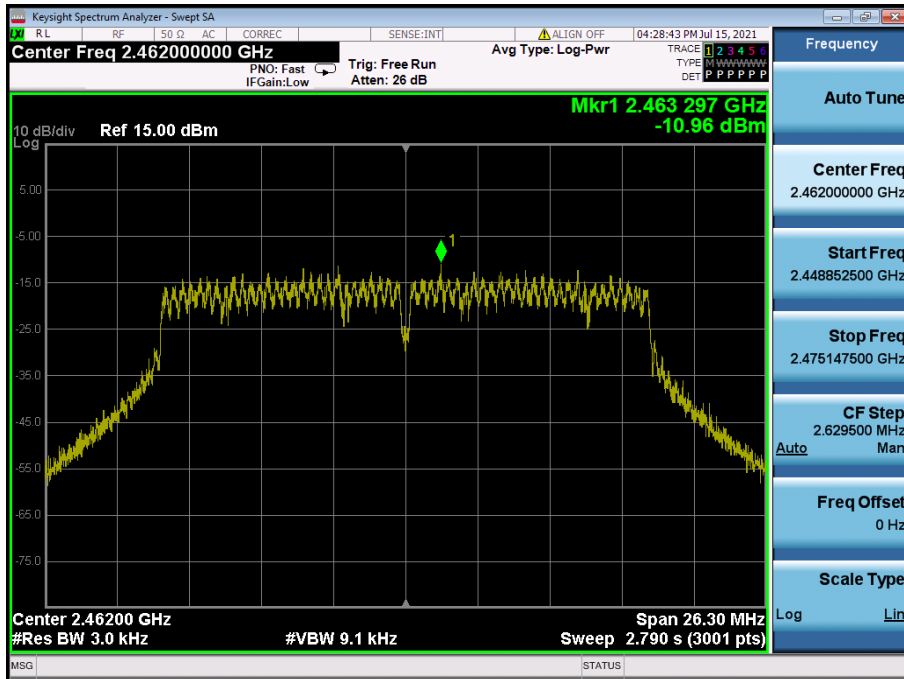


Power Spectral Density

TM 4 & 2 422

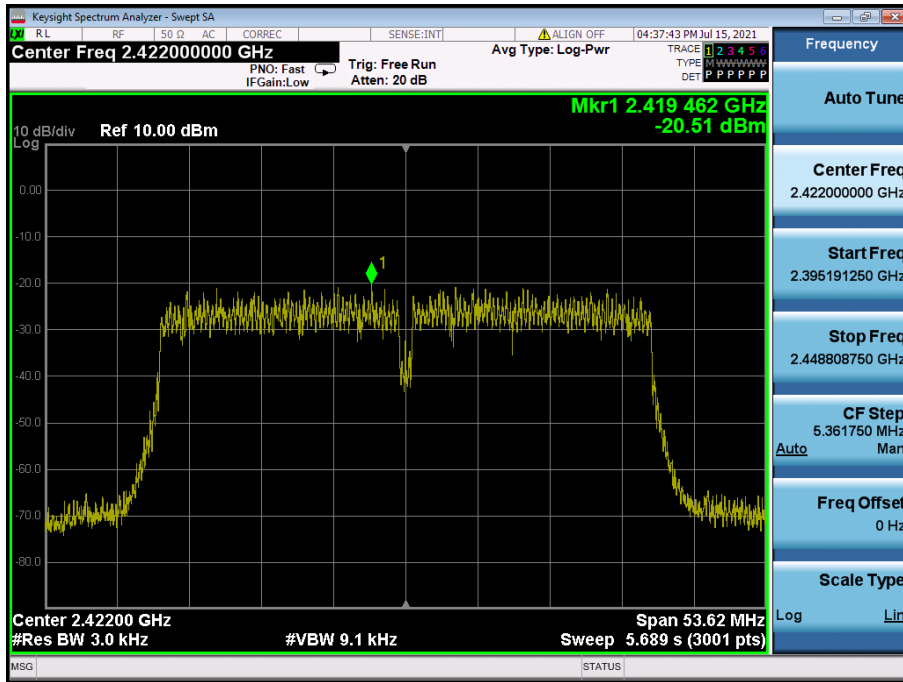


Power Spectral Density

TM 4 & 2 437

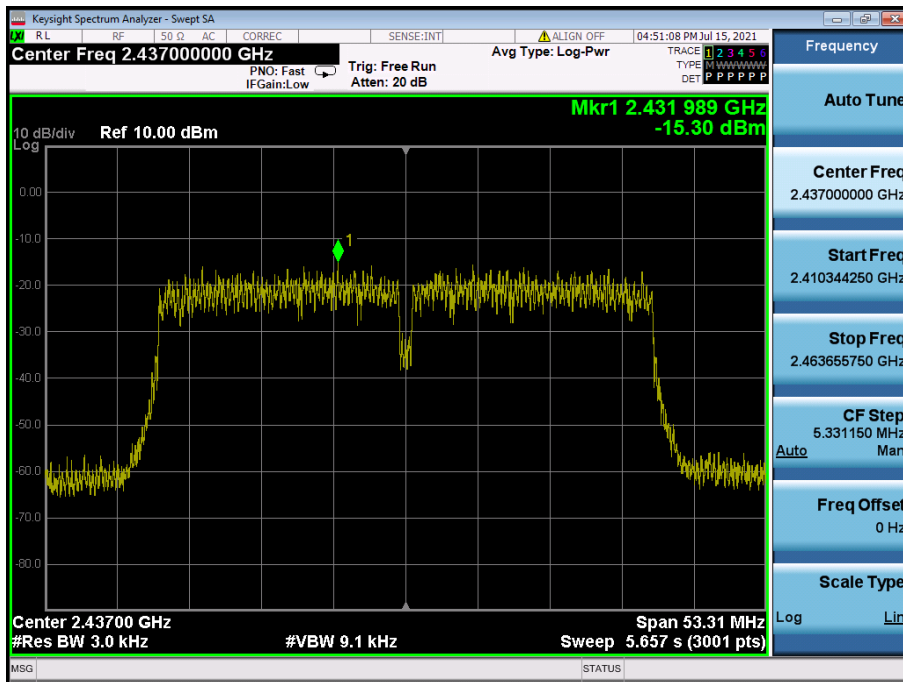

Power Spectral Density


TM 4 & 2 452

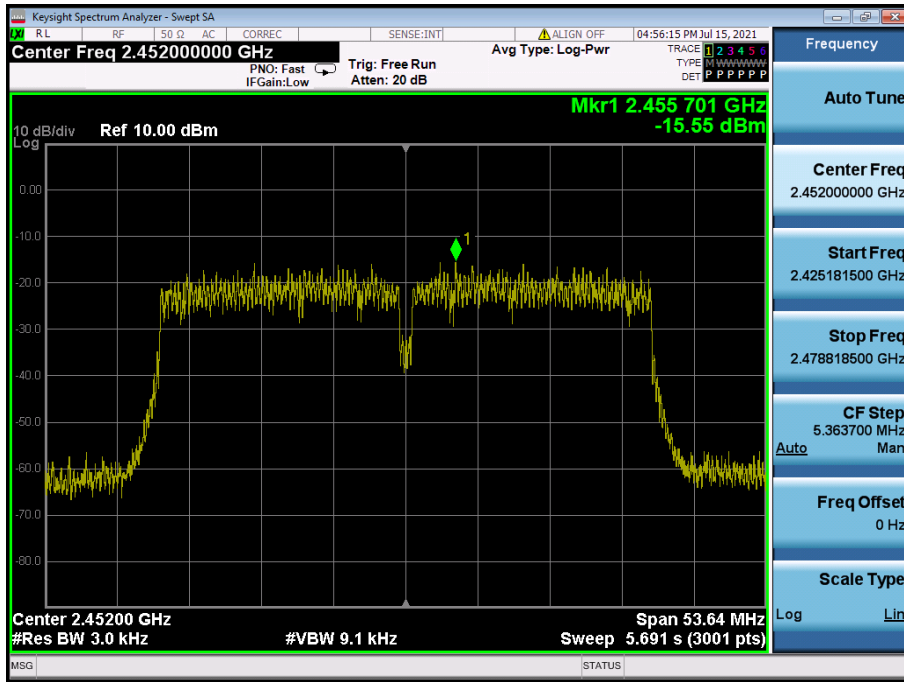

- Power Supply: 12 V


Power Spectral Density

TM 1 & 2 412

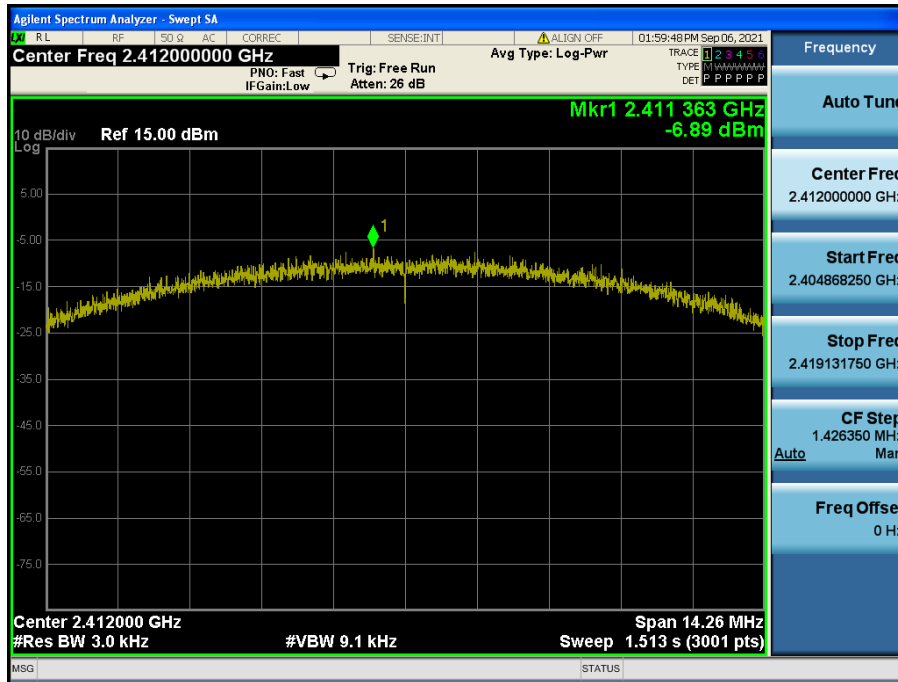


Power Spectral Density

TM 1 & 2 437

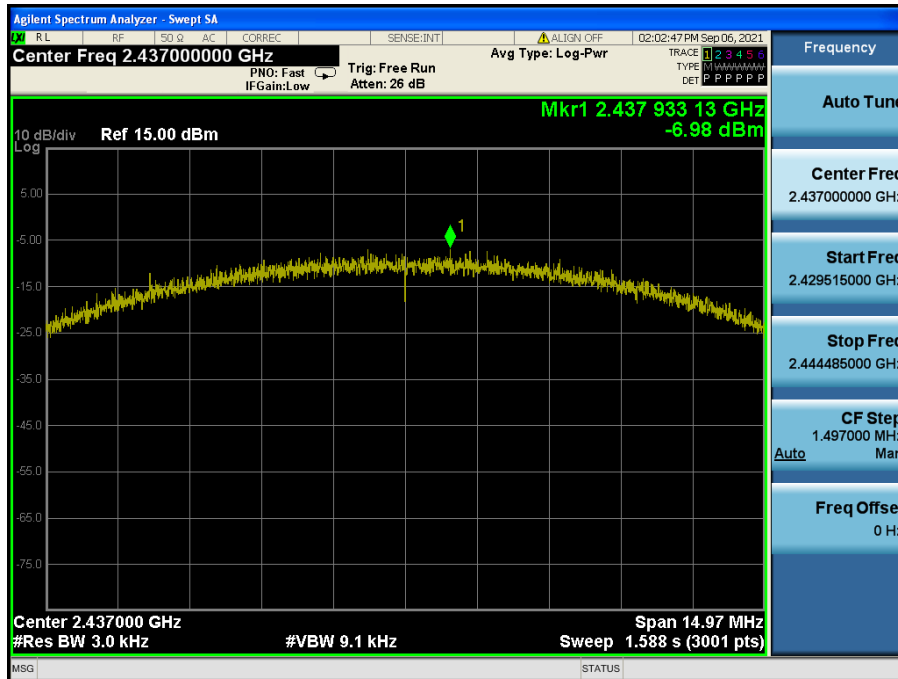


Power Spectral Density

TM 1 & 2 462

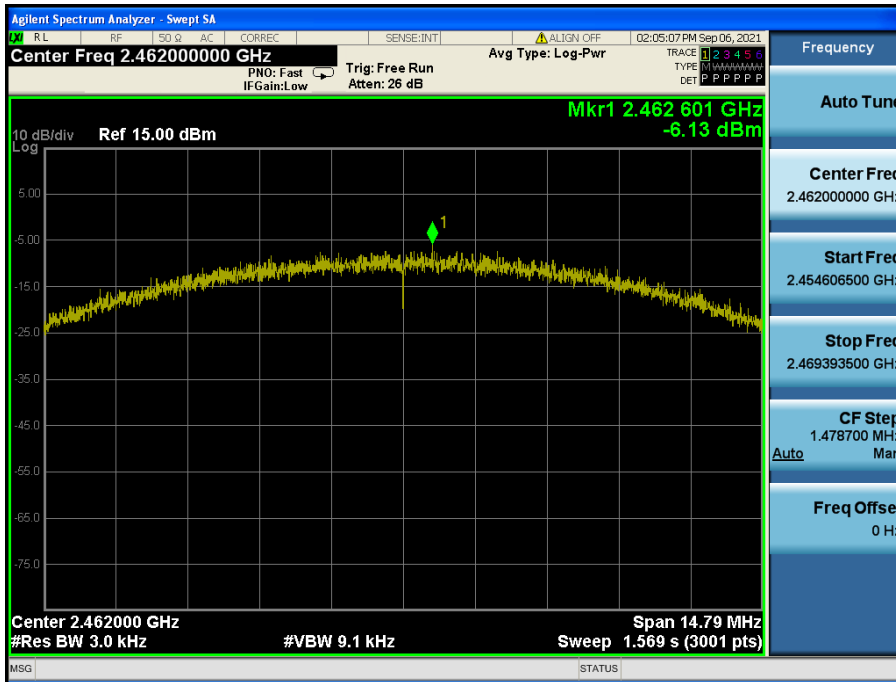


Power Spectral Density

TM 2 & 2 412

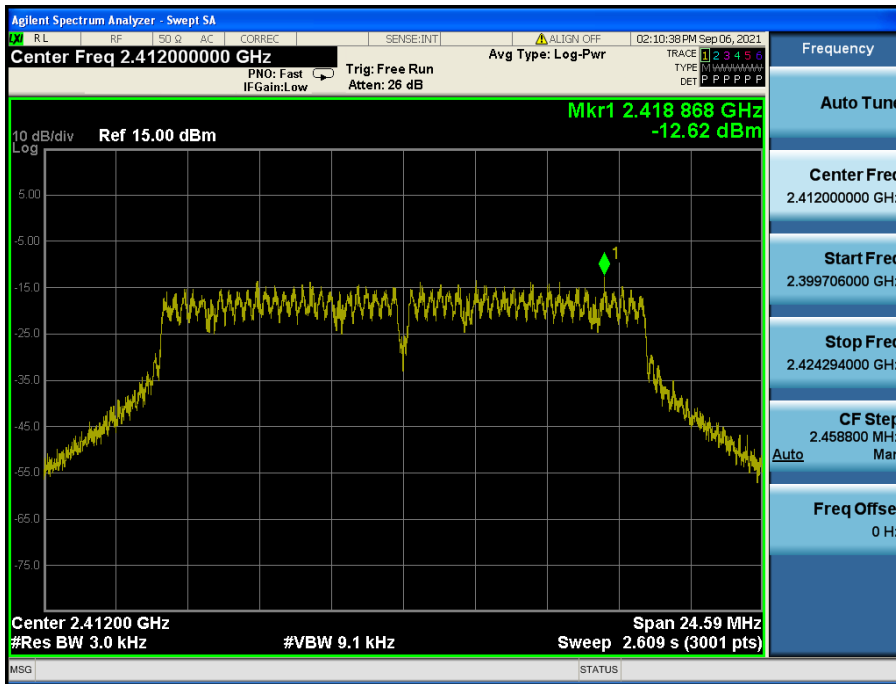


Power Spectral Density

TM 2 & 2 437

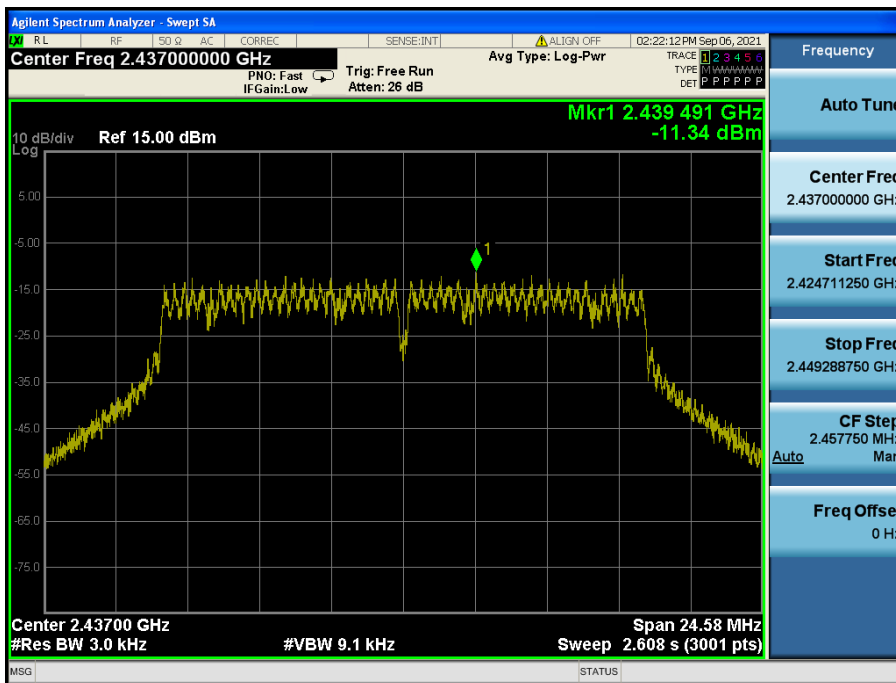


Power Spectral Density

TM 2 & 2 462

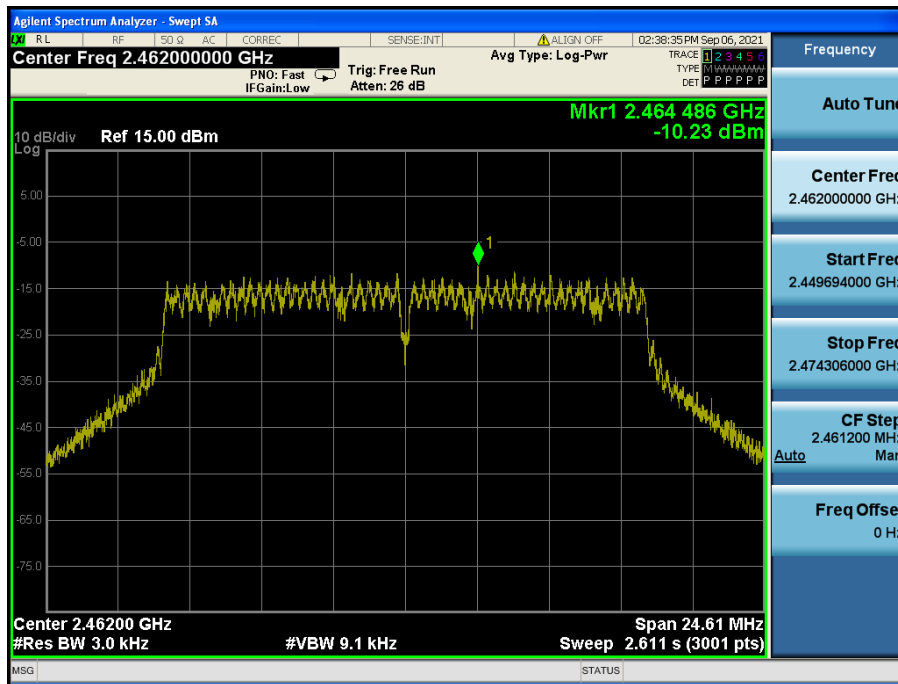


Power Spectral Density

TM 3 & 2 412

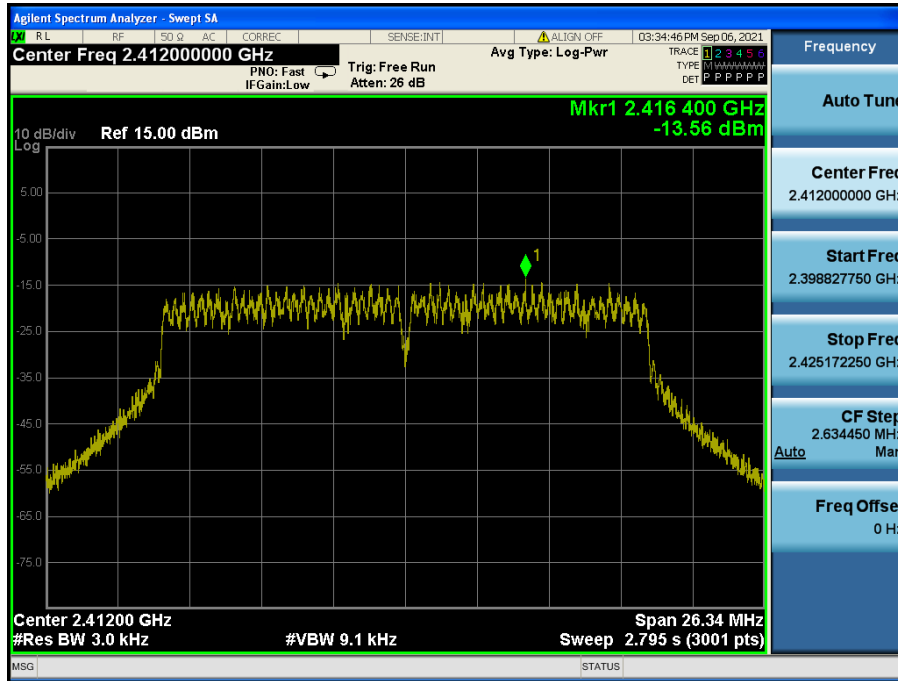


Power Spectral Density

TM 3 & 2 437

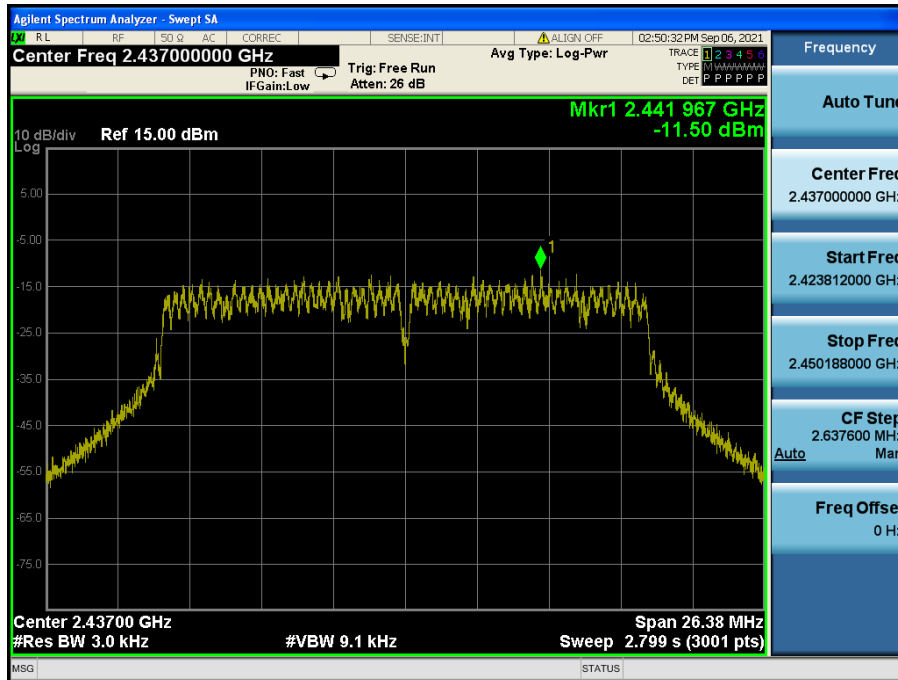


Power Spectral Density

TM 3 & 2 462

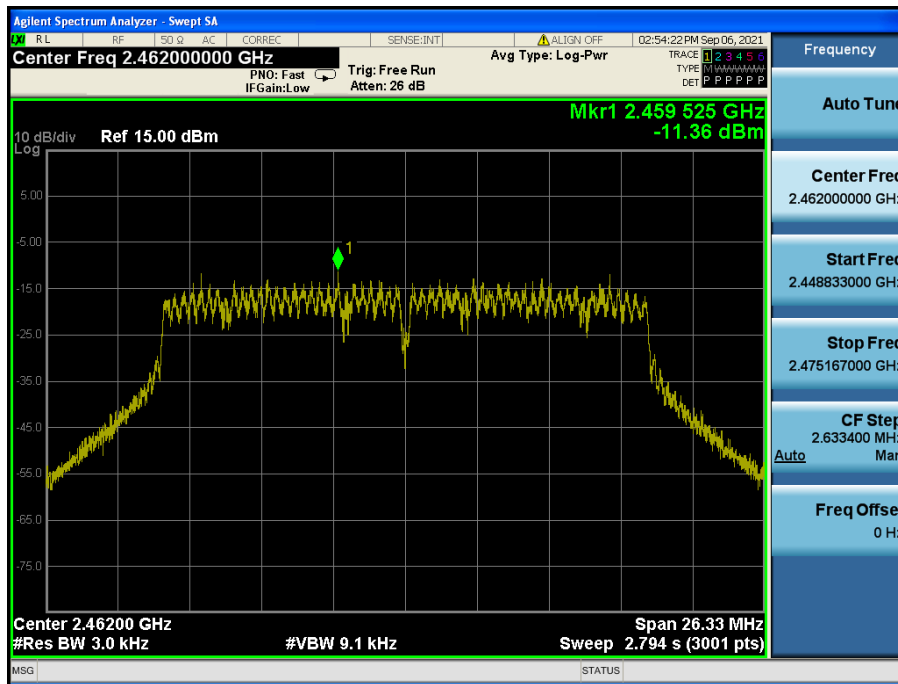


Power Spectral Density

TM 4 & 2 422

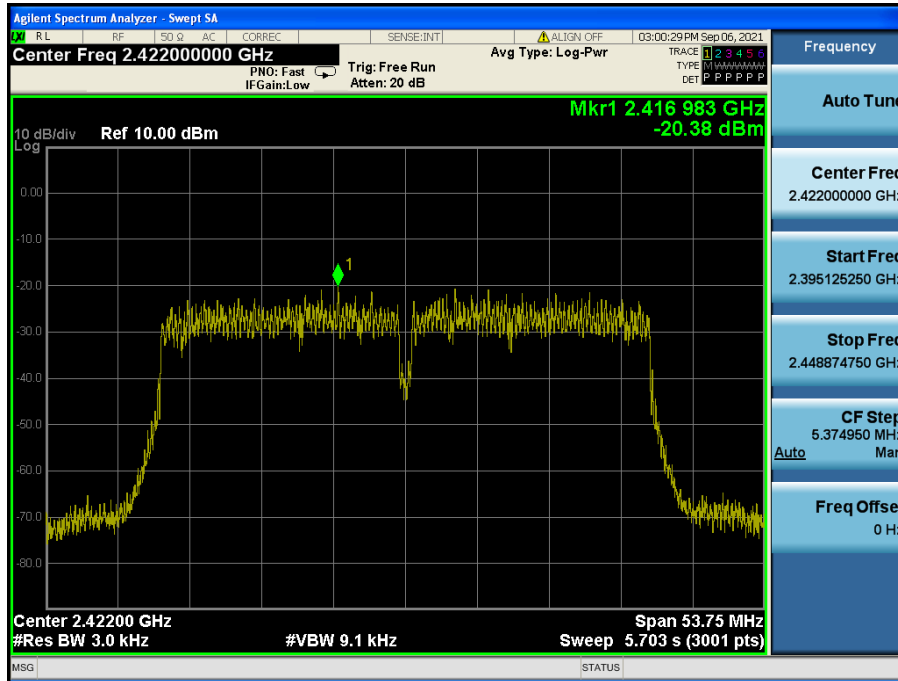

Power Spectral Density

TM 4 & 2 437

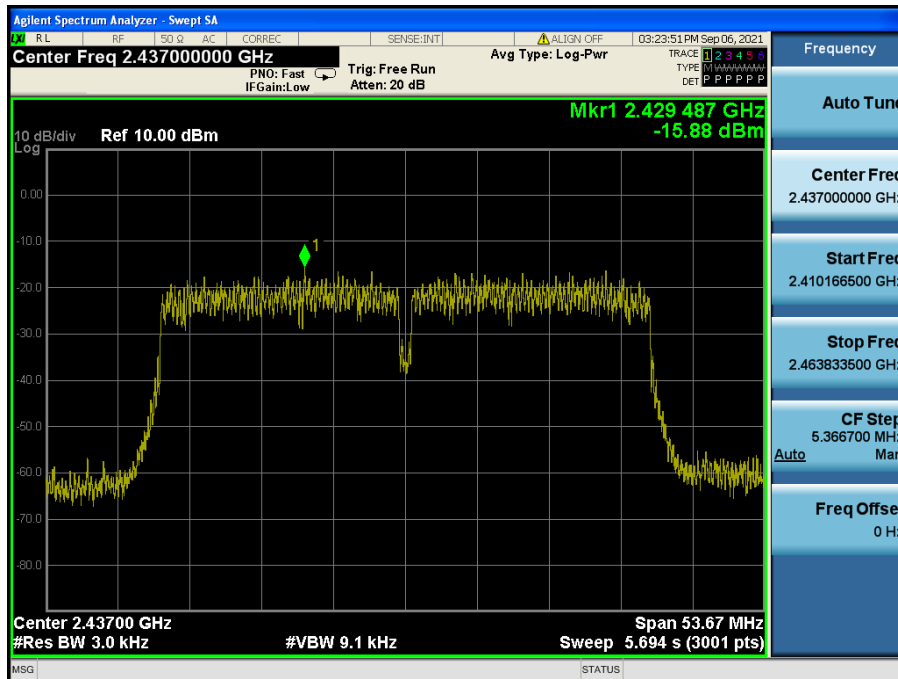

Power Spectral Density

TM 4 & 2 452

