




TEST REPORT

| | | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|-------------------------------------------------------------------------------------|
| KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr | Report No.: KR21-SRF0172 Page (1) of (71) |  |
| <p>1. Client</p> <ul style="list-style-type: none"> ◦ Name : Pittasoft Co., Ltd. ◦ Address : A 4th floor, ABN Tower, 331, Pangyo-ro, Bundang-gu, Seongnam-si, Gyeonggi-do, Republic of Korea ◦ Date of Receipt : 2021-06-17 <p>2. Use of Report : Certification</p> <p>3. Name of Product / Model : CAR DASHCAM / DR900X Plus</p> <p>4. Manufacturer / Country of Origin : Pittasoft Co.,Ltd. / Korea</p> <p>5. FCC ID : YCK-DR900XP</p> <p>6. Date of Test : 2021-07-21 to 2021-08-11</p> <p>7. Location of Test : <input checked="" type="checkbox"/> Permanent Testing Lab <input type="checkbox"/> On Site Testing (Address:65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea)</p> <p>8. Test method used : FCC Part 15 Subpart C, 15.247</p> <p>9. Test Result : Refer to the test result in the test report</p> | | |
| Affirmation | Tested by Name : Minki Kim (Signature) | Technical Manager Name : Heesu Ahn (Signature) |
| <p style="text-align: right;">2021-08-30</p> <p style="text-align: center;">KCTL Inc.</p> <p>As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by KCTL Inc.</p> | | |

REPORT REVISION HISTORY

| Date | Revision | Page No |
|------------|-------------------|---------|
| 2021-08-30 | Originally issued | - |
| | | |
| | | |
| | | |
| | | |

This report shall not be reproduced except in full, without the written approval of KCTL Inc. This document may be altered or revised by KCTL Inc. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KCTL Inc. will constitute fraud and shall nullify the document. This test report is a general report that does not use the KOLAS accreditation mark and is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.

General remarks for test reports

Statement concerning the uncertainty of the measurement systems used for the tests

(may be required by the product standard or client)

Internal procedure used for type testing through which traceability of the measuring uncertainty has been established:

Procedure number, issue date and title:

Calculations leading to the reported values are on file with the testing laboratory that conducted the testing.

Statement not required by the standard or client used for type testing

CONTENTS

| | | |
|------|-----------------------------------------------|----|
| 1. | General information | 4 |
| 2. | Device information | 4 |
| 2.1. | Information about derivative model..... | 5 |
| 2.2. | Accessory information | 5 |
| 2.3. | Frequency/channel operations..... | 5 |
| 2.4. | Duty Cycle Correction Factor | 6 |
| 3. | Antenna requirement | 7 |
| 4. | Summary of tests | 8 |
| 5. | Measurement uncertainty | 9 |
| 6. | Measurement results explanation example | 10 |
| 7. | Test results | 11 |
| 7.1. | Maximum Peak Output Power | 11 |
| 7.2. | Carrier frequency separation | 13 |
| 7.3. | 20dB channel bandwidth | 18 |
| 7.4. | Number of hopping channels | 23 |
| 7.5. | Time of occupancy(Dwell time)..... | 26 |
| 7.6. | Radiated spurious emissions & band edge..... | 33 |
| 7.7. | Conducted Spurious Emission..... | 66 |
| 8. | Measurement equipment | 71 |

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0172
Page (4) of (71)

KCTL

1. General information

Client : Pittasoft Co.,Ltd.
Address : A 4th floor, ABN Tower, 331, Pangyo-ro, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea
Manufacturer : Pittasoft Co.,Ltd.
Address : A 4th floor, ABN Tower, 331, Pangyo-ro, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea
Laboratory : KCTL Inc.
Address : 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea
Accreditations : FCC Site Designation No: KR0040, FCC Site Registration No: 687132
VCCI Registration No. : R-20080, G-20078, C-20059, T-20056
CAB Identifier: KR0040, ISED Number: 8035A
KOLAS No.: KT231

2. Device information

Equipment under test : CAR DASHCAM
Model : DR900X Plus
Derivative model : DR900X-2CH Plus, DR900X-1CH Plus, DR900X-2CH IR Plus,
DR900X-2CH Truck Plus, DR900X-2CH DMS Plus
Modulation technique : Bluetooth(BDR/EDR)_GFSK, $\pi/4$ DQPSK, 8DPSK
Bluetooth(BLE)_GFSK
WIFI(802.11a/b/g/n/ac)_DSSS, OFDM
Number of channels : Bluetooth(BDR/EDR): 79 ch / Bluetooth(BLE): 40 ch
802.11b/g/n_HT20 : 11 ch
802.11n_HT40 : 7 ch
UNII-3: 5 ch (20 MHz), 2 ch (40 MHz)
Frequency range : 2 402 MHz ~ 2 480 MHz (Bluetooth_BDR/EDR/BLE)
2 412 MHz ~ 2 462 MHz (802.11b/g/n_HT20)
2 422 MHz ~ 2 452 MHz (802.11n_HT40)
UNII-3 : 5 745 MHz ~ 5 825 MHz (802.11a/ac_VHT20)
5 755 MHz ~ 5 795 MHz (802.11ac_VHT40)
Power source : DC 12 V, 24 V
Antenna specification : Chip Antenna
Antenna gain : Bluetooth(BDR/EDR/BLE) : 1.88 dBi
802.11b/g/n_HT20/ HT40 : 1.88 dBi
UNII-3 : 3.60 dBi
Software version : 1.000
Hardware version : 2.0
Test device serial No. : N/A
Operation temperature : -20 °C ~ 70 °C

2.1. Information about derivative model

The difference between basic model and derivative models is:
 Simplified derivation based on buyer's model name and There is difference of model

2.2. Accessory information

| Equipment | Manufacturer | Model | Serial No. | Power source |
|-----------|--------------|-------|------------|--------------|
| N/A | - | - | - | - |

2.3. Frequency/channel operations

This device contains the following capabilities:
 Bluetooth(BDR/EDR/BLE), WLAN 2.4 GHz(802.11b/g/n_HT20/HT40)
 WLAN 5 GHz(802.11a/ac_VHT20/VHT40)

| Ch. | Frequency (MHz) |
|-----|-----------------|
| 00 | 2 402 |
| . | . |
| 39 | 2 441 |
| . | . |
| 78 | 2 480 |

Table 2.3.1. Bluetooth(BDR/EDR) mode

15.247 Requirements for Bluetooth transmitter:

- This Bluetooth module has been tested by a Bluetooth Qualification Lab, and we confirm the following:
 - 1) This system is hopping pseudo-randomly.
 - 2) Each frequency is used equally on the average by each transmitter.
 - 3) The receiver input bandwidths that match the hopping channel bandwidths of their corresponding transmitters
 - 4) The receiver shifts frequencies in synchronization with the transmitted signals.
- 15.247(g): The system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this Section 15.247 should the transmitter be presented with a continuous data (or information) stream.
- 15.247(h): The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0172
Page (6) of (71)



2.4. Duty Cycle Correction Factor


[DC 12 V]

| Test mode | Period (ms) | On time (ms) | Reduced VBW (Hz) |
|-----------|-------------|--------------|------------------|
| GFSK | 1.282 5 | 0.379 0 | 2 638.522 |
| 8DPSK | 1.291 5 | 0.383 5 | 2 607.562 |

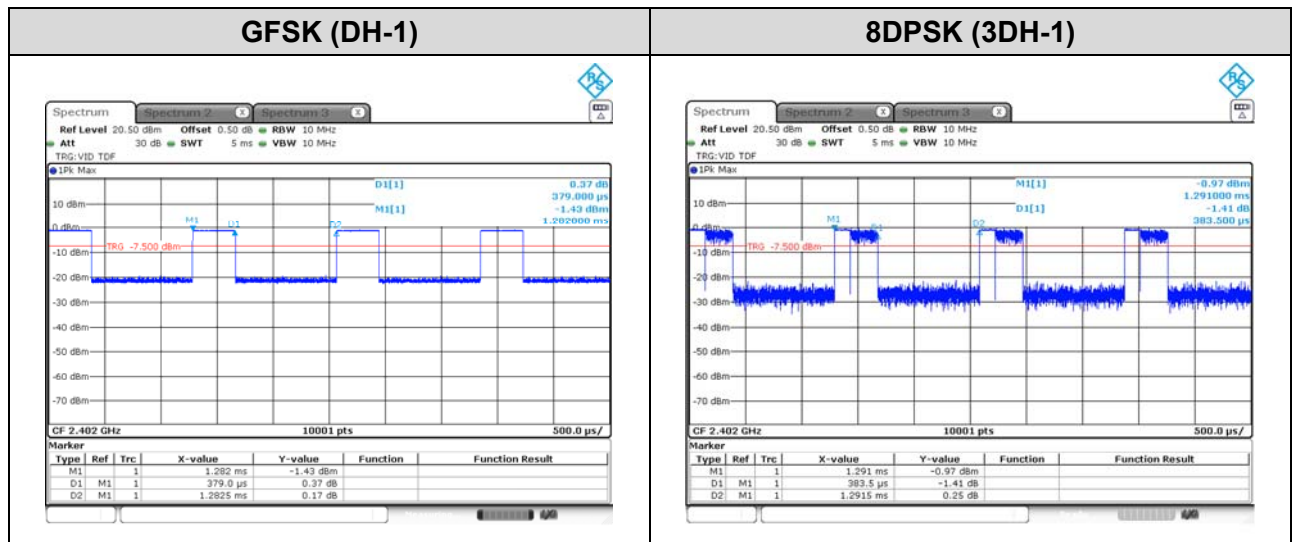

[DC 24 V]

| Test mode | Period (ms) | On time (ms) | Reduced VBW (Hz) |
|-----------|-------------|--------------|------------------|
| GFSK | 1.282 5 | 0.379 0 | 2 638.522 |
| 8DPSK | 1.291 5 | 0.383 5 | 2 607.562 |

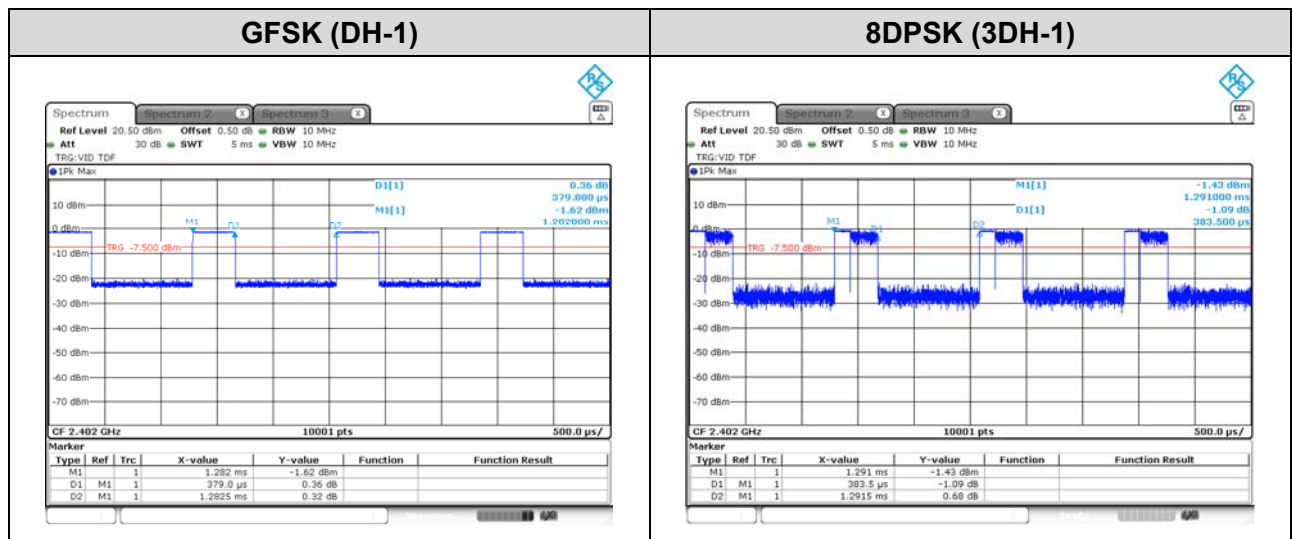

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0172
Page (7) of (71)

**3. Antenna requirement****Requirement of FCC part section 15.203:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

- The transmitter has permanently attached Chip Antenna(internal antenna) on board.

4. Summary of tests

| FCC Part section(s) | Parameter | Test condition | Test results |
|--------------------------------|------------------------------|----------------|------------------------|
| 15.247(b)(1), (4) | Maximum Peak Output Power | Conducted | Pass |
| 15.247(a)(1) | Carrier frequency separation | | Pass |
| 15.247(a)(1) | 20dB Channel Bandwidth | | Pass |
| 15.247(a)(iii) 15.247(b)(1) | Number of hopping channel | | Pass |
| 15.247(a)(iii) | Time of occupancy(dwel time) | | Pass |
| 15.247(d) | Conducted Spurious Emission | | Pass |
| 15.207(a) | AC Conducted Emissions | | N/A ^(Note1) |
| 15.205(a), 15.209(a) | Spurious emission | Radiated | Pass |
| | Band-edge, restricted band | | Pass |

Notes: (N/T: Not Tested, N/A: Not Applicable)

- This test is not applicable because the EUT only connects DC power line.
- All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- According to exploratory test no any obvious emission were detected from 9 kHz to 30 MHz. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.
- The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z. It was determined that **X** orientation was worst-case orientation. Therefore, all final radiated testing was performed with the EUT in **X** orientation.
- The worst-case data rate were: BDR Packet type DH-1
EDR Packet type 3DH-1
- The test procedure(s) in this report were performed in accordance as following.
 - ◆ ANSI C63.10-2013
 - ◆ KDB 558074 D01 v05r02

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0172
Page (9) of (71)



5. Measurement uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and thus, can be compared directly to specified limits to determine compliance.

| Parameter | Expanded uncertainty (\pm) | |
|------------------------------|--------------------------------|--------|
| Conducted RF power | 0.9 dB | |
| Conducted spurious emissions | 1.6 dB | |
| Radiated spurious emissions | 9 kHz ~ 30 MHz | 2.3 dB |
| | 30 MHz ~ 1 000 MHz | 2.2 dB |
| | 1 000 MHz ~ 18 000 MHz | 5.6 dB |
| | Above 18 000 GHz | 5.7 dB |
| Conducted emissions | 9 kHz ~ 150 kHz | 3.7 dB |
| | 150 kHz ~ 30 MHz | 3.3 dB |

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0172
Page (10) of (71)



6. Measurement results explanation example

The offset level is set in the spectrum analyzer to compensate the RF cable loss factor between EUT conducted output port and spectrum analyzer.

With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

| Frequency (MHz) | Factor(dB) | Frequency (MHz) | Factor(dB) |
|-----------------|------------|-----------------|------------|
| 30 | 15.80 | 9 000 | 16.54 |
| 50 | 15.71 | 10 000 | 17.04 |
| 100 | 15.72 | 11 000 | 16.89 |
| 200 | 15.73 | 12 000 | 16.74 |
| 300 | 15.32 | 13 000 | 16.93 |
| 400 | 15.05 | 14 000 | 16.67 |
| 500 | 15.12 | 15 000 | 17.88 |
| 600 | 15.24 | 16 000 | 18.30 |
| 700 | 15.31 | 17 000 | 19.05 |
| 800 | 15.39 | 18 000 | 18.58 |
| 900 | 15.90 | 19 000 | 18.61 |
| 1 000 | 16.05 | 20 000 | 19.39 |
| 2 000 | 16.09 | 21 000 | 20.29 |
| 3 000 | 16.49 | 22 000 | 20.31 |
| 4 000 | 16.90 | 23 000 | 20.33 |
| 5 000 | 16.88 | 24 000 | 20.53 |
| 6 000 | 16.79 | 25 000 | 20.64 |
| 7 000 | 16.78 | 26 000 | 20.89 |
| 8 000 | 16.65 | 26 500 | 21.52 |


Note.

Offset(dB) = RF cable loss(dB) + Power Divider(dB) + Attenuator (dB)

7 Test results

7.1. Maximum Peak Output Power

Test setup

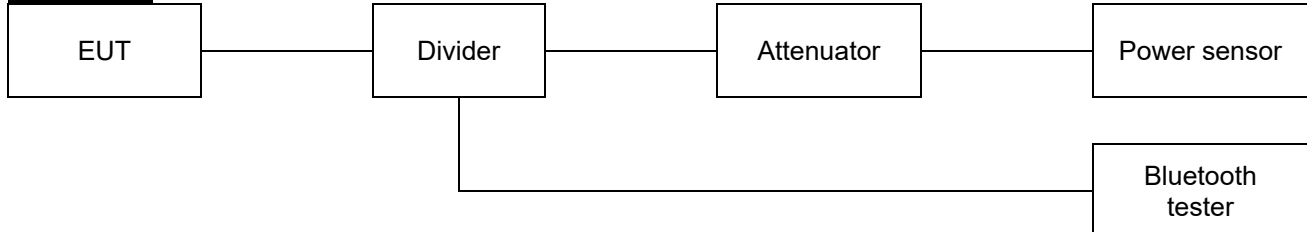

Limit

According to §15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2 400-2 483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

According to §15.247(b)(1), for frequency hopping systems operating in the 2 400-2 483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5 725-5 850 MHz band: 1 watt. For all other frequency hopping systems in the 2 400-2 483.5 MHz band: 0.125 watts.

According to §15.247(b)(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test procedure

ANSI C63.10-2013 - Section 7.8.5

Test settings

The test follows ANSI C63.10-2013 – Section 7.8.5. Using the power sensor instead of a spectrum analyzer.

Notes:

A peak responding power sensor is used, where the power sensor system video bandwidth is greater than the occupied bandwidth of the EUT.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0172
Page (12) of (71)

KCTL**Test results****[DC 12 V]**


| Frequency(MHz) | Data rate(Mbps) | Measured output power(dBm) | | Limit(dBm) |
|----------------|-----------------|----------------------------|---------|------------|
| | | Peak | Average | |
| 2 402 | 1 | -1.06 | -1.94 | 20.97 |
| 2 441 | 1 | -0.87 | -1.91 | |
| 2 480 | 1 | -0.54 | -1.37 | |
| 2 402 | 2 | -0.04 | -2.32 | 20.97 |
| 2 441 | 2 | -0.06 | -2.39 | |
| 2 480 | 2 | 0.31 | -1.90 | |
| 2 402 | 3 | 0.32 | -2.31 | 20.97 |
| 2 441 | 3 | 0.17 | -2.39 | |
| 2 480 | 3 | 0.71 | -1.88 | |

[DC 24 V]

| Frequency(MHz) | Data rate(Mbps) | Measured output power(dBm) | | Limit(dBm) |
|----------------|-----------------|----------------------------|---------|------------|
| | | Peak | Average | |
| 2 402 | 1 | -0.99 | -1.90 | 20.97 |
| 2 441 | 1 | -1.10 | -1.98 | |
| 2 480 | 1 | -0.64 | -1.36 | |
| 2 402 | 2 | -0.04 | -2.32 | 20.97 |
| 2 441 | 2 | -0.19 | -2.41 | |
| 2 480 | 2 | 0.28 | -1.90 | |
| 2 402 | 3 | 0.27 | -2.30 | 20.97 |
| 2 441 | 3 | 0.14 | -2.39 | |
| 2 480 | 3 | 0.96 | -1.86 | |

7.2. Carrier frequency separation

Test setup

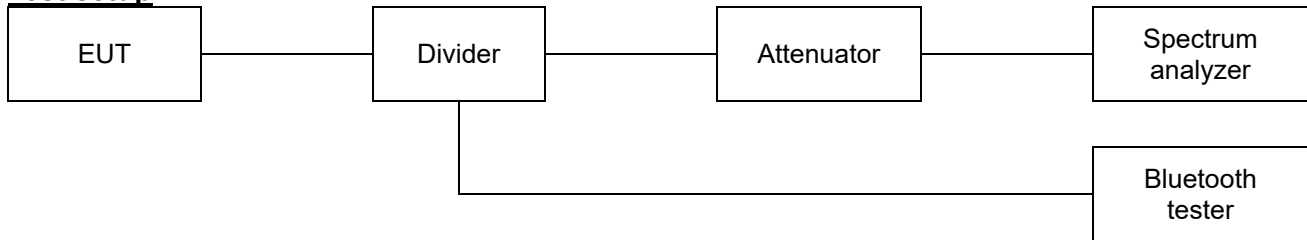

Limit

According to §15.247(a)(1) frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2 400-2 483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test procedure

ANSI C63.10-2013 - Section 7.8.2

Test settings

- Span: Wide enough to capture the peaks of two adjacent channels.
- RBW: Start with the RBW set to approximately 30 % of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- Video (or average) bandwidth (VBW) \geq RBW.
- Sweep: Auto.
- Detector function: Peak.
- Trace: Max hold.
- Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent Channels. Compliance of an EUT with the appropriate regulatory limit shall be determined. A plot of the data shall be included in the test report.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0172
Page (14) of (71)

**Test results****[DC 12 V]**

| Frequency(MHz) | Data rate(Mbps) | Carrier frequency separation(MHz) | Limit(MHz) |
|----------------|-----------------|-----------------------------------|------------|
| 2 402 | 1 | 1.002 | 0.583 |
| 2 441 | 1 | 1.002 | 0.583 |
| 2 480 | 1 | 1.002 | 0.561 |
| 2 402 | 3 | 1.002 | 0.811 |
| 2 441 | 3 | 1.002 | 0.811 |
| 2 480 | 3 | 1.002 | 0.809 |

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0172
Page (15) of (71)




GFSK

2 402 MHz

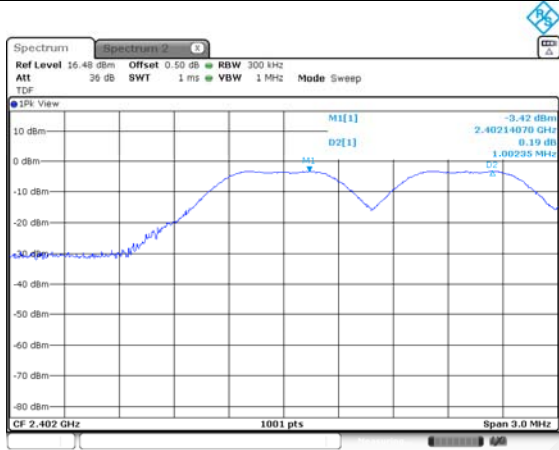


8DPSK


2 402 MHz

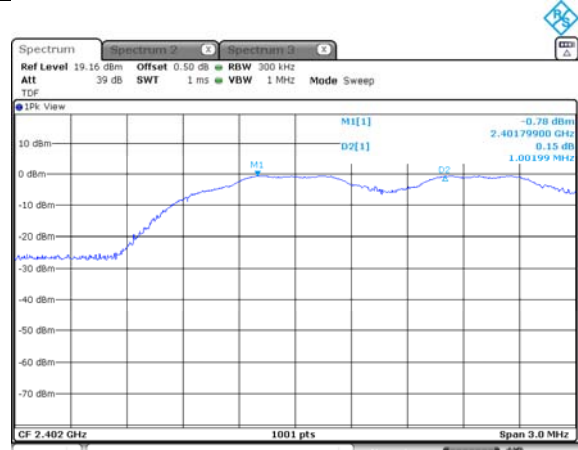


2 441 MHz

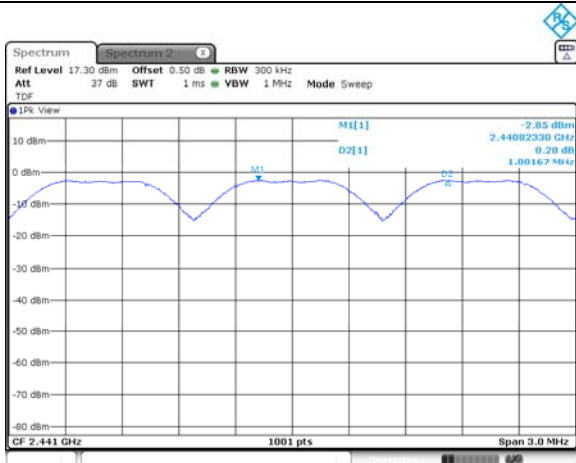


2 441 MHz

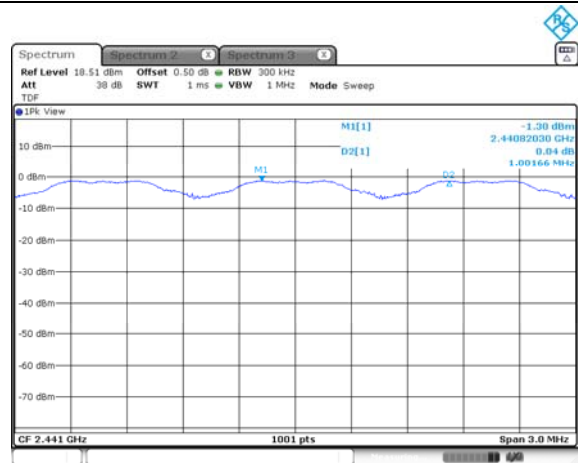

2 480 MHz

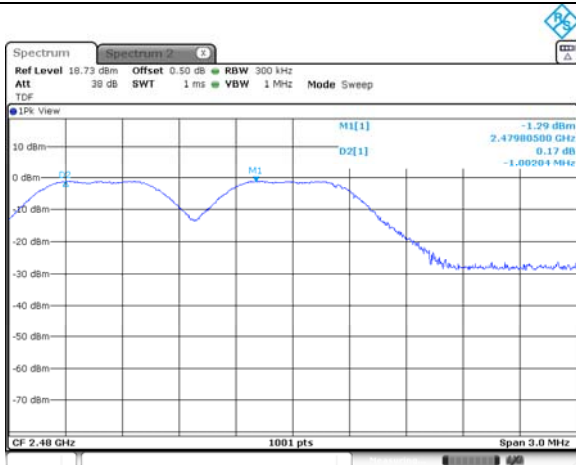

2 480 MHz

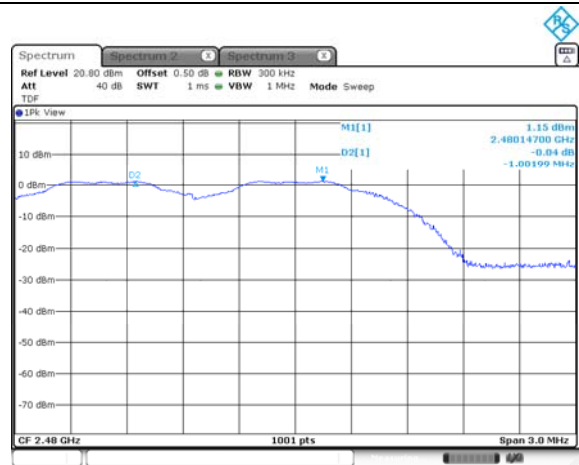

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0172
Page (16) of (71)


**[DC 24 V]**

| Frequency(MHz) | Data rate(Mbps) | Carrier frequency separation(MHz) | Limit(MHz) |
|----------------|-----------------|-----------------------------------|------------|
| 2 402 | 1 | 1.002 | 0.601 |
| 2 441 | 1 | 1.002 | 0.583 |
| 2 480 | 1 | 1.002 | 0.581 |
| 2 402 | 3 | 1.002 | 0.811 |
| 2 441 | 3 | 1.002 | 0.809 |
| 2 480 | 3 | 1.002 | 0.813 |

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0172
Page (17) of (71)

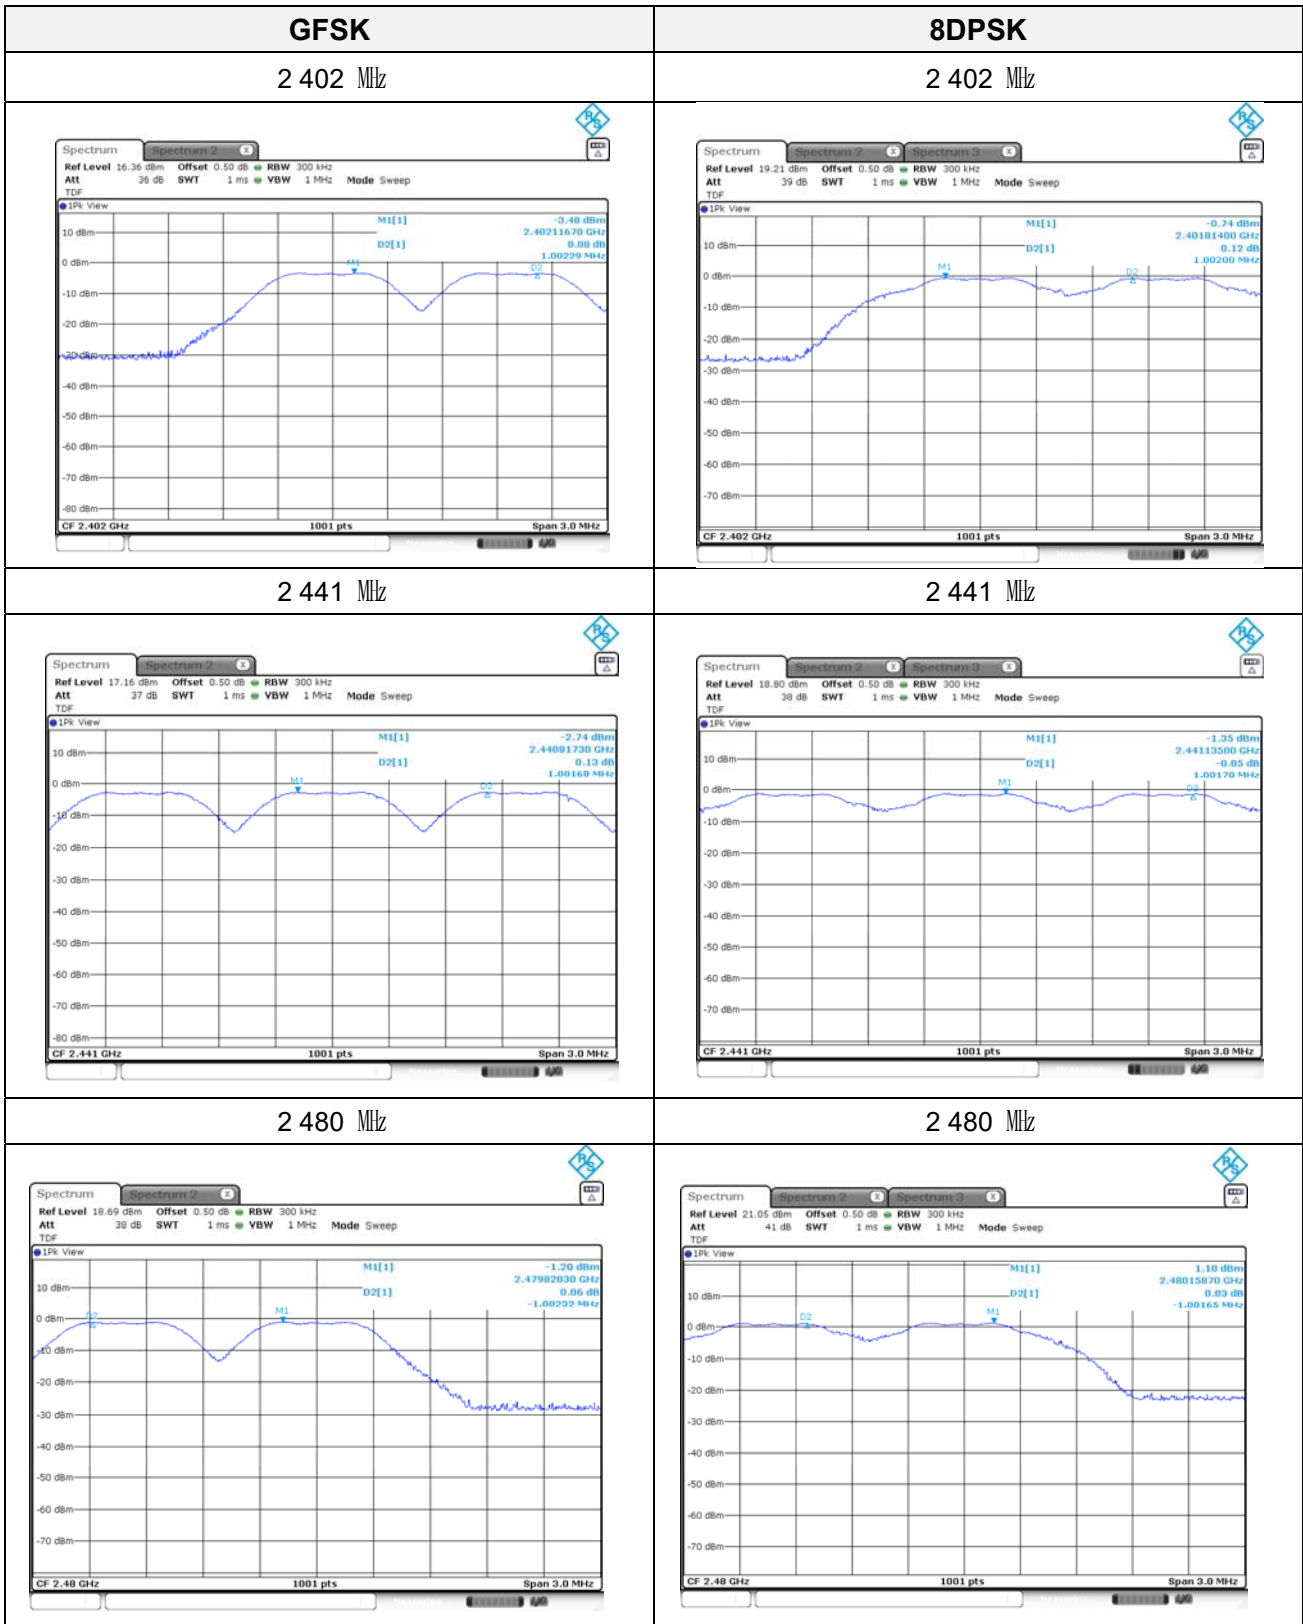

7.3. 20dB channel bandwidth

Test setup

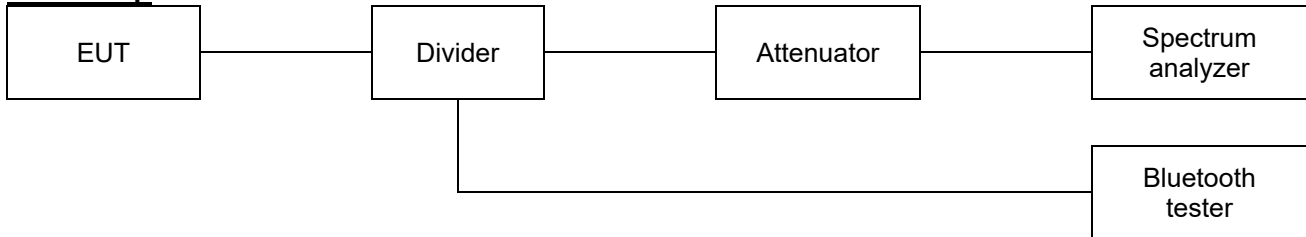

Limit

According to §15.247(a)(1) frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2 400-2 483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test procedure

ANSI C63.10-2013 - Section 6.9.2

Test settings

20dB channel bandwidth and Occupied bandwidth

The occupied bandwidth is measured as the width of the spectral envelope of the modulated signal, at an amplitude level reduced from a reference value by a specified ratio (or in decibels, a specified number of dB down from the reference value). Typical ratios, expressed in dB, are -6 dB, -20 dB, and -26 dB, corresponding to 6 dB BW, 20 dB BW, and 26 dB BW, respectively. In this subclause, the ratio is designated by “-xx dB.” The reference value is either the level of the unmodulated carrier or the highest level of the spectral envelope of the modulated signal, as stated by the applicable requirement. Some requirements might specify a specific maximum or minimum value for the “-xx dB” bandwidth; other requirements might specify that the “-xx dB” bandwidth be entirely contained within the authorized or designated frequency band.

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency.
- b) Span: Two times and five times the OBW.
- c) RBW = 1 % to 5 % of the OBW and VBW $\geq 3 \times$ RBW
- d) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation.
- e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.
- f) Detector: peak
- g) Trace mode: max hold.
- h) Allow the trace to stabilize.
- i) Determine the “-xx dB down amplitude” using $((\text{reference value}) - \text{xx})$. Alternatively, this calculation may be made by using the marker-delta function of the instrument.
- j) If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j).
- k) Place two markers, one at the lowest frequency and the other at the highest frequency of the

envelope of the spectral display, such that each marker is at or slightly below the “-xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “-xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth

Test results

[DC 12 V]

| Frequency(MHz) | Data rate(Mbps) | 20 dB bandwidth(MHz) | Minimum Bandwidth(MHz) |
|----------------|-----------------|----------------------|------------------------|
| 2 402 | 1 | 0.875 | 0.500 |
| 2 441 | 1 | 0.875 | |
| 2 480 | 1 | 0.842 | |
| 2 402 | 3 | 1.217 | |
| 2 441 | 3 | 1.217 | |
| 2 480 | 3 | 1.214 | |

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0172
Page (20) of (71)



GFSK

2 402 MHz

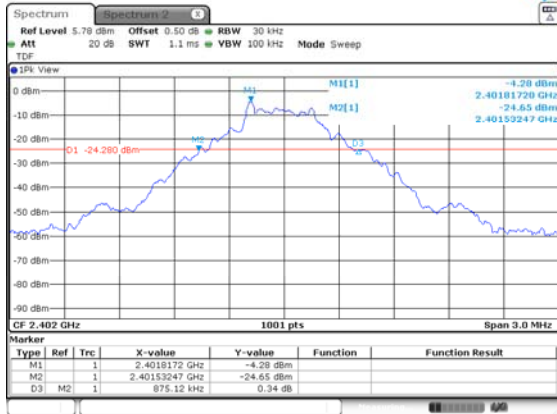


8DPSK


2 402 MHz




2 441 MHz

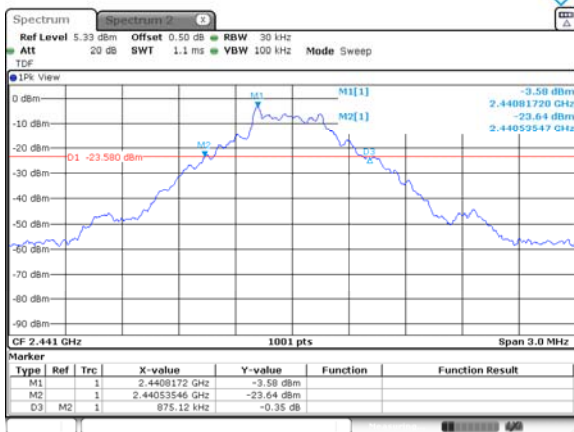


2 441 MHz

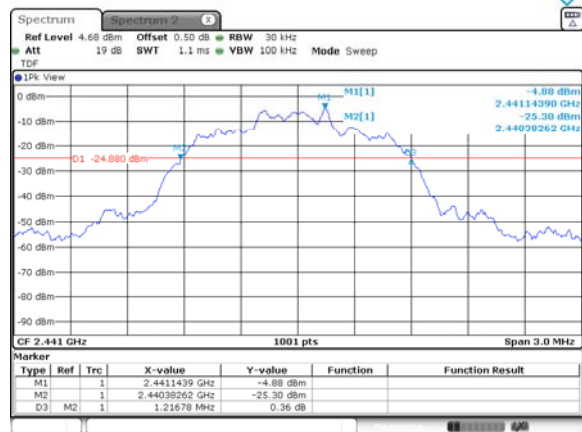

2 480 MHz

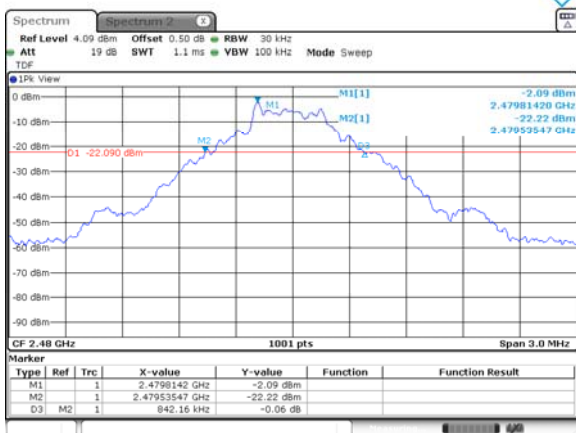

2 480 MHz

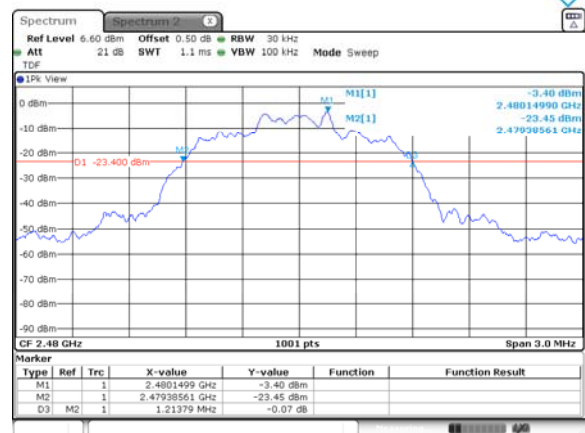

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0172
Page (21) of (71)

**[DC 24 V]**

| Frequency(MHz) | Data rate(Mbps) | 20 dB bandwidth(MHz) | Minimum Bandwidth(MHz) |
|----------------|-----------------|----------------------|------------------------|
| 2 402 | 1 | 0.902 | 0.500 |
| 2 441 | 1 | 0.875 | |
| 2 480 | 1 | 0.872 | |
| 2 402 | 3 | 1.217 | |
| 2 441 | 3 | 1.214 | |
| 2 480 | 3 | 1.220 | |

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0172
Page (22) of (71)




GFSK

2 402 MHz

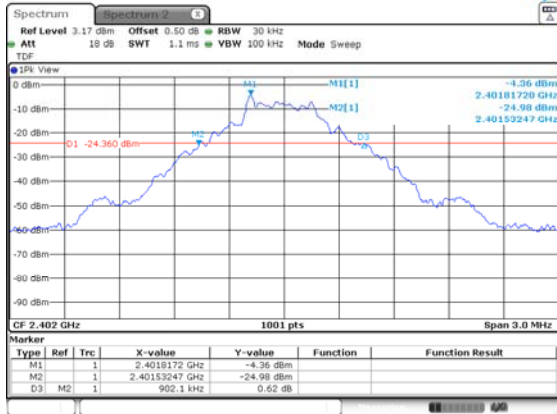


8DPSK


2 402 MHz

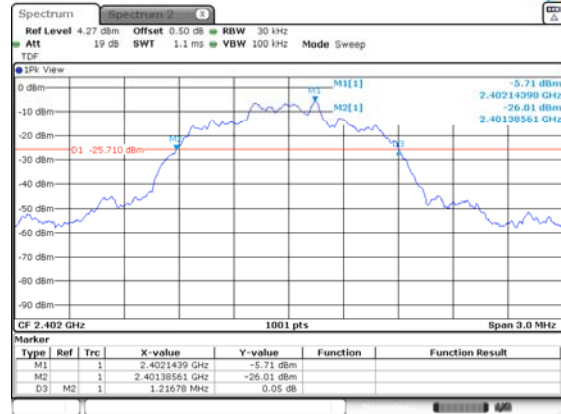


2 441 MHz

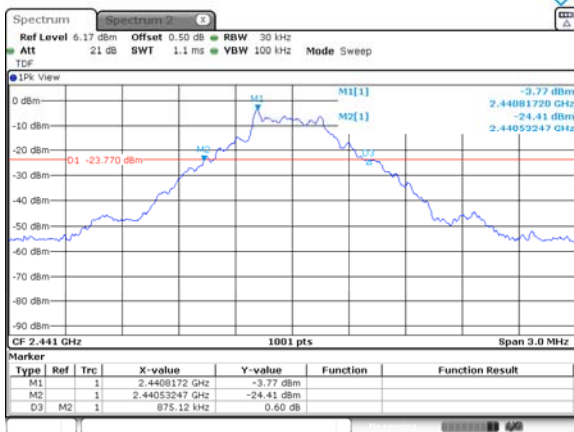


2 441 MHz

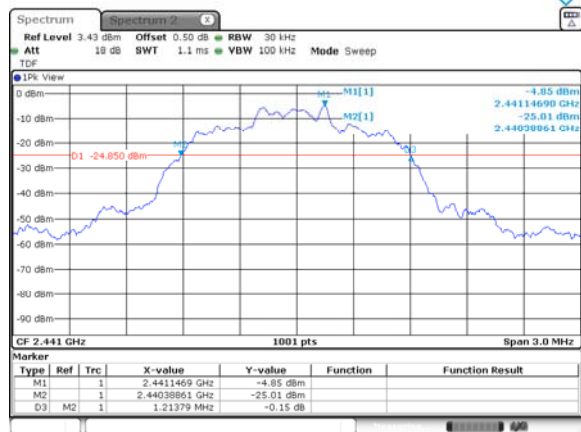

2 480 MHz

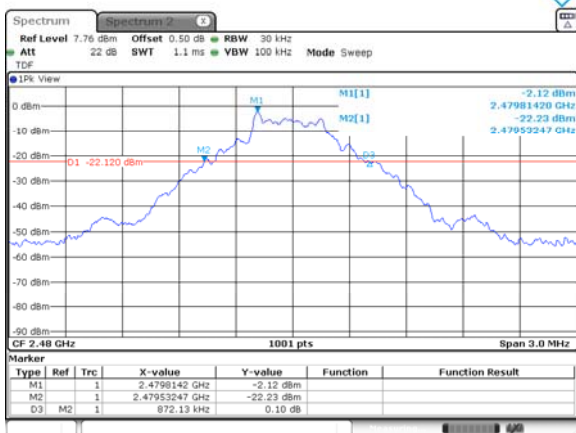


2 480 MHz

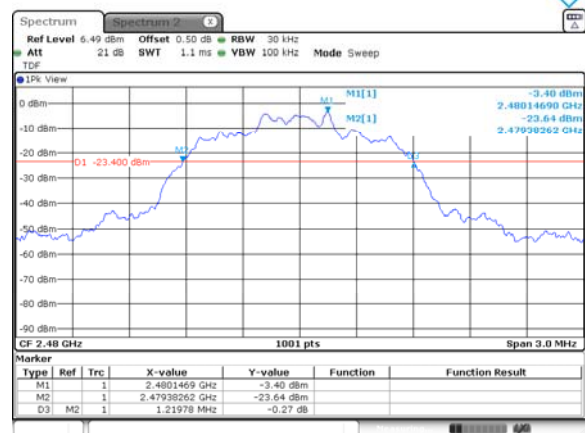

7.4. Number of hopping channels

Test setup

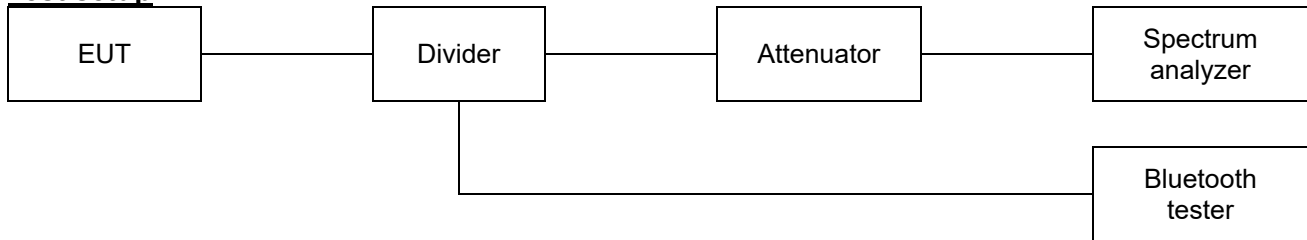

Limit

According to §15.247(a)(1)(iii) Frequency hopping systems in the 2 400-2 483.5 MHz band shall use at least 15 channels.

Test procedure

ANSI C63.10-2013 - Section 7.8.3

Test settings

- a) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b) RBW: To identify clearly the individual channels, set the RBW to less than 30 % of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c) VBW \geq RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels. A plot of the data shall be included in the test report.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0172
Page (24) of (71)



Test results

[DC 12 V]

| Mode | Number of hopping channel | Limit |
|---------------|---------------------------|-------|
| GFSK | 79 | ≥15 |
| $\pi/4$ DQPSK | 79 | ≥15 |
| 8DPSK | 79 | ≥15 |



Notes:

In case of AFH mode, minimum number of hopping channels is 20.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0172
Page (25) of (71)



[DC 24 V]

| Mode | Number of hopping channel | Limit |
|---------------|---------------------------|-------|
| GFSK | 79 | ≥15 |
| $\pi/4$ DQPSK | 79 | ≥15 |
| 8DPSK | 79 | ≥15 |




Notes:

In case of AFH mode, minimum number of hopping channels is 20.

7.5. Time of occupancy(Dwell time)

Test setup

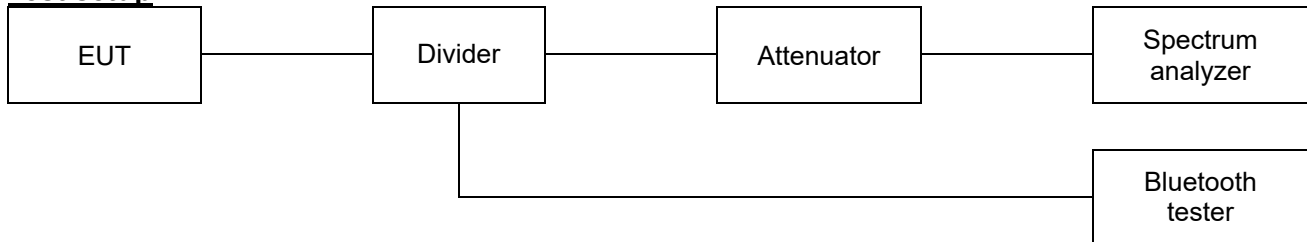

Limit

According to §15.247(a)(1)(iii) frequency hopping systems in the 2 400-2 483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test procedure

ANSI C63.10-2013 - Section 7.8.4

Test settings

- Span: Zero span, centered on a hopping channel.
- RBW \leq channel spacing and $\gg 1 / T$, where T is the expected dwell time per channel.
- Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- Detector function: Peak.
- Trace: Max hold.
- Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0172
Page (27) of (71)

**Test results****[DC 12 V]****- Non-AFH**

| Modulation | Frequency (MHz) | Pulse Width (ms) | Hopping rate (hop/s) | Number of Channels | Result (s) | Limit (s) |
|------------|-----------------|------------------|----------------------|--------------------|------------|-----------|
| DH1 | 2 441 | 0.382 | 800.000 | 79.000 | 0.122 | 0.400 |
| DH3 | | 1.638 | 400.000 | | 0.262 | 0.400 |
| DH5 | | 2.884 | 266.667 | | 0.308 | 0.400 |
| 2-DH1 | | 0.391 | 800.000 | | 0.125 | 0.400 |
| 2-DH3 | | 1.642 | 400.000 | | 0.263 | 0.400 |
| 2-DH5 | | 2.888 | 266.667 | | 0.308 | 0.400 |
| 3-DH1 | | 0.391 | 800.000 | | 0.125 | 0.400 |
| 3-DH3 | | 1.640 | 400.000 | | 0.262 | 0.400 |
| 3-DH5 | | 2.891 | 266.667 | | 0.308 | 0.400 |

- AFH

| Modulation | Frequency (MHz) | Pulse Width (ms) | Hopping rate (hop/s) | Number of Channels | Result (s) | Limit (s) |
|------------|-----------------|------------------|----------------------|--------------------|------------|-----------|
| DH1 | 2 441 | 0.382 | 400.000 | 20.000 | 0.061 | 0.400 |
| DH3 | | 1.638 | 200.000 | | 0.131 | 0.400 |
| DH5 | | 2.884 | 133.333 | | 0.154 | 0.400 |
| 2-DH1 | | 0.391 | 400.000 | | 0.062 | 0.400 |
| 2-DH3 | | 1.642 | 200.000 | | 0.131 | 0.400 |
| 2-DH5 | | 2.888 | 133.333 | | 0.154 | 0.400 |
| 3-DH1 | | 0.391 | 400.000 | | 0.062 | 0.400 |
| 3-DH3 | | 1.640 | 200.000 | | 0.131 | 0.400 |
| 3-DH5 | | 2.891 | 133.333 | | 0.154 | 0.400 |

Notes:

1. Non-AFH

- Period Time: 0.4 sec x 79 channels = 31.6 sec
- Result (s)= (Hopping rate (hop/s/slot) / 79 channels) x 31.6 sec x Pulse width (ms)

2. AFH

- Period Time: 0.4 sec x 20 channels = 8 sec
- Result (s)= (Hopping rate (hop/s/slot) / 20 channels) x 8 sec x Pulse width (ms)

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0172
Page (28) of (71)




Non-AFH(GFSK)

DH1

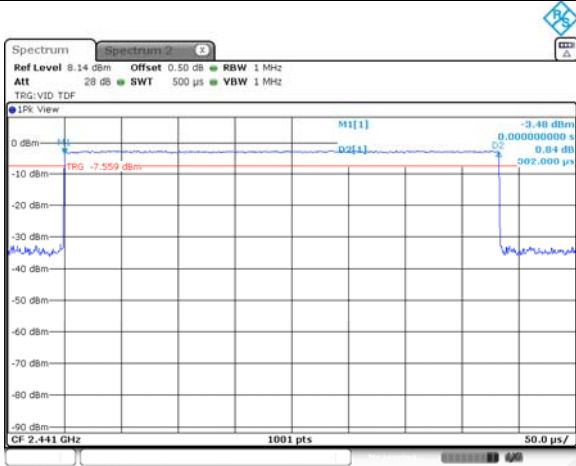


Non-AFH($\pi/4$ DQPSK)


2-DH1

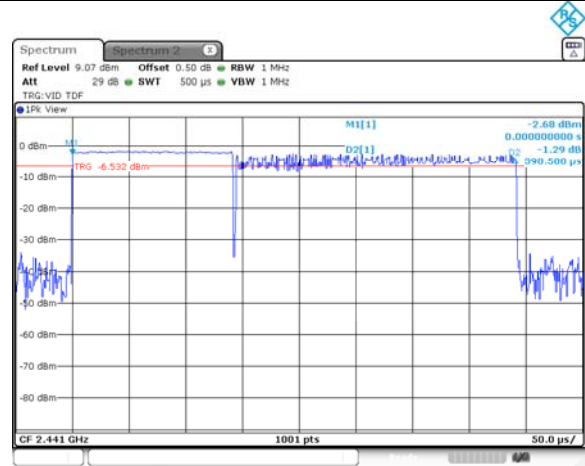


DH3

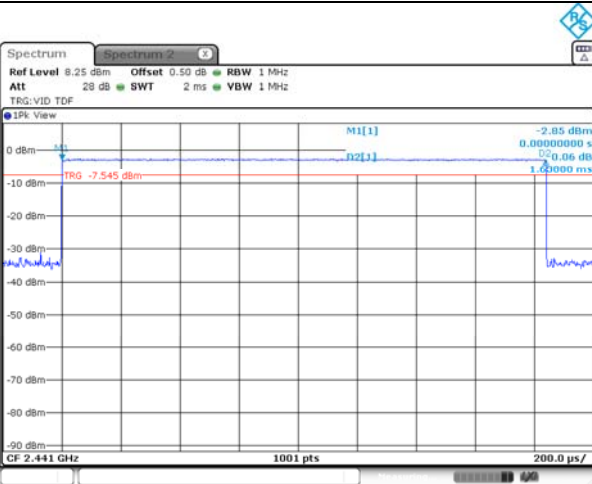


2-DH3

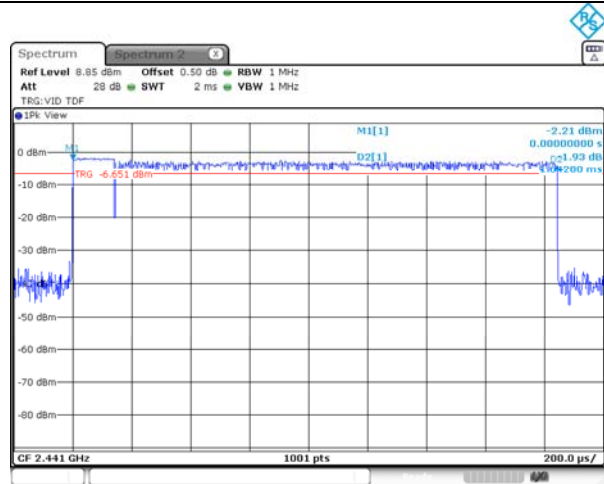

DH5

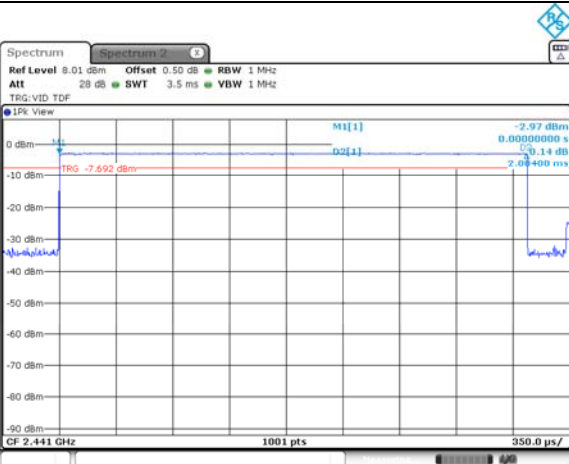

2-DH5

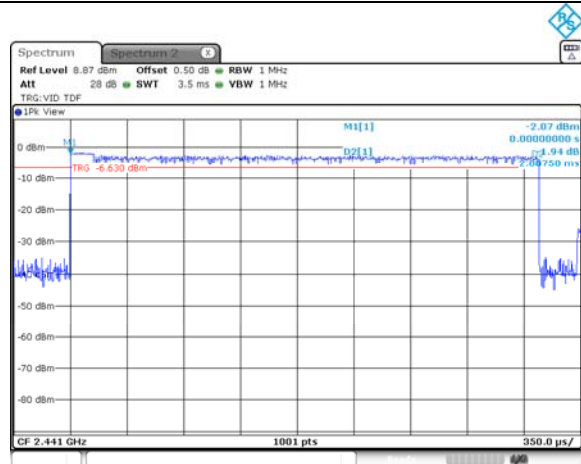

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0172
Page (29) of (71)




Non-AFH(8DPSK)


3-DH1

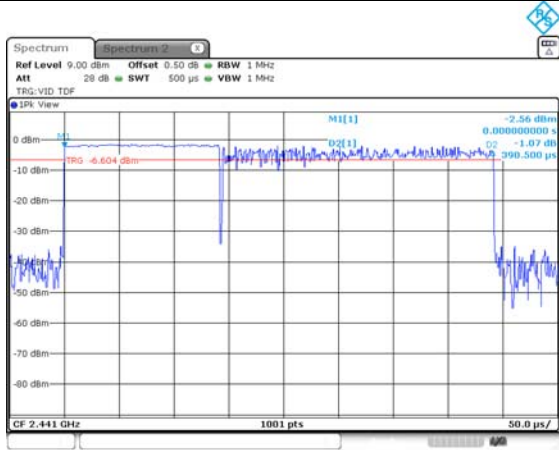

3-DH3

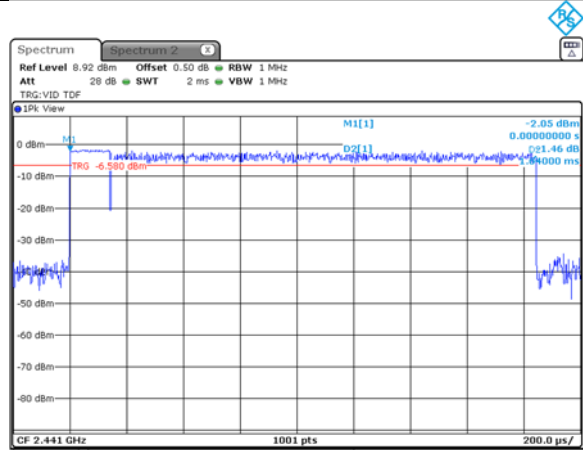

3-DH5

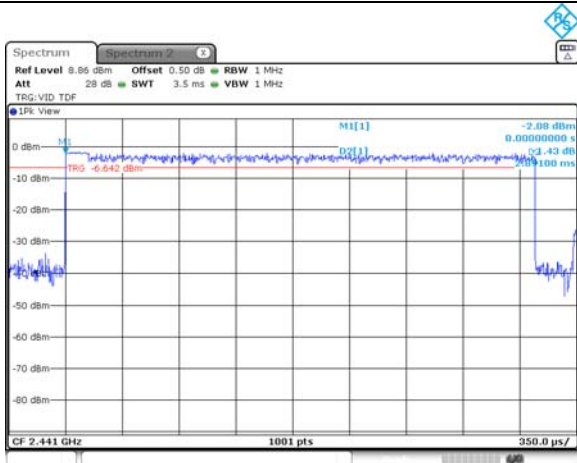

Blank

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0172
Page (30) of (71)

KCTL**[DC 24 V]****- Non-AFH**

| Modulation | Frequency (MHz) | Pulse Width (ms) | Hopping rate (hop/s) | Number of Channels | Result (s) | Limit (s) |
|------------|-----------------|------------------|----------------------|--------------------|------------|-----------|
| DH1 | 2 441 | 0.382 | 800.000 | 79.000 | 0.122 | 0.400 |
| DH3 | | 1.638 | 400.000 | | 0.262 | 0.400 |
| DH5 | | 2.884 | 266.667 | | 0.308 | 0.400 |
| 2-DH1 | | 0.391 | 800.000 | | 0.125 | 0.400 |
| 2-DH3 | | 1.642 | 400.000 | | 0.263 | 0.400 |
| 2-DH5 | | 2.888 | 266.667 | | 0.308 | 0.400 |
| 3-DH1 | | 0.391 | 800.000 | | 0.125 | 0.400 |
| 3-DH3 | | 1.640 | 400.000 | | 0.262 | 0.400 |
| 3-DH5 | | 2.891 | 266.667 | | 0.308 | 0.400 |

- AFH

| Modulation | Frequency (MHz) | Pulse Width (ms) | Hopping rate (hop/s) | Number of Channels | Result (s) | Limit (s) |
|------------|-----------------|------------------|----------------------|--------------------|------------|-----------|
| DH1 | 2 441 | 0.382 | 400.000 | 20.000 | 0.061 | 0.400 |
| DH3 | | 1.638 | 200.000 | | 0.131 | 0.400 |
| DH5 | | 2.884 | 133.333 | | 0.154 | 0.400 |
| 2-DH1 | | 0.391 | 400.000 | | 0.062 | 0.400 |
| 2-DH3 | | 1.642 | 200.000 | | 0.131 | 0.400 |
| 2-DH5 | | 2.888 | 133.333 | | 0.154 | 0.400 |
| 3-DH1 | | 0.391 | 400.000 | | 0.062 | 0.400 |
| 3-DH3 | | 1.640 | 200.000 | | 0.131 | 0.400 |
| 3-DH5 | | 2.891 | 133.333 | | 0.154 | 0.400 |

Notes:

1. Non-AFH

- Period Time: 0.4 sec x 79 channels = 31.6 sec
- Result (s)= (Hopping rate (hop/s/slot) / 79 channels) x 31.6 sec x Pulse width (ms)

2. AFH

- Period Time: 0.4 sec x 20 channels = 8 sec
- Result (s)= (Hopping rate (hop/s/slot) / 20 channels) x 8 sec x Pulse width (ms)

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0172
Page (31) of (71)




Non-AFH(GFSK)

DH1

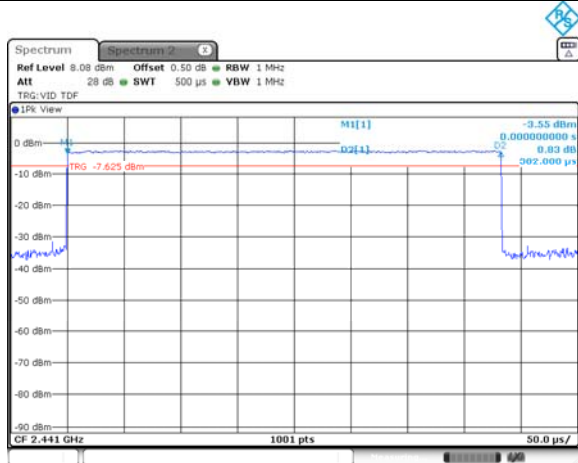


Non-AFH($\pi/4$ DQPSK)


2-DH1

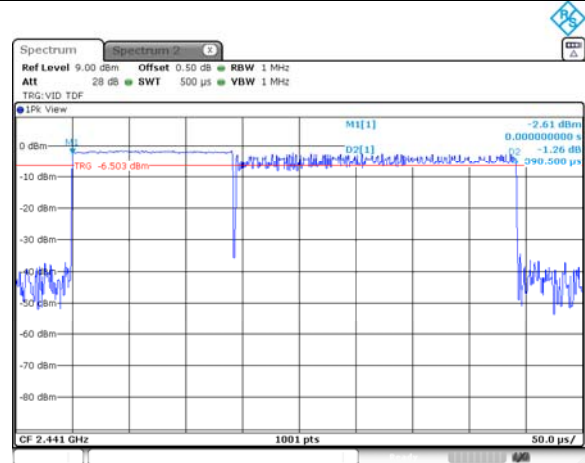


DH3

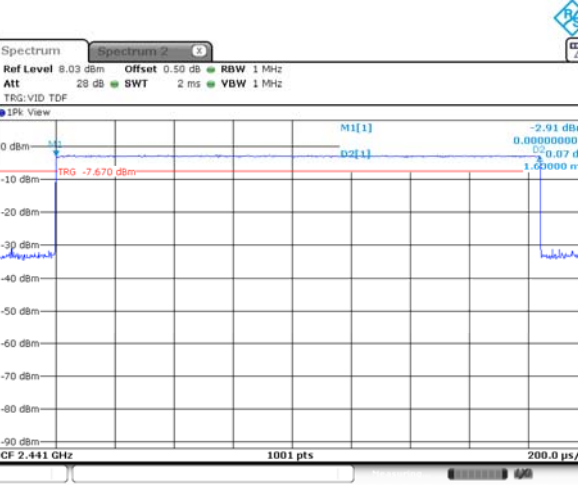


2-DH3

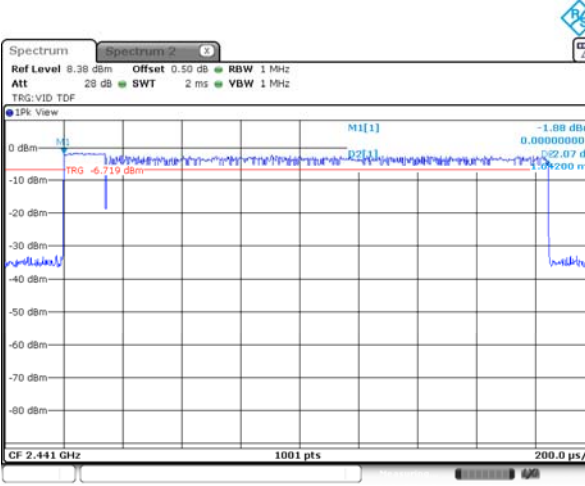

DH5

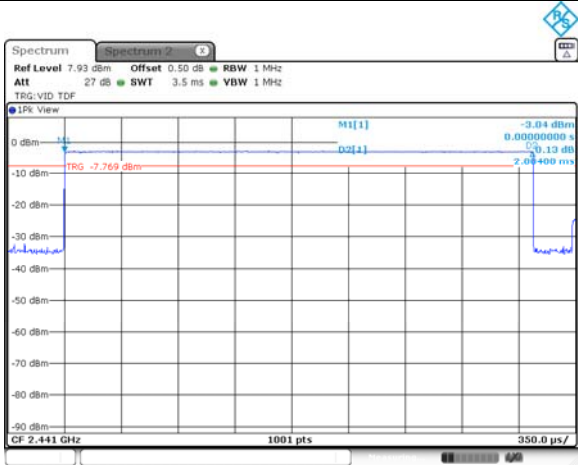

2-DH5

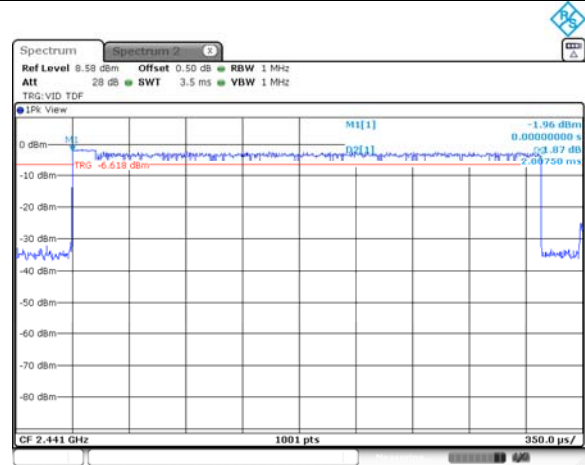

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0172
Page (32) of (71)




Non-AFH(8DPSK)


3-DH1

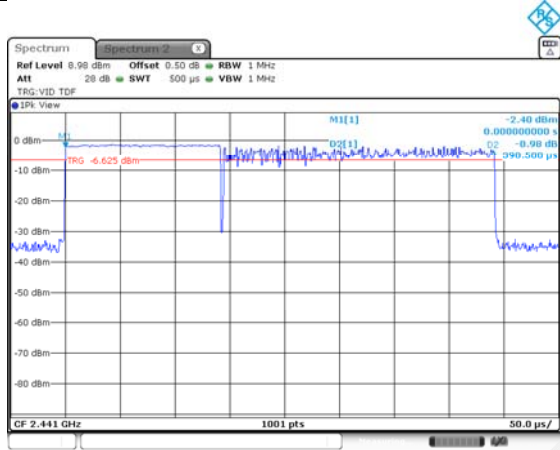

3-DH3

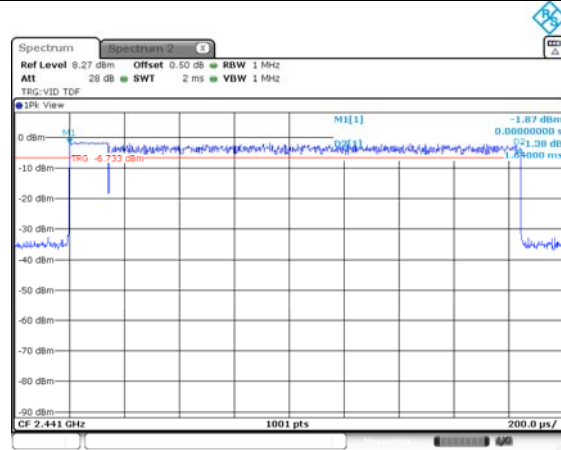

3-DH5

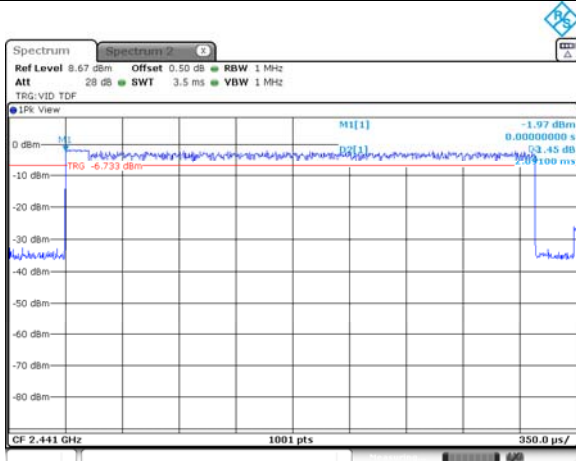


Blank


7.6. Radiated spurious emissions & band edge

Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions

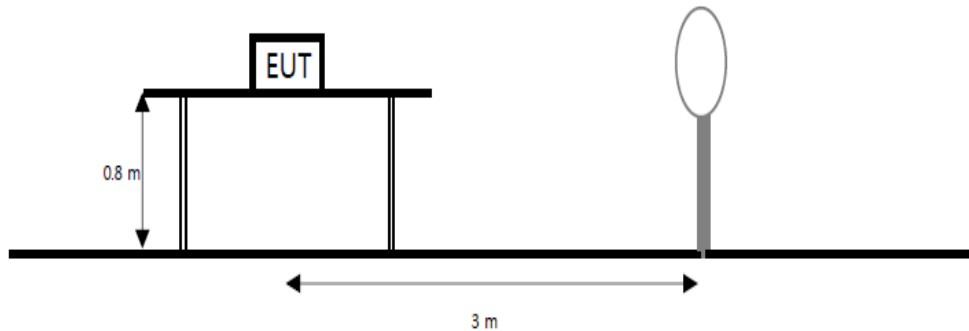

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

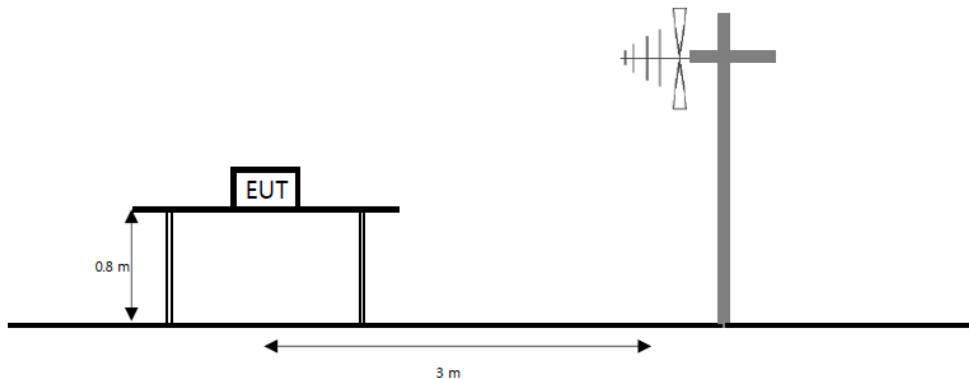

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

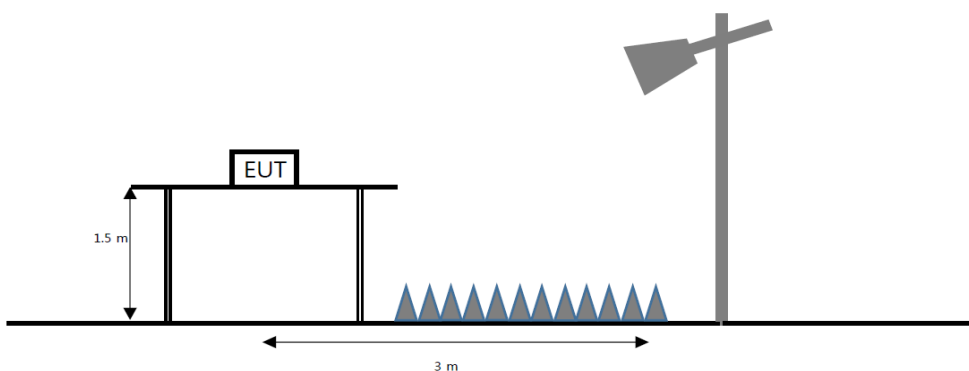

Limit

According to section 15.209(a) except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field strength ($\mu V/m$) | Measurement distance (m) |
|-----------------|------------------------------|--------------------------|
| 0.009 - 0.490 | 2 400/F(kHz) | 300 |
| 0.490 - 1.705 | 24 000/F(kHz) | 30 |
| 1.705 - 30 | 30 | 30 |
| 30 - 88 | 100** | 3 |
| 88 - 216 | 150** | 3 |
| 216 - 960 | 200** | 3 |
| Above 960 | 500 | 3 |

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54–72 MHz, 76–88 MHz, 174–216 MHz or 470–806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., Section 15.231 and 15.241.

According to section 15.205(a) and (b) only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | GHz |
|-----------------------|-----------------------|-------------------|---------------|
| 0.009 - 0.110 | 16.42 - 16.423 | 399.9 - 410 | 4.5 - 5.15 |
| 0.495 - 0.505 | 16.694 75 - 16.695 25 | 608 - 614 | 5.35 - 5.46 |
| 2.173 5 - 2.190 5 | 16.804 25 - 16.804 75 | 960 - 1 240 | 7.25 - 7.75 |
| 4.125 - 4.128 | 25.5 - 25.67 | 1 300 - 1 427 | 8.025 - 8.5 |
| 4.177 25 - 4.177 75 | 37.5 - 38.25 | 1 435 - 1 626.5 | 9.0 - 9.2 |
| 4.207 25 - 4.207 75 | 73 - 74.6 | 1 645.5 - 1 646.5 | 9.3 - 9.5 |
| 6.215 - 6.218 | 74.8 - 75.2 | 1 660 - 1 710 | 10.6 - 12.7 |
| 6.267 75 - 6.268 25 | 108 - 121.94 | 1 718.8 - 1 722.2 | 13.25 - 13.4 |
| 6.311 75 - 6.312 25 | 123 - 138 | 2 200 - 2 300 | 14.47 - 14.5 |
| 8.291 - 8.294 | 149.9 - 150.05 | 2 310 - 2 390 | 15.35 - 16.2 |
| 8.362 - 8.366 | 156.524 75 - 156.525 | 2 483.5 - 2 500 | 17.7 - 21.4 |
| 8.376 25 - 8.386 75 | 25 | 2 690 - 2 900 | 22.01 - 23.12 |
| 8.414 25 - 8.414 75 | 156.7 - 156.9 | 3 260 - 3 267 | 23.6 - 24.0 |
| 12.29 - 12.293 | 162.012 5 - 167.17 | 3 332 - 3 339 | 31.2 - 31.8 |
| 12.519 75 - 12.520 25 | 167.72 - 173.2 | 3 345.8 - 3 358 | 36.43 - 36.5 |
| 12.576 75 - 12.577 25 | 240 - 285 | 3 600 - 4 400 | Above 38.6 |
| 13.36 - 13.41 | 322 - 335.4 | | |

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in section 15.209. At frequencies equal to or less than 1 000 MHz, compliance with the limits in section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1 000 MHz, compliance with the emission limits in section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in section 15.35 apply to these measurements.

Test procedure

ANSI C63.10-2013

Test settings**Peak field strength measurements**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in table
3. VBW \geq (3 \times RBW)
4. Detector = peak
5. Sweep time = auto
6. Trace mode = max hold
7. Allow sweeps to continue until the trace stabilizes

Table. RBW as a function of frequency

| Frequency | RBW |
|---------------------|--------------------|
| 9 kHz to 150 kHz | 200 Hz to 300 Hz |
| 0.15 MHz to 30 MHz | 9 kHz to 10 kHz |
| 30 MHz to 1 000 MHz | 100 kHz to 120 kHz |
| > 1 000 MHz | 1 MHz |

Average field strength measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW = 1/T \geq 1 Hz
4. Averaging type was set to RMS to ensure that video filtering was applied in the power domain
5. Detector = peak
6. Sweep time = auto
7. Trace mode = max hold
8. Trace was allowed to run for at least 50 times(1/duty cycle) traces

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1 GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz(\geq 1/T) for Average detection (AV) at frequency above 1 GHz. (where T = pulse width)
2. $f < 30$ MHz, extrapolation factor of 40 dB/decade of distance. $F_d = 40\log(D_m/D_s)$
 $f \geq 30$ MHz, extrapolation factor of 20 dB/decade of distance. $F_d = 20\log(D_m/D_s)$
 Where:
 F_d = Distance factor in dB
 D_m = Measurement distance in meters
 D_s = Specification distance in meters
3. Factors(dB) = Antenna factor(dB/m) + Cable loss(dB) + or Amp. gain(dB) + or F_d (dB)
4. The worst-case emissions are reported however emissions whose levels were not within 20 dB of respective limits were not reported.
5. Average test would be performed if the peak result were greater than the average limit.
6. ¹⁾ mean is restricted band.
7. According to part 15.31(f)(2), an extrapolation factor of 40 dB/decade is applied because measured distance of radiated emission is 3 m.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0172
Page (36) of (71)




[DC 12 V]

Test results (Below 30 MHz) – Worst case: GFSK_2 480 MHz

| Frequency | Pol. | Reading | Cable Loss | Amp Gain | Antenna Factor | DCCF | Result | Limit | Margin |
|----------------------------------------------------------------|-------|-----------------|------------|----------|----------------|------|-------------------|-------------------|--------|
| (MHz) | (V/H) | (dB(μV)) | (dB) | (dB) | (dB) | (dB) | (dB($\mu V/m$)) | (dB($\mu V/m$)) | (dB) |
| No spurious emissions were detected within 20 dB of the limit. | | | | | | | | | |

Horizontal/Vertical

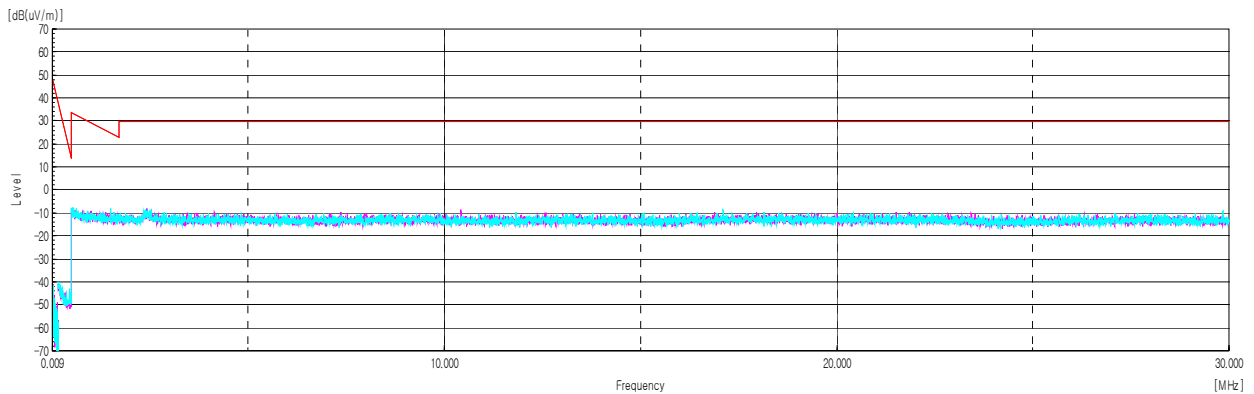

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0172
Page (37) of (71)



Test results (Below 1 000 MHz) – Worst case: GFSK_2 480 MHz

| Frequency | Pol. | Reading | Antenna Factor | Amp. + Cable | DCCF | Result | Limit | Margin |
|------------------------|-------|----------------|----------------|--------------|------|------------------|------------------|--------|
| (MHz) | (V/H) | (dB(μ V)) | (dB) | (dB) | (dB) | (dB(μ V/m)) | (dB(μ V/m)) | (dB) |
| Quasi peak data | | | | | | | | |
| 57.89 | V | 25.60 | 12.40 | -29.70 | - | 8.30 | 40.00 | 31.70 |
| 79.96 | V | 26.10 | 13.00 | -29.14 | - | 9.96 | 40.00 | 30.04 |
| 106.63 | V | 26.40 | 17.56 | -28.58 | - | 15.38 | 43.50 | 28.12 |
| 111.72 ¹⁾ | V | 26.10 | 17.70 | -28.53 | - | 15.27 | 43.50 | 28.23 |
| 198.54 | V | 26.70 | 15.15 | -27.16 | - | 14.69 | 43.50 | 28.81 |
| 250.07 ¹⁾ | V | 26.00 | 18.41 | -26.46 | - | 17.95 | 46.00 | 28.05 |

Horizontal/Vertical

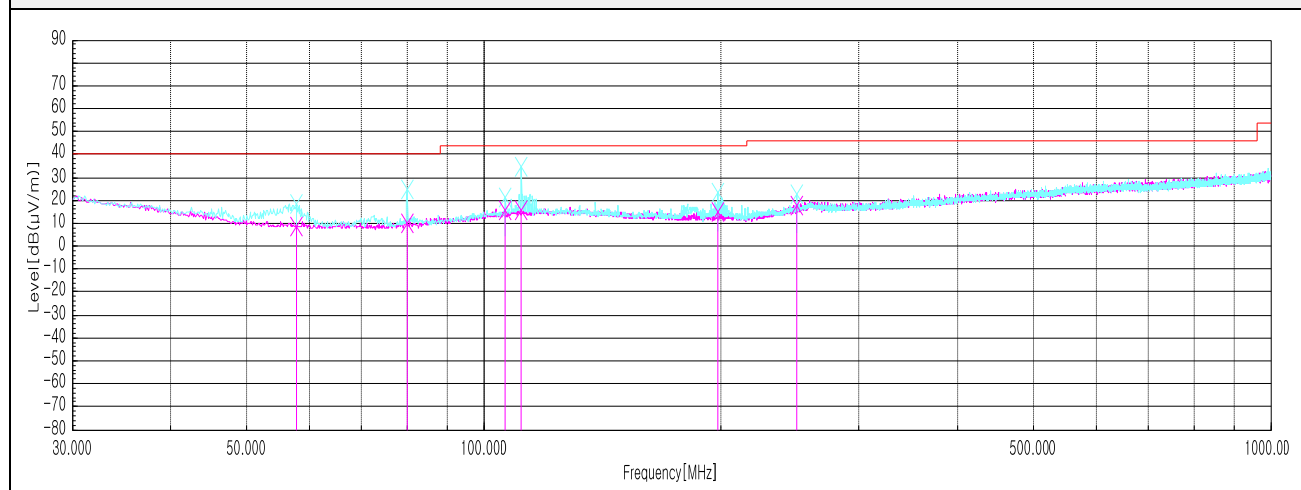

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0172
Page (38) of (71)




Test results (Above 1 000 MHz)

GFSK

2 402 MHz


| Frequency (MHz) | Pol. (V/H) | Reading (dB(μV)) | Antenna Factor (dB) | Amp. + Cable (dB) | DCCF (dB) | Result (dB(μV/m)) | Limit (dB(μV/m)) | Margin (dB) |
|------------------------|---------------|---------------------|---------------------------|----------------------|--------------|----------------------|---------------------|----------------|
| Peak data | | | | | | | | |
| 2 311.44 ¹⁾ | H | 46.96 | 31.86 | -27.27 | - | 51.55 | 74.00 | 22.45 |
| 3 698.47 ¹⁾ | H | 70.96 | 33.06 | -53.44 | - | 50.58 | 74.00 | 23.42 |
| 4 829.92 ¹⁾ | V | 61.05 | 33.80 | -53.12 | - | 41.73 | 74.00 | 32.27 |
| 5 911.08 | V | 64.81 | 35.21 | -51.23 | - | 48.79 | 74.00 | 25.21 |
| Average Data | | | | | | | | |
| 2 311.44 ¹⁾ | H | 35.91 | 31.86 | -27.27 | - | 40.50 | 54.00 | 13.50 |

Average data

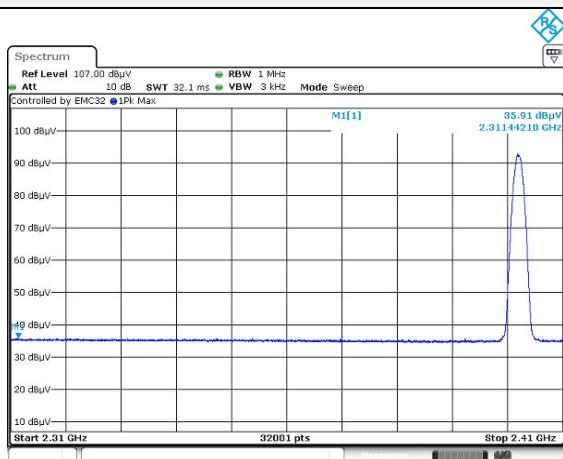

Blank

Horizontal/Vertical for Band-edge

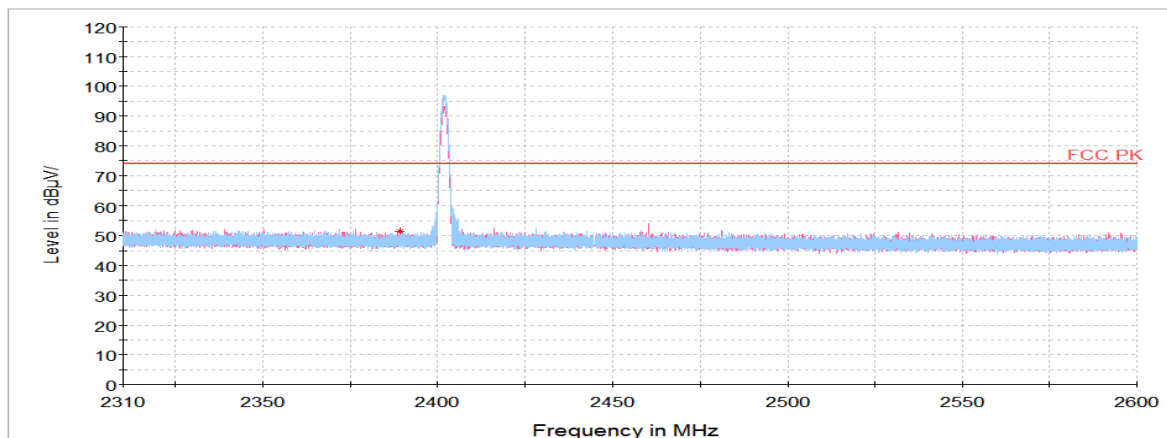


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0172
Page (39) of (71)



Horizontal/Vertical for 1 GHz ~ 3.5 GHz

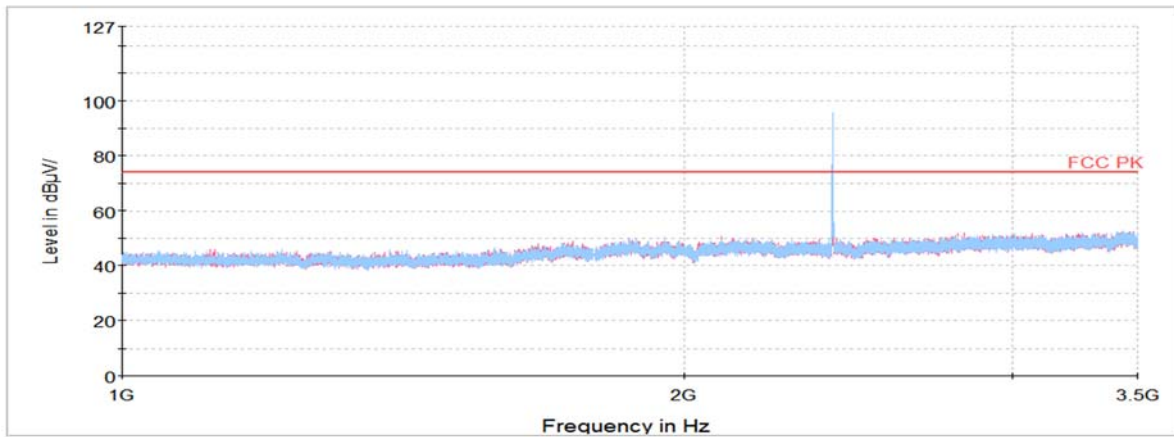

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

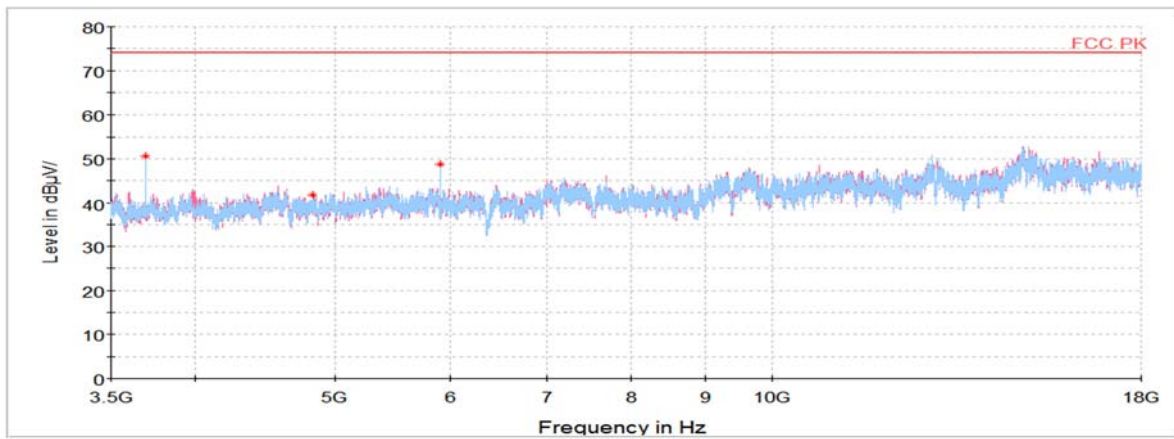

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0172
Page (40) of (71)

**2 441 MHz**

| Frequency (MHz) | Pol. (V/H) | Reading (dB(μ V)) | Antenna Factor (dB) | Amp. + Cable (dB) | DCCF (dB) | Result (dB(μ V/m)) | Limit (dB(μ V/m)) | Margin (dB) |
|----------------------------------------------------------------|---------------|---------------------------|---------------------------|----------------------|--------------|----------------------------|---------------------------|----------------|
| Peak data | | | | | | | | |
| 3 982.58 ¹⁾ | V | 64.91 | 33.00 | -52.81 | - | 45.10 | 74.00 | 28.90 |
| 5 399.50 ¹⁾ | V | 64.27 | 34.62 | -52.40 | - | 46.49 | 74.00 | 27.51 |
| 5 995.81 | V | 68.39 | 35.30 | -52.62 | - | 51.07 | 74.00 | 22.93 |
| Average Data | | | | | | | | |
| No spurious emissions were detected within 20 dB of the limit. | | | | | | | | |


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0172
Page (41) of (71)



Horizontal/Vertical for 1 GHz ~ 3.5 GHz

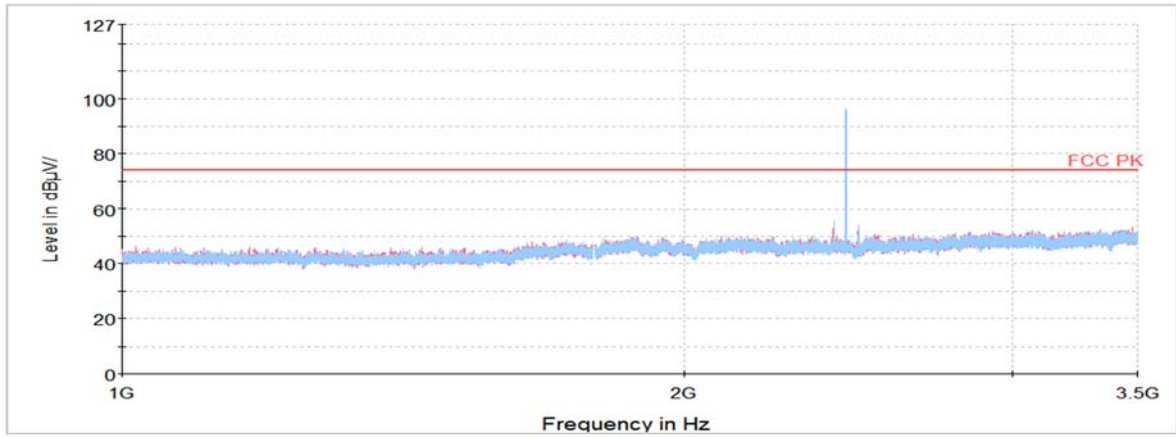

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

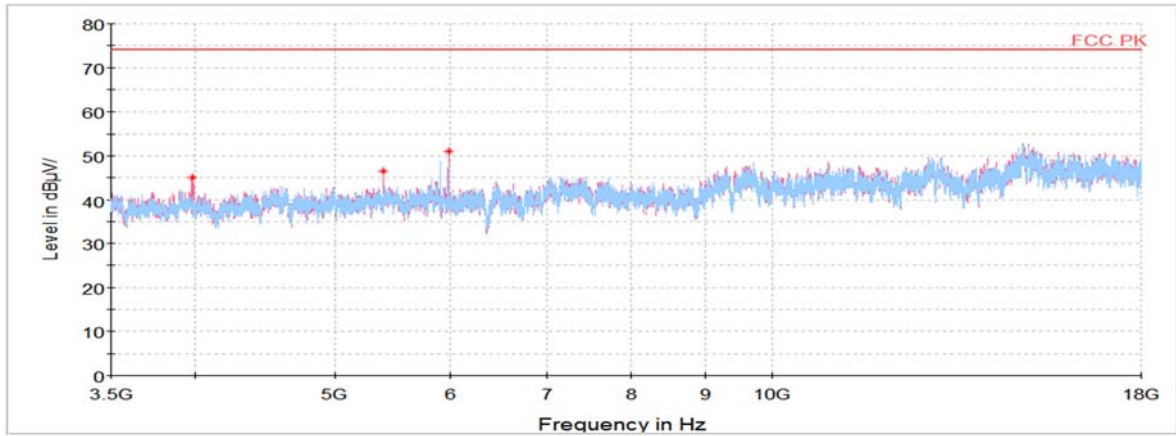


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0172
Page (42) of (71)

KCTL**2 480 MHz**

| Frequency (MHz) | Pol. (V/H) | Reading (dB(μ V)) | Antenna Factor (dB) | Amp. + Cable (dB) | DCCF (dB) | Result (dB(μ V/m)) | Limit (dB(μ V/m)) | Margin (dB) |
|----------------------------------------------------------------|---------------|---------------------------|---------------------------|----------------------|--------------|----------------------------|---------------------------|----------------|
| Peak data | | | | | | | | |
| 2 495.82 ¹⁾ | H | 47.25 | 32.19 | -28.45 | - | 50.99 | 74.00 | 23.01 |
| 3 602.41 ¹⁾ | H | 67.97 | 33.08 | -54.14 | - | 46.91 | 74.00 | 27.09 |
| 4 959.52 ¹⁾ | V | 59.97 | 33.88 | -52.49 | - | 41.36 | 74.00 | 32.64 |
| 5 911.08 | V | 64.06 | 35.21 | -51.23 | - | 48.04 | 74.00 | 25.96 |
| Average Data | | | | | | | | |
| No spurious emissions were detected within 20 dB of the limit. | | | | | | | | |

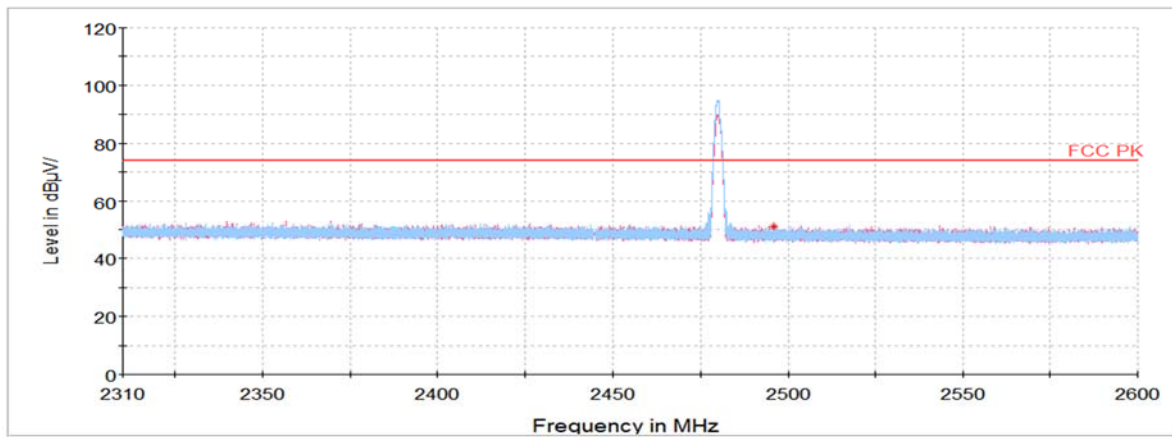Horizontal/Vertical for Band-edge


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0172
Page (43) of (71)



Horizontal/Vertical for 1 GHz ~ 3.5 GHz

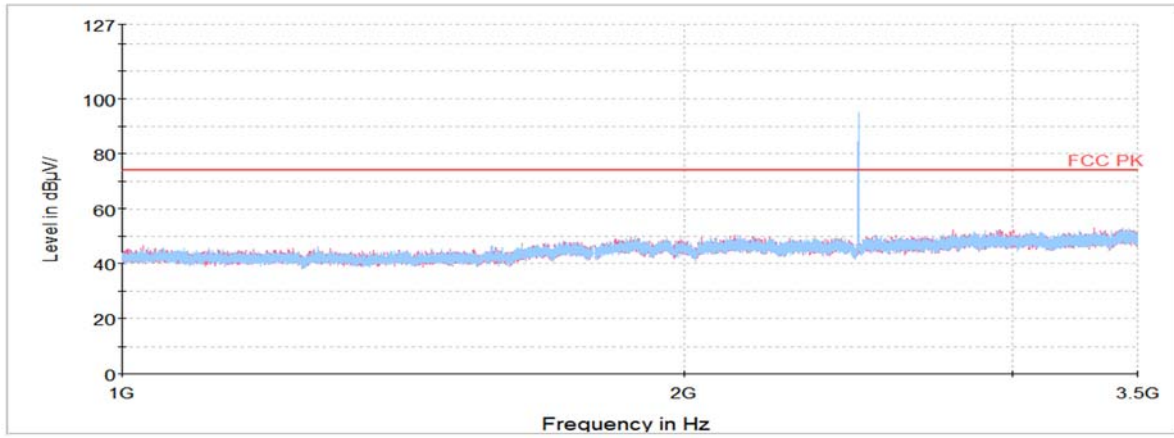

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

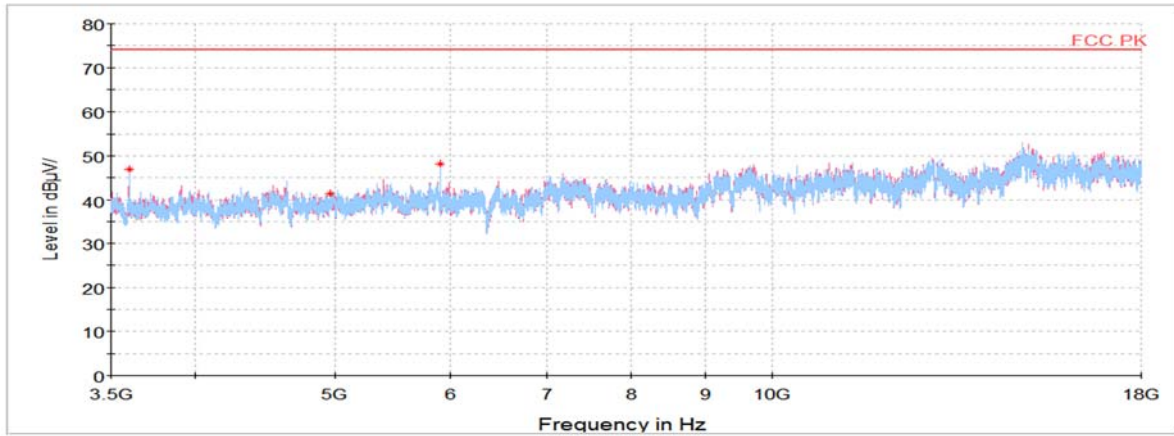

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0172
Page (44) of (71)



8DPSK 2 402 MHz


| Frequency | Pol. | Reading | Antenna Factor | Amp. + Cable | DCCF | Result | Limit | Margin |
|------------------------|-------|----------|----------------|--------------|------|------------|------------|--------|
| (MHz) | (V/H) | (dB(μV)) | (dB) | (dB) | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB) |
| Peak data | | | | | | | | |
| 2 319.25 ¹⁾ | H | 47.11 | 31.87 | -27.27 | - | 51.71 | 74.00 | 22.29 |
| 3 733.81 ¹⁾ | H | 65.11 | 33.05 | -53.61 | - | 44.55 | 74.00 | 29.45 |
| 4 830.38 ¹⁾ | H | 61.86 | 33.80 | -53.12 | - | 42.54 | 74.00 | 31.46 |
| 5 911.53 | V | 66.67 | 35.21 | -51.24 | - | 50.64 | 74.00 | 23.36 |
| Average Data | | | | | | | | |
| 2 319.25 ¹⁾ | H | 35.94 | 31.87 | -27.27 | - | 40.54 | 54.00 | 13.46 |

Average data

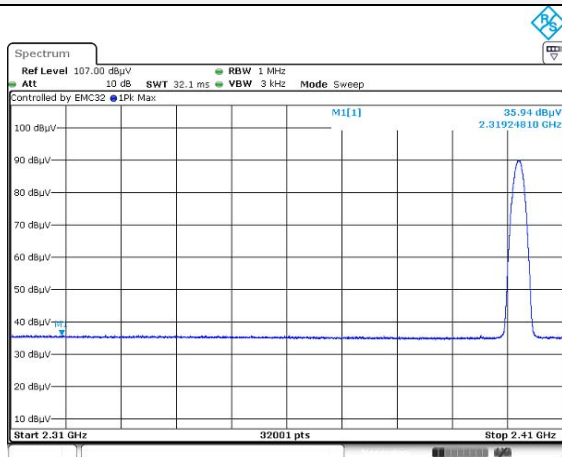

Blank

Horizontal/Vertical for Band-edge

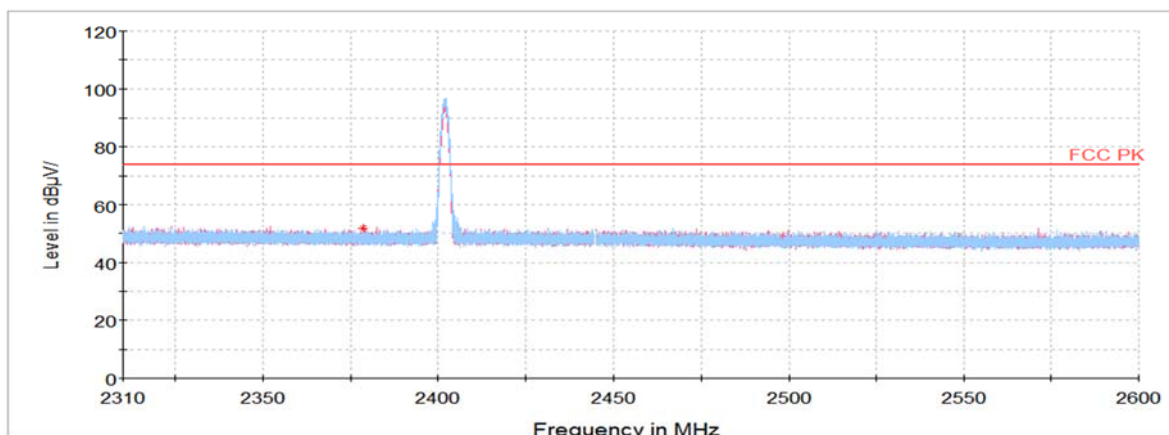


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0172
Page (45) of (71)



Horizontal/Vertical for 1 GHz ~ 3.5 GHz

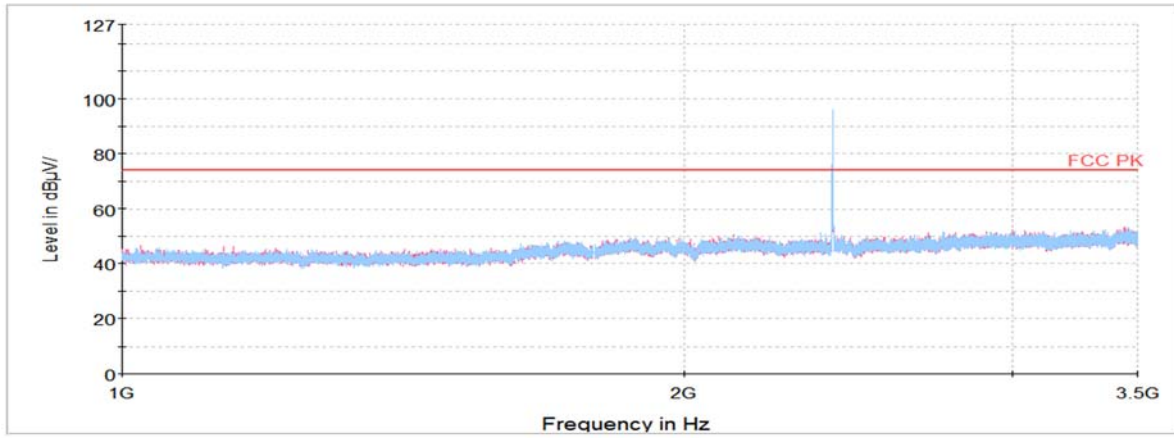

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

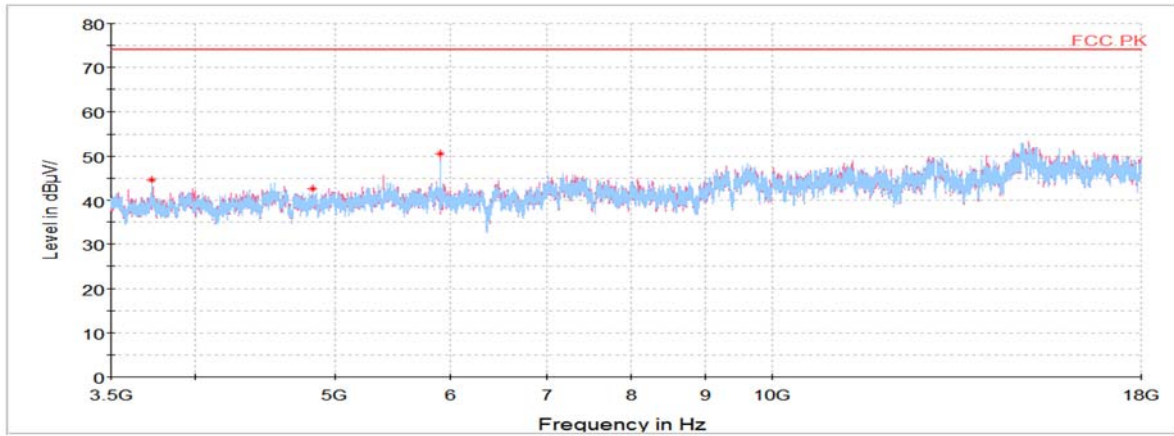

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0172
Page (46) of (71)

**2 441 MHz**

| Frequency (MHz) | Pol. (V/H) | Reading (dB(μ V)) | Antenna Factor (dB) | Amp. + Cable (dB) | DCCF (dB) | Result (dB(μ V/m)) | Limit (dB(μ V/m)) | Margin (dB) |
|----------------------------------------------------------------|---------------|---------------------------|---------------------------|----------------------|--------------|----------------------------|---------------------------|----------------|
| Peak data | | | | | | | | |
| 4 930.97 ¹⁾ | V | 61.64 | 33.86 | -52.82 | - | 42.68 | 74.00 | 31.32 |
| 5 911.08 | V | 65.40 | 35.21 | -51.23 | - | 49.38 | 74.00 | 24.62 |
| Average Data | | | | | | | | |
| No spurious emissions were detected within 20 dB of the limit. | | | | | | | | |


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0172
Page (47) of (71)



Horizontal/Vertical for 1 GHz ~ 3.5 GHz

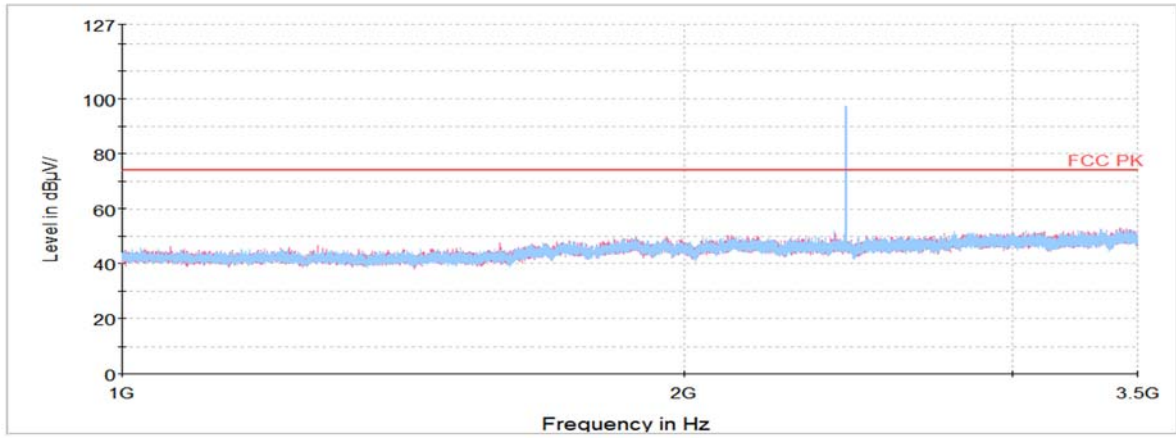

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

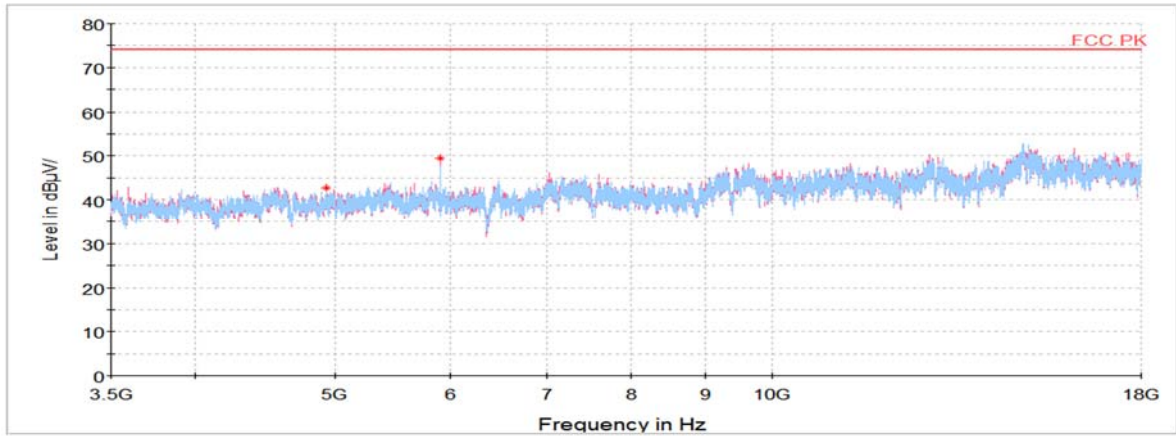


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0172
Page (48) of (71)

**2 480 MHz**

| Frequency | Pol. | Reading | Antenna Factor | Amp. + Cable | DCCF | Result | Limit | Margin |
|----------------------------------------------------------------|-------|----------------|----------------|--------------|------|------------------|------------------|--------|
| (MHz) | (V/H) | (dB(μ V)) | (dB) | (dB) | (dB) | (dB(μ V/m)) | (dB(μ V/m)) | (dB) |
| Peak data | | | | | | | | |
| 2 490.18 ¹⁾ | V | 46.89 | 32.18 | -28.38 | - | 50.69 | 74.00 | 23.31 |
| 4 961.33 ¹⁾ | V | 60.47 | 33.88 | -52.47 | - | 41.88 | 74.00 | 32.12 |
| 5 911.08 | V | 64.89 | 35.21 | -51.23 | - | 48.87 | 74.00 | 25.13 |
| Average Data | | | | | | | | |
| No spurious emissions were detected within 20 dB of the limit. | | | | | | | | |

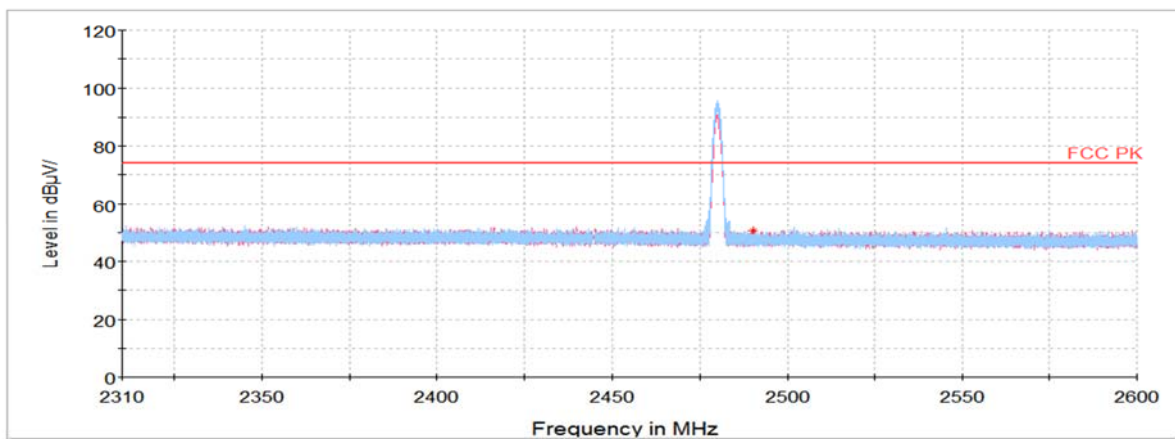Horizontal/Vertical for Band-edge


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0172
Page (49) of (71)



Horizontal/Vertical for 1 GHz ~ 3.5 GHz

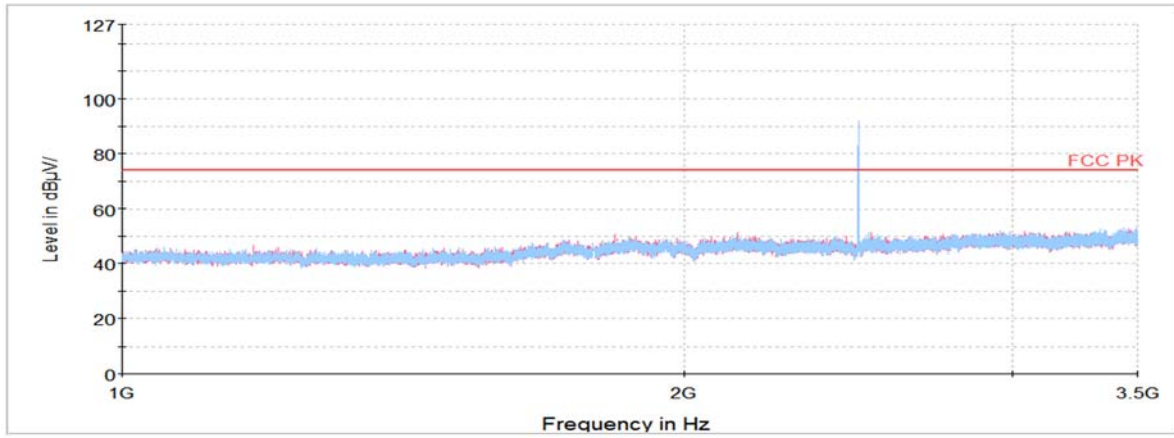

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

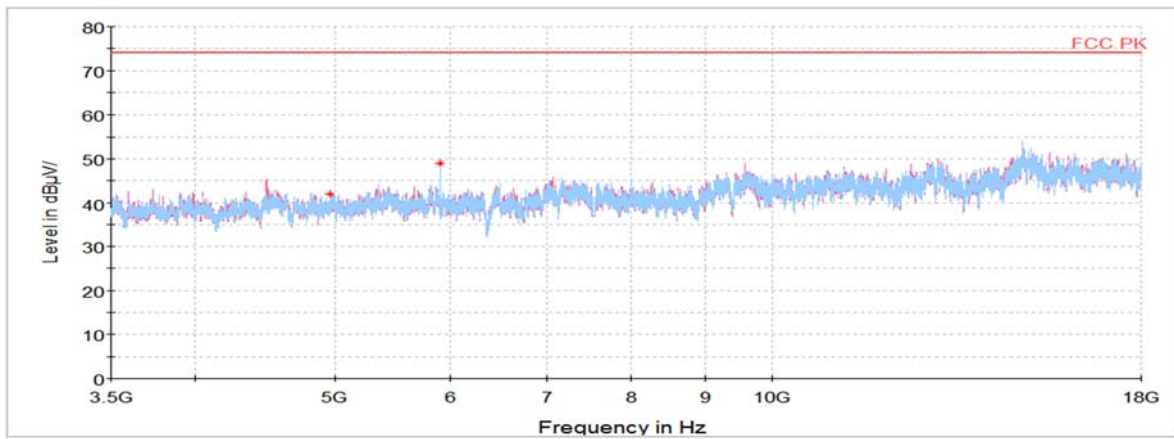

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0172
Page (50) of (71)

KCTL

Test results (Above 18 GHz) – Worst Case : GFSK_2 441 MHz

Horizontal/Vertical for 18 GHz ~ 26.5 GHz

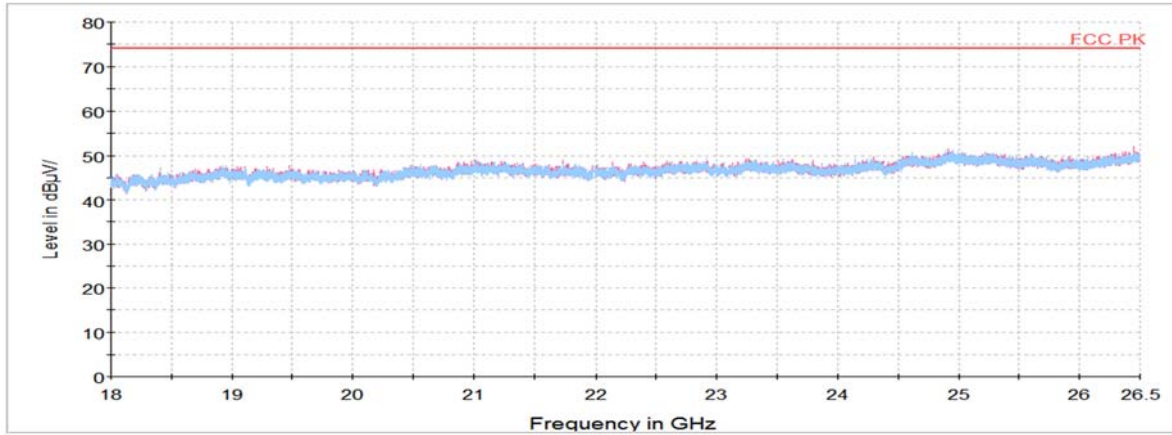

Note: The Worst case was based on the lowest margin condition considering Harmonic and Spurious Emission

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0172
Page (51) of (71)




[DC 24 V]

Test results (Below 30 MHz) – Worst case: GFSK_2 480 MHz

| Frequency | Pol. | Reading | Cable Loss | Amp Gain | Antenna Factor | DCCF | Result | Limit | Margin |
|----------------------------------------------------------------|-------|-----------------|------------|----------|----------------|------|-------------------|-------------------|--------|
| (MHz) | (V/H) | (dB(μV)) | (dB) | (dB) | (dB) | (dB) | (dB($\mu V/m$)) | (dB($\mu V/m$)) | (dB) |
| No spurious emissions were detected within 20 dB of the limit. | | | | | | | | | |

Horizontal/Vertical

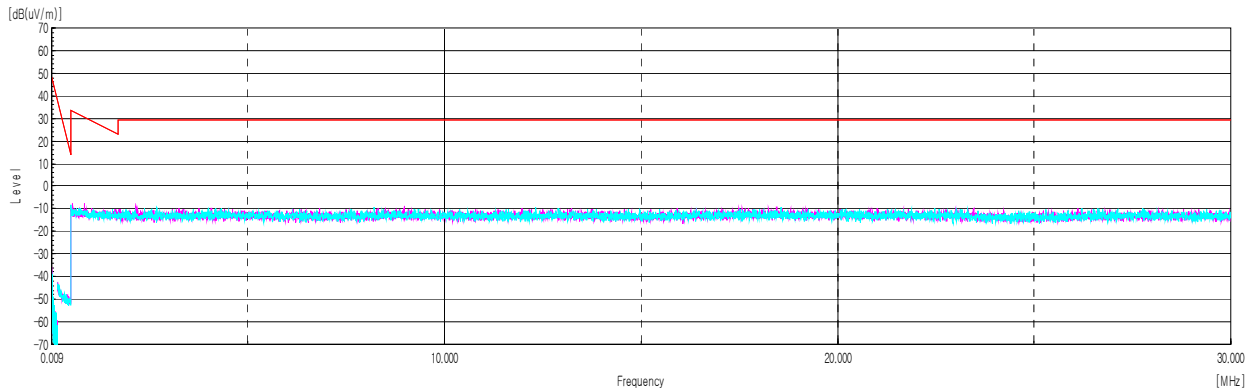

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0172
Page (52) of (71)



Test results (Below 1 000 MHz) – Worst case: GFSK_2 480 MHz

| Frequency | Pol. | Reading | Antenna Factor | Amp. + Cable | DCCF | Result | Limit | Margin |
|------------------------|-------|----------------|----------------|--------------|------|------------------|------------------|--------|
| (MHz) | (V/H) | (dB(μ V)) | (dB) | (dB) | (dB) | (dB(μ V/m)) | (dB(μ V/m)) | (dB) |
| Quasi peak data | | | | | | | | |
| 79.96 | V | 26.50 | 13.00 | -29.14 | - | 10.36 | 40.00 | 29.64 |
| 101.30 | V | 26.10 | 16.66 | -28.72 | - | 14.04 | 43.50 | 29.46 |
| 102.75 | V | 26.80 | 16.88 | -28.71 | - | 14.97 | 43.50 | 28.53 |
| 105.78 | V | 25.90 | 17.46 | -28.65 | - | 14.71 | 43.50 | 28.79 |
| 200.72 | V | 25.70 | 15.21 | -27.17 | - | 13.74 | 43.50 | 29.76 |
| 316.51 | V | 26.30 | 19.43 | -25.63 | - | 20.10 | 46.00 | 25.90 |

Horizontal/Vertical

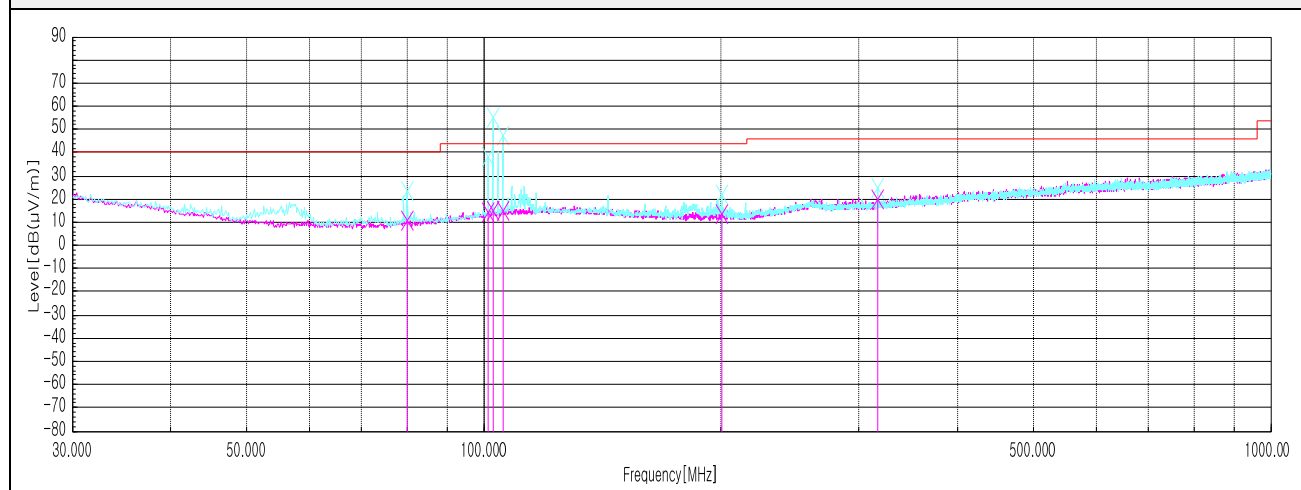


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0172
Page (53) of (71)

KCTL**Test results (Above 1 000 MHz)****GFSK****2 402 MHz**

| Frequency (MHz) | Pol. (V/H) | Reading (dB(μ V)) | Antenna Factor (dB) | Amp. + Cable (dB) | DCCF (dB) | Result (dB(μ V/m)) | Limit (dB(μ V/m)) | Margin (dB) |
|----------------------------------------------------------------|---------------|---------------------------|---------------------------|----------------------|--------------|----------------------------|---------------------------|----------------|
| Peak data | | | | | | | | |
| 2 388.89 ¹⁾ | H | 46.00 | 32.00 | -27.27 | - | 50.73 | 74.00 | 23.27 |
| 4 801.38 ¹⁾ | H | 61.16 | 33.78 | -53.09 | - | 41.85 | 74.00 | 32.15 |
| 5 911.08 | V | 65.95 | 35.21 | -51.23 | - | 49.93 | 74.00 | 24.07 |
| Average Data | | | | | | | | |
| No spurious emissions were detected within 20 dB of the limit. | | | | | | | | |

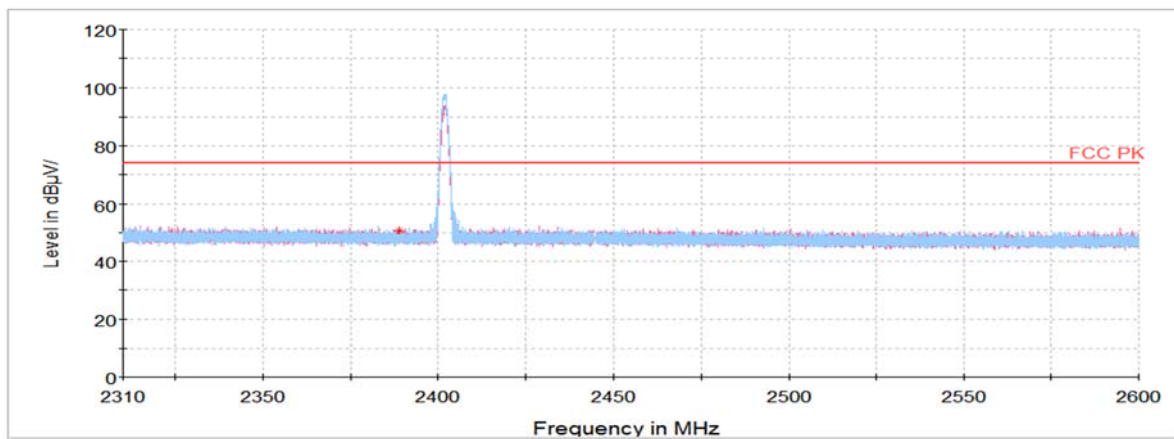Horizontal/Vertical for Band-edge


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0172
Page (54) of (71)



Horizontal/Vertical for 1 GHz ~ 3.5 GHz

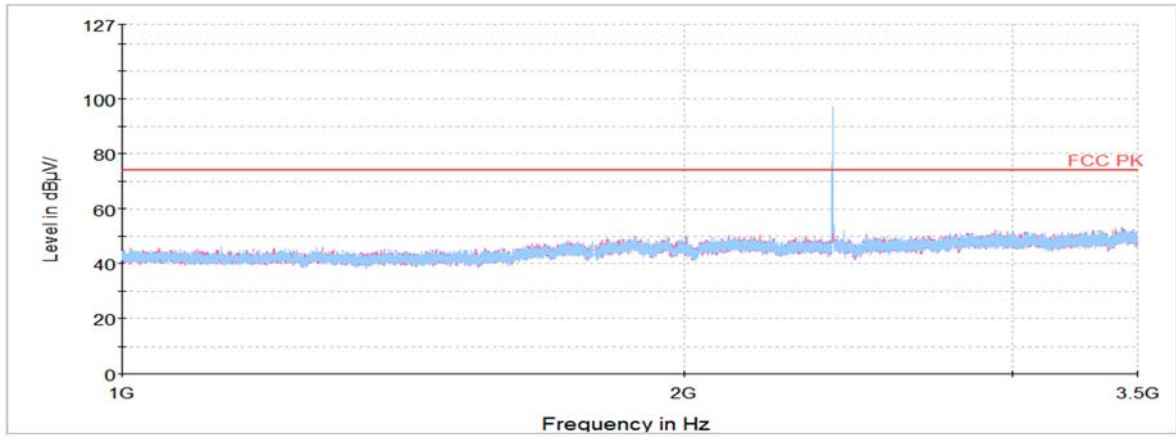

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

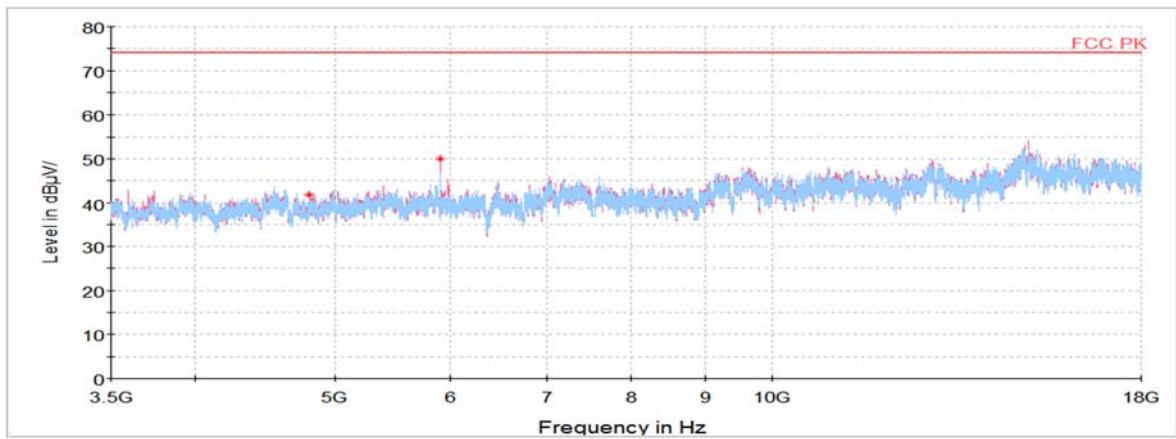

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0172
Page (55) of (71)

**2 441 MHz**

| Frequency (MHz) | Pol. (V/H) | Reading (dB(μ V)) | Antenna Factor (dB) | Amp. + Cable (dB) | DCCF (dB) | Result (dB(μ V/m)) | Limit (dB(μ V/m)) | Margin (dB) |
|----------------------------------------------------------------|---------------|---------------------------|---------------------------|----------------------|--------------|----------------------------|---------------------------|----------------|
| Peak data | | | | | | | | |
| 4 964.05 ¹⁾ | H | 59.91 | 33.88 | -52.44 | - | 41.35 | 74.00 | 32.65 |
| 5 911.08 | V | 63.64 | 35.21 | -51.23 | - | 47.62 | 74.00 | 26.38 |
| Average Data | | | | | | | | |
| No spurious emissions were detected within 20 dB of the limit. | | | | | | | | |


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0172
Page (56) of (71)



Horizontal/Vertical for 1 GHz ~ 3.5 GHz

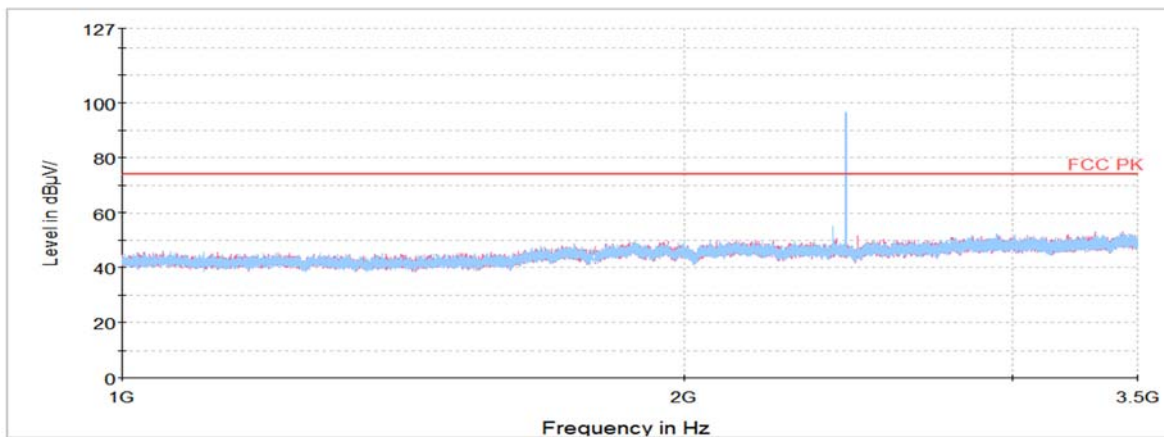

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

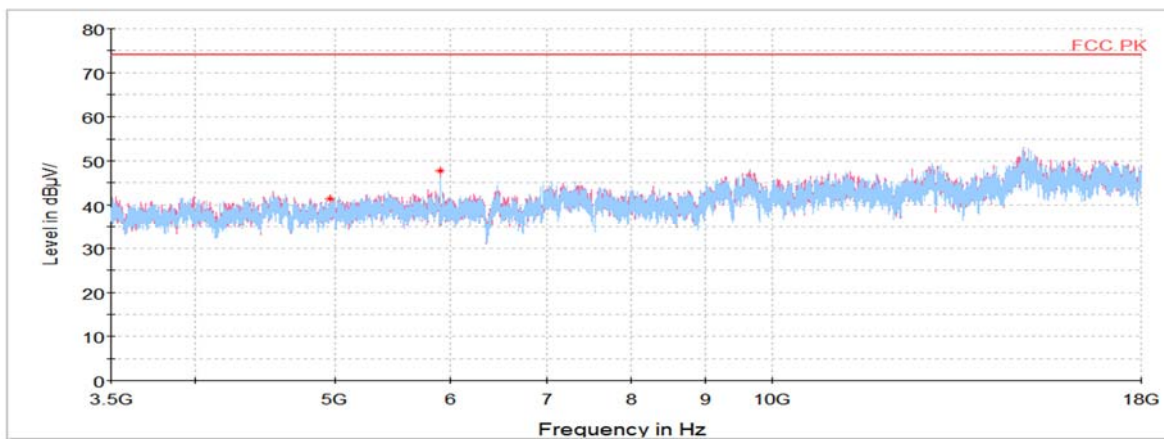

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0172
Page (57) of (71)



2 480 MHz

| Frequency (MHz) | Pol. (V/H) | Reading (dB(μ V)) | Antenna Factor (dB) | Amp. + Cable (dB) | DCCF (dB) | Result (dB(μ V/m)) | Limit (dB(μ V/m)) | Margin (dB) |
|----------------------------------------------------------------|---------------|---------------------------|---------------------------|----------------------|--------------|----------------------------|---------------------------|----------------|
| Peak data | | | | | | | | |
| 2 499.09 ¹⁾ | H | 47.16 | 32.20 | -28.49 | - | 50.87 | 74.00 | 23.13 |
| 4 973.11 ¹⁾ | V | 60.58 | 33.88 | -52.34 | - | 42.12 | 74.00 | 31.88 |
| 5 911.08 | V | 64.76 | 35.21 | -51.23 | - | 48.74 | 74.00 | 25.26 |
| Average Data | | | | | | | | |
| No spurious emissions were detected within 20 dB of the limit. | | | | | | | | |

Horizontal/Vertical for Band-edge

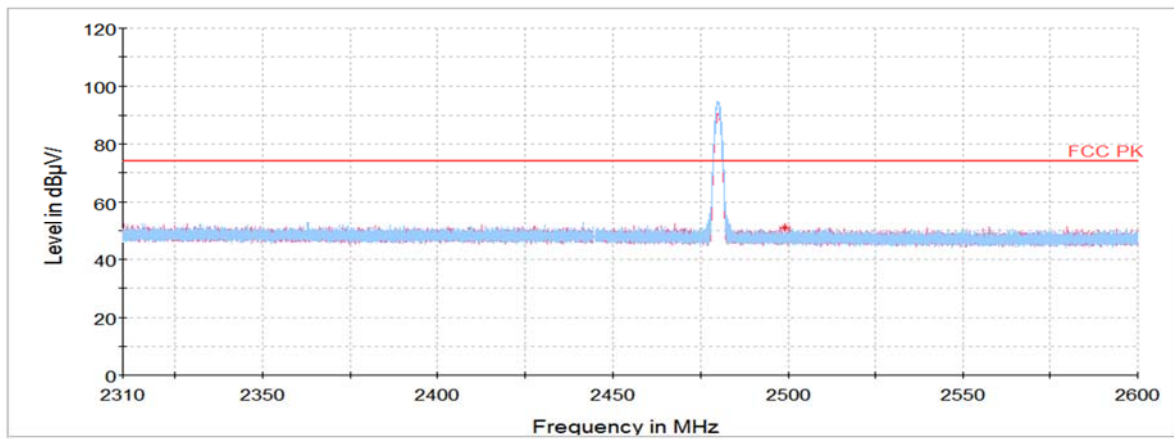


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0172
Page (58) of (71)



Horizontal/Vertical for 1 GHz ~ 3.5 GHz

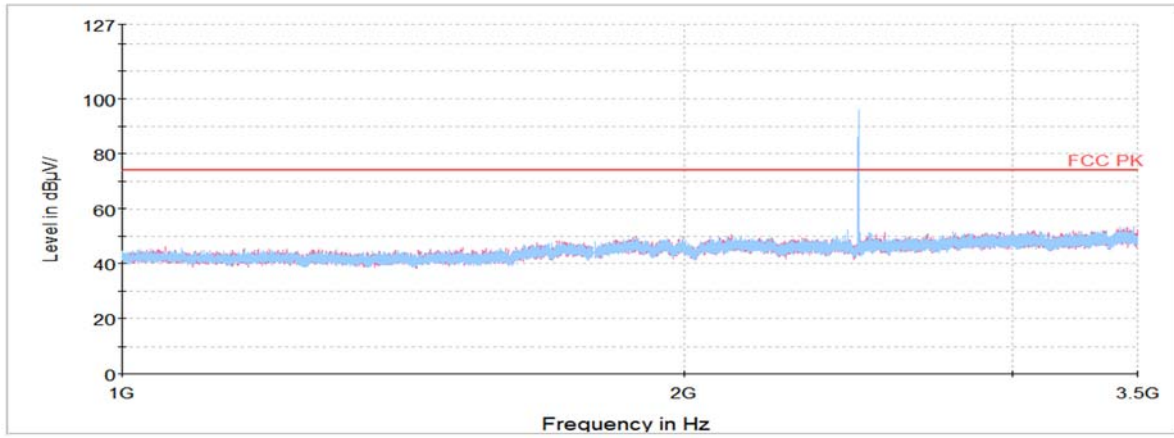

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

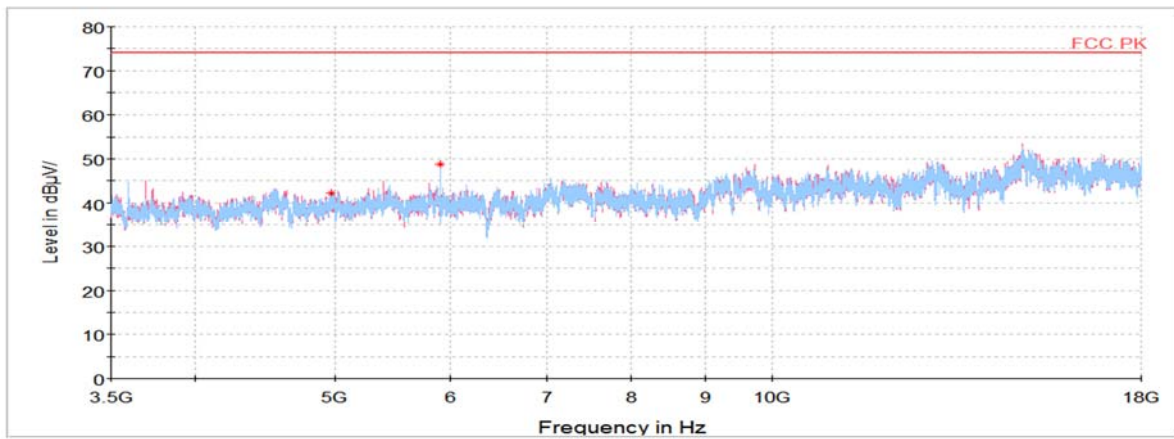

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0172
Page (59) of (71)



8DPSK 2 402 MHz


| Frequency | Pol. | Reading | Antenna Factor | Amp. + Cable | DCCF | Result | Limit | Margin |
|------------------------|-------|----------|----------------|--------------|------|------------|------------|--------|
| (MHz) | (V/H) | (dB(μV)) | (dB) | (dB) | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB) |
| Peak data | | | | | | | | |
| 2 360.30 ¹⁾ | H | 47.26 | 31.95 | -27.27 | - | 51.94 | 74.00 | 22.06 |
| 4 808.63 ¹⁾ | H | 60.46 | 33.79 | -53.10 | - | 41.15 | 74.00 | 32.85 |
| 5 911.08 | V | 65.82 | 35.21 | -51.23 | - | 49.80 | 74.00 | 24.20 |
| Average Data | | | | | | | | |
| 2 360.30 ¹⁾ | H | 35.94 | 31.95 | -27.27 | - | 40.62 | 54.00 | 13.38 |

Average data

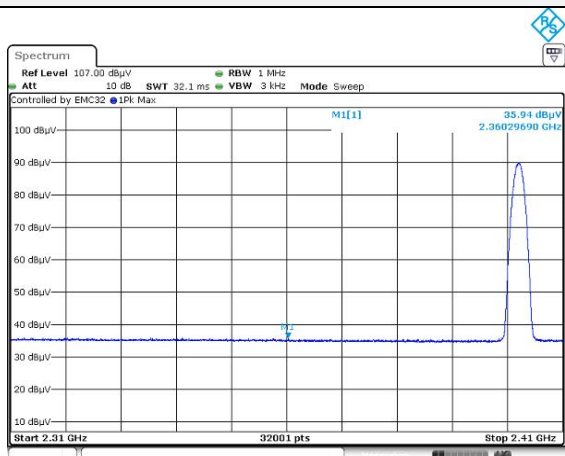

Blank

Horizontal/Vertical for Band-edge

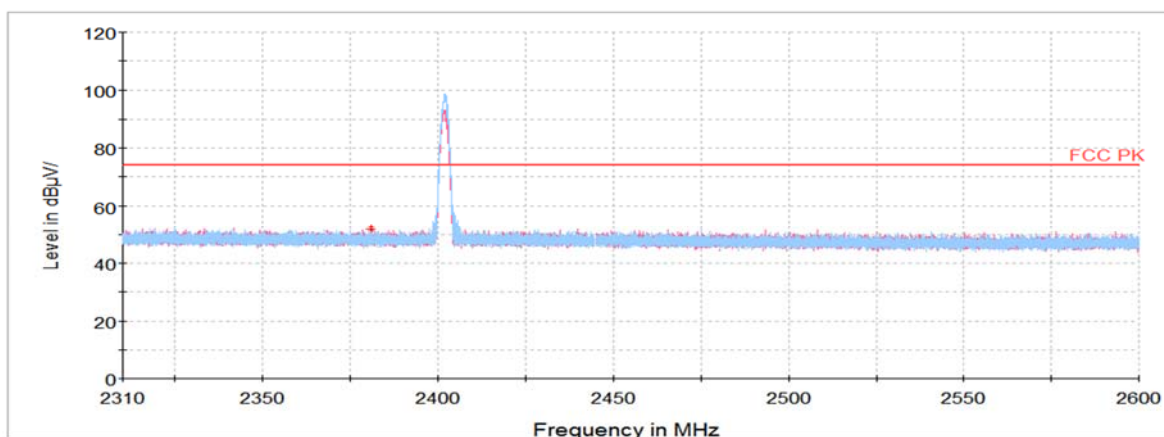


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0172
Page (60) of (71)



Horizontal/Vertical for 1 GHz ~ 3.5 GHz

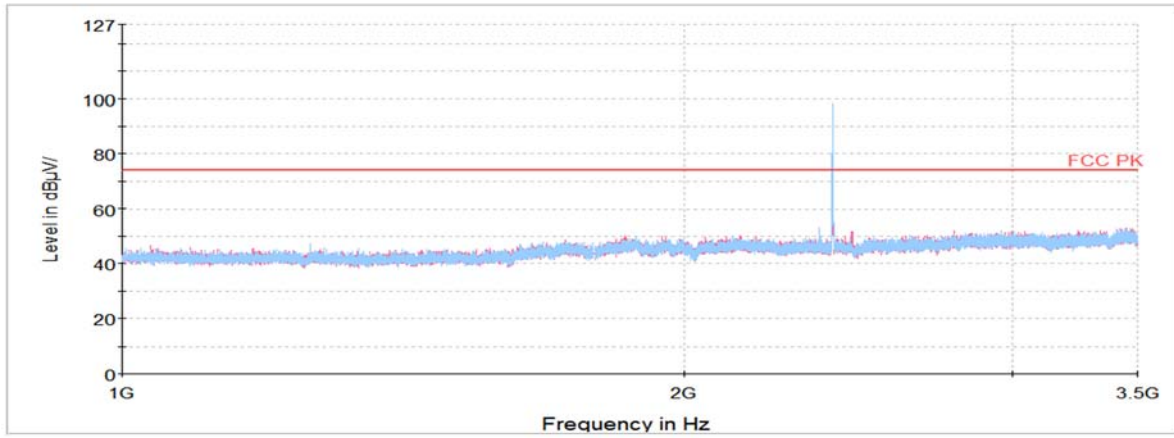

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

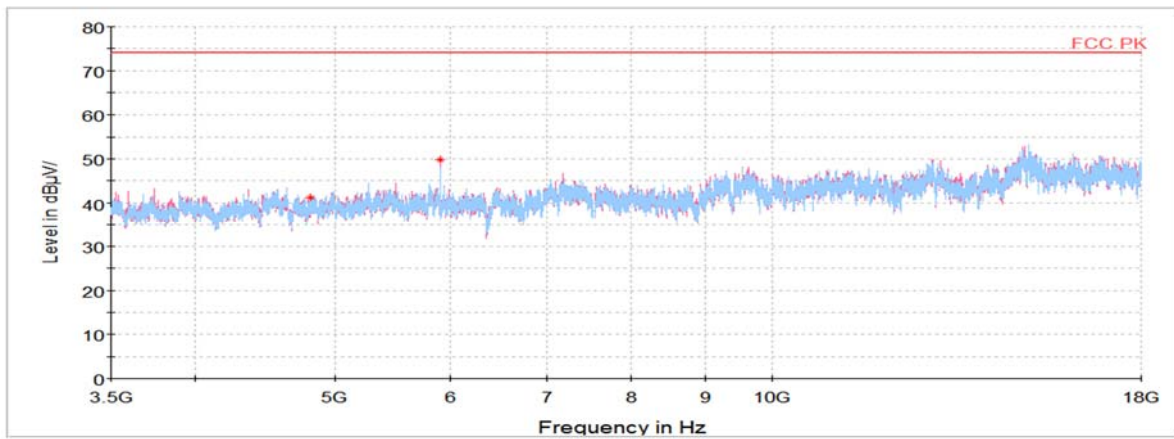

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0172
Page (61) of (71)

**2 441 MHz**

| Frequency (MHz) | Pol. (V/H) | Reading (dB(μ V)) | Antenna Factor (dB) | Amp. + Cable (dB) | DCCF (dB) | Result (dB(μ V/m)) | Limit (dB(μ V/m)) | Margin (dB) |
|----------------------------------------------------------------|---------------|---------------------------|---------------------------|----------------------|--------------|----------------------------|---------------------------|----------------|
| Peak data | | | | | | | | |
| 3 602.41 ¹⁾ | V | 70.03 | 33.08 | -54.14 | - | 48.97 | 74.00 | 25.03 |
| 5 911.08 | V | 64.48 | 35.21 | -51.23 | - | 48.46 | 74.00 | 25.54 |
| Average Data | | | | | | | | |
| No spurious emissions were detected within 20 dB of the limit. | | | | | | | | |


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0172
Page (62) of (71)



Horizontal/Vertical for 1 GHz ~ 3.5 GHz

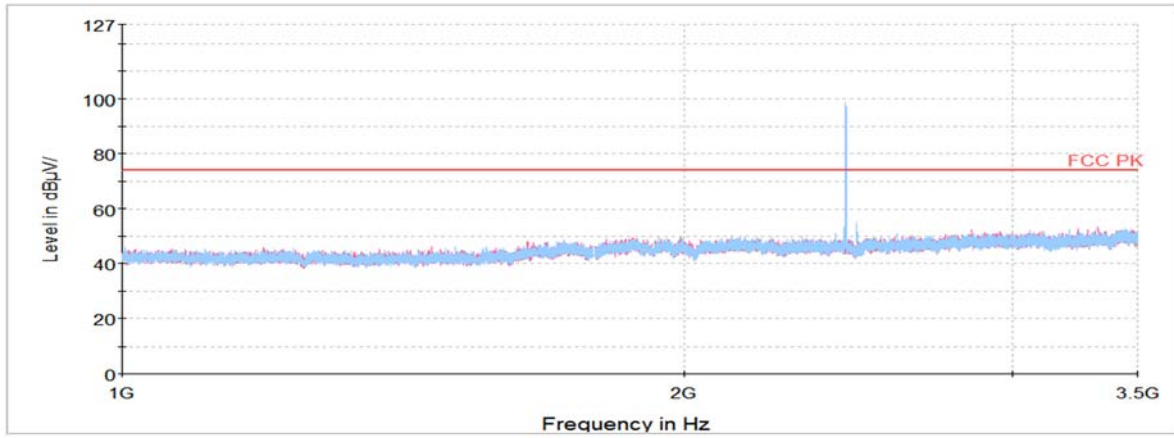

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

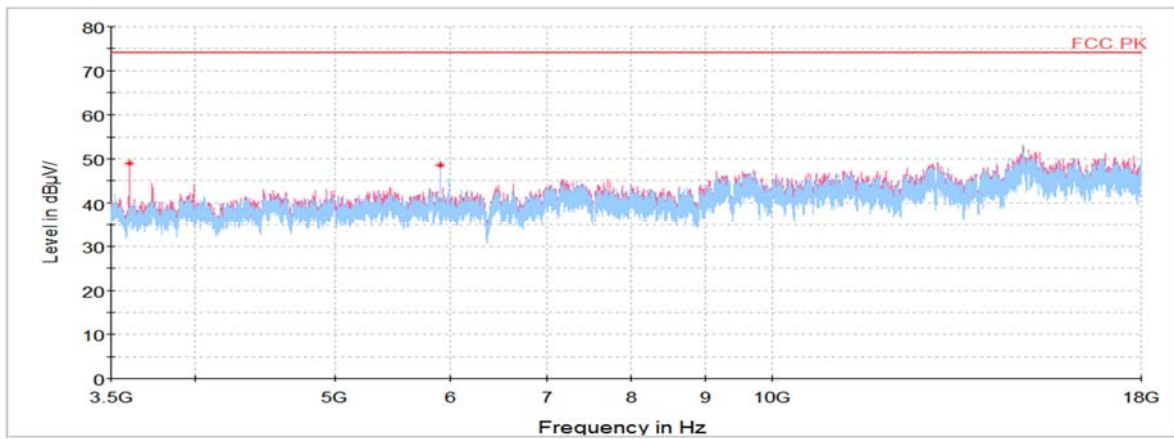


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0172
Page (63) of (71)

**2 480 MHz**

| Frequency | Pol. | Reading | Antenna Factor | Amp. + Cable | DCCF | Result | Limit | Margin |
|----------------------------------------------------------------|-------|----------------|----------------|--------------|------|------------------|------------------|--------|
| (MHz) | (V/H) | (dB(μ V)) | (dB) | (dB) | (dB) | (dB(μ V/m)) | (dB(μ V/m)) | (dB) |
| Peak data | | | | | | | | |
| 2 495.78 ¹⁾ | H | 47.11 | 32.19 | -28.45 | - | 50.85 | 74.00 | 23.15 |
| 4 959.52 ¹⁾ | V | 61.11 | 33.88 | -52.49 | - | 42.50 | 74.00 | 31.50 |
| 5 911.08 | V | 65.09 | 35.21 | -51.23 | - | 49.07 | 74.00 | 24.93 |
| Average Data | | | | | | | | |
| No spurious emissions were detected within 20 dB of the limit. | | | | | | | | |

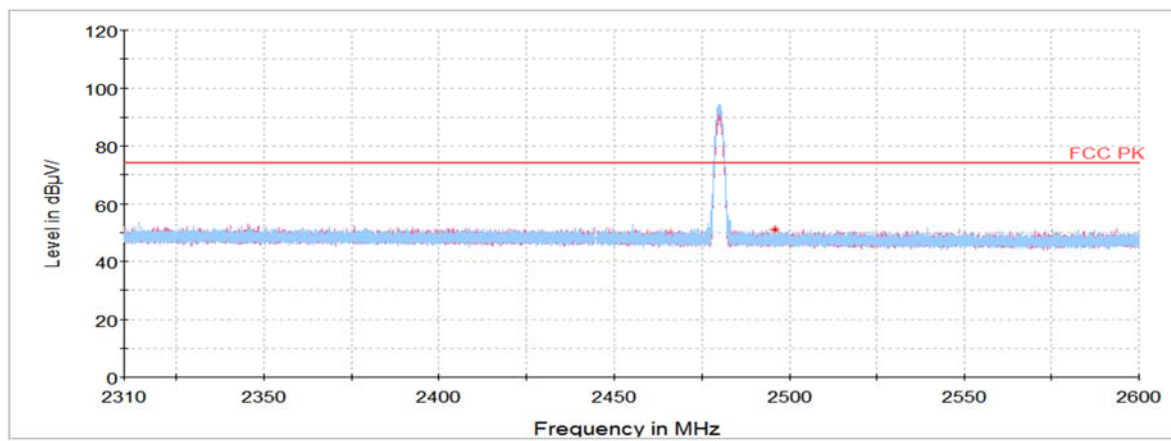Horizontal/Vertical for Band-edge


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0172
Page (64) of (71)



Horizontal/Vertical for 1 GHz ~ 3.5 GHz

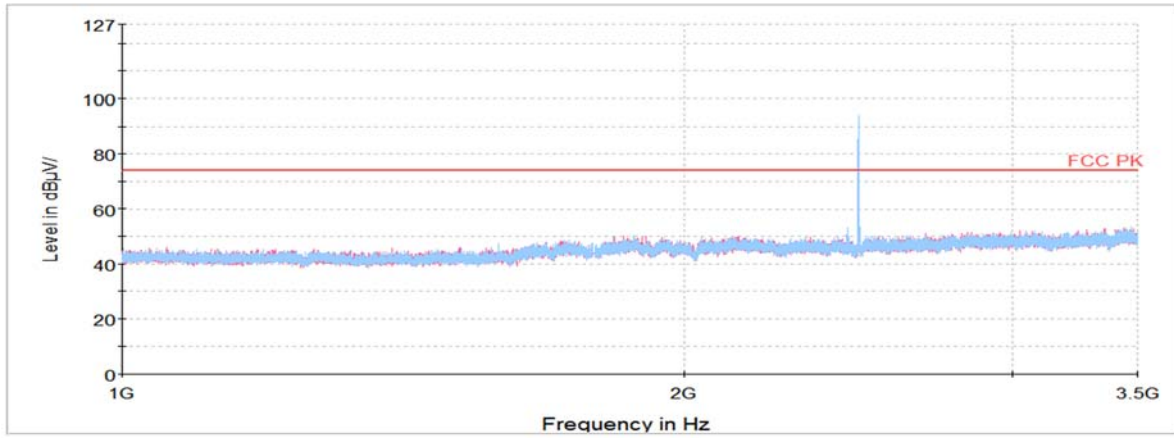

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

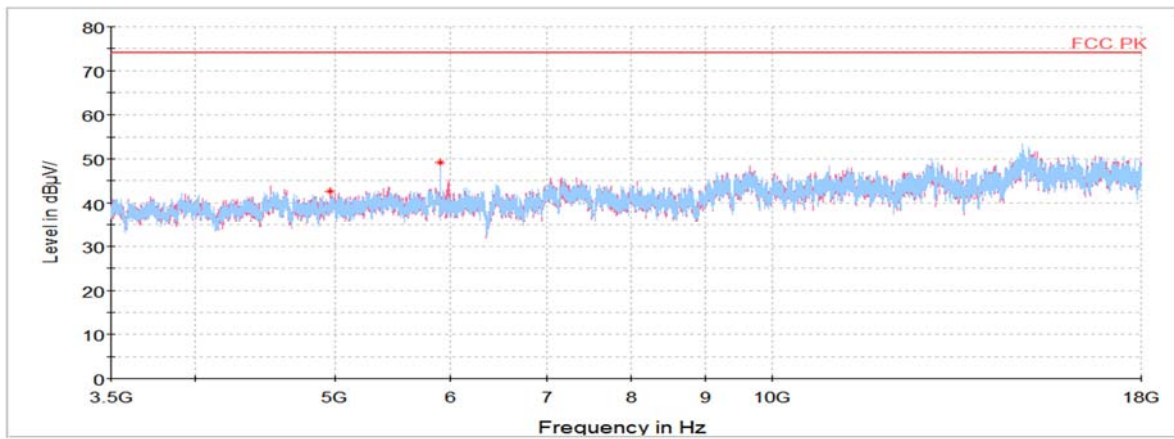

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0172
Page (65) of (71)

KCTL

Test results (Above 18 GHz) – Worst Case : GFSK_2 402 MHz


Horizontal/Vertical for 18 GHz ~ 26.5 GHz

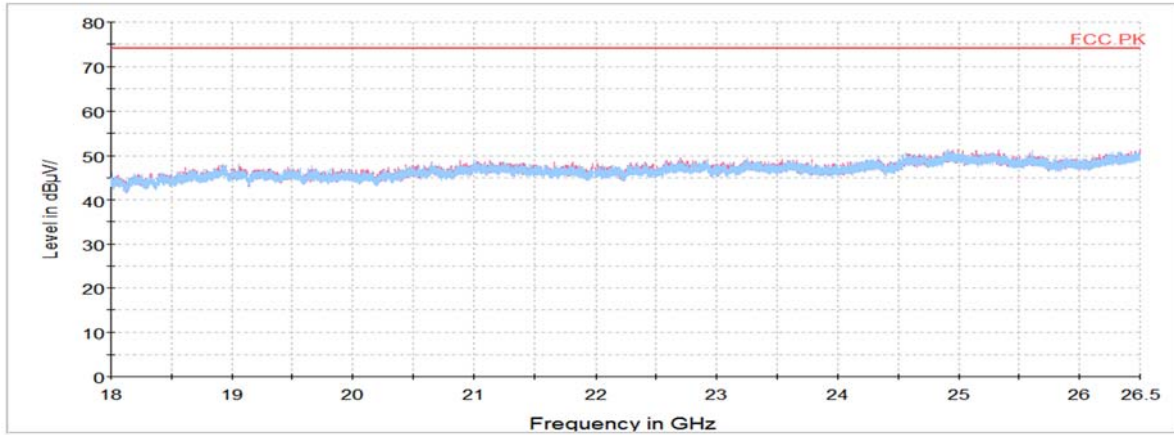

Note: The Worst case was based on the lowest margin condition considering Harmonic and Spurious Emission

7.7. Conducted Spurious Emission

Test setup

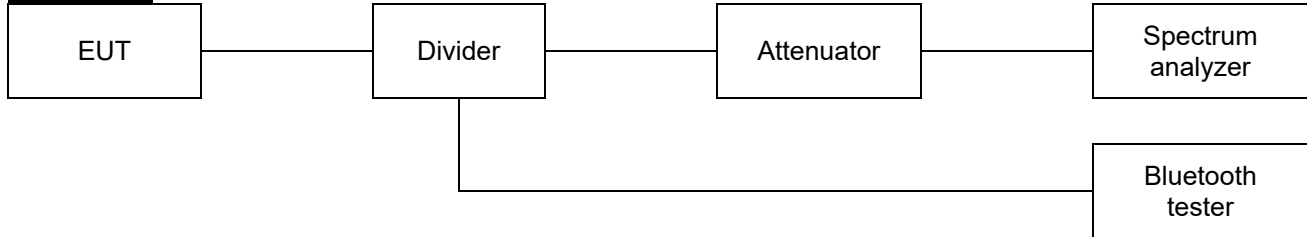

Limit

According to §15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operation, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation specified in §15.209(a) is not required. In addition, radiated emission limits specified in §15.209(a) (see §15.205(c)).

Limit : 20 dBc

Test procedure

ANSI C63.10-2013 - Section 6.10.4, 7.8.8

Test settings

▪ Band-edge

- 1) Span : Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation
- 2) Reference level : As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log(\text{OBW}/\text{RBW})]$ below the reference level.
- 3) Attenuation: Auto (at least 10 dB preferred)
- 4) Sweep time = Coupled
- 5) RBW : 100 kHz
- 6) VBW : 300 kHz
- 7) Detector : Peak
- 8) Trace : Max hold

▪ Spurious emissions

- 1) Span : 30 MHz to 10 times the operating frequency in GHz
- 2) RBW : 100 kHz
- 3) VBW : 300 kHz
- 4) Sweep time : Coupled
- 5) Detector : Peak

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0172
Page (67) of (71)




Test results

[DC 12 V]
GFSK


Conducted band-edge / 2 402 MHz

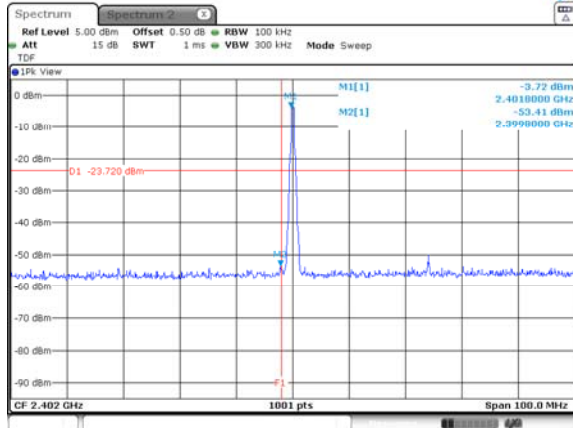


Conducted spurious / 2 402 MHz

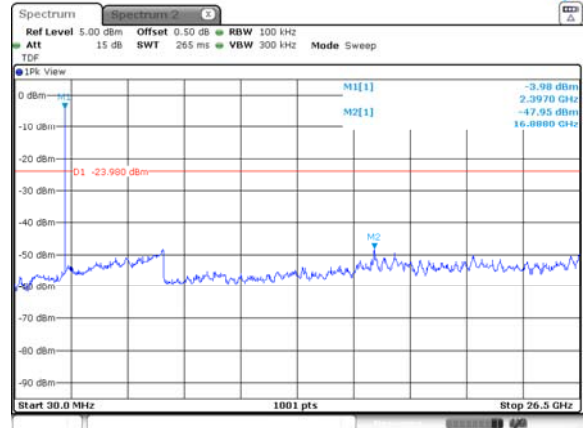


Conducted band-edge / 2 480 MHz

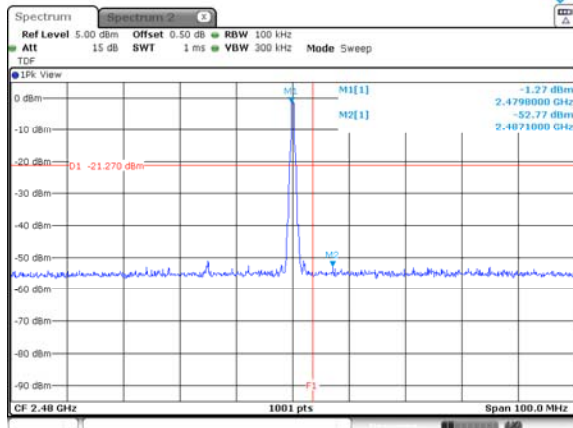


Conducted spurious / 2 441 MHz

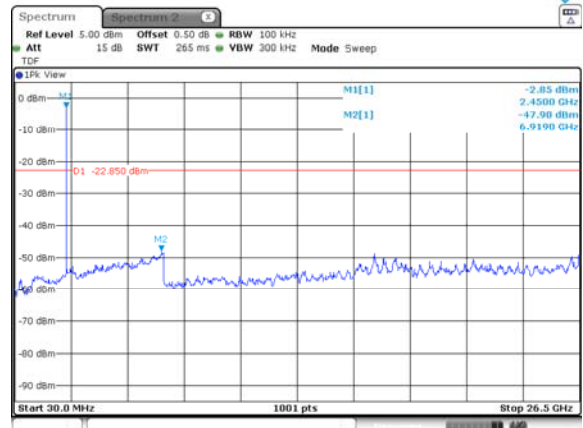

Conducted band-edge / Hopping ch.

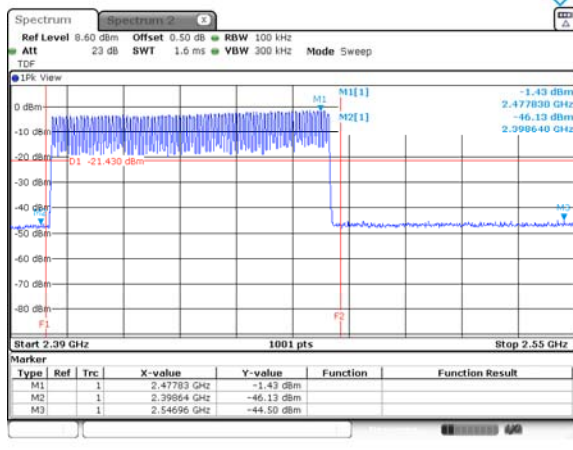

Conducted spurious / 2 480 MHz

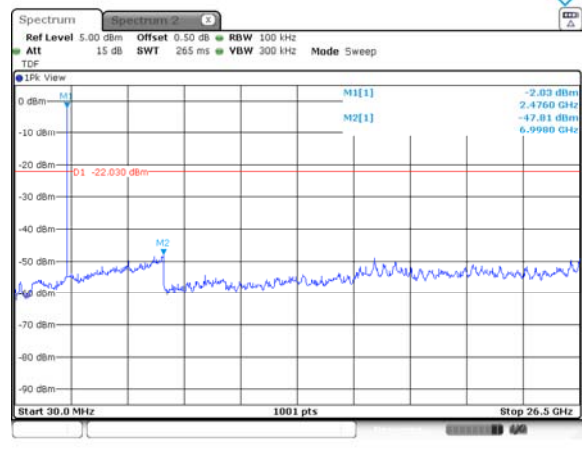

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0172
Page (68) of (71)




8DPSK


Conducted band-edge / 2 402 MHz

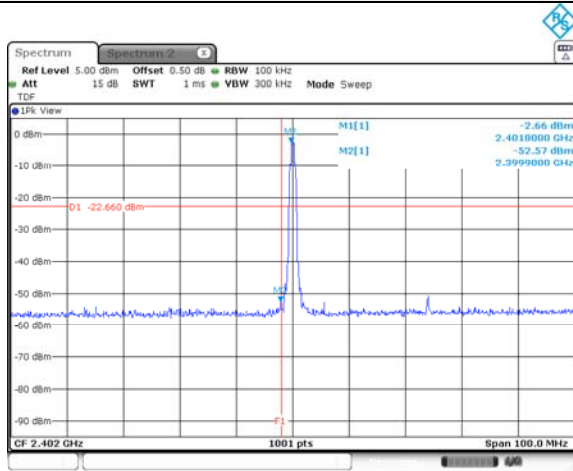


Conducted spurious / 2 402 MHz

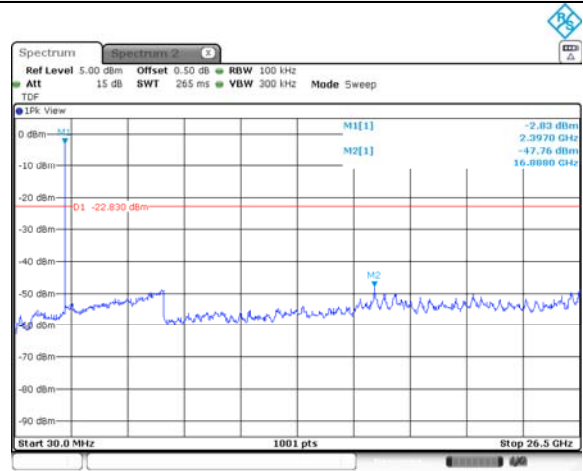


Conducted band-edge / 2 480 MHz

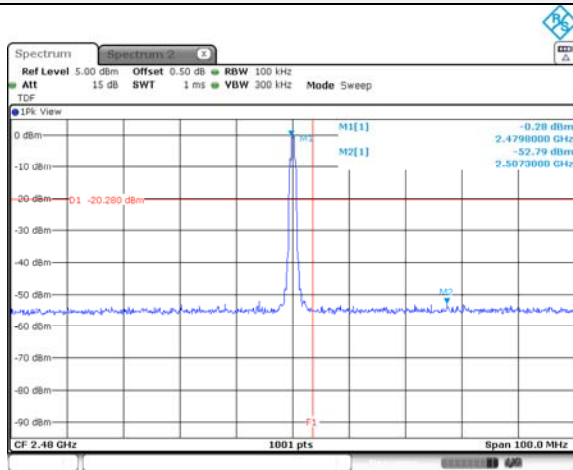


Conducted spurious / 2 441 MHz

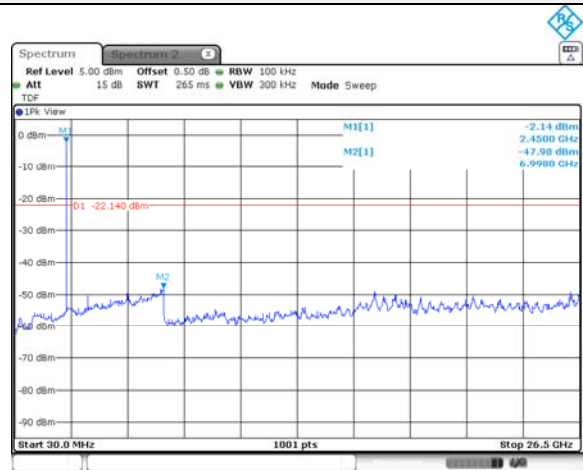

Conducted band-edge / Hopping ch.

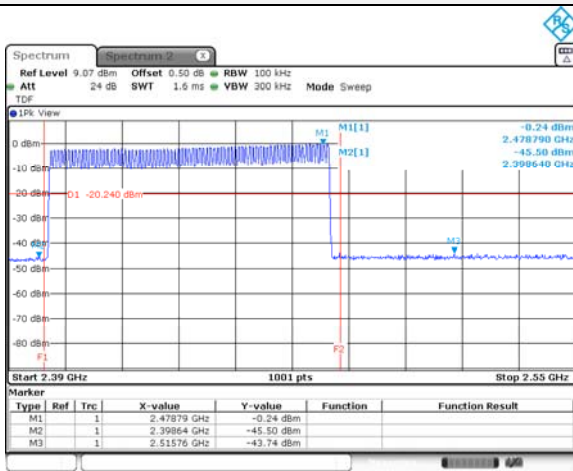

Conducted spurious / 2 480 MHz

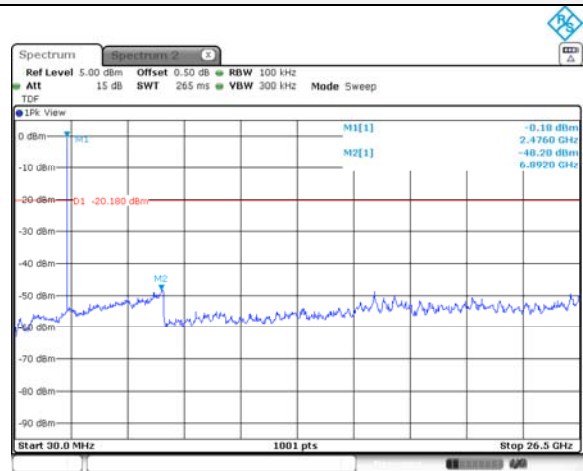

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0172
Page (69) of (71)




[DC 24 V] GFSK


Conducted band-edge / 2 402 MHz

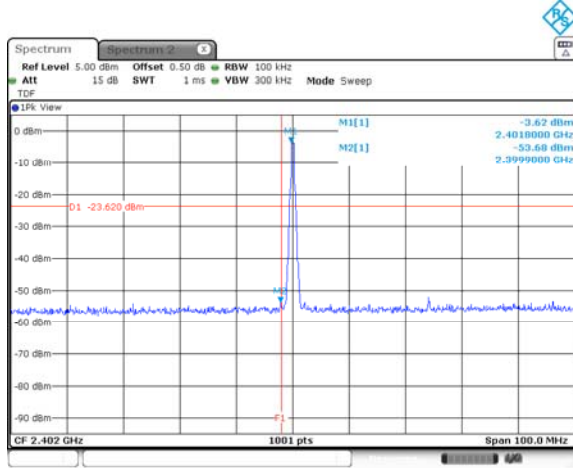


Conducted spurious / 2 402 MHz

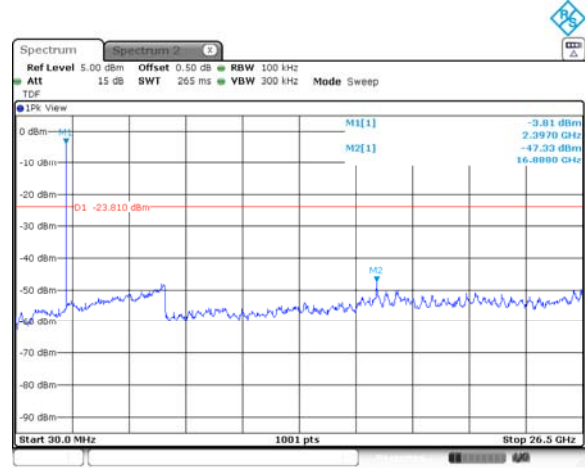


Conducted band-edge / 2 480 MHz

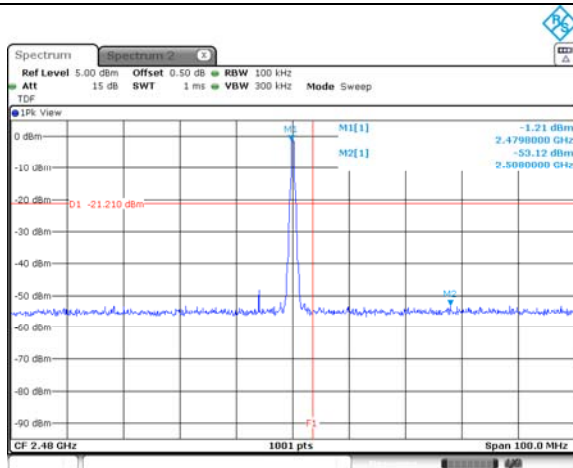


Conducted spurious / 2 441 MHz

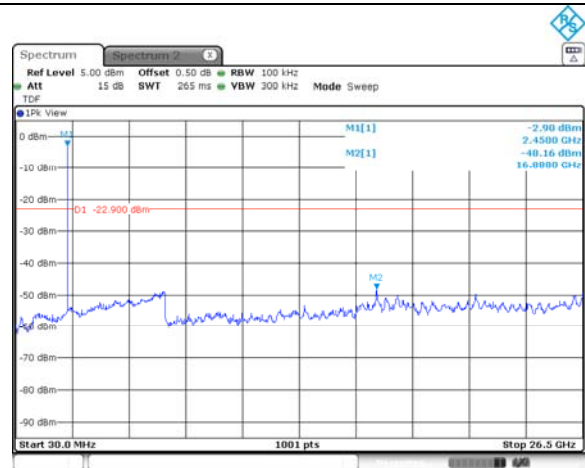

Conducted band-edge / Hopping ch.

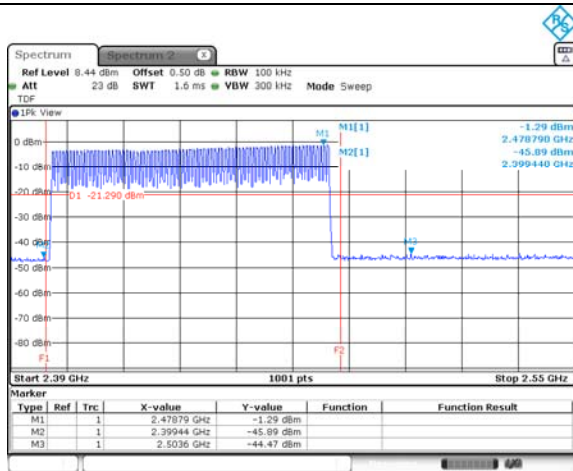

Conducted spurious / 2 480 MHz

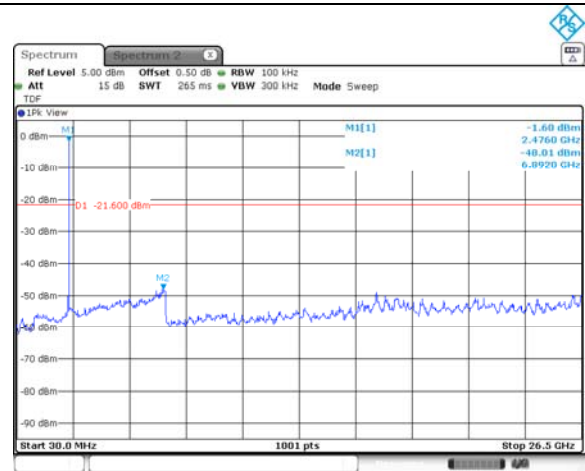

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0172
Page (70) of (71)




8DPSK


Conducted band-edge / 2 402 MHz

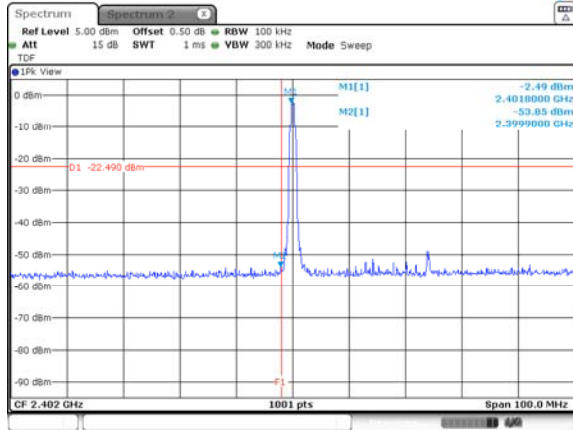


Conducted spurious / 2 402 MHz

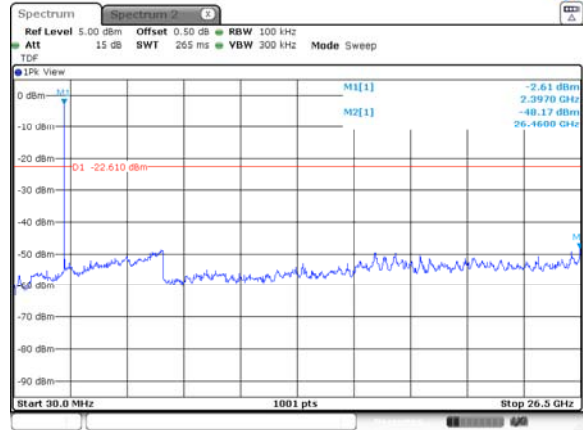


Conducted band-edge / 2 480 MHz

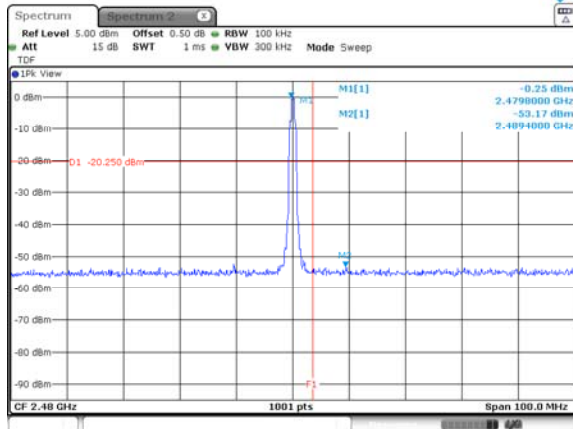


Conducted spurious / 2 441 MHz

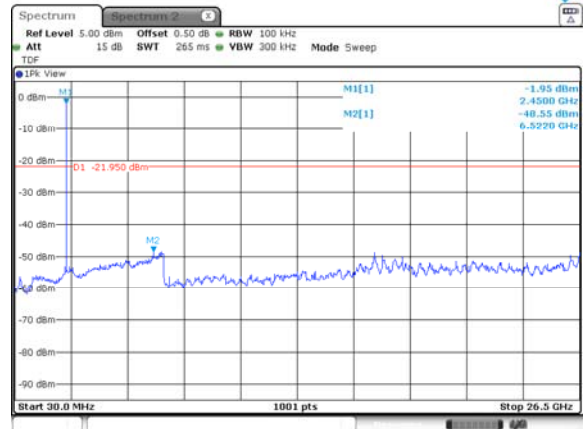


Conducted band-edge / Hopping ch.

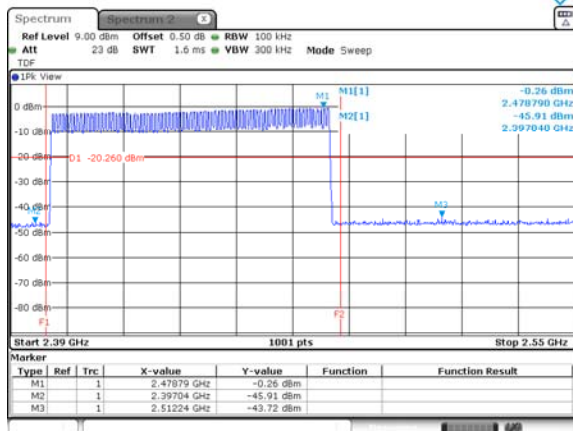

Conducted spurious / 2 480 MHz

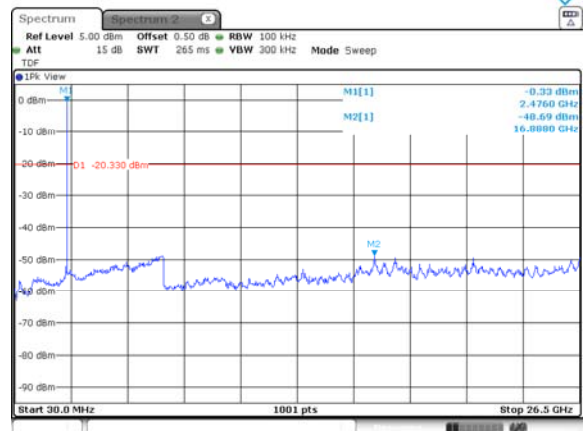

| | | |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|-------------------------------------------------------------------------------------|
| KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr | Report No.: KR21-SRF0172 Page (71) of (71) |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|-------------------------------------------------------------------------------------|

8. Measurement equipment

| Equipment Name | Manufacturer | Model No. | Serial No. | Next Cal. Date |
|-----------------------------|------------------------------|-----------------------------------------|----------------------------|----------------|
| Vector Signal Generator | R&S | SMBV100A | 257566 | 22.07.09 |
| Signal Generator | R&S | SMB100A | 176206 | 22.01.20 |
| Spectrum Analyzer | R&S | FSV30 | 100808 | 22.07.27 |
| DC Power Supply | AGILENT | E3632A | MY40007371 | 22.05.10 |
| Attenuator | API Inmet | 40AH2W-10 | 10 | 22.07.29 |
| Attenuator | R&S | DNF Dämpfungsglied 10 dB in N-50 Ohm | 31211 | 22.05.11 |
| Power Sensor | R&S | NRP-Z81 | 1137.9009.02- 106223-bB | 22.05.11 |
| Bluetooth Tester | TESCOM | TC-3000B | 3000B640056 | 22.01.20 |
| Power Divider | Aeroflex/ Weinschel, Inc. | 1580-1 | RZ184 | 21.12.31 |
| Spectrum Analyzer | R&S | FSV40 | 100989 | 21.12.23 |
| DC Power Supply | AGILENT | E3632A | MY40008800 | 22.07.27 |
| EMI TEST RECEIVER | R&S | ESCI7 | 100732 | 22.03.05 |
| ATTENUATOR | KEYSIGHT | 8491B-6dB | MY39271060 | 21.12.24 |
| Bilog Antenna | TESEQ | CBL 6112D | 55545 | 22.04.24 |
| Amplifier | SONOMA INSTRUMENT | 310N | 284608 | 22.08.19 |
| COAXIAL FIXED ATTENUATOR | Agilent | 8491B-003 | 2708A18758 | 22.04.23 |
| Horn antenna | ETS.lindgren | 3117 | 155787 | 21.10.28 |
| Horn antenna | ETS.lindgren | 3116 | 00086635 | 22.05.17 |
| Attenuator | API Inmet | 40AH2W-10 | 12 | 22.05.11 |
| Broadband PreAmplifier | SCHWARZBECK | BBV9718 | 216 | 22.07.27 |
| AMPLIFIER | L-3 Narda-MITEQ | AMF-7D-01001800 -22-10P | 2003683 | 21.08.28* |
| AMPLIFIER | L-3 Narda-MITEQ | JS44-18004000-33-8P | 2000996 | 22.01.21 |
| LOOP Antenna | R&S | HFH2-Z2 | 100355 | 22.08.21 |
| Highpass Filter | WT | WT-A1698-HS | WT160411001 | 22.05.10 |
| Cable Assembly | RadiAll | 2301761768000PJ | 1724.659 | - |
| Cable Assembly | gigalane | RG-400 | - | - |
| Cable Assembly | HUER+SUHNER | SUCOFLEX 104 | MY4342/4 | - |
| Antenna Mast | Innco Systems | MA4640-XP-ET | - | - |
| Turn Table | Innco Systems | DT2000 | 79 | - |
| Antenna Mast | Innco Systems | MA4000-EP | 303 | - |

* Tests related to this equipment were carried out prior to the calibration due date.

End of test report