
Electromagnetic Emission

FCC MEASUREMENT REPORT

CERTIFICATION OF COMPLIANCE

FCC Part 15 Certification Measurement

PRODUCT : Network IP Camera
MODEL/Serial No. : Pitta 310 / 00254220000E
MULTIPLE MODEL : -
FCC ID : YCKPITTA310
APPLICANT : Pittasoft Co., Ltd.
#1113, Newticastle, 429-1, Gasan-Dong,
Geumcheon-Gu, Seoul, 153-779, Korea
Attn. : Hyocheol Kim / Senior Engineer
MANUFACTURER : Pittasoft Co., Ltd.
#1113, Newticastle, 429-1, Gasan-Dong,
Geumcheon-Gu, Seoul, 153-779, Korea
FCC CLASSIFICATION : DTS: Part 15 Digital Transmission System
TYPE OF MODULATION : DSSS(CCK), OFDM(QAM)
FREQUENCY CHANNEL : 2 412 MHz to 2 472 MHz and Channel Spacing 5 MHz (13 Channels)
AIR DATE RATE : 11 Mbps(802.11b mode), 54 Mbps(802.11g mode)
ANTENNA TYPE : Dipole Antenna
ANTENNA GAIN : 2.45 dBi max
RULE PART(S) : FCC Part 15 Subpart B and Subpart C
FCC PROCEDURE : ANSI C63.4-2003
TEST REPORT No. : ETLE100405.02
DATES OF TEST : April 06, 2010 to April 09, 2010
REPORT ISSUE DATE : April 27, 2010
TEST LABORATORY : ETL Inc. (FCC Designation Number : KR0022)

The Network IP Camera, Model Pitta 310 has been tested in accordance with the measurement procedures specified in ANSI C63.4-2003 at the ETL Test Laboratory and has been shown to be complied with the electromagnetic radiated emission limits specified in FCC Rule Part15 Subpart C section 15.247
I attest to the accuracy of data. All measurement herein was performed by me or was made under my supervision and is correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.
The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.



Hyung Seok, Lee / Chief Engineer

ETL Inc.
#371-51, Gasan-dong, Geumcheon-gu, Seoul, 153-803, Korea
Tel: 82-2-858-0786 Fax: 82-2-858-0788

Table of Contents

FCC Measurement Report

1. Introduction
2. Product Information
3. Description of Tests
4. Test Condition
5. Test Results
 - 5.1 Summary of Test Results
 - 5.2 6 dB Bandwidth
 - 5.3 Maximum Peak Output Power
 - 5.4 Band Edges Measurement
 - 5.5 Peak Power Spectral density
 - 5.6 Spurious Emissions
 - 5.7 Conducted Emissions Test
6. Sample Calculation
7. List of test Equipment used for Measurement

Appendix A. FCC ID Label and Location

Appendix B. Test Setup Photographs

Appendix C. External Photographs

Appendix D. Internal Photographs

Appendix E. Block Diagram

Appendix F. Circuit Diagram

Appendix G. User Manual

Appendix H. Operational Description

Appendix I. Antenna Requirement

FCC MEASUREMENT REPORT

Scope – Measurement and determination of electromagnetic emission(EME) of radio frequency devices including intentional radiators and/or unintentional radiators for compliance with the technical rules and regulations of the U.S Federal Communications Commission(FCC)

General Information

Applicant Name	: Pittasoft Co., Ltd.
Address	: #1113, Newticastle, 429-1, Gasan-Dong, Geumcheon-Gu, Seoul, 153-779, Korea
Attention	: Hyocheol Kim / Senior Engineer

- **EUT Type** : Network IP Camera
- **Model Number** : Pitta 310
- **S/N** : 00254220000E
- **Freq. Range** : 2 412 MHz - 2 472 MHz
- **Number of Channels** : 13
- **Modulation Technique** : DSSS(CCK), OFDM(QAM)
- **Frequency Channel** : 2 412 MHz to 2 472 MHz and Channel Spacing 5 MHz (13 Channels)
- **Air Data Rate** : 11 Mbps(802.11b mode), 54 Mbps(802.11g mode)
- **Antenna Type** : Dipole Antenna
- **ANTENNA GAIN** : 2.50 dBi max
- **FCC Rule Part(s)** : FCC Part 15 Subpart B and C
- **Test Procedure** : ANSI C63.4-2003
- **FCC Classification** : DTS: Part 15 Digital Transmission System
- **Place of Tests** : ETL Inc. Testing Lab.
Radiated Emission test;
#499-1, Sagot-ri, Seosin-myeon, Hwaseong-si, Gyeonggi-do, 445-882, Korea

Conducted Emission test;
ETL Inc. Testing Lab.
371-51, Gasan-dong, Geumcheon-gu, Seoul, 153-803, Korea

1. INTRODUCTION

The measurement test for radiated and conducted emission test was conducted at the ETL Inc. The site is constructed in conformance with the requirements of the ANSI C63.4-2003 and CISPR Publication 16. The ETL has site descriptions on file with the FCC for 3 m and 10 m site configurations. Detailed description of test facility was found to be in compliance with FCC Rules according to the ANSI C63.4-2003 and registered to the Federal Communications Commission (FCC Designation Number : KR0022).

The measurement procedure described in American National Standard for Method of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2003) was used in determining radiated and conducted emissions from the Pittasoft Co., Ltd., Model: Pitta 310

2. PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the Network IP Camera (model: Pitta 310).

2.2 General Specification

Item	Specification
Lens type	Fixed
Effective Pixels	1.3 Mega
Focal length	F = 4.4 mm, 800 mm ~ infinity
F-number	F2.0
Field of View	Changeable
Max Resolution	720 x 480 D1
Max. Frame Rate	30 fps
Codec	Video H.264, Audio G.726
Intelligent Video	Motion Detection
Security	Multi-level Passwords, HTTP Authentication, AES Video Stream Encryption
Audio Support	O
E-mail/FTP Notification	O
Enable/Disable LED Indicators	O
Network	10/100 BaseTX (RJ45)
Protocol	TCP/IP, HTTP, DHCP, SMTP, FTP, DNS, DDNS, RTSP, SDP, RTP, RTCP
Power over Ethernet (IEEE 802.3af)	Class 0
Input Power	DC 5 V/1.0 A
Power Consumption	Max 5 W
Operation Temperature	-4 °F ~ 158 °F (-20 °C ~ +70 °C)
Unit Size (W x H x D)	61 mm x 138 mm x 43 mm
Unit Weight	170 g

Wi-Fi Spec.

Item	Specification
Operating Frequency	2 412 MHz to 2 472 MHz (13 Ch)
Type of Oscillation	PLL
Type of Modulation	DSSS, OFDM
Data rate	11 Mbps(802.11b mode), 54 Mbps(802.11g mode)
RF Power	Below 20 dBm

Channel Table

CH	1	2	3	4	5	6	7	8	9	10	11	12	13
Freq	2412	2417	2422	2427	2432	2437	2442	2447	2452	2457	2462	2467	2472

3. DESCRIPTION OF TESTS

3.1 Radiated Emission Measurement

Radiated emission measurements were made in accordance with § 13 in ANSI C63.4-2003 "Measurement of Intentional radiators" The measurements were performed over the frequency range of 30 MHz to 40 GHz using antenna as the input transducer to a Spectrum analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Peak, Quasi-peak, Average" within a bandwidth of 120 kHz and above 1GHz is 1 MHz.

Preliminary measurements were made at 3 m using broadband antennas, and spectrum analyzer to determine the frequency producing the maximum emission in shielded room. Appropriate precaution was taken to ensure that all emission from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 MHz to 1000 MHz using Log-Bicon antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used. Final measurements were made open site at 3 m. The test equipment was laced on a wooden turn-table. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The detector function was set to CISPR Quasi-peak mode and the bandwidth of the receiver was set to 120 kHz or 1 MHz depending on the frequency of type of signal. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8 m high nonmetallic 1m x 1.5 m table. The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 m to 4 m and stopped at the azimuth or height producing the maximum emission.

Varying the mode of operating frequencies of the EUT maximized each emission. The system was tested in all the three orthogonal planes and changing the polarity of the antenna. The worst-case emissions are recorded in the data tables. If necessary, the radiated emission measurement could be performed at a closer distance to ensure higher accuracy and the results were extrapolated to the specified distance using an inverse linear distance extrapolation factor (20 dB/decade) as per section 15.31(f).

Photographs of the worst-case emission can be seen in Photographs of the worst-case emission test setup can be seen in Appendix B.

3.2 Conducted Emission Measurement

Conducted emissions measurements were made in accordance with section § 13 in ANSI C63.4-2003 "measurement of intentional radiators" The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a 50 Ω / 50 μ H LISN as the input transducer to a Spectrum Analyzer or a Test Receiver. The measurements were made with the detector set for "Peak" amplitude within a bandwidth of 9 kHz or for "quasi-peak" within a bandwidth of 9 kHz.

The line-conducted emission test is conducted inside a shielded anechoic chamber room with 1 m x 1.5 m x 0.8 m wooden table which is placed 0.4 m away from the vertical wall and 1.5 m away from the side wall of the chamber room. Two LISN are bonded to the shielded room. The EUT is powered from the LISN and the support equipment is powered from the other LISN. Power to the LISNs are filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner ϕ 1.2 cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and these supply lines will be connected to the LISN. Non-inductive bundling to a 1 m length shortened all interconnecting cables more than 1 m. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the EMI Test Receiver to determine the frequency producing the maximum emission from the EUT. The frequency producing the maximum level was reexamined using to set Quasi-Peak mode by manual, after scanned by automatic Peak mode from 0.15 MHz to 30 MHz. The bandwidth of the spectrum analyzer was set to 9 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission.

Photographs of the worst-case emission can be seen in Photographs of the worst-case emission test setup can be seen in Appendix B.

3.3 FCC Part 15.205 Restricted Bands of Operations

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

4. TEST CONDITION

4.1 Test Configuration


The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the following conditions and configurations were used.

4.2 Description of Test modes

Network IP Camera that has the control software.

The EUT operated under Tx, Rx and standby mode during all the tests. With individual verifying, the maximum output power were found at 11 Mbps data rate for 802.11b mode and 54 Mbps data rate for 802.11g mode. The final tests were executed under these conditions recorded in this report individually.

4.3 The setup drawing(s)

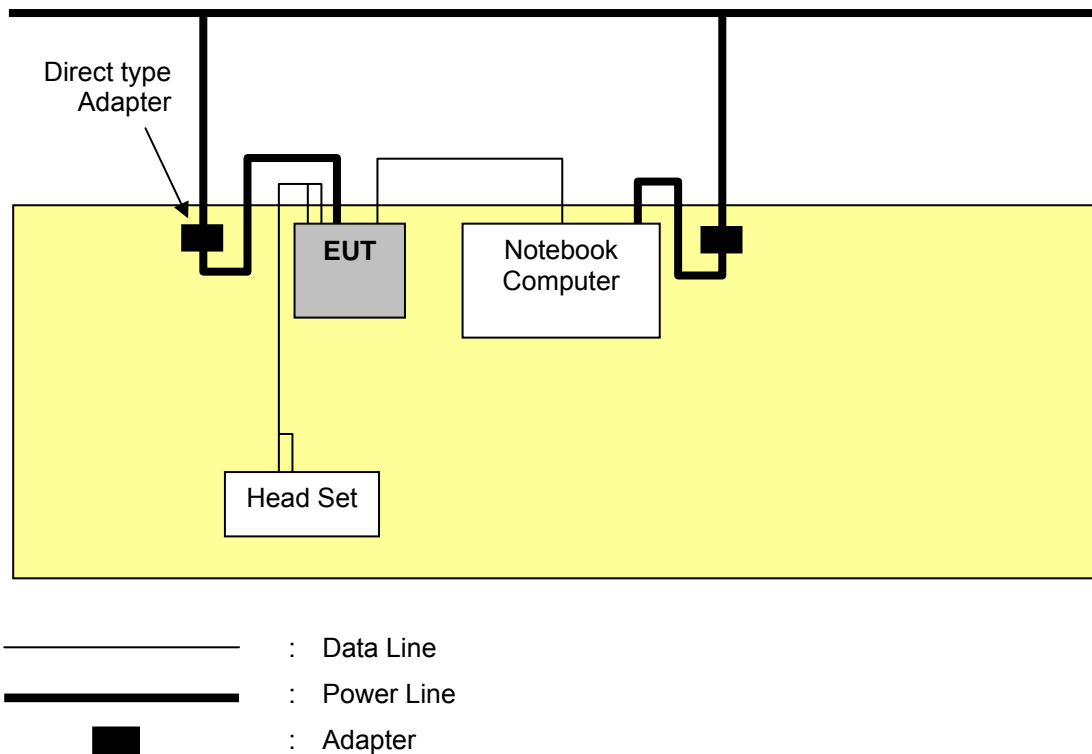

5. TEST RESULTS

5.1 Summary of Test Results

The measurement results were obtained with the EUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum emission of the EUT are reported.

Applied Standard : 47 CFR Part 15, Subpart B and C			
FCC Rule	Measurement Required	Limit	Result
15.247(a)(2)	6 dB Bandwidth	> 500 kHz	Pass
15.247(b)(3)	Maximum Peak Output Power	< 1 W	Pass
15.247(d)	Bandwidth of Frequency Band Edges	More than 20 dBc	Pass
15.247(e)	Power Spectral Density	8 dBm	Pass
15.109, 209(a)	Spurious Emissions	Various	Pass
15.107, 207	Conducted Emissions	Various	Pass

The data collected shows that the **Pittasoft Co., Ltd. / Network IP Camera / Pitta 310** complied with technical requirements of above rules part 15.107, 109, 111, 209 and 15.247 Limits.

The equipment is not modified anything, mechanical or circuits to improve EMI status during a measurement. No EMI suppression device(s) was added and/or modified during testing.

5.2 6 dB Bandwidth

EUT	Network IP Camera / Pitta 310
Limit apply to	FCC Part 15.247(a)(2)
Test Date	April 08, 2010
Operating Condition	RF transmitting continuously during the tested.
Result	Passed

Limit

The maximum 6 dB bandwidth shall be at least 500 kHz

Test Data

Mode	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit
802.11b	2 412	11.50	> 500 kHz
	2 442	11.15	
	2 472	11.15	
802.11g	2 412	16.55	
	2 442	16.55	
	2 472	16.55	

NOTES:

1. Measure frequency separation of relevant channel using spectrum analyzer.
2. RBW 100 kHz, VBW 100 kHz, span 50 MHz, Sweep time Auto.
3. Please see the measured plot in next page.




Test Engineer: Hoon Pyo, Lee


Plots of 6 dB Bandwidth

- 802.11b Mode


[2 412 MHz]

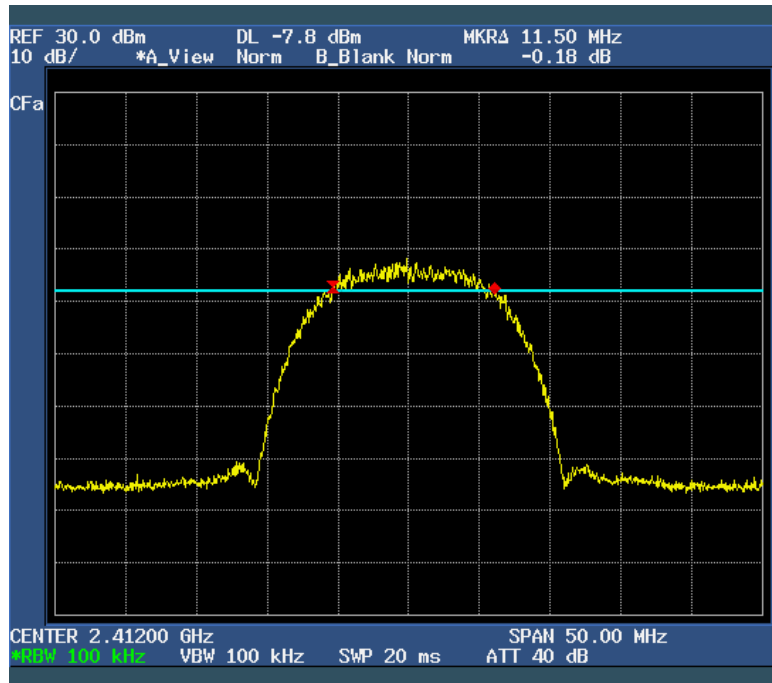

[2 442 MHz]

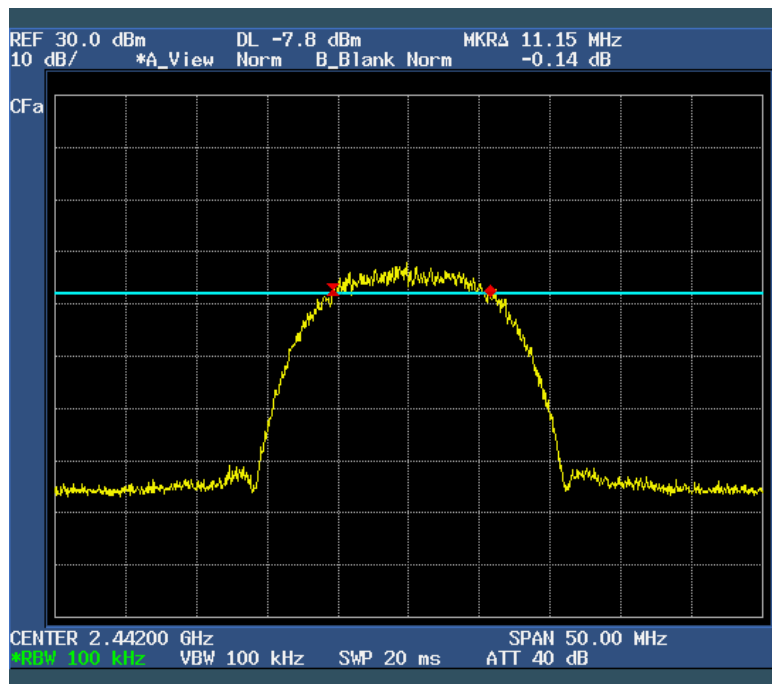


[2 472 MHz]

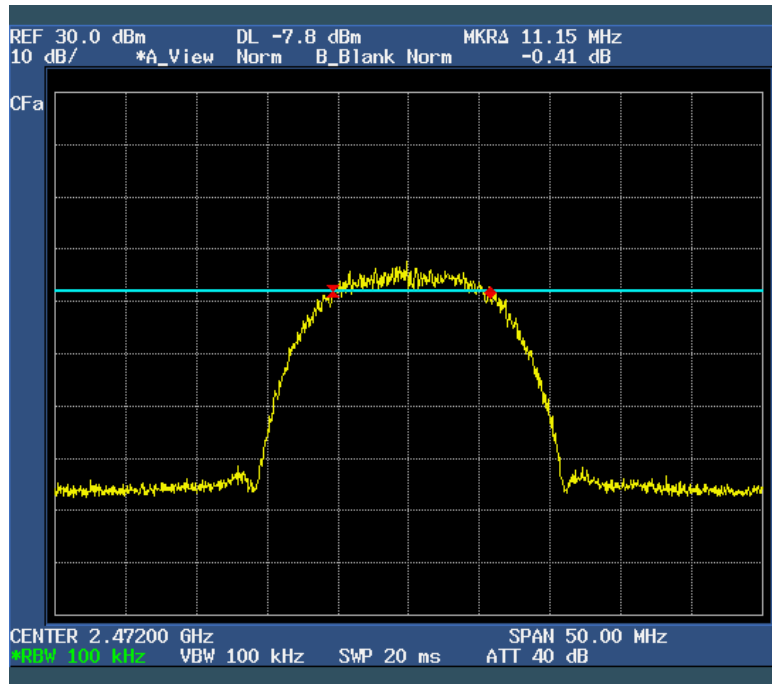


- 802.11g Mode


[2 412 MHz]

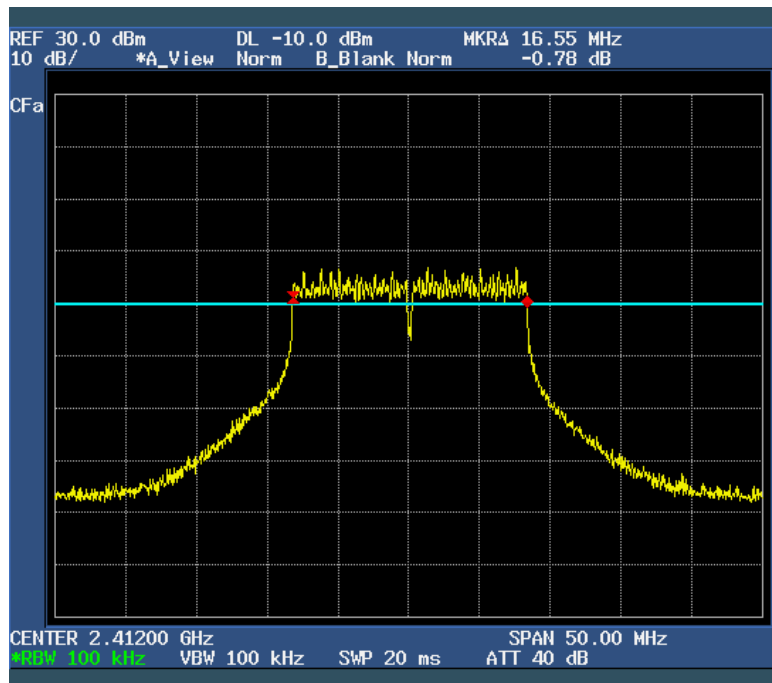

[2 442 MHz]

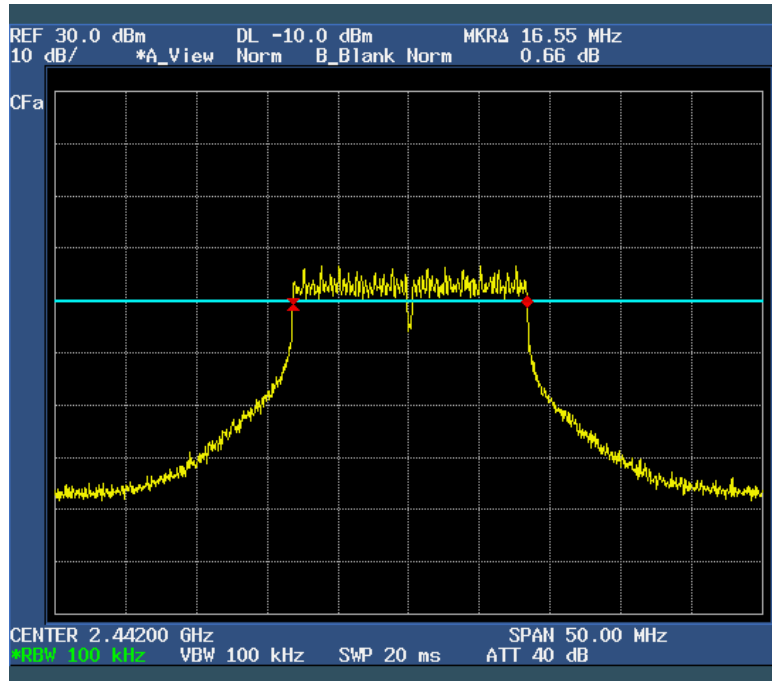

[2 472 MHz]

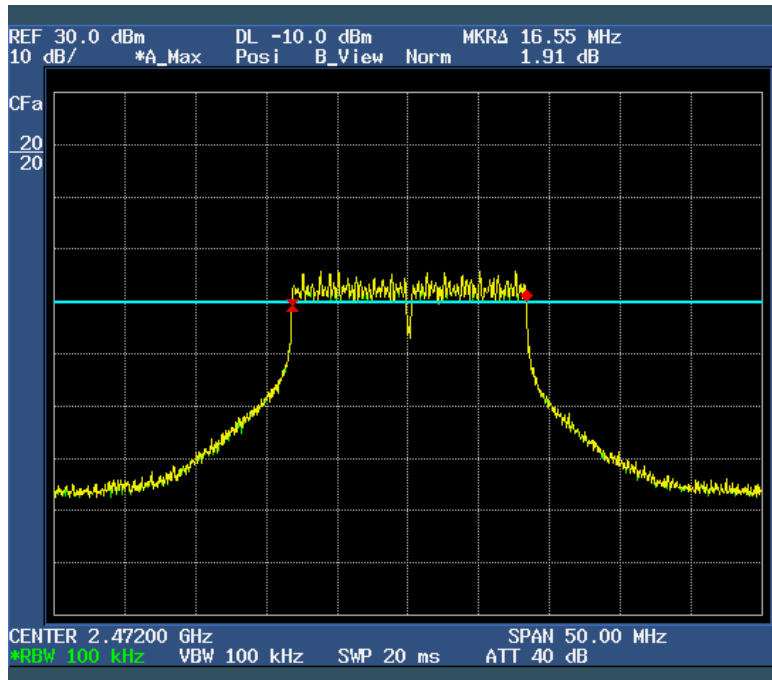

5.3 Maximum peak conducted output power

EUT	Network IP Camera / Pitta 310
Limit apply to	FCC Part 15.247(b)(3)
Test Date	April 08, 2010
Operating Condition	RF transmitting continuously during the tested.
Result	Passed

Limit

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

- For systems using digital modulation operating in the 2 400 - 2 483.5 MHz band: 1 watt

Test Data

Mode	Frequency [MHz]	Output Power [dBm]	Limit
802.11b	2 412	9.76	< 30 dBm(1W)
	2 442	9.66	
	2 472	8.96	
802.11g	2 412	11.17	
	2 442	11.18	
	2 472	10.98	

NOTES:

1. Measure conducted Channel power of relevant channel using Spectrum analyzer
2. RBW 1MHz, VBW 1MHz
3. Please see the measured plot in next page.




Test Engineer: Hoon Pyo, Lee


Plots of Maximum Peak Output Power

- 802.11b mode


[2 412 MHz]

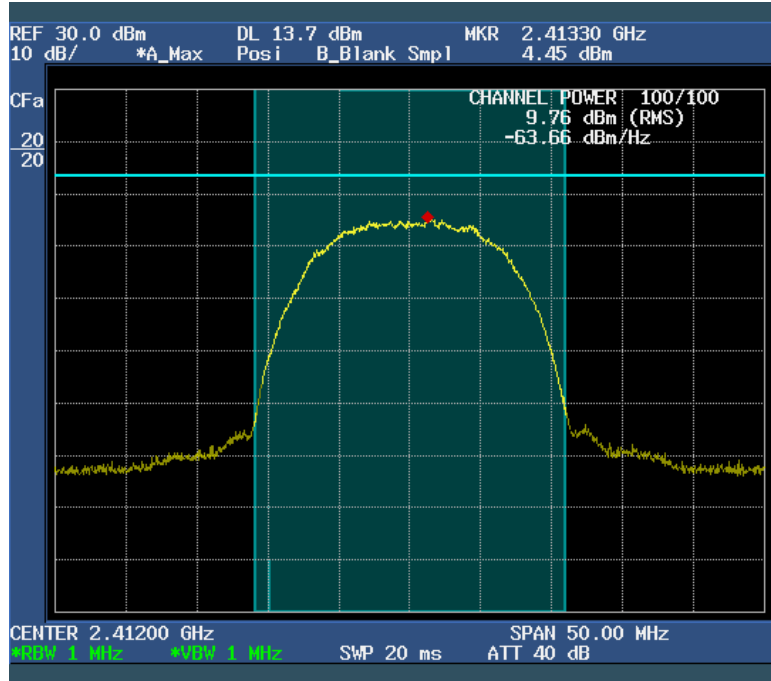

[2 442 MHz]

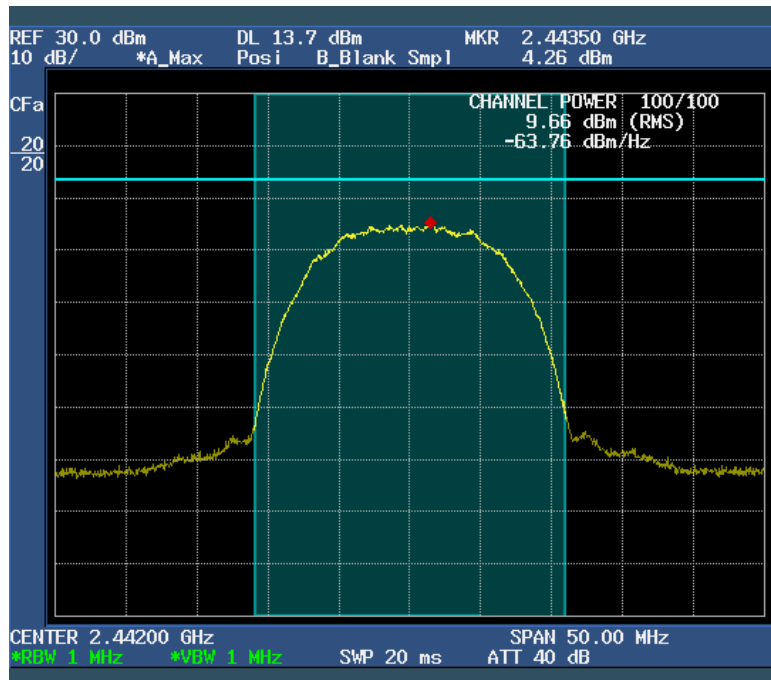


[2 472 MHz]

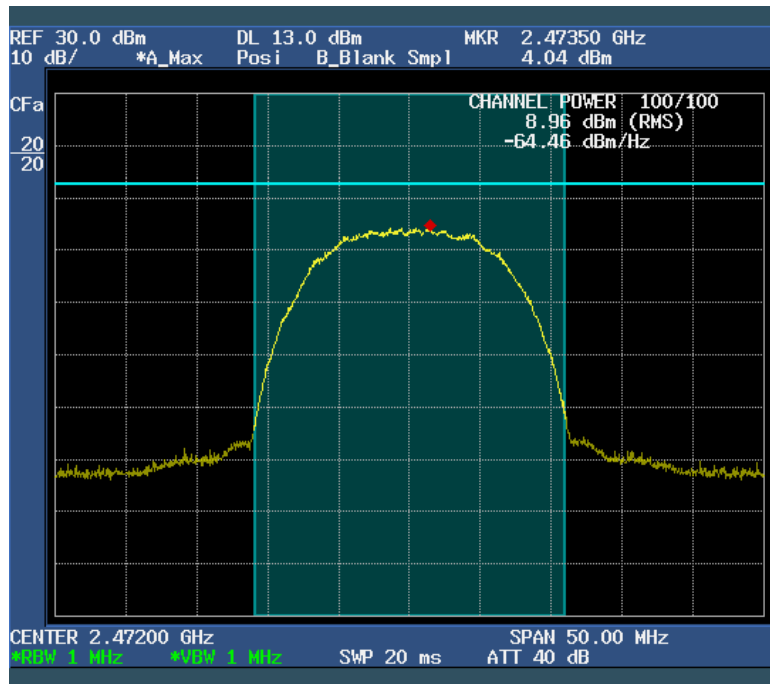


- 802.11g mode


[2 412 MHz]

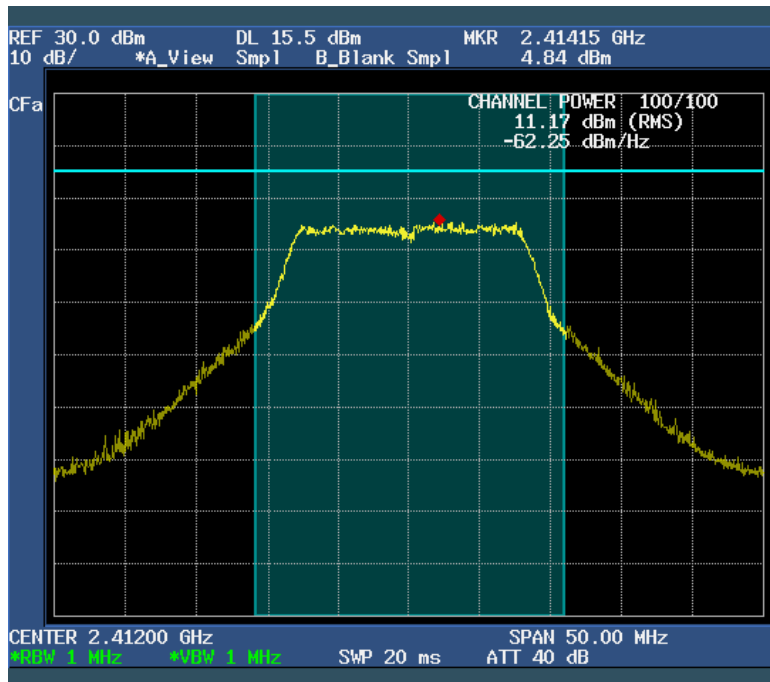

[2 442 MHz]

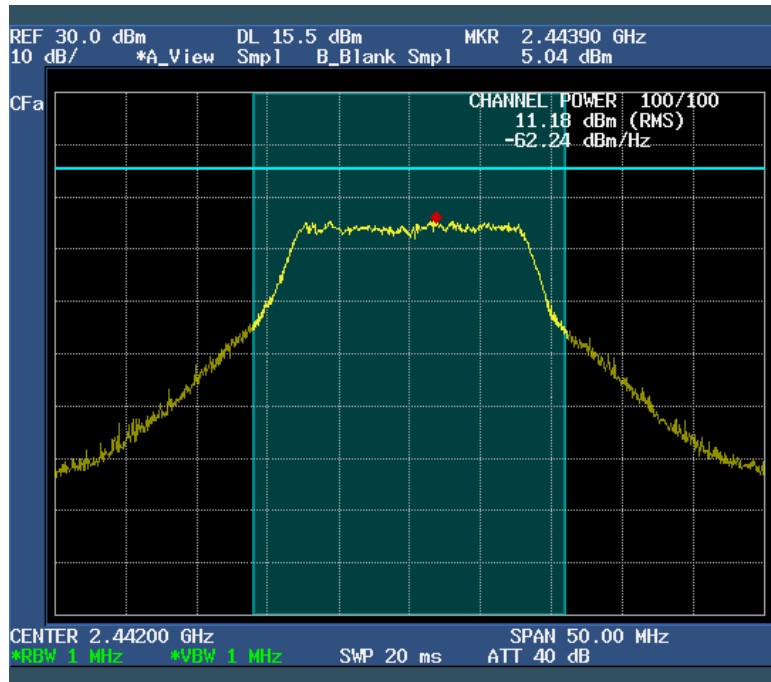

[2 472 MHz]

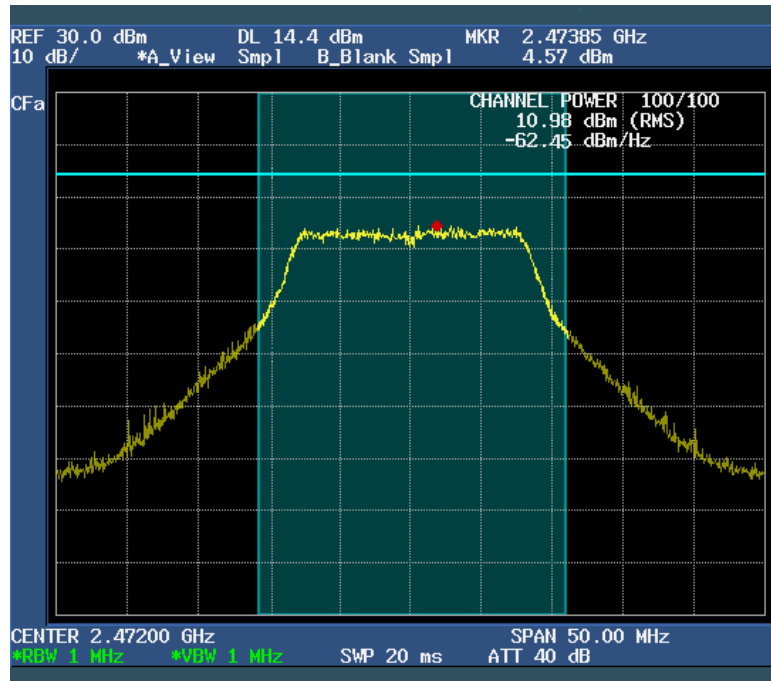

5.4 Bandwidth of Frequency Band Edges

EUT	Network IP Camera / Pitta 310
Limit apply to	FCC Part 15.247(d)
Test Date	April 08, 2010
Operating Condition	RF transmitting continuously during the tested.
Result	Passed

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Test Results

- Refer to see the measured plot in next page.

NOTES:

1. The test was performed to make a direct field strength measurement at the band edge frequencies.



Test Engineer: Hoon Pyo, Lee

Bandwidth of Frequency Band Edges

Radiated

- 802.11b

1. Low CH (measured frequency range: 2 310 MHz – 2 390 MHz)

Detector mode: Peak mode(RBW: 1 MHz, VBW: 1 MHz, Worst case (Vertical))

Frequency [MHz]	Polarization (*H/**V)	Result [dB μ V/m]	Peak Limit [dB μ V/m]	Margin [dB]
2 402.00	V	38.90	74.00	35.10

Detector mode: Average mode(RBW: 1 MHz, VBW: 10 Hz, Worst case (Vertical))

Frequency [MHz]	Polarization (*H/**V)	Result [dB μ V/m]	Average Limit [dB μ V/m]	Margin [dB]
2 402.00	V	26.80	54.00	27.20

2. High CH (Measured frequency range: 2 483.5 MHz – 2 500 MHz)

Detector mode: Peak mode(RBW: 1 MHz, VBW: 1 MHz, Worst case (Vertical))

Frequency [MHz]	Polarization (*H/**V)	Result [dB μ V/m]	Peak Limit [dB μ V/m]	Margin [dB]
2 483.50	V	45.70	74.00	28.30

Detector mode: Average mode(RBW: 1 MHz, VBW: 10 Hz, Worst case (Vertical))

Frequency [MHz]	Polarization (*H/**V)	Result [dB μ V/m]	Peak Limit [dB μ V/m]	Margin [dB]
2 483.50	V	32.40	54.00	21.60

- 802.11g

1. Low CH (measured frequency range: 2 310 MHz – 2 390 MHz)

Detector mode: Peak mode(RBW: 1 MHz, VBW: 1 MHz, Worst case (Vertical))

Frequency [MHz]	Polarization (*H/**V)	Result [dB μ V/m]	Peak Limit [dB μ V/m]	Margin [dB]
2 402.00	V	39.10	74.00	34.90

Detector mode: Average mode(RBW: 1 MHz, VBW: 10 Hz, Worst case (Vertical))

Frequency [MHz]	Polarization (*H/**V)	Result [dB μ V/m]	Average Limit [dB μ V/m]	Margin [dB]
2 402.00	V	27.00	54.00	27.00

2. High CH (Measured frequency range: 2 483.5 MHz – 2 500 MHz)

Detector mode: Peak mode(RBW: 1 MHz, VBW: 1 MHz, Worst case (Vertical))



Frequency [MHz]	Polarization (*H/**V)	Result [dB μ V/m]	Peak Limit [dB μ V/m]	Margin [dB]
2 483.50	V	50.80	74.00	28.30

Detector mode: Average mode(RBW: 1 MHz, VBW: 10 Hz, Worst case (Vertical))



Frequency [MHz]	Polarization (*H/**V)	Result [dB μ V/m]	Peak Limit [dB μ V/m]	Margin [dB]
2 483.50	V	37.20	54.00	16.80

Conducted

- 802.11b

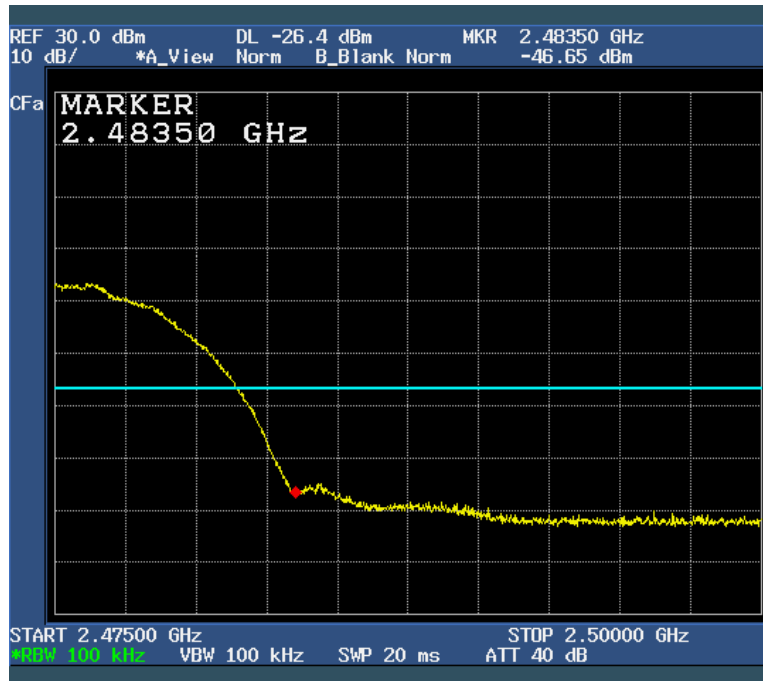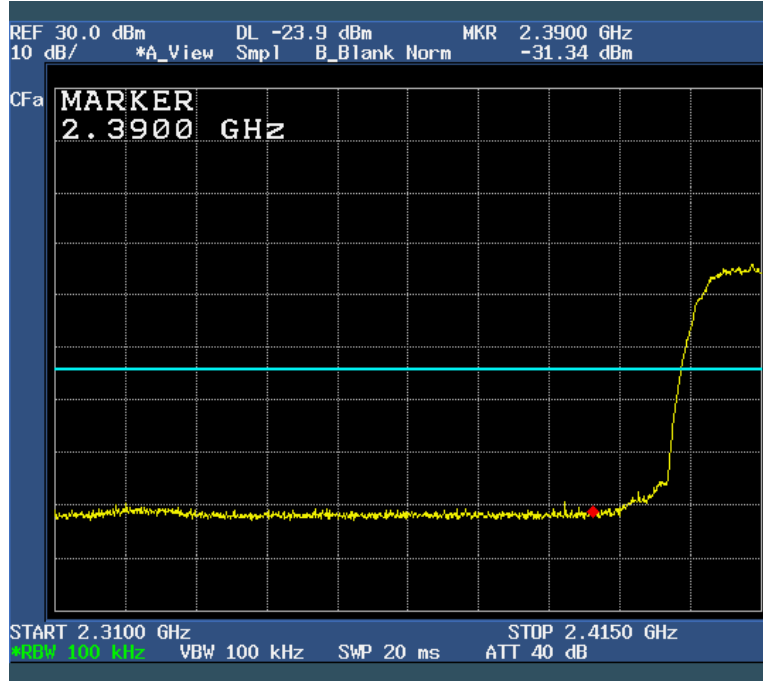

- 802.11g

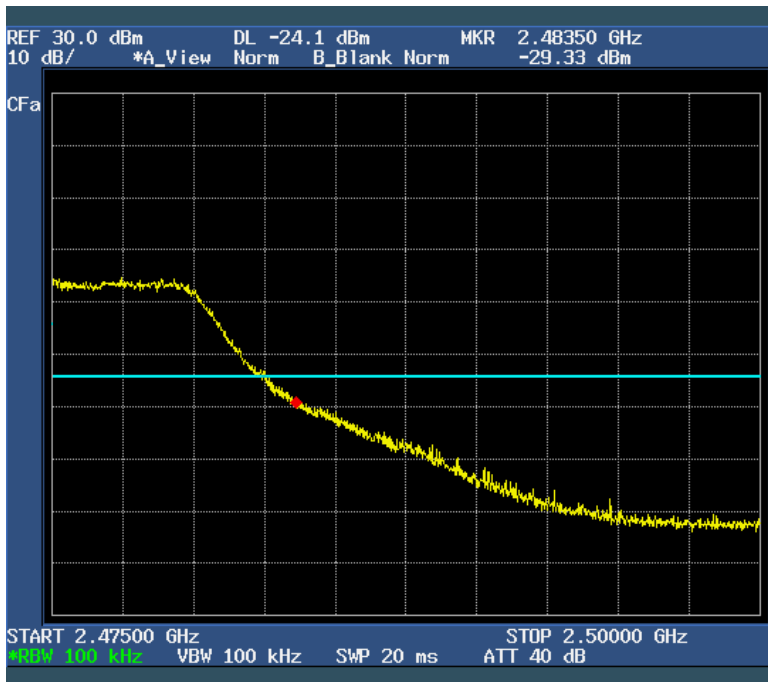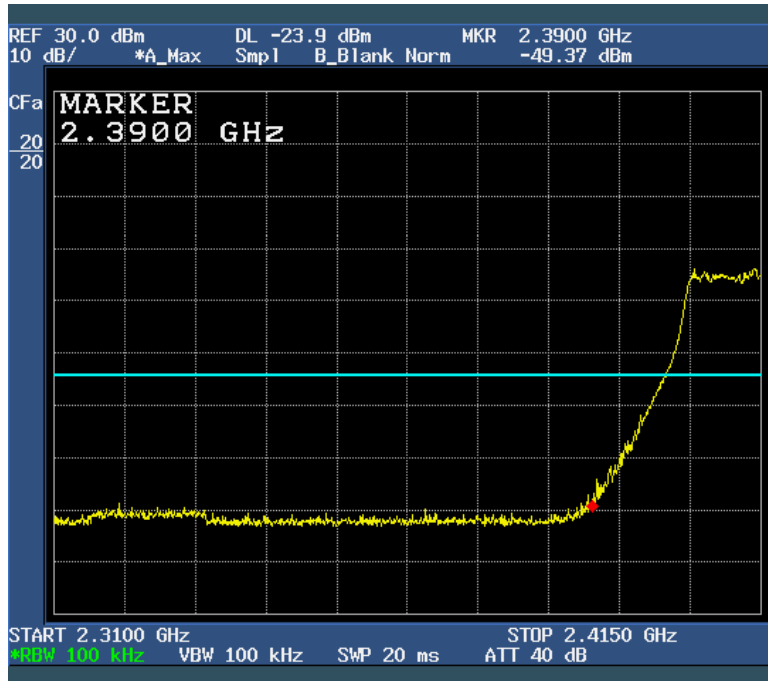

5.5 Power Spectral Density

EUT	Network IP Camera / Pitta 310
Limit apply to	FCC Part 15.247(e)
Test Date	April 08, 2010
Operating Condition	RF transmitting continuously during the tested.
Result	Passed

Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Data

802.11b mode

Channel	Frequency (MHz)	PSD (dBm)	Limit
Low	2 412	-14.91	8 dBm
Mid	2 442	-15.19	
High	2 472	-15.67	

802.11g mode

Channel	Frequency (MHz)	PSD (dBm)	Limit
Low	2 412	-15.89	8 dBm
Mid	2 442	-16.02	
High	2 472	-17.21	

NOTES:

1. Measure power spectral density of relevant channel using spectrum analyzer.
2. RBW 3 kHz, VBW 3 kHz, span 1 MHz, Sweep time (= span / 3khz).
3. Please see the measured plot in next page.




Test Engineer: Hoon Pyo, Lee


Power Spectral Density

- 802.11b mode


[CH Low]

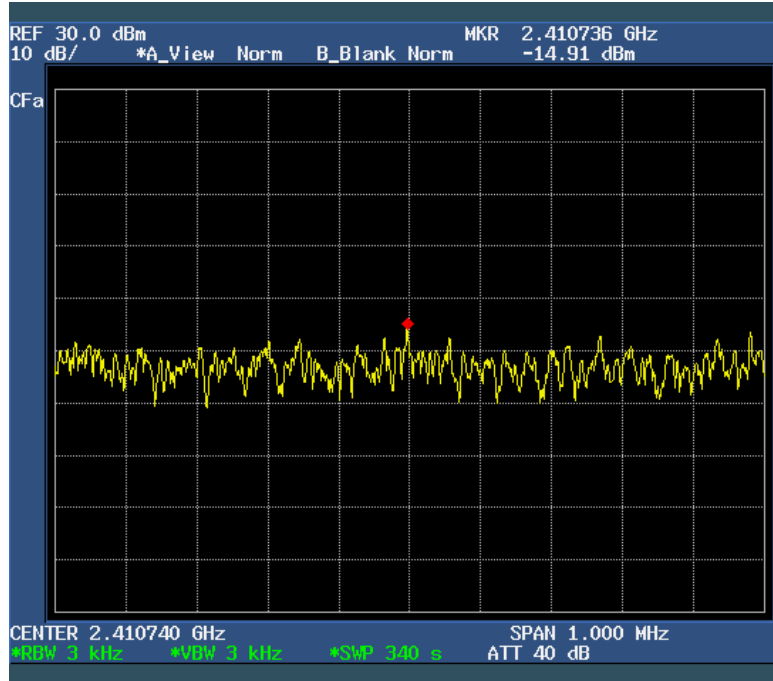

[CH Mid]

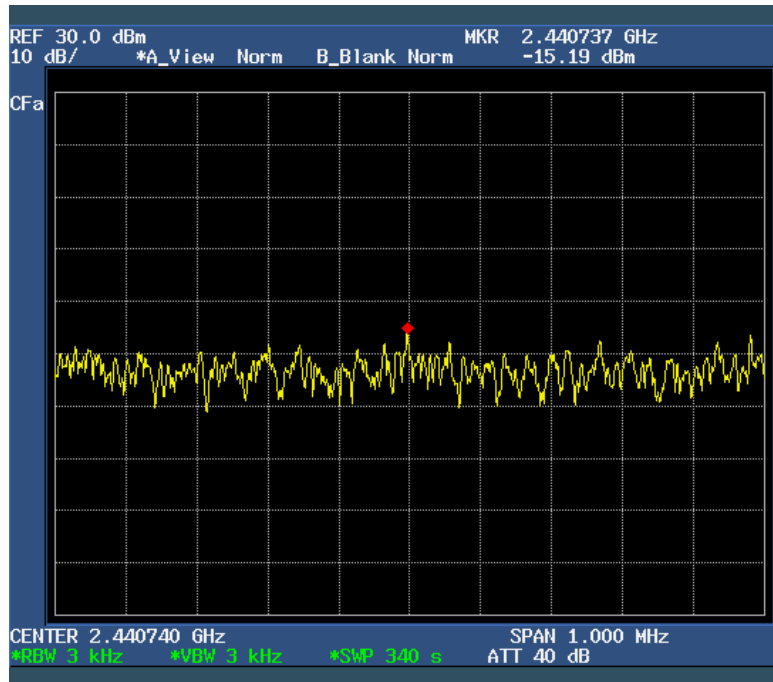


[CH High]

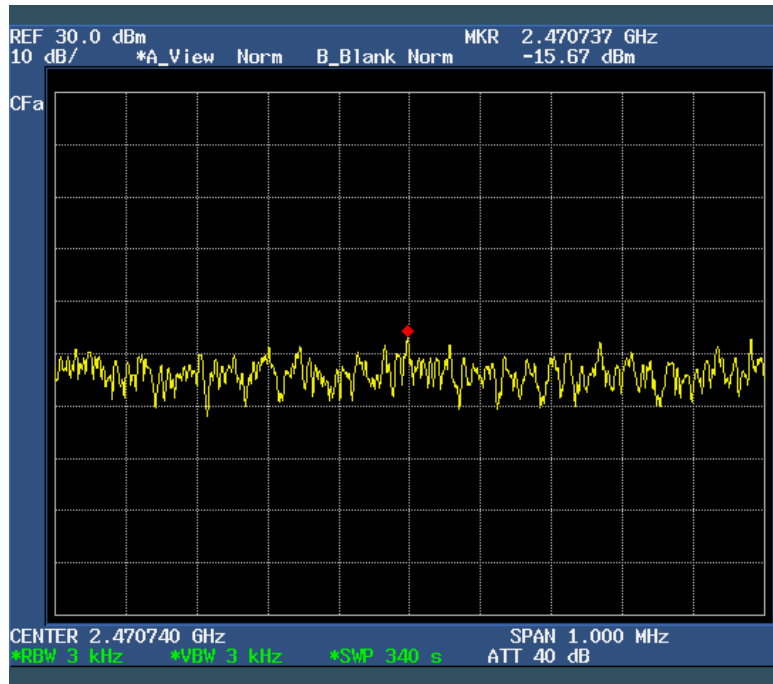


- 802.11g mode


[CH Low]

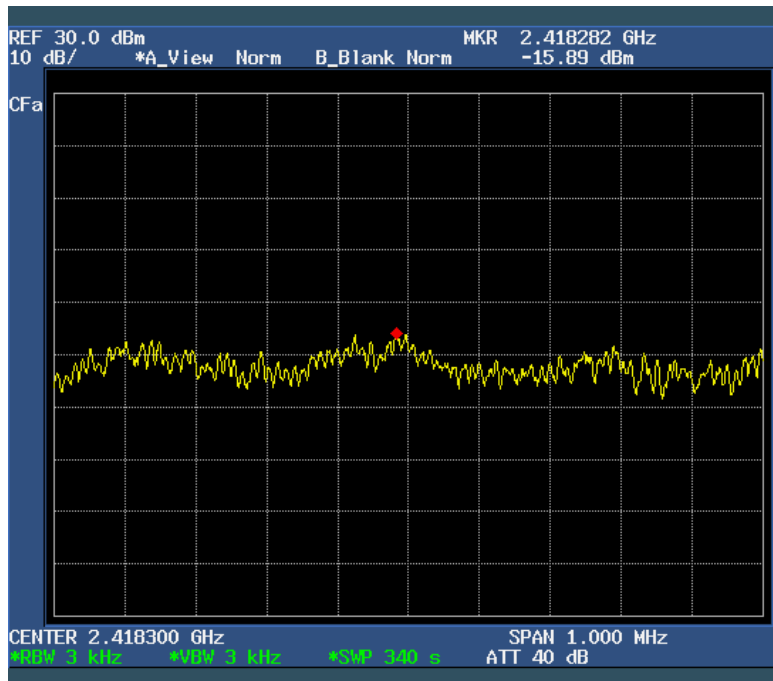

[CH Mid]

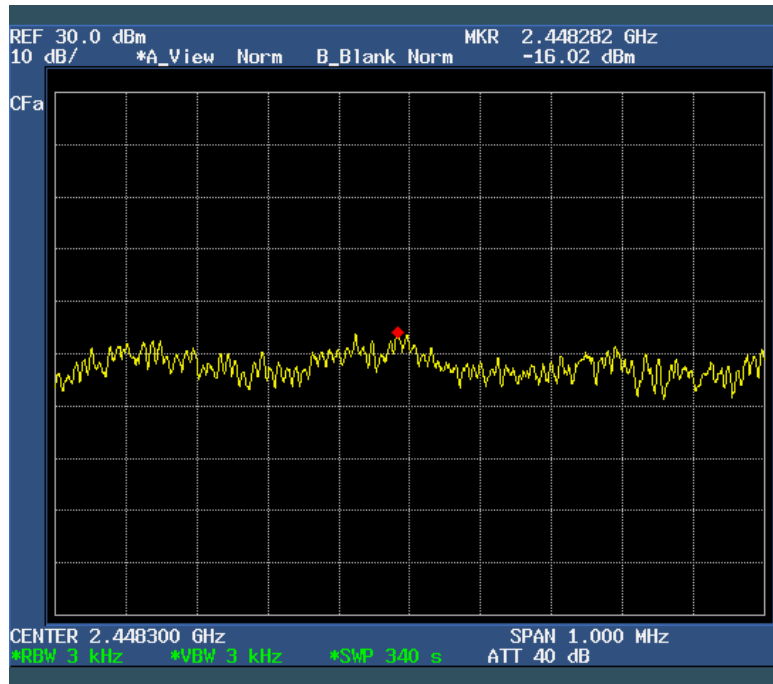

[CH High]

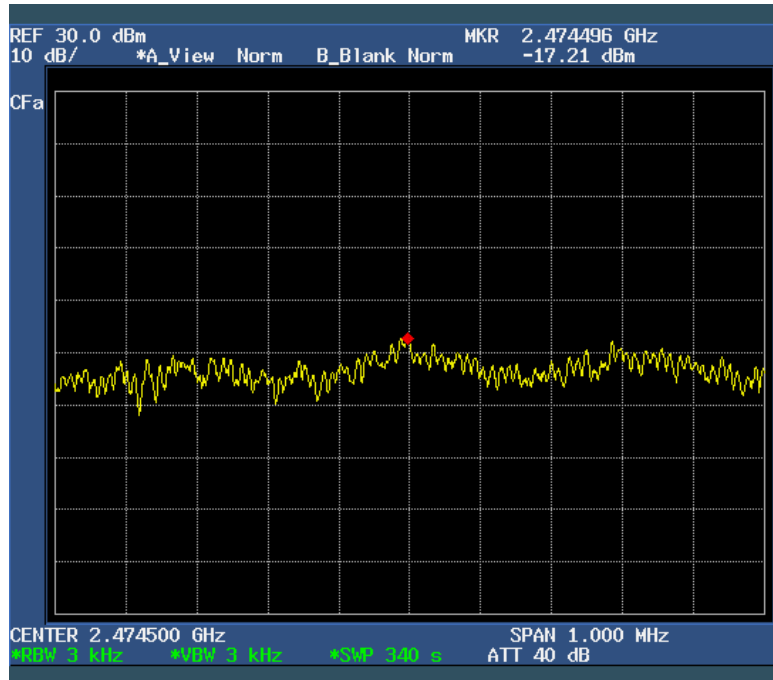

5.6 Spurious Emissions

EUT	Network IP Camera / Pitta 310
Limit apply to	FCC Part 15. 209
Test Date	April 07, 2010
Operating Condition	Low CH, Middle CH, High CH Transmission
Result	Passed

Limit

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequencies [MHz]	Field Strength [$\mu\text{V}/\text{m}$]	Measurement Distance [m]
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

Test Results

- Refer to see the measured plot in next page.



Test Engineer: Hoon Pyo, Lee

Radiated Emissions Test data

9 kHz to 30 MHz

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical. Detector mode: CISPR Quasi – Peak mode (100 Hz, 9 kHz)

Wi-Fi mode: 802.11b

Frequency [MHz]	Reading [dB(μ V)]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB]	Result [dB(μ V/m)]	Limit [dB(μ V/m)]	Margin [dB]
Emission attenuated more than 20 dB below the limit are not reported.							

Wi-Fi mode: 802.11g

Frequency [MHz]	Reading [dB(μ V)]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB]	Result [dB(μ V/m)]	Limit [dB(μ V/m)]	Margin [dB]
Emission attenuated more than 20 dB below the limit are not reported.							

Result: All emissions below noise floor of 20 dB μ V/m

NOTES:

1. * H : Horizontal polarization , ** V : Vertical polarization
2. Result = Reading + Antenna factor + Cable loss
3. Margin value = Limit - Result
4. The measurement was performed for the frequency range 9 kHz to 30 MHz according to FCC Part 15.209.

Below 1 GHz (30 MHz ~ 1 GHz)

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.
 Detector mode: CISPR Quasi – Peak mode (6 dB Bandwidth: 120 kHz)

802.11b test mode

Frequency [MHz]	Reading [dB(μ V)]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB]	Result [dB(μ V/m)]	Limit [dB(μ V/m)]	Margin [dB]
49.77	24.77	V	9.55	1.68	36.00	40.00	4.00
79.77	26.64	V	7.62	2.04	36.30	40.00	3.70
120.00	23.67	V	10.57	2.56	36.80	43.50	6.70
156.80	21.70	H	11.71	3.09	36.50	43.50	7.00
360.10	23.32	H	14.22	4.86	42.40	46.00	3.60
480.29	13.30	V	17.27	5.93	36.50	46.00	9.50
49.77	24.77	V	9.55	1.68	36.00	40.00	4.00

802.11g test mode

Frequency [MHz]	Reading [dB(μ V)]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB]	Result [dB(μ V/m)]	Limit [dB(μ V/m)]	Margin [dB]
40.24	25.06	V	9.65	1.49	36.20	40.00	3.80
79.77	26.84	V	7.62	2.04	36.50	40.00	3.50
156.80	20.50	V	11.71	3.09	35.30	43.50	8.20
186.12	19.54	H	10.47	3.49	33.50	43.50	10.00
360.10	23.52	H	14.22	4.86	42.60	46.00	3.40
480.29	13.60	V	17.27	5.93	36.80	46.00	9.20

NOTES:

1. * H : Horizontal polarization , ** V : Vertical polarization
2. Result = Reading + Antenna factor + Cable loss
3. Margin value = Limit - Result
4. The measurement was performed for the frequency range above 30 MHz according to FCC Part 15.209.

Above 1 GHz (1 GHz ~ 25 GHz)

- 802.11b

1. Low CH

Detector mode: Peak mode

Frequency [MHz]	Reading [dB(μ V)]	Polarization (*H/**V)	Ant. Factor [dBm]	Cable Loss [dB(μ V)]	Preamp [dBm]	Result [dB(μ V/m)]	Limit [dB(μ V/m)]	Margin [dB]
4 824.00	20.73	V	31.55	14.32	-34.80	31.80	74.00	42.20

Detector mode: Average mode

Frequency [MHz]	Reading [dB(μ V)]	Polarization (*H/**V)	Ant. Factor [dBm]	Cable Loss [dB(μ V)]	Preamp [dBm]	Result [dB(μ V/m)]	Limit [dB(μ V/m)]	Margin [dB]
4 824.00	10.48	V	31.55	14.32	-34.80	21.55	54.00	32.45

2. Middle CH

Detector mode: Peak mode

Frequency [MHz]	Reading [dB(μ V)]	Polarization (*H/**V)	Ant. Factor [dBm]	Cable Loss [dB(μ V)]	Preamp [dBm]	Result [dB(μ V/m)]	Limit [dB(μ V/m)]	Margin [dB]
4 884.00	21.63	V	31.40	14.22	-34.80	32.45	74.00	41.55

Detector mode: Average mode

Frequency [MHz]	Reading [dB(μ V)]	Polarization (*H/**V)	Ant. Factor [dBm]	Cable Loss [dB(μ V)]	Preamp [dBm]	Result [dB(μ V/m)]	Limit [dB(μ V/m)]	Margin [dB]
4 884.00	10.76	V	31.40	14.22	-34.80	22.30	54.00	31.70

3. High CH

Detector mode: Peak mode

Frequency [MHz]	Reading [dB(μ V)]	Polarization (*H/**V)	Ant. Factor [dBm]	Cable Loss [dB(μ V)]	Preamp [dBm]	Result [dB(μ V/m)]	Limit [dB(μ V/m)]	Margin [dB]
4 944.00	22.33	V	31.05	14.02	-34.80	32.60	74.00	41.40

Detector mode: Average mode

Frequency [MHz]	Reading [dB(μ V)]	Polarization (*H/**V)	Ant. Factor [dBm]	Cable Loss [dB(μ V)]	Preamp [dBm]	Result [dB(μ V/m)]	Limit [dB(μ V/m)]	Margin [dB]
4 944.00	11.93	V	31.05	14.02	-34.80	22.20	54.00	31.80

Result: No signal detect above second harmonic

- 802.11g

1. Low CH

Detector mode: Peak mode

Frequency [MHz]	Reading [dB(μ V)]	Polarization (*H/**V)	Ant. Factor [dBm]	Cable Loss [dB(μ V)]	Preamp [dBm]	Result [dB(μ V/m)]	Limit [dB(μ V/m)]	Margin [dB]
4 824.00	19.65	V	31.55	14.32	-34.80	30.72	74.00	43.28

Detector mode: Average mode

Frequency [MHz]	Reading [dB(μ V)]	Polarization (*H/**V)	Ant. Factor [dBm]	Cable Loss [dB(μ V)]	Preamp [dBm]	Result [dB(μ V/m)]	Limit [dB(μ V/m)]	Margin [dB]
4 824.00	9.94	V	31.55	14.32	-34.80	21.01	54.00	32.99

2. Middle CH

Detector mode: Peak mode

Frequency [MHz]	Reading [dB(μ V)]	Polarization (*H/**V)	Ant. Factor [dBm]	Cable Loss [dB(μ V)]	Preamp [dBm]	Result [dB(μ V/m)]	Limit [dB(μ V/m)]	Margin [dB]
4 884.00	19.63	V	31.40	14.22	-34.80	30.45	74.00	43.55

Detector mode: Average mode

Frequency [MHz]	Reading [dB(μ V)]	Polarization (*H/**V)	Ant. Factor [dBm]	Cable Loss [dB(μ V)]	Preamp [dBm]	Result [dB(μ V/m)]	Limit [dB(μ V/m)]	Margin [dB]
4 884.00	10.02	V	31.40	14.22	-34.80	20.84	54.00	33.16

3. High CH

Detector mode: Peak mode

Frequency [MHz]	Reading [dB(μ V)]	Polarization (*H/**V)	Ant. Factor [dBm]	Cable Loss [dB(μ V)]	Preamp [dBm]	Result [dB(μ V/m)]	Limit [dB(μ V/m)]	Margin [dB]
4 944.00	20.63	V	31.05	14.02	-34.80	30.90	74.00	43.10

Detector mode: Average mode

Frequency [MHz]	Reading [dB(μ V)]	Polarization (*H/**V)	Ant. Factor [dBm]	Cable Loss [dB(μ V)]	Preamp [dBm]	Result [dB(μ V/m)]	Limit [dB(μ V/m)]	Margin [dB]
4 944.00	9.88	V	31.05	14.02	-34.80	20.15	54.00	33.85

Result: No signal detect above second harmonic

NOTES:

1. * H : Horizontal polarization , ** V : Vertical polarization
2. Result = Reading + Antenna factor + Cable loss
3. Margin value = Limit - Result
4. Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded.
6. Spectrum setting:
 - a. Peak Setting 1 GHz to 10th harmonics of fundamental, RBW = 1 MHz, VBW = 1 MHz, Sweep = Auto
 - b. AV Setting 1 GHz to 10th harmonics of fundamental, RBW = 1 MHz, VBW = 10 Hz, Sweep = Auto

5.7 Conducted Emissions Measurement

EUT	Network IP Camera / Pitta 310
Limit apply to	FCC Part 15. 207
Test Date	April 06, 2010
Operating Condition	RF transmitting continuously during the tested.
Result	Passed

5.7.1 Conducted Emission Test Data

The following table shows the highest levels of conducted emissions on both polarizations of hot and neutral line. Detector mode: CISPR Quasi-Peak mode (6 dB Bandwidth: 9 kHz)

Worst Case: 802.11g

Frequency [MHz]	Result [dB(μ V)]		Phase (*L/**N)	Limit [dB(μ V)]		Margin [dB]	
	Quasi-peak	Average		Quasi-peak	Average	Quasi-peak	Average
0.173	59.90	46.00	N	64.80	54.80	4.90	8.20
0.234	52.20	41.90	H	52.20	41.90	10.10	10.50
0.291	46.90	40.20	N	60.50	50.50	13.60	10.30
0.351	42.80	41.00	H	58.90	48.90	16.10	7.90
0.642	36.50	35.40	H	56.00	46.00	19.50	10.60
0.700	35.50	33.20	H	56.00	46.00	20.50	12.80
1.747	37.00	34.40	H	56.00	46.00	19.00	11.60

NOTES:


1. * H : HOT Line , **N : Neutral Line
2. Margin value = Limit – Result
3. Measurement were performed at the AC Power Inlet in the frequency band of 150 kHz ~ 30 MHz according to the FCC Part 15 Class B.




Test Engineer: Hoon Pyo, Lee

Line: HOT Line

Limit : — Quasi-Peak
— Average

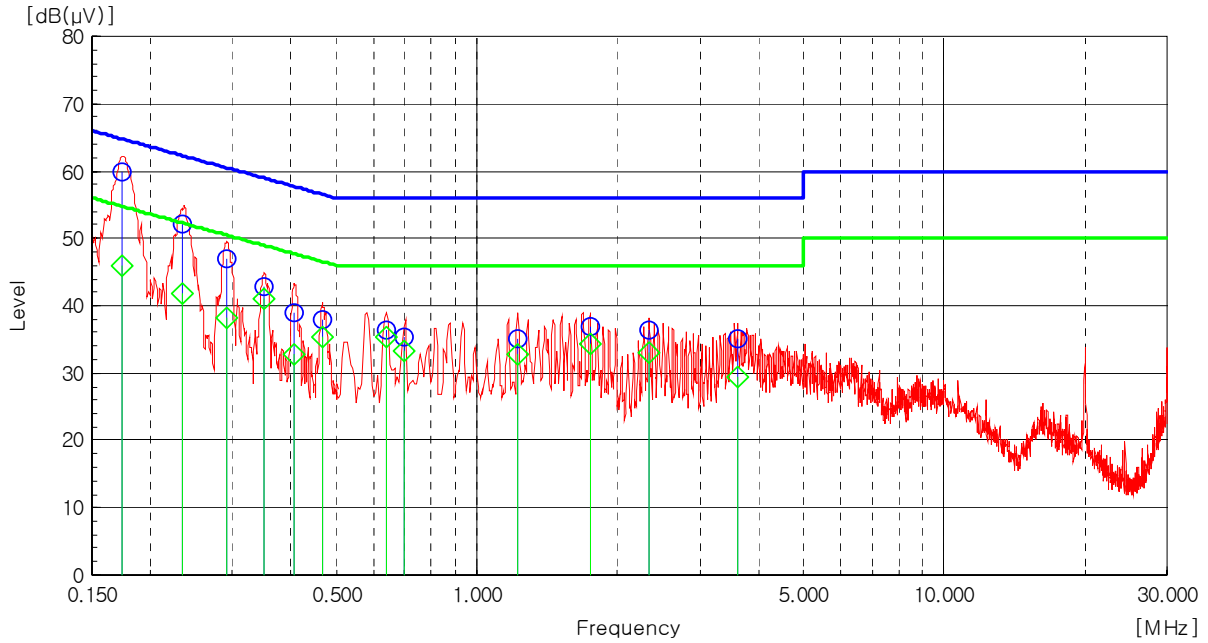

Line: Neutral Line

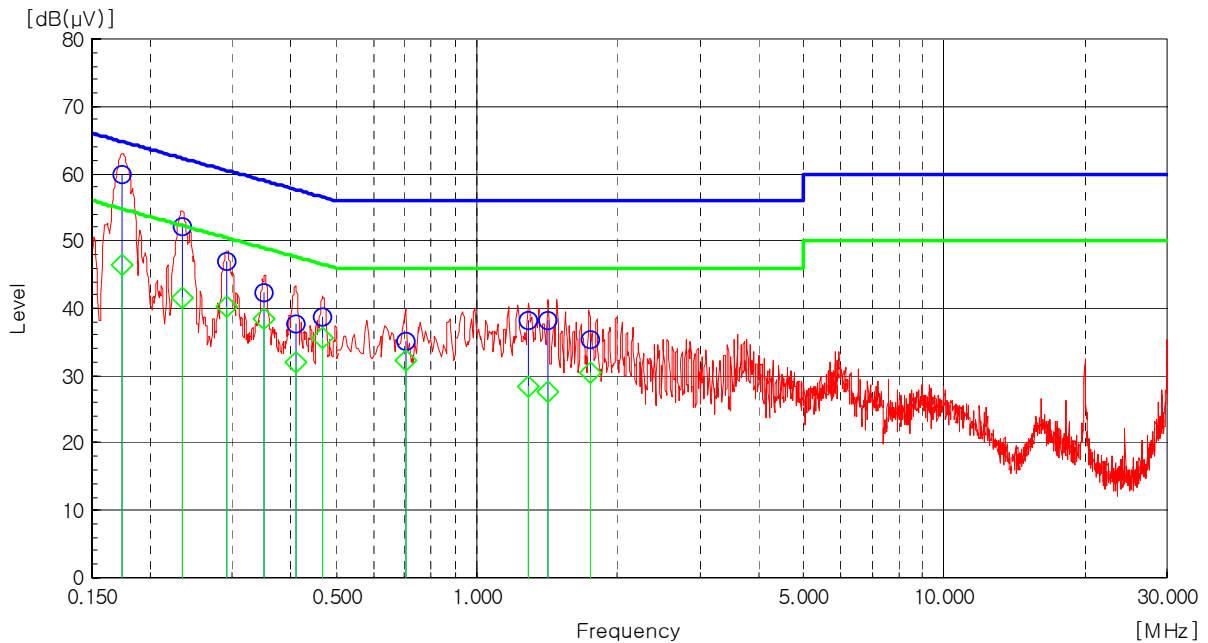

Quasi-peak ○ Average ◇

6. SAMPLE CALCULATION

Sample Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor.
The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

$$dB(\mu V) = 20 \log_{10} (\mu V) : \text{Equation}$$

Example : @ 360.10 MHz

Class B Limit	=	46.00 dB(μ V/m)
Reading	=	23.52 dB(μ V)
Antenna Factor + Cable Loss	=	14.22 + 4.86 = 19.08 dB(μ V/m)
Total	=	42.60 dB(μ V/m)
Margin	=	46.00 – 42.60 = 3.40 dB
	=	3.40 dB below Limit

7. List of test equipments used for measurements

	Test Equipment	Model	Mfg.	Serial No.	Cal. Due Date
■	EMI Test Receiver	ESVS10	R & S	835165/001	11.04.02
■	EMI TEST Receiver	ESPI3	R & S	100478	10.09.18
■	LISN	3825/2	EMCO	9208-1995	10.09.17
■	LISN	3816-2	EMCO	1002	10.09.17
■	Spectrum Analyzer	E7405A	H.P	US41160290	10.09.18
■	Spectrum Analyzer	R3273	Advantest	95090411	11.04.02
■	LogBicon Antenna	VULB9165	Schwarzbeck	3082	11.01.25
■	Broad band Horn antenna	BBHA 9120D	Schwarz Beck	227	11.03.16
■	Broad band Horn antenna	BBHA 9120D	Schwarz Beck	285	11.03.16
■	Loop Antenna	Com-Power	AL-130	17100	11.03.02
■	Preamplifier	8348A	H.P	3307A02865	10.09.17
■	System Power Supply	Agilent	6030A	1036546	11.04.02
■	Power Meter	NRVS	R & S	834053/060	10.09.18
■	Controller	HD2000	HD GmbH	C/125	N/A
■	Antenna Master	MA2400	HD GmbH	N/A	N/A
■	Turn-Table	MFT-120S	Max-Full Antenna Corp	N/A	N/A
■	Antenna Master	MFA-440E	Max-Full Antenna Corp	N/A	N/A