



BUREAU
VERITAS

Test Report No.: RF131126N045



Test Lab
Cert 2951.01

TEST REPORT



Applicant	Lenovo Mobile Communication Technology Ltd.
Address:	No.999, Qishan North 2nd Road, Information & Optoelectronics Park, Torch Hi-tech Industry Development Zone, Xiamen, P.R.China

Manufacturer or Supplier	Lenovo PC HK Limited
Address	23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong
Product	Lenovo Mobile Phone
Brand Name	lenovo
Model	Lenovo A859
Additional Model & Model Difference	N/A
Date of tests	Nov. 26, 2013 ~ Dec. 02, 2013

the tests have been carried out according to the requirements of the following standard:

FCC Part 15, Subpart C (Section 15.247)

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Tested by Glyn He Specialist / EMC Department	Approved by Sam Tung Manager / EMC Department
	 Date: Dec. 02, 2013

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



TABLE OF CONTENTS

RELEASE CONTROL RECORD..... 4

1 SUMMARY OF TEST RESULTS 5

2 MEASUREMENT UNCERTAINTY 5

3 GENERAL INFORMATION 6

3.1 GENERAL DESCRIPTION OF EUT 6

3.2 DESCRIPTION OF TEST MODES 8

3.2.1. CONFIGURATION OF SYSTEM UNDER TEST 9

3.2.2. TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL 9

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS 13

3.4 DESCRIPTION OF SUPPORT UNITS 13

4 TEST TYPES AND RESULTS 14

4.1 CONDUCTED EMISSION MEASUREMENT 14

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT 14

4.1.2 TEST INSTRUMENTS 14

4.1.3 TEST PROCEDURES 15

4.1.4 DEVIATION FROM TEST STANDARD 15

4.1.5 TEST SETUP 16

4.1.6 EUT OPERATING CONDITIONS 16

4.1.7 TEST RESULTS 17

4.2 RADIATED EMISSION MEASUREMENT 19

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT 19

4.2.2 TEST INSTRUMENTS 20

4.2.3 TEST PROCEDURES 21

4.2.4 DEVIATION FROM TEST STANDARD 21

4.2.5 TEST SETUP 22

4.2.6 EUT OPERATING CONDITIONS 22

4.2.7 TEST RESULTS 23

4.3 6dB BANDWIDTH MEASUREMENT 42

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT 42

4.3.2 TEST INSTRUMENTS 42

4.3.3 TEST PROCEDURE 42

4.3.4 .DEVIATION FROM TEST STANDARD 42

4.3.5 TEST SETUP 43

4.3.6 EUT OPERATING CONDITIONS 43

4.3.7 TEST RESULTS 43



4.4	CONDUCTED OUTPUT POWER	45
4.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	45
4.4.2	TEST SETUP	45
4.4.3	TEST INSTRUMENTS	45
4.4.4	TEST PROCEDURES	45
4.4.5	DEVIATION FROM TEST STANDARD	45
4.4.6	EUT OPERATING CONDITIONS	45
4.4.7	TEST RESULTS.....	46
4.4.7.2	Average Output Power (FOR REFERENCE).....	48
4.5	POWER SPECTRAL DENSITY MEASUREMENT	50
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	50
4.5.2	TEST SETUP	50
4.5.3	TEST INSTRUMENTS	50
4.5.4	TEST PROCEDURE	50
4.5.5	DEVIATION FROM TEST STANDARD	50
4.5.6	EUT OPERATING CONDITION	50
4.5.7	TEST RESULTS.....	51
4.6	OUT OF BAND EMISSION MEASUREMENT	52
4.6.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT	52
4.6.2	TEST SETUP	52
4.6.3	TEST INSTRUMENTS	52
4.6.4	TEST PROCEDURE	52
4.6.5	DEVIATION FROM TEST STANDARD	53
4.6.6	EUT OPERATING CONDITION	53
4.6.7	TEST RESULTS.....	54
5	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	63



BUREAU
VERITAS

Test Report No.: RF131126N045

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF131126N045	Original release	Dec. 02, 2013



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -10.20dB at 4.386MHz.
15.205 15.209	Restricted bands of operation & Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -4.0dB at 2390MHz-802.11n (20MHz)
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.247(d)	Out of Band Emission Measurement	PASS	Meet the requirement of limit.

2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.67dB
Radiated emissions	30MHz ~ 1GMHz	4.81dB
	1GHz ~ 18GHz	4.3dB
	18GHz ~ 40GHz	1.94dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k = 2.



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Lenovo Mobile Phone
MODEL NO.	Lenovo A859
MID	85900031
FCC ID	YCNA859
NOMINAL VOLTAGE	5.0Vdc (adapter or host equipment) 3.7Vdc (Li-ion battery)
MODULATION TECHNOLOGY	DSSS, OFDM, DTS
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM BT-LE(GFSK) for DTS
OPERATING FREQUENCY	2412-2462MHz for 11b/g/n(HT20) 2422-2452MHz for 11n(HT40) 2402-2480MHz for BT-LE
PEAK POWER	WLAN: 22.52dBm (Maximum) BT-LE: -0.44 dBm (Maximum)
ANTENNA TYPE	PIFA Antenna with -0.4dBi Gain
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	USB cable : Shielded, Detachable, 1.0m Earphone cable: Unshielded, Detachable, 1.0m

NOTE:

1. WLAN, Bluetooth, GPS, GSM, WCDMA technologies are used for the EUT.

2. The EUT was powered by the following adapter:

1.

ADAPTER	
BRAND:	lenovo
MODEL:	C-P56
INPUT:	AC 100-240V, 50/60Hz, 150mA
OUTPUT:	DC 5V, 1000mA
DC LINE:	N/A



3. The EUT provides one transmitter and one receiver.

MODULATION MODE	TX FUNCTION
802.11b	1TX
802.11g	1TX
802.11n (HT20)	1TX
802.11n (HT40)	1TX

4. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

5. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.



3.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g and 802.11n(HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

7 channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

40 channels are provided for BT-LE(GFSK):

CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480



3.2.1. CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photographs of the test configuration for reference.

3.2.2. TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports
The worst case was found when positioned on X axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				MODE
	RE<1G	RE≥1G	PLC	APCM	
A	√	√	√	-	Adapter mode with WIFI function
B	-	-	-	√	Battery mode with WIFI function

Where **RE<1G**: Radiated Emission below 1GHz **RE≥1G**: Radiated Emission above 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement
NOTE: No need to concern of Conducted Emission due to the EUT is powered by battery.

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
A	802.11b	1 to 11	11	CCK	DBPSK	1.0	-
A	BT-LE	0 to 39	19	DTS	GFSK	1.0	-



RADIATED EMISSION TEST (ABOVE 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
A	802.11b	1 to 11	1, 6, 11	CCK	DBPSK	1.0	-
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0	-
A	802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5	-
A	802.11n HT40	3 to 9	3, 6, 9	OFDM	BPSK	13.5	-
A	BT-LE	0 to 39	0,19,39	DTS	GFSK	1	-

POWER LINE CONDUCTED EMISSION TEST:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	11	CCK	DBPSK	1.0
A	BT-LE	0 to 39	19	DTS	GFSK	1.0



BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 11	CCK	DBPSK	1.0
A	802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
A	802.11n HT20	1 to 11	1, 11	OFDM	BPSK	6.5
A	802.11n HT40	3 to 9	3, 9	OFDM	BPSK	13.5
A	BT-LE	0 to 39	0,39	DTS	GFSK	1.0

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	CCK	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n HT20	1 to 11	1,6, 11	OFDM	BPSK	6.5
A	802.11n HT40	3 to 9	3,6, 9	OFDM	BPSK	13.5
A	BT-LE	0 to 39	0,19,39	DTS	GFSK	1.0



TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE	TESTED BY
RE<1G	25deg. C, 55%RH	120Vac, 60Hz	Blue
RE≥1G	25deg. C, 55%RH	120Vac, 60Hz	Blue
PLC	25deg. C, 50%RH	120Vac, 60Hz	Eric
APCM	25deg. C, 60%RH	3.7V From Battery	Venless Long



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

- FCC Part 15, Subpart C (15.247)**
- 558074 D01 DTS Meas Guidance**
- ANSI C63.10-2009**

Note:

1. All test items have been performed and recorded as per the above standards.
2. The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B(DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC source	LONG WEI	PS-6403D	010934269	N/A
2	Notebook	HP	4431s	CNU238944Z	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 1.0m
2	AC Line: Unshielded, Detachable 1.5m



4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:** 1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESU 26	100005	May 14,13	May 13,14
Artificial Mains Network	Rohde&Schwarz	ENV216	101173	May 14,13	May 13,14
Pulse Limiter	Rohde&Schwarz	ESH3-Z2	100168	May 14,13	May 13,14
Impedance Stabilization Network	TESEQ	ISN T800	27957	N/A	N/A
Test software	ADT	ADT_Cond_V7.3.7	N/A	May 14,13	May 13,14

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 2. The test was performed in Shielding Room 553.



4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.


NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.



4.1.5 TEST SETUP

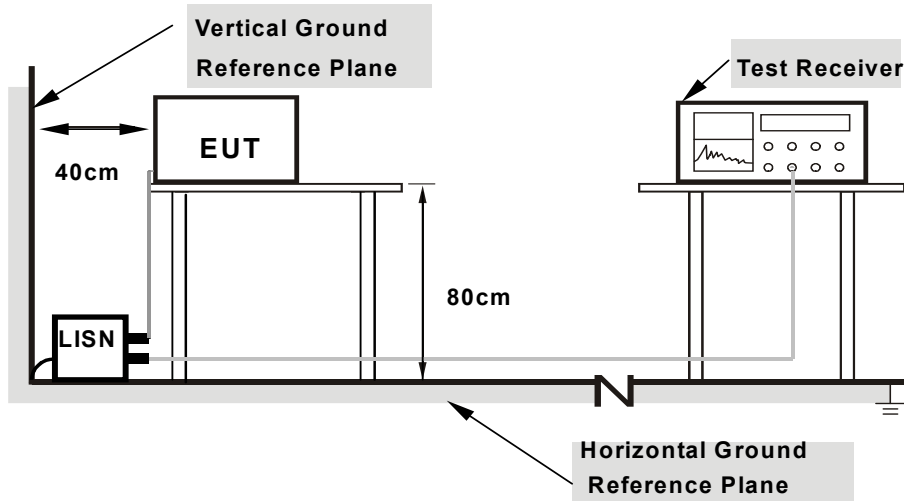

- Note: 1.Support units were connected to second LISN.**
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power and connected of all equipment.
- b. EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.




4.1.7 TEST RESULTS

CONDUCTED WORST-CASE DATA: 802.11g-CH11

PHASE	Line	6dB BANDWIDTH	9kHz
--------------	------	----------------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18180	10.58	29.34	21.36	39.92	31.94	64.4	54.4	-24.49	-22.47
2	0.67800	10.17	29.36	21.07	39.53	31.24	56.0	46.0	-16.47	-14.76
3	0.73843	10.13	29.80	21.40	39.93	31.53	56.0	46.0	-16.07	-14.47
4	1.04600	10.00	29.24	20.80	39.24	30.80	56.0	46.0	-16.76	-15.20
5	3.95000	9.93	33.39	21.47	43.32	31.40	56.0	46.0	-12.68	-14.60
6	4.38600	9.94	35.86	23.66	45.80	33.60	56.0	46.0	-10.20	-12.40

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

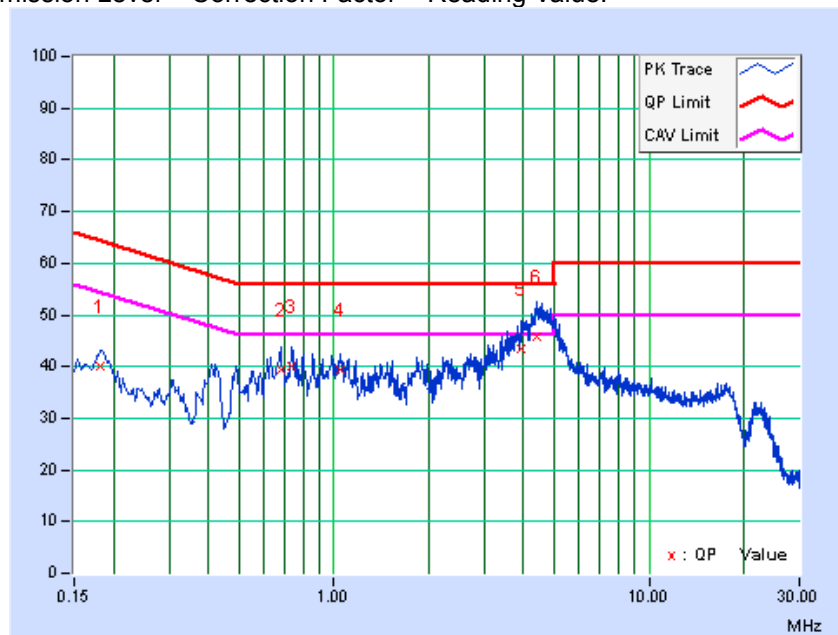




PHASE	Neutral	6dB BANDWIDTH	9kHz
--------------	---------	----------------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18519	10.46	22.94	13.10	33.40	23.56	64.25	54.25	-30.85	-30.69
2	0.67873	10.14	22.05	14.08	32.19	24.22	56.00	46.00	-23.81	-21.78
3	0.73400	10.07	23.12	15.01	33.19	25.08	56.00	46.00	-22.81	-20.92
4	1.05800	9.86	20.03	11.30	29.89	21.16	56.00	46.00	-26.11	-24.84
5	4.31000	9.75	30.37	20.19	40.12	29.94	56.00	46.00	-15.88	-16.06
6	4.73800	9.76	32.68	22.78	42.44	32.54	56.00	46.00	-13.56	-13.46

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

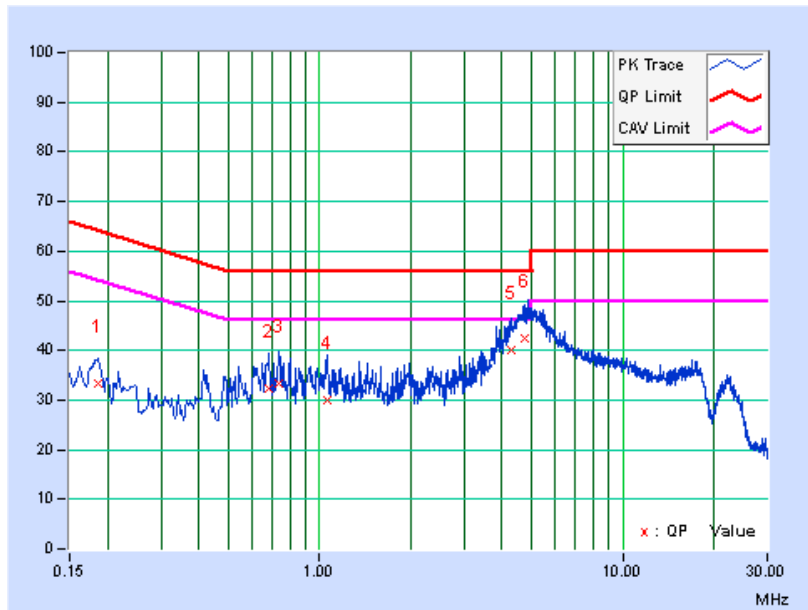



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Spectrum Analyzer	Agilent	E4446A	MY46180622	Apr. 24, 13	Apr. 23, 14
EMI Test Receiver	Rohde&Schwarz	ESVD	847398/003	May 14, 13	May 13, 14
Bilog Antenna	Teseq	CBL 6111D	27089	Jul. 27, 13	Jul. 26, 14
Horn Antenna (1GHz -18GHz)	EMCO	3117	00062558	Oct. 18, 12	Oct. 17, 14
Pre-Amplifier (20MHz-3GHz)	EMCI	EMC 330	980095	Nov. 02, 13	Nov. 01, 14
Pre-Amplifier (100MHz-26.5GHz)	Agilent	8449B	3008A00409	May 14, 13	May 13, 14
10m Semi-anechoic Chamber	CHANGLING	21.4m*12.1m*8.8m	NSEMC006	Mar. 24, 13	Mar. 23, 14
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 31, 13	Oct. 30, 14
Horn Antenna (15GHz-40GHz)	SCHWARZBECK	BBHA 9170	BBHA9170147	Feb. 18, 13	Feb. 18, 14
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Nov. 04, 13	Nov. 03, 14
Power Meter	Anritsu	ML2495A	1139001	Nov. 04, 13	Nov. 03, 14
Humid & Temp Programmable Tester	Haida	HD-2257	110807201	Sep. 17, 13	Sep. 16, 14
Test Software	ADT	ADT_Radiated V7.6.15	N/A	N/A	N/A

NOTE: 1. The calibration interval of the above test instruments is 12 months or 24 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

2. The test was performed in 10m Chamber.

3. The FCC Site Registration No. is 502831.



4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation



4.2.5 TEST SETUP

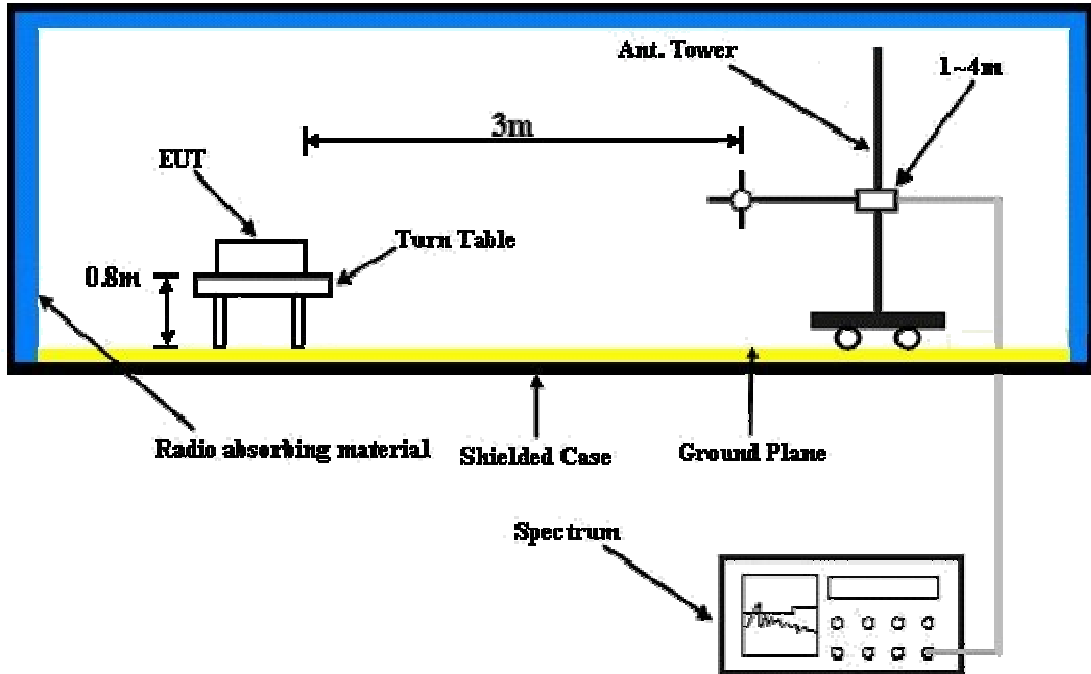

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

- a. Set the EUT under full load condition and placed them on a testing table.
- b. Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- c. The necessary accessories enable the EUT in full functions.



4.2.7 TEST RESULTS


BELOW 1GHz WORST-CASE DATA: 802.11g- CH11

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	31.62	20.5 QP	40.0	-19.5	1.00 H	334	1.36	19.12
2	91.43	18.8 QP	43.5	-24.7	1.00 H	302	8.68	10.10
3	135.08	26.6 QP	43.5	-16.9	1.00 H	285	13.65	12.91
4	152.87	24.1 QP	43.5	-19.4	1.00 H	318	11.84	12.26
5	270.88	18.5 QP	46.0	-27.5	1.00 H	350	3.22	15.32
6	474.58	22.8 QP	46.0	-23.2	1.00 H	0	2.45	20.35

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

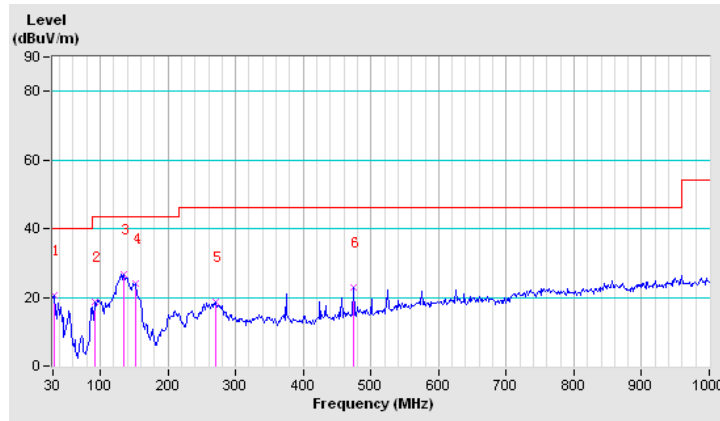




CHANNEL	TX Channel 11	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	34.9 QP	40.0	-5.1	1.00 V	293	14.92	20.02
2	41.32	32.0 QP	40.0	-8.0	1.00 V	267	18.35	13.64
3	59.10	25.5 QP	40.0	-14.6	1.00 V	223	16.92	8.53
4	160.95	25.5 QP	43.5	-18.0	1.00 V	252	13.77	11.74
5	172.27	23.6 QP	43.5	-19.9	1.00 V	161	12.50	11.07
6	474.58	24.1 QP	46.0	-21.9	1.00 V	194	3.73	20.35

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

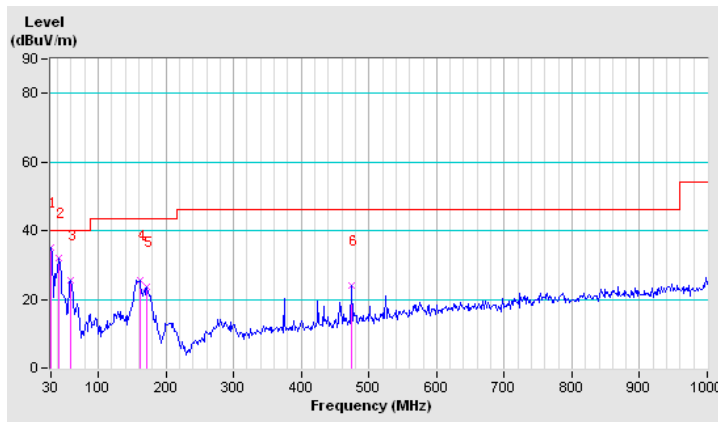



ABOVE 1GHz DATA

802.11b

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	50.2 PK	74.0	-23.8	1.00 H	360	12.95	37.25
2	2390.00	36.8 AV	54.0	-17.2	1.00 H	360	-0.45	37.25
3	#2400.00	55.6 PK	79.8	-24.2	1.00 H	360	18.33	37.27
4	#2400.00	50.2 AV	76.5	-26.3	1.00 H	360	12.93	37.27
5	*2412.00	99.8 PK			1.00 H	360	62.51	37.29
6	*2412.00	96.5 AV			1.00 H	360	59.21	37.29
7	4824.00	52.5 PK	74.0	-21.5	1.05 H	211	10.87	41.63
8	4824.00	38.7 AV	54.0	-15.3	1.05 H	211	-2.93	41.63

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	47.2 PK	74.0	-26.8	1.24 V	271	9.95	37.25
2	2390.00	35.2 AV	54.0	-18.8	1.24 V	271	-2.05	37.25
3	#2400.00	53.3 PK	76.8	-23.5	1.24 V	271	16.03	37.27
4	#2400.00	45.3 AV	73.3	-28.0	1.24 V	271	8.03	37.27
5	*2412.00	96.8 PK			1.24 V	271	59.51	37.29
6	*2412.00	93.3 AV			1.24 V	271	56.01	37.29
7	4824.00	53.8 PK	74.0	-20.2	1.00 V	200	12.17	41.63
8	4824.00	39.5 AV	54.0	-14.5	1.00 V	200	-2.13	41.63

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	100.5 PK			1.00 H	19	63.17	37.33
2	*2437.00	96.8 AV			1.00 H	19	59.47	37.33
3	4874.00	51.2 PK	74.0	-22.8	1.00 H	132	9.51	41.69
4	4874.00	37.5 AV	54.0	-16.5	1.00 H	132	-4.19	41.69
5	7311.00	54.9 PK	74.0	-19.1	1.10 H	120	9.11	45.79
6	7311.00	40.3 AV	54.0	-13.7	1.10 H	120	-5.49	45.79
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	98.6 PK			1.00 V	311	61.27	37.33
2	*2437.00	93.5 AV			1.00 V	311	56.17	37.33
3	4874.00	51.1 PK	74.0	-22.9	1.00 V	300	9.41	41.69
4	4874.00	38.2 AV	54.0	-15.8	1.00 V	300	-3.49	41.69
5	7311.00	55.1 PK	74.0	-18.9	1.00 V	320	9.31	45.79
6	7311.00	41.8 AV	54.0	-12.2	1.00 V	320	-3.99	45.79

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	97.9 PK			1.00 H	19	60.53	37.37
2	*2462.00	93.7 AV			1.00 H	19	56.33	37.37
3	2483.50	45.6 PK	74.0	-28.4	1.00 H	19	8.19	37.41
4	2483.50	35.7 AV	54.0	-18.3	1.00 H	19	-1.71	37.41
5	4924.00	50.8 PK	74.0	-23.2	1.00 H	100	9.04	41.76
6	4924.00	37.9 AV	54.0	-16.1	1.00 H	100	-3.86	41.76
7	7386.00	56.7 PK	74.0	-17.3	1.00 H	142	10.89	45.81
8	7386.00	43.0 AV	54.0	-11.0	1.00 H	142	-2.81	45.81

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	98.9 PK			1.00 V	353	61.53	37.37
2	*2462.00	94.8 AV			1.00 V	353	57.43	37.37
3	2483.50	46.2 PK	74.0	-27.8	1.00 V	353	8.79	37.41
4	2483.50	35.2 AV	54.0	-18.8	1.00 V	353	-2.21	37.41
5	4924.00	50.3 PK	74.0	-23.7	1.00 V	322	8.54	41.76
6	4924.00	37.4 AV	54.0	-16.6	1.00 V	322	-4.36	41.76
7	7386.00	55.8 PK	74.0	-18.2	1.00 V	314	9.99	45.81
8	7386.00	42.6 AV	54.0	-11.4	1.00 V	314	-3.21	45.81

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



802.11g

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.2 PK	74.0	-16.8	1.00 H	343	19.95	37.25
2	2390.00	42.1 AV	54.0	-11.9	1.00 H	343	4.85	37.25
3	#2400.00	71.6 PK	82.4	-10.8	1.00 H	343	34.33	37.27
4	#2400.00	51.2 AV	71.7	-20.5	1.00 H	343	13.93	37.27
5	*2412.00	102.4 PK			1.00 H	343	65.11	37.29
6	*2412.00	91.7 AV			1.00 H	343	54.41	37.29
7	4824.00	51.2 PK	74.0	-22.8	1.00 H	252	9.57	41.63
8	4824.00	38.6 AV	54.0	-15.4	1.00 H	252	-3.03	41.63

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	53.0 PK	74.0	-21.0	1.00 V	349	15.75	37.25
2	2390.00	37.8 AV	54.0	-16.2	1.00 V	349	0.55	37.25
3	#2400.00	66.0 PK	79.3	-13.3	1.00 V	349	28.73	37.27
4	#2400.00	46.9 AV	68.3	-21.4	1.00 V	349	9.63	37.27
5	*2412.00	99.3 PK			1.00 V	349	62.01	37.29
6	*2412.00	88.3 AV			1.00 V	349	51.01	37.29
7	4824.00	50.2 PK	74.0	-23.8	1.00 V	122	8.57	41.63
8	4824.00	36.9 AV	54.0	-17.1	1.00 V	122	-4.73	41.63

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	99.8 PK			1.00 H	211	62.47	37.33
2	*2437.00	89.6 AV			1.00 H	211	52.27	37.33
3	4874.00	51.8 PK	74.0	-22.2	1.00 H	113	10.11	41.69
4	4874.00	38.3 AV	54.0	-15.7	1.00 H	113	-3.39	41.69
5	7311.00	57.3 PK	74.0	-16.7	1.00 H	85	11.51	45.79
6	7311.00	43.6 AV	54.0	-10.4	1.00 H	85	-2.19	45.79
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	97.7 PK			1.00 V	353	60.37	37.33
2	*2437.00	88.2 AV			1.00 V	353	50.87	37.33
3	4874.00	52.1 PK	74.0	-21.9	1.00 V	320	10.41	41.69
4	4874.00	39.8 AV	54.0	-14.2	1.00 V	320	-1.89	41.69
5	7311.00	55.8 PK	74.0	-18.2	1.00 V	326	10.01	45.79
6	7311.00	42.7 AV	54.0	-11.3	1.00 V	326	-3.09	45.79

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency.



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	97.8 PK			1.00 H	19	60.43	37.37
2	*2462.00	87.2 AV			1.00 H	19	49.83	37.37
3	2483.50	49.9 PK	74.0	-24.1	1.00 H	19	12.49	37.41
4	2483.50	36.5 AV	54.0	-17.5	1.00 H	19	-0.91	37.41
5	4924.00	50.9 PK	74.0	-23.1	1.00 H	203	9.14	41.76
6	4924.00	38.6 AV	54.0	-15.4	1.00 H	203	-3.16	41.76
7	7386.00	55.6 PK	74.0	-18.4	1.00 H	142	9.79	45.81
8	7386.00	41.2 AV	54.0	-12.8	1.00 H	142	-4.61	45.81
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	97.2 PK			1.00 V	351	59.83	37.37
2	*2462.00	86.5 AV			1.00 V	351	49.13	37.37
3	2483.50	50.5 PK	74.0	-23.5	1.00 V	351	13.09	37.41
4	2483.50	37.8 AV	54.0	-16.2	1.00 V	351	0.39	37.41
5	4924.00	51.2 PK	74.0	-22.8	1.00 V	222	9.44	41.76
6	4924.00	39.4 AV	54.0	-14.6	1.00 V	222	-2.36	41.76
7	7386.00	56.2 PK	74.0	-17.8	1.00 V	204	10.39	45.81
8	7386.00	42.7 AV	54.0	-11.3	1.00 V	204	-3.11	45.81

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



802.11n (20MHz)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	70.0 PK	74.0	-4.0	1.00 H	343	32.75	37.25
2	2390.00	49.4 AV	54.0	-4.6	1.00 H	343	12.15	37.25
3	#2400.00	75.1 PK	83.3	-8.2	1.00 H	343	37.83	37.27
4	#2400.00	56.1 AV	72.4	-16.3	1.00 H	343	18.83	37.27
5	*2412.00	103.3 PK			1.00 H	343	66.01	37.29
6	*2412.00	92.4 AV			1.00 H	343	55.11	37.29
7	4824.00	50.6 PK	74.0	-23.4	1.00 H	201	8.97	41.63
8	4824.00	37.6 AV	54.0	-16.4	1.00 H	201	-4.03	41.63
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.0 PK	74.0	-8.0	1.00 V	350	28.75	37.25
2	2390.00	44.8 AV	54.0	-9.2	1.00 V	350	7.55	37.25
3	#2400.00	70.7 PK	79.1	-8.4	1.00 V	350	33.43	37.27
4	#2400.00	51.3 AV	69.6	-18.3	1.00 V	350	14.03	37.27
5	*2412.00	99.1 PK			1.00 V	350	61.81	37.29
6	*2412.00	89.6 AV			1.00 V	350	52.31	37.29
7	4824.00	50.9 PK	74.0	-23.1	1.00 V	113	9.27	41.63
8	4824.00	38.1 AV	54.0	-15.9	1.00 V	113	-3.53	41.63

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	101.0 PK			1.00 H	100	63.67	37.33
2	*2437.00	90.2 AV			1.00 H	100	52.87	37.33
3	4874.00	52.1 PK	74.0	-21.9	1.00 H	130	10.41	41.69
4	4874.00	39.6 AV	54.0	-14.4	1.00 H	130	-2.09	41.69
5	7311.00	57.6 PK	74.0	-16.4	1.00 H	114	11.81	45.79
6	7311.00	43.8 AV	54.0	-10.2	1.00 H	114	-1.99	45.79
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	99.2 PK			1.00 V	300	61.87	37.33
2	*2437.00	88.7 AV			1.00 V	300	51.37	37.33
3	4874.00	53.1 PK	74.0	-20.9	1.00 V	200	11.41	41.69
4	4874.00	38.9 AV	54.0	-15.1	1.00 V	200	-2.79	41.69
5	7311.00	56.2 PK	74.0	-17.8	1.00 V	221	10.41	45.79
6	7311.00	43.6 AV	54.0	-10.4	1.00 V	221	-2.19	45.79

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	98.8 PK			1.00 H	32	61.43	37.37
2	*2462.00	88.6 AV			1.00 H	32	51.23	37.37
3	2483.50	57.5 PK	74.0	-16.5	1.00 H	32	20.09	37.41
4	2483.50	39.3 AV	54.0	-14.7	1.00 H	32	1.89	37.41
5	4924.00	52.6 PK	74.0	-21.4	1.00 H	50	10.84	41.76
6	4924.00	39.8 AV	54.0	-14.2	1.00 H	50	-1.96	41.76
7	7386.00	56.8 PK	74.0	-17.2	1.00 H	96	10.99	45.81
8	7386.00	42.8 AV	54.0	-11.2	1.00 H	96	-3.01	45.81

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	99.3 PK			1.00 V	350	61.93	37.37
2	*2462.00	89.1 AV			1.00 V	350	51.73	37.37
3	2483.50	59.8 PK	74.0	-14.2	1.00 V	350	22.39	37.41
4	2483.50	42.6 AV	54.0	-11.4	1.00 V	350	5.19	37.41
5	4924.00	52.0 PK	74.0	-22.0	1.00 V	100	10.24	41.76
6	4924.00	38.8 AV	54.0	-15.2	1.00 V	100	-2.96	41.76
7	7386.00	57.3 PK	74.0	-16.7	1.00 V	228	11.49	45.81
8	7386.00	43.8 AV	54.0	-10.2	1.00 V	228	-2.01	45.81

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency.



802.11n (40MHz)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.6 PK	74.0	-16.4	1.00 H	300	20.35	37.25
2	2390.00	39.8 AV	54.0	-14.2	1.00 H	300	2.55	37.25
3	#2400.00	60.0 PK	76.0	-16.0	1.00 H	33	22.73	37.27
4	#2400.00	46.3 AV	66.2	-19.9	1.00 H	33	9.03	37.27
5	*2422.00	96.0 PK			1.00 H	33	58.70	37.30
6	*2422.00	86.2 AV			1.00 H	33	48.90	37.30
7	4844.00	52.3 PK	74.0	-21.7	1.00 H	325	10.64	41.66
8	4844.00	38.5 AV	54.0	-15.5	1.00 H	325	-3.16	41.66

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	53.1 PK	74.0	-20.9	1.00 V	350	15.85	37.25
2	2390.00	39.5 AV	54.0	-14.5	1.00 V	350	2.25	37.25
3	#2400.00	55.0 PK	73.4	-18.4	1.00 V	350	17.73	37.27
4	#2400.00	41.2 AV	62.9	-21.7	1.00 V	350	3.93	37.27
5	*2422.00	93.4 PK			1.00 V	353	56.10	37.30
6	*2422.00	82.9 AV			1.00 V	353	45.60	37.30
7	4844.00	52.2 PK	74.0	-21.8	1.00 V	115	10.54	41.66
8	4844.00	38.7 AV	54.0	-15.3	1.00 V	115	-2.96	41.66

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	95.2 PK			1.00 H	335	57.87	37.33
2	*2437.00	84.6 AV			1.00 H	335	47.27	37.33
3	4874.00	53.1 PK	74.0	-20.9	1.00 H	319	11.41	41.69
4	4874.00	39.8 AV	54.0	-14.2	1.00 H	319	-1.89	41.69
5	7311.00	56.8 PK	74.0	-17.2	1.00 H	220	11.01	45.79
6	7311.00	43.7 AV	54.0	-10.3	1.00 H	220	-2.09	45.79
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	93.5 PK			1.00 V	350	56.17	37.33
2	*2437.00	83.5 AV			1.00 V	350	46.17	37.33
3	4874.00	51.3 PK	74.0	-22.7	1.00 V	104	9.61	41.69
4	4874.00	38.2 AV	54.0	-15.8	1.00 V	104	-3.49	41.69
5	7311.00	57.2 PK	74.0	-16.8	1.00 V	109	11.41	45.79
6	7311.00	43.8 AV	54.0	-10.2	1.00 V	109	-1.99	45.79

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	94.5 PK			1.00 H	322	57.14	37.36
2	*2452.00	83.7 AV			1.00 H	322	46.34	37.36
3	2483.50	49.7 PK	74.0	-24.3	1.00 H	322	12.29	37.41
4	2483.50	40.0 AV	54.0	-14.0	1.00 H	322	2.59	37.41
5	4904.00	51.8 PK	74.0	-22.2	1.00 H	276	10.07	41.73
6	4904.00	37.0 AV	54.0	-17.0	1.00 H	276	-4.73	41.73
7	7356.00	56.5 PK	74.0	-17.5	1.00 H	285	10.70	45.80
8	7356.00	43.1 AV	54.0	-10.9	1.00 H	285	-2.70	45.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	93.2 PK			1.00 V	351	55.84	37.36
2	*2452.00	82.4 AV			1.00 V	351	45.04	37.36
3	2483.50	51.5 PK	74.0	-22.5	1.00 V	351	14.09	37.41
4	2483.50	38.4 AV	54.0	-15.6	1.00 V	351	0.99	37.41
5	4904.00	52.7 PK	74.0	-21.3	1.00 V	316	10.97	41.73
6	4904.00	38.2 AV	54.0	-15.8	1.00 V	316	-3.53	41.73
7	7356.00	56.9 PK	74.0	-17.1	1.00 V	315	11.10	45.80
8	7356.00	42.3 AV	54.0	-11.7	1.00 V	315	-3.50	45.80

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency.



BELOW 1GHz WORST-CASE DATA:


BT-LE (GFSK)

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	93.05	19.8 QP	43.5	-23.7	1.00 H	254	9.53	10.31
2	133.47	27.4 QP	43.5	-16.1	1.00 H	287	14.47	12.93
3	148.02	26.2 QP	43.5	-17.3	1.00 H	270	13.64	12.57
4	266.03	14.9 QP	46.0	-31.1	1.00 H	213	-0.46	15.39
5	374.35	20.1 QP	46.0	-25.9	1.00 H	197	2.73	17.40
6	474.58	23.9 QP	46.0	-22.1	1.00 H	182	3.59	20.35

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

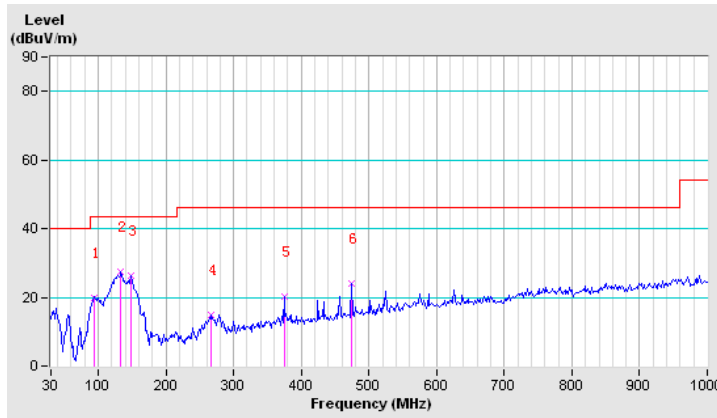




CHANNEL	TX Channel19	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	34.6 QP	40.0	-5.4	1.00 V	63	14.57	20.02
2	41.32	31.6 QP	40.0	-8.4	1.00 V	98	17.92	13.64
3	86.58	27.4 QP	40.0	-12.6	1.00 V	115	18.01	9.39
4	159.33	23.3 QP	43.5	-20.2	1.00 V	129	11.48	11.85
5	374.35	19.8 QP	46.0	-26.2	1.00 V	144	2.37	17.40
6	474.58	24.2 QP	46.0	-21.8	1.00 V	156	3.83	20.35

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

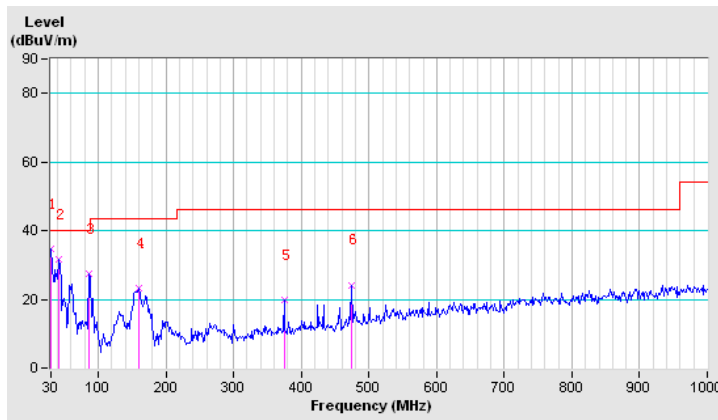



ABOVE 1GHz TEST DATA:

BT-LE (GFSK)

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	45.6 PK	74.0	-28.4	1.00 H	32	8.35	37.25
2	2390.00	34.8 AV	54.0	-19.2	1.00 H	32	-2.45	37.25
3	#2400.00	52.9 PK	69.9	-17.0	1.00 H	32	15.63	37.27
4	#2400.00	39.4 AV	47.2	-7.8	1.00 H	32	2.13	37.27
5	*2402.00	89.9 PK			1.00 H	32	52.63	37.27
6	*2402.00	67.2 AV			1.00 H	32	29.93	37.27
7	4804.00	50.9 PK	74.0	-23.1	1.00 H	147	9.29	41.61
8	4804.00	38.2 AV	54.0	-15.8	1.00 H	147	-3.41	41.61
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	45.4 PK	74.0	-28.3	1.00 V	264	8.15	37.25
2	2390.00	34.2 AV	54.0	-19.8	1.00 V	264	-3.05	37.25
3	#2400.00	49.4 PK	63.8	-14.4	1.00 V	264	12.13	37.27
4	#2400.00	35.6 AV	43.4	-7.8	1.00 V	264	-1.67	37.27
5	*2402.00	83.8 PK			1.00 V	264	46.53	37.27
6	*2402.00	63.4 AV			1.00 V	264	26.13	37.27
7	4804.00	50.9 PK	74.0	-23.1	1.00 V	214	9.29	41.61
8	4804.00	38.7 AV	54.0	-15.3	1.00 V	214	-2.91	41.61

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	88.4 PK			1.00 H	33	51.06	37.34
2	*2440.00	66.5 AV			1.00 H	33	29.16	37.34
3	4880.00	50.2 PK	74.0	-23.8	1.00 H	50	8.50	41.70
4	4880.00	38.5 AV	54.0	-15.5	1.00 H	50	-3.20	41.70
5	7320.00	54.2 PK	74.0	-19.8	1.00 H	38	8.41	45.79
6	7320.00	40.6 AV	54.0	-13.4	1.00 H	38	-5.19	45.79
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	85.9 PK			1.00 V	260	48.56	37.34
2	*2440.00	64.7 AV			1.00 V	260	27.36	37.34
3	4880.00	50.7 PK	74.0	-23.3	1.00 V	85	9.00	41.70
4	4880.00	37.8 AV	54.0	-16.2	1.00 V	85	-3.90	41.70
5	7320.00	53.8 PK	74.0	-20.2	1.00 V	220	8.01	45.79
6	7320.00	40.7 AV	54.0	-13.3	1.00 V	220	-5.09	45.79

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	84.9 PK			1.00 H	235	47.49	37.41
2	*2480.00	63.5 AV			1.00 H	235	26.09	37.41
3	2483.50	47.8 PK	74.0	-26.2	1.00 H	235	10.39	37.41
4	2483.50	35.2 AV	54.0	-18.8	1.00 H	235	-2.21	37.41
5	4960.00	51.2 PK	74.0	-22.8	1.00 H	50	9.40	41.80
6	4960.00	39.5 AV	54.0	-14.5	1.00 H	50	-2.30	41.80
7	7440.00	52.4 PK	74.0	-21.6	1.00 H	300	6.58	45.82
8	7440.00	38.9 AV	54.0	-15.1	1.00 H	300	-6.92	45.82

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	85.3 PK			1.00 V	257	47.89	37.41
2	*2480.00	62.3 AV			1.00 V	257	24.89	37.41
3	2483.50	46.8 PK	74.0	-27.2	1.00 V	257	9.39	37.41
4	2483.50	34.8 AV	54.0	-19.2	1.00 V	257	-2.61	37.41
5	4960.00	50.6 PK	74.0	-23.4	1.00 V	205	8.80	41.80
6	4960.00	38.3 AV	54.0	-15.7	1.00 V	205	-3.50	41.80
7	7440.00	54.5 PK	74.0	-19.5	1.00 V	300	8.68	45.82
8	7440.00	41.5 AV	54.0	-12.5	1.00 V	300	-4.32	45.82

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Spectrum Analyzer (9KHz-40GHz)	Agilent	E4446A	MY46180622	Apr. 24,13	Apr. 23,14
Spectrum Analyzer (9KHz-25GHz)	Agilent	E7405A	MY45118807	May 14,13	May 13,14
Power Meter	Anritsu	ML2495A	1139001	Nov. 04,13	Nov. 03,14
Digital Multimeter	FLUKE	15B	A1220010D G	Oct. 30,13	Oct. 29,14

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

2. The test was performed in Oven room

4.3.3 TEST PROCEDURE


1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.4 .DEVIATION FROM TEST STANDARD

No deviation.



4.3.5 TEST SETUP

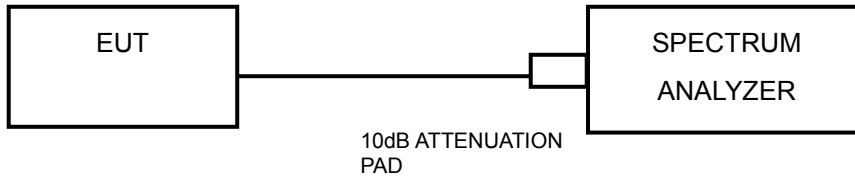

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 TEST RESULTS

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	9.12	0.5	PASS
6	2437	9.14	0.5	PASS
11	2462	9.14	0.5	PASS

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.37	0.5	PASS
6	2437	16.39	0.5	PASS
11	2462	16.38	0.5	PASS



802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	17.83	0.5	PASS
6	2437	17.83	0.5	PASS
11	2462	17.84	0.5	PASS

802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
3	2422	36.55	0.5	PASS
6	2437	36.56	0.5	PASS
9	2452	36.55	0.5	PASS

BT-LE (GFSK)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	0.70	0.5	PASS
19	2440	0.71	0.5	PASS
39	2480	0.71	0.5	PASS




4.4 CONDUCTED OUTPUT POWER

4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm)

4.4.2 TEST SETUP

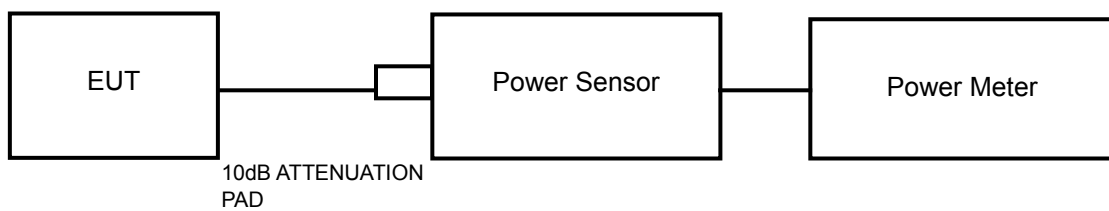

4.4.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

4.4.4 TEST PROCEDURES

A power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

4.4.6 EUT OPERATING CONDITIONS

Same as item 4.3.6.



4.4.7 TEST RESULTS

4.4.7.1 MAXIMUM PEAK OUTPUT POWER

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	19.12	30	PASS
6	2437	18.98	30	PASS
11	2462	19.08	30	PASS

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	22.37	30	PASS
6	2437	22.14	30	PASS
11	2462	22.52	30	PASS

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	POWER LIMIT (dBm)	PASS/FAIL
1	2412	21.17	30	PASS
6	2437	21.54	30	PASS
11	2462	21.92	30	PASS

802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	POWER LIMIT (dBm)	PASS/FAIL
3	2422	18.34	30	PASS
6	2437	18.16	30	PASS
9	2452	17.64	30	PASS



BT-LE (GFSK)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	POWER LIMIT (dBm)	PASS/FAIL
0	2402	-0.72	30	PASS
19	2440	-0.44	30	PASS
39	2480	-0.57	30	PASS



4.4.7.2 AVERAGE OUTPUT POWER (FOR REFERENCE)

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
1	2412	16.30	N/A
6	2437	16.06	N/A
11	2462	16.18	N/A

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
1	2412	14.85	N/A
6	2437	14.64	N/A
11	2462	14.47	N/A

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
1	2412	13.82	N/A
6	2437	13.56	N/A
11	2462	13.58	N/A

802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
3	2422	10.36	N/A
6	2437	10.18	N/A
9	2452	9.85	N/A



BT-LE (GFSK)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
0	2402	-1.99	N/A
19	2440	-1.38	N/A
39	2480	-1.36	N/A




4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

4.5.2 TEST SETUP

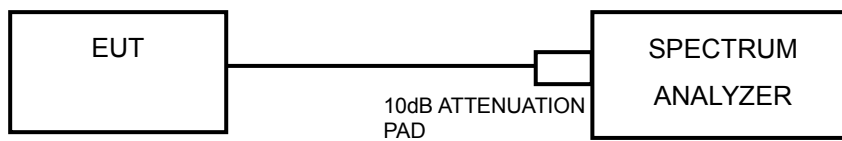

4.5.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

4.5.4 TEST PROCEDURE

1. Set the span to 1.5 times the DTS bandwidth
2. Set the RBW = 100 kHz, VBW $\geq 3 \times$ RBW, Detector = peak.
3. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

4.5.6 EUT OPERATING CONDITION

Same as item 4.3.6



4.5.7 TEST RESULTS

802.11b

Channel	FREQ. (MHz)	PSD (dBm/100kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	5.34	8	PASS
6	2437	5.37	8	PASS
11	2462	5.65	8	PASS

802.11g

Channel	FREQ. (MHz)	PSD (dBm/100kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	1.18	8	PASS
6	2437	0.81	8	PASS
11	2462	0.90	8	PASS

802.11n (20MHz)

Channel	FREQ. (MHz)	PSD (dBm/100kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-0.34	8	PASS
6	2437	-0.46	8	PASS
11	2462	-0.43	8	PASS

802.11n (40MHz)

Channel	FREQ. (MHz)	PSD (dBm/100kHz)	Limit (dBm/3kHz)	PASS /FAIL
3	2422	-7.59	8	PASS
6	2437	-8.01	8	PASS
9	2452	-7.90	8	PASS

BT-LE (GFSK)

Channel	FREQ. (MHz)	PSD (dBm/100kHz)	Limit (dBm/3kHz)	PASS /FAIL
3	2422	-1.53	8	PASS
6	2437	-1.27	8	PASS
9	2452	-1.43	8	PASS




4.6 OUT OF BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST SETUP

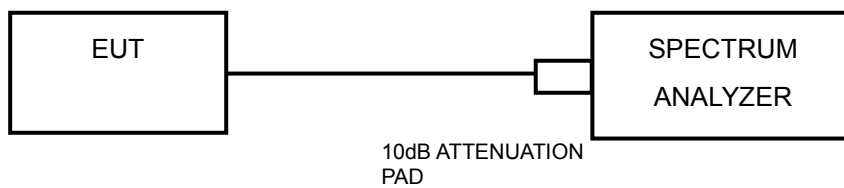

4.6.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

4.6.4 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Ensure that the number of measurement points \geq span/RBW
4. According to measurement points to set differ measurement span.
5. Detector = peak.
6. Trace Mode = max hold.
7. Sweep = auto couple.

4.6.5 DEVIATION FROM TEST STANDARD


No deviation.

4.6.6 EUT OPERATING CONDITION

Same as item 4.3.6



4.6.7 TEST RESULTS
802.11b

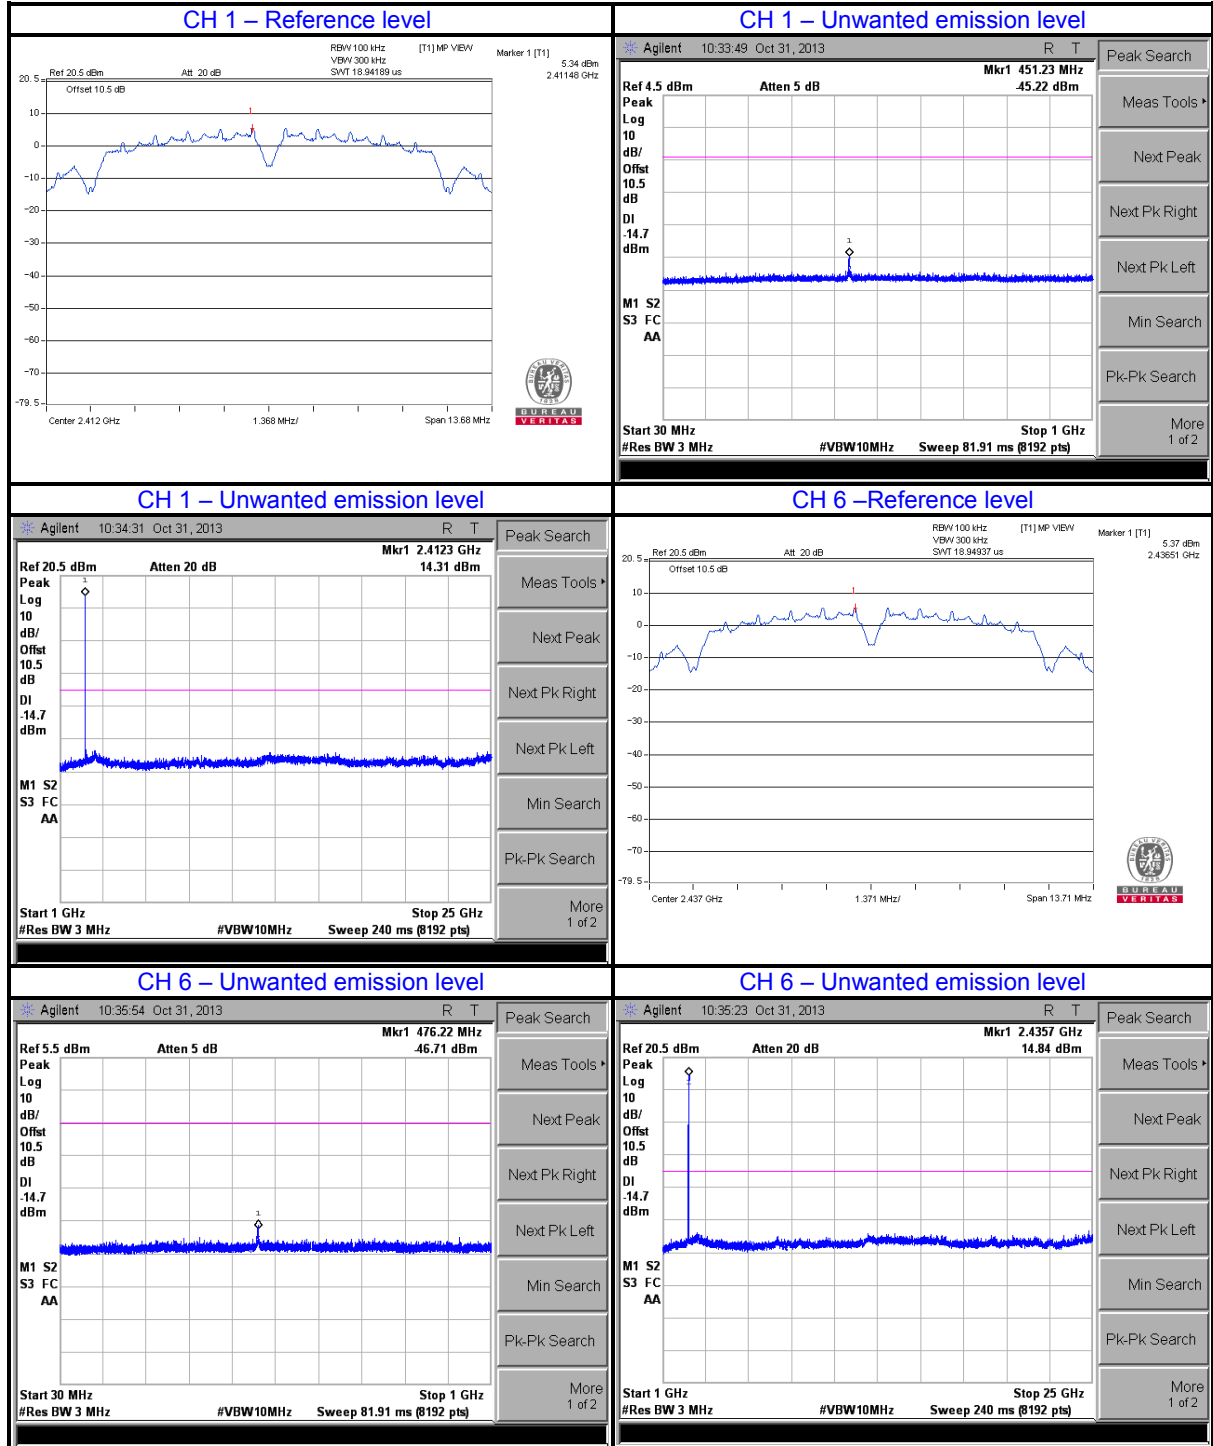




BUREAU VERITAS

Test Report No.: RF131126N045

802.11b

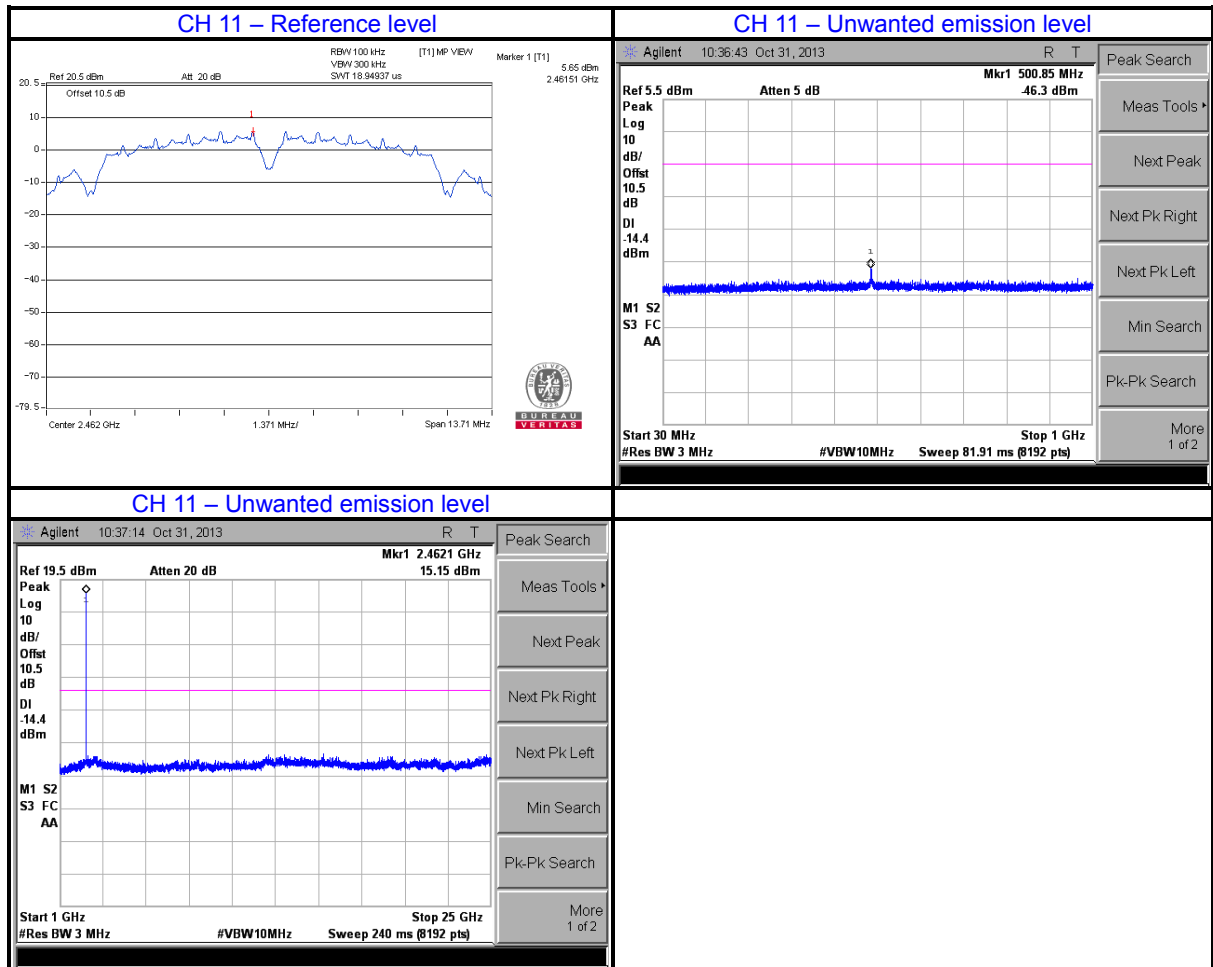




BUREAU VERITAS

Test Report No.: RF131126N045

802.11g

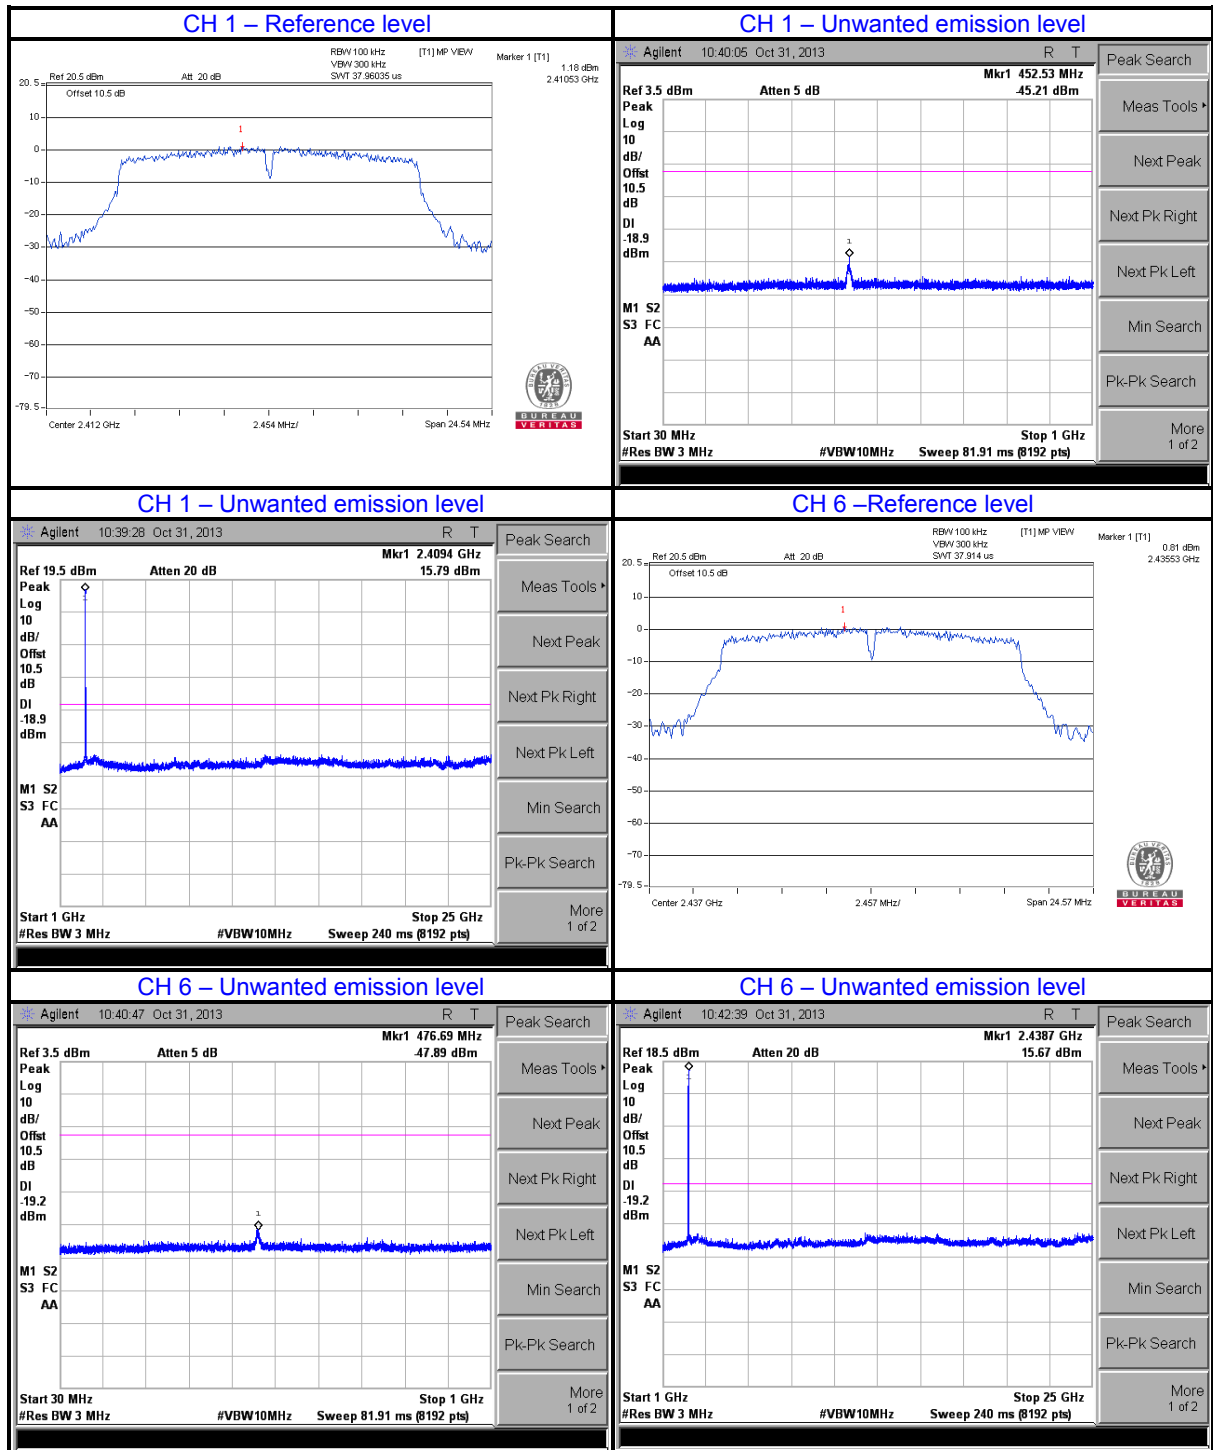




BUREAU VERITAS

Test Report No.: RF131126N045

802.11g

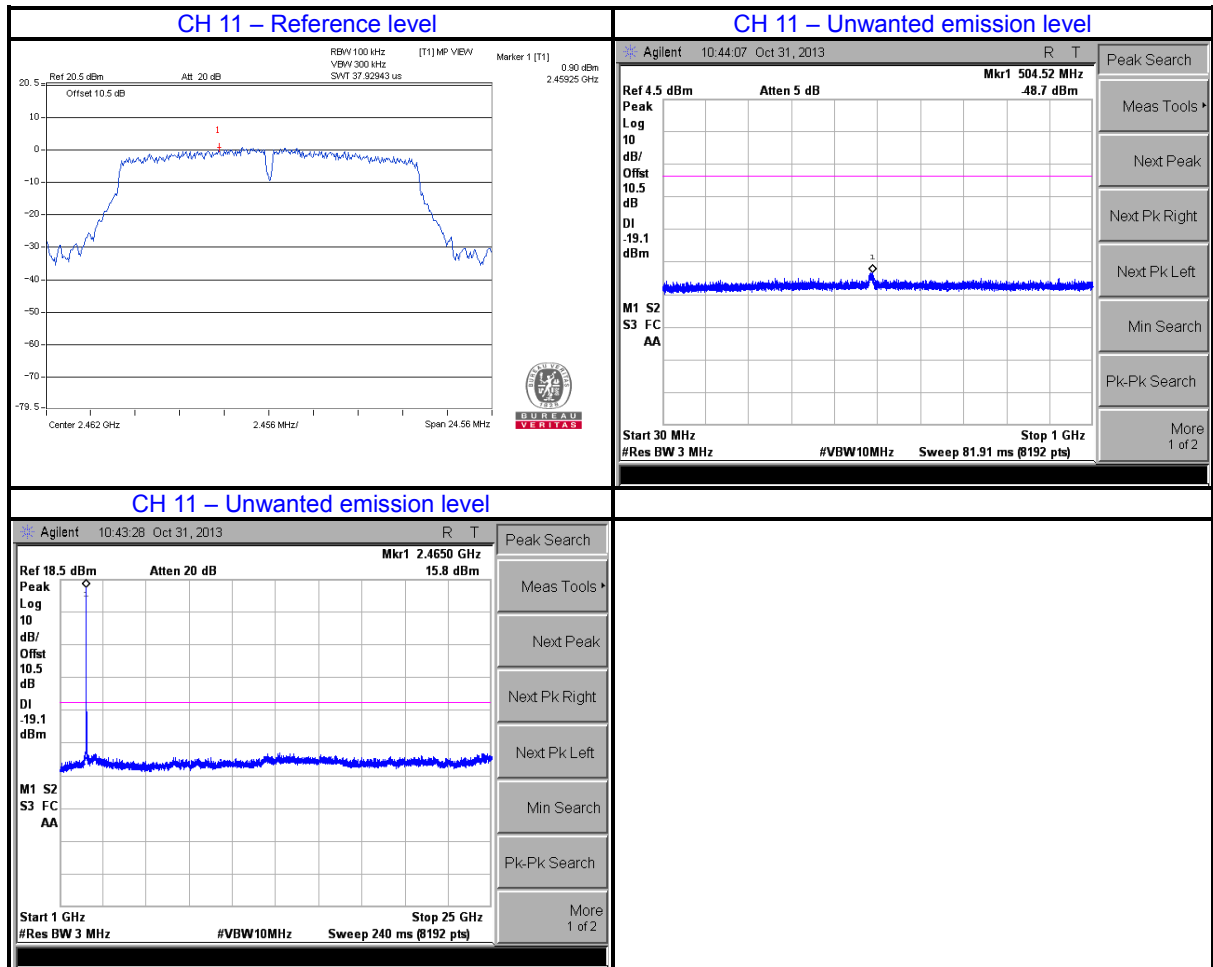




BUREAU VERITAS

Test Report No.: RF131126N045

802.11n(20MHz)

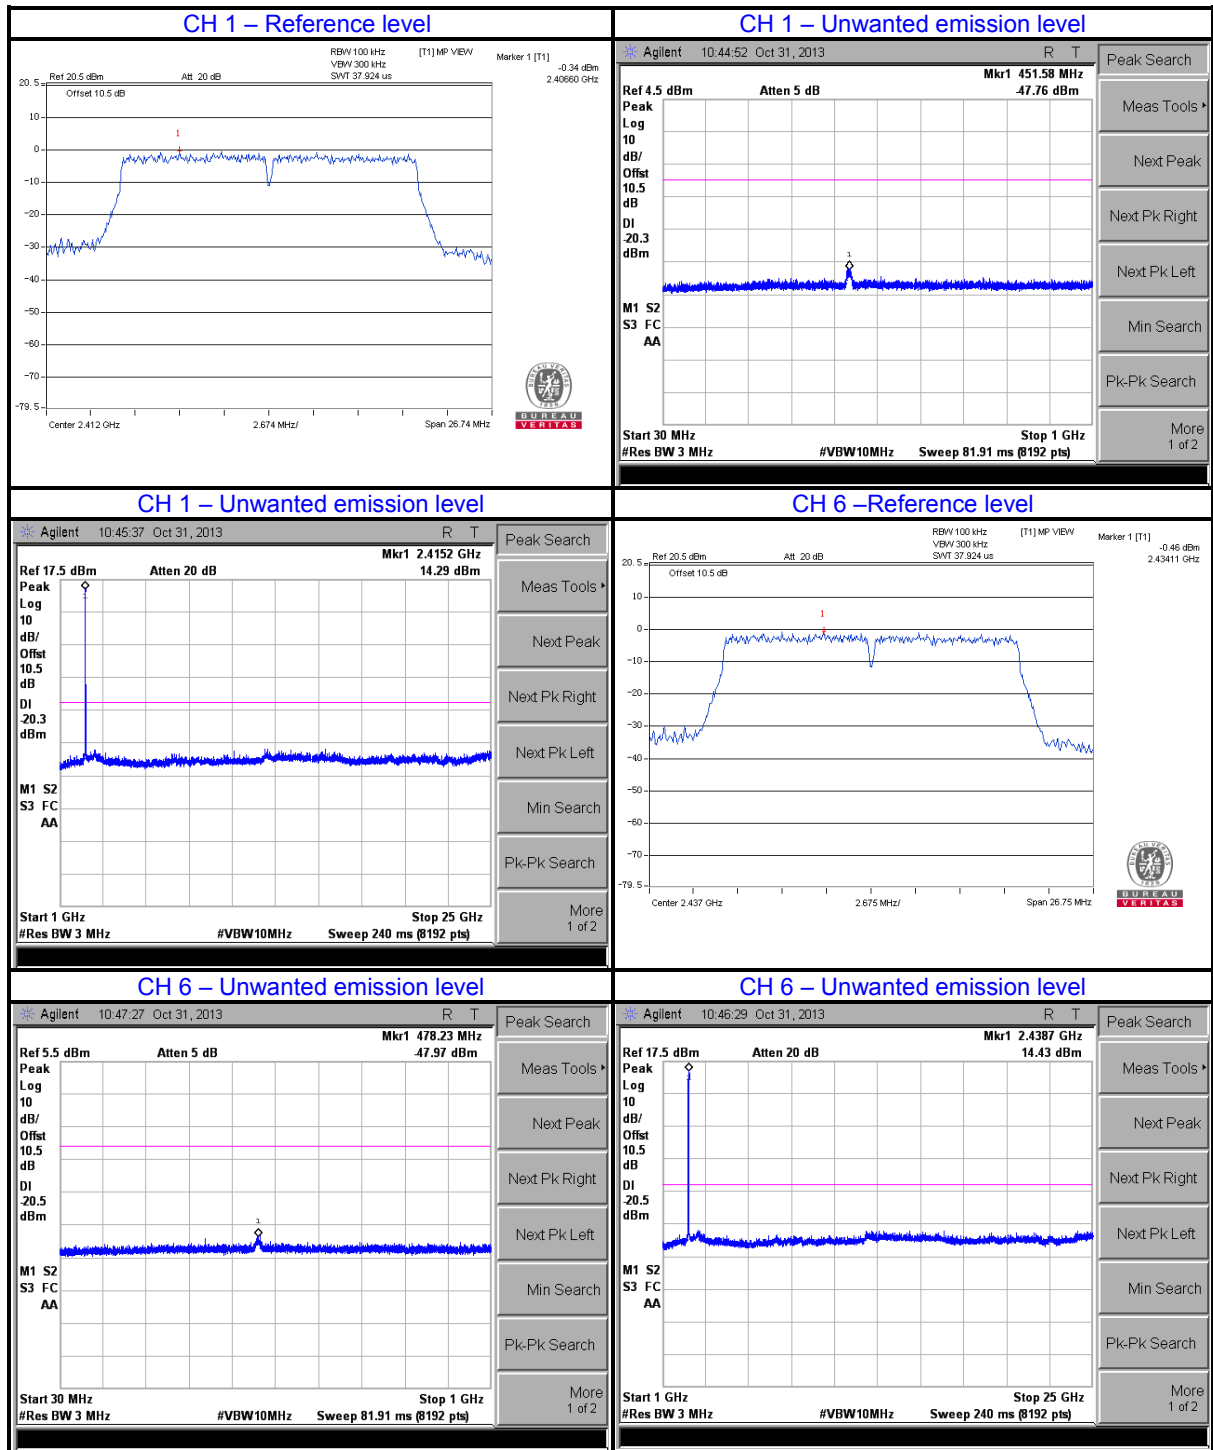




BUREAU VERITAS

Test Report No.: RF131126N045

802.11n(20MHz)

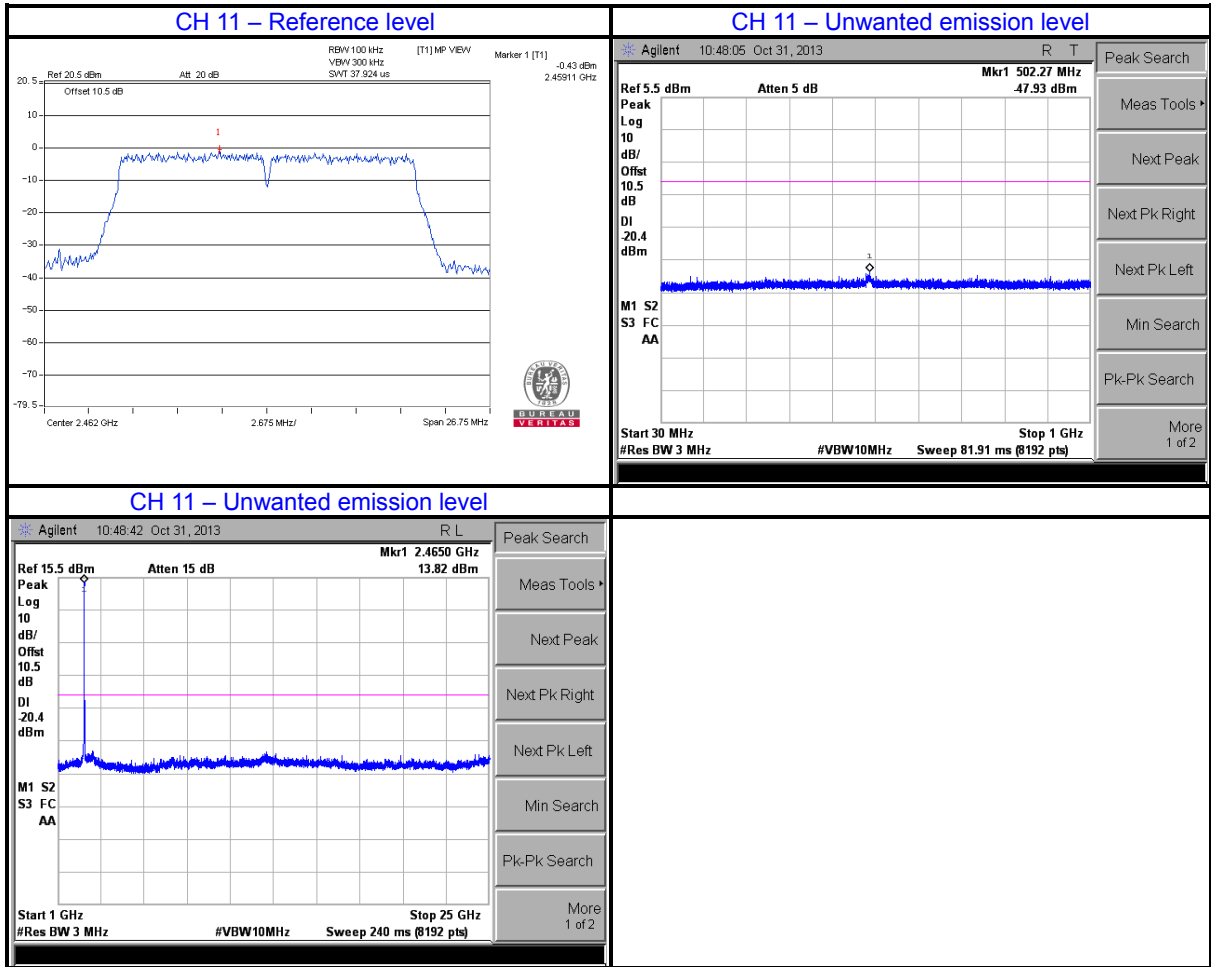




BUREAU VERITAS

Test Report No.: RF131126N045

802.11n(40MHz)

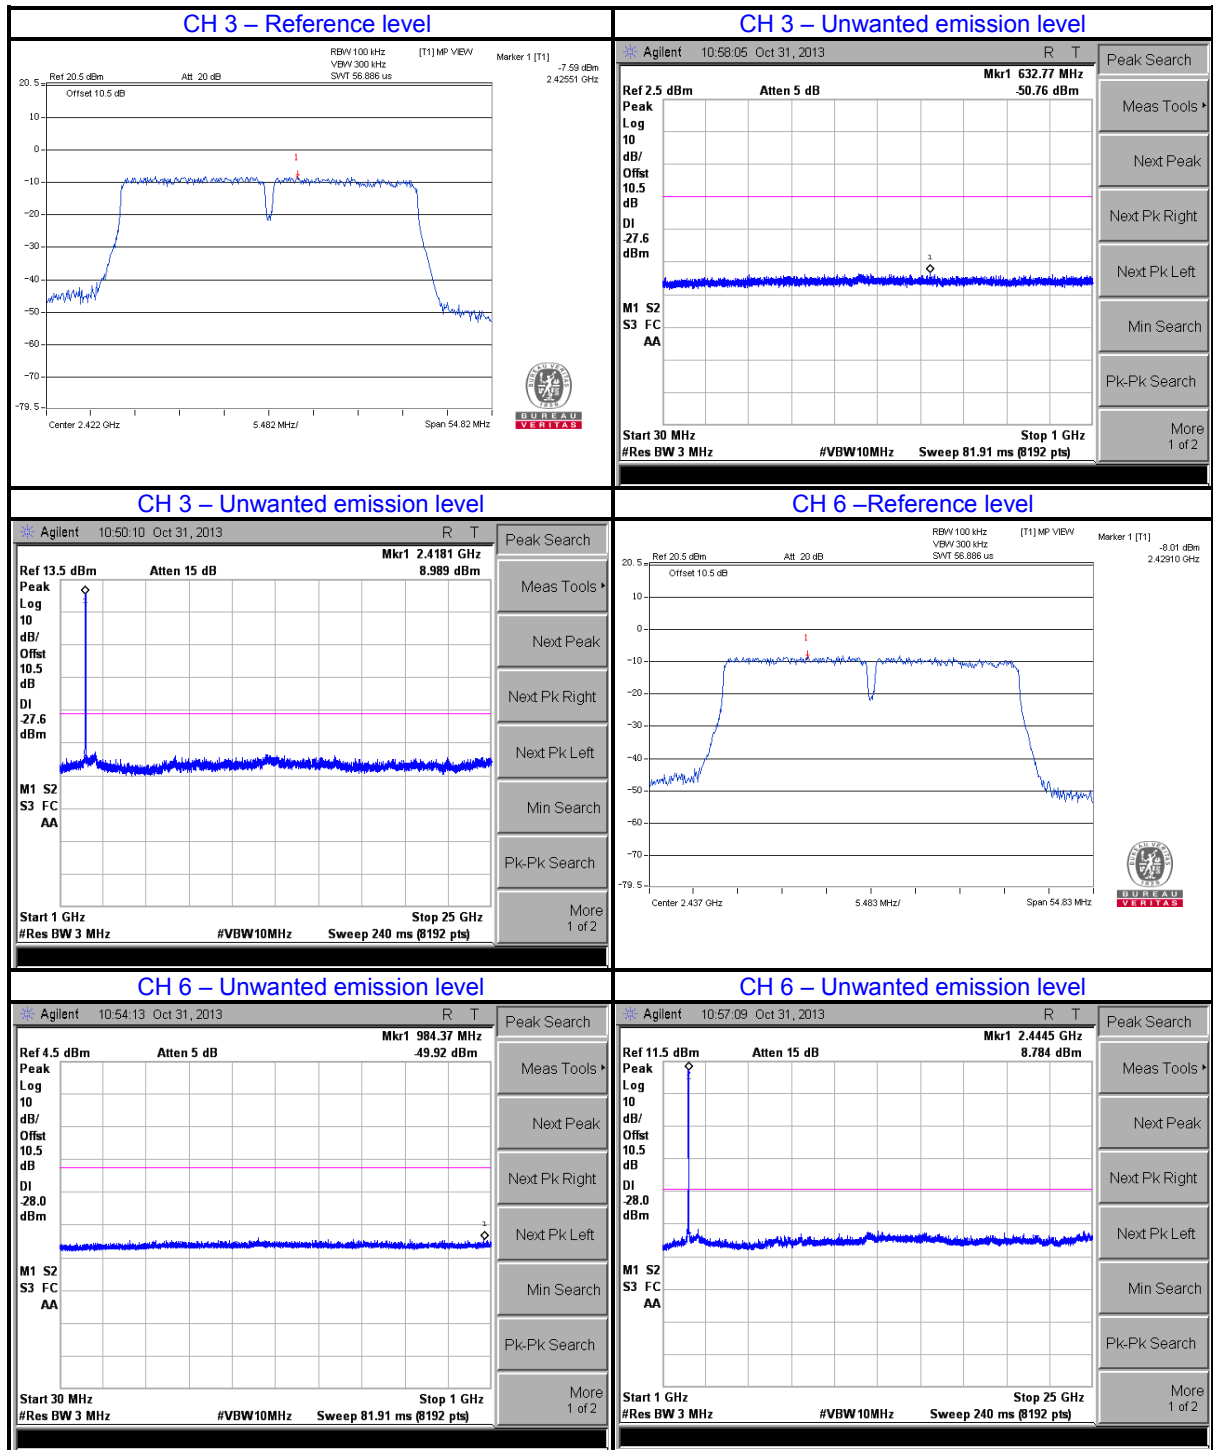




BUREAU VERITAS

Test Report No.: RF131126N045

802.11n(40MHz)

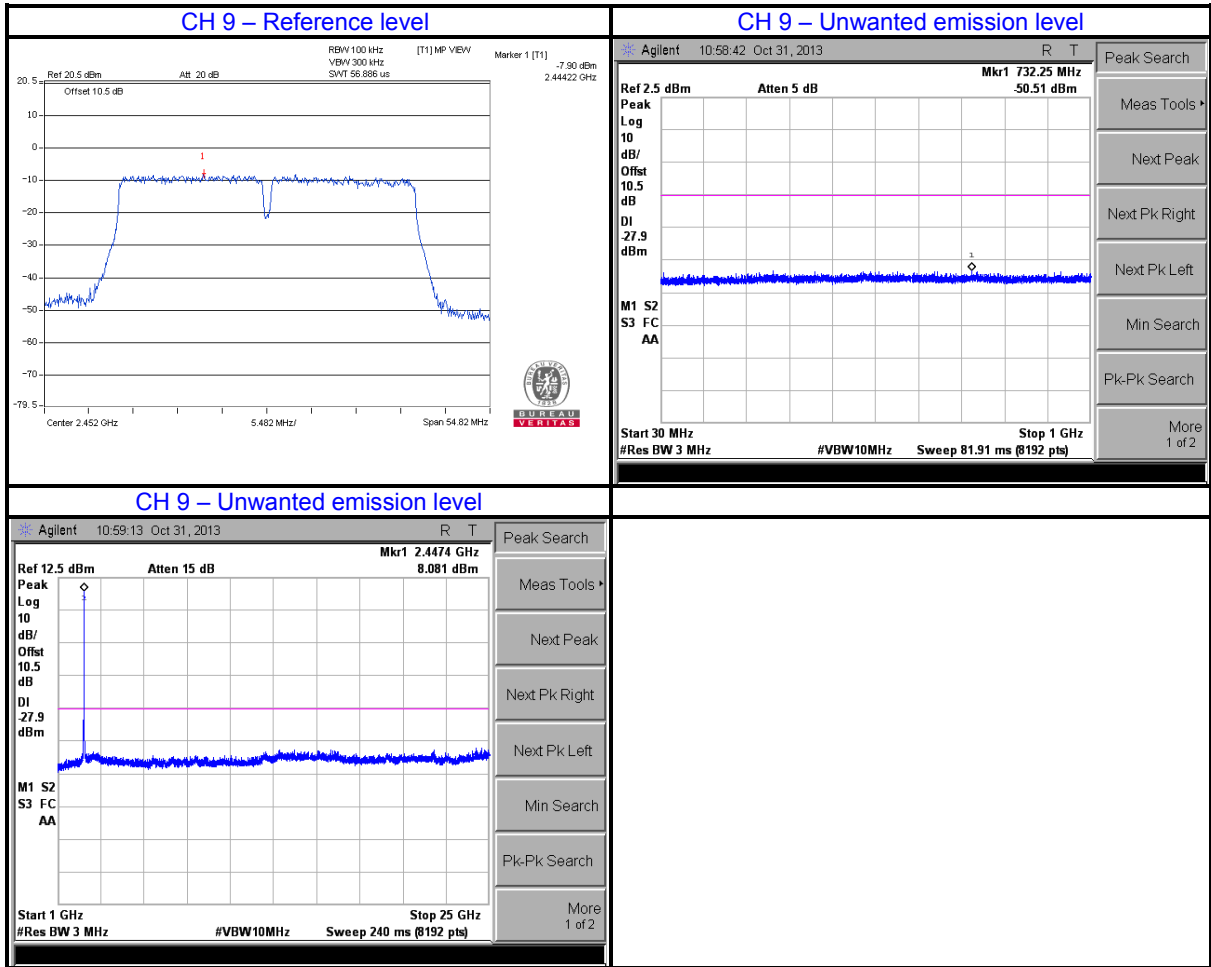




BUREAU VERITAS

Test Report No.: RF131126N045

BT-LE (GFSK)

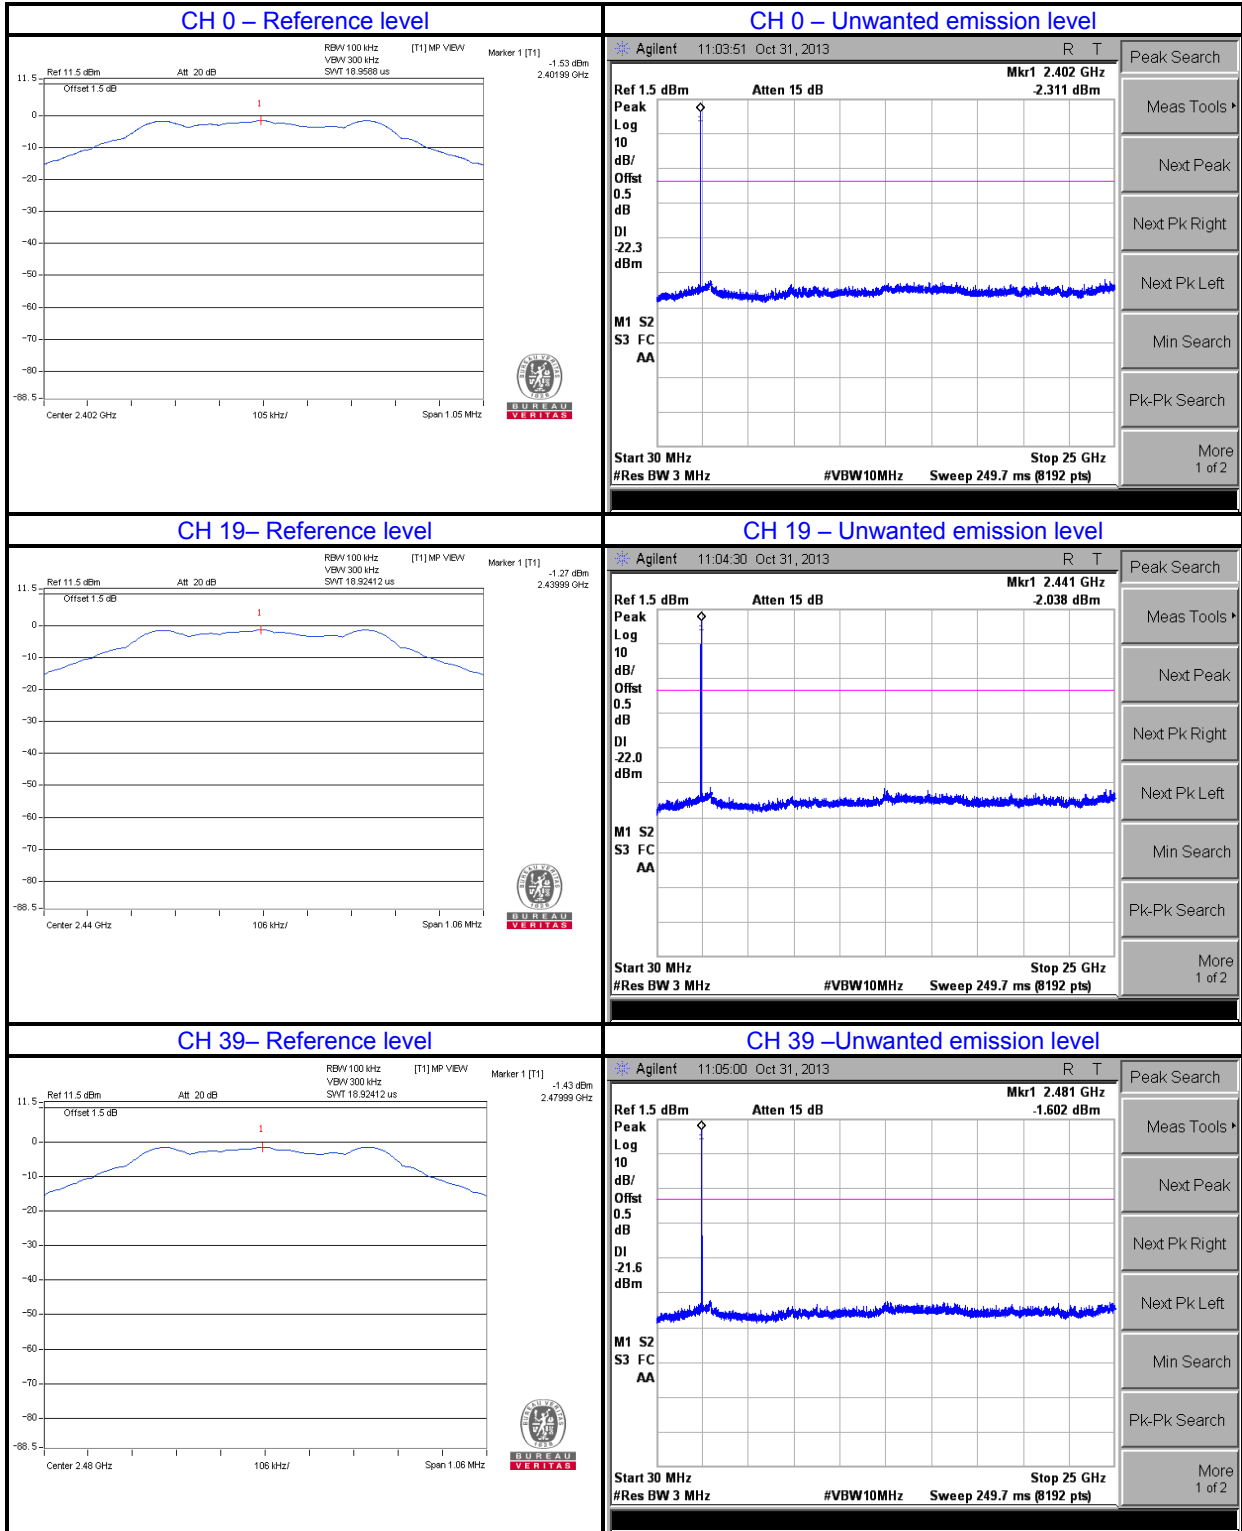



5 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---