



# FCC RF Test Report

**APPLICANT** : Lenovo Mobile Communication Technology Ltd.  
**EQUIPMENT** : Mobile Cellular Phone  
**BRAND NAME** : Lenovo  
**MODEL NAME** : Lenovo K53b36, Lenovo K53b37  
**FCC ID** : YCNK53B3  
**STANDARD** : 47 CFR Part 2, 22(H), 24(E), 27(L), 27(M)  
**CLASSIFICATION** : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Jun. 20, 2016 and completely tested on Aug. 29, 2016. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-D-2010 and the testing has shown the tested sample to be in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Prepared by: James Huang / Manager



Approved by: Jones Tsai / Manager

**SPORTON INTERNATIONAL (KUNSHAN) INC.**  
**No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China**



TABLE OF CONTENTS

REVISION HISTORY ..... 3
SUMMARY OF TEST RESULT ..... 4
1 GENERAL DESCRIPTION ..... 5
1.1 Applicant ..... 5
1.2 Manufacturer ..... 5
1.3 Product Feature of Equipment Under Test ..... 5
1.4 Product Specification of Equipment Under Test ..... 6
1.5 Modification of EUT ..... 6
1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator ..... 7
1.7 Testing Location ..... 8
1.8 Applicable Standards ..... 8
1.9 Specification of Accessory ..... 9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 10
2.1 Test Mode ..... 10
2.2 Connection Diagram of Test System ..... 12
2.3 Support Unit used in test configuration and system ..... 13
2.4 Measurement Results Explanation Example ..... 13
2.5 Frequency List of Low/Middle/High Channels ..... 14
3 CONDUCTED TEST ITEMS ..... 16
3.1 Measuring Instruments ..... 16
3.2 Test Setup ..... 16
3.3 Test Result of Conducted Test ..... 16
3.4 Conducted Output Power ..... 17
3.5 Peak-to-Average Ratio ..... 18
3.6 Occupied Bandwidth ..... 19
3.7 Conducted Band Edge ..... 20
3.8 Conducted Spurious Emission ..... 22
3.9 Frequency Stability ..... 23
4 RADIATED TEST ITEMS ..... 24
4.1 Measuring Instruments ..... 24
4.2 Test Setup ..... 24
4.3 Test Result of Radiated Test ..... 24
4.4 Effective Radiated Power and Effective Isotropic Radiated Power ..... 25
4.5 Radiated Spurious Emission ..... 27
5 LIST OF MEASURING EQUIPMENT ..... 28
6 UNCERTAINTY OF EVALUATION ..... 29
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF RADIATED TEST
APPENDIX C. TEST SETUP PHOTOGRAPHS





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
3.5	§24.232(d)	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Conducted Band Edge Measurement (Band 2) (Band 4) (Band 5)	< 43+10log <sub>10</sub> (P[Watts])	PASS	-
	§27.53(m)(4)	Conducted Band Edge Measurement (Band 7)	§27.53(m)(4)		
3.8	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Conducted Spurious Emission (Band 2) (Band 4) (Band 5)	< 43+10log <sub>10</sub> (P[Watts])	PASS	-
	§2.1051 §27.53(m)(4)	Conducted Spurious Emission (Band 7)	< 55+10log <sub>10</sub> (P[Watts])		
3.9	§2.1055 §22.355	Frequency Stability Temperature & Voltage	< 2.5 ppm for Part 22H	PASS	-
	§2.1055 §24.235 §27.54		Within Authorized Band		
4.4	§22.913(a)(2)	Effective Radiated Power (Band 5)	ERP < 7 Watt	PASS	-
	§24.232(c) §27.50(h)(2)	Equivalent Isotropic Radiated Power (Band 2) (Band 7)	EIRP < 2Watt		
	§27.50(d)(4)	Equivalent Isotropic Radiated Power (Band 4)	EIRP < 1Watt		
4.4	§2.1053 §22.917(a) §24.238(a) §27.53(h)	Radiated Spurious Emission (Band 2) (Band 4) (Band 5)	< 43+10log <sub>10</sub> (P[Watts])	PASS	Under limit 18.13 dB at 7584.000 MHz
	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (Band 7)	< 55+10log <sub>10</sub> (P[Watts])		



# 1 General Description

## 1.1. Applicant

**Lenovo Mobile Communication Technology Ltd.**

No.999, Qishan North 2nd Road, Information & Optoelectronics Park, Torch Hi-tech Industry Development Zone, Xiamen, P. R. China

## 1.2. Manufacturer

**Motorola Mobility LLC**

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.3. Product Feature of Equipment Under Test

Product Feature	
<b>Equipment</b>	Mobile Cellular Phone
<b>Brand Name</b>	Lenovo
<b>Model Name</b>	Lenovo K53b36, Lenovo K53b37
<b>FCC ID</b>	YCNK53B3
<b>EUT supports Radios application</b>	GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/ HSPA+(16QAM uplink is not supported)/LTE/ WLAN 2.4GHz 802.11b/g/n HT20/ Bluetooth v3.0 + EDR/Bluetooth v4.0 LE/Bluetooth v4.2 LE
<b>IMEI Code</b>	Conducted: 861901030021452/861901030021460 Radiation: 861901030023995/861901030024001 ERP/EIRP: N/A
<b>HW Version</b>	82939_1_13
<b>SW Version</b>	K53_S016_160729_ROW
<b>EUT Stage</b>	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two different types of EUT. They are single SIM card mobile (Model Name: Lenovo K53b37) and dual SIM card mobile (Model Name: Lenovo K53b36). The others are the same including circuit design, PCB board, structure and all components. It is special to declare. According to the difference, the dual SIM card mobile is to perform full test for RF test.



### 1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx Frequency</b>	LTE Band 2 : 1850.7 MHz ~ 1909.3 MHz LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 7 : 2502.5 MHz ~ 2567.5 MHz
<b>Rx Frequency</b>	LTE Band 2 : 1930.7 MHz ~ 1989.3 MHz LTE Band 4 : 2110.7 MHz ~ 2154.3 MHz LTE Band 5 : 869.7 MHz ~ 893.3 MHz LTE Band 7 : 2622.5MHz ~ 2687.5 MHz
<b>Bandwidth</b>	LTE Band 2 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz LTE Band 4 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz LTE Band 5 : 1.4MHz / 3MHz / 5MHz / 10MHz LTE Band 7 : 5MHz/ 10MHz / 15MHz / 20MHz
<b>Maximum Output Power to Antenna</b>	LTE Band 2 : 23.33 dBm LTE Band 4 : 23.80 dBm LTE Band 5 : 24.70 dBm LTE Band 7 : 23.77 dBm
<b>Type of Modulation</b>	QPSK / 16QAM

### 1.5. Modification of EUT

No modifications are made to the EUT during all test items.



### 1.6. Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

LTE Band 2		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
1.4	1850.7 ~ 1909.3	1M09G7D	-	0.2710	1M10W7D	-	0.2189
3	1851.5 ~ 1908.5	2M73G7D	-	0.2730	2M73W7D	-	0.1998
5	1852.5 ~ 1907.5	4M49G7D	-	0.2690	4M49W7D	-	0.1900
10	1855.0 ~ 1905.0	9M03G7D	0.0044	0.2637	9M03W7D	-	0.1782
15	1857.5 ~ 1902.5	13M4G7D	-	0.2619	13M4W7D	-	0.1832
20	1860.0 ~ 1900.0	18M3G7D	-	0.2452	18M3W7D	-	0.1602
LTE Band 4		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
1.4	1710.7 ~ 1754.3	1M10G7D	-	0.1716	1M09W7D	-	0.1354
3	1711.5 ~ 1753.5	2M73G7D	-	0.1610	2M72W7D	-	0.1234
5	1712.5 ~ 1752.5	4M49G7D	-	0.1675	4M50W7D	-	0.1251
10	1715.0 ~ 1750.0	9M07G7D	0.0021	0.1639	9M05W7D	-	0.1344
15	1717.5 ~ 1747.5	13M4G7D	-	0.1737	13M4W7D	-	0.1276
20	1720.0 ~ 1745.0	18M3G7D	-	0.1741	18M3W7D	-	0.1302
LTE Band 5		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)
1.4	824.7 ~ 848.3	1M10G7D	-	0.0665	1M10W7D	-	0.0639
3	825.5 ~ 847.5	2M73G7D	-	0.0582	2M73W7D	-	0.0638
5	826.5 ~ 846.5	4M49G7D	-	0.0633	4M51W7D	-	0.0542
10	829.0 ~ 844.0	9M03G7D	0.0042	0.0616	9M01W7D	-	0.0511
LTE Band 7		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
5	2502.5 ~ 2567.5	4M51G7D	-	0.2756	4M51W7D	-	0.1898
10	2505.0 ~ 2565.0	9M09G7D	0.0015	0.2678	8M99W7D	-	0.1889
15	2507.5 ~ 2562.5	13M5G7D	-	0.2547	13M5W7D	-	0.1879
20	2510.0 ~ 2560.0	18M5G7D	-	0.2478	18M4W7D	-	0.1707



### 1.7. Testing Location

<b>Test Site</b>	SPORTON INTERNATIONAL (KUNSHAN) INC.		
<b>Test Site Location</b>	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>		<b>FCC Registration No.</b>
	TH01-KS	03CH02-KS	418269

### 1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H), 24(E), 27(L), 27(M)
- ♦ ANSI / TIA / EIA-603-D-2010
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 1.9. Specification of Accessory

Specification of Accessory			
AC Adapter 1	Brand Name	Lenovo (Acbel)	Model Name C-P35
	Power Rating	I/P: 100-240Vac, 300mA, O/P: 5.2Vdc, 2000mA	
AC Adapter 2	Brand Name	Lenovo (Huntkey)	Model Name C-P35
	Power Rating	I/P: 100-240Vac, 500mA, O/P: 5.2Vdc, 2000mA	
Battery	Brand Name	Lenovo (SCUD)	Model Name BL270
	Power Rating	3.85Vdc, 4000mAh	
Earphone	Brand Name	Lenovo (Cosonic)	Model Name LS-118M
	Signal Line Type	1.1 meter, non-shielded cable, without ferrite core	
USB Cable 1	Brand Name	Lenovo(Starw)	Model Name XJ-007070
	Signal Line Type	1.0 meter, non-shielded cable, without ferrite core	
USB Cable 2	Brand Name	Lenovo(Saibao)	Model Name SWT-A053A
	Signal Line Type	1.0 meter, non-shielded cable, without ferrite core	
LCD Panel	Brand Name	Tianma Micro-electronics	Model Name TL055VDXP64-00
Camera _ Front	Brand Name	Q-Tech	Model Name FX219BQS
Camera _ Rear	Brand Name	Sunny	Model Name A16S05J-200
CTP Module	Brand Name	O-FILM	Model Name Black: MCF-055-2594 White: MCF-055-2594 Golden: MCF-055-2594



## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.


Test Items	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max. Output Power	2	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	4	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	5	v	v	v	v	-	-	v	v	v	v	v	v	v	v
	7	-	-	v	v	v	v	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	2						v	v	v	v		v	v	v	v
	4						v	v	v	v		v	v	v	v
	5				v	-	-	v	v	v		v	v	v	v
	7	-	-				v	v	v	v		v	v	v	v
26dB and 99% Bandwidth	2	v	v	v	v	v	v	v	v			v	v	v	v
	4	v	v	v	v	v	v	v	v			v	v	v	v
	5	v	v	v	v	-	-	v	v			v	v	v	v
	7	-	-	v	v	v	v	v	v			v	v	v	v
Conducted Band Edge	2	v	v	v	v	v	v	v	v	v		v	v		v
	4	v	v	v	v	v	v	v	v	v		v	v		v
	5	v	v	v	v	-	-	v	v	v		v	v		v
	7	-	-	v	v	v	v	v	v	v		v	v		v




Test Items	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Conducted Spurious Emission	2	v	v	v	v	v	v	v	v	v	v		v	v	v
	4	v	v	v	v	v	v	v	v	v	v		v	v	v
	5	v	v	v	v	-	-	v	v	v	v		v	v	v
	7	-	-	v	v	v	v	v	v	v			v	v	v
Frequency Stability	2				v			v				v		v	
	4				v			v				v		v	
	5				v	-	-	v				v		v	
	7	-	-		v			v				v		v	
E.R.P./ E.I.R.P.	2	v	v	v	v	v	v	v	v	v	v		v	v	v
	4	v	v	v	v	v	v	v	v	v	v		v	v	v
	5	v	v	v	v	-	-	v	v	v	v		v	v	v
	7	-	-	v	v	v	v	v	v	v			v	v	v
Radiated Spurious Emission	2	v	v	v	v	v	v	v		v				v	
	4	v	v	v	v	v	v	v		v				v	
	5	v	v	v	v	-	-	v		v				v	
	7	-	-	v	v	v	v	v		v				v	
Note	<p>1. The mark "v " means that this configuration is chosen for testing.</p> <p>2. The mark "- " means that this bandwidth is not supported.</p> <p>3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.</p>														

## 2.2 Connection Diagram of Test System

LTE Band 2 / 4 / 5

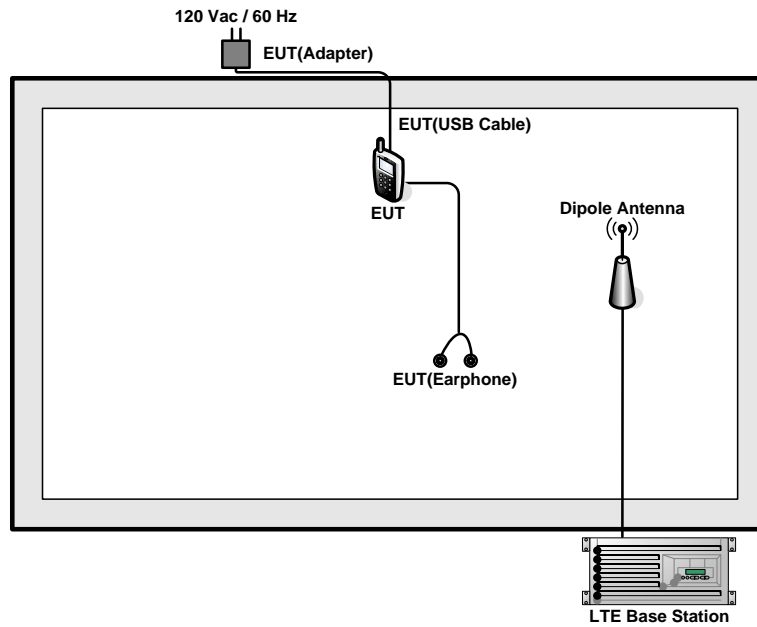

LTE Band 7

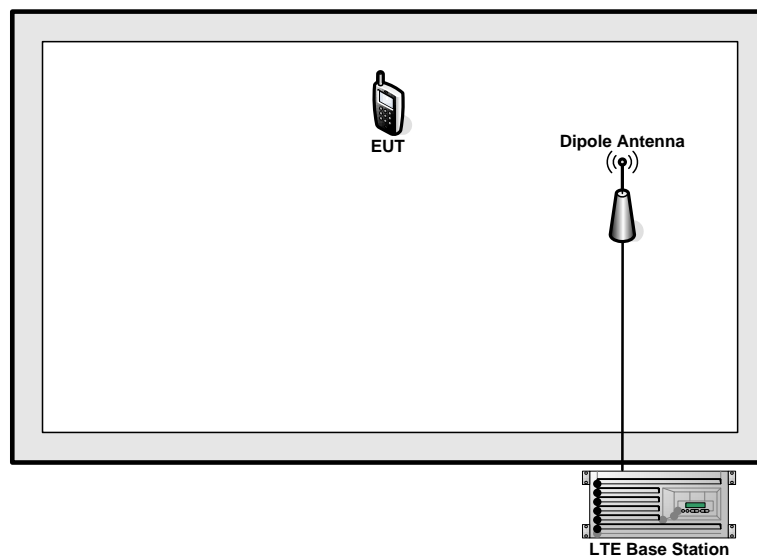



### 2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GW INSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m

### 2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

*Offset = RF cable loss.*

Following shows an offset computation example with cable loss 5.0 dB.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 5.0 \text{ (dB)} \end{aligned}$$



### 2.5 Frequency List of Low/Middle/High Channels

LTE Band 2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	18700	18900	19100
	Frequency	1860	1880	1900
15	Channel	18675	18900	19125
	Frequency	1857.5	1880	1902.5
10	Channel	18650	18900	19150
	Frequency	1855	1880	1905
5	Channel	18625	18900	19175
	Frequency	1852.5	1880	1907.5
3	Channel	18615	18900	19185
	Frequency	1851.5	1880	1908.5
1.4	Channel	18607	18900	19193
	Frequency	1850.7	1880	1909.3

LTE Band 4 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20050	20175	20300
	Frequency	1720	1732.5	1745
15	Channel	20025	20175	20325
	Frequency	1717.5	1732.5	1747.5
10	Channel	20000	20175	20350
	Frequency	1715	1732.5	1750
5	Channel	19975	20175	20375
	Frequency	1712.5	1732.5	1752.5
3	Channel	19965	20175	20385
	Frequency	1711.5	1732.5	1753.5
1.4	Channel	19957	20175	20393
	Frequency	1710.7	1732.5	1754.3



LTE Band 5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	20450	20525	20600
	Frequency	829	836.5	844
5	Channel	20425	20525	20625
	Frequency	826.5	836.5	846.5
3	Channel	20415	20525	20635
	Frequency	825.5	836.5	847.5
1.4	Channel	20407	20525	20643
	Frequency	824.7	836.5	848.3

LTE Band 7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20850	21100	21350
	Frequency	2510	2535	2560
15	Channel	20825	21100	21375
	Frequency	2507.5	2535	2562.5
10	Channel	20800	21100	21400
	Frequency	2505	2535	2565
5	Channel	20775	21100	21425
	Frequency	2502.5	2535	2567.5

### 3 Conducted Test Items

#### 3.1 Measuring Instruments


See list of measuring instruments of this test report.

#### 3.2 Test Setup


##### 3.2.1 Conducted Output Power



##### 3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

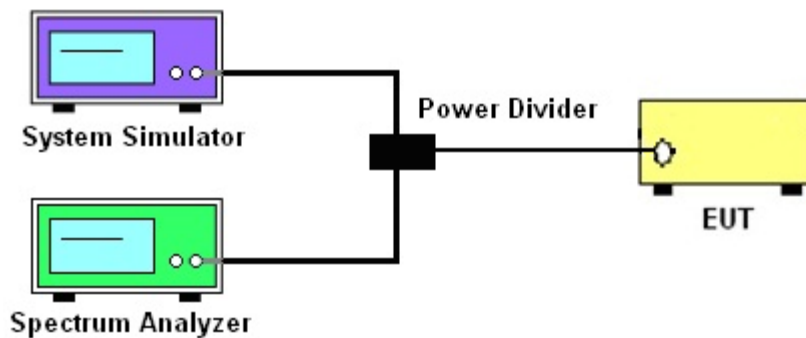

##### 3.2.3 Frequency Stability

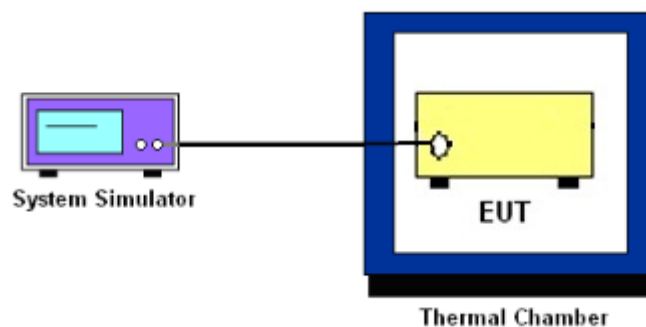

### 3.3 Test Result of Conducted Test

Please refer to Appendix A.





## **3.4 Conducted Output Power**

### **3.4.1 Description of the Conducted Output Power Measurement**

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

### **3.4.2 Test Procedures**

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



## **3.5 Peak-to-Average Ratio**

### **3.5.1 Description of the PAR Measurement**

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### **3.5.2 Test Procedures**

1. The testing follows FCC KDB 971168 v02r02 Section 5.7.1.
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.



## 3.6 Occupied Bandwidth

### 3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

### 3.6.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 4.2.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.  
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



### 3.7 Conducted Band Edge

#### 3.7.1 Description of Conducted Band Edge Measurement

22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is  $43 + 10\log_{10}(P[\text{Watts}])$  dB below the transmitter power  $P(\text{Watts})$  in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

24.238 (a)

For operations in the 1850-1910 and 1930-1990 MHz band, the FCC limit is  $43 + 10\log_{10}(P[\text{Watts}])$  dB below the transmitter power  $P(\text{Watts})$  in a 1MHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53 (h)

For operations in the 1710 – 1755 MHz band, the FCC limit is  $43 + 10\log_{10}(P[\text{Watts}])$  dB below the transmitter power  $P(\text{Watts})$  in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.



### 3.7.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW  $\geq$  1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)  
= P(W)- [43 + 10log(P)] (dB)  
= [30 + 10log(P)] (dBm) - [43 + 10log(P)] (dB) = -13dBm.

9. For LTE Band 7, the other 40 dB, and 55 dB have additionally applied same calculation above.



### 3.8 Conducted Spurious Emission

#### 3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

For Band 7:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $55 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.

#### 3.8.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)  
=  $P(W) - [43 + 10\log(P)]$  (dB)  
=  $[30 + 10\log(P)]$  (dBm) -  $[43 + 10\log(P)]$  (dB)  
= -13dBm.
11. For Band 7  
The limit line is derived from  $55 + 10\log(P)$ dB below the transmitter power P(Watts)  
=  $P(W) - [55 + 10\log(P)]$  (dB)  
=  $[30 + 10\log(P)]$  (dBm) -  $[55 + 10\log(P)]$  (dB)  
= -25dBm.



### **3.9 Frequency Stability**

#### **3.9.1 Description of Frequency Stability Measurement**

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

#### **3.9.2 Test Procedures for Temperature Variation**

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  step up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

#### **3.9.3 Test Procedures for Voltage Variation**

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was placed in a temperature chamber at  $20\pm 5^{\circ}\text{C}$  and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.


## 4 Radiated Test Items

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

### 4.2 Test Setup

#### 4.2.1 For radiated test from 30MHz to 1GHz

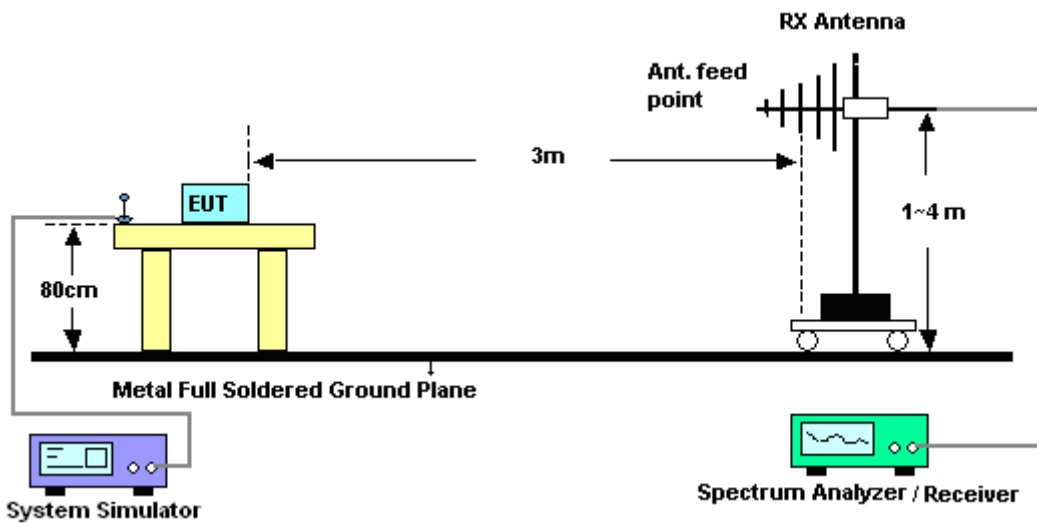

#### 4.2.2 For radiated test above 1GHz

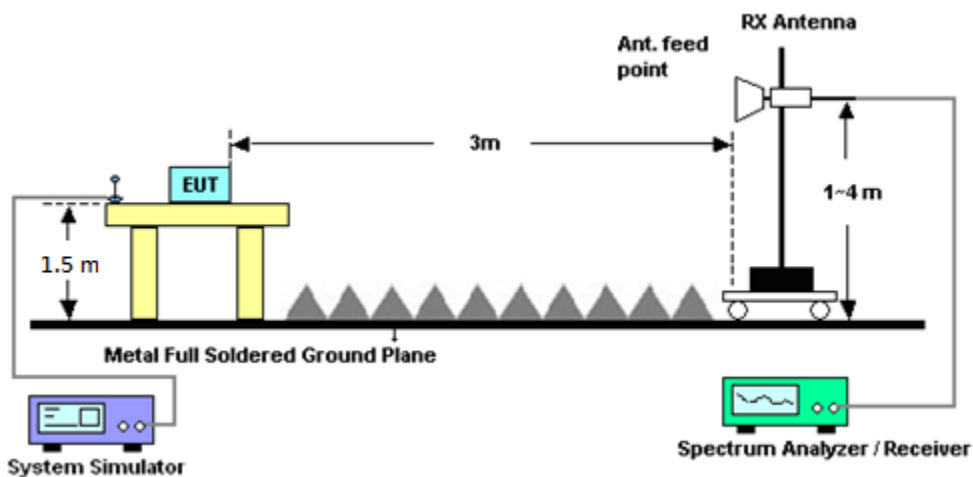

### 4.3 Test Result of Radiated Test

Please refer to Appendix B.





## 4.4 Effective Radiated Power and Effective Isotropic Radiated Power

### 4.4.1 Description of the ERP/EIRP Measurement

Effective radiated power output measurements by substitution method according to ANSI / TIA / EIA-603-D-2010, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r02. Mobile and portable (hand-held) stations operating are limited to average ERP of 7 watts with LTE band 5.

Equivalent isotropic radiated power output measurements by substitution method according to ANSI / TIA / EIA-603-D-2010, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r02. Mobile and portable (hand-held) stations operating are limited to average EIRP of 2 watts with LTE band 2 / 7 and 1 watt with LTE band 4.

### 4.4.2 Test Procedures

1. The EUT was placed on a non-conductive rotating platform (0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz) in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RMS detector per section 5. of KDB 971168 D01.
2. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power. The maximum emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
3. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-D. The EUT was replaced by the substitution antenna at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor,  $EIRP = LVL + \text{Correction factor}$  and  $ERP = EIRP - 2.15$ . Take the record of the output power at substitution antenna.



	LTE Average					
LTE BW	1.4M	3M	5M	10M	15M	20M
Span	3MHz	6MHz	10MHz	20MHz	30MHz	40MHz
RBW	30kHz	100kHz	100kHz	300kHz	300kHz	300kHz
VBW	100kHz	300kHz	300kHz	1MHz	1MHz	1MHz
Detector	RMS	RMS	RMS	RMS	RMS	RMS
Trace	Average	Average	Average	Average	Average	Average
Average Type	Power	Power	Power	Power	Power	Power
Sweep Count	100	100	100	100	100	100



## 4.5 Radiated Spurious Emission

### 4.5.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-D-2010. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

For Band 7

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $55 + 10 \log (P)$  dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 4.5.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.8 and ANSI / TIA-603-D-2010 Section 2.2.12.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)]$  (dB)  
 $= [30 + 10\log(P)]$  (dBm) -  $[43 + 10\log(P)]$  (dB)  
 $= -13$ dBm.

12. For Band 7:

The limit line is derived from  $55 + 10\log(P)$ dB below the transmitter power P(Watts)  
EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain  
ERP (dBm) = EIRP - 2.15



## 5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 09, 2016	Aug. 12, 2016~ Aug. 25, 2016	Aug. 08, 2017	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	-40~+150°C	Oct. 24, 2015	Aug. 12, 2016~ Aug. 25, 2016	Oct. 23, 2016	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150208	10Hz~44GHz; Max 30dB	Apr. 22, 2016	Aug. 14, 2016~ Aug. 29, 2016	Apr. 21, 2017	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6112D	37879	30MHz~2GHz	Sep. 12, 2015	Aug. 14, 2016~ Aug. 29, 2016	Sep. 11, 2016	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Nov. 07, 2015	Aug. 14, 2016~ Aug. 29, 2016	Nov. 06, 2016	Radiation (03CH02-KS)
SHF-EHF Horn	com-power	AH-840	101070	18GHz~40GHz	Oct. 10, 2015	Aug. 14, 2016~ Aug. 29, 2016	Oct. 09, 2016	Radiation (03CH02-KS)
Amplifier	com-power	PA-103A	161069	1kHz~1000MHz / 32 dB	Apr. 22, 2016	Aug. 14, 2016~ Aug. 29, 2016	Apr. 21, 2017	Radiation (03CH02-KS)
Amplifier	Agilent	8449B	3008A02384	1~26.5GHz Gain 30dB	Oct. 24, 2015	Aug. 14, 2016~ Aug. 29, 2016	Oct. 23, 2016	Radiation (03CH02-KS)
Amplifier	MITEQ	TTA1840-35 -HG	1887435	18GHz~40GHz	Jan. 20, 2016	Aug. 14, 2016~ Aug. 29, 2016	Jan. 19, 2017	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	61601000247 3	N/A	NCR	Aug. 14, 2016~ Aug. 29, 2016	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Aug. 14, 2016~ Aug. 29, 2016	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Aug. 14, 2016~ Aug. 29, 2016	NCR	Radiation (03CH02-KS)

NCR: No Calibration Required



## 6 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.1dB
---	-------

### Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.5dB
---	-------

### Uncertainty of Radiated Emission Measurement (18GHz ~ 40GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.1dB
---	-------



## Appendix A. Test Results of Conducted Test

### Conducted Output Power(Average power)

LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	22.83	22.77	22.90
20	1	49		22.93	23.05	22.92
20	1	99		22.48	22.97	22.77
20	50	0		21.96	21.87	22.01
20	50	24		22.00	22.11	22.10
20	50	50		21.87	21.98	22.00
20	100	0		21.95	22.06	22.02
20	1	0	16-QAM	21.95	22.12	21.83
20	1	49		22.22	21.87	21.85
20	1	99		21.57	22.23	21.78
20	50	0		20.92	20.94	20.99
20	50	24		20.98	21.07	21.09
20	50	50		20.86	21.05	21.04
20	100	0		20.83	20.98	21.03
15	1	0	QPSK	22.99	22.82	23.00
15	1	37		22.99	22.91	23.05
15	1	74		22.84	23.00	22.86
15	36	0		22.04	22.02	22.10
15	36	20		22.06	22.10	22.13
15	36	39		21.87	22.12	22.14
15	75	0		21.89	22.00	22.04
15	1	0	16-QAM	21.94	21.66	21.81
15	1	37		21.55	21.71	22.17
15	1	74		21.64	21.76	22.22
15	36	0		20.90	20.97	20.95
15	36	20		20.95	21.07	21.10
15	36	39		20.85	21.08	21.09
15	75	0		20.97	20.93	20.94



LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	22.92	22.78	22.82
10	1	25		22.89	22.94	22.98
10	1	49		22.80	22.81	22.80
10	25	0		22.10	22.03	22.13
10	25	12		22.04	22.17	22.18
10	25	25		22.02	22.00	22.14
10	50	0		21.95	22.06	22.05
10	1	0	16-QAM	21.95	22.08	21.81
10	1	25		21.99	22.25	21.91
10	1	49		21.82	21.90	21.84
10	25	0		20.96	21.06	21.10
10	25	12		21.02	21.04	21.14
10	25	25		20.99	20.97	21.08
10	50	0		20.92	20.93	21.13
5	1	0	QPSK	22.96	22.79	23.05
5	1	12		23.06	22.78	23.16
5	1	24		22.76	23.21	22.89
5	12	0		21.93	21.98	22.05
5	12	7		22.05	22.12	22.10
5	12	13		22.11	22.01	22.07
5	25	0		22.02	21.99	22.20
5	1	0	16-QAM	21.81	21.61	21.86
5	1	12		21.59	21.50	21.82
5	1	24		22.15	21.65	21.77
5	12	0		20.90	20.85	21.03
5	12	7		20.85	21.04	21.18
5	12	13		20.91	21.03	21.05
5	25	0		20.90	20.97	21.28



LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	23.07	22.85	23.10
3	1	8		23.07	23.01	23.04
3	1	14		23.12	22.85	23.16
3	8	0		22.21	22.07	22.25
3	8	4		22.25	22.19	22.20
3	8	7		22.21	22.15	22.18
3	15	0		22.21	22.16	22.26
3	1	0	16-QAM	21.91	21.78	22.01
3	1	8		21.94	21.84	21.89
3	1	14		21.90	21.79	21.98
3	8	0		21.13	20.81	21.15
3	8	4		21.00	20.83	21.10
3	8	7		21.14	21.08	21.20
3	15	0		21.12	21.24	21.06
1.4	1	0	QPSK	23.06	23.08	23.10
1.4	1	3		23.18	23.23	23.16
1.4	1	5		22.89	23.06	23.00
1.4	3	0		23.20	23.12	23.21
1.4	3	1		23.24	23.16	23.18
1.4	3	3		23.24	23.16	23.33
1.4	6	0		22.21	22.11	22.24
1.4	1	0	16-QAM	21.86	21.96	22.10
1.4	1	3		21.90	21.89	22.02
1.4	1	5		21.87	21.83	21.96
1.4	3	0		22.15	22.01	22.09
1.4	3	1		22.19	22.15	22.18
1.4	3	3		22.19	22.15	22.15
1.4	6	0		21.13	21.07	21.23





LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	23.35	23.47	23.47
20	1	49		23.39	23.63	23.80
20	1	99		23.28	23.37	23.32
20	50	0		22.62	22.61	22.71
20	50	24		22.57	22.57	22.58
20	50	50		22.48	22.52	22.57
20	100	0		22.57	22.59	22.65
20	1	0	16-QAM	22.53	22.39	22.55
20	1	49		22.42	22.39	22.30
20	1	99		22.36	22.24	22.34
20	50	0		21.48	21.53	21.64
20	50	24		21.55	21.67	21.52
20	50	50		21.58	21.58	21.52
20	100	0		21.50	21.53	21.59
15	1	0	QPSK	23.45	23.76	23.42
15	1	37		23.43	23.72	23.41
15	1	74		23.44	23.42	23.35
15	36	0		22.60	22.56	22.59
15	36	20		22.49	22.55	22.48
15	36	39		22.44	22.54	22.58
15	75	0		22.50	22.54	22.57
15	1	0	16-QAM	22.55	22.42	22.40
15	1	37		22.33	22.41	22.41
15	1	74		22.24	22.23	22.33
15	36	0		21.52	21.56	21.51
15	36	20		21.52	21.51	21.51
15	36	39		21.48	21.60	21.50
15	75	0		21.54	21.60	21.54



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	23.35	23.29	23.27
10	1	25		23.34	23.46	23.20
10	1	49		23.10	23.46	23.32
10	25	0		22.57	22.61	22.57
10	25	12		22.62	22.61	22.54
10	25	25		22.49	22.61	22.48
10	50	0		22.49	22.54	22.57
10	1	0	16-QAM	22.73	22.41	22.44
10	1	25		22.43	22.36	22.41
10	1	49		22.21	22.00	22.31
10	25	0		21.50	21.57	21.60
10	25	12		21.56	21.58	21.58
10	25	25		21.65	21.59	21.45
10	50	0		21.61	21.51	21.50
5	1	0	QPSK	23.46	23.44	23.37
5	1	12		23.33	23.54	23.32
5	1	24		23.12	23.27	23.40
5	12	0		22.55	22.54	22.53
5	12	7		22.42	22.58	22.50
5	12	13		22.48	22.56	22.65
5	25	0		22.47	22.59	22.61
5	1	0	16-QAM	22.37	22.32	22.40
5	1	12		22.21	22.16	22.20
5	1	24		22.29	22.32	22.43
5	12	0		21.42	21.61	21.31
5	12	7		21.47	21.61	21.38
5	12	13		21.53	21.45	21.40
5	25	0		21.51	21.50	21.57



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	23.51	23.43	23.29
3	1	8		23.42	23.58	23.26
3	1	14		23.44	23.57	23.25
3	8	0		22.52	22.58	22.45
3	8	4		22.64	22.64	22.55
3	8	7		22.56	22.55	22.49
3	15	0		22.50	22.61	22.52
3	1	0	16-QAM	22.47	22.95	22.20
3	1	8		22.24	22.87	22.30
3	1	14		22.35	22.28	22.38
3	8	0		21.60	21.59	21.21
3	8	4		21.53	21.56	21.26
3	8	7		21.64	21.65	21.16
3	15	0		21.46	21.60	21.48
1.4	1	0	QPSK	23.30	23.54	23.53
1.4	1	3		23.55	23.57	23.66
1.4	1	5		23.40	23.46	23.57
1.4	3	0		23.42	23.62	23.56
1.4	3	1		23.51	23.60	23.69
1.4	3	3		23.51	23.59	23.58
1.4	6	0		22.45	22.58	22.57
1.4	1	0	16-QAM	22.49	22.42	22.18
1.4	1	3		22.44	22.35	22.42
1.4	1	5		22.53	22.40	22.32
1.4	3	0		22.43	22.59	22.36
1.4	3	1		22.53	22.62	22.58
1.4	3	3		22.45	22.68	22.66
1.4	6	0		21.32	21.54	21.49



LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	24.12	24.40	24.25
10	1	25		24.57	24.56	24.43
10	1	49		24.37	24.25	24.32
10	25	0		23.59	23.46	23.49
10	25	12		23.51	23.43	23.41
10	25	25		23.49	23.42	23.44
10	50	0		23.44	23.43	23.41
10	1	0	16-QAM	23.25	23.07	23.06
10	1	25		23.29	23.23	23.17
10	1	49		22.96	23.19	23.03
10	25	0		22.47	22.54	22.48
10	25	12		22.59	22.53	22.42
10	25	25		22.62	22.47	22.48
10	50	0		22.60	22.33	22.46
5	1	0	QPSK	24.09	24.39	24.46
5	1	12		24.50	24.52	24.57
5	1	24		24.23	24.10	24.03
5	12	0		23.32	23.41	23.48
5	12	7		23.40	23.43	23.47
5	12	13		23.43	23.41	23.30
5	25	0		23.45	23.35	23.37
5	1	0	16-QAM	23.14	23.12	23.28
5	1	12		23.48	23.18	23.02
5	1	24		23.16	23.15	22.99
5	12	0		22.25	22.49	22.34
5	12	7		22.28	22.42	22.37
5	12	13		22.30	22.21	22.21
5	25	0		22.38	22.34	22.35



LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	24.37	24.37	24.68
3	1	8		24.42	24.40	24.32
3	1	14		24.43	24.59	24.34
3	8	0		23.38	23.41	23.50
3	8	4		23.51	23.44	23.44
3	8	7		23.62	23.43	23.50
3	15	0		23.59	23.46	23.40
3	1	0	16-QAM	23.03	23.21	23.56
3	1	8		23.06	23.21	22.86
3	1	14		23.27	23.36	23.68
3	8	0		22.58	22.52	22.41
3	8	4		22.76	22.46	22.35
3	8	7		22.65	22.46	22.42
3	15	0		22.55	22.38	22.51
1.4	1	0	QPSK	24.41	24.38	24.38
1.4	1	3		24.70	24.50	24.41
1.4	1	5		24.50	24.32	24.33
1.4	3	0		24.57	24.49	24.41
1.4	3	1		24.64	24.65	24.43
1.4	3	3		24.54	24.50	24.38
1.4	6	0		23.49	23.48	23.45
1.4	1	0	16-QAM	23.63	23.67	23.53
1.4	1	3		23.75	23.75	23.20
1.4	1	5		23.27	23.58	23.19
1.4	3	0		23.39	23.60	23.53
1.4	3	1		23.45	23.71	23.45
1.4	3	3		23.65	23.78	23.59
1.4	6	0		22.33	22.46	22.38



LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	23.33	23.49	23.49
20	1	49		23.49	23.73	23.67
20	1	99		23.15	23.33	23.51
20	50	0		22.58	22.81	22.80
20	50	24		22.51	22.69	22.62
20	50	50		22.43	22.71	22.73
20	100	0		22.49	22.76	22.73
20	1	0	16-QAM	22.37	22.48	22.51
20	1	49		22.34	22.52	22.50
20	1	99		22.21	22.35	22.36
20	50	0		21.51	21.72	21.73
20	50	24		21.39	21.78	21.62
20	50	50		21.36	21.68	21.74
20	100	0		21.53	21.60	21.72
15	1	0	QPSK	23.37	23.55	23.73
15	1	37		23.35	23.77	23.77
15	1	74		23.17	23.71	23.69
15	36	0		22.52	22.75	22.87
15	36	20		22.60	22.78	22.82
15	36	39		22.47	22.84	22.73
15	75	0		22.49	22.79	22.84
15	1	0	16-QAM	22.51	22.40	22.75
15	1	37		22.30	22.67	22.58
15	1	74		22.24	22.53	22.43
15	36	0		21.49	21.69	21.70
15	36	20		21.51	21.81	21.69
15	36	39		21.36	21.73	21.70
15	75	0		21.48	21.61	21.64



LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	23.35	23.45	23.51
10	1	25		23.53	23.68	23.70
10	1	49		23.19	23.69	23.50
10	25	0		22.44	22.85	22.79
10	25	12		22.59	22.82	22.68
10	25	25		22.54	22.82	22.69
10	50	0		22.58	22.79	22.78
10	1	0	16-QAM	22.33	22.65	22.90
10	1	25		22.33	22.56	22.80
10	1	49		22.34	22.61	22.53
10	25	0		21.41	21.80	21.75
10	25	12		21.51	21.92	21.89
10	25	25		21.55	21.70	21.71
10	50	0		21.58	21.72	21.81
5	1	0	QPSK	23.37	23.49	23.21
5	1	12		23.46	23.65	23.51
5	1	24		23.47	23.60	23.62
5	12	0		22.44	22.78	22.57
5	12	7		22.54	22.77	22.56
5	12	13		22.51	22.71	22.53
5	25	0		22.44	22.83	22.66
5	1	0	16-QAM	22.31	22.47	22.38
5	1	12		22.13	22.44	22.27
5	1	24		22.35	22.34	22.32
5	12	0		21.27	21.54	21.68
5	12	7		21.32	21.63	21.66
5	12	13		21.60	21.64	21.73
5	25	0		21.61	21.89	21.59



**Peak-to-Average Ratio**

Mode	LTE Band 2 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	3.91	4.58	4.75	5.68	PASS
Middle CH	4.00	4.72	5.13	5.83	
Highest CH	4.00	4.41	4.81	5.39	

Mode	LTE Band 4 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	4.55	4.75	5.1	5.97	PASS
Middle CH	4.26	4.75	5.25	5.86	
Highest CH	4.17	4.75	5.42	5.83	

Mode	LTE Band 5 / 10MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	3.3	4.87	4.49	5.91	PASS
Middle CH	4.38	4.46	5.77	5.51	
Highest CH	3.22	4.9	4.52	5.94	


Mode	LTE Band 7 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	4.17	4.49	5.16	5.57	PASS
Middle CH	4.14	4.58	4.99	5.71	
Highest CH	4.03	4.67	4.84	5.65	





LTE Band 2 / 20MHz / QPSK

Lowest Channel / 1RB

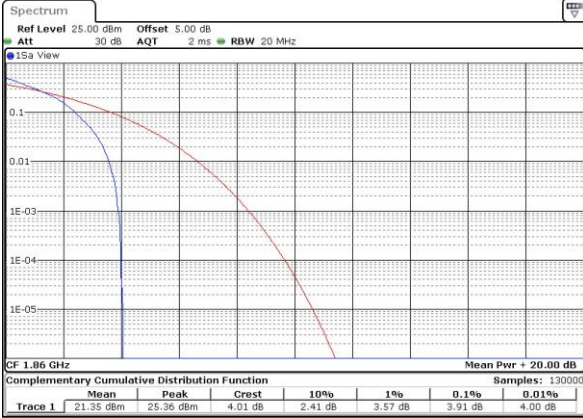

Date: 12 AUG 2016 13:36:53

Lowest Channel / Full RB




Date: 12 AUG 2016 13:37:03

Middle Channel / 1RB




Date: 12 AUG 2016 13:37:26

Middle Channel / Full RB

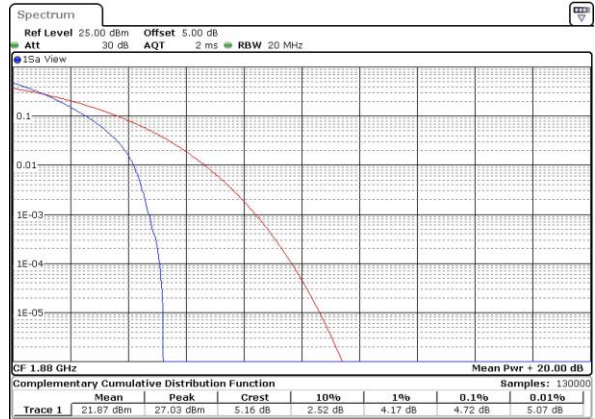


Date: 12 AUG 2016 13:37:37

Highest Channel / 1RB

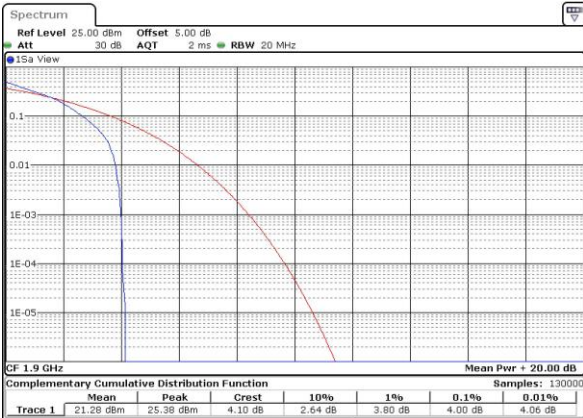

Date: 12 AUG 2016 13:37:47

Highest Channel / Full RB

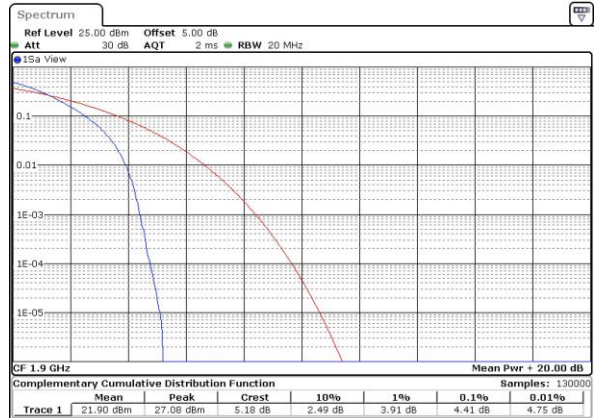

Date: 12 AUG 2016 13:38:01



LTE Band 2 / 20MHz / 16QAM

Lowest Channel / 1RB



Date: 12 AUG 2016 13:35:50

Lowest Channel / Full RB




Date: 12 AUG 2016 13:36:00

Middle Channel / 1RB




Date: 12 AUG 2016 13:36:10

Middle Channel / Full RB

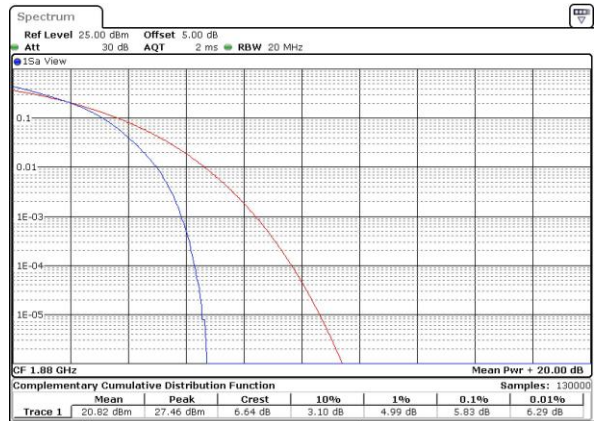

Date: 12 AUG 2016 13:36:20

Highest Channel / 1RB

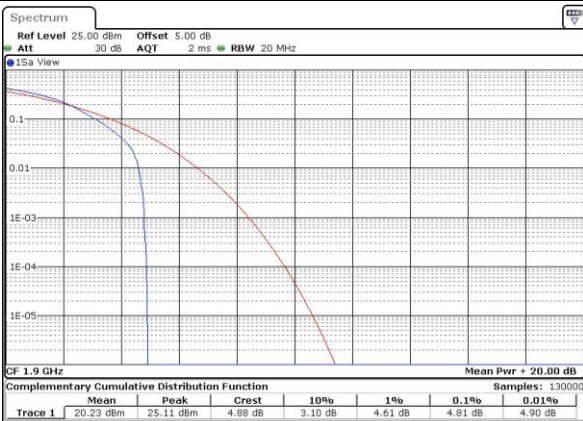

Date: 12 AUG 2016 13:36:30

Highest Channel / Full RB




Date: 12 AUG 2016 13:36:42



LTE Band 4 / 20MHz / QPSK

Lowest Channel / 1RB

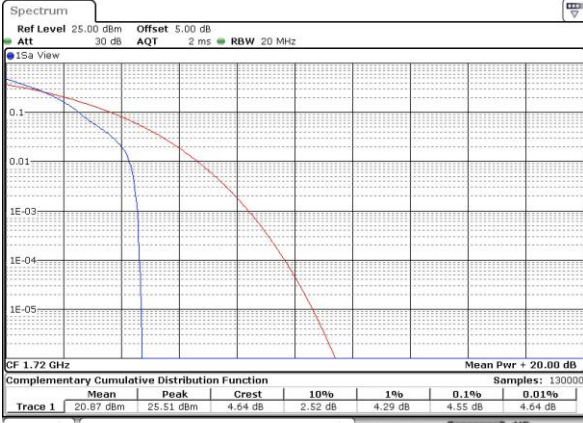

Date: 12 AUG 2016 15:42:44

Lowest Channel / Full RB




Date: 12 AUG 2016 15:43:11

Middle Channel / 1RB



Date: 12 AUG 2016 15:49:49

Middle Channel / Full RB

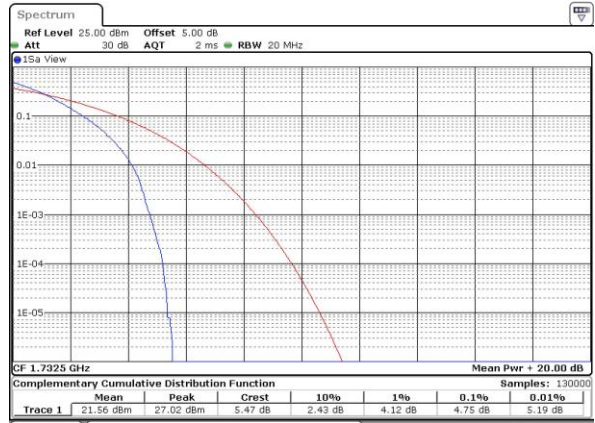


Date: 12 AUG 2016 15:49:16

Highest Channel / 1RB



Date: 12 AUG 2016 15:50:04

Highest Channel / Full RB

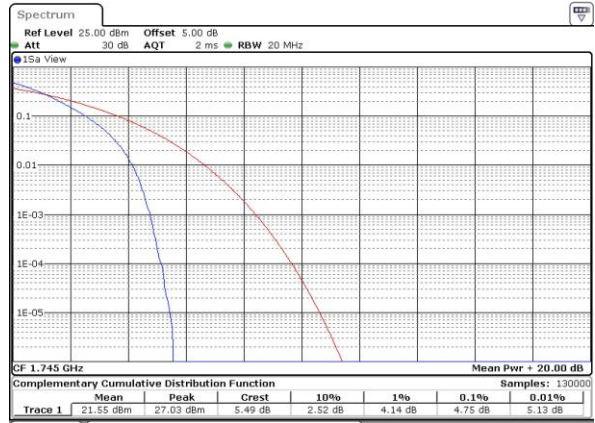

Date: 12 AUG 2016 15:50:21




LTE Band 4 / 20MHz / 16QAM

Lowest Channel / 1RB



Date: 12 AUG 2016 15:30:02

Lowest Channel / Full RB

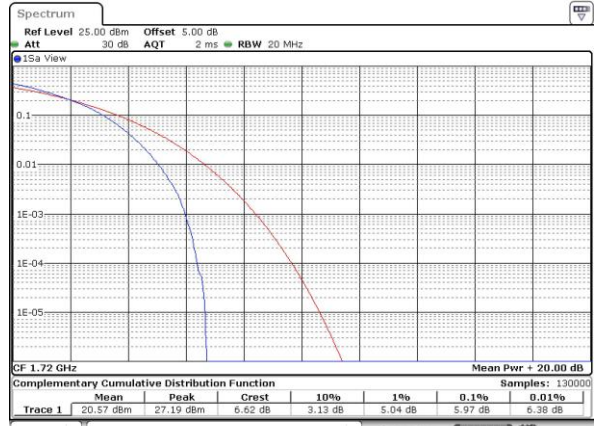


Date: 12 AUG 2016 15:30:12

Middle Channel / 1RB




Date: 12 AUG 2016 15:30:22

Middle Channel / Full RB

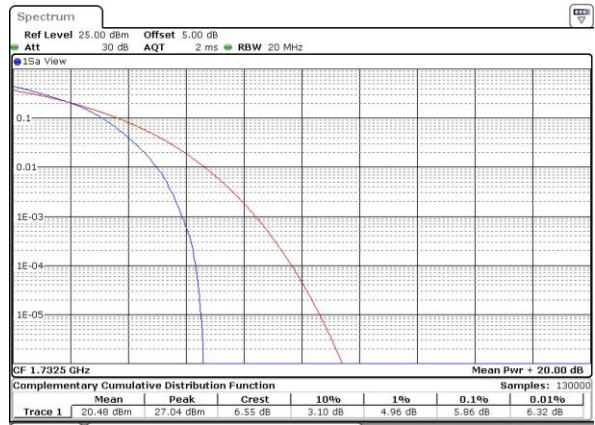

Date: 12 AUG 2016 15:49:29

Highest Channel / 1RB

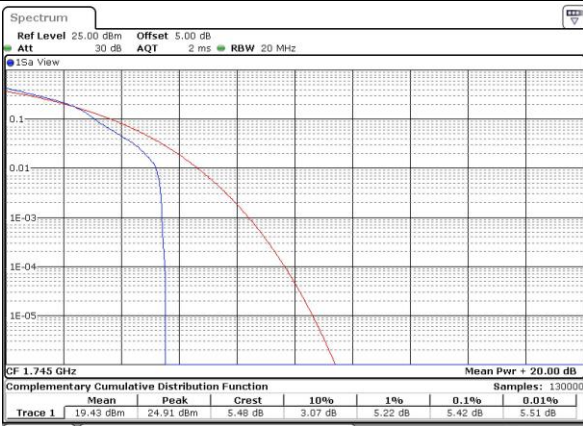

Date: 12 AUG 2016 15:30:43

Highest Channel / Full RB




Date: 12 AUG 2016 15:30:53



LTE Band 5 / 10MHz / QPSK

Lowest Channel / 1RB

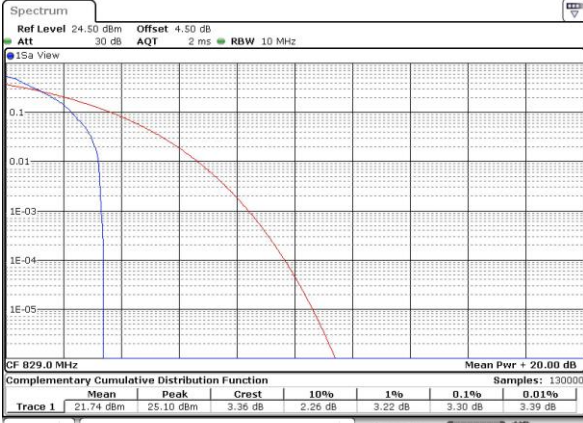

Date: 12 AUG 2016 18:24:25

Lowest Channel / Full RB



Date: 12 AUG 2016 18:24:35

Middle Channel / 1RB



Date: 12 AUG 2016 18:24:45

Middle Channel / Full RB



Date: 12 AUG 2016 18:24:55

Highest Channel / 1RB



Date: 12 AUG 2016 18:25:05

Highest Channel / Full RB



Date: 12 AUG 2016 18:25:14




LTE Band 5 / 10MHz / 16QAM

Lowest Channel / 1RB



Date: 12 AUG 2016 18:23:22

Lowest Channel / Full RB

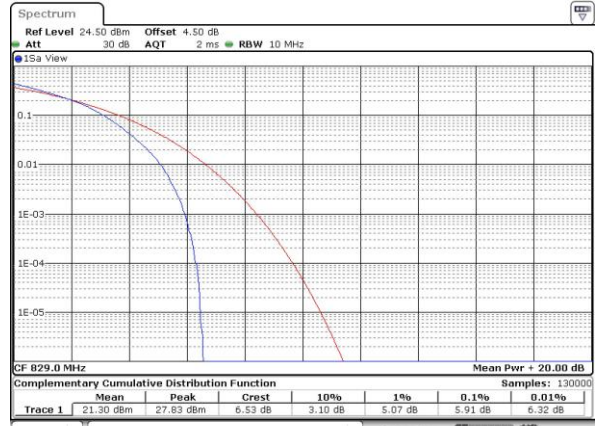

Date: 12 AUG 2016 18:23:34

Middle Channel / 1RB



Date: 12 AUG 2016 18:23:44

Middle Channel / Full RB




Date: 12 AUG 2016 18:23:54

Highest Channel / 1RB



Date: 12 AUG 2016 18:24:05

Highest Channel / Full RB

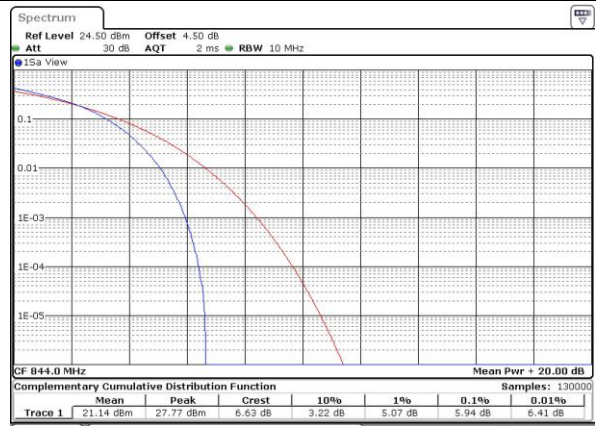

Date: 12 AUG 2016 18:24:15




LTE Band 7 / 20MHz / QPSK

Lowest Channel / 1RB



Date: 25 AUG 2016 12:31:22

Lowest Channel / Full RB

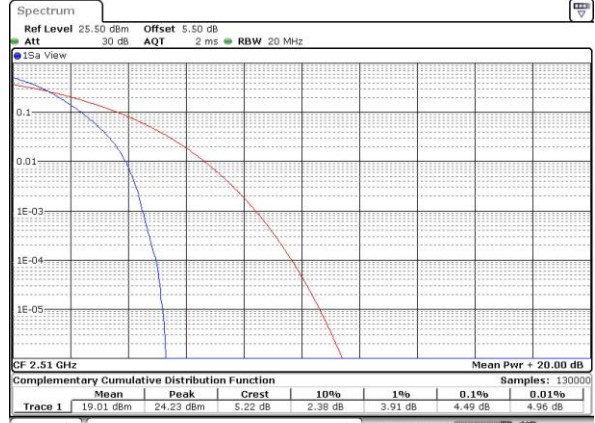


Date: 25 AUG 2016 12:31:33

Middle Channel / 1RB




Date: 25 AUG 2016 12:32:23

Middle Channel / Full RB

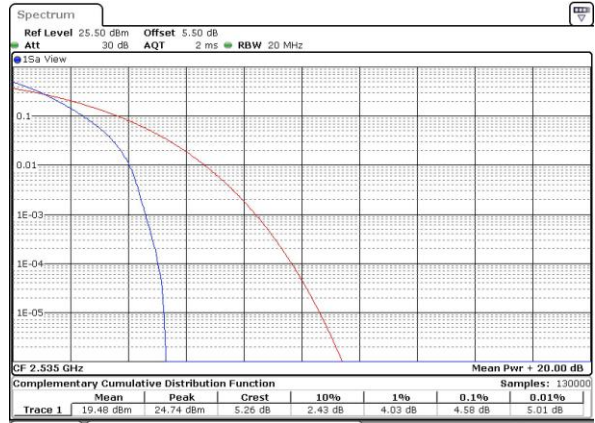

Date: 25 AUG 2016 12:32:09

Highest Channel / 1RB

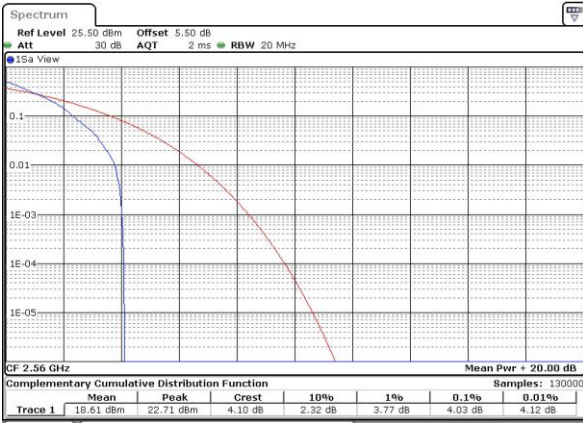

Date: 25 AUG 2016 12:33:03

Highest Channel / Full RB



Date: 25 AUG 2016 12:33:13




LTE Band 7 / 20MHz / 16QAM

Lowest Channel / 1RB



Date: 25 AUG 2016 12:31:11

Lowest Channel / Full RB

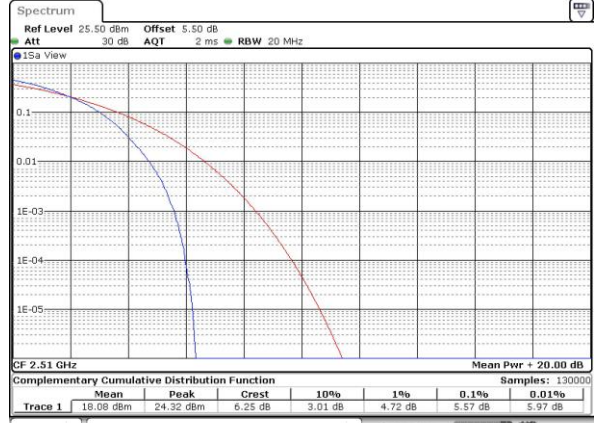


Date: 25 AUG 2016 12:31:45

Middle Channel / 1RB



Date: 25 AUG 2016 12:32:33

Middle Channel / Full RB

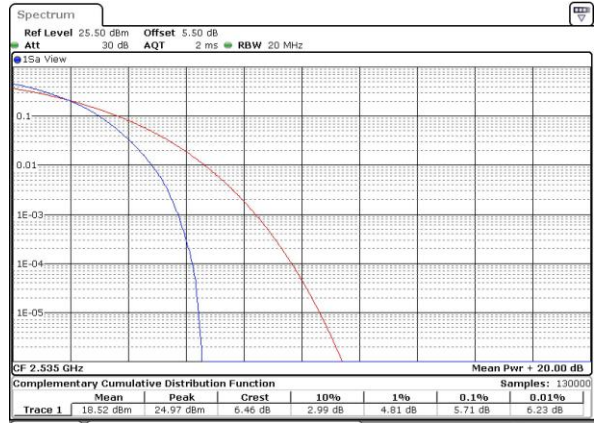


Date: 25 AUG 2016 12:31:58

Highest Channel / 1RB



Date: 25 AUG 2016 12:32:44

Highest Channel / Full RB

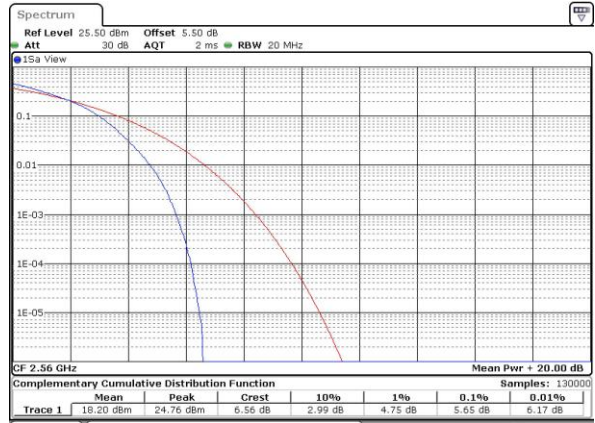

Date: 25 AUG 2016 12:33:28





**26dB Bandwidth**

Mode	LTE Band 2 : 26dB BW(MHz)											
	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
BW												
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.292	1.259	3.009	2.997	4.955	4.885	9.71	9.83	14.326	14.685	20.14	20.02
Middle CH	1.231	1.278	3.039	3.003	4.915	4.975	9.85	9.67	14.416	14.296	20.06	20.14
Highest CH	1.278	1.281	2.985	2.997	5.075	4.905	9.89	9.81	14.446	14.655	20.14	20.34

Mode	LTE Band 4 : 26dB BW(MHz)											
	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
BW												
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.276	1.281	3.033	3.051	4.995	4.895	9.67	9.69	14.476	14.266	20.22	20.02
Middle CH	1.284	1.292	2.967	3.003	4.895	4.955	9.77	9.89	14.386	14.386	20.18	20.02
Highest CH	1.278	1.248	3.021	3.009	4.945	4.915	9.67	9.67	14.356	14.236	20.14	20.1


Mode	LTE Band 5 : 26dB BW(MHz)											
	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
BW												
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.284	1.292	2.967	3.003	4.945	4.905	9.73	9.71	-	-	-	-
Middle CH	1.292	1.287	3.015	2.997	4.955	4.905	9.63	9.83	-	-	-	-
Highest CH	1.287	1.259	3.039	3.003	4.975	4.875	9.89	9.93	-	-	-	-

Mode	LTE Band 7 : 26dB BW(MHz)											
	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
BW												
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.885	4.895	9.87	9.69	14.146	14.386	19.86	20.14
Middle CH	-	-	-	-	5.015	4.855	9.85	9.79	14.206	14.446	20.1	20.1
Highest CH	-	-	-	-	4.925	4.885	9.85	9.77	14.625	14.416	20.3	20.14




LTE Band 2

Lowest Channel / 1.4MHz / QPSK

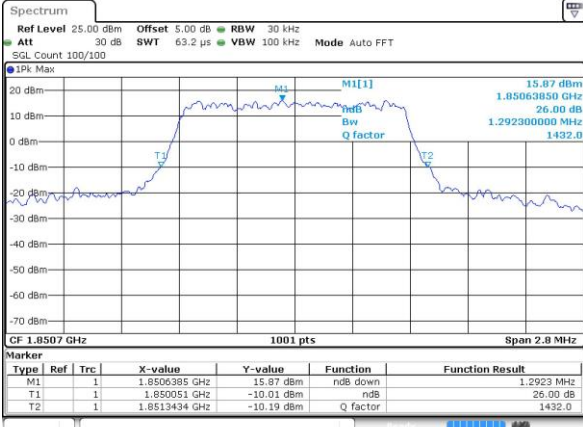

Date: 12 AUG 2016 11:09:27

Lowest Channel / 1.4MHz / 16QAM

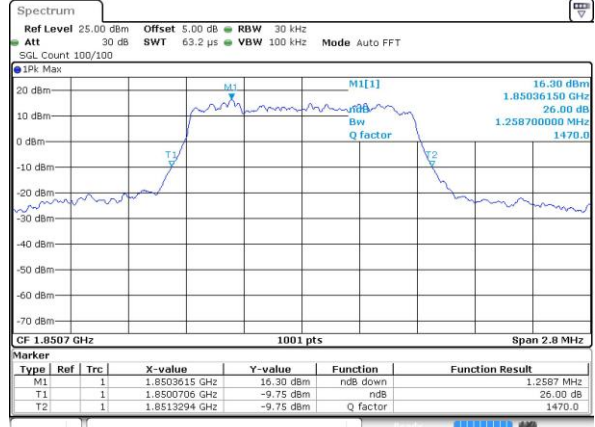

Date: 12 AUG 2016 11:09:38

Middle Channel / 1.4MHz / QPSK




Date: 12 AUG 2016 11:16:33

Middle Channel / 1.4MHz / 16QAM




Date: 12 AUG 2016 11:16:43

Highest Channel / 1.4MHz / QPSK

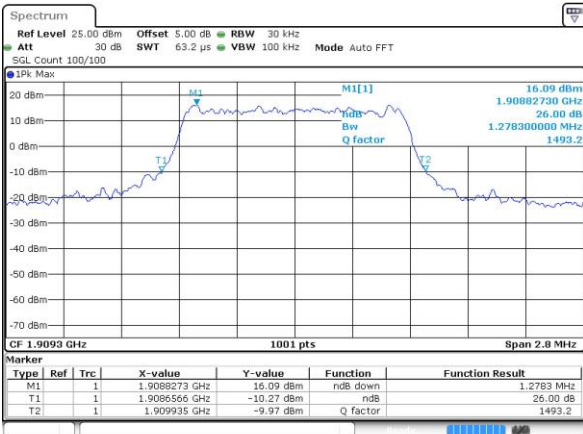

Date: 12 AUG 2016 11:19:06

Highest Channel / 1.4MHz / 16QAM

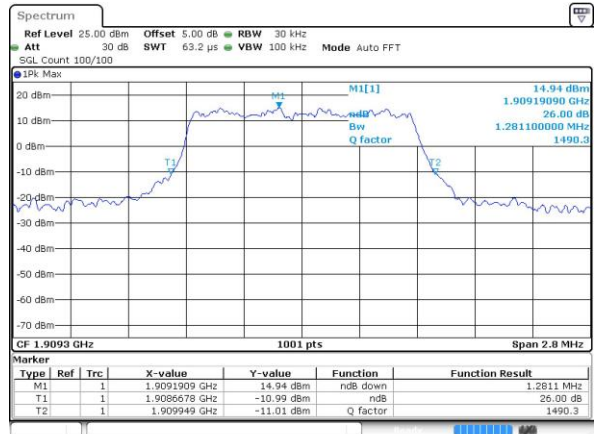


Date: 12 AUG 2016 11:19:17




LTE Band 2

Lowest Channel / 3MHz / QPSK

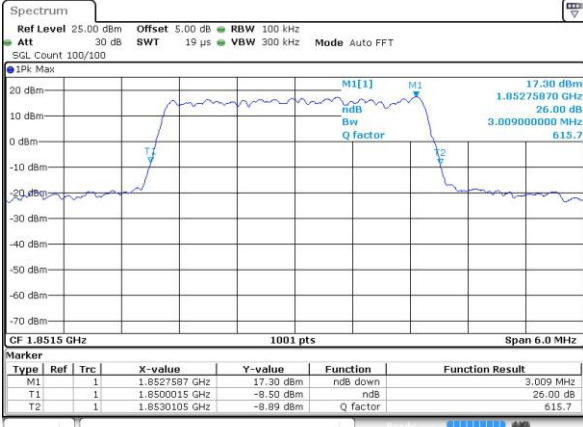


Date: 12 AUG 2016 11:26:11

Lowest Channel / 3MHz / 16QAM

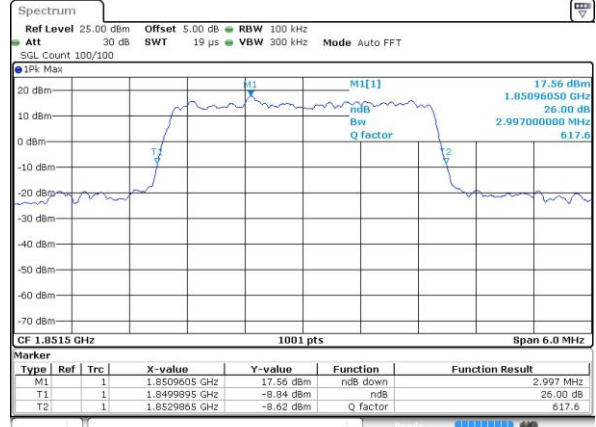


Date: 12 AUG 2016 11:26:22

Middle Channel / 3MHz / QPSK

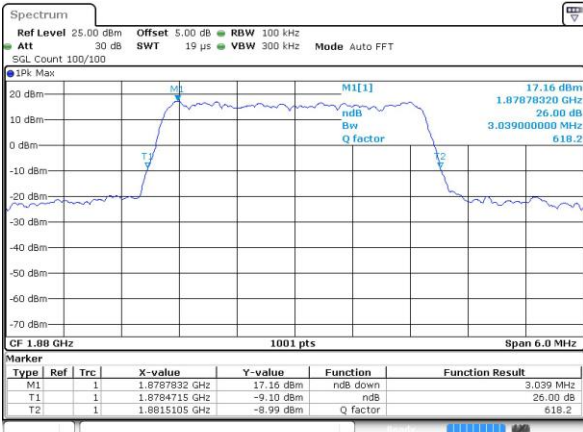


Date: 12 AUG 2016 11:33:16

Middle Channel / 3MHz / 16QAM

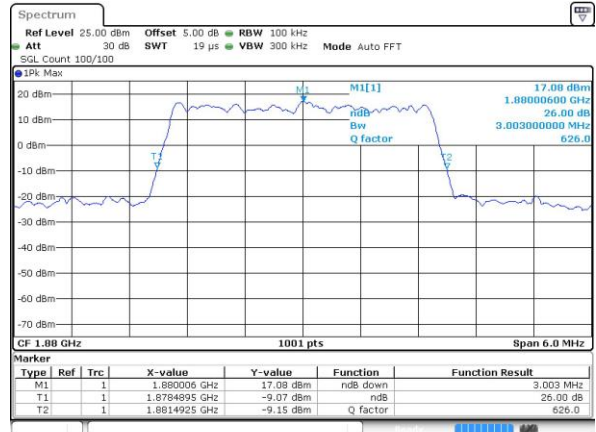


Date: 12 AUG 2016 11:33:27

Highest Channel / 3MHz / QPSK

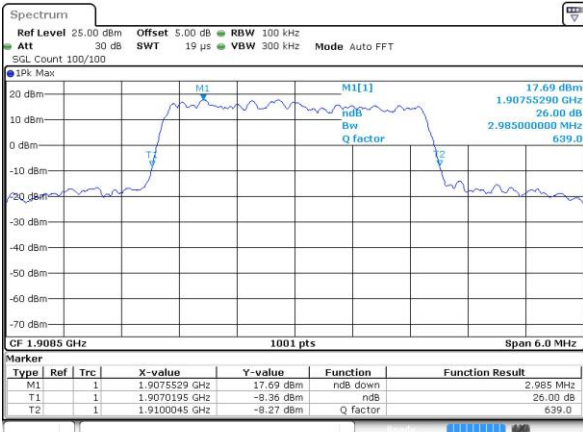

Date: 12 AUG 2016 11:35:49

Highest Channel / 3MHz / 16QAM

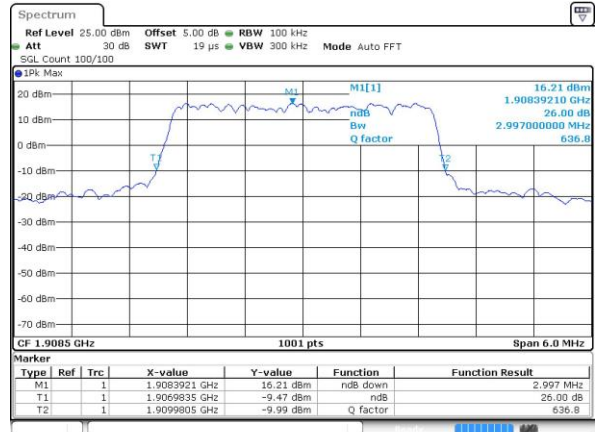


Date: 12 AUG 2016 11:36:00




LTE Band 2

Lowest Channel / 5MHz / QPSK

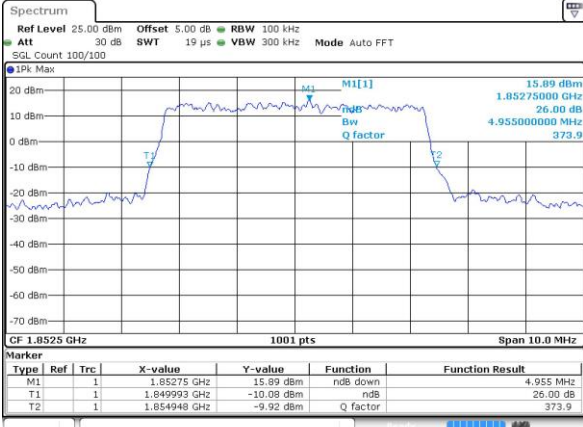


Date: 12 AUG 2016 11:42:54

Lowest Channel / 5MHz / 16QAM

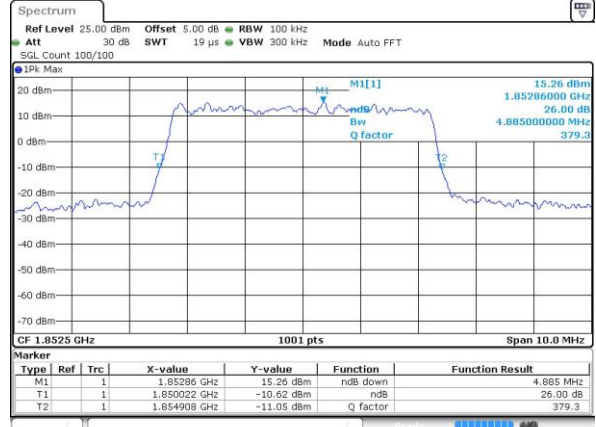


Date: 12 AUG 2016 11:43:05

Middle Channel / 5MHz / QPSK

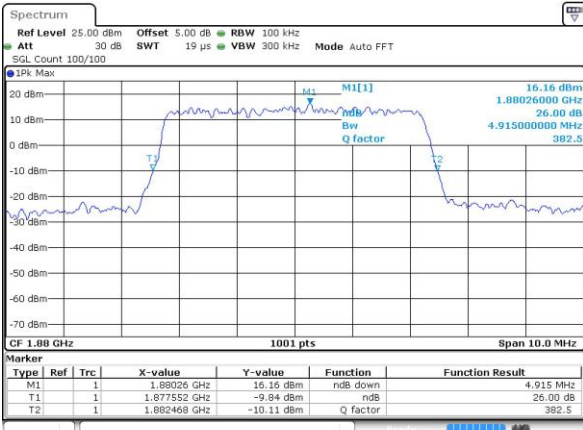


Date: 12 AUG 2016 11:49:59

Middle Channel / 5MHz / 16QAM

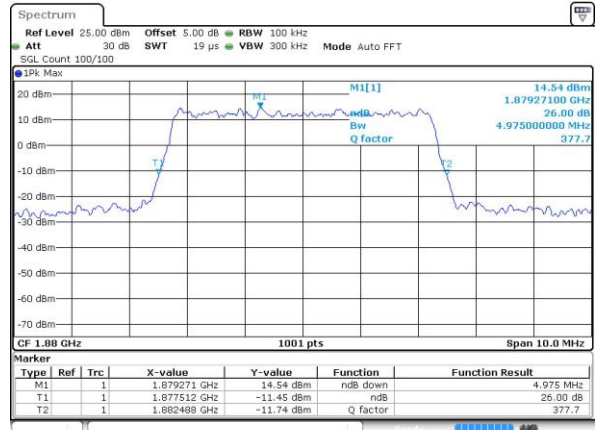


Date: 12 AUG 2016 11:50:10

Highest Channel / 5MHz / QPSK

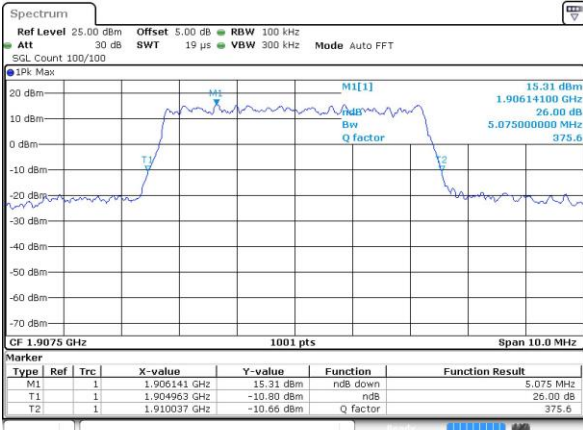

Date: 12 AUG 2016 11:52:32

Highest Channel / 5MHz / 16QAM

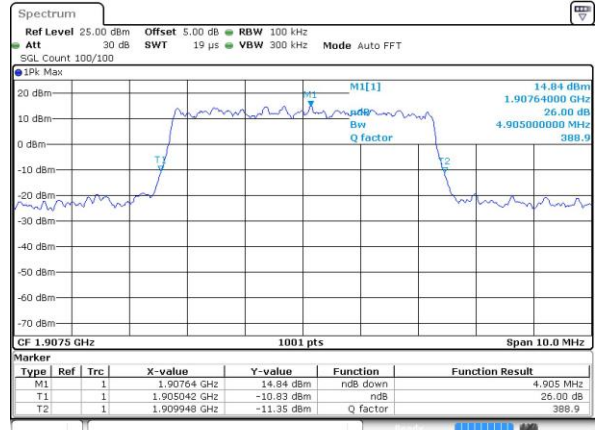


Date: 12 AUG 2016 11:52:42




LTE Band 2

Lowest Channel / 10MHz / QPSK

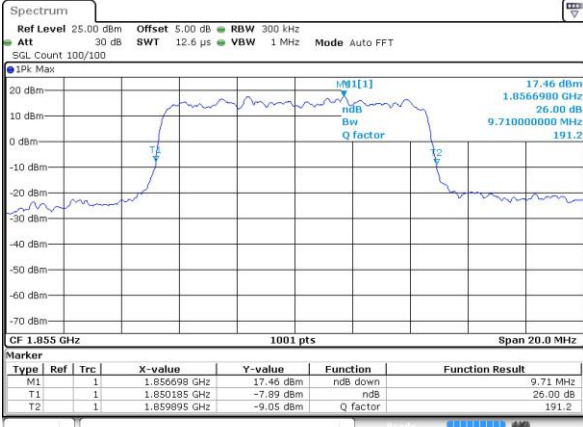


Date: 12 AUG 2016 11:59:37

Lowest Channel / 10MHz / 16QAM

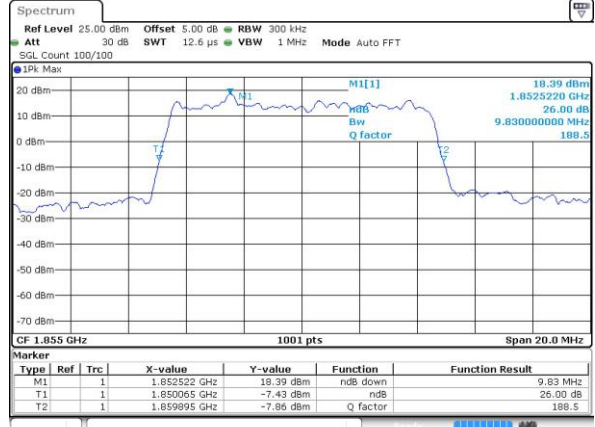


Date: 12 AUG 2016 11:59:48

Middle Channel / 10MHz / QPSK

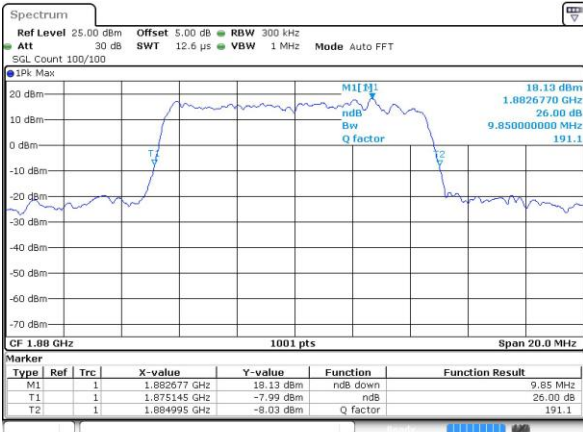


Date: 12 AUG 2016 12:06:42

Middle Channel / 10MHz / 16QAM

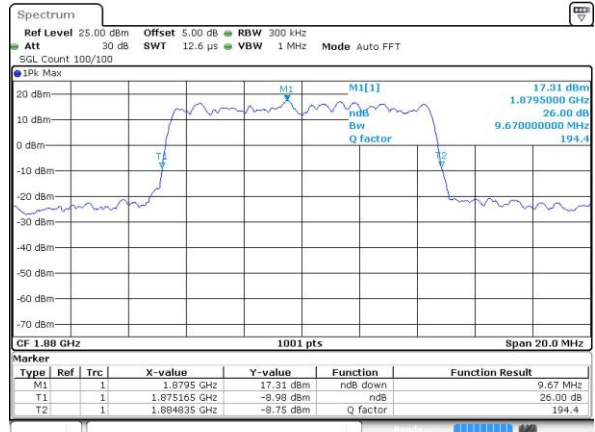


Date: 12 AUG 2016 12:06:53

Highest Channel / 10MHz / QPSK

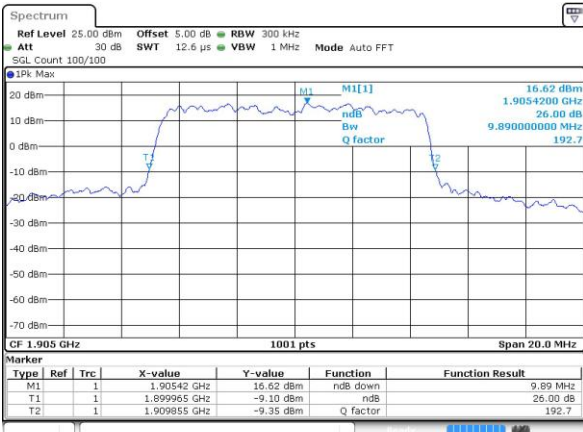

Date: 12 AUG 2016 12:09:15

Highest Channel / 10MHz / 16QAM

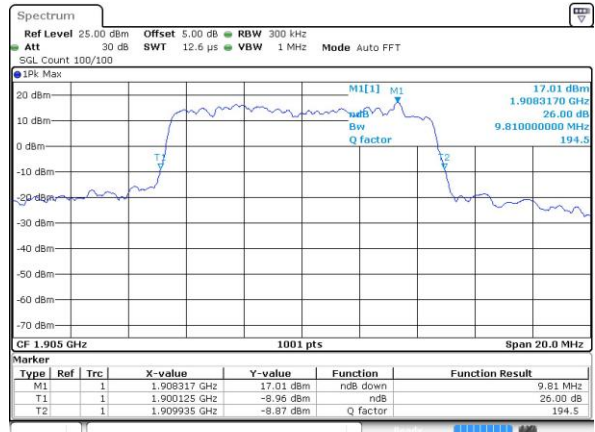


Date: 12 AUG 2016 12:09:25




LTE Band 2

Lowest Channel / 15MHz / QPSK

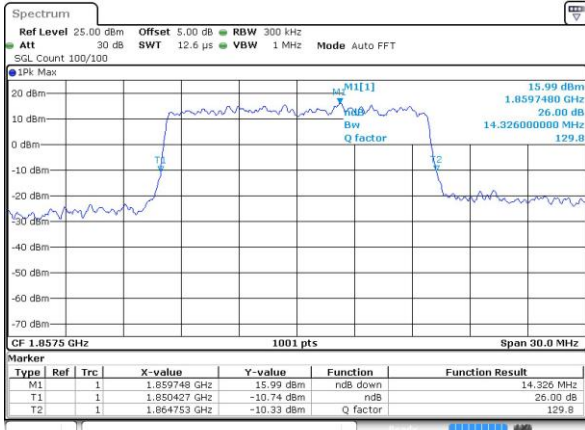


Date: 12 AUG 2016 12:16:20

Lowest Channel / 15MHz / 16QAM

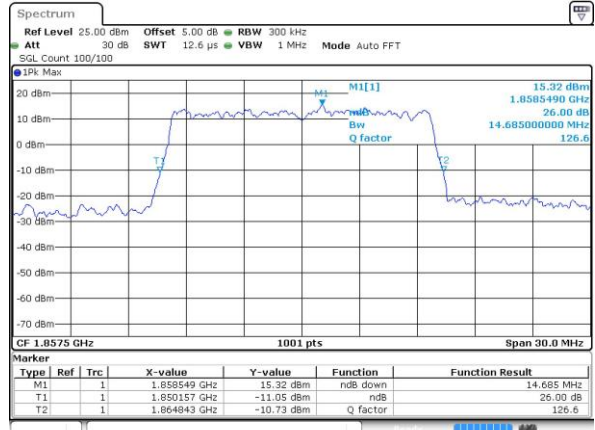


Date: 12 AUG 2016 12:16:30

Middle Channel / 15MHz / QPSK

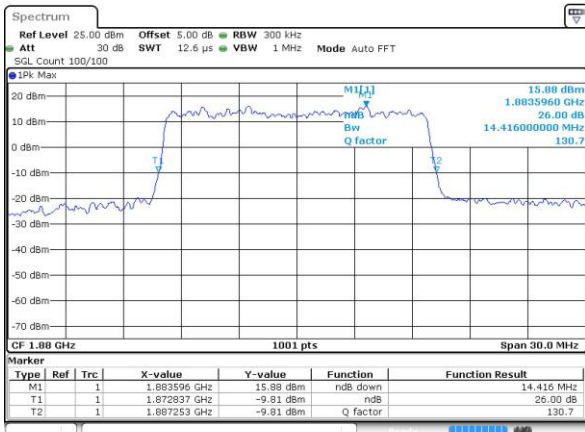


Date: 12 AUG 2016 12:23:25

Middle Channel / 15MHz / 16QAM

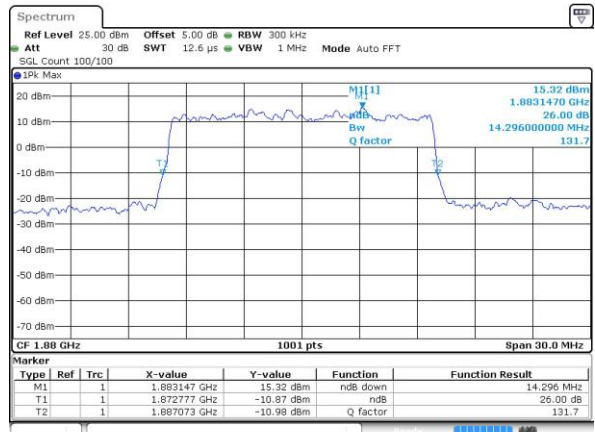


Date: 12 AUG 2016 12:23:35

Highest Channel / 15MHz / QPSK

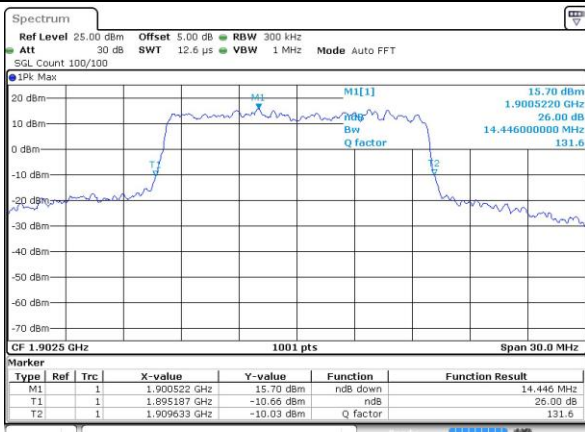

Date: 12 AUG 2016 12:25:58

Highest Channel / 15MHz / 16QAM

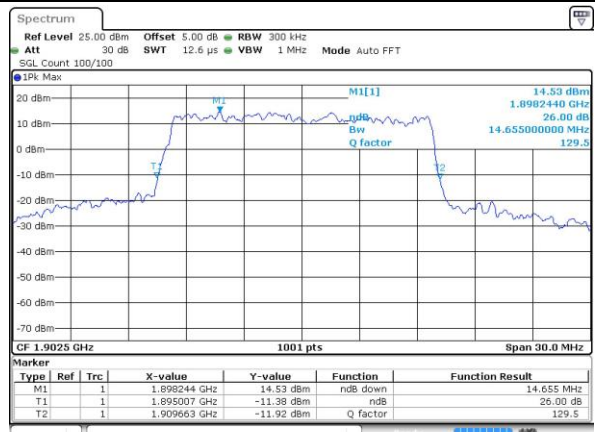

Date: 12 AUG 2016 12:26:08