

RF TEST REPORT

Test item : WiMAX & WiFi Dual CPE
Model No. : IMW-C910W
Order No. : 1109-01216
Date of receipt : 2011-09-19
Test duration : 2012-01-04 ~ 2012-01-10
Date of issue : 2012-01-12
Use of report : FCC Original Grant

Applicant : Infomark Co., Ltd.
#801, KINS Tower, 25-1, Jeongja-Dong, Bundang-Gu, Seongnam-Si
Gyeonggi-do, Korea, 137-130

Test laboratory : Digital EMC Co., Ltd.
683-3, Yubang-Dong, Cheoin-Gu, Yongin-Si, Kyunggi-Do, 449-080, Korea


Test specification : FCC Part 15.247 Subpart C
ANSI C63.4-2003

Test environment : See appended test report

Test result : Pass Fail

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of Digital EMC Co., Ltd.

Tested by:

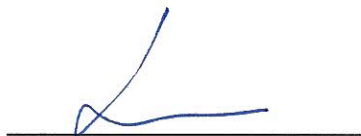

Engineer
S.K.Ryu

Witnessed by:

N/A

Reviewed by:



Technical Director
Harvey Sung

CONTENTS

1. Equipment information.....	3
1.1 Equipment description.....	3
1.2 Ancillary equipment	3
2. Information about test items.....	4
2.1 Test mode.....	4
2.2 Auxiliary equipment	4
2.3 Tested frequency	4
2.4 Tested environment	4
2.5 EMI Suppression Device(s)/Modifications	4
3. Test Report	5
3.1 Summary of tests	5
3.2 Transmitter requirements	6
3.2.1 6 dB Bandwidth.....	6
3.2.2 Peak Output Power.....	13
3.2.3 Out of Band Emissions / Band Edge.....	14
3.2.4 Out of band Emission – Radiated	24
3.2.5 Transmitter Power Spectral Density.....	28
3.2.6 AC Conducted Emissions.....	35
3.2.7 Antenna Requirements	42
APPENDIX.....	43

1. Equipment information

1.1 Equipment description

FCC Equipment Class	Digital Transmission System (DTS)
Equipment type	WiMAX & WiFi Dual CPE
Equipment model name	IMW-C910W
Equipment add model name	N/A
Equipment serial no.	Identical prototype
Frequency band	2412 ~ 2462 MHz
Modulation type	802.11b: DSSS(CCK, DQPSK, DBPSK) 802.11g: OFDM(64QAM, QPSK, BPSK) 802.11n (HT20): OFDM(64QAM, 16QAM, QPSK, BPSK)
Channel Access Protocol	CSMA/CA
Channel Spacing	5.0 MHz
Antenna type	Internal Type: Chip Antenna (Max. Peak Gain:-2.66 dBi)
Power Supply	DC 3.7 V

1.2 Ancillary equipment

Equipment	Model No.	Serial No.	Manufacturer	Note
-	-	-	-	-
-	-	-	-	-

2. Information about test items

2.1 Test mode

1. This device was tested in below worst case modes with the maximum power.
And the worst case data are reported.

Test Case 1	802.11b 5.5Mbps
Test Case 2	802.11g 54Mbps
Test Case 3	802.11n(HT20) MCS6

2.2 Auxiliary equipment

Equipment	Model No.	Serial No.	Manufacturer	Note
Notebook	X51RL	85N0AS318314227	ASUSTeK Computer Inc.	-
-	-	-	-	-

2.3 Tested frequency

	TX Frequency (MHz)	RX Frequency (MHz)
Lowest Channel	2412	2412
Middle Channel	2437	2437
Highest Channel	2462	2462

2.4 Tested environment

Temperature	: 23 ~ 25 °C
Relative humidity content	: 33 ~ 41 % R.H.
Details of power supply	: DC 3.7 V

2.5 EMI Suppression Device(s)/Modifications

EMI suppression device(s) added and/or modifications made during testing
→ None

3. Test Report

3.1 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status Note 1
I. Test Items (TX)				
15.247(a)	6 dB Bandwidth	> 500 kHz	Conducted	C
15.247(b)	Transmitter Output Power	< 1Watt		C
15.247(c)	Out of Band Emissions / Band Edge	20dBc in any 100kHz BW		C
15.247(d)	Transmitter Power Spectral Density	< 8dBm / 3kHz		C
15.205 15.209	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	<FCC 15.209 Limits	Radiated	C Note.2
15.207	AC Conducted Emissions	<FCC 15.207 Limits	AC Line Conducted	C
15.203	Antenna Requirements	FCC 15.203	-	C
<p>Note 1: C=Comply NC=Not Comply NT=Not Tested NA=Not Applicable</p> <p>Note 2: This test item was performed in each axis and the worst case data were reported.</p>				

The sample was tested according to the following specification:
ANSI C-63.4-2003

3.2 Transmitter requirements

3.2.1 6 dB Bandwidth

- Procedure:

The bandwidth at 6 dB below the highest in-band spectral density was measured with a spectrum analyzer connected to the antenna terminal at the highest, middle and the lowest available channels.

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 6dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level.

The marker-delta reading at this point is the 6 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest Frequencies

Span = 50 MHz (Greater than EBW)

RBW = 100 kHz

VBW = \geq RBW

Trace = max hold

Sweep = auto

Detector function = peak

- Measurement Data: **Comply**

Test Mode	Frequency	Test Results (MHz)
Test Case 1	Lowest	10.490
	Middle	11.140
	Highest	11.140
Test Case 2	Lowest	16.480
	Middle	16.510
	Highest	16.490
Test Case 3	Lowest	17.640
	Middle	17.660
	Highest	17.360


Note 1: See next pages for actual measured spectrum plots.

- Minimum Standard:

The minimum 6 dB bandwidth shall be at least 500 kHz


6 dB Bandwidth

Lowest Frequency & Test Case 1

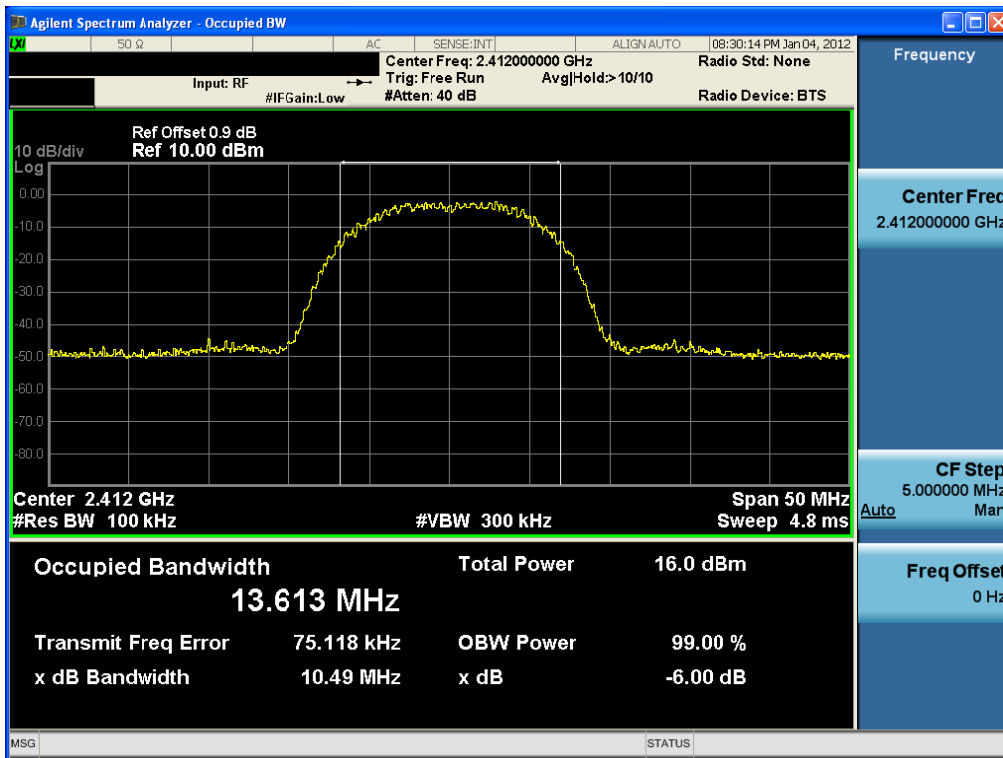


6 dB Bandwidth

Middle Frequency & Test Case 1

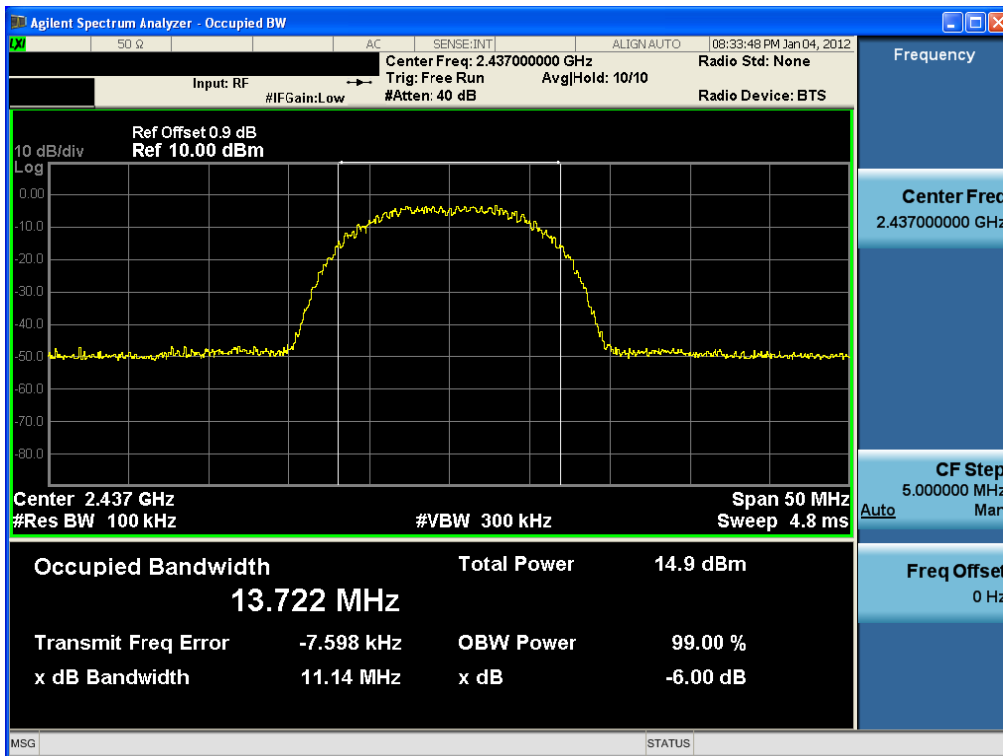


6 dB Bandwidth

Highest Frequency & Test Case 1

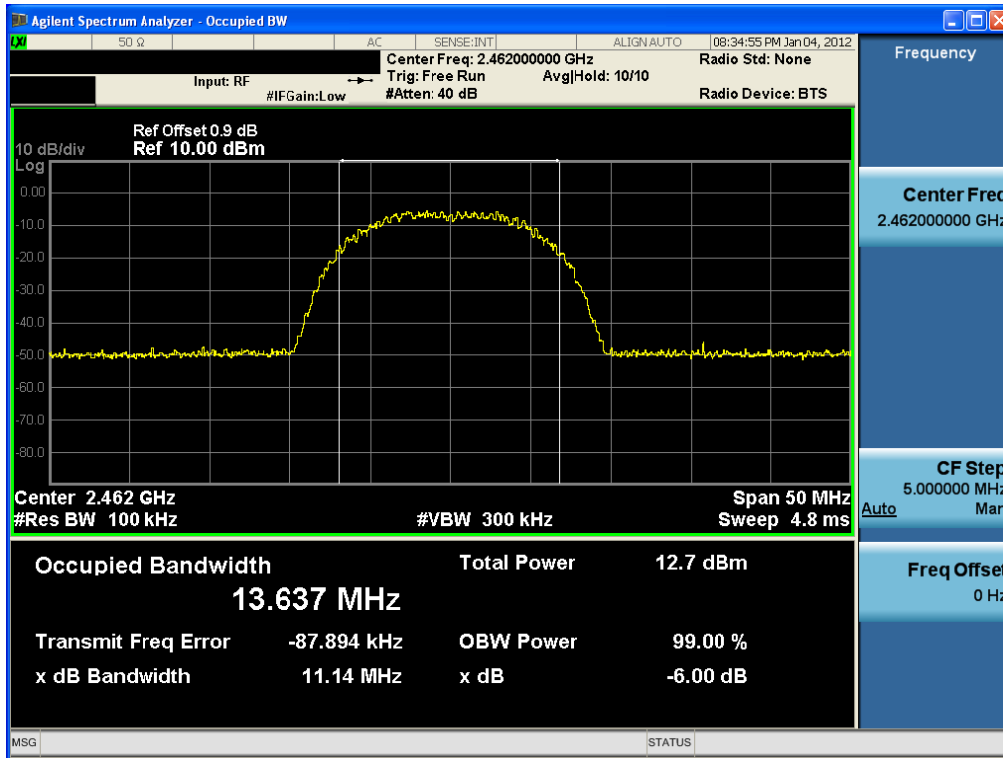


6 dB Bandwidth

Lowest Frequency & Test Case 2

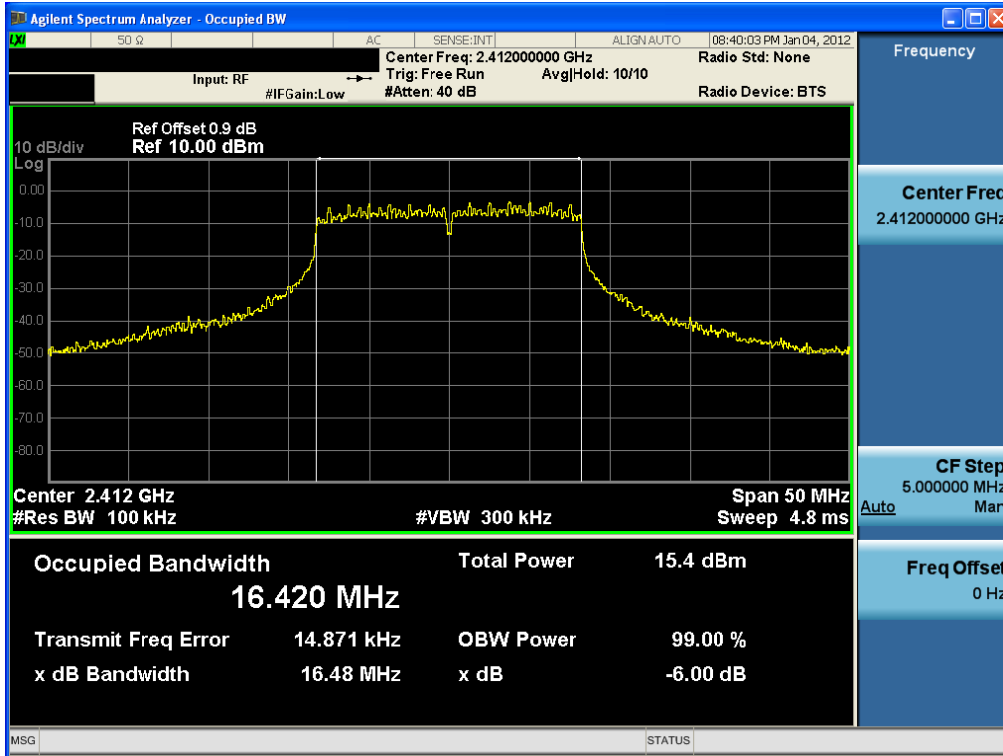


6 dB Bandwidth

Middle Frequency & Test Case 2

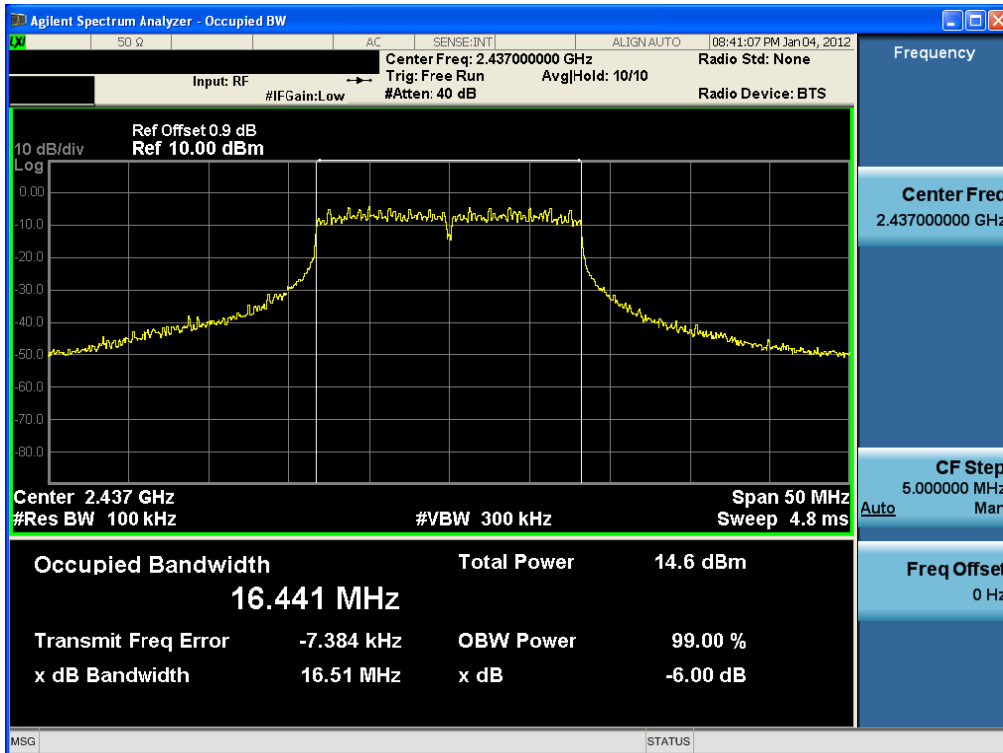


6 dB Bandwidth

Highest Frequency & Test Case 2

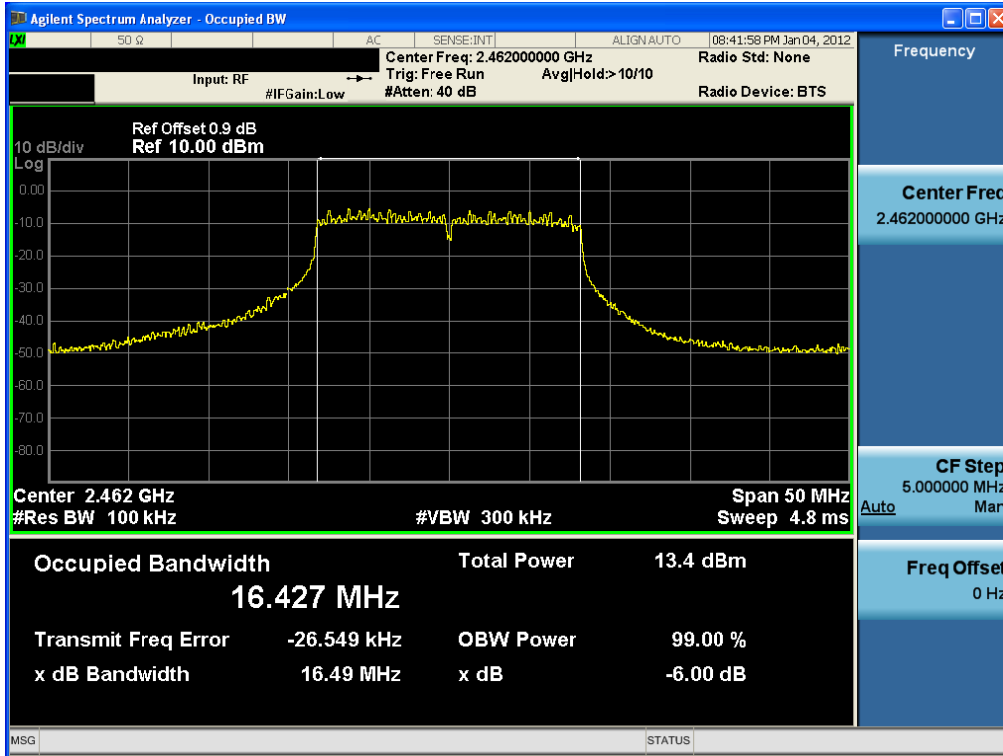


6 dB Bandwidth

Lowest Frequency & Test Case 3

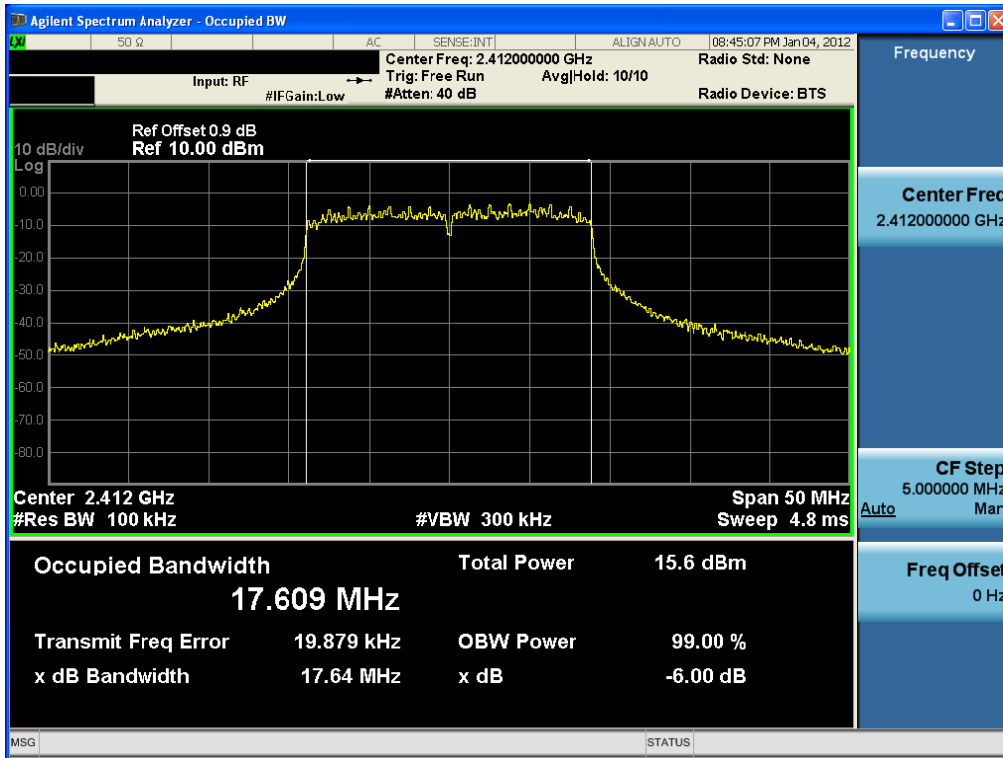


6 dB Bandwidth

Middle Frequency & Test Case 3

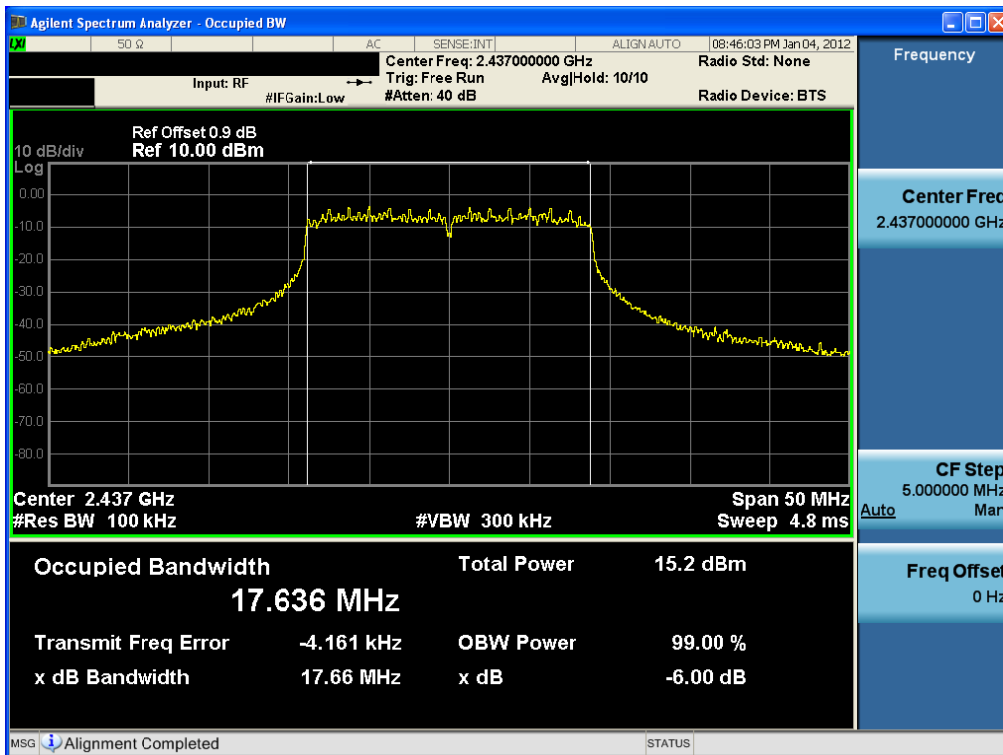

6 dB Bandwidth

Highest Frequency & Test Case 3

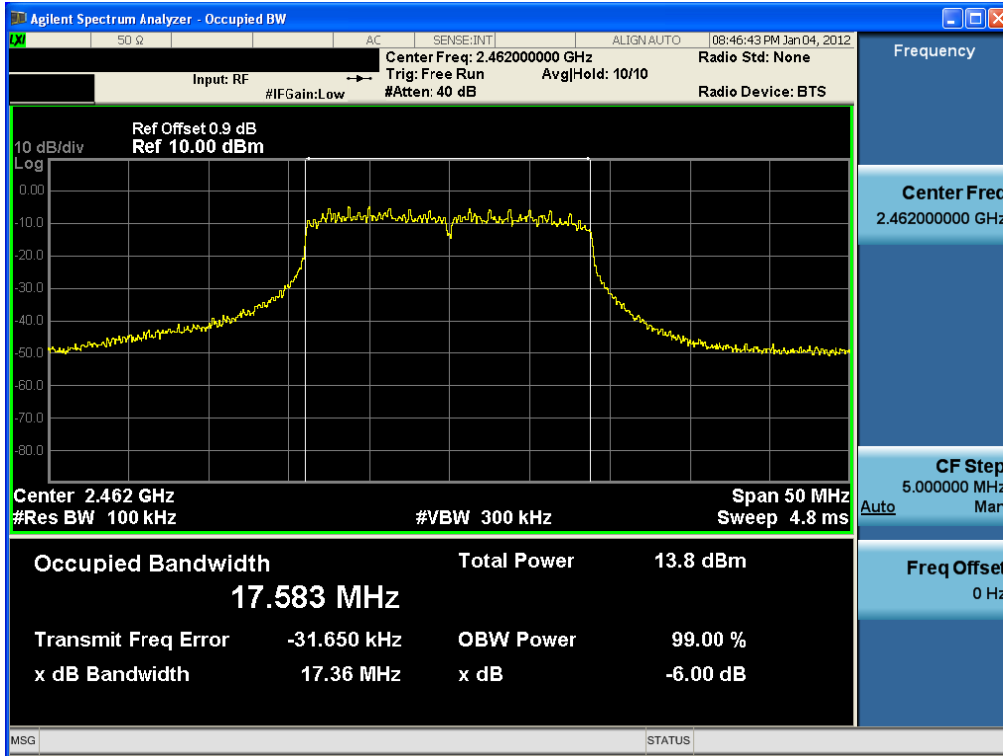

3.2.2 Peak Output Power

- Test Procedure and Spectrum Analyzer setting:

This is an RF conducted test. Use a direct connection between the antenna port of the transmitter and the Peak power meter, through suitable attenuation. Power Output Option 1 is a peak measurement. Power Output Option 2 is the same procedure used for UNII output power measurements. Either option can be used for DTS devices.

This test items were measured with Power Output Option 1.

- Measurement Data: Comply

Test Mode	Frequency	Test Results	
		dBm	W
Test Case 1	Lowest	11.45	0.014
	Middle	9.89	0.010
	Highest	7.78	0.006
Test Case 2	Lowest	18.08	0.064
	Middle	17.30	0.054
	Highest	16.38	0.043
Test Case 3	Lowest	18.06	0.064
	Middle	17.54	0.057
	Highest	16.50	0.045

Minimum Standard:	< 1W
--------------------------	------

3.2.3 Out of Band Emissions / Band Edge

- Procedure:

All harmonics/spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. If the device complies with the use of power option 2 the attenuation under this paragraph shall be 30 dB instead of 20 dB.

For Band-edge testing the spectrum analyzer is set to:

Tested frequency = the highest and the lowest Frequencies

Center frequency = 2400MHz, 2483.5MHz

Span = 100MHz

Detector function = peak

RBW = 100 kHz

VBW \geq RBW

Trace = max hold

Sweep = auto

For spurious testing the spectrum analyzer is set to:

Tested frequency = the highest, middle and the lowest Frequencies

RBW = 100 kHz

VBW = 100 kHz

Detector function = peak

Sweep = auto

Trace = max hold


- Measurement Data: Comply

Note 1: See next pages for actual measured spectrum plots.

Minimum Standard:	> 30 dBc
--------------------------	----------


Low Band-edge at 20 dB blow

Lowest Frequency & Test case 1

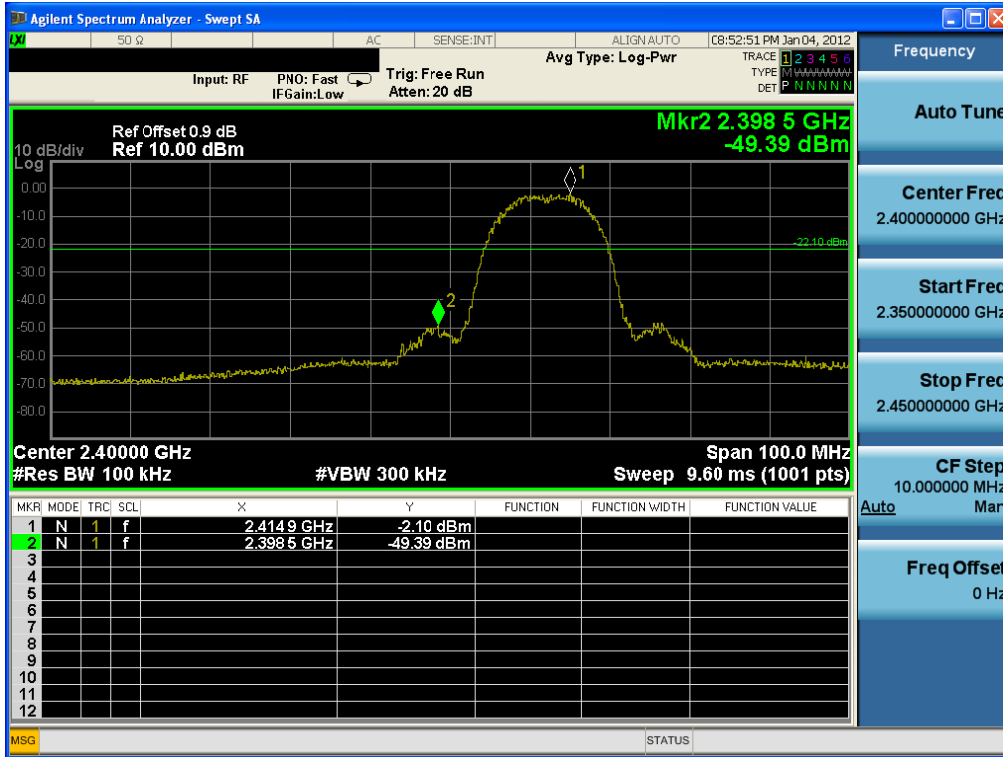


Conducted Spurious Emissions

Lowest Frequency & Test case 1

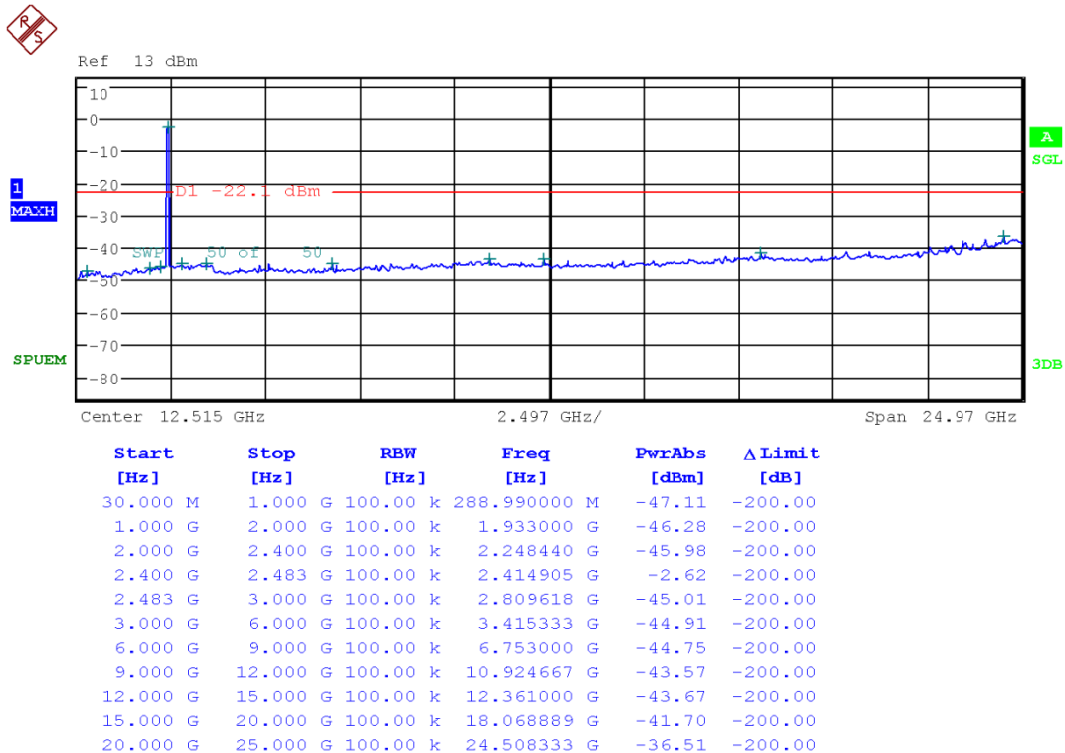


Reference for limit

Middle Frequency & Test case 1

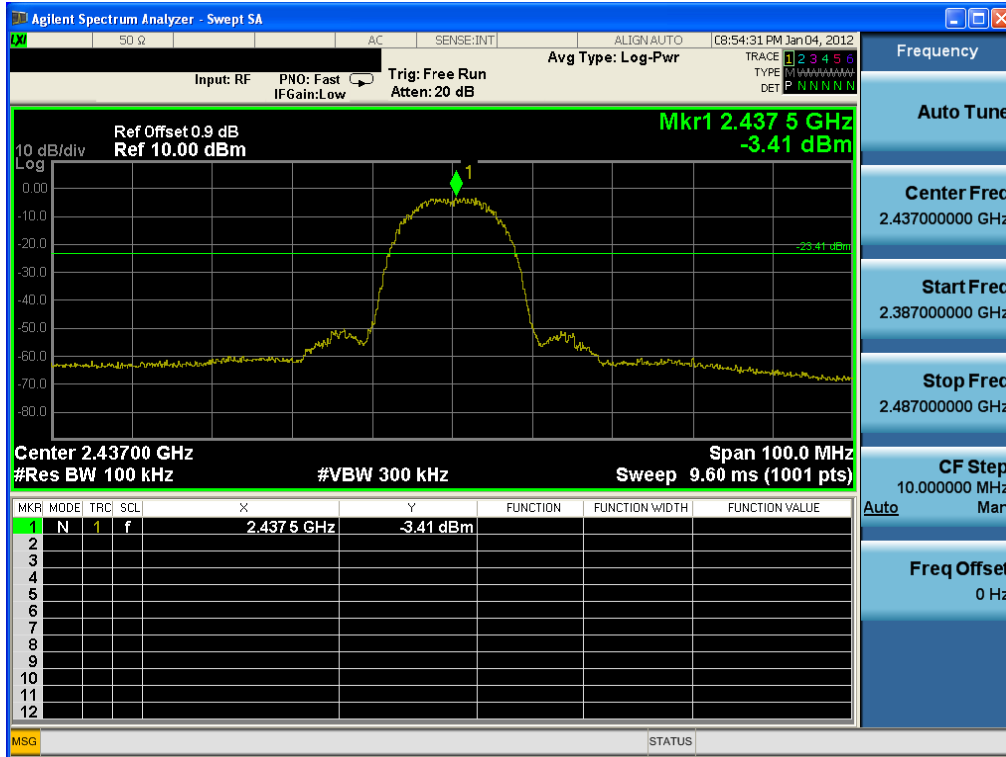


Conducted Spurious Emissions

Middle Frequency & Test case 1

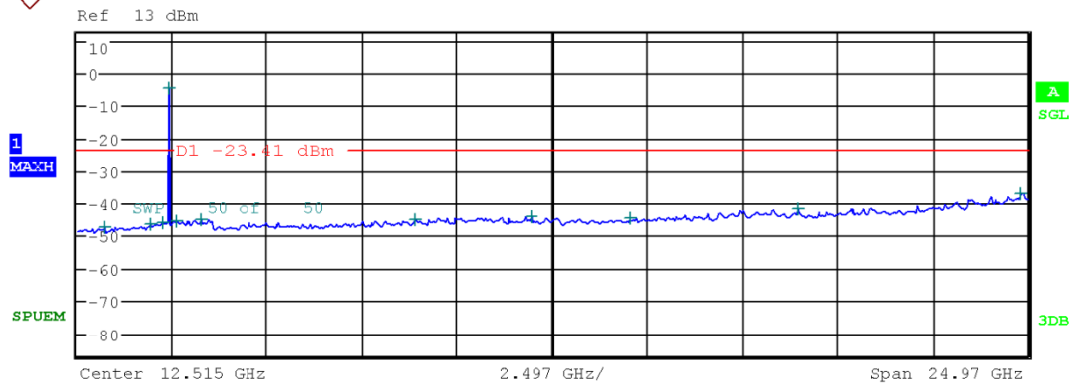


High Band-edge at 20 dB blow

Highest Frequency & Test case 1

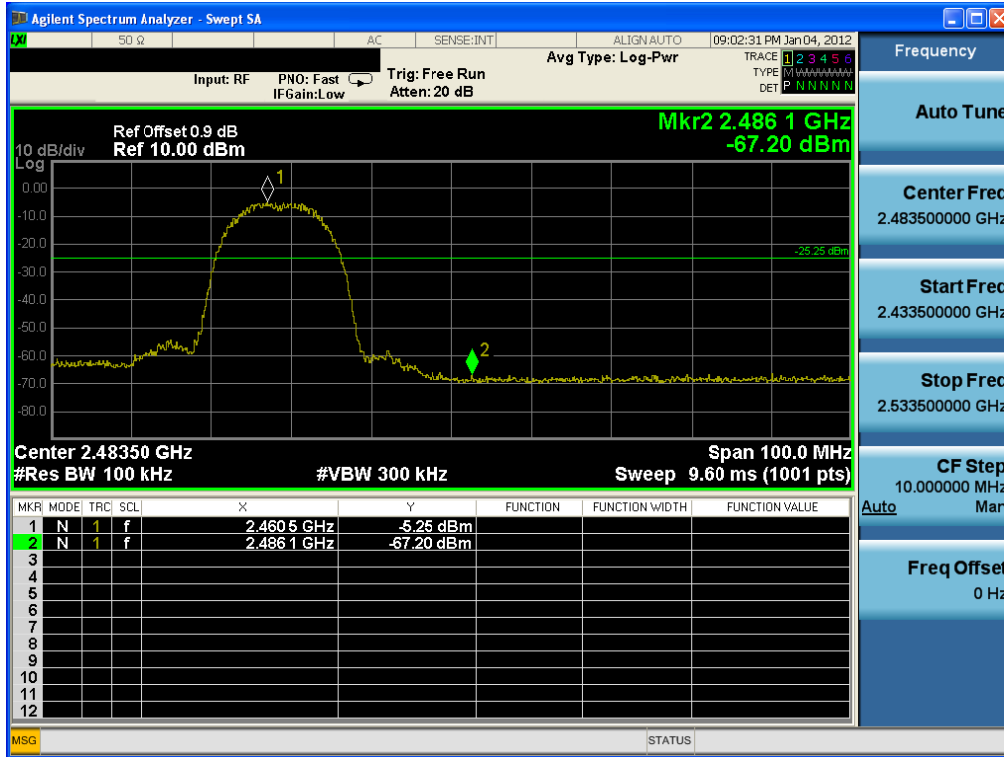


Conducted Spurious Emissions

Highest Frequency & Test case 1

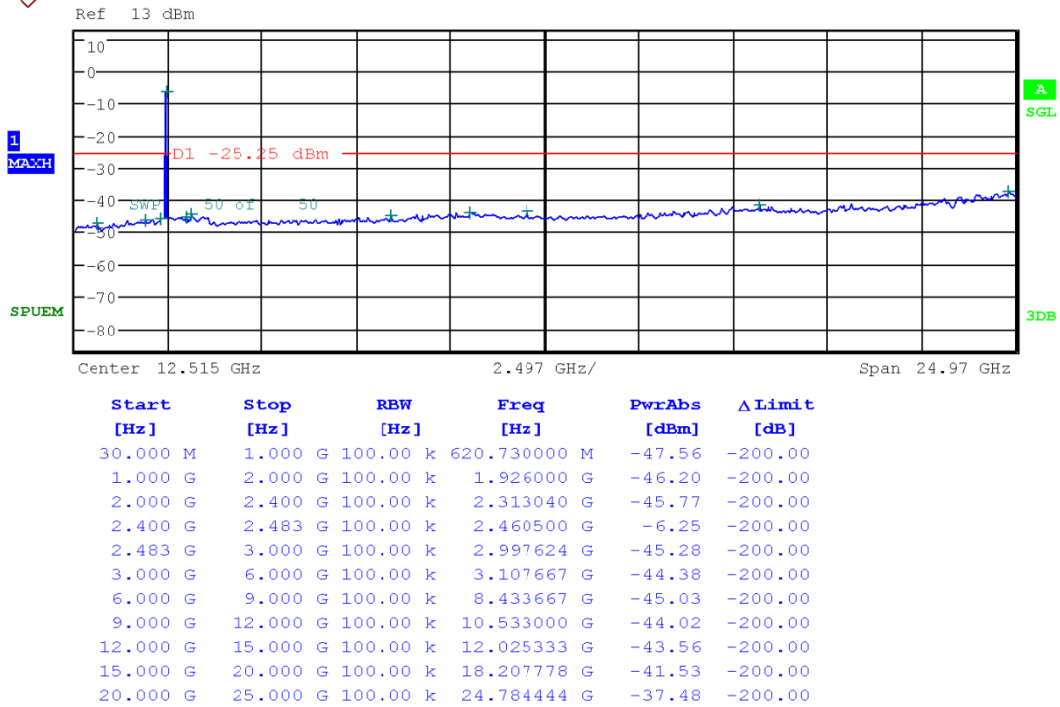


Low Band-edge at 20 dB blow

Lowest Frequency & Test case 2

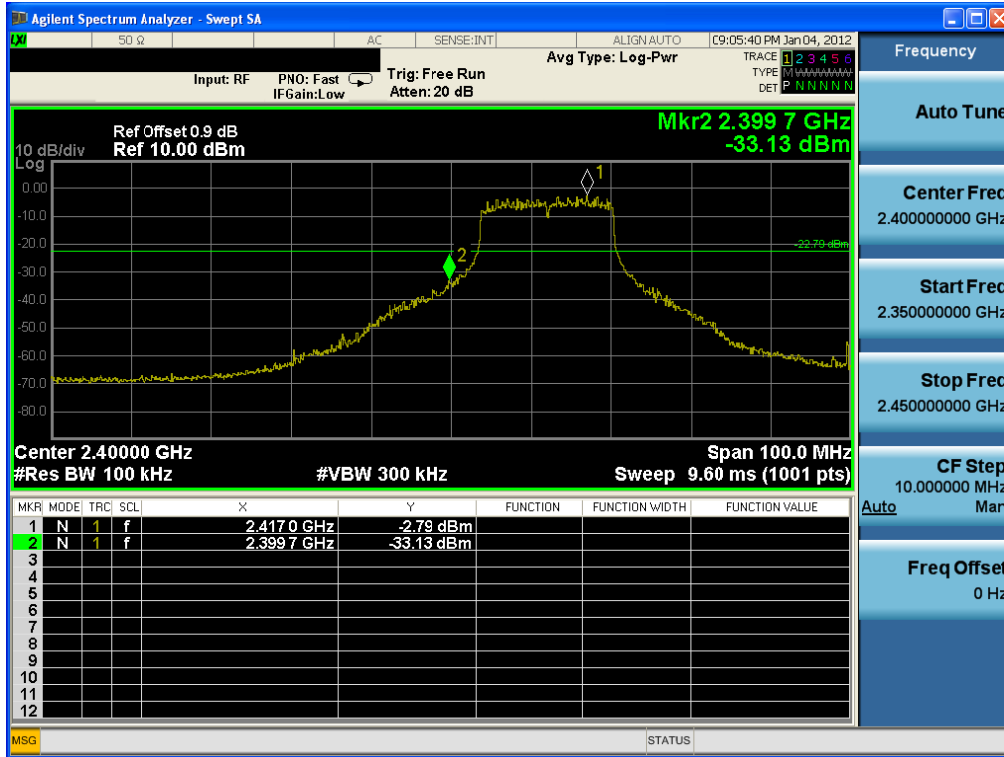


Conducted Spurious Emissions

Lowest Frequency & Test case 2

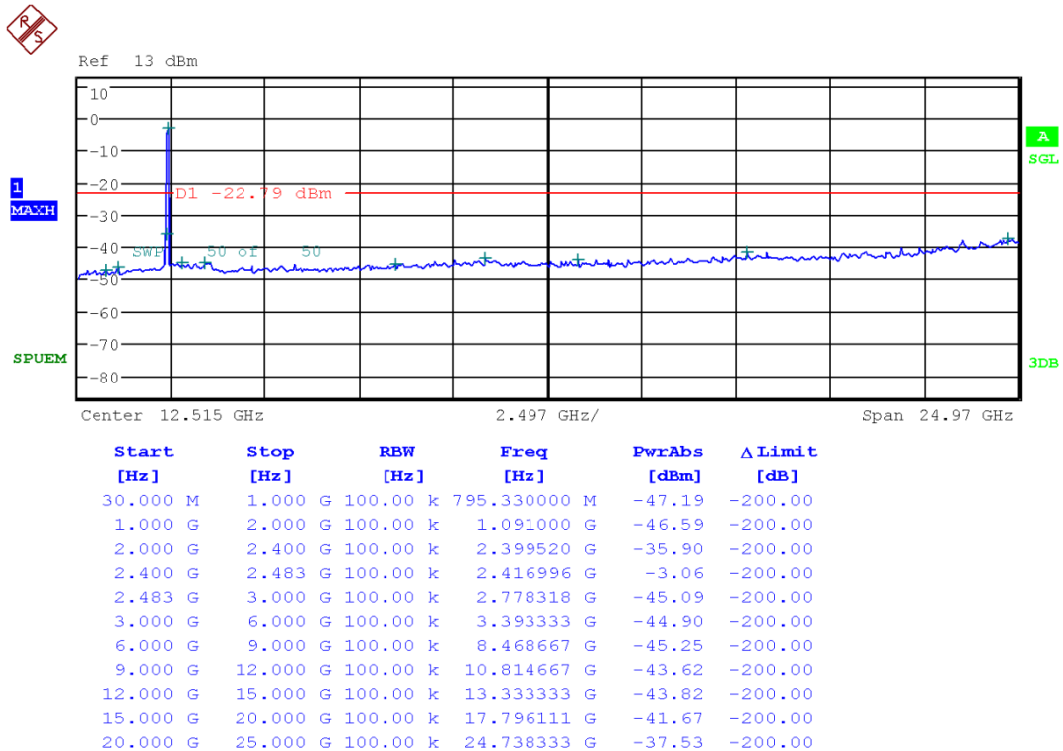


Reference for limit

Middle Frequency & Test case 2

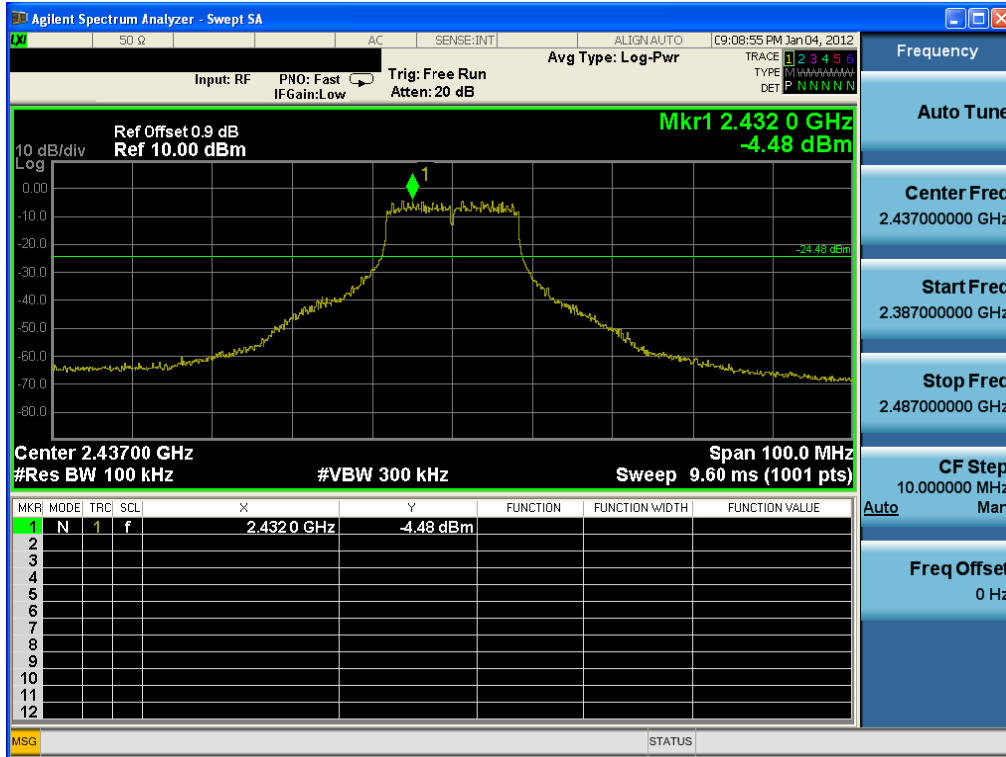


Conducted Spurious Emissions

Middle Frequency & Test case 2

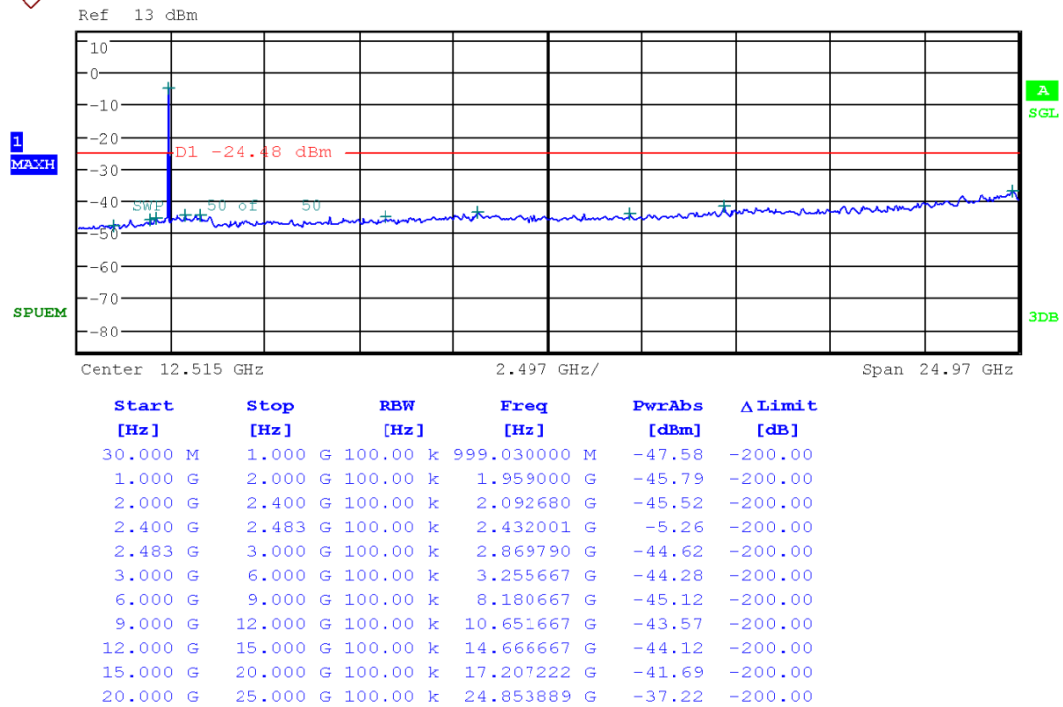


High Band-edge at 20 dB blow

Highest Frequency & Test case 2

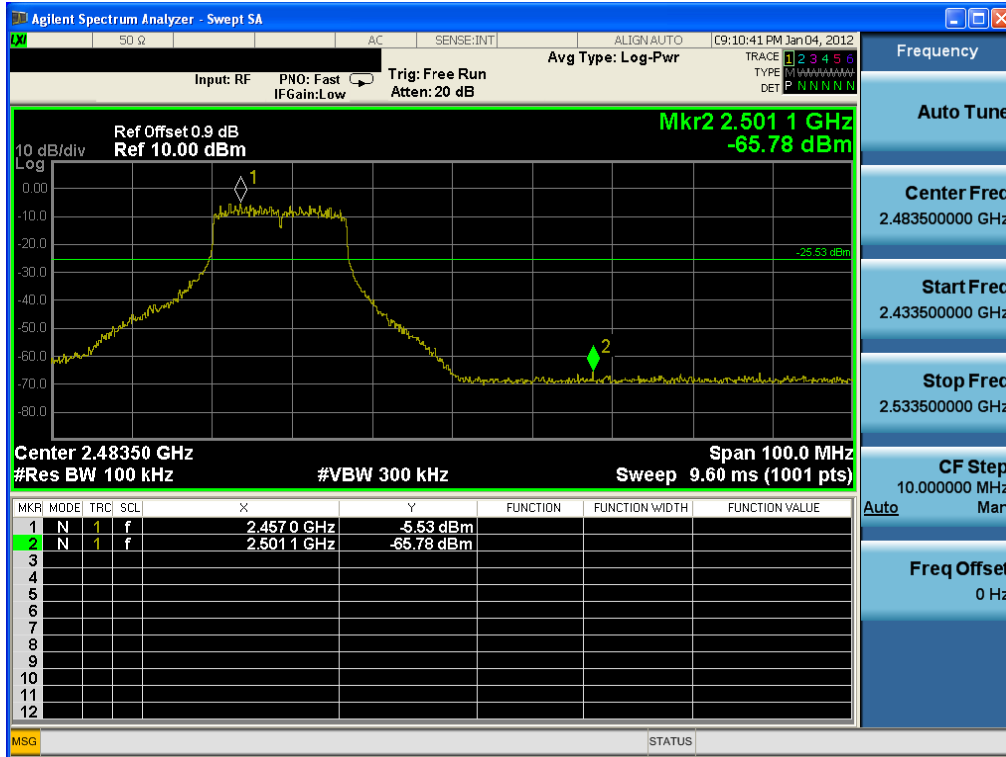


Conducted Spurious Emissions

Highest Frequency & Test case 2

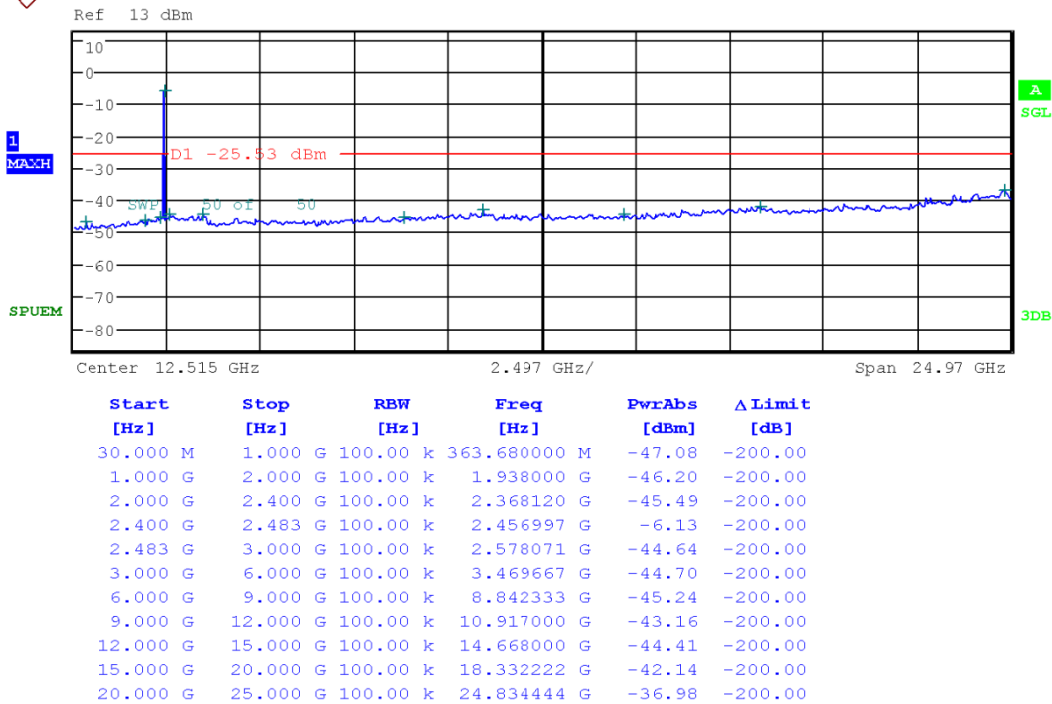


Low Band-edge at 20 dB blow

Lowest Frequency & Test case 3

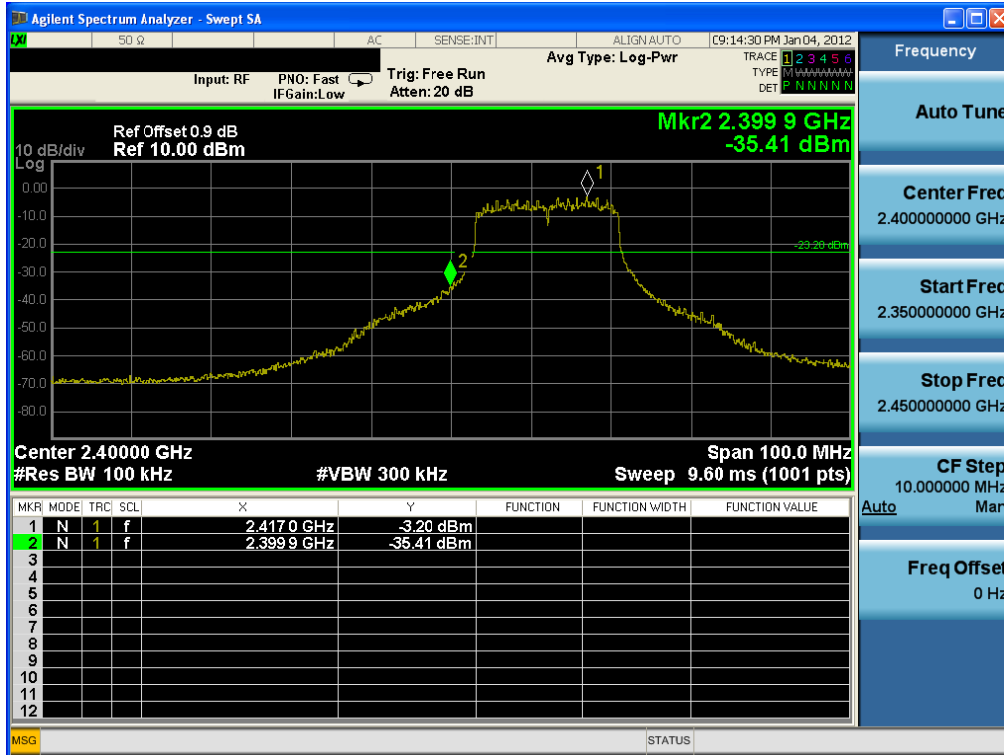


Conducted Spurious Emissions

Lowest Frequency & Test case 3

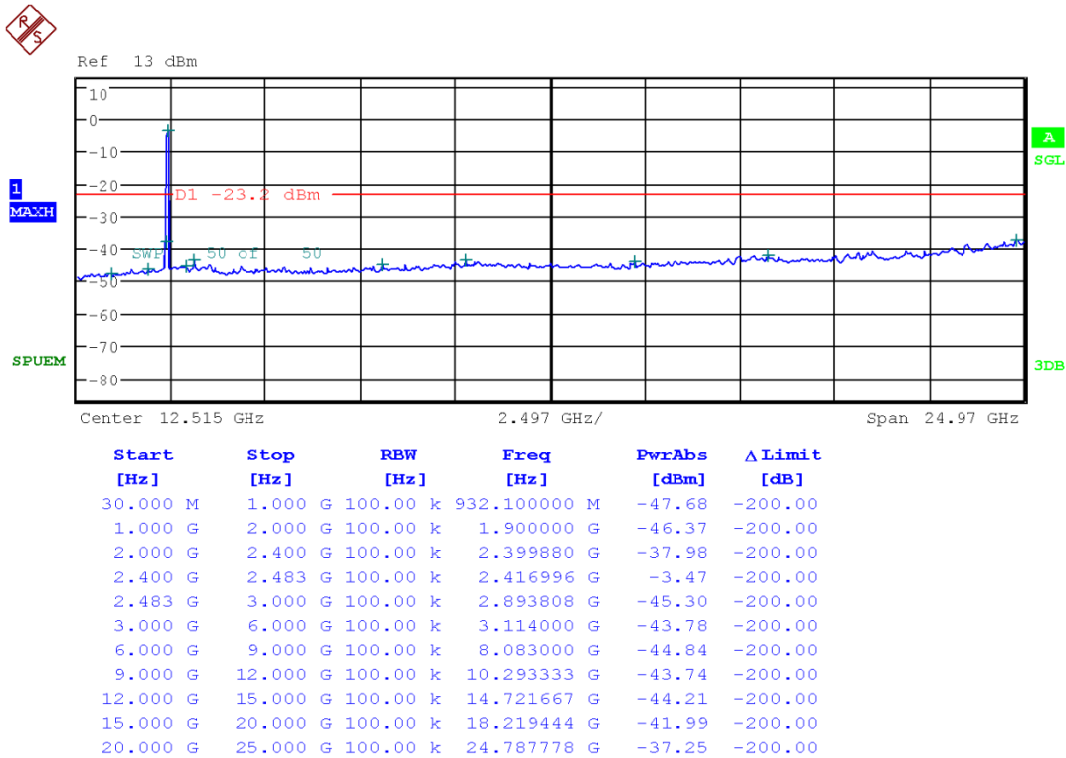


Reference for limit

Middle Frequency & Test case 3

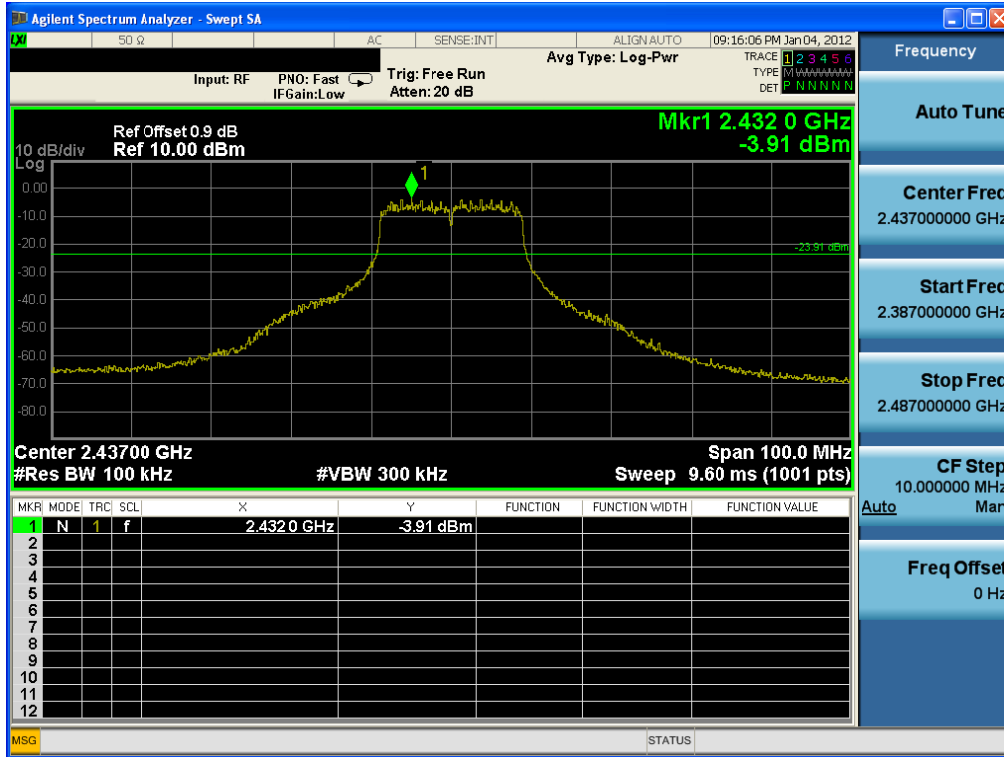


Conducted Spurious Emissions

Middle Frequency & Test case 3

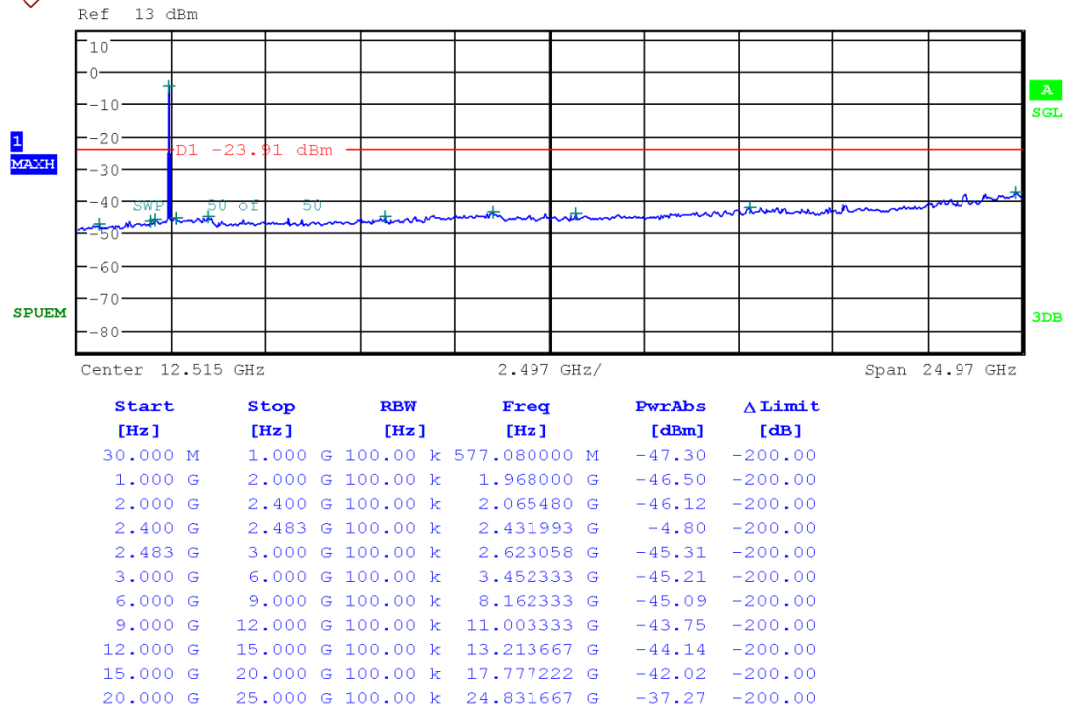


High Band-edge at 20 dB blow

Highest Frequency & Test case 3

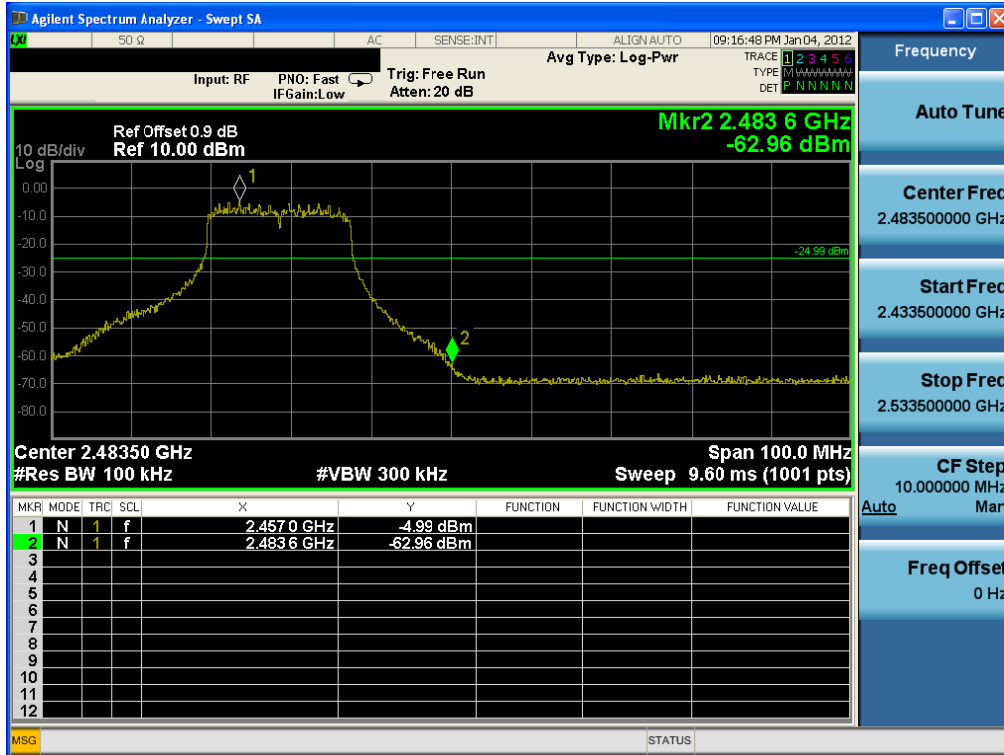

Conducted Spurious Emissions

Highest Frequency & Test case 3

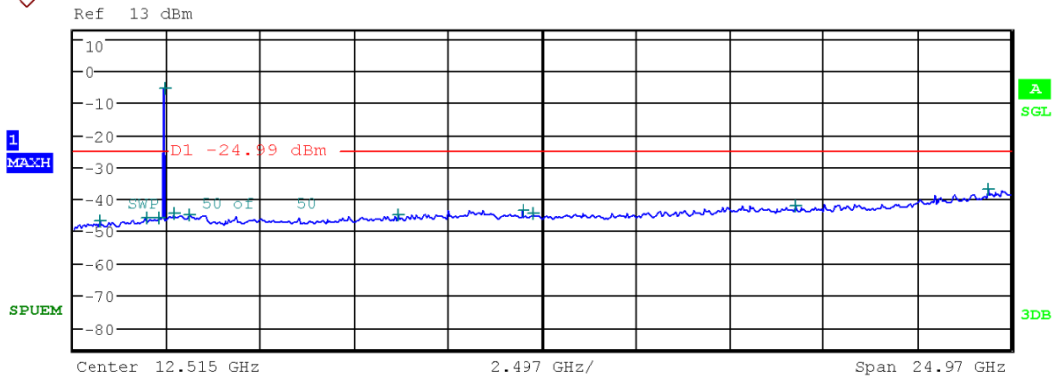

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	Δ Limit [dB]
30.000 M	1.000 G	100.00 k	754.590000 M	-46.92	-200.00
1.000 G	2.000 G	100.00 k	1.985000 G	-45.72	-200.00
2.000 G	2.400 G	100.00 k	2.307000 G	-46.03	-200.00
2.400 G	2.483 G	100.00 k	2.457001 G	-5.63	-200.00
2.483 G	3.000 G	100.00 k	2.695781 G	-44.63	-200.00
3.000 G	6.000 G	100.00 k	3.119667 G	-44.85	-200.00
6.000 G	9.000 G	100.00 k	8.667667 G	-45.22	-200.00
9.000 G	12.000 G	100.00 k	11.975000 G	-43.50	-200.00
12.000 G	15.000 G	100.00 k	12.277333 G	-44.37	-200.00
15.000 G	20.000 G	100.00 k	19.235000 G	-42.02	-200.00
20.000 G	25.000 G	100.00 k	24.417778 G	-37.10	-200.00

3.2.4 Out of band Emission – Radiated

- Procedure:

The EUT was placed on a 0.8m high wooden table inside a shielded enclosure. An antenna was placed near the EUT and measurements of frequencies and amplitudes of field strengths were recorded for reference during final measurements. For final radiated testing, measurements were performed in OATS. Measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst-case orientation for maximum emissions.

The spectrum analyzer is set to:

Tested frequency = Low, Middle, High Frequencies

Frequency Range = 30 MHz ~ 10th harmonic.

RBW and VBW = 1. Frequency range: 30MHz ~ 1GHz

RBW = 120KHz / VBW = \geq RBW

2. Frequency range: 1GHz ~ 10th harmonics

Peak mode: RBW = 1MHz / VBW = \geq RBW

Average mode: RBW = 1MHz / VBW = 10Hz

Detector function = Peak

Sweep = auto

Trace = max hold

- Measurement Data: **Comply**

Note 1: See next pages for actual measured data.

- Minimum Standard:

• FCC Part 15.209(a) and (b)

Frequency (MHz)	Limit (uV/m) @ 3m
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

• FCC Part 15.205 (a): Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	MHz	GHz	GHz
0.009 ~ 0.110	8.41425 ~ 8.41475	108 ~ 121.94	1300 ~ 1427	3600 ~ 4400	14.47 ~ 14.5
0.495 ~ 0.505	12.29 ~ 12.293	123 ~ 138	1435 ~ 1626.5	4.5 ~ 5.15	15.35 ~ 16.2
2.1735 ~ 2.1905	12.51975 ~	149.9 ~ 150.05	1645.5 ~ 1646.5	5.35 ~ 5.46	17.7 ~ 21.4
4.125 ~ 4.128	12.52025	156.52475 ~	1660 ~ 1710	7.25 ~ 7.75	22.01 ~ 23.12
4.17725 ~ 4.17775	12.57675 ~	156.52525	1718.8 ~ 1722.2	8.025 ~ 8.5	23.6 ~ 24.0
4.20725 ~ 4.20775	12.57725	156.7 ~ 156.9	2200 ~ 2300	9.0 ~ 9.2	31.2 ~ 31.8
6.215 ~ 6.218	13.36 ~ 13.41	162.0125 ~ 167.17	2310 ~ 2390	9.3 ~ 9.5	36.43 ~ 36.5
6.26775 ~ 6.26825	16.42 ~ 16.423	167.72 ~ 173.2	2483.5 ~ 2500	10.6 ~ 12.7	Above 38.6
6.31175 ~ 6.31225	16.69475 ~	240 ~ 285	2655 ~ 2900	13.25 ~ 13.4	
8.291 ~ 8.294	16.69525	322 ~ 335.4	3260 ~ 3267		
8.362 ~ 8.366	16.80425 ~	399.90 ~ 410	3332 ~ 3339		
8.37625 ~ 8.38675	16.80475	608 ~ 614	3345.8 ~ 3358		
	25.5 ~ 25.67	960 ~ 1240			
	37.5 ~ 38.25				
	73 ~ 74.6				
	74.8 ~ 75.2				

• **FCC Part 15.205(b):** The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

30MHz ~ 25GHz Radiated Spurious Emissions (Test Case 1)▪ **Lowest Channel**

Freq. (MHz)	ANT Pol	The worst case EUT Position	Detector Mode	Reading (dBuV)	T.F (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2345.440	V	Z axis	PK	52.83	-3.75	49.08	74.00	24.92
2388.240	V	Z axis	AV	39.05	-3.75	35.30	54.00	18.70
4824.210	H	Z axis	PK	47.33	5.89	53.22	74.00	20.78
4823.780	H	Z axis	AV	34.51	5.89	40.40	54.00	13.60

▪ **Middle Channel**

Freq. (MHz)	ANT Pol	The worst case EUT Position	Detector Mode	Reading (dBuV)	T.F (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4874.460	H	Z axis	PK	47.95	4.86	52.81	74.00	21.19
4874.660	H	Z axis	AV	34.59	4.86	39.45	54.00	14.55

▪ **Highest Channel**

Freq. (MHz)	ANT Pol	The worst case EUT Position	Detector Mode	Reading (dBuV)	T.F (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2495.759	V	Z axis	PK	54.19	-3.75	50.44	74.00	23.56
2496.815	V	Z axis	AV	38.34	-3.75	34.59	54.00	19.41
4924.730	H	Z axis	PK	47.51	6.34	53.85	74.00	20.15
4925.225	H	Z axis	AV	34.53	6.34	40.87	54.00	13.13

Note.

- No other spurious and harmonic emissions were reported greater than listed emissions on above table.
- Sample Calculation.
 $\text{Margin} = \text{Limit} - \text{Result}$ / $\text{Result} = \text{Reading} + \text{T.F}$ / $\text{T.F} = \text{AF} + \text{CL} - \text{AG}$
Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

30MHz ~ 25GHz Radiated Spurious Emissions (Test Case 2)▪ **Lowest Channel**

Freq. (MHz)	ANT Pol	The worst case EUT Position	Detector Mode	Reading (dBuV)	T.F (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2389.920	V	Z axis	PK	62.19	-3.75	58.44	74.00	15.56
2390.000	V	Z axis	AV	43.87	-3.75	40.12	54.00	13.88
4823.620	H	Z axis	PK	47.62	5.89	53.51	74.00	20.49
4823.230	H	Z axis	AV	34.43	5.89	40.32	54.00	13.68

▪ **Middle Channel**

Freq. (MHz)	ANT Pol	The worst case EUT Position	Detector Mode	Reading (dBuV)	T.F (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4873.475	H	Z axis	PK	47.44	4.86	52.30	74.00	21.70
4874.995	H	Z axis	AV	34.61	4.86	39.47	54.00	14.53

▪ **Highest Channel**

Freq. (MHz)	ANT Pol	The worst case EUT Position	Detector Mode	Reading (dBuV)	T.F (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2492.592	V	Z axis	PK	50.35	-3.75	46.60	74.00	27.40
2483.533	V	Z axis	AV	36.92	-3.75	33.17	54.00	20.83
4925.480	H	Z axis	PK	47.96	6.34	54.30	74.00	19.70
4924.585	H	Z axis	AV	34.47	6.34	40.81	54.00	13.19

Note.

1. No other spurious and harmonic emissions were reported greater than listed emissions on above table.
2. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$
Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

30MHz ~ 25GHz Radiated Spurious Emissions (Test Case 3)▪ **Lowest Channel**

Freq. (MHz)	ANT Pol	The worst case EUT Position	Detector Mode	Reading (dBuV)	T.F (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2389.920	V	Z axis	PK	62.96	-3.75	59.21	74.00	14.79
2390.000	V	Z axis	AV	45.77	-3.75	42.02	54.00	11.98
4824.275	H	Z axis	PK	47.01	5.89	52.90	74.00	21.10
4823.360	H	Z axis	AV	34.34	5.89	40.23	54.00	13.77

▪ **Middle Channel**

Freq. (MHz)	ANT Pol	The worst case EUT Position	Detector Mode	Reading (dBuV)	T.F (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4874.550	H	Z axis	PK	48.11	4.86	52.97	74.00	21.03
4874.885	H	Z axis	AV	34.60	4.86	39.46	54.00	14.54

▪ **Highest Channel**

Freq. (MHz)	ANT Pol	The worst case EUT Position	Detector Mode	Reading (dBuV)	T.F (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2485.068	V	Z axis	PK	50.26	-3.75	46.51	74.00	27.49
2483.500	V	Z axis	AV	37.26	-3.75	33.51	54.00	20.49
4924.140	H	Z axis	PK	48.03	6.34	54.37	74.00	19.63
4925.280	H	Z axis	AV	34.48	6.34	40.82	54.00	13.18

Note.

- No other spurious and harmonic emissions were reported greater than listed emissions on above table.
- Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$
Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

3.2.5 Transmitter Power Spectral Density

- Procedure:

The same method of determining the conducted output power shall be used to determine the power spectral density. If a peak output power is measured, then a peak power spectral density measurement is required. If an average output power is measured, then an average power spectral density measurement should be used. Use PSD Option 1 if Power output Option 1 was used. Use PSD Option 2 if power output Option 2 was used.

This test item was measured with PSD Option 1.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest Frequencies

Span = 900KHz

RBW = 3KHz

VBW = \geq RBW

Sweep = 300s

Trace = max hold

- Measurement Data: **Comply**

Test Mode	Frequency	Test Results (dBm)
Test case 1	Lowest	-15.66
	Middle	-16.76
	Highest	-18.65
Test case 2	Lowest	-17.70
	Middle	-17.23
	Highest	-19.66
Test case 3	Lowest	-16.80
	Middle	-16.90
	Highest	-18.72


Note 1: See next pages for actual measured spectrum plots.

- Minimum Standard:

The transmitter power density average over 1-second interval shall not be greater than 8 dBm in any 3kHz BW.


Transmitter Power Spectral Density

Lowest Frequency & Test Case 1

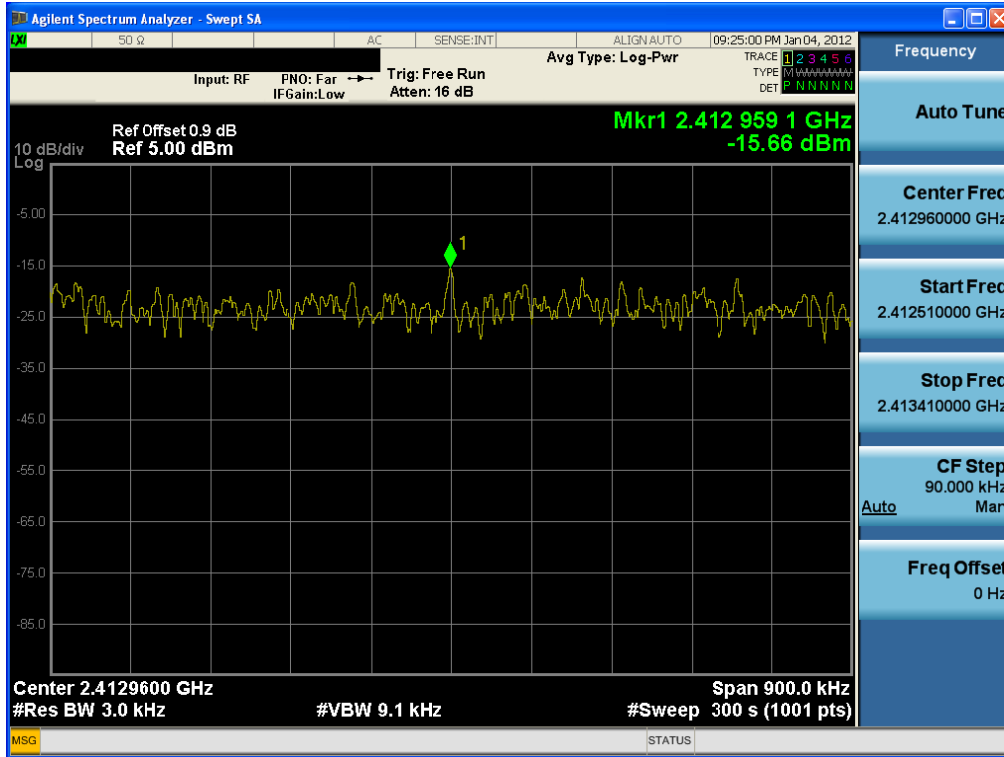


Transmitter Power Spectral Density

Middle Frequency & Test Case 1

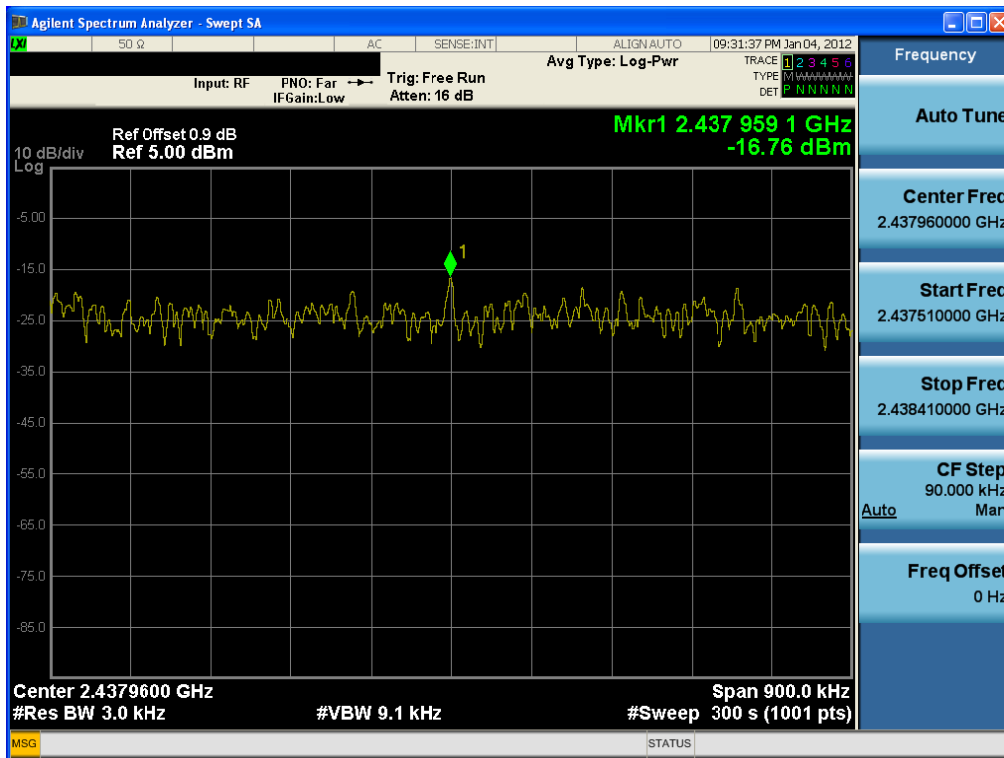


Transmitter Power Spectral Density

Highest Frequency & Test Case 1

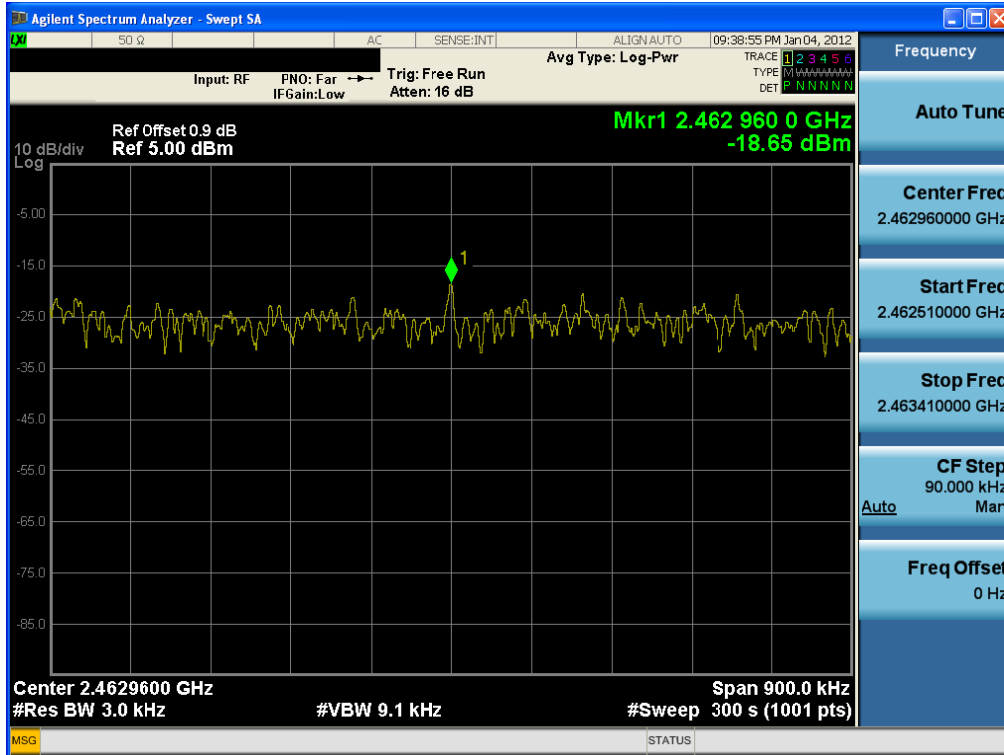


Transmitter Power Spectral Density

Lowest Frequency & Test Case 2

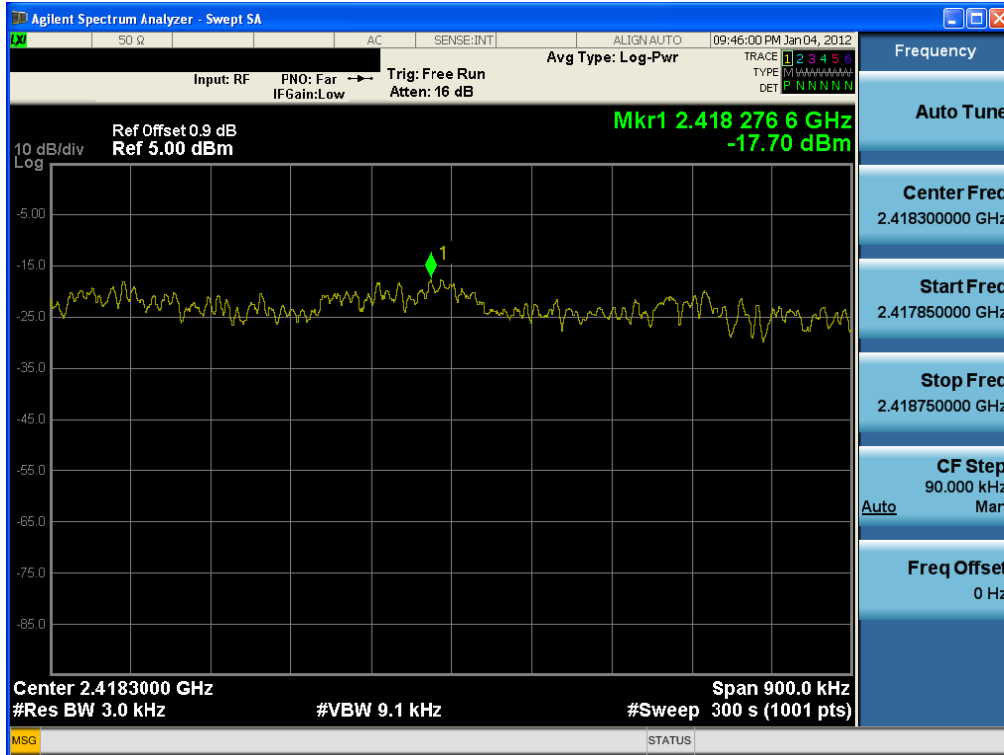


Transmitter Power Spectral Density

Middle Frequency & Test Case 2

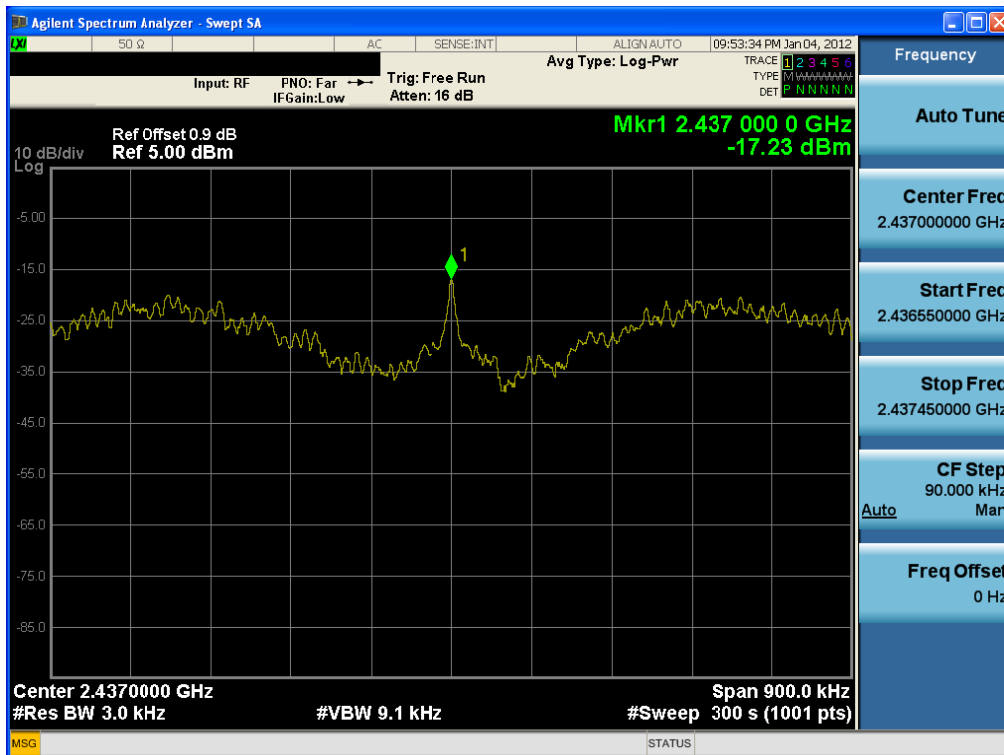


Transmitter Power Spectral Density

Highest Frequency & Test Case 2

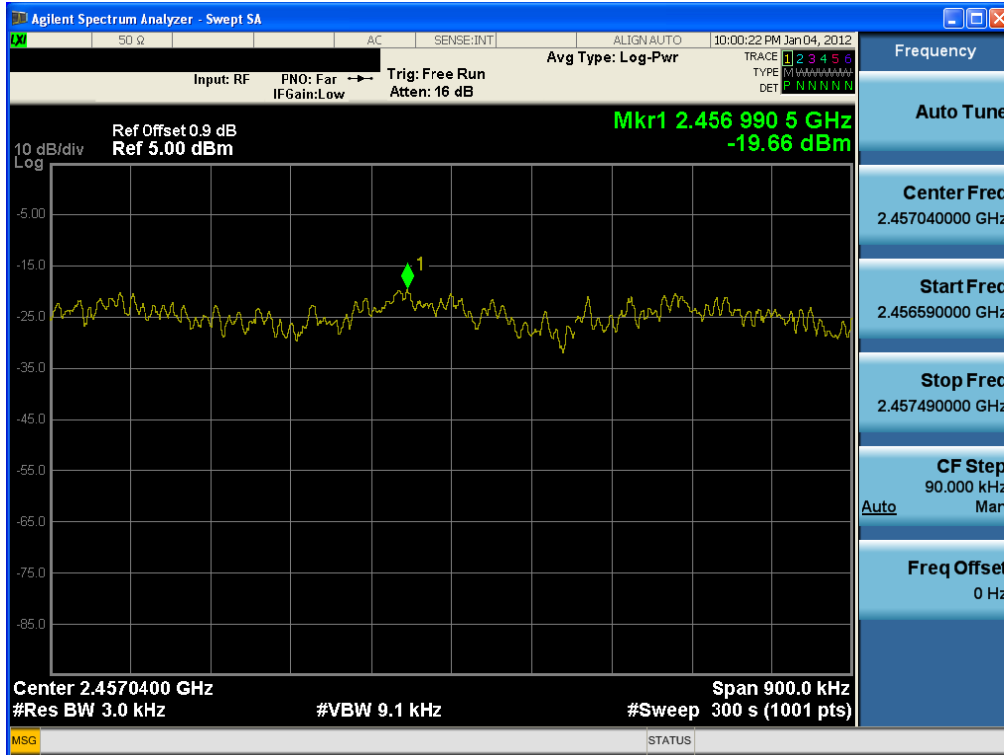


Transmitter Power Spectral Density

Lowest Frequency & Test Case 3

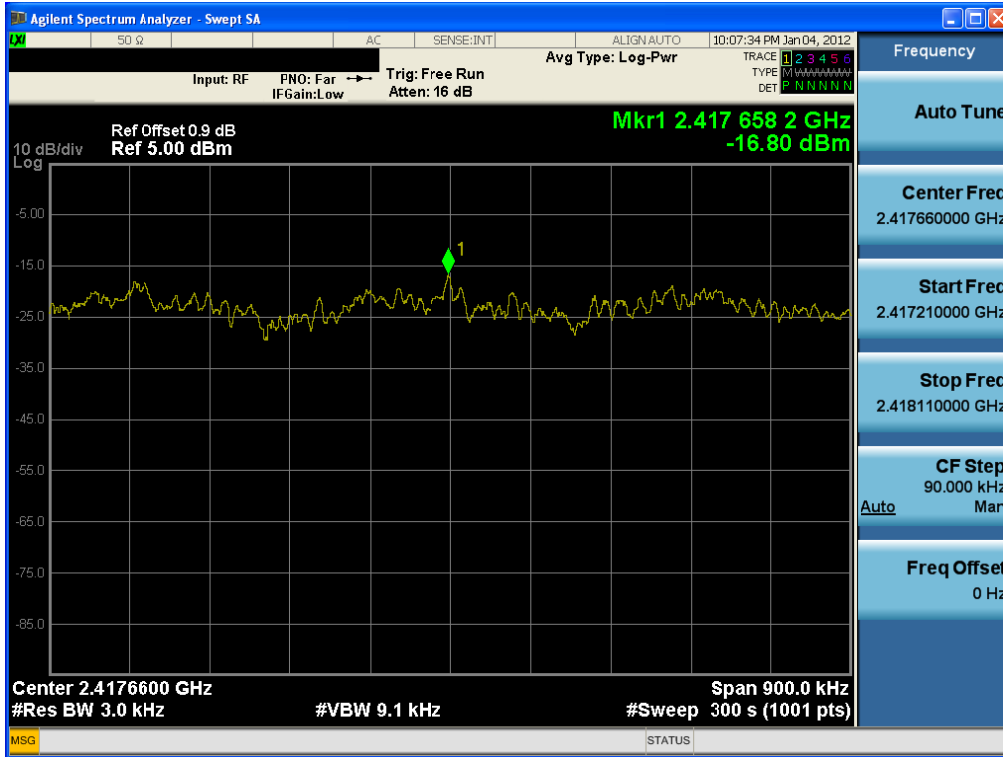


Transmitter Power Spectral Density

Middle Frequency & Test Case 3

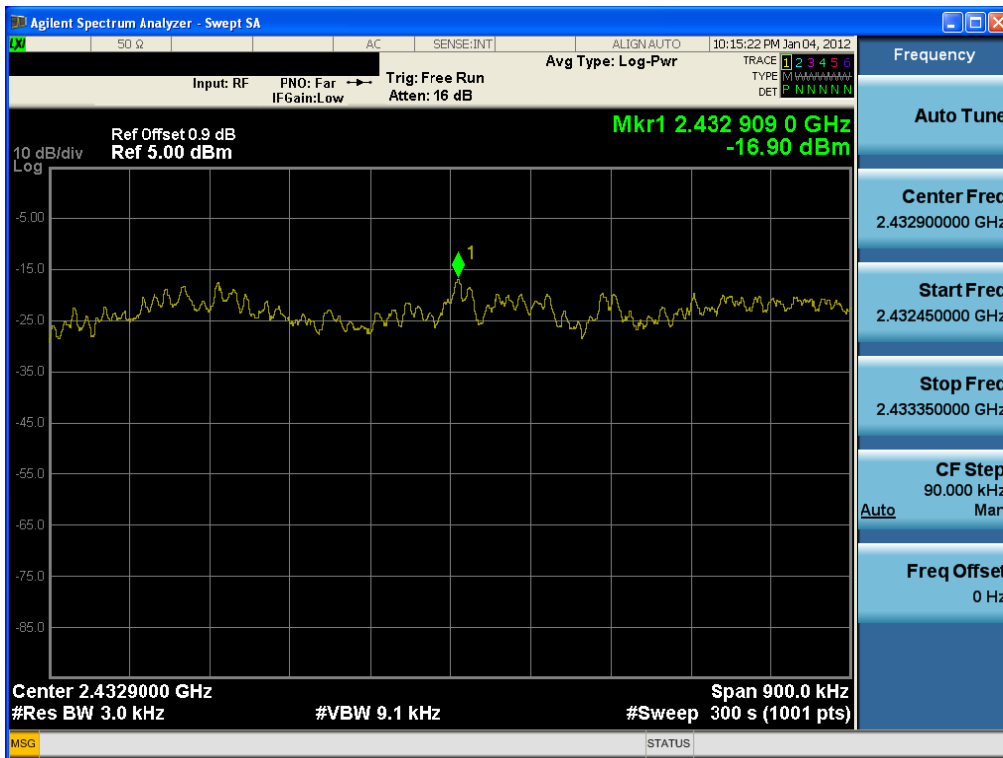

Transmitter Power Spectral Density

Highest Frequency & Test Case 3

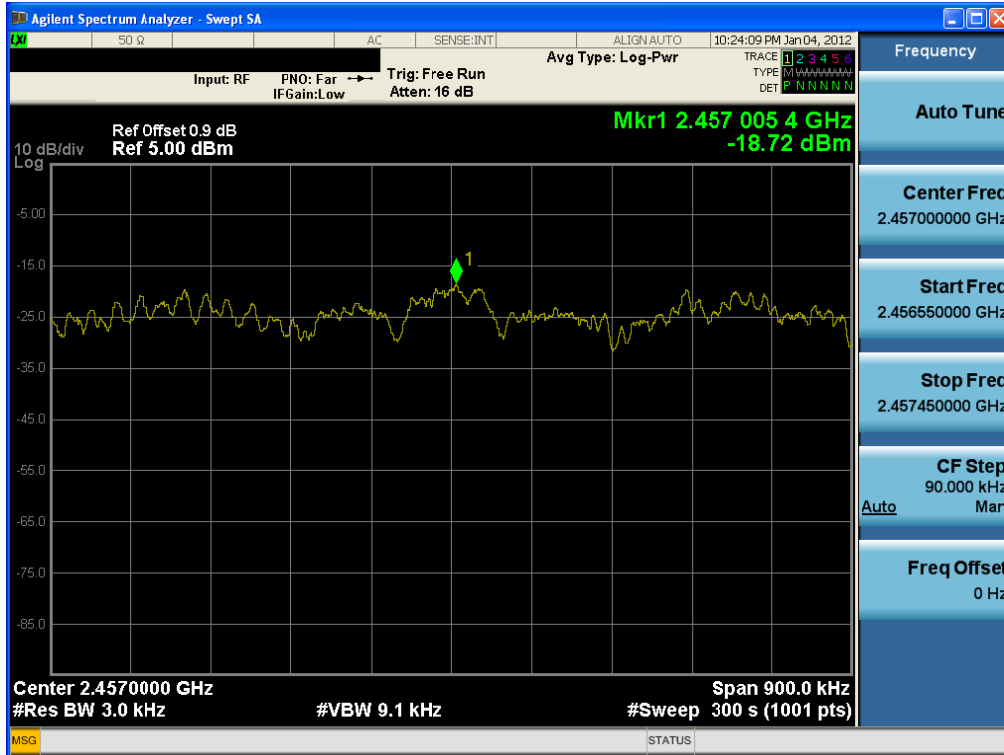

3.2.6 AC Conducted Emissions

- Procedure:

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. Emissions closest to the limit are measured in the quasi-peak mode (QP) and average mode (AV) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

- Measurement Data: Comply

Note 1: See next pages for actual measured spectrum plots and data.

- Minimum Standard: FCC Part 15.207(a)/EN 55022

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

AC Line Conducted Emissions (Graph)



Test Mode: 802.11b



Results of Conducted Emission

Digital EMC
Date : 2012-01-06

Model No.	: IMW-C910W	Reference No.	:
Type	:	Power Supply	: 120 V 60 Hz
Serial No.	:	Temp/Humi.	: 24 °C 40 % R.H.
Test Condition	: 802.11b	Operator	: S.K.RYU
Memo	:		
LIMIT	: CISPR22_B QP		
	: CISPR22_B AV		

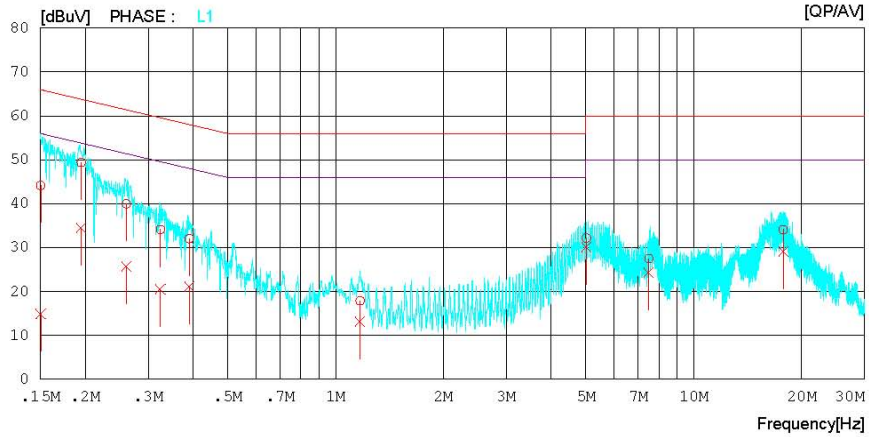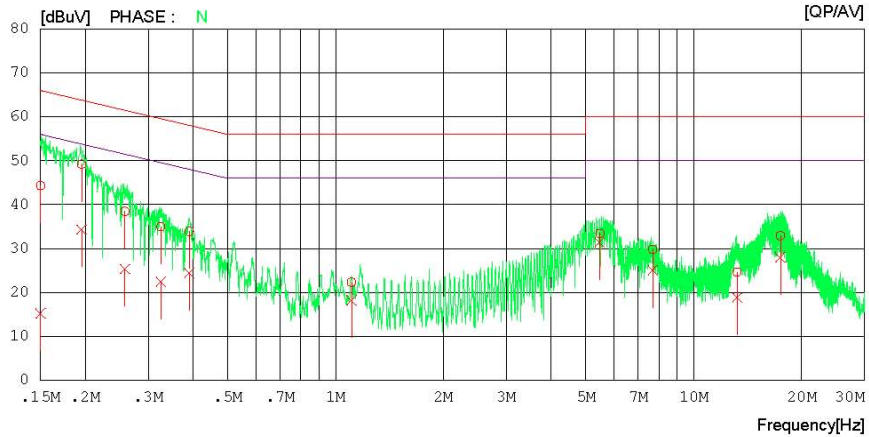

AC Line Conducted Emissions (Data List)

Test Mode: 802.11b

Results of Conducted EmissionDigital EMC
Date : 2012-01-06

Model No.	: IMW-C910W	Reference No.	:
Type	:	Power Supply	: 120 V 60 Hz
Serial No.	:	Temp/Humi.	: 24 'C 40 % R.H.
Test Condition	: 802.11b	Operator	: S.K.RYU

Memo :

LIMIT : CISPR22_B QP
CISPR22_B AV

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.15018	44.1	15.0	0.2	44.3	15.2	66.0	56.0	21.7	40.8	N
2	0.19545	49.1	34.2	0.1	49.2	34.3	63.8	53.8	14.6	19.5	N
3	0.25833	38.4	25.2	0.1	38.5	25.3	61.5	51.5	23.0	26.2	N
4	0.32559	34.9	22.4	0.1	35.0	22.5	59.6	49.6	24.6	27.1	N
5	0.39071	33.7	24.2	0.2	33.9	24.4	58.0	48.0	24.1	23.6	N
6	1.10850	22.1	18.0	0.2	22.3	18.2	56.0	46.0	33.7	27.8	N
7	5.47000	33.1	31.0	0.4	33.5	31.4	60.0	50.0	26.5	18.6	N
8	7.68550	29.3	24.5	0.5	29.8	25.0	60.0	50.0	30.2	25.0	N
9	13.22650	23.7	17.9	0.9	24.6	18.8	60.0	50.0	35.4	31.2	N
10	17.45750	31.9	27.0	1.0	32.9	28.0	60.0	50.0	27.1	22.0	N
11	0.15024	43.9	14.7	0.2	44.1	14.9	66.0	56.0	21.9	41.1	L1
12	0.19505	49.3	34.4	0.1	49.4	34.5	63.8	53.8	14.4	19.3	L1
13	0.26091	39.9	25.6	0.1	40.0	25.7	61.4	51.4	21.4	25.7	L1
14	0.32450	34.0	20.5	0.1	34.1	20.6	59.6	49.6	25.5	29.0	L1
15	0.39050	31.8	20.9	0.2	32.0	21.1	58.1	48.1	26.1	27.0	L1
16	1.17100	17.7	13.0	0.2	17.9	13.2	56.0	46.0	38.1	32.8	L1
17	5.01500	31.8	29.7	0.4	32.2	30.1	60.0	50.0	27.8	19.9	L1
18	7.49050	27.0	23.8	0.5	27.5	24.3	60.0	50.0	32.5	25.7	L1
19	17.77700	33.1	28.1	1.0	34.1	29.1	60.0	50.0	25.9	20.9	L1

AC Line Conducted Emissions (Graph)



Test Mode: 802.11g



Results of Conducted Emission

Digital EMC
Date : 2012-01-06

Model No.	: IMW-C910W	Reference No.	:	
Type	:	Power Supply	:	120 V 60 Hz
Serial No.	:	Temp/Humi.	:	24 °C 40 % R.H.
Test Condition	: 802.11g	Operator	:	S.K.RYU
Memo	:			
LIMIT : CISPR22_B QP				
CISPR22_B AV				

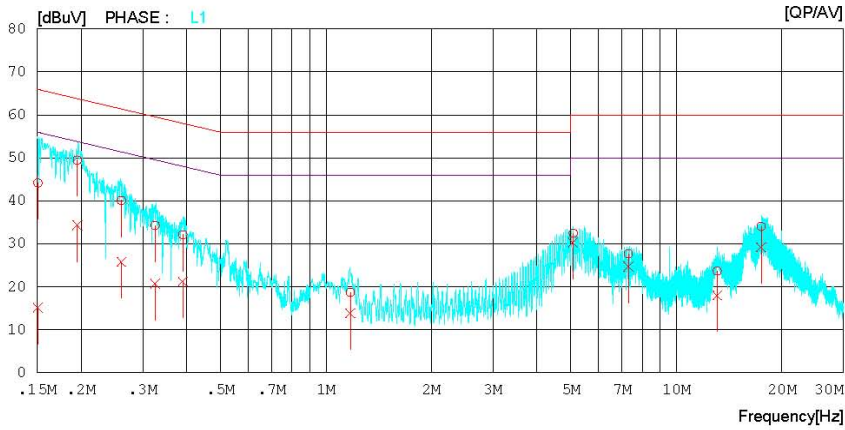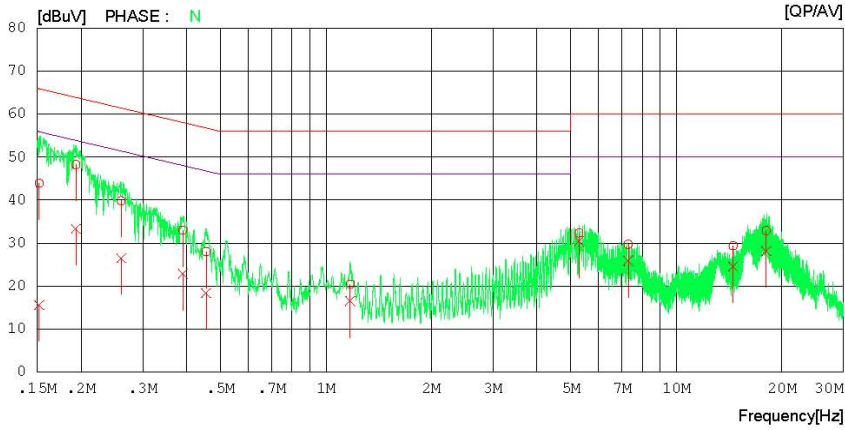

AC Line Conducted Emissions (Data List)

Test Mode: 802.11g

Results of Conducted EmissionDigital EMC
Date : 2012-01-06

Model No.	: IMW-C910W	Reference No.	:
Type	:	Power Supply	: 120 V 60 Hz
Serial No.	:	Temp/Humi.	: 24 'C 40 % R.H.
Test Condition	: 802.11g	Operator	: S.K.RYU

Memo :

LIMIT : CISPR22_B QP
CISPR22_B AV

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.15190	43.7	15.3	0.2	43.9	15.5	65.9	55.9	22.0	40.4	N
2	0.19350	48.1	33.2	0.1	48.2	33.3	63.9	53.9	15.7	20.6	N
3	0.26051	39.7	26.4	0.1	39.8	26.5	61.4	51.4	21.6	24.9	N
4	0.39083	32.8	22.6	0.2	33.0	22.8	58.0	48.0	25.0	25.2	N
5	0.45526	27.9	18.2	0.1	28.0	18.3	56.8	46.8	28.8	28.5	N
6	1.17250	20.2	16.3	0.2	20.4	16.5	56.0	46.0	35.6	29.5	N
7	5.27650	31.9	30.0	0.4	32.3	30.4	60.0	50.0	27.7	19.6	N
8	7.29400	29.2	25.4	0.5	29.7	25.9	60.0	50.0	30.3	24.1	N
9	14.52600	28.5	23.6	0.9	29.4	24.5	60.0	50.0	30.6	25.5	N
10	18.04350	31.8	27.0	1.1	32.9	28.1	60.0	50.0	27.1	21.9	N
11	0.15071	44.0	15.0	0.2	44.2	15.2	66.0	56.0	21.8	40.8	L1
12	0.19530	49.4	34.2	0.1	49.5	34.3	63.8	53.8	14.3	19.5	L1
13	0.26081	40.0	25.7	0.1	40.1	25.8	61.4	51.4	21.3	25.6	L1
14	0.32563	34.2	20.6	0.1	34.3	20.7	59.6	49.6	25.3	28.9	L1
15	0.39065	32.0	21.1	0.2	32.2	21.3	58.0	48.0	25.8	26.7	L1
16	1.17350	18.5	13.7	0.2	18.7	13.9	56.0	46.0	37.3	32.1	L1
17	5.08150	32.0	29.9	0.4	32.4	30.3	60.0	50.0	27.6	19.7	L1
18	7.29450	27.2	24.2	0.5	27.7	24.7	60.0	50.0	32.3	25.3	L1
19	13.08900	22.8	17.1	0.9	23.7	18.0	60.0	50.0	36.3	32.0	L1
20	17.45750	33.0	28.2	1.0	34.0	29.2	60.0	50.0	26.0	20.8	L1

AC Line Conducted Emissions (Graph)



Test Mode: 802.11n HT20



Results of Conducted Emission

Digital EMC
Date : 2012-01-06

Model No.	: IMW-C910W	Reference No.	:	
Type	:	Power Supply	:	120 V 60 Hz
Serial No.	:	Temp/Humi.	:	23 °C 40 % R.H.
Test Condition	: 802.11n	Operator	:	S.K.RYU
Memo	:			
LIMIT	: CISPR22_B QP			
	: CISPR22_B AV			

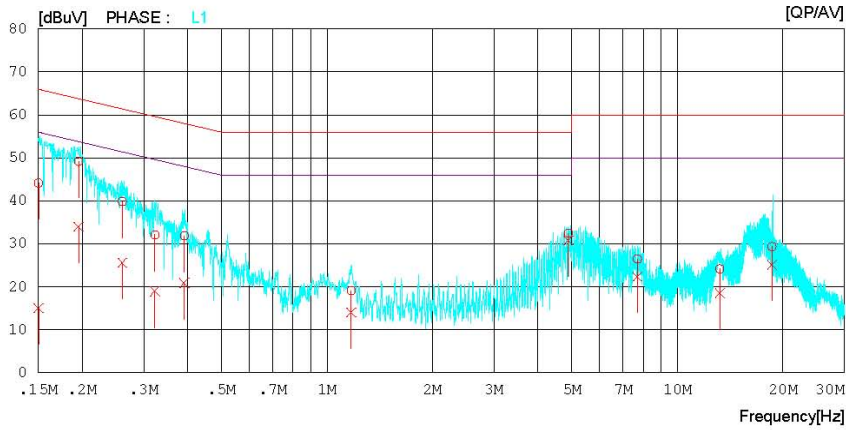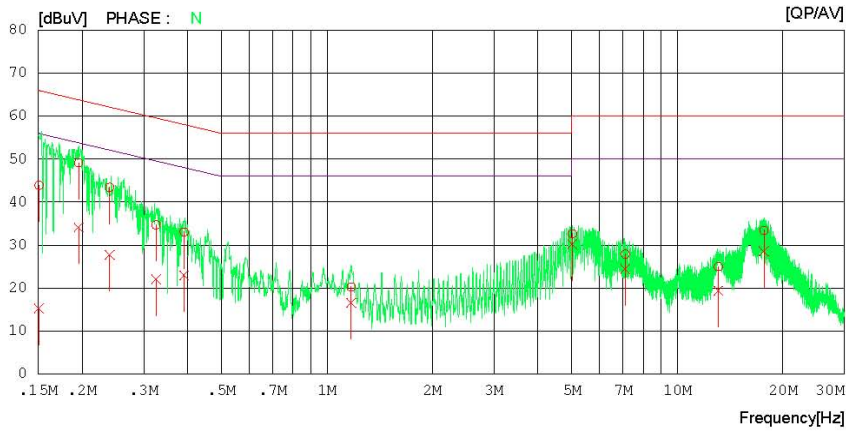

AC Line Conducted Emissions (Data List)

Test Mode: 802.11n HT20

Results of Conducted Emission

Digital EMC
Date : 2012-01-06

Model No.	: IMW-C910W	Reference No.	:
Type	:	Power Supply	: 120 V 60 Hz
Serial No.	:	Temp/Humi.	: 23 'C 40 % R.H.
Test Condition	: 802.11n	Operator	: S.K.RYU

Memo :

LIMIT : CISPR22_B QP
CISPR22_B AV

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.15085	43.7	15.0	0.2	43.9	15.2	66.0	56.0	22.1	40.8	N
2	0.19565	49.0	34.0	0.1	49.1	34.1	63.8	53.8	14.7	19.7	N
3	0.23991	43.3	27.6	0.1	43.4	27.7	62.1	52.1	18.7	24.4	N
4	0.32550	34.6	21.9	0.1	34.7	22.0	59.6	49.6	24.9	27.6	N
5	0.39114	32.8	22.8	0.2	33.0	23.0	58.0	48.0	25.0	25.0	N
6	1.17250	20.0	16.4	0.2	20.2	16.6	56.0	46.0	35.8	29.4	N
7	5.01800	32.2	29.8	0.4	32.6	30.2	60.0	50.0	27.4	19.8	N
8	7.10350	27.4	23.9	0.5	27.9	24.4	60.0	50.0	32.1	25.6	N
9	13.09400	24.1	18.5	0.9	25.0	19.4	60.0	50.0	35.0	30.6	N
10	17.65500	32.4	27.6	1.0	33.4	28.6	60.0	50.0	26.6	21.4	N
11	0.15025	43.9	14.9	0.2	44.1	15.1	66.0	56.0	21.9	40.9	L1
12	0.19554	49.1	33.9	0.1	49.2	34.0	63.8	53.8	14.6	19.8	L1
13	0.26069	39.7	25.5	0.1	39.8	25.6	61.4	51.4	21.6	25.8	L1
14	0.32309	32.0	18.9	0.1	32.1	19.0	59.6	49.6	27.5	30.6	L1
15	0.39173	31.7	20.7	0.2	31.9	20.9	58.0	48.0	26.1	27.1	L1
16	1.17250	18.9	13.9	0.2	19.1	14.1	56.0	46.0	36.9	31.9	L1
17	4.88700	32.1	30.4	0.4	32.5	30.8	56.0	46.0	23.5	15.2	L1
18	7.69100	26.0	21.9	0.5	26.5	22.4	60.0	50.0	33.5	27.6	L1
19	13.22550	23.3	17.6	0.9	24.2	18.5	60.0	50.0	35.8	31.5	L1
20	18.63550	28.3	24.1	1.1	29.4	25.2	60.0	50.0	30.6	24.8	L1

3.2.7 Antenna Requirements

- Procedure:

Describe how the EUT complies with the requirement that either its antenna is permanently attached, or that it employs a unique antenna connector, for every antenna proposed for use with the EUT.

- Conclusion: **Comply**

The antenna is permanently attached by soldering. (Refer to Internal Photo file.)

- Minimum Standard:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions.

APPENDIX

TEST EQUIPMENT FOR TESTS

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment.

	Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
<input type="checkbox"/>	Spectrum Analyzer	Agilent	E4440A	11/09/30	12/09/30	MY45304199
<input checked="" type="checkbox"/>	Spectrum Analyzer	Rohde Schwarz	FSQ26	12/01/09	13/01/09	200445
<input type="checkbox"/>	Spectrum analyzer	Agilent	E4404B	11/03/08	12/03/08	US41061134
<input type="checkbox"/>	Spectrum Analyzer(RE)	H.P	8563E	11/10/04	12/10/04	3551A04634
<input checked="" type="checkbox"/>	MXA Signal Analyzer	Agilent Technologies, Inc	N9020A	12/01/09	13/01/09	MY49100833
<input type="checkbox"/>	Power Meter	H.P	EPM-442A	11/07/01	12/07/01	GB37170413
<input type="checkbox"/>	Power Sensor	H.P	8481A	11/07/01	12/07/01	3318A96332
<input checked="" type="checkbox"/>	Wideband Power Sensor	Rohde Schwarz	NRP-Z81	11/06/04	12/06/04	1137.9009.02-101001
<input checked="" type="checkbox"/>	Virtual Power Meter(S/W)	Rohde Schwarz	R&S Power Viewer Plus	-	-	V 4.1.0
<input type="checkbox"/>	Power Divider	Agilent	11636B	11/09/30	12/09/30	56471
<input type="checkbox"/>	4-Way Power Divider	ET Industries	D-0526-4	11/12/01	12/12/01	210195001
<input type="checkbox"/>	Power Splitter	Anritsu	K241B	11/09/30	12/09/30	020611
<input type="checkbox"/>	Power Splitter	Anritsu	K241B	11/07/01	12/07/01	017060
<input type="checkbox"/>	Power Splitters & Dividers	Aeroflex/Weinschel	1594	11/02/21	12/02/21	1177
<input type="checkbox"/>	Frequency Counter	H.P	5342A	11/07/01	12/07/01	2119A04450
<input type="checkbox"/>	TEMP & HUMIDITY Chamber	JISCO	KR-100/J-RHC2	11/09/30	12/09/30	30604493/021031
<input checked="" type="checkbox"/>	Digital Multimeter	H.P	34401A	11/03/07	12/03/07	3146A13475, US36122178
<input type="checkbox"/>	Multifunction Synthesizer	HP	8904A	11/10/06	12/10/06	3633A08404
<input checked="" type="checkbox"/>	Signal Generator	Rohde Schwarz	SMR20	11/03/08	12/03/08	101251
<input checked="" type="checkbox"/>	Signal Generator	H.P	ESG-3000A	11/07/01	12/07/01	US37230529
<input type="checkbox"/>	Vector Signal Generator	Rohde Schwarz	SMJ100A	12/01/09	13/01/09	100148
<input type="checkbox"/>	Vector Signal Generator	Rohde Schwarz	SMBV100A	12/01/09	13/01/09	255571
<input type="checkbox"/>	Audio Analyzer	H.P	8903B	11/07/02	12/07/02	3011A09448
<input type="checkbox"/>	Modulation Analyzer	H.P	8901B	11/07/01	12/07/01	3028A03029
<input type="checkbox"/>	8960 Series 10 Wireless Comms. Test Set	Agilent	E5515C	11/03/07	12/03/07	GB43461134
<input type="checkbox"/>	Universal Radio communication Tester	Rohde Schwarz	CMU200	11/03/07	12/03/07	106760
<input type="checkbox"/>	Bluetooth Tester	TESCOM	TC-3000B	11/07/01	12/07/01	3000B000268
<input type="checkbox"/>	Thermo hygrometer	BODYCOM	BJ5478	11/01/13	12/01/13	090205-3
<input checked="" type="checkbox"/>	Thermo hygrometer	BODYCOM	BJ5478	11/01/13	12/01/13	090205-2
<input type="checkbox"/>	Thermo hygrometer	BODYCOM	BJ5478	11/01/13	12/01/13	090205-4
<input type="checkbox"/>	AC Power supply	DAEKWANG	5KVA	11/03/08	12/03/08	20060321-1
<input type="checkbox"/>	DC Power Supply	HP	6622A	11/03/07	12/03/07	3448A03760
<input checked="" type="checkbox"/>	DC Power Supply	HP	6633A	11/03/07	12/03/07	3524A06634
<input type="checkbox"/>	DC Power Supply	Protek	PWS-3010D	11/09/30	12/09/30	4072702
<input type="checkbox"/>	DC Power Supply	SM techno	SDP30-5D	11/05/20	12/05/20	305DKA013
<input type="checkbox"/>	BAND Reject Filter	Microwave Circuits	N0308372	11/09/30	12/09/30	3125-01DC0352
<input type="checkbox"/>	BAND Reject Filter	Wainwright	WRCG1750	11/09/30	12/09/30	2
<input type="checkbox"/>	High-Pass Filter	ANRITSU	MP526D	11/09/30	12/09/30	M27756

	Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
<input type="checkbox"/>	High-pass filter	Wainwright	WHNX2.1	11/09/30	12/09/30	1
<input checked="" type="checkbox"/>	High-pass filter	Wainwright	WHNX3.0	11/09/30	12/09/30	9
<input type="checkbox"/>	High-pass filter	Wainwright	WHNX5.0	11/09/19	12/09/19	8
<input type="checkbox"/>	High-Pass Filter	Wainwright	WHKX8.5	11/09/19	12/09/19	1
<input type="checkbox"/>	High-Pass Filter	Wainwright	WHKX1.0	11/09/30	12/09/30	9
<input type="checkbox"/>	Tunable Notch Filter	Wainwright	WRCT800.0 /960.0-0.2/40-8SSK	N/A	N/A	32
<input type="checkbox"/>	Tunable Notch Filter	Wainwright	WRCD1700.0 /2000.0-0.2/40-10SSK	N/A	N/A	53
<input type="checkbox"/>	Tunable Notch Filter	Wainwright	WRCT1900.0/ 2200.0-5/40-10SSK	N/A	N/A	30
<input type="checkbox"/>	HORN ANT	ETS	3115	11/09/06	12/09/06	21097
<input checked="" type="checkbox"/>	HORN ANT	ETS	3115	11/03/22	12/03/22	6419
<input checked="" type="checkbox"/>	HORN ANT	A.H.Systems	SAS-574	11/03/25	13/03/25	154
<input type="checkbox"/>	HORN ANT	A.H.Systems	SAS-574	11/03/25	13/03/25	155
<input type="checkbox"/>	HORN ANT	SCHWARZBECK	BBHA9120A	10/04/13	12/04/13	322
<input type="checkbox"/>	Dipole Antenna	Schwarzbeck	VHA9103	11/11/22	12/11/22	2116
<input type="checkbox"/>	Dipole Antenna	Schwarzbeck	VHA9103	11/11/22	12/11/22	2117
<input type="checkbox"/>	Dipole Antenna	Schwarzbeck	UHA9105	11/11/22	12/11/22	2261
<input type="checkbox"/>	Dipole Antenna	Schwarzbeck	UHA9105	11/11/22	12/11/22	2262
<input type="checkbox"/>	LOOP Antenna	ETS	6502	10/10/29	12/10/29	3471
<input type="checkbox"/>	Coaxial Fixed Attenuators	Agilent	8491B	11/07/02	12/07/02	MY39260700
<input type="checkbox"/>	Attenuator (3dB)	WEINSCHL	56-3	11/09/30	12/09/30	Y2342
<input type="checkbox"/>	Attenuator (3dB)	WEINSCHL	56-3	11/09/30	12/09/30	Y2370
<input type="checkbox"/>	Attenuator (10dB)	WEINSCHL	23-10-34	11/09/30	12/09/30	BP4386
<input type="checkbox"/>	Attenuator (10dB)	WEINSCHL	23-10-34	12/01/09	13/01/09	BP4387
<input type="checkbox"/>	Attenuator (10dB)	WEINSCHL	86-10-11	11/09/30	12/09/30	446
<input type="checkbox"/>	Attenuator (10dB)	WEINSCHL	86-10-11	11/09/30	12/09/30	408
<input type="checkbox"/>	Attenuator (20dB)	WEINSCHL	86-20-11	11/09/30	12/09/30	432
<input type="checkbox"/>	Attenuator (30dB)	JFW	50FH-030-300	11/03/07	12/03/07	060320-1
<input type="checkbox"/>	Attenuator (40dB)	WEINSCHL	57-40-33	11/09/30	12/09/30	NN837
<input type="checkbox"/>	Termination	H.P	HP-909D	11/07/02	12/07/02	02750
<input type="checkbox"/>	Termination	H.P	HP-909D	11/07/02	12/07/02	02702
<input type="checkbox"/>	Type N Coaxial CIRCULATOR	NOVA MICROWAVE	0088CAN	11/07/01	12/07/01	788
<input type="checkbox"/>	Type N Coaxial CIRCULATOR	NOVA MICROWAVE	0185CAN	11/07/01	12/07/01	790
<input type="checkbox"/>	Amplifier (30dB)	Agilent	8449B	11/03/07	12/03/07	3008A01590
<input checked="" type="checkbox"/>	Amplifier (30dB)	H.P	8449B	11/03/07	12/03/07	3008A00370
<input type="checkbox"/>	Amplifier	EMPOWER	BBS3Q7ELU	11/09/30	12/09/30	1020
<input type="checkbox"/>	RF Power Amplifier	OPHIRRF	5069F	11/07/01	12/07/01	1006
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	R&S	ESU	12/01/09	13/01/09	100014

	Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
<input checked="" type="checkbox"/>	BILOG ANTENNA	SCHAFFNER	CBL6112B	10/07/14	12/07/14	2737
<input checked="" type="checkbox"/>	Amplifier (22dB)	H.P	8447E	12/01/09	13/01/09	2945A02865
<input type="checkbox"/>	EMI TEST RECEIVER	R&S	ESCI	11/03/08	12/03/08	100364
<input type="checkbox"/>	BICONICAL ANT.	Schwarzbeck	VHA 9103	10/11/29	12/11/29	91032789
<input type="checkbox"/>	LOG-PERIODIC ANT.	Schwarzbeck	UHALP9108A1	10/11/29	12/11/29	1098
<input type="checkbox"/>	BICONICAL ANT.	Schwarzbeck	VHA 9103	10/12/21	12/12/21	91031946
<input type="checkbox"/>	LOG-PERIODIC ANT.	Schwarzbeck	UHALP9108A1	10/07/07	12/07/07	0590
<input type="checkbox"/>	Low Noise Pre Amplifier	TSJ	MLA-100K01-B01-2	11/03/07	12/03/07	1252741
<input type="checkbox"/>	Low Noise Pre Amplifier	TSJ	MLA-00108-B02-36	12/01/09	13/01/09	1518831
<input type="checkbox"/>	Amplifier (25dB)	Agilent	8447D	11/03/07	12/03/07	2944A10144
<input type="checkbox"/>	Amplifier (25dB)	Agilent	8447D	11/07/01	12/07/01	2648A04922
<input type="checkbox"/>	Spectrum Analyzer(CE)	H.P	8591E	11/03/07	12/03/07	3649A05889
<input type="checkbox"/>	LISN	Kyoritsu	KNW-407	12/01/09	13/01/09	8-317-8
<input type="checkbox"/>	LISN	Kyoritsu	KNW-242	11/07/02	12/07/02	8-654-15
<input type="checkbox"/>	CVCF	NF Electronic	4420	11/09/15	12/19/15	304935/4420023
<input checked="" type="checkbox"/>	50 ohm Terminator	HME	CT-01	12/01/09	13/01/09	N/A
<input type="checkbox"/>	RFI/FIELD Intensity Meter	Kyoritsu	KNM-2402	11/07/02	12/07/02	4N-170-3
<input checked="" type="checkbox"/>	EMI Test Receiver	R&S	ECSI	11/03/08	12/03/08	100364
<input checked="" type="checkbox"/>	LISN	R&S	ESH2-Z5	11/09/30	12/09/30	8287391006
<input checked="" type="checkbox"/>	CVCF	NF Electronic	4420	11/03/08	12/03/08	304935/337980
<input checked="" type="checkbox"/>	RFI/FIELD Intensity Meter	ES4152	424059	11/09/30	12/09/30	424059
<input type="checkbox"/>	Wideband Radio Communication Tester	R&S	CMW500	11/09/30	12/09/30	100989