

Test Report of FCC Part 15 C for FCC Certificate

On Behalf of

China Industries Ltd T/A Wow! Stuff

Product description: Stunt Buggy Xtreme

Model No.: TX-1013

FCC ID: YCR-TX-1013H

Prepared for: China Industries Ltd T/A Wow! Stuff

Creative Industries Centre, Wolverhampton Science Park,
Wolverhampton, WV10 9TG, UK.

Prepared by: Bontek Compliance Testing Laboratory Ltd

1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East
Road, Nanshan, Shenzhen, China

Tel: 86-755-86337020

Fax: 86-755-86337028


Report No.: BCT14CR046E

Issue Date: March 21, 2014

Test Date: March 11-21, 2014

Test by:

Reviewed By:

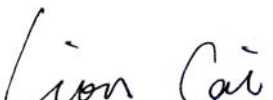
Lion Cai


Owen Yang

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1 Product Description for Equipment Under Test (EUT).....	3
1.2 Test Standards.....	4
1.3 Test Methodology	4
1.4 Test Facility.....	4
2. SYSTEM TEST CONFIGURATION	5
2.1 EUT Configuration	5
2.2 EUT Exercise	5
2.3 General Test Procedures	5
2.4 Measurement Uncertainty	5
2.5 Test Equipment List and Details.....	6
3. SUMMARY OF TEST RESULTS	6
4. DISTURBANCE VOLTAGE AT THE MAINS TERMINALS	7
4.1 Measurement Uncertainty	7
4.2 Applicable Standard.....	7
4.3 Test Description	7
5. RADIATED DISTURBANCES.....	8
5.1 Measurement Uncertainty	8
5.2 Limit of Radiated Disturbances	8
5.3 EUT Setup	8
5.4 Test Receiver Setup	8
5.5 Test Procedure	9
5.6 Corrected Amplitude & Margin Calculation	9
5.7 Radiated Emissions Test Result	10
6. 20dB Bandwidth	11
6.1 Applicable Standard.....	11
6.2 EUT Setup	11
6.3 Test Equipment List and Details.....	11
6.4 Test Procedure	11
6.5 Emissions within Band Edges Test Result.....	11
7. ANTENNA REQUIREMENT.....	13
7.1 Standard Applicable.....	13
7.2 Antenna Connected Construction	13

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: **China Industries Ltd T/A Wow! Stuff**

Address of applicant: Creative Industries Centre, Wolverhampton Science Park,
Wolverhampton, WV10 9TG, UK.

Manufacturer: **GUANGDONG YINRUN INDUSTRY CO., LTD**

Address of manufacturer: YINRUN GARDEN, LAIMEI IND. ZONE, CHENGHAI,
SHANTOU CITY

General Description of E.U.T

Items	Description
EUT Description:	Stunt Buggy Xtreme
Trade Name:	TX-Juice
Model No.:	TX-1013
Rated Voltage	DC 9V from Battery
Frequency range	27.145MHz
Number of channels	1
Product Class:	Part 15 Security/Remote Control Transmitter

Remark: * The test data gathered are from the production sample provided by the manufacturer.

1.2 Test Standards

The following Declaration of Conformity report of EUT is prepared in accordance with

FCC Rules and Regulations Part 15 Subpart C Section 15.227

The objective of the manufacturer is to demonstrate compliance with the described above standards.

1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 - 2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4 Test Facility

All measurement required was performed at laboratory of Shenzhen CTL Testing Technology Co., Ltd. at Floor 1-A, Baisha Technology Park, No. 3011, Shahe Road, Nanshan District, Shenzhen, China 518055.

The test facility is recognized, certified, or accredited by the following organizations:

FCC – Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December, 2013.

2. SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The calibrated antennas used to sample the radiated field strength are mounted on a non-conductive, motorized antenna mast 3 or 10 meters from the leading edge of the turntable.

2.3 General Test Procedures

Conducted Emissions: The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 7.1 of ANSI C63.4-2003 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak detector mode.

Radiated Emissions: The EUT is placed on a turntable, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4-2003.

2.4 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Power Line Conducted Emission	+/- 2.3 dB
Radiated Emission	+/- 3.4 dB

Uncertainty figures are valid to a confidence level of 95%.

2.5 Test Equipment List and Details

Test equipments list of Bontek Compliance Testing Laboratory Ltd.

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2013/07/12	2014/07/11
EMI Test Receiver	R&S	ESCI3	103710	2013/07/10	2014/07/09
EMI Test Receiver	R&S	ESPI	1164.6407.07	2013/07/10	2014/07/09
Spectrum Analyzer	Agilent	E4407B	MY45108355	2013/07/06	2014/07/05
Controller	EM Electronics	Controller EM 1000	N/A	2013/07/06	2014/07/05
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2013/07/12	2014/07/11
Horn Antenna	SCHWARZBEC K	BBHA9170	1562	2013/07/12	2014/07/11
Active Loop Antenna	SCHWARZBEC K	FMZB1519	1519-037	2013/07/12	2014/07/11
LISN	R&S	ENV216	101316	2013/07/10	2014/07/09
LISN	SCHWARZBECK	NSLK8127	8127687	2013/07/10	2014/07/09
Microwave Preamplifier	HP	8349B	3155A00882	2013/07/10	2014/07/09
Amplifier	HP	8447D	3113A07663	2013/07/10	2014/07/09
Transient Limiter	Com-Power	LIT-153	532226	2013/07/10	2014/07/09

3. SUMMARY OF TEST RESULTS

Standard	Test Items	Status	Application
Part 15 Subpart C Section 15.227	Disturbance Voltage at The Mains Terminals	x	N/A, without AC power supply
	Radiation Emission	√	
	20dB Bandwidth	√	
	Antennal requirement	√	

- √ Indicates that the test is applicable
 x Indicates that the test is not applicable

4. DISTURBANCE VOLTAGE AT THE MAINS TERMINALS

4.1 Measurement Uncertainty

All test results complied with Section 15.207 requirements. Measurement Uncertainty is 2.4 dB.

4.2 Applicable Standard

Section 15.207: For a Low-power Radio-frequency Device is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency Range (MHz)	Limits (dBuV)	
	Quasi-Peak	Average
0.150~0.500	66~56	56~46
0.500~5.000	56	46
5.000~30.00	60	50

4.3 Test Description

The EUT is excused from investigation of Disturbance Voltage at The Mains Terminals, for it is powered by a DC 9V battery. According to the Section 15.207(d), measurement to demonstrate compliance with the limits of Disturbance Voltage at The Mains Terminals are not required to the devices which only employed battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

5. RADIATED DISTURBANCES

5.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is ± 3.4 dB.

5.2 Limit of Radiated Disturbances

- (a) The field strength of any emission within this band shall not exceed 10,000 microvolts/meter at 3 meters. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in Section 15.35 for limiting peak emissions apply.
- (b) The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in Section 15.209.

5.3 EUT Setup

The radiated emission tests were performed in the in the 3-meter anechoic chamber, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC Part 15 Subpart B limits.

The EUT was placed on the center of the test table. In the frequency range below 1 GHz, Ultra-Broadband Antenna horn-antenna is used. In the frequency range above 1 GHz horn-antenna is used. Test setup refer to Section 2.4 Basic Test Setup Block Diagram of this report.

Maximum emission emitted from EUT was determined by manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation and the levels in the final result of the test were recorded with the EUT running in the operating mode that maximum emission was emitted.

5.4 Test Receiver Setup

According to FCC Part 15 rule, the frequency was investigated from 30 to 4000 MHz. During the radiated emission test, the test receiver was set with the following configurations:

Test Receiver Setting for frequency range below 1000MHz:

Detector.....Peak & Quasi-Peak
IF Band Width.....100KHz
Frequency Range.....30MHz to 1000MHz
Turntable Rotated.....0 to 360 degrees

Test Receiver Setting for frequency range above 1000MHz:

Detector.....Peak
IF Band Width.....1MHz
Frequency Range.....1000MHz to 4000MHz
Turntable Rotated.....0 to 360 degrees

Antenna Position:

Height.....1m to 4m
Polarity.....Horizontal and Vertical

5.5 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

- 1). Configure the EUT according to ANSI C63.4:2003.
- 2). The EUT was placed on the top of the turntable 0.8 meter above ground.
- 3). The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 4). Power on the EUT and all the supporting units.
- 5). The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 6). The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
- 7). For each suspected emission, the antenna tower was scanned (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 8). Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode. Then all data was recorded in the peak detection mode. Quasi-peak readings performed only when an emission was found to be marginal (within -10 dB μ V of specification limits), and are distinguished with a "QP" in the data plots.

5.6 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude Indicated reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Transd.}$$

$$\text{Transd.} = \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "**Margin**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB μ V means the emission is 7dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

5.7 Radiated Emissions Test Result

Temperature (°C) : 22~23	EUT: Stunt Buggy Xtreme
Humidity (%RH) : 50~54	M/N: TX-1013
Barometric Pressure (mbar) : 950~1000	Operation Condition: Continuous TX

27.145MHz Tx in operation									
Maximum Frequency (MHz)	Emission Position and Level						Limit	Margin	
	Polarity	m	Deg°	Transd	Peak (dBμV/m)	AV (dBμV/m)	AV/QP (dBμV/m)	(dB)	
27.145	V	1	157	15.8	76.0		80	-4.00	QP
55.22	V	1.4	95	15.6	21.3		40	-18.70	QP
99.84	V	1.4	206	17.3	24		43.5	-19.50	QP
295.78	V	1.6	65	17.9	25.6		46	-20.40	QP
27.145	H	1	155	15.8	73.3		80	-6.70	QP
55.22	H	1.5	179	15.6	22.3		40	-17.7	QP
101.78	H	1.6	85	17.3	23.7		43.5	-19.8	QP
274.44	H	1.1	24	17.9	25		46	-21.0	QP

Remark:

(1) In this testing, the EUT was respectively tested in three different orientations. That is:

- (1) EUT was lie vertically, and then its Antenna oriented upward
- (2) EUT was lie vertically, and then its Antenna oriented downward
- (3) EUT was lie flatwise, and then its Antenna oriented to the receiving antenna

When the EUT was lie flatwise, and its Antenna oriented to the receiving antenna, the worst test data was got as following table.

(2) Measuring frequencies from 30 MHz to the 10th harmonic of fundamental frequency of 433.94 MHz.

(3) Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(4) * denotes spurious frequency which falls within the Restricted Bands specified in provision of § 15.205, then the general radiated emission limits in § 15.209 apply.


(5) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 8GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms

6. 20dB Bandwidth

6.1 Applicable Standard

Section 15.215(c): Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

6.2 EUT Setup

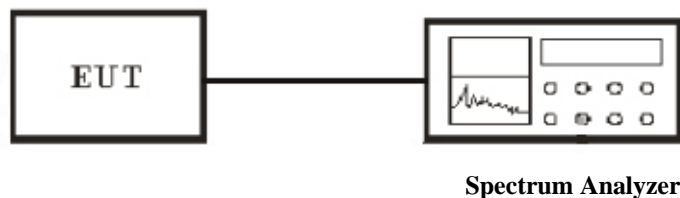

6.3 Test Equipment List and Details

See section 2.4.

6.4 Test Procedure


1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Use the following spectrum analyzer settings:
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
RBW \geq 1% of the 20 dB bandwidth, VBW \geq RBW
Sweep = auto
Detector function = peak
Trace = max hold
3. The spectrum width with level higher than 20dB below the peak level.
4. Repeat above 1~3 points for the middle and highest channel of the EUT.

6.5 Emissions within Band Edges Test Result

Temperature (°C) : 22~23	EUT: Stunt Buggy Xtreme
Humidity (%RH) : 50~54	M/N: TX-1013
Barometric Pressure (mbar) : 950~1000	Operation Condition: Continuous TX

Test plots see following pages

Fundamental Frequency (MHz)	20dB Bandwidth (kHz)	Pass/Fail
27.145	9.8	Pass

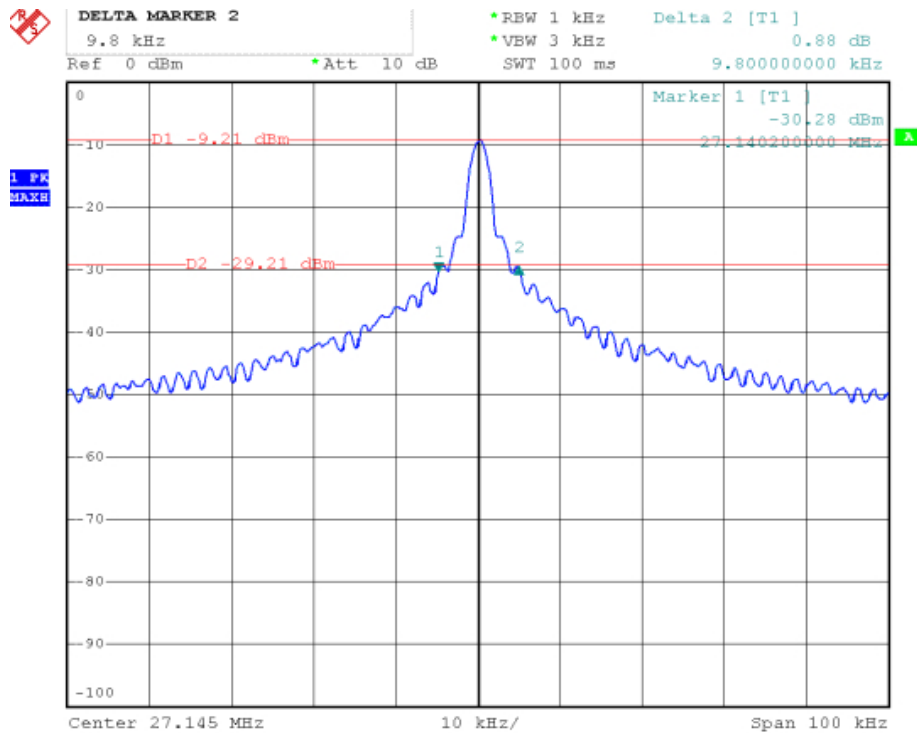

7. ANTENNA REQUIREMENT

7.1 Standard Applicable

Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

7.2 Antenna Connected Construction

The antenna connector is designed with permanent attachment and no consideration of replacement.