

APPLICATION CERTIFICATION FCC Part 15C
On Behalf of
China Industries Ltd T/A Wow! Stuff

Ai Stunt Drone
Model No.: TX-1028

FCC ID: YCR-TX-1028H

Prepared for : China Industries Ltd T/A Wow! Stuff
Address : Creative Industries Centre, Wolverhampton Science
Park, Wolverhampton, WV10 9TG UK

Prepared by : ACCURATE TECHNOLOGY CO., LTD
Address : F1, Bldg. A, Chan Yuan New Material Port, Keyuan
Rd. Science & Industry Park, Nan Shan, Shenzhen,
Guangdong P.R. China

Tel: (0755) 26503290
Fax: (0755) 26503396

Report Number : ATE20161259
Date of Test : June 24, 2016-July 10, 2016
Date of Report : July 11, 2016

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION	4
1.1. Description of Device (EUT)	4
1.2. Special Accessory and Auxiliary Equipment	4
1.3. Description of Test Facility	5
1.4. Measurement Uncertainty	5
2. MEASURING DEVICE AND TEST EQUIPMENT	6
3. OPERATION OF EUT DURING TESTING	7
3.1. Carrier Frequency of Channels	7
3.2. Configuration and peripherals	7
4. TEST PROCEDURES AND RESULTS	8
5. 20DB BANDWIDTH MEASUREMENT	9
5.1. Block Diagram of Test Setup	9
5.2. The Requirement For Section 15.215(c)	9
5.3. Operating Condition of EUT	9
5.4. Test Procedure	9
5.5. Test Result	10
6. BAND EDGE COMPLIANCE TEST	12
6.1. Block Diagram of Test Setup	12
6.2. The Requirement For Section 15.249	12
6.3. EUT Configuration on Measurement	12
6.4. Operating Condition of EUT	13
6.5. Test Procedure	13
6.6. Test Result	13
7. RADIATED SPURIOUS EMISSION TEST	18
7.1. Block Diagram of Test Setup	18
7.2. The Limit For Section 15.249	19
7.3. Restricted bands of operation	19
7.4. Configuration of EUT on Measurement	20
7.5. Operating Condition of EUT	20
7.6. Test Procedure	20
7.7. The Field Strength of Radiation Emission Measurement Results	21
8. ANTENNA REQUIREMENT	34
8.1. The Requirement	34
8.2. Antenna Construction	34

Test Report Certification

Applicant : China Industries Ltd T/A Wow! Stuff
Address : Creative Industries Centre, Wolverhampton Science Park,
Wolverhampton, WV10 9TG UK
Manufacturer : China Industries Ltd T/A Wow! Stuff
Address : Creative Industries Centre, Wolverhampton Science Park,
Wolverhampton, WV10 9TG UK
Product : Ai Stunt Drone
Model No. : TX-1028
Trade Name : TX Juice

Measurement Procedure Used:


FCC Rules and Regulations Part 15 Subpart C Section 15.249: 2015
ANSI C63.10: 2013


The EUT was tested according to FCC 47CFR 15.249 for compliance to FCC 47CFR 15.249 requirements

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.249 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test : June 24, 2016--July 10, 2016
Date of Report : July 11, 2016

Prepared by : 
(Tim.zhang, Engineer)

Approved & Authorized Signer : 
(Sean Liu, Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	:	Ai Stunt Drone
Model Number	:	TX-1028
Power Supply	:	6V DC (power by battery)
Operate Frequency	:	2407-2473MHz
Number of channels	:	67
Antenna Gain	:	0dBi
Modulation	:	GFSK
Antenna type	:	Integral Antenna
Applicant	:	China Industries Ltd T/A Wow! Stuff
Address	:	Creative Industries Centre, Wolverhampton Science Park, Wolverhampton, WV10 9TG UK
Manufacturer	:	China Industries Ltd T/A Wow! Stuff
Address	:	Creative Industries Centre, Wolverhampton Science Park, Wolverhampton, WV10 9TG UK
Date of sample received	:	June 24, 2016
Date of Test	:	June 24, 2016--July 10, 2016

1.2. Special Accessory and Auxiliary Equipment

N/A

1.3. Description of Test Facility

EMC Lab : Accredited by TUV Rheinland Shenzhen

Listed by FCC
The Registration Number is 752051

Listed by Industry Canada
The Registration Number is 5077A-2

Accredited by China National Accreditation Committee
for Laboratories
The Certificate Registration Number is L3193

Name of Firm : ACCURATE TECHNOLOGY CO. LTD
Site Location : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.
Science & Industry Park, Nanshan, Shenzhen, Guangdong
P.R. China

1.4. Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty
(9kHz-30MHz) = 3.08dB, k=2

Radiated emission expanded uncertainty
(30MHz-1000MHz) = 4.42dB, k=2

Radiated emission expanded uncertainty
(Above 1GHz) = 4.06dB, k=2

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment


Kind of equipment	Manufacturer	Type	S/N	Calibrated dates	Cal. Interval
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 09, 2016	One Year
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 09, 2016	One Year
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 09, 2016	One Year
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 09, 2016	One Year
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 14, 2016	One Year
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 14, 2016	One Year
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 14, 2016	One Year
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1067	Jan. 14, 2016	One Year
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 09, 2016	One Year
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 09, 2016	One Year
Highpass Filter	Wainwright Instruments	WHKX3.6/18 G-10SS	N/A	Jan. 09, 2016	One Year
Band Reject Filter	Wainwright Instruments	WRCG2400/2 485-2375/2510 -60/11SS	N/A	Jan. 09, 2016	One Year

3. OPERATION OF EUT DURING TESTING

3.1. Carrier Frequency of Channels

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2407	18	2424	35	2441	52	2458
2	2408	19	2425	36	2442	53	2459
3	2409	20	2426	37	2443	54	2460
4	2410	21	2427	38	2444	55	2461
5	2411	22	2428	39	2445	56	2462
6	2412	23	2429	40	2446	57	2463
7	2413	24	2430	41	2447	58	2464
8	2414	25	2431	42	2448	59	2465
9	2415	26	2432	43	2449	60	2466
10	2416	27	2433	44	2450	61	2467
11	2417	28	2434	45	2451	62	2468
12	2418	29	2435	46	2452	63	2469
13	2419	30	2436	47	2453	64	2470
14	2420	31	2437	48	2454	65	2471
15	2421	32	2438	49	2455	66	2472
16	2422	33	2439	50	2456	67	2473
17	2423	34	2440	51	2457		

3.2. Configuration and peripherals

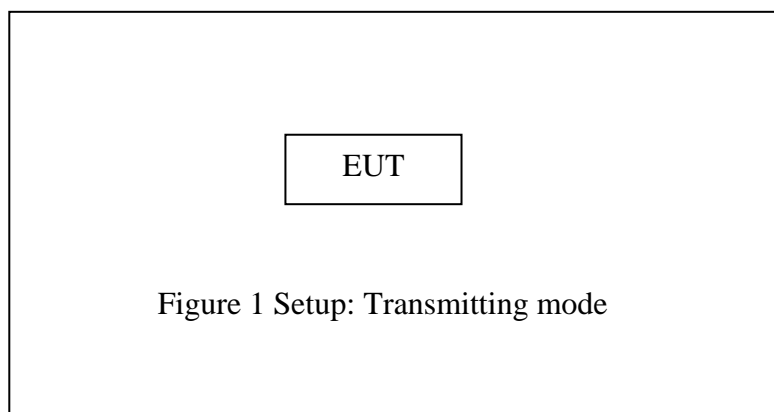


4. TEST PROCEDURES AND RESULTS

FCC Rules	Description of Test	Result
Section 15.215(c)	20dB Bandwidth	Compliant
Section 15.249(d)	Band Edge Compliance Test	Compliant
Section 15.205(a), Section 15.209(a), Section 15.249, Section 15.35	Radiated Spurious Emission Test	Compliant
Section 15.207	AC Power Line Conducted Emission Test	N/A
Section 15.203	Antenna Requirement	Compliant

Note: The power supply mode of the EUT is DC 6V, According to the FCC standard requirements, conducted emission is not applicable.

5. 20DB BANDWIDTH MEASUREMENT

5.1. Block Diagram of Test Setup

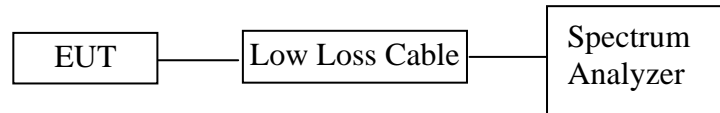

5.2. The Requirement For Section 15.215(c)

The bandwidth of a frequency hopping channel is the 20 dB emission bandwidth, measured with the hopping stopped. The system RF bandwidth is equal to the channel bandwidth multiplied by the number of channels in the hopset. The hopset shall be such that the near-term distribution of frequencies appears random, with sequential hops randomly distributed in both direction and magnitude of change in the hopset while the long-term distribution appears evenly distributed.

5.3. Operating Condition of EUT

5.3.1. Setup the EUT and simulator as shown as Section 5.1.

5.3.2. Turn on the power of all equipment.

5.3.3. Let the EUT work in TX modes measure it. The transmit frequency are 2407, 2440, 2473MHz.

5.4. Test Procedure

5.4.1. Place the EUT on the table and set it in transmitting mode.

5.4.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

5.4.3. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz, Detector function=peak, Trace=max hold, Sweep=auto.


5.4.4. Set the measured low, middle and high frequency and test 20dB bandwidth with spectrum analyzer.

5.5. Test Result

Channel	Frequency(MHz)	20 dB Bandwidth(MHz)
Low	2407	1.2373
Middle	2440	1.2518
High	2473	1.2373


The spectrum analyzer plots are attached as below.

Low channel

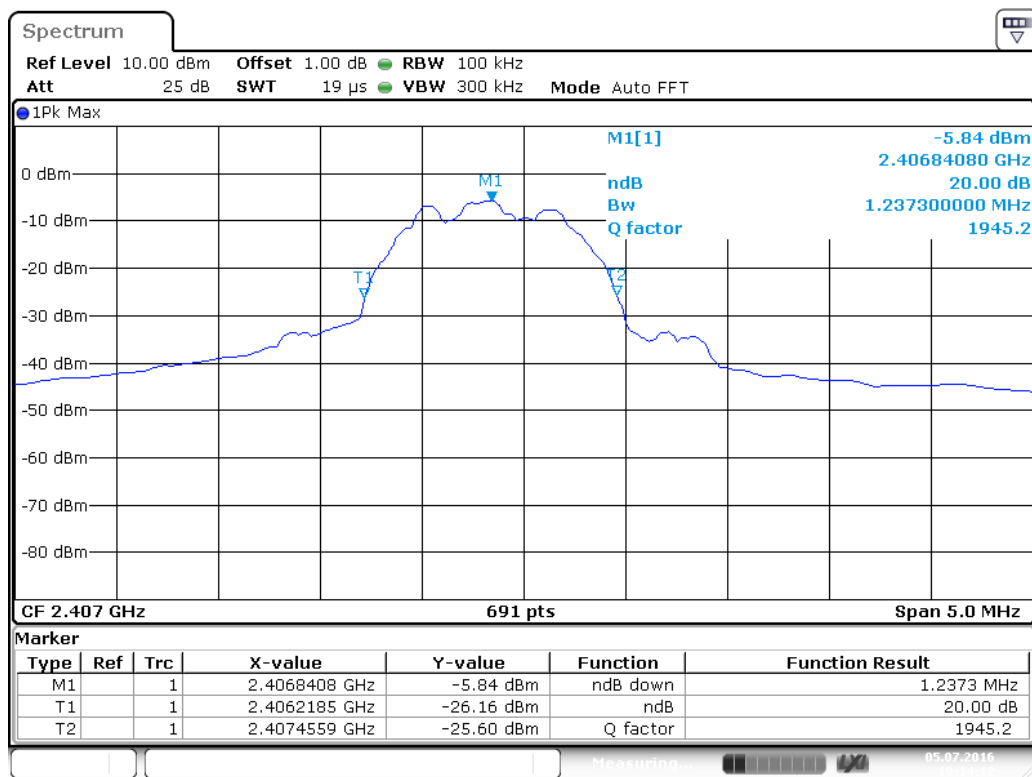


Date: 5.JUL.2016 10:14:12

Middle channel

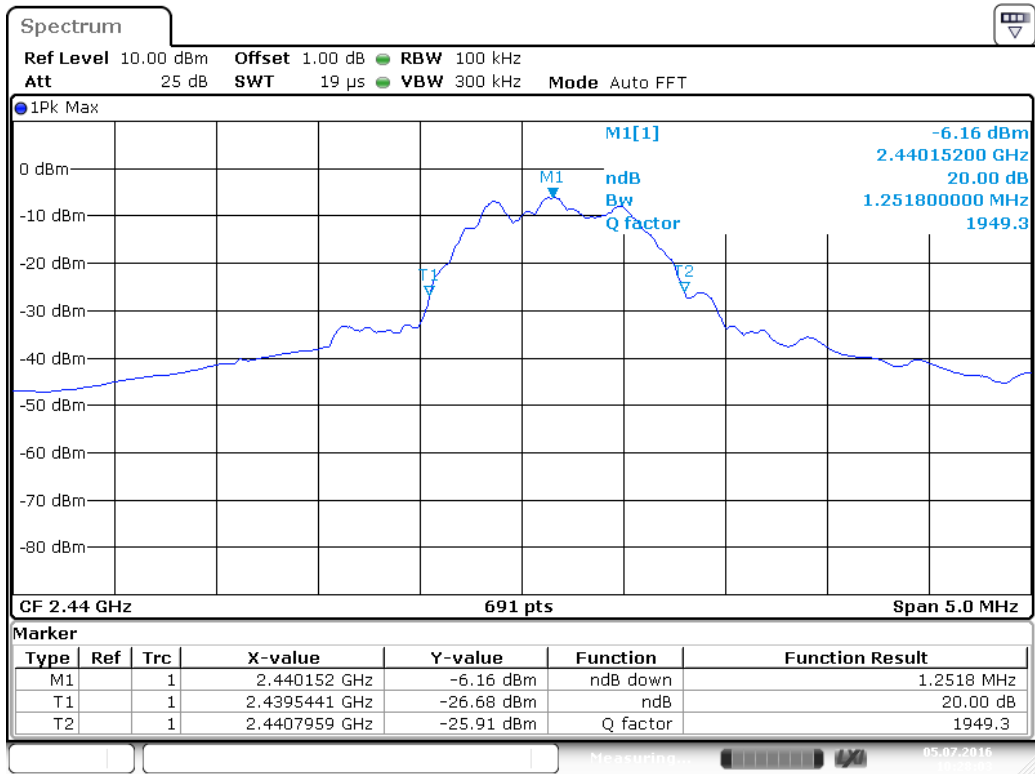

Date: 5.JUL.2016 10:28:03


High channel

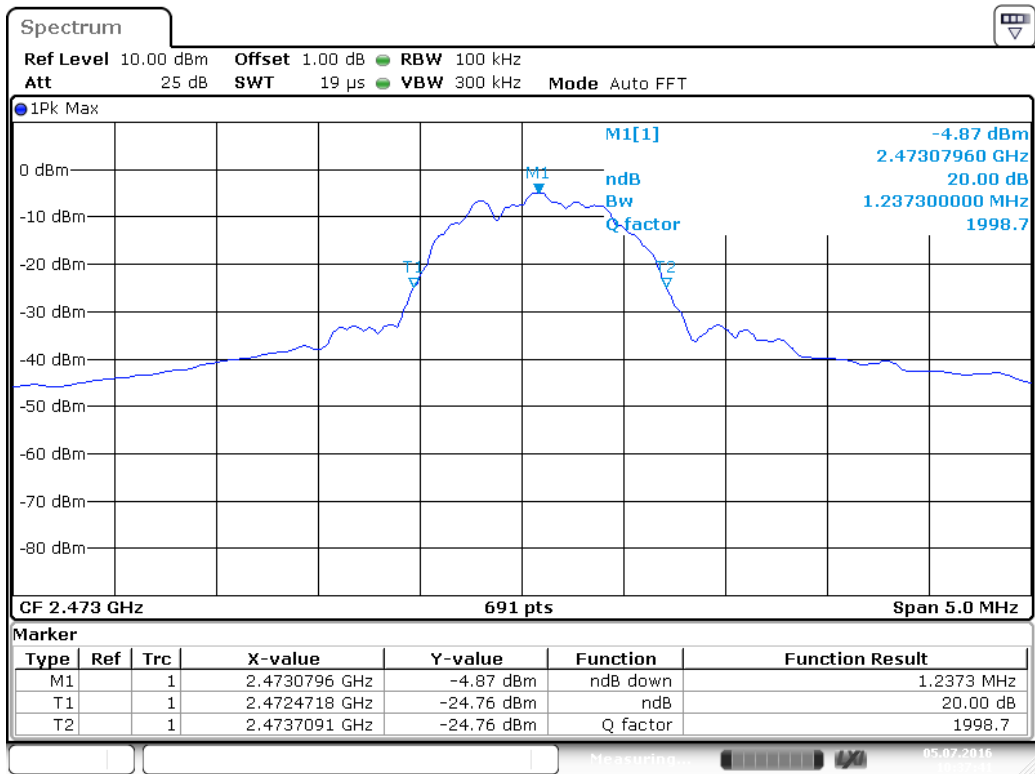

Date: 5.JUL.2016 10:37:41

6. BAND EDGE COMPLIANCE TEST

6.1. Block Diagram of Test Setup

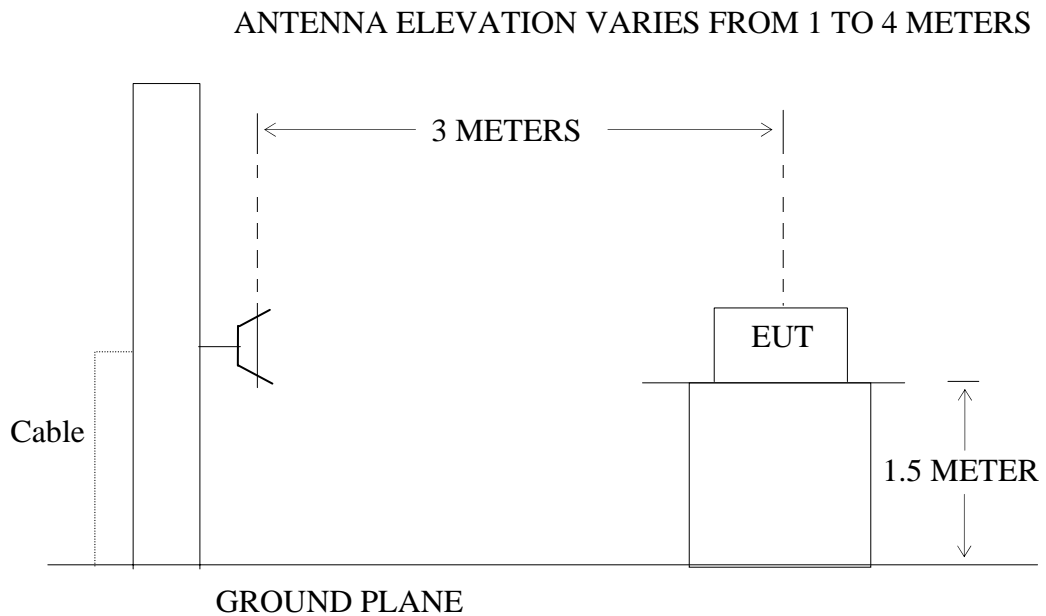

6.2. The Requirement For Section 15.249

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

6.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

6.4. Operating Condition of EUT

6.4.1. Setup the EUT and simulator as shown as Section 6.1.

6.4.2. Turn on the power of all equipment.

6.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2410, 2473MHz..

6.5. Test Procedure

Radiate Band Edge:

6.5.1. The EUT is placed on a turntable, which is 1.5m above the ground plane and worked at highest radiated power.

6.5.2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.

6.5.3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.

6.5.4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:

RBW=1MHz, VBW=1MHz

6.5.5. The band edges was measured and recorded.


6.6. Test Result

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:
Result = Reading + Corrected Factor
3. Display the measurement of peak values.
4. The average measurement was not performed when peak measured data under the limit of average detection.

Job No.: STAR2016 #1371	Polarization: Horizontal
Standard: FCC PK	Power Source: DC 6V
Test item: Radiation Test	Date: 16/06/29/
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 9/41/54
EUT: Ai Stunt Drone	Engineer Signature: star
Mode: TX 2473MHz	Distance: 3m
Model: TX-1028	
Manufacturer: China Industries Ltd T/A Wow! Stuff	

Note: Report No.:ATE20161259

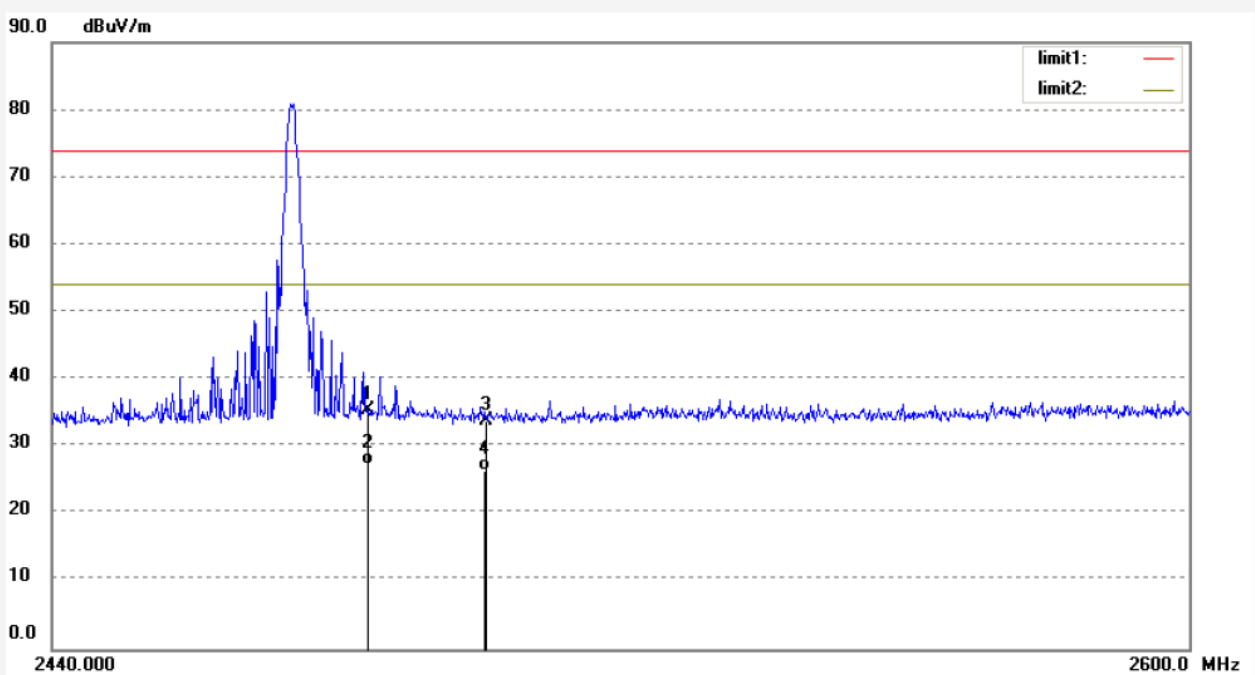


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	42.89	-7.37	35.52	74.00	-38.48	peak			
2	2483.500	34.71	-7.37	27.34	54.00	-26.66	peak			
3	2500.000	41.27	-7.32	33.95	74.00	-40.05	peak			
4	2500.000	33.69	-7.32	26.37	54.00	-27.63	peak			

Note: Average measurement with peak detection at No.2&4

Job No.: STAR2016 #1372	Polarization: Vertical
Standard: FCC PK	Power Source: DC 6V
Test item: Radiation Test	Date: 16/06/29/
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 9/43/30
EUT: Ai Stunt Drone	Engineer Signature: star
Mode: TX 2473MHz	Distance: 3m
Model: TX-1028	
Manufacturer: China Industries Ltd T/A Wow! Stuff	

Note: Report No.:ATE20161259

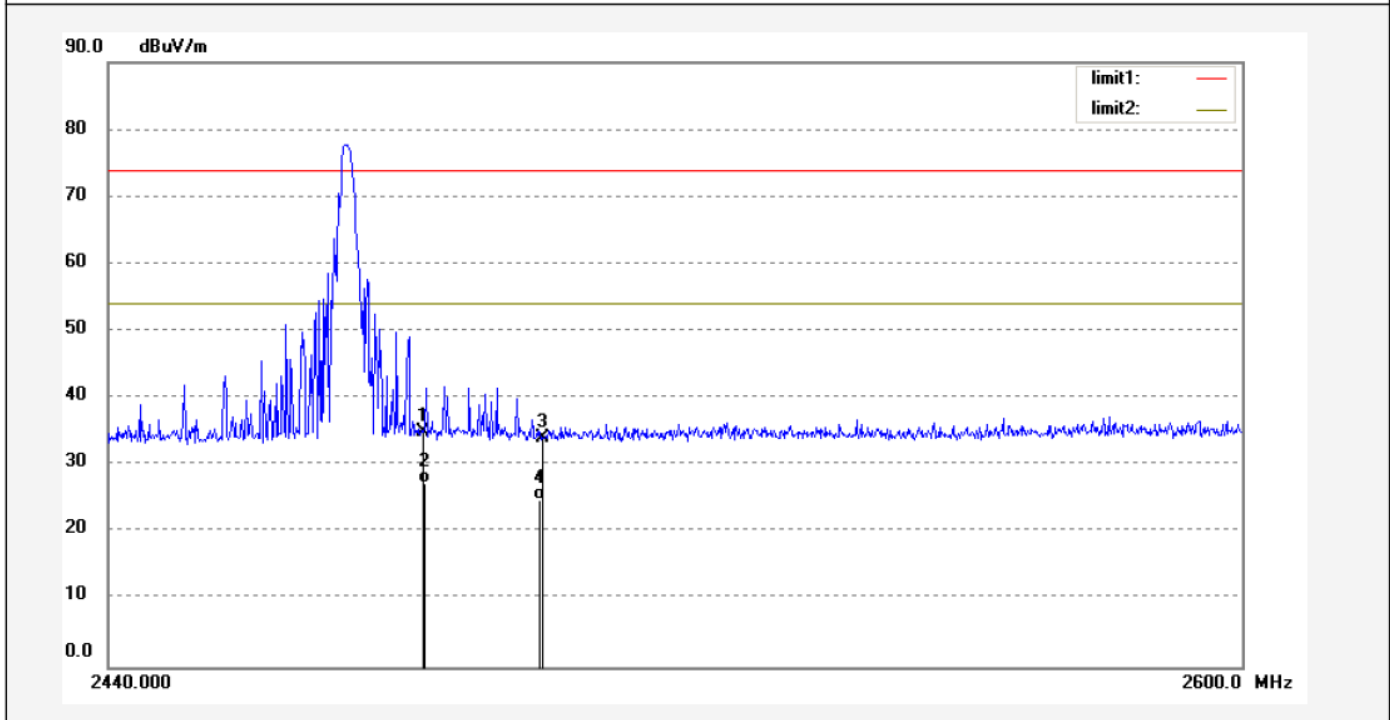


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	42.25	-7.37	34.88	74.00	-39.12	peak			
2	2483.500	34.70	-7.37	27.33	54.00	-26.67	peak			
3	2500.000	41.39	-7.32	34.07	74.00	-39.93	peak			
4	2500.000	32.20	-7.32	24.88	54.00	-29.12	peak			

Note: Average measurement with peak detection at No.2&4

Job No.: STAR2016 #1374	Polarization: Horizontal
Standard: FCC PK	Power Source: DC 6V
Test item: Radiation Test	Date: 16/06/29/
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 9/46/02
EUT: Ai Stunt Drone	Engineer Signature: star
Mode: TX 2407MHz	Distance: 3m
Model: TX-1028	
Manufacturer: China Industries Ltd T/A Wow! Stuff	

Note: Report No.:ATE20161259

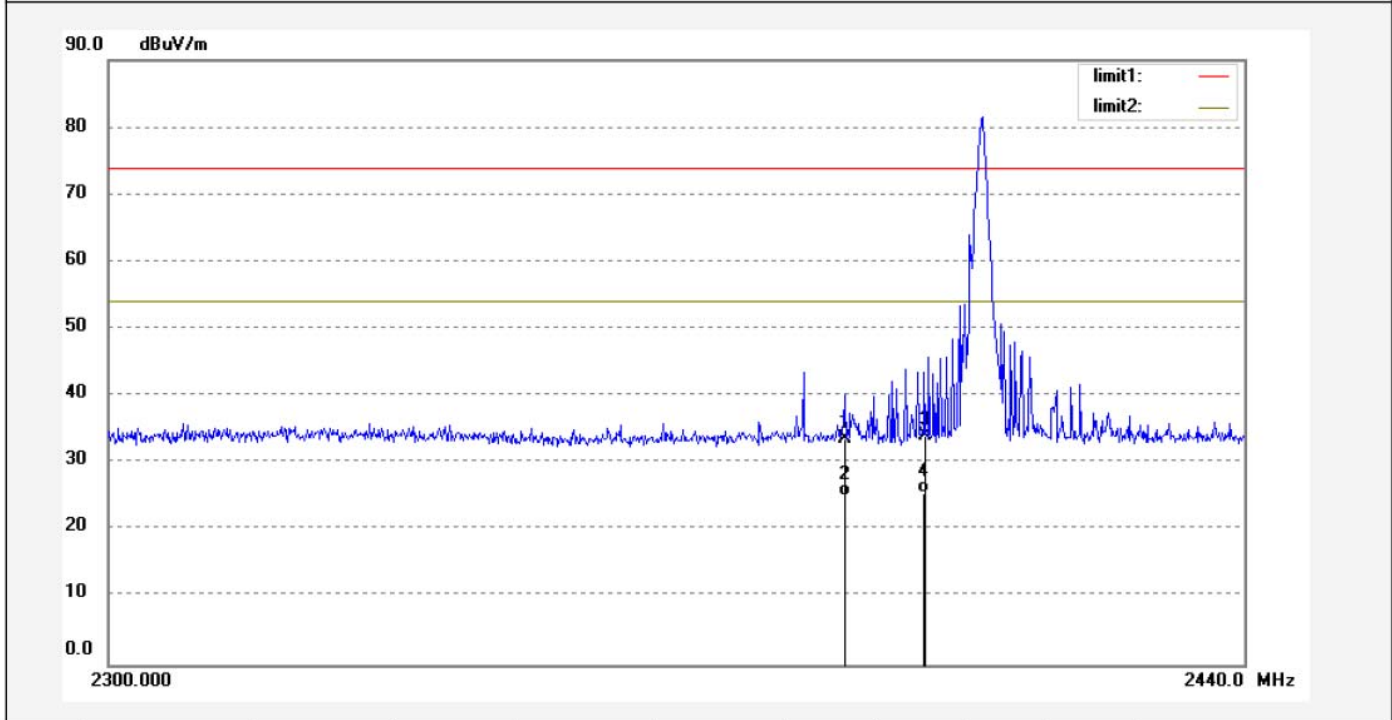

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	41.30	-7.64	33.66	74.00	-40.34	peak			
2	2390.000	32.74	-7.64	25.10	54.00	-28.90	peak			
3	2400.000	41.68	-7.61	34.07	74.00	-39.93	peak			
4	2400.000	33.04	-7.61	25.43	54.00	-28.57	peak			

Note: Average measurement with peak detection at No.2&4

Job No.: STAR2016 #1373

Polarization: Vertical

Standard: FCC PK

Power Source: DC 6V

Test item: Radiation Test

Date: 16/06/29/

Temp.(C)/Hum.(%) 25 C / 55 %

Time: 9/44/58

EUT: Ai Stunt Drone

Engineer Signature: star


Mode: TX 2407MHz

Distance: 3m

Model: TX-1028

Manufacturer: China Industries Ltd T/A Wow! Stuff

Note: Report No.:ATE20161259

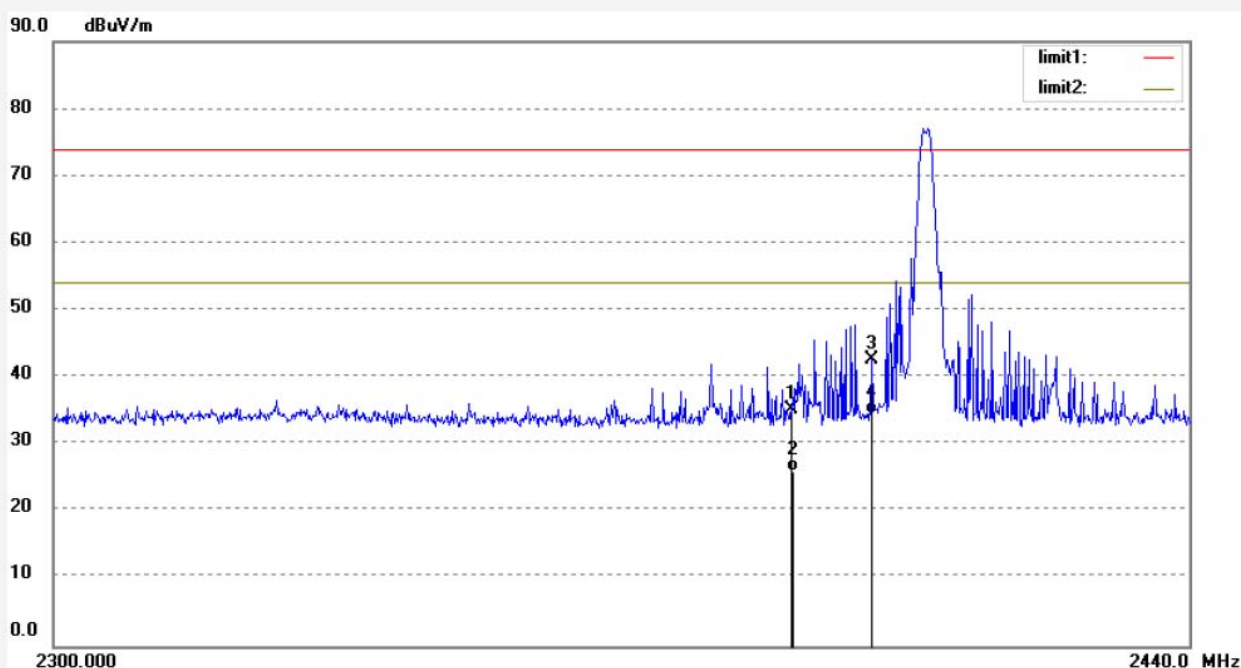

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	42.83	-7.64	35.19	74.00	-38.81	peak			
2	2390.000	33.67	-7.64	26.03	54.00	-27.97	peak			
3	2400.000	50.16	-7.61	42.55	74.00	-31.45	peak			
4	2400.000	42.17	-7.61	34.56	54.00	-19.44	peak			

Note: Average measurement with peak detection at No.2&4

7. RADIATED SPURIOUS EMISSION TEST

7.1. Block Diagram of Test Setup



7.1.1. Block diagram of connection between the EUT and peripherals



Setup: Transmitting mode

(EUT: Ai Stunt Drone)

7.1.2. Semi-Anechoic Chamber Test Setup Diagram

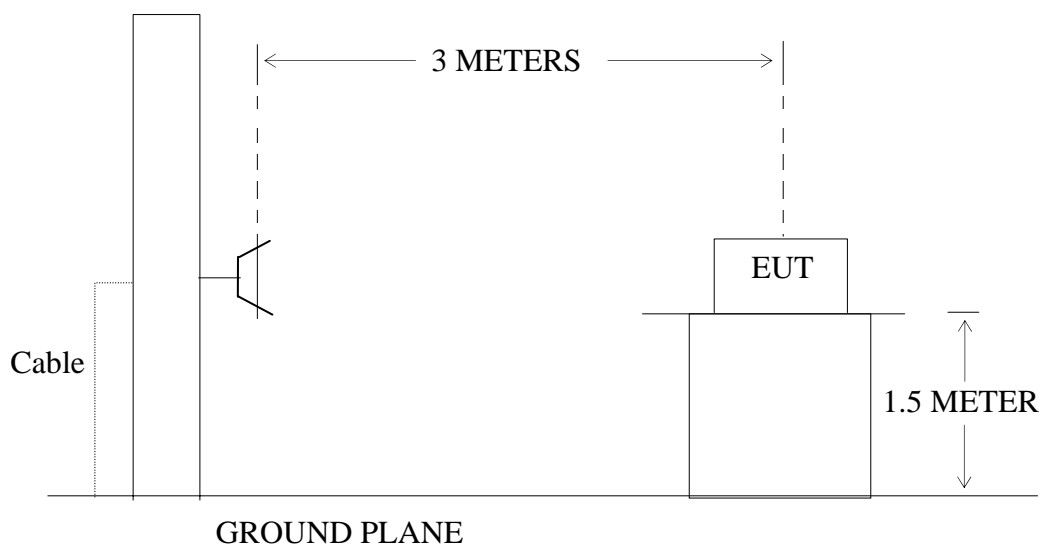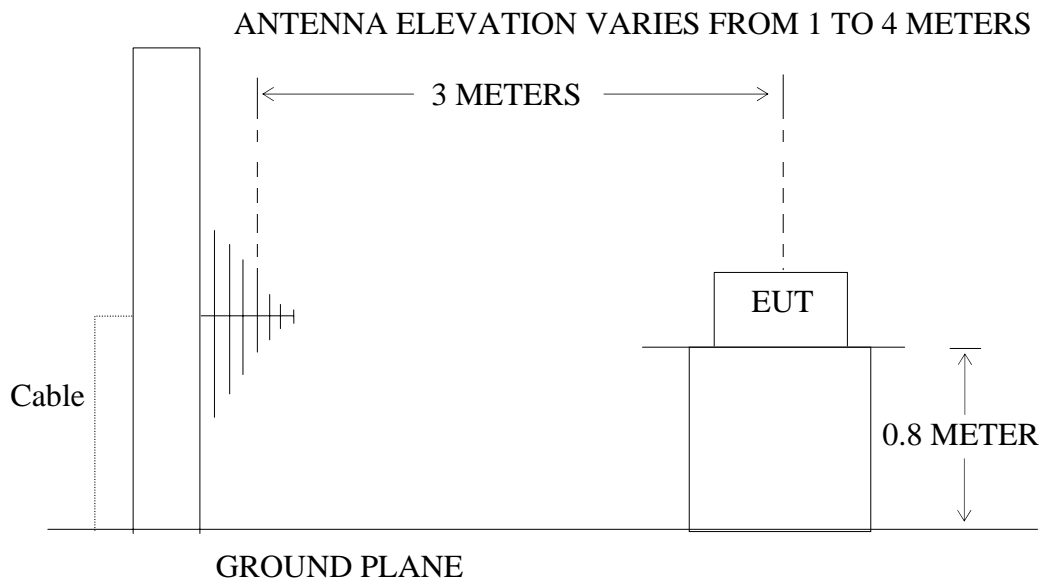

7.2.The Limit For Section 15.249

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph A8.4(4), the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

7.3.Restricted bands of operation

7.3.1.FCC Part 15.205 Restricted bands of operation

(a) Except as shown in paragraph (d) of this section, Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510

²Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emission appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, Compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

7.4. Configuration of EUT on Measurement

The equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

7.5. Operating Condition of EUT

7.5.1. Setup the EUT and simulator as shown as Section 7.1.

7.5.2. Turn on the power of all equipment.

7.5.3. Let the EUT work in TX modes measure it. The transmit frequency are 2407, 2440, 2473MHz.

7.6. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter (Below 1GHz) and 1.5m (above 1GHz) high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

The bandwidth of test receiver is set at 9 kHz in below 30MHz. and set at 120 kHz in 30-1000MHz, and 1MHz in above 1000MHz.

The frequency range from 9 kHz to 25GHz is checked.

The final measurement in band 9-90 kHz, 110-490 kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

RBW (120 kHz), VBW (300 kHz) for QP detector below 1GHz

Peak detector above 1GHz

RBW (1 MHz), VBW (3MHz) for Peak measurement

RBW (1 MHz), VBW (10Hz) for AV measurement

The field strength is calculated by adding the antenna factor, and cable loss, and subtracting the amplifier gain from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

7.7.The Field Strength of Radiation Emission Measurement Results PASS.

Fundamental Radiated Emissions

Frequency (MHz)	Reading(dB μ V/m)		Factor(dB) Corr.	Result(dB μ V/m)		Limit(dB μ V/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2407	74.68	82.12	-7.64	67.04	74.48	94.00	114.00	26.96	39.52	Vertical
2407	76.87	84.88	-7.64	69.23	77.24	94.00	114.00	24.77	36.76	Horizontal
2440	76.65	83.43	-7.56	69.09	75.87	94.00	114.00	24.91	38.13	Vertical
2440	79.32	86.61	-7.56	71.76	79.05	94.00	114.00	22.24	34.95	Horizontal
2473	76.17	84.81	-7.49	68.68	77.32	94.00	114.00	25.32	36.68	Vertical
2473	80.40	87.50	-7.49	72.91	80.01	94.00	114.00	21.09	33.99	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. *: Denotes restricted band of operation.

3. The EUT is tested radiation emission in three axes. The worst emissions are reported in all channels.

4. The radiation emissions from 18-25GHz are not reported, because the test values lower than the limits of 20dB.

5. The average measurement was not performed when peak measured data under the limit of average detection.

6. The 18-25GHz emissions are not reported, because the levels are too low against the limit

Job No.: STAR2016 #1360

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Ai Stunt Drone

Mode: TX 2407MHz

Model: TX-1028

Manufacturer: China Industries Ltd T/A Wow! Stuff

Polarization: Horizontal

Power Source: DC 6V


Date: 16/06/29/

Time: 9/23/09

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20161259

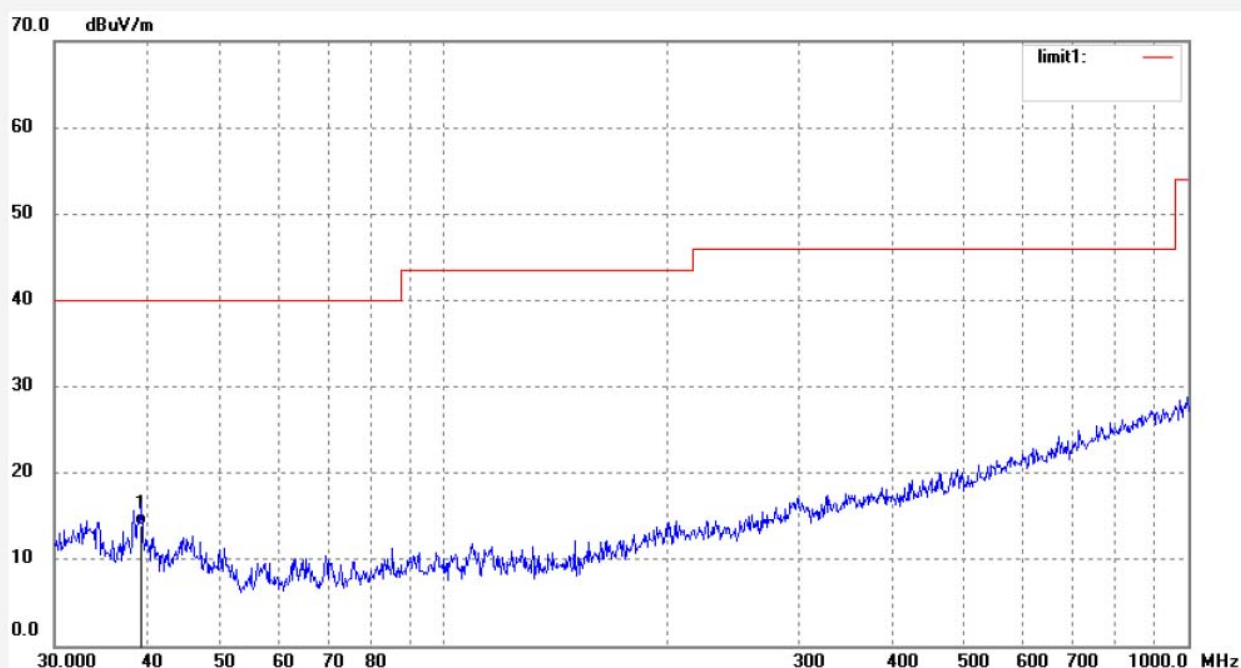


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	39.3204	32.74	-18.88	13.86	40.00	-26.14	QP			

Job No.: STAR2016 #1359
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 25 C / 55 %
 EUT: Ai Stunt Drone
 Mode: TX 2407MHz
 Model: TX-1028
 Manufacturer: China Industries Ltd T/A Wow! Stuff

Polarization: Vertical
 Power Source: DC 6V
 Date: 16/06/29/
 Time: 9/22/12
 Engineer Signature: star
 Distance: 3m

Note: Report No.:ATE20161259

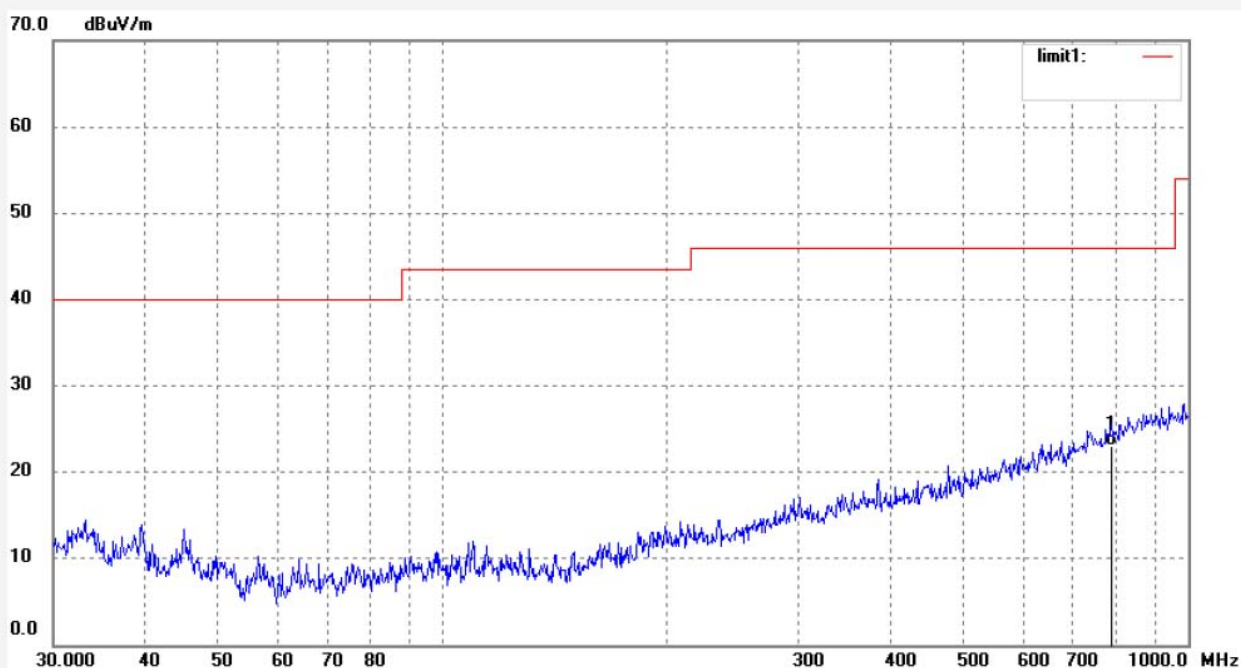

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	790.2466	29.10	-6.05	23.05	46.00	-22.95	QP			

Job No.: STAR2016 #1361

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Ai Stunt Drone

Mode: TX 2440MHz

Model: TX-1028

Manufacturer: China Industries Ltd T/A Wow! Stuff

Polarization: Horizontal

Power Source: DC 6V


Date: 16/06/29/

Time: 9/23/48

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20161259

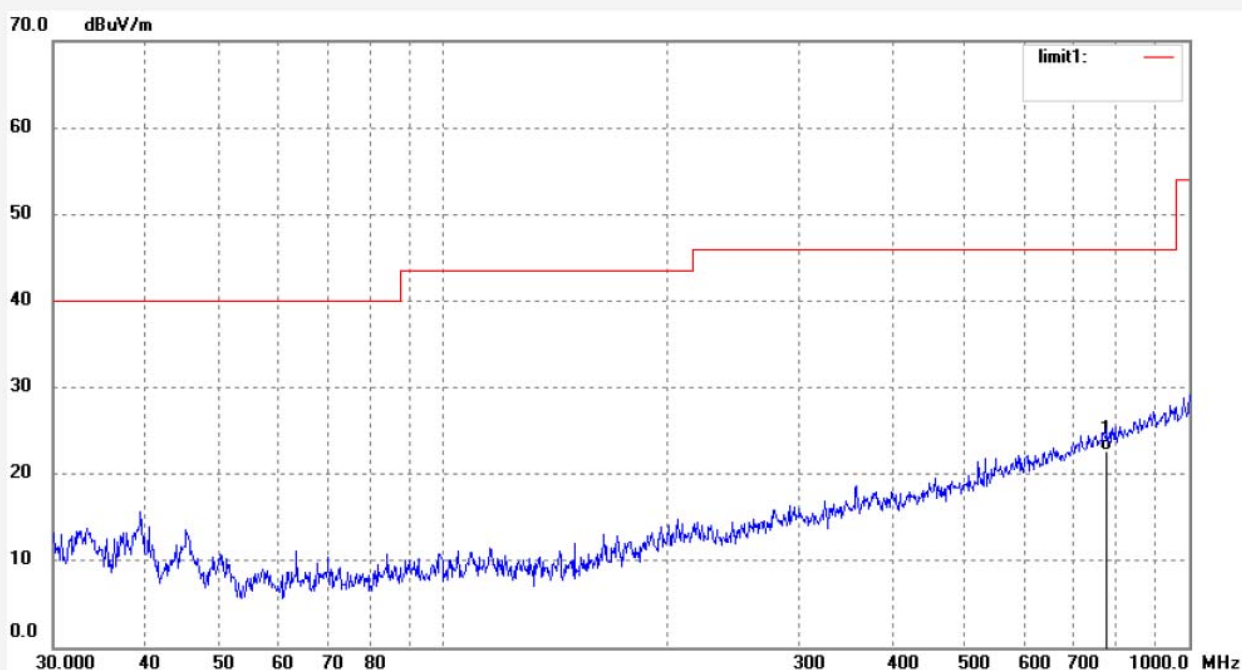


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	776.4849	29.00	-6.30	22.70	46.00	-23.30	QP			

Job No.: STAR2016 #1362
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 25 C / 55 %
 EUT: Ai Stunt Drone
 Mode: TX 2440MHz
 Model: TX-1028

Polarization: Vertical
 Power Source: DC 6V
 Date: 16/06/29/
 Time: 9/24/20
 Engineer Signature: star
 Distance: 3m

Manufacturer: China Industries Ltd T/A Wow! Stuff

Note: Report No.:ATE20161259

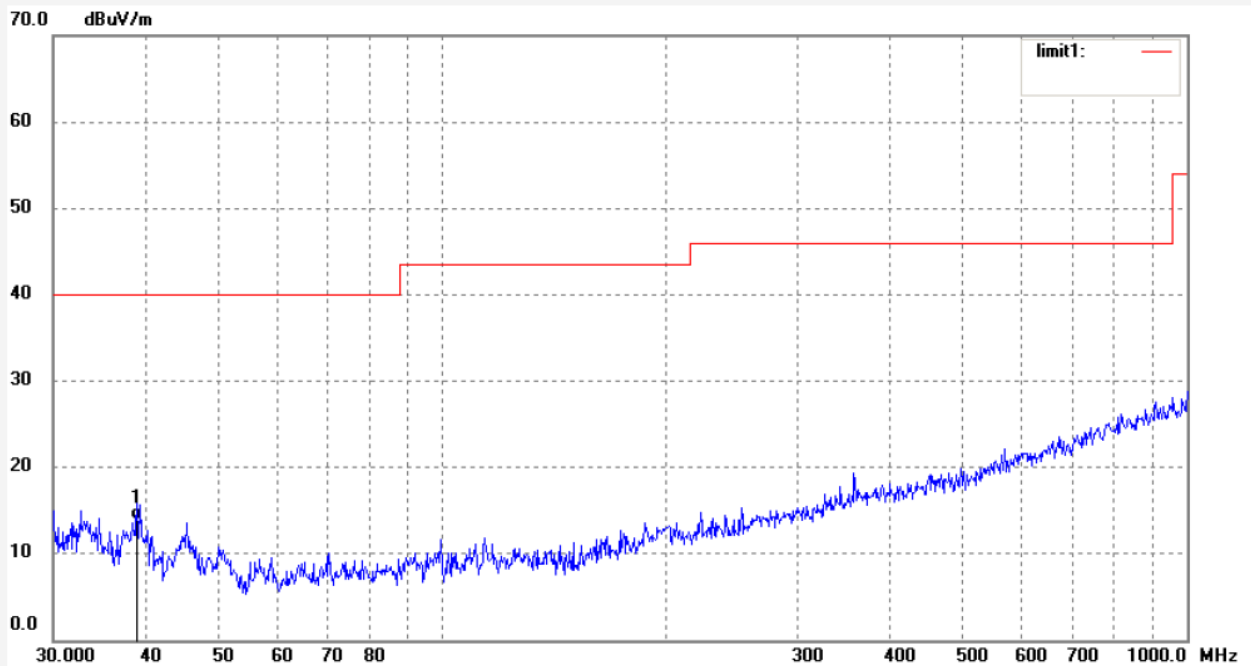

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	38.9081	32.71	-18.75	13.96	40.00	-26.04	QP			

Job No.: STAR2016 #1364

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Ai Stunt Drone

Mode: TX 2473MHz

Model: TX-1028

Manufacturer: China Industries Ltd T/A Wow! Stuff

Polarization: Horizontal

Power Source: DC 6V


Date: 16/06/29/

Time: 9/25/59

Engineer Signature: star

Distance: 3m


Note: Report No.:ATE20161259

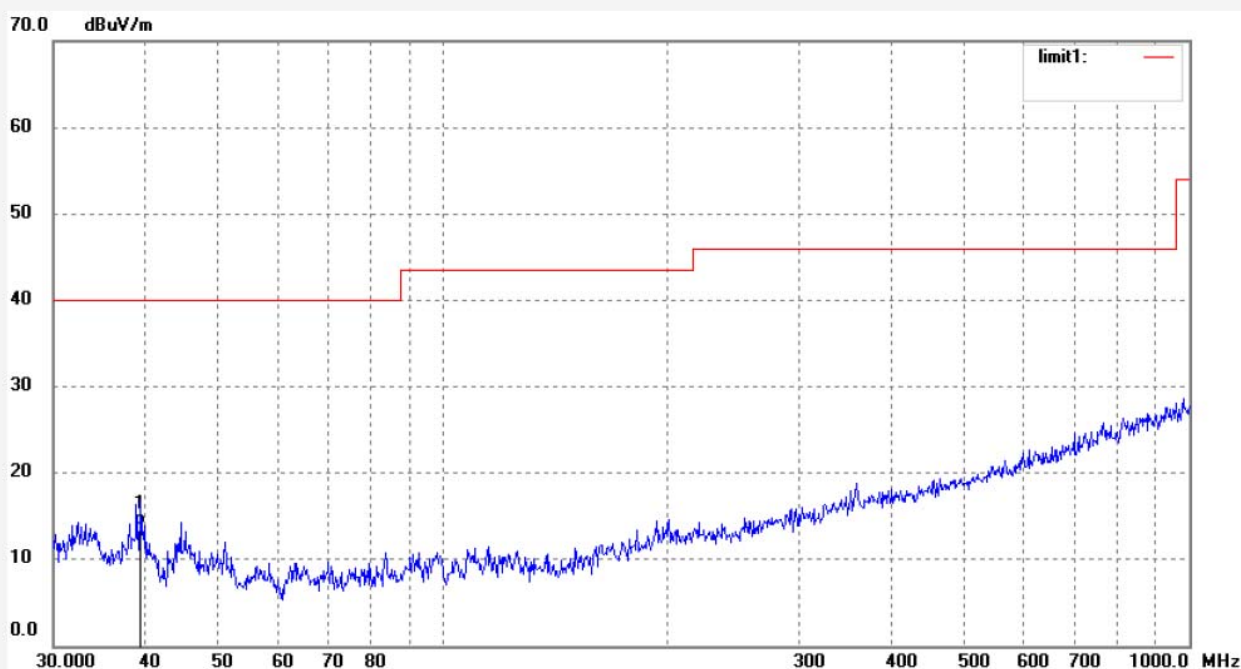

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	39.3203	32.74	-18.88	13.86	40.00	-26.14	QP			

Job No.: STAR2016 #1363	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 6V
Test item: Radiation Test	Date: 16/06/29/
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 9/25/18
EUT: Ai Stunt Drone	Engineer Signature: star
Mode: TX 2473MHz	Distance: 3m
Model: TX-1028	
Manufacturer: China Industries Ltd T/A Wow! Stuff	


Note: Report No.:ATE20161259

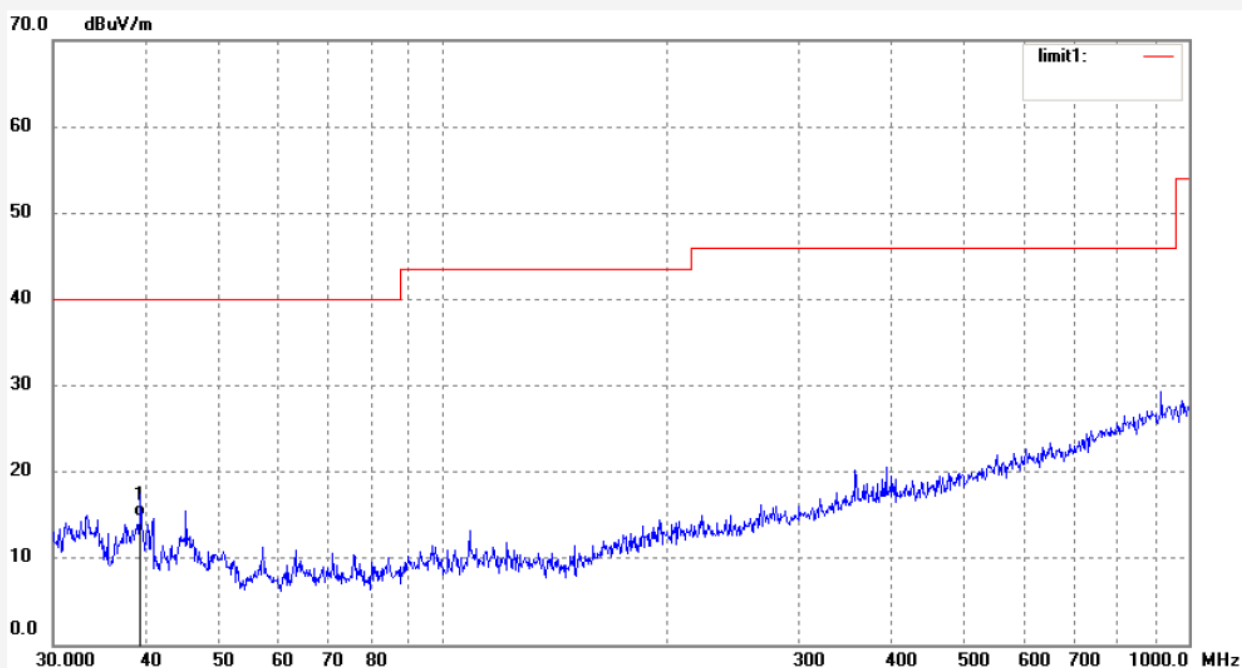

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	39.3203	33.71	-18.88	14.83	40.00	-25.17	QP			

Job No.: STAR2016 #1366	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 6V
Test item: Radiation Test	Date: 16/06/29/
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 9/32/25
EUT: Ai Stunt Drone	Engineer Signature: star
Mode: TX 2407MHz	Distance: 3m
Model: TX-1028	
Manufacturer: China Industries Ltd T/A Wow! Stuff	

Note: Report No.:ATE20161259

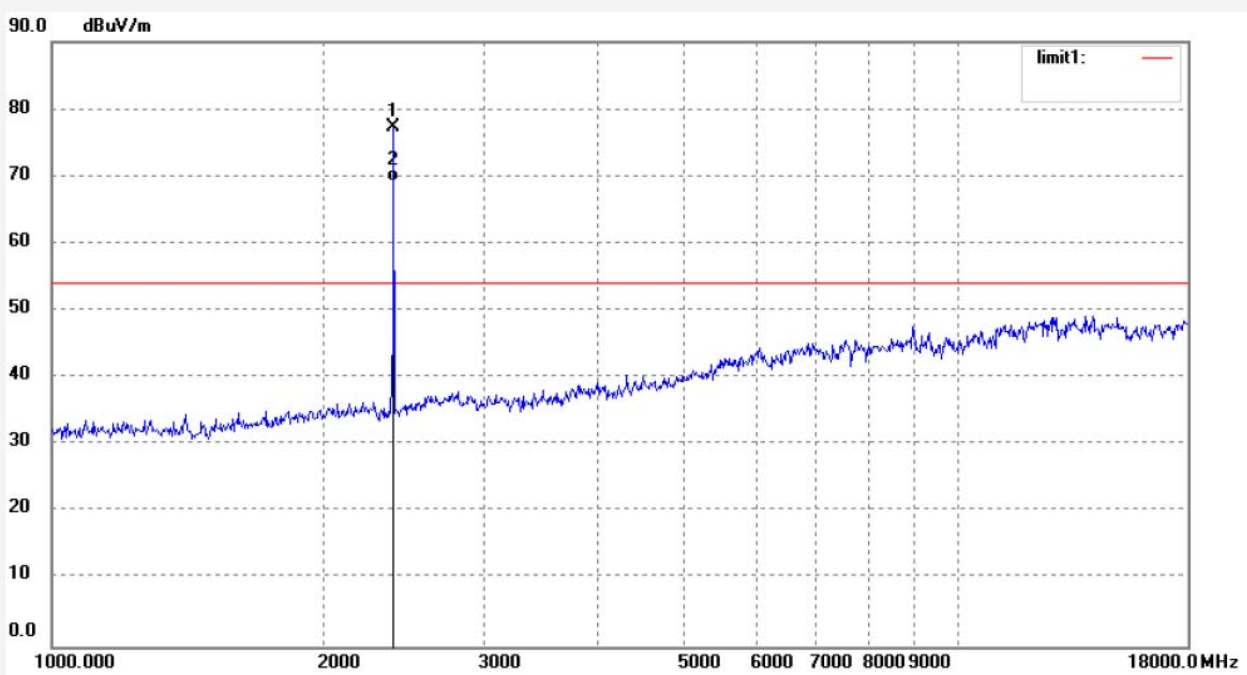


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2407.659	84.88	-7.64	77.24	114.00	36.76	peak			
2	2407.659	76.87	-7.64	69.23	94.00	24.77	peak			

Note: Average measurement with peak detection at No.2

Job No.: STAR2016 #1365	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 6V
Test item: Radiation Test	Date: 16/06/29/
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 9/30/00
EUT: Ai Stunt Drone	Engineer Signature: star
Mode: TX 2407MHz	Distance: 3m
Model: TX-1028	
Manufacturer: China Industries Ltd T/A Wow! Stuff	

Note: Report No.:ATE20161259

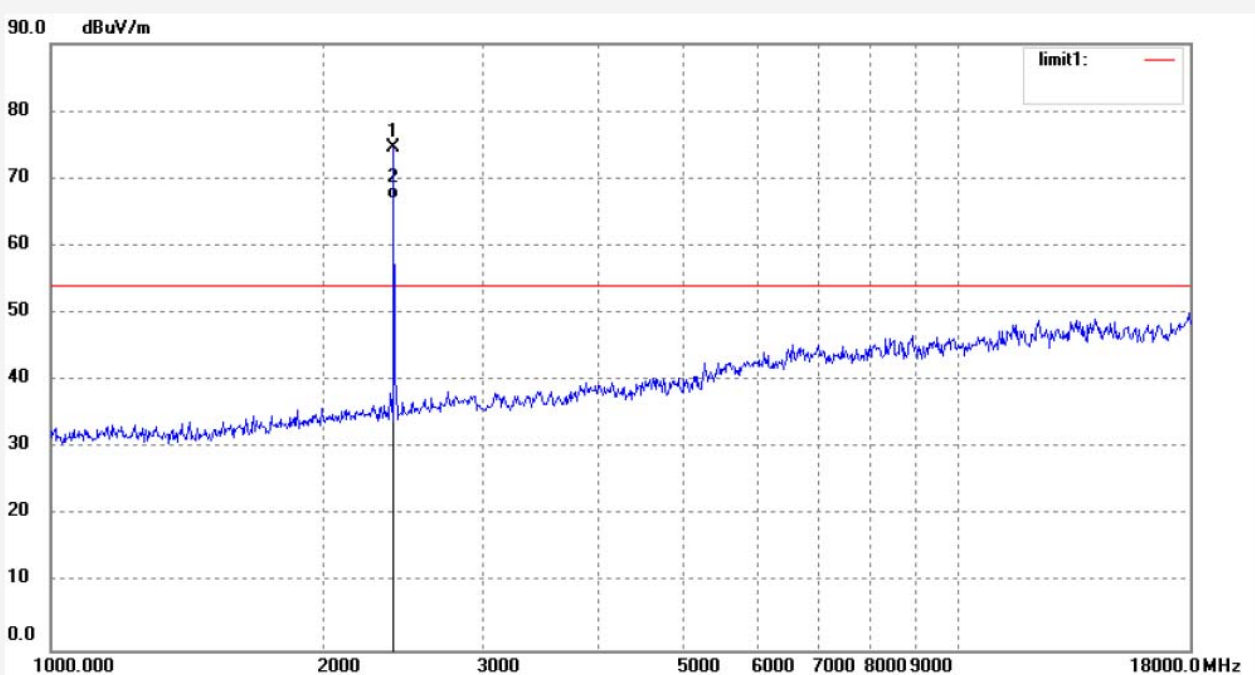

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2407.659	82.12	-7.64	74.48	114.00	39.52	peak			
2	2407.659	74.68	-7.64	67.04	94.00	26.96	peak			

Note: Average measurement with peak detection at No.2

Job No.: STAR2016 #1367

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Ai Stunt Drone

Mode: TX 2440MHz

Model: TX-1028

Manufacturer: China Industries Ltd T/A Wow! Stuff

Polarization: Horizontal

Power Source: DC 6V


Date: 16/06/29/

Time: 9/34/45

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20161259

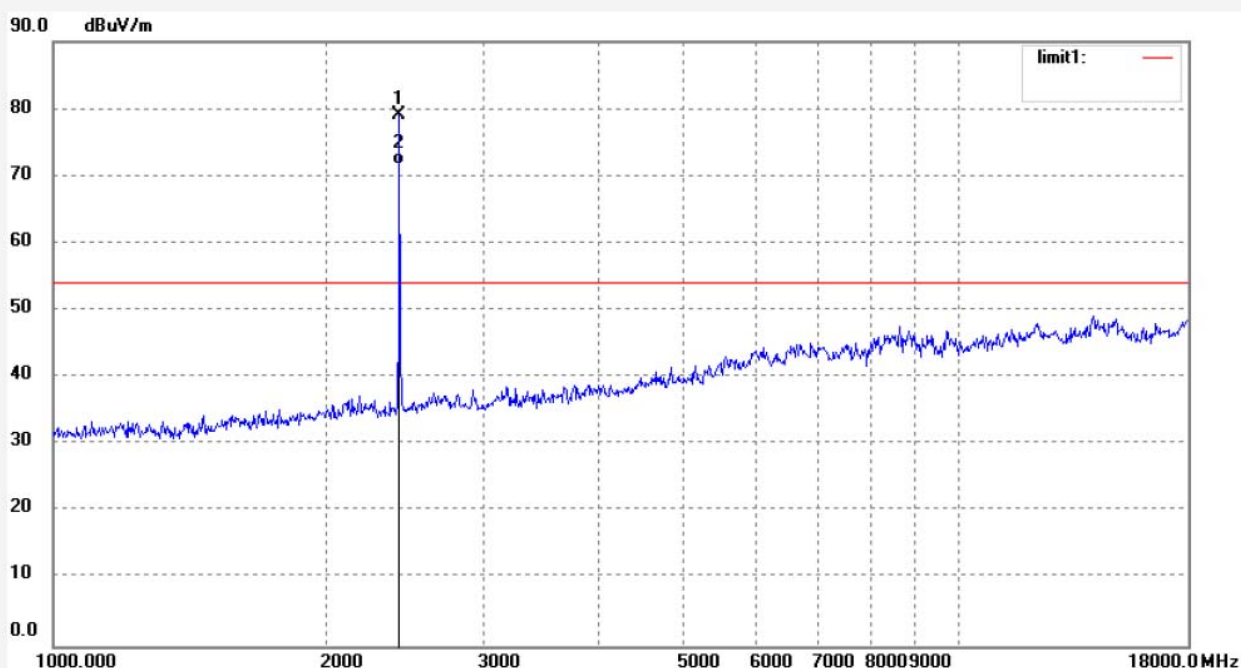

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2440.621	86.61	-7.56	79.05	114.00	34.95	peak			
2	2440.621	79.32	-7.56	71.76	94.00	22.24	peak			

Note: Average measurement with peak detection at No.2

Job No.: STAR2016 #1368

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Ai Stunt Drone

Mode: TX 2440MHz

Model: TX-1028

Manufacturer: China Industries Ltd T/A Wow! Stuff

Polarization: Vertical

Power Source: DC 6V


Date: 16/06/29/

Time: 9/36/11

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20161259

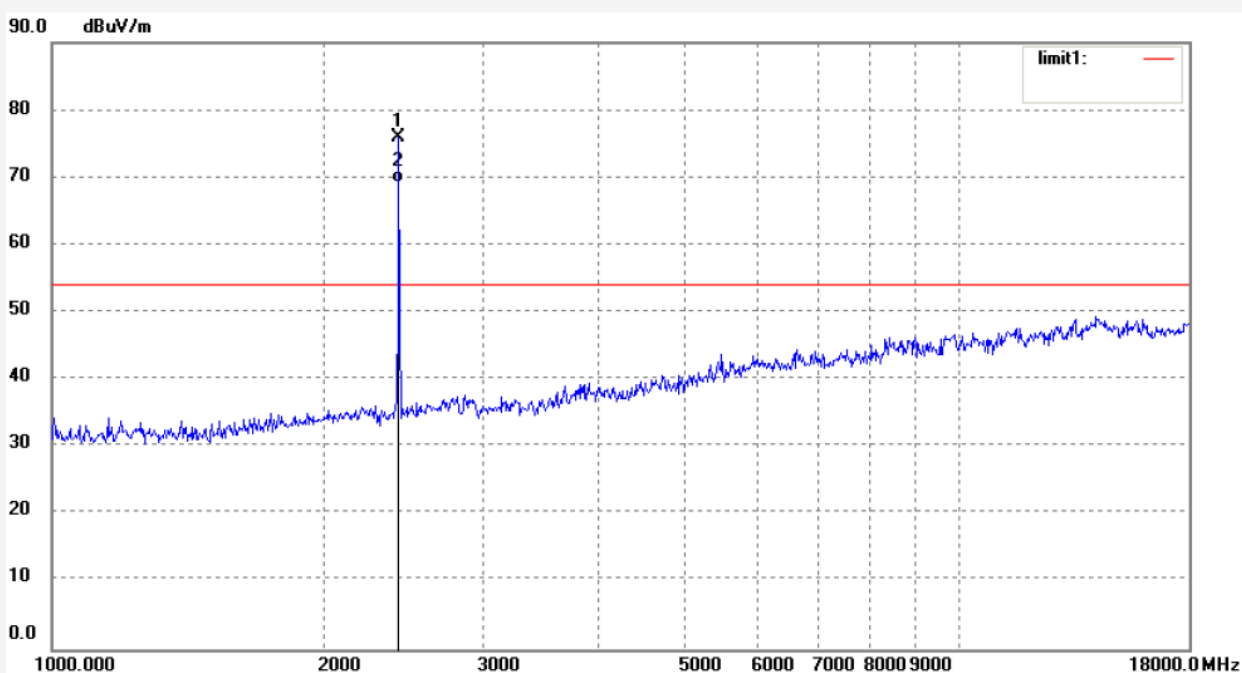

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2440.621	83.43	-7.56	75.87	114.00	38.13	peak			
2	2440.621	76.65	-7.56	69.09	94.00	24.91	peak			

Note: Average measurement with peak detection at No.2

Job No.: STAR2016 #1370

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Ai Stunt Drone

Mode: TX 2473MHz

Model: TX-1028

Manufacturer: China Industries Ltd T/A Wow! Stuff

Polarization: Horizontal

Power Source: DC 6V


Date: 16/06/29/

Time: 9/39/23

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20161259

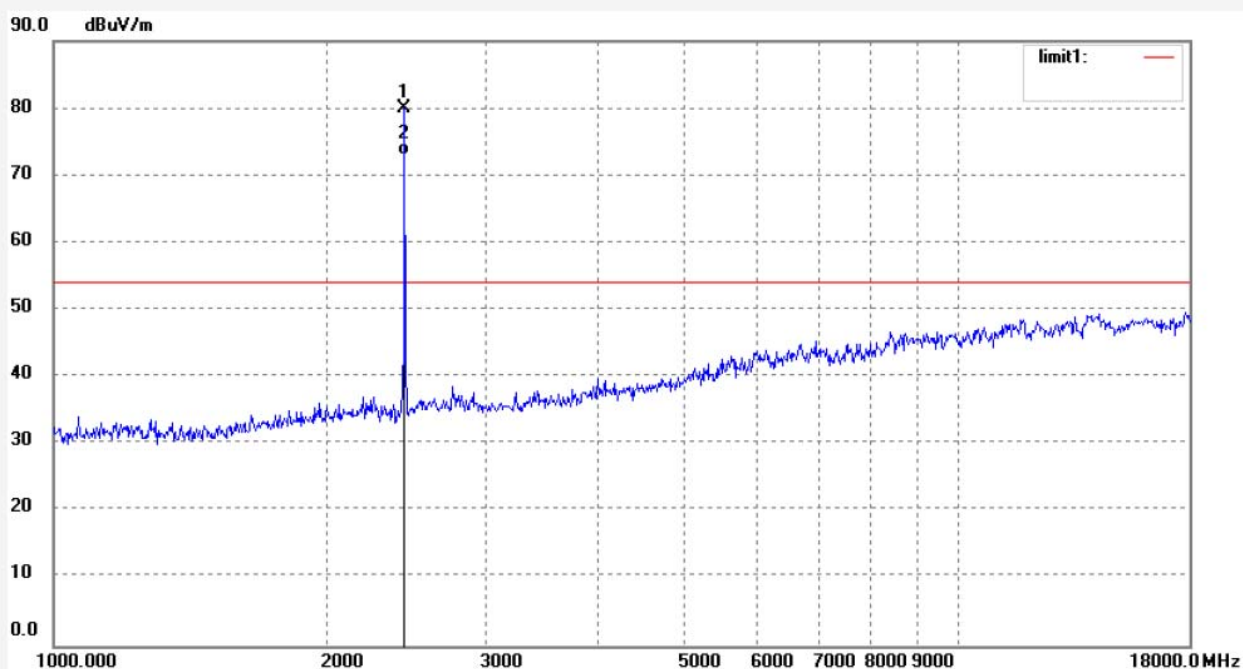


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2473.610	87.50	-7.49	80.01	114.00	33.99	peak			
2	2473.610	80.40	-7.49	72.91	94.00	21.09	peak			

Note: Average measurement with peak detection at No.2

Job No.: STAR2016 #1369	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 6V
Test item: Radiation Test	Date: 16/06/29/
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 9/38/05
EUT: Ai Stunt Drone	Engineer Signature: star
Mode: TX 2473MHz	Distance: 3m
Model: TX-1028	
Manufacturer: China Industries Ltd T/A Wow! Stuff	

Note: Report No.:ATE20161259

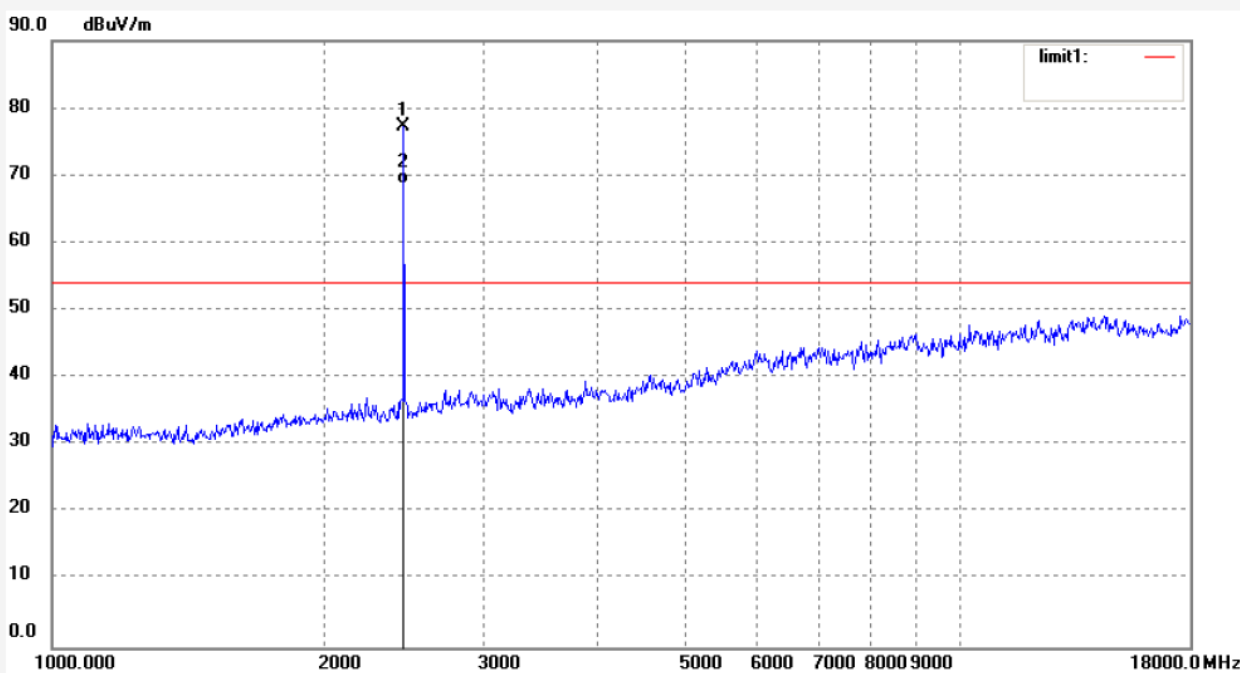

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2473.610	84.81	-7.49	77.32	114.00	36.68	peak			
2	2473.610	76.17	-7.49	68.68	94.00	25.32	peak			

Note: Average measurement with peak detection at No.2


8. ANTENNA REQUIREMENT

8.1.The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2.Antenna Construction

Device is equipped with permanent attached antenna, which isn't displaced by other antenna. The Antenna gain of EUT is 0dBi. Therefore, the equipment complies with the antenna requirement of Section 15.203.

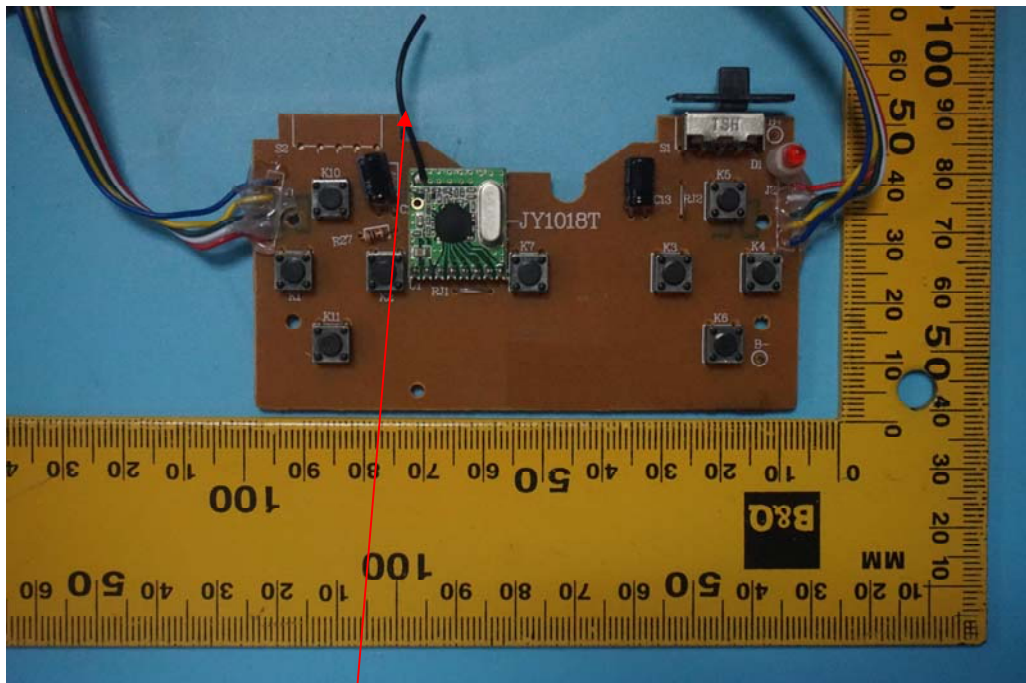

Antenna