

FCC Test Report

Product Name	Mobile Tablet
Model No.	DT317BT
FCC ID.	YE3800H

Applicant	DT Research, Inc.
Address	6F, No. 1, NingPo E. St. Taipei, 100 Taiwan

Date of Receipt	Jan. 05, 2017
Issued Date	Feb. 07, 2017
Report No.	1710172R-RFUSP11V00
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd..

Test Report

Issued Date: Feb. 07, 2017

Report No.: 1710172R-RFUSP11V00



Product Name	Mobile Tablet
Applicant	DT Research, Inc.
Address	6F, No. 1, NingPo E. St. Taipei, 100 Taiwan
Manufacturer	DT Research, Inc.
Model No.	DT317BT
FCC ID.	YE3800H
EUT Rated Voltage	AC 100-240V, 50-60Hz
EUT Test Voltage	AC 120V/60Hz
Trade Name	DT Research, Inc.
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2015 ANSI C63.4: 2014, ANSI C63.10: 2013 KDB 558074 D01 DTS Meas Guidance v03r05
Test Result	Complied

Documented By :

Rita Huang

(Senior Adm. Specialist / Rita Huang)

Tested By :

Xiao Chen

(Engineer / Xiao Chen)

Approved By :

Vincent Lin

(Director / Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	4
1.1. EUT Description.....	4
1.2. Operational Description.....	6
1.3. Tested System Details.....	7
1.4. Configuration of Tested System	7
1.5. EUT Exercise Software	7
1.6. Test Facility	8
1.7. List of Test Equipment.....	9
2. CONDUCTED EMISSION	10
2.1. Test Setup	10
2.2. Limits.....	11
2.3. Test Procedure	11
2.4. Uncertainty	11
2.5. Test Result of Conducted Emission.....	12
3. PEAK POWER OUTPUT	14
3.1. Test Setup	14
3.2. Limit	14
3.3. Test Procedure	14
3.4. Uncertainty	14
3.5. Test Result of Peak Power Output	15
4. RADIATED EMISSION	16
4.1. Test Setup	16
4.2. Limits.....	17
4.3. Test Procedure	18
4.4. Uncertainty	18
4.5. Test Result of Radiated Emission.....	19
5. RF ANTENNA CONDUCTED TEST	23
5.1. Test Setup	23
5.2. Limits.....	23
5.3. Test Procedure	23
5.4. Uncertainty	23
5.5. Test Result of RF Antenna Conducted Test	24
6. BAND EDGE	25
6.1. Test Setup	25
6.2. Limit	26
6.3. Test Procedure	26
6.4. Uncertainty	26
6.5. Test Result of Band Edge	27
7. 6DB BANDWIDTH	31
7.1. Test Setup	31
7.2. Limits.....	31
7.3. Test Procedure	31
7.4. Uncertainty	31
7.5. Test Result of 6dB Bandwidth.....	32
8. POWER DENSITY	35
8.1. Test Setup	35
8.2. Limits.....	35
8.3. Test Procedure	35
8.4. Uncertainty	35
8.5. Test Result of Power Density	36
9. EMI REDUCTION METHOD DURING COMPLIANCE TESTING	39
Attachment 1: EUT Test Photographs	
Attachment 2: EUT Detailed Photographs	

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	Mobile Tablet
Trade Name	DT Research, Inc.
Model No.	DT317BT
FCC ID.	YE3800H
Frequency Range	2402 – 2480MHz
Channel Number	V4.0: 40CH
Type of Modulation	V4.0: GFSK(1Mbps)
Antenna Type	PCB Antenna
Channel Control	Auto
Antenna Gain	Refer to the table “Antenna List”
Power Adapter	MFR: ENG, M/N: 6A-181WP05 Input: 100-240V~ 0.6A, 50-60Hz Output: 5V $\overline{=}$ 3A Cable out: Non-Shielded, 1.4m, with one ferrite core bonded.

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	CHENGYU ELECTRIC Co.,LTD	PA0121(Main), PA0122(Aux)	PCB Antenna	1.65dBi for 2.4 GHz

Note:

1. The antenna of EUT conforms to FCC 15.203.

Center Frequency of Each Channel: (For V4.0)

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 00:	2402 MHz	Channel 01:	2404 MHz	Channel 02:	2406 MHz	Channel 03:	2408 MHz
Channel 04:	2410 MHz	Channel 05:	2412 MHz	Channel 06:	2414 MHz	Channel 07:	2416 MHz
Channel 08:	2418 MHz	Channel 09:	2420 MHz	Channel 10:	2422 MHz	Channel 11:	2424 MHz
Channel 12:	2426 MHz	Channel 13:	2428 MHz	Channel 14:	2430 MHz	Channel 15:	2432 MHz
Channel 16:	2434 MHz	Channel 17:	2436 MHz	Channel 18:	2438 MHz	Channel 19:	2440 MHz
Channel 20:	2442 MHz	Channel 21:	2444 MHz	Channel 22:	2446 MHz	Channel 23:	2448 MHz
Channel 24:	2450 MHz	Channel 25:	2452 MHz	Channel 26:	2454 MHz	Channel 27:	2456 MHz
Channel 28:	2458 MHz	Channel 29:	2460 MHz	Channel 30:	2462 MHz	Channel 31:	2464 MHz
Channel 32:	2466 MHz	Channel 33:	2468 MHz	Channel 34:	2470 MHz	Channel 35:	2472 MHz
Channel 36:	2474 MHz	Channel 37:	2476 MHz	Channel 38:	2478 MHz	Channel 39:	2480 MHz

Note:

1. The EUT is a Mobile Tablet with a built-in WLAN 、 Bluetooth V3.0, V2.1+EDR, V4.0 transceiver, this report for Bluetooth V4.0.
2. These tests were conducted on a sample for the purpose of demonstrating compliance of Bluetooth transmitter with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
3. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
4. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.

Test Mode	Mode 1: Transmit - BLE (GFSK)
-----------	-------------------------------


1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	Serial No.	Power Cord
1	Keyboard	Logitech	Y-UR83	SY848UK	N/A
2	Earphone	Dr.AV	CD-806B	N/A	N/A

Signal Cable Type	Signal cable Description
A Keyboard Cable	Non-Shielded, 1.8m
B Earphone Cable	Non-Shielded, 1.0m

1.4. Configuration of Tested System

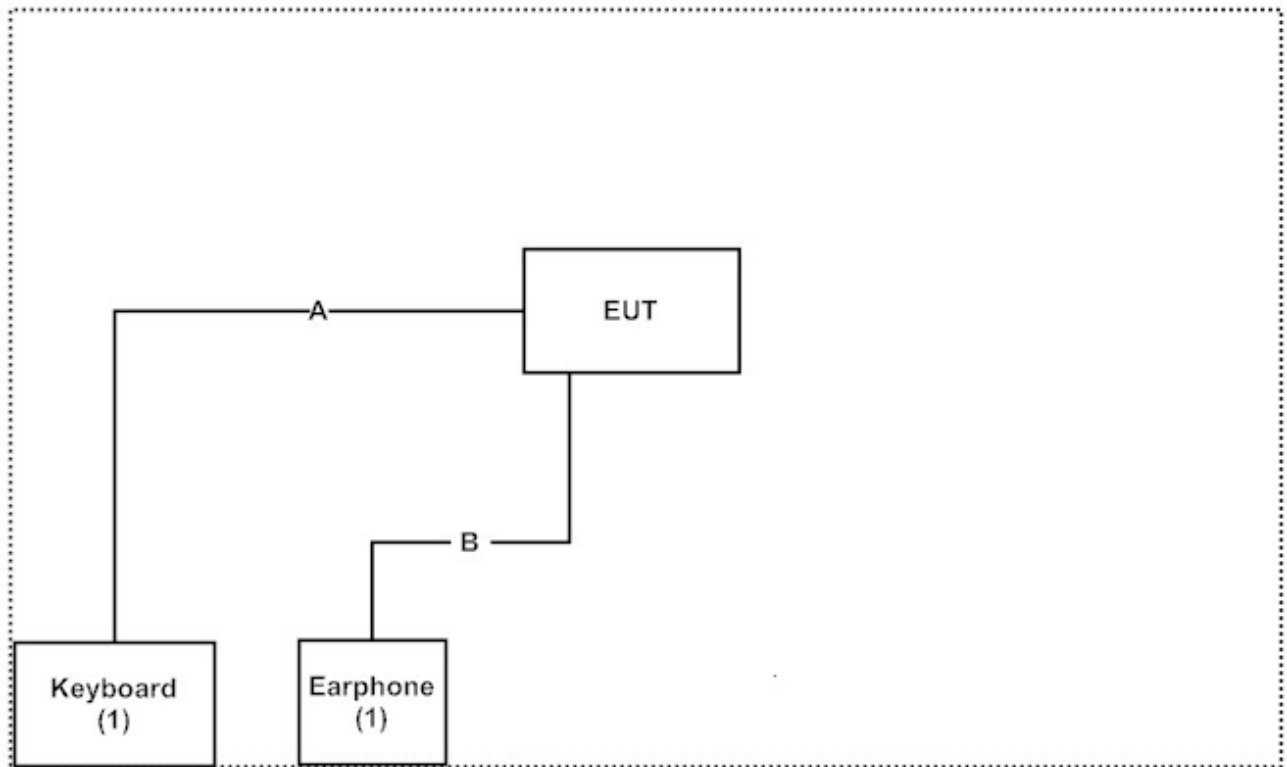

1.5. EUT Exercise Software

1. Setup the EUT as shown in Section 1.4.
2. Execute software "Command Prompt 10.0.1.0 240" on the Notebook PC.
3. Configure the test mode, the test channel, and the data rate.
4. Press "OK" to start the continuous Transmit.
5. Verify that the EUT works properly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	30-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from DEKRA Testing and Certification Co., Ltd. Web Site:

<http://www.dekra.com.tw/english/about/certificates.aspx?bval=5>

The address and introduction of DEKRA Testing and Certification Co., Ltd. laboratories can be founded in our Web site: http://www.dekra.com.tw/index_en.aspx

Site Description: Accredited by TAF
Accredited Number: 3023

Site Name: DEKRA Testing and Certification Co., Ltd
Site Address: No.5-22, Ruishukeng, Linkou Dist., New Taipei City 24451,
Taiwan, R.O.C.
TEL : 886-2-8601-3788 / FAX : 886-2-8601-3789
E-Mail : info.tw@dekra.com

FCC Accreditation Number: TW1014

1.7. List of Test Equipment

For Conducted measurements /CB3/SR8

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
	Temperature Chamber	WIT GROUP	TH-1S-B	EQ-201-00146	2016/11/28	2017/11/27
X	Spectrum Analyzer	Agilent	N9010A	MY48030495	2016/7/22	2017/7/21
X	Power Meter	Anritsu	ML2495A	6K00003357	2016/6/23	2017/6/22
X	Pulse power sensor	Anritsu	MA2411B	0846193	2016/6/23	2017/6/22
X	EMI Test Receiver	R&S	ESCS 30	100369	2016/10/13	2017/10/12
X	LISN	R&S	ESH3-Z5	836679/017	2017/1/7	2018/1/6
X	LISN	R&S	ENV216	100097	2017/1/7	2018/1/6
X	Coaxial Cable	QTK(Armist)	RG 400	LC018-RG	2016/6/25	2017/6/24

For Radiated measurements /Site3/CB8


	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	Spectrum Analyzer	R&S	FSP40	100170	2017/1/5	2018/1/4
	Loop Antenna	Teseq	HLA6121	37133	2016/3/18	2017/3/17
X	Bi-Log Antenna	Schaffner Chase	CBL6112B	2707	2016/3/18	2017/3/17
X	Horn Antenna	ETS-Lindgren	3117	00135205	2016/6/11	2017/6/10
	Horn Antenna	Schwarzbeck	BBHA9170	9170430	2016/4/6	2017/4/5
X	Pre-Amplifier	QTK	AP/0100A	CHM/0901069	2017/1/11	2018/1/10
X	Pre-Amplifier	EMCI	EMC012630SE	980210	2016/6/23	2017/6/22
	Pre-Amplifier	NARDA WE	DBL-1840N506	013	2016/1/26	2017/1/24
X	Filter	MicroTRON	BRM50701	019	2016/9/30	2017/9/29
	Filter	Microwave Circuits	N0257881	36681	2016/11/2	2017/11/1
X	EMI Test Receiver	R&S	ESR26	101385	2016/12/7	2017/12/6
X	Coaxial Cable	QTK(Armist)	SUCOFLEX 106	L1606-015C	2016/9/29	2017/9/28
X	EMI Test Receiver	R&S	ESCS 30	838251/001	2016/6/23	2017/6/22
X	Coaxial Cable	QTK(Armist)	RG 214	LC003-RG	2016/7/21	2017/7/20
X	Coaxial signal switch	Anritsu	MP59B	6201415889	2016/6/16	2017/6/15

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : QuiTek EMI 2.0 V2.1.113

2. Conducted Emission

2.1. Test Setup

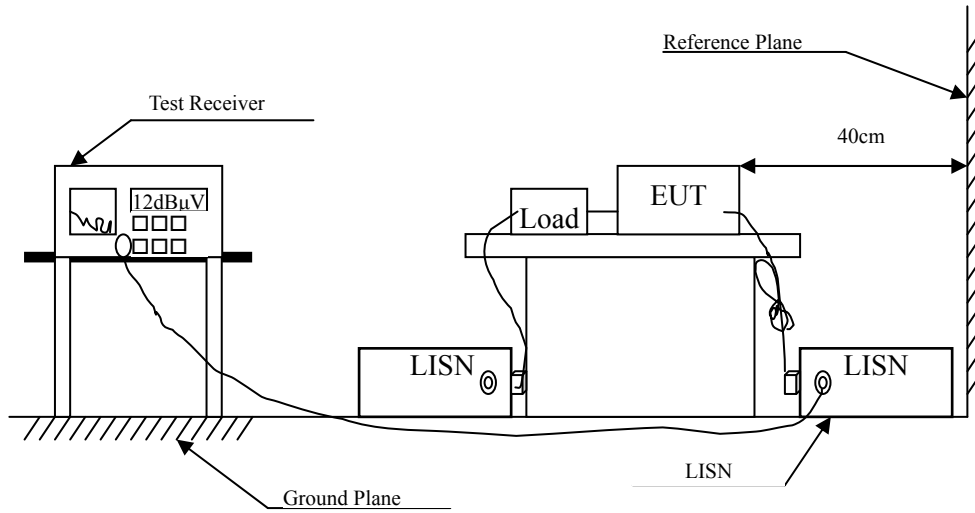

2.2. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBμV) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

2.3. Test Procedure

The EUT and Peripherals are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

The EUT was setup to ANSI C63.4, 2014; tested to DTS test procedure of FCC KDB-558074 for compliance to FCC 47CFR Subpart C requirements.

2.4. Uncertainty

± 2.26 dB

2.5. Test Result of Conducted Emission

Product : Mobile Tablet
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test date : 2017/01/11
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2440MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V	Margin dB	Limit dB μ V
LINE 1					
Quasi-Peak					
0.181	9.678	49.900	59.578	-5.536	65.114
0.338	9.670	34.600	44.270	-16.359	60.629
0.478	9.675	25.490	35.165	-21.464	56.629
1.166	9.707	23.470	33.177	-22.823	56.000
3.384	9.771	25.670	35.441	-20.559	56.000
25.337	10.097	16.830	26.927	-33.073	60.000
Average					
0.181	9.678	34.610	44.288	-10.826	55.114
0.338	9.670	7.710	17.380	-33.249	50.629
0.478	9.675	14.960	24.635	-21.994	46.629
1.166	9.707	3.890	13.597	-32.403	46.000
3.384	9.771	14.960	24.731	-21.269	46.000
25.337	10.097	12.230	22.327	-27.673	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "█" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : Mobile Tablet
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test date : 2017/01/11
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2440MHz)


Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V	Margin dB	Limit dB μ V
LINE 2					
Quasi-Peak					
0.205	9.736	45.320	55.056	-9.373	64.429
0.447	9.744	26.980	36.724	-20.790	57.514
2.283	9.811	21.820	31.631	-24.369	56.000
3.205	9.829	21.080	30.909	-25.091	56.000
8.630	9.958	19.090	29.048	-30.952	60.000
26.810	10.408	17.670	28.078	-31.922	60.000
Average					
0.205	9.736	11.920	21.656	-32.773	54.429
0.447	9.744	14.380	24.124	-23.390	47.514
2.283	9.811	10.360	20.171	-25.829	46.000
3.205	9.829	10.400	20.229	-25.771	46.000
8.630	9.958	11.650	21.608	-28.392	50.000
26.810	10.408	11.920	22.328	-27.672	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "■" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

3. Peak Power Output

3.1. Test Setup

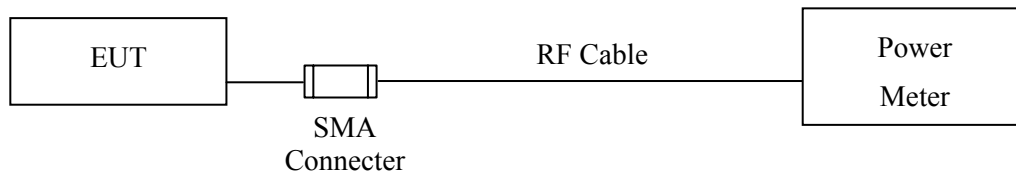

3.2. Limit

The maximum peak power shall be less 1Watt.

3.3. Test Procedure

Tested according to DTS test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements. The maximum peak conducted output power using KDB 558074 section 9.1.3 PKPM1 Peak power meter method.

3.4. Uncertainty

± 1.19 dB

3.5. Test Result of Peak Power Output


Product : Mobile Tablet
Test Item : Peak Power Output
Test Site : No.3 OATS
Test date : 2017/01/20
Test Mode : Mode 1: Transmit - BLE (GFSK)

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	-0.44	1 Watt= 30 dBm	Pass
Channel 19	2440.00	-0.42	1 Watt= 30 dBm	Pass
Channel 39	2480.00	-0.06	1 Watt= 30 dBm	Pass


4. Radiated Emission

4.1. Test Setup


Under 30MHz

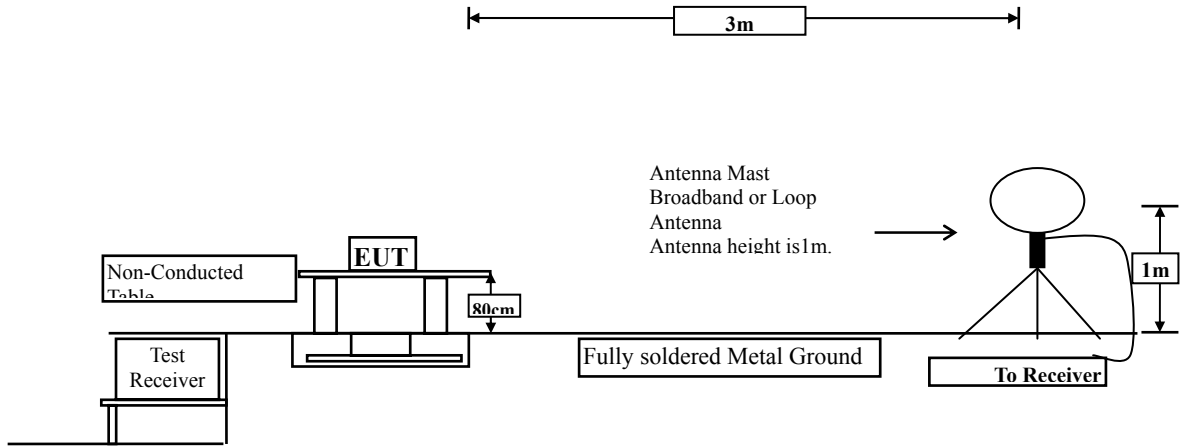

Below 1GHz

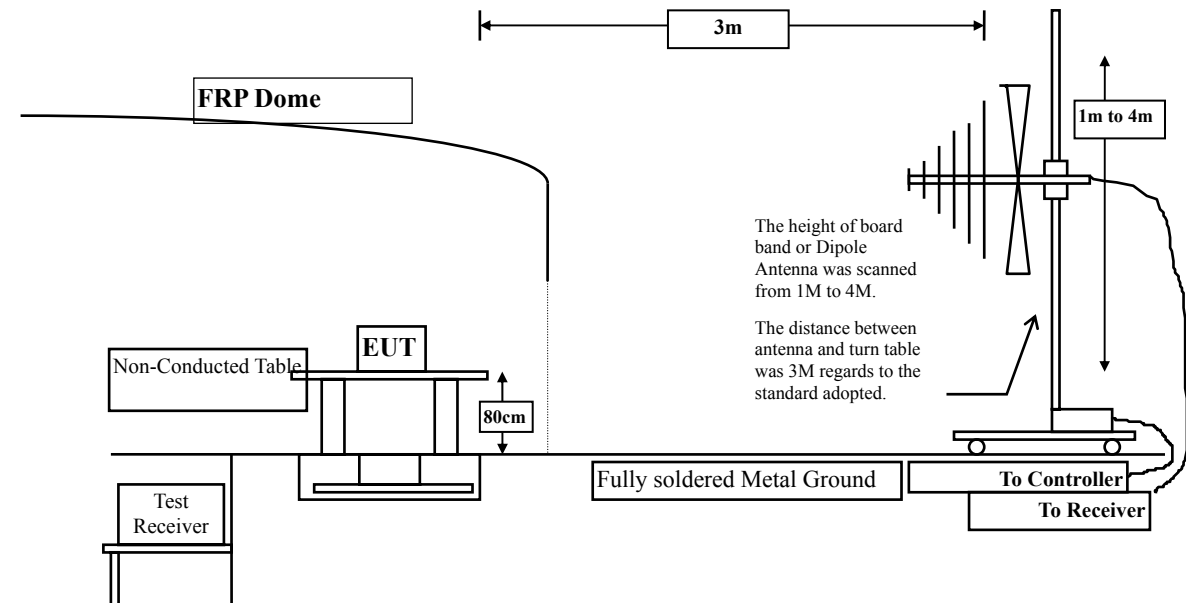

Above 1GHz

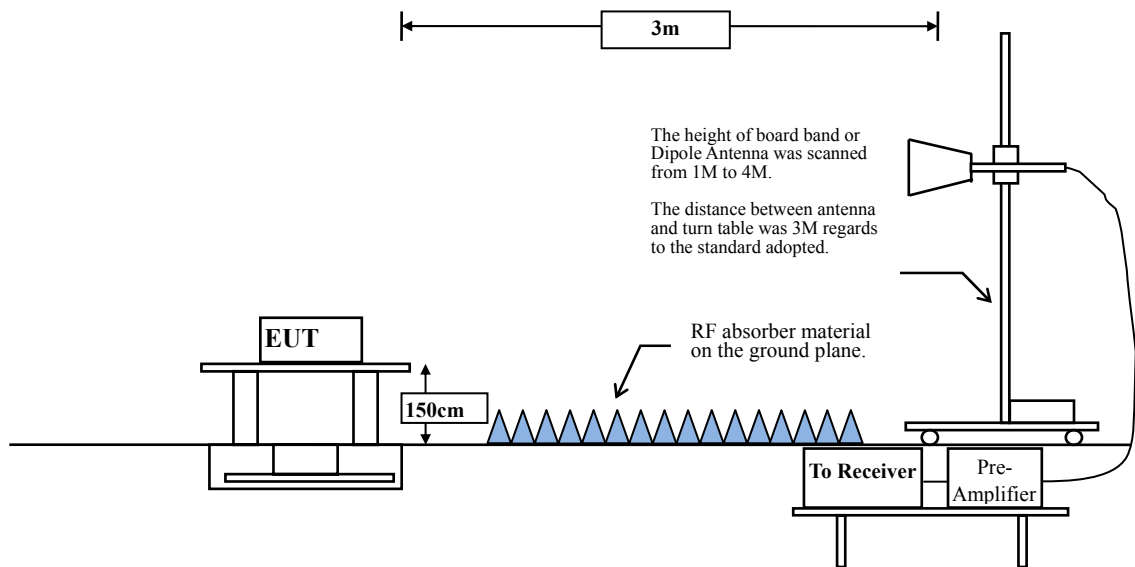

4.2. Limits

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

- Remarks:
1. RF Voltage (dB μ V) = 20 log RF Voltage (uV)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

4.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured in the Open Area Test Site on the Final Measurement.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

4.4. Uncertainty

± 4.08 dB above 1GHz

± 4.22 dB below 1GHz

4.5. Test Result of Radiated Emission

Product : Mobile Tablet
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test date : 2017/01/10
 Test Mode : Mode 1: Transmit - BLE (GFSK)(2402MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
4804.000	2.511	43.477	45.987	-28.013	74.000
7206.000	9.511	37.419	46.930	-27.070	74.000
9608.000	10.394	36.671	47.065	-26.935	74.000
Average Detector:					
--					
Vertical					
Peak Detector:					
4804.000	2.923	43.410	46.332	-27.668	74.000
7206.000	9.988	37.443	47.432	-26.568	74.000
9608.000	10.847	36.320	47.167	-26.833	74.000
Average Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Mobile Tablet
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test date : 2017/01/10
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2440MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
4880.000	2.038	39.691	41.729	-32.271	74.000
7320.000	9.699	36.886	46.585	-27.415	74.000
9760.000	9.665	37.270	46.935	-27.065	74.000
Average Detector:					
--					
Vertical					
Peak Detector:					
4880.000	2.499	39.731	42.230	-31.770	74.000
7320.000	10.303	37.367	47.670	-26.330	74.000
9760.000	10.299	36.681	46.981	-27.019	74.000
Average Detector:					
--					

Note:

- All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
- Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
- Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
- Measurement Level = Reading Level + Correct Factor.
- Correct Factor = Antenna factor + Cable loss – Amplifier gain.
- The average measurement was not performed when the peak measured data under the limit of average detection.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Mobile Tablet
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test date : 2017/01/10
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2480MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
4960.000	2.582	39.322	41.904	-32.096	74.000
7440.000	10.555	36.086	46.641	-27.359	74.000
9920.000	10.206	36.150	46.356	-27.644	74.000
Average Detector:					
--					
Vertical					
Peak Detector:					
4960.000	3.398	39.702	43.101	-30.899	74.000
7440.000	11.214	36.831	48.045	-25.955	74.000
9920.000	11.245	36.644	47.889	-26.111	74.000
Average Detector:					
--					

Note:

- All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
- Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
- Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
- Measurement Level = Reading Level + Correct Factor.
- Correct Factor = Antenna factor + Cable loss – Amplifier gain.
- The average measurement was not performed when the peak measured data under the limit of average detection.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Mobile Tablet
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test date : 2017/01/26
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2440MHz)


Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
362.710	0.088	37.286	37.374	-8.626	46.000
471.350	3.261	38.336	41.597	-4.403	46.000
603.270	4.075	37.091	41.166	-4.834	46.000
666.320	1.879	34.982	36.861	-9.139	46.000
768.170	5.103	28.234	33.338	-12.662	46.000
830.250	7.328	30.580	37.908	-8.092	46.000
Vertical					
207.510	-5.548	30.681	25.133	-18.367	43.500
388.900	-0.726	26.287	25.561	-20.439	46.000
542.160	1.855	25.221	27.076	-18.924	46.000
622.670	0.356	30.697	31.053	-14.947	46.000
754.590	2.855	23.651	26.505	-19.495	46.000
830.250	2.208	28.907	31.115	-14.885	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

5. RF Antenna Conducted Test

5.1. Test Setup

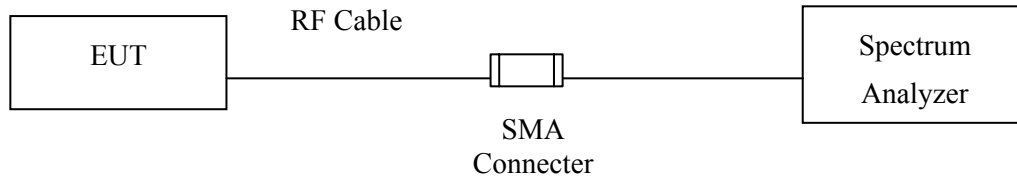

5.2. Limits

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

5.3. Test Procedure

The EUT was tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

5.4. Uncertainty

$\pm 1.20\text{dB}$

5.5. Test Result of RF Antenna Conducted Test

Product : Mobile Tablet
Test Item : RF Antenna Conducted Test
Test Site : No.3 OATS
Test date : 2017/01/10
Test Mode : Mode 1: Transmit - BLE (GFSK)

Figure Channel 00:

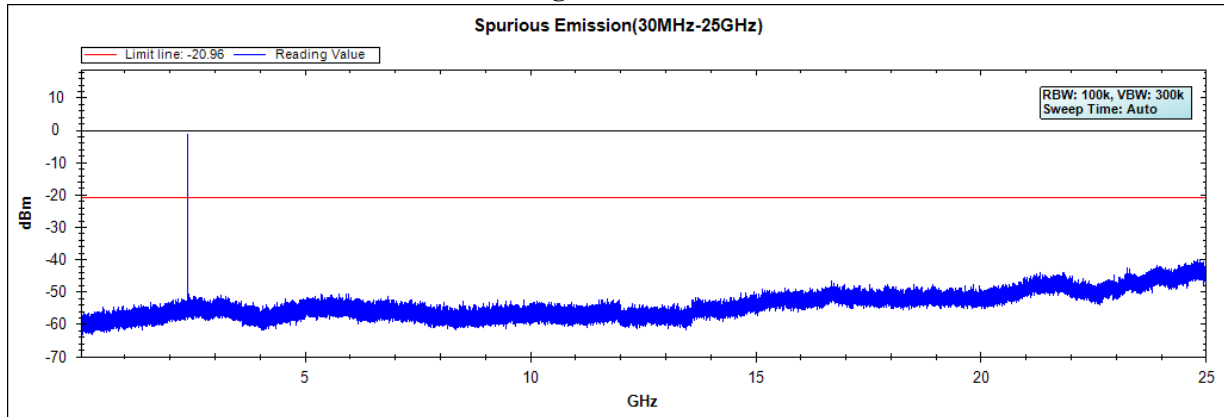


Figure Channel 19:


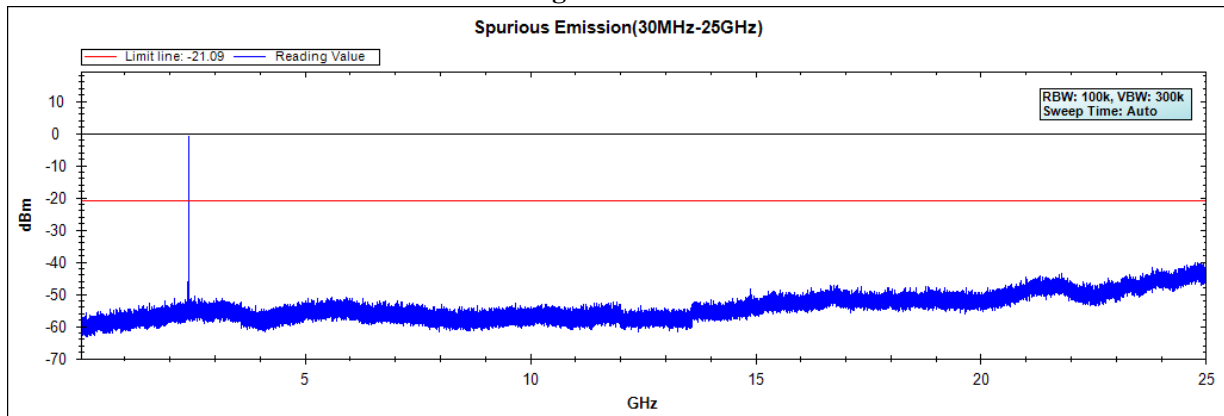



Figure Channel 39:

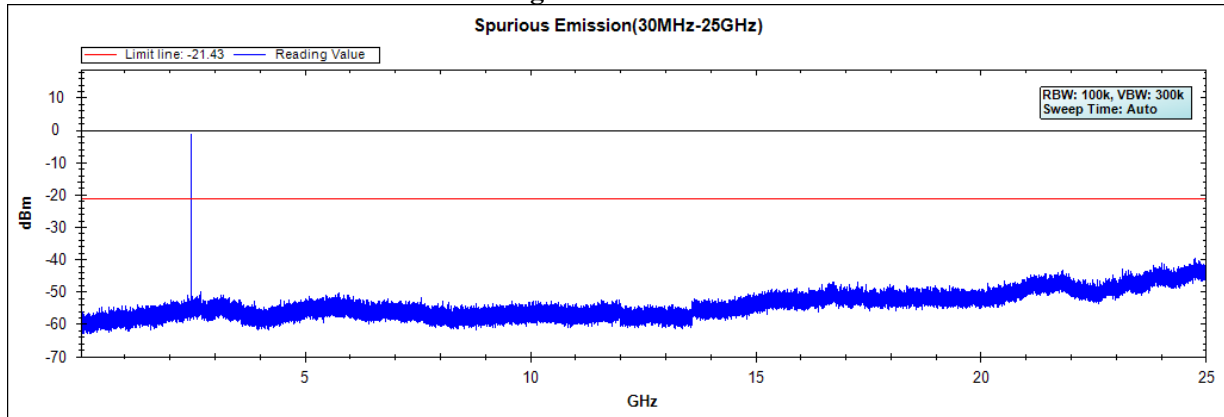

6. Band Edge


6.1. Test Setup

RF Conducted Measurement

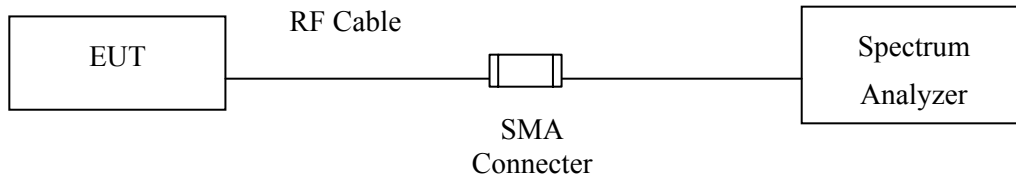

RF Radiated Measurement:

Above 1GHz

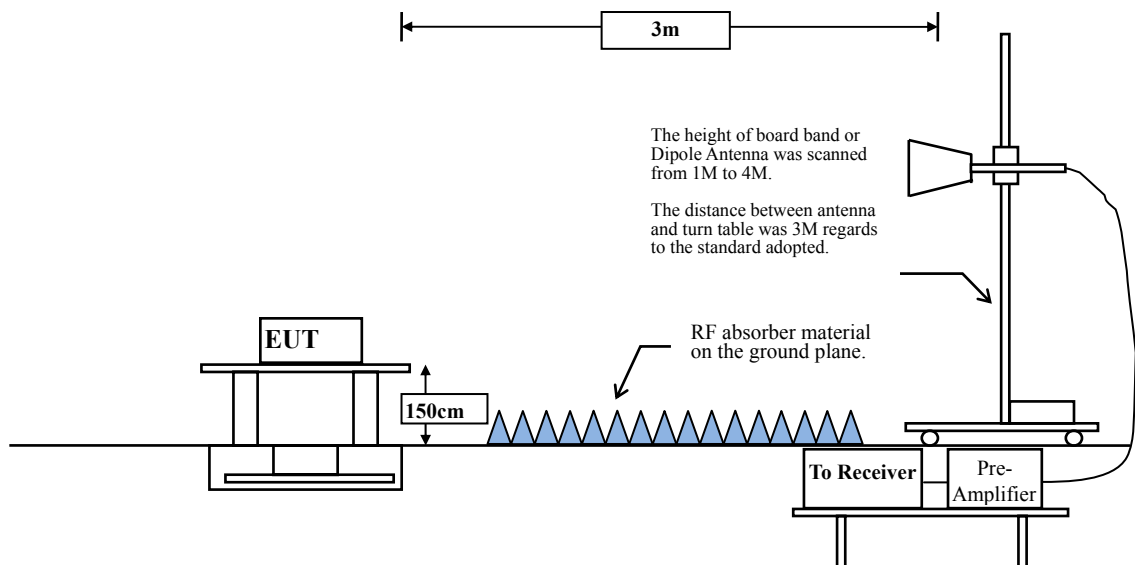

6.2. Limit

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

6.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.

6.4. Uncertainty

± 4.08 dB above 1GHz

± 4.22 dB below 1GHz

6.5. Test Result of Band Edge

Product : Mobile Tablet
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test date : 2017/01/10
 Test Mode : Mode 1: Transmit - BLE (GFSK)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
00 (Peak)	2371.900	-2.767	45.749	42.982	74.00	54.00	Pass
00 (Peak)	2390.000	-2.687	43.611	40.924	74.00	54.00	Pass
00 (Peak)	2400.000	-2.660	69.879	67.219	--	--	--
00 (Peak)	2402.200	-2.657	97.833	95.176	--	--	--
00 (Average)	2390.000	-2.687	31.986	29.299	74.00	54.00	Pass
00 (Average)	2400.000	-2.660	46.650	43.990	--	--	--
00 (Average)	2402.000	-2.657	73.677	71.020	--	--	--

Figure Channel 00: Horizontal (Peak)


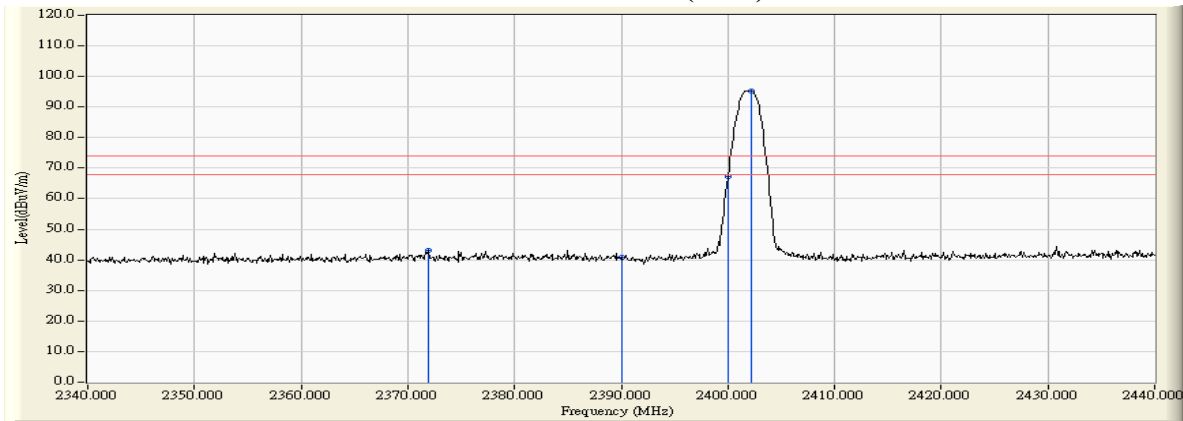


Figure Channel 00: Horizontal (Average)

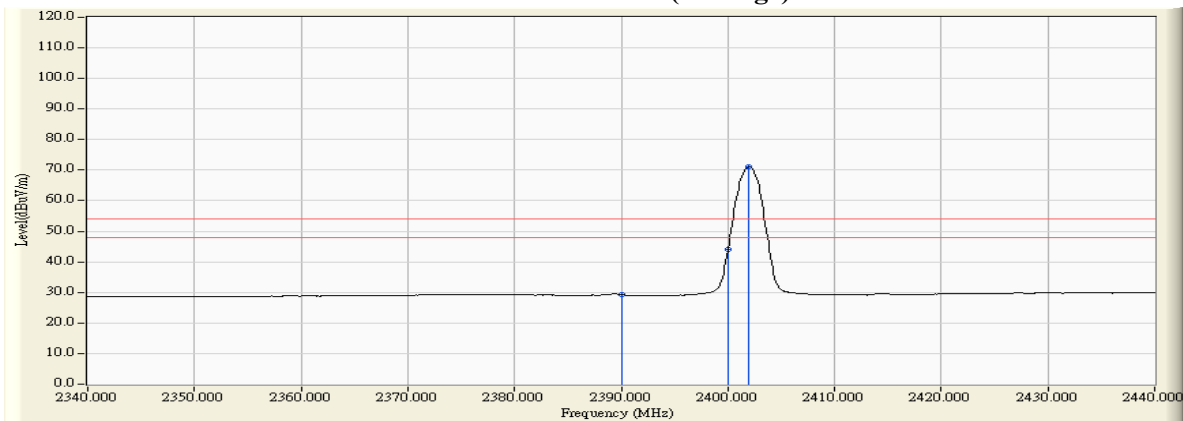

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Mobile Tablet
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test date : 2017/01/10
 Test Mode : Mode 1: Transmit - BLE (GFSK)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
00 (Peak)	2382.500	-4.134	46.730	42.596	74.00	54.00	Pass
00 (Peak)	2390.000	-4.159	45.759	41.600	74.00	54.00	Pass
00 (Peak)	2400.000	-4.171	73.897	69.726	--	--	--
00 (Peak)	2401.700	-4.171	101.666	97.495	--	--	--
00 (Average)	2390.000	-4.159	33.076	28.917	74.00	54.00	Pass
00 (Average)	2400.000	-4.171	49.150	44.979	74.00	54.00	Pass
00 (Average)	2402.000	-4.171	76.275	72.104	--	--	--

Figure Channel 00: Vertical (Peak)


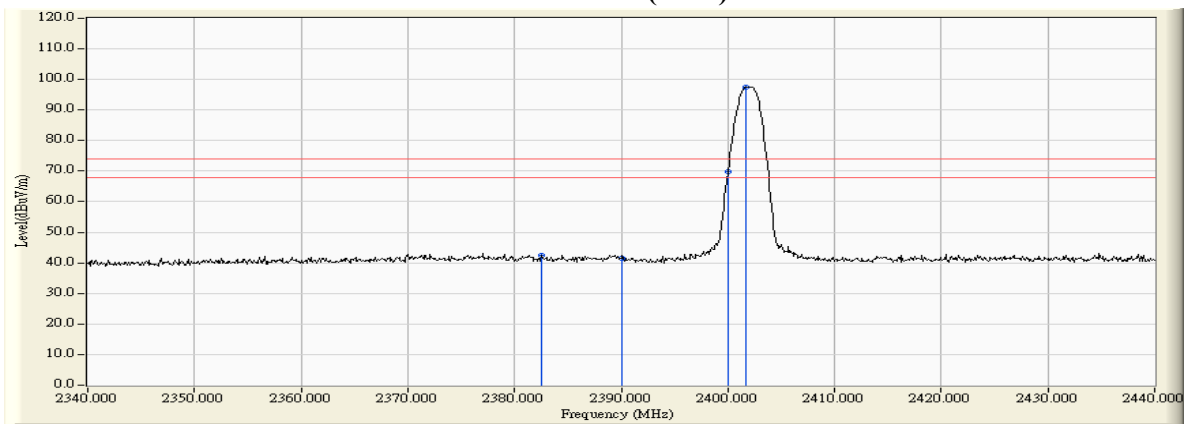


Figure Channel 00: Vertical (Average)

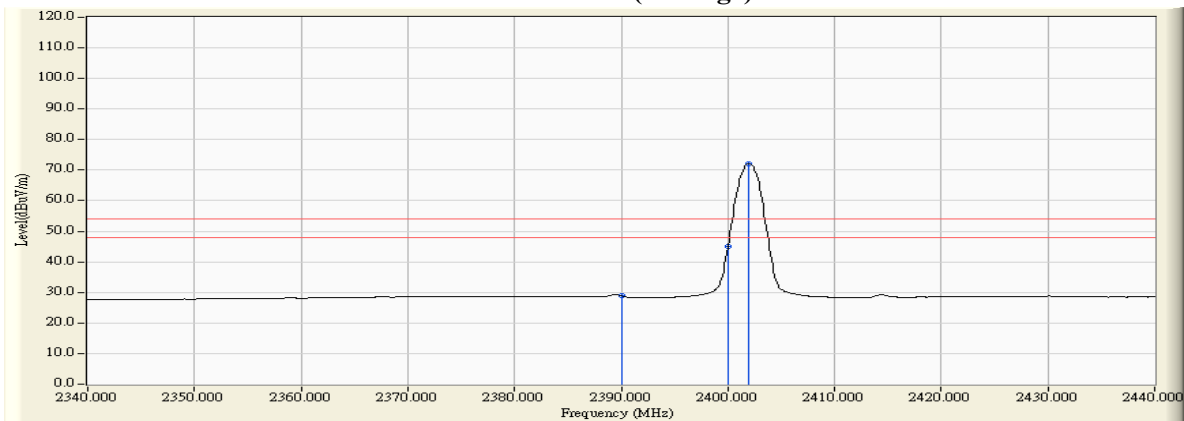

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Mobile Tablet
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test date : 2017/01/10
 Test Mode : Mode 1: Transmit - BLE (GFSK)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
39 (Peak)	2479.700	-2.604	96.510	93.905	--	--	--
39 (Peak)	2483.500	-2.601	45.064	42.462	74.00	54.00	Pass
39 (Peak)	2505.300	-2.639	47.344	44.705	74.00	54.00	Pass
39 (Average)	2480.000	-2.605	72.809	70.204	--	--	--
39 (Average)	2483.500	-2.601	32.432	29.830	74.00	54.00	Pass

Figure Channel 39: Horizontal (Peak)


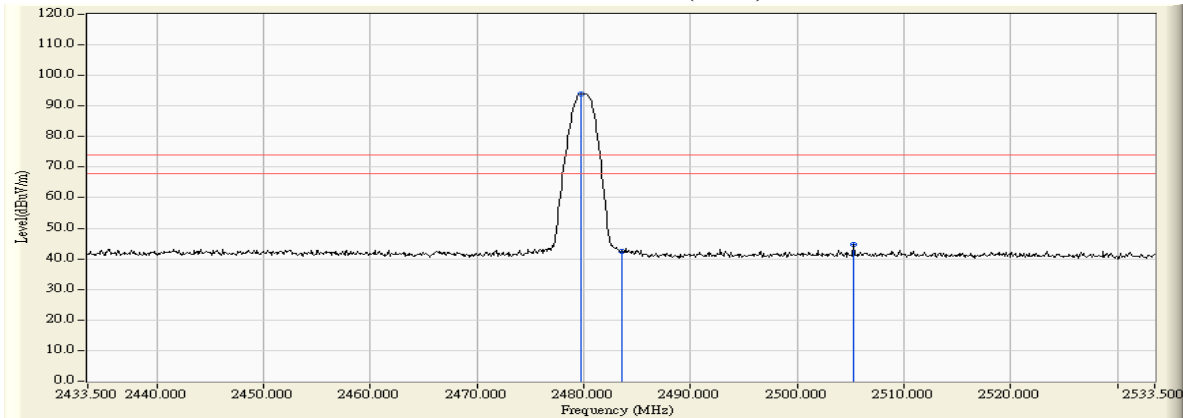


Figure Channel 39: Horizontal (Average)

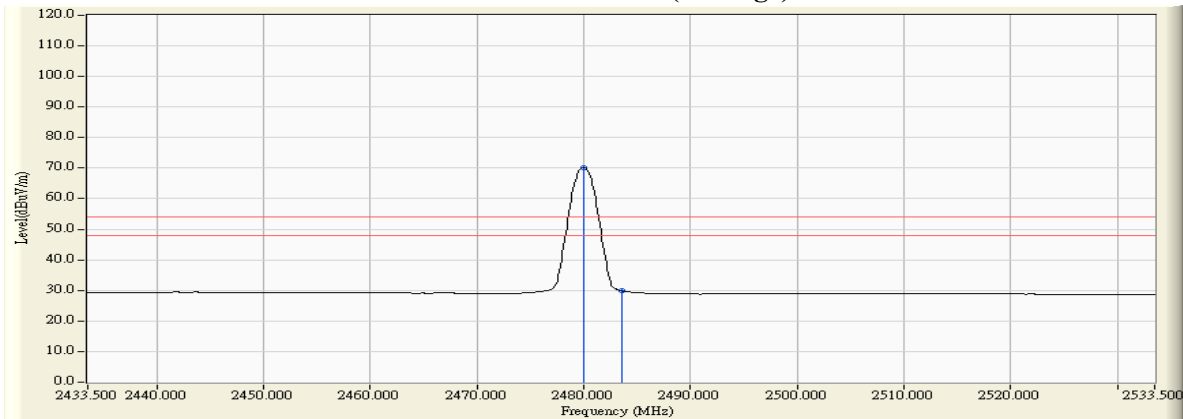

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Mobile Tablet
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test date : 2017/01/10
 Test Mode : Mode 1: Transmit - BLE (GFSK)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
39 (Peak)	2479.700	-3.978	98.822	94.843	--	--	--
39 (Peak)	2483.500	-3.966	45.920	41.953	74.00	54.00	Pass
39 (Peak)	2484.300	-3.965	47.167	43.203	74.00	54.00	Pass
39 (Average)	2480.000	-3.978	74.346	70.368	--	--	--
39 (Average)	2483.500	-3.966	33.157	29.190	74.00	54.00	Pass
39 (Average)	2520.300	-3.812	34.103	30.291	74.00	54.00	Pass

Figure Channel 39: Vertical (Peak)


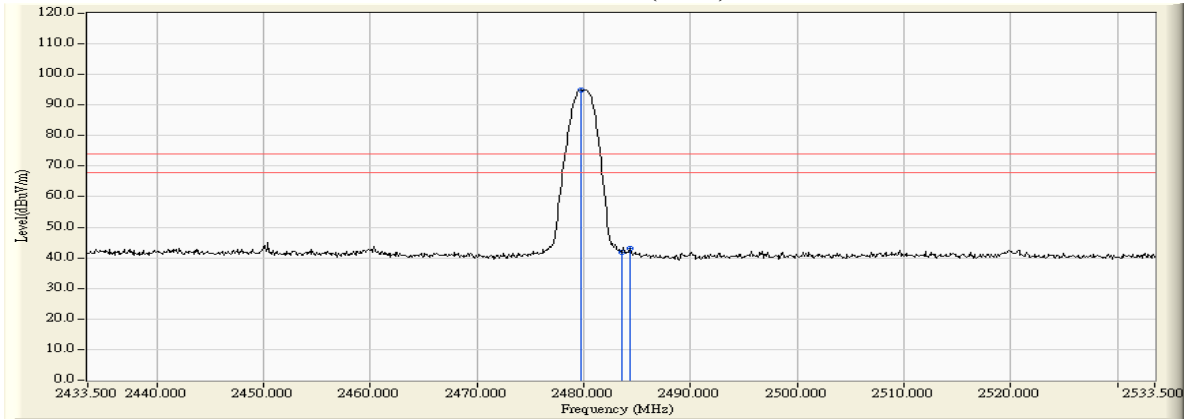


Figure Channel 39: Vertical (Average)

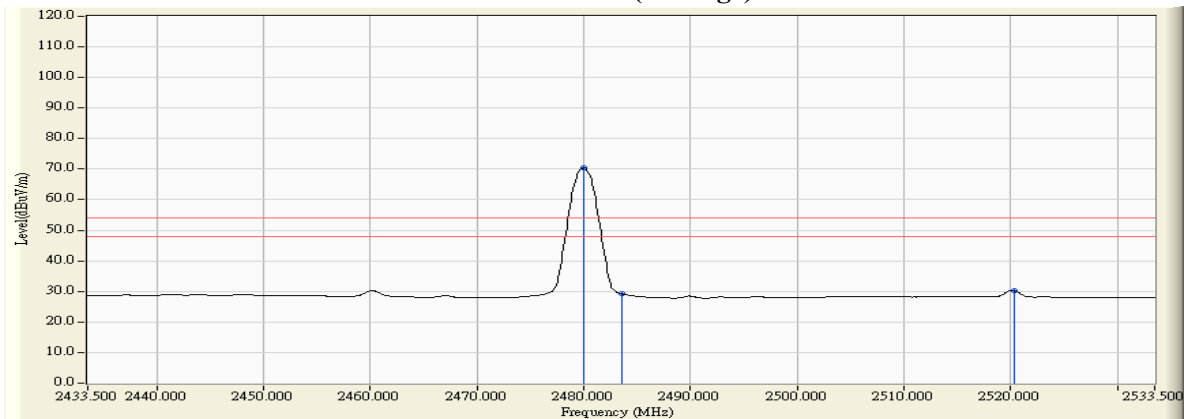


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

7. 6dB Bandwidth

7.1. Test Setup

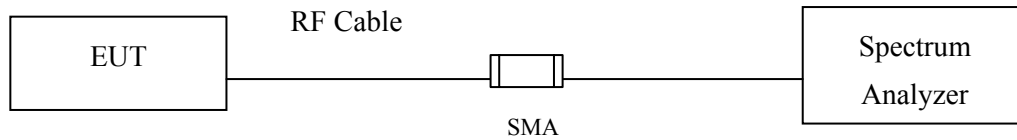

7.2. Limits

The minimum bandwidth shall be at least 500 kHz.

7.3. Test Procedure

The EUT was setup according to ANSI C63.10 2013; tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 1-5% of the emission bandwidth, $VBW \geq 3 * RBW$

7.4. Uncertainty


$\pm 279.2\text{Hz}$

7.5. Test Result of 6dB Bandwidth

Product : Mobile Tablet
 Test Item : 6dB Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2402MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
00	2402	740	>500	Pass


Figure Channel 00:

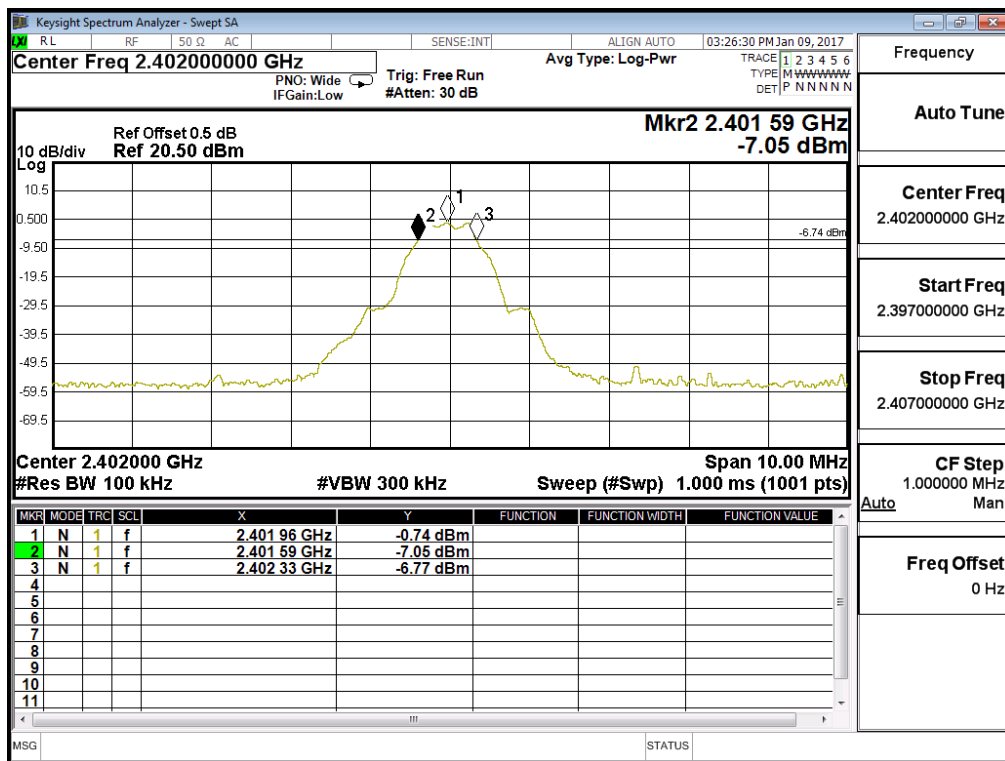

Product : Mobile Tablet
 Test Item : 6dB Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2440MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
19	2440	740	>500	Pass


Figure Channel 19:

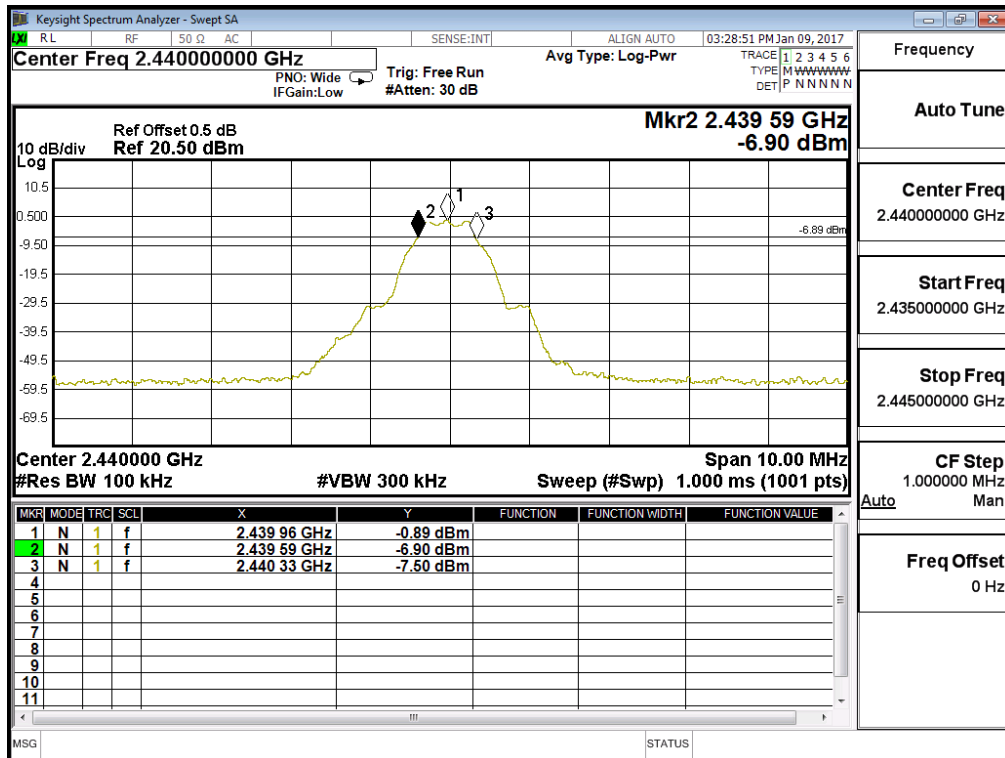

Product : Mobile Tablet
 Test Item : 6dB Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2480MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
39	2480	740	>500	Pass

Figure Channel 39:

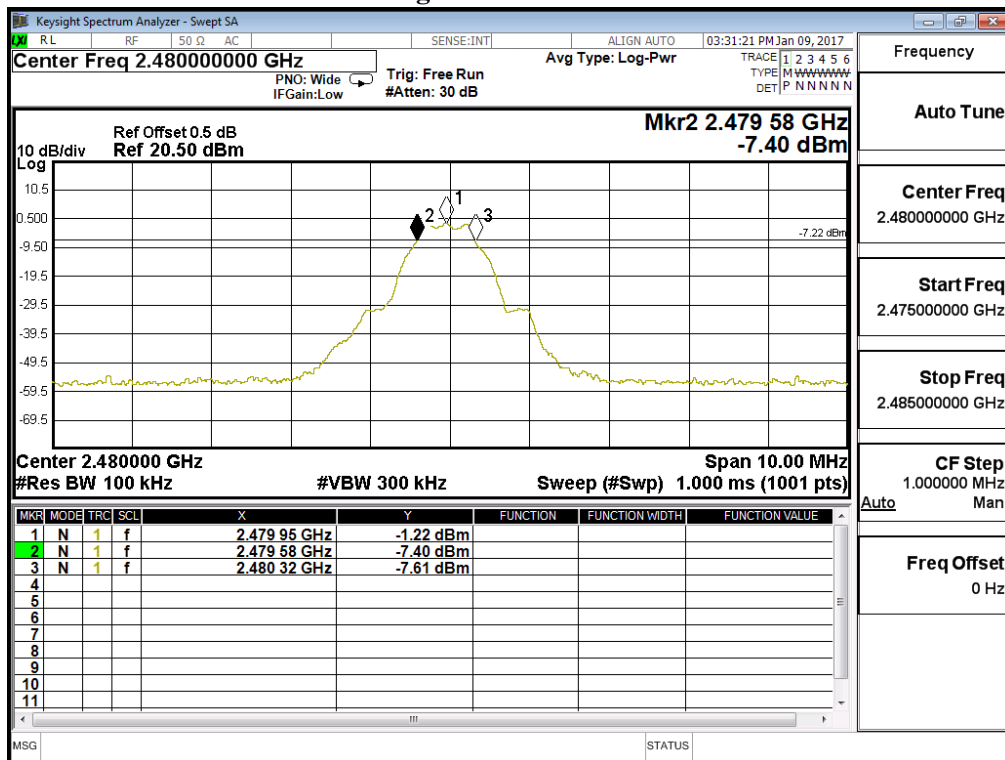

8. Power Density

8.1. Test Setup

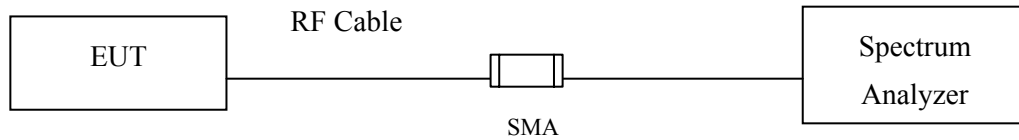

8.2. Limits

The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3kHz bandwidth.

8.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013, the maximum power spectral density using KDB 558074 section 10.2 PKPSD (peak PSD) method.

8.4. Uncertainty


± 1.20 dB

8.5. Test Result of Power Density

Product : Mobile Tablet
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2402MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
00	2402	-0.96	≤ 8dBm	Pass


Figure Channel 00:

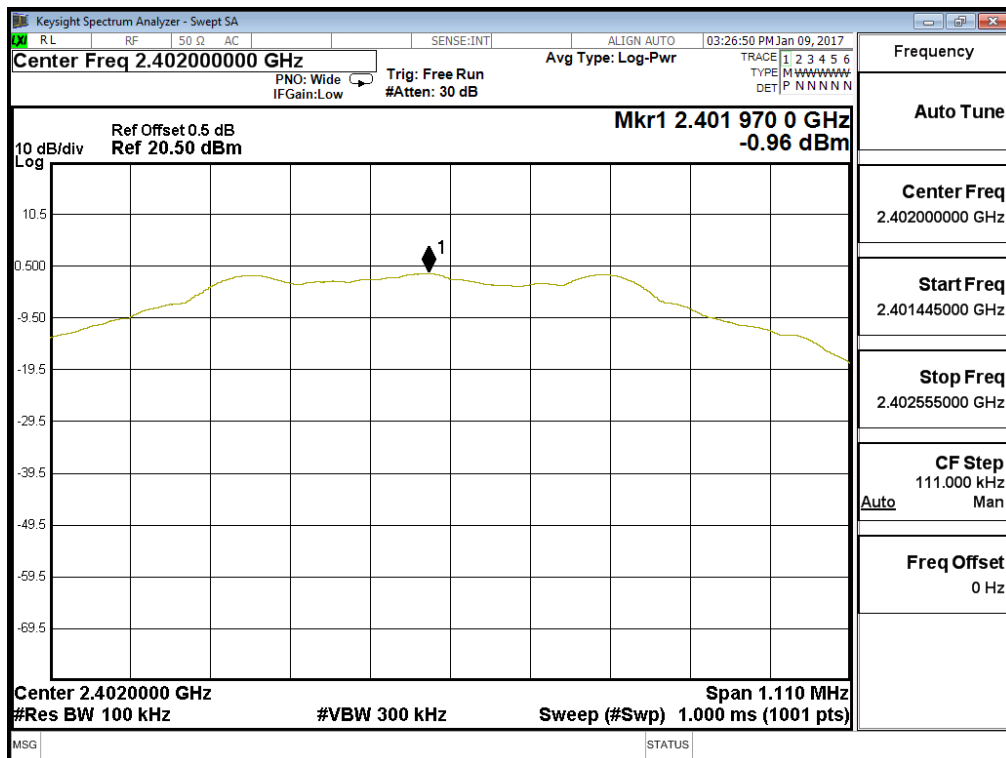

Product : Mobile Tablet
 Test Item : Power Density Data
 Test Site : No.3OATS
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2440MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
19	2440	-1.09	≤ 8dBm	Pass


Figure Channel 19:

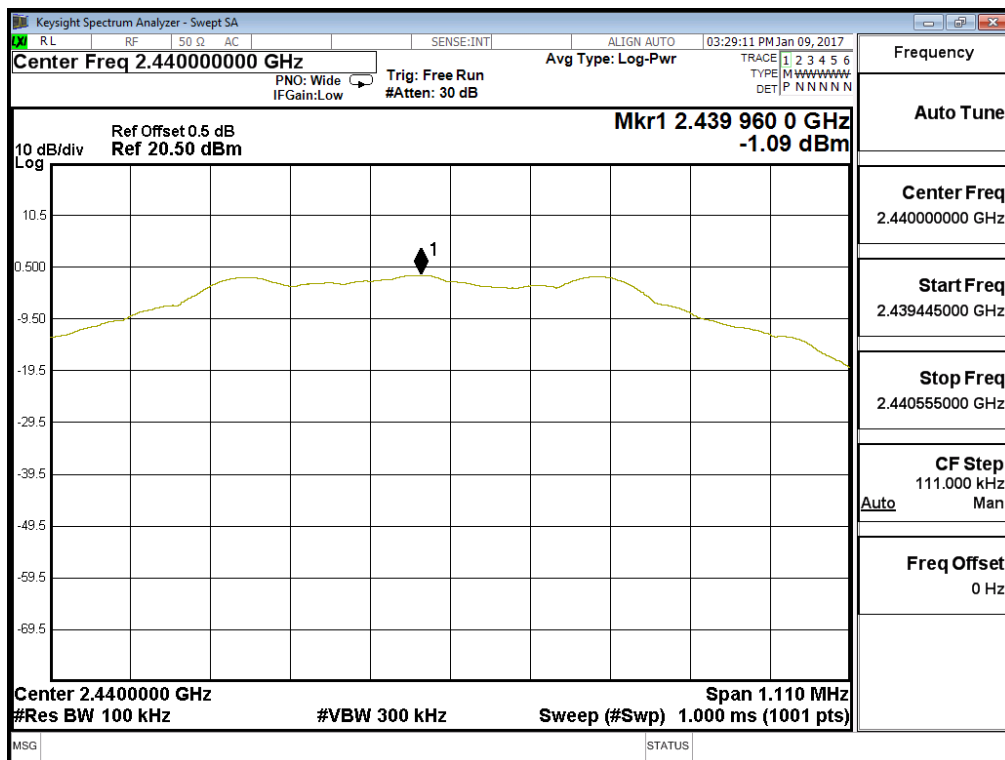

Product : Mobile Tablet
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2480MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
39	2480	-1.43	≤ 8dBm	Pass

Figure Channel 39:

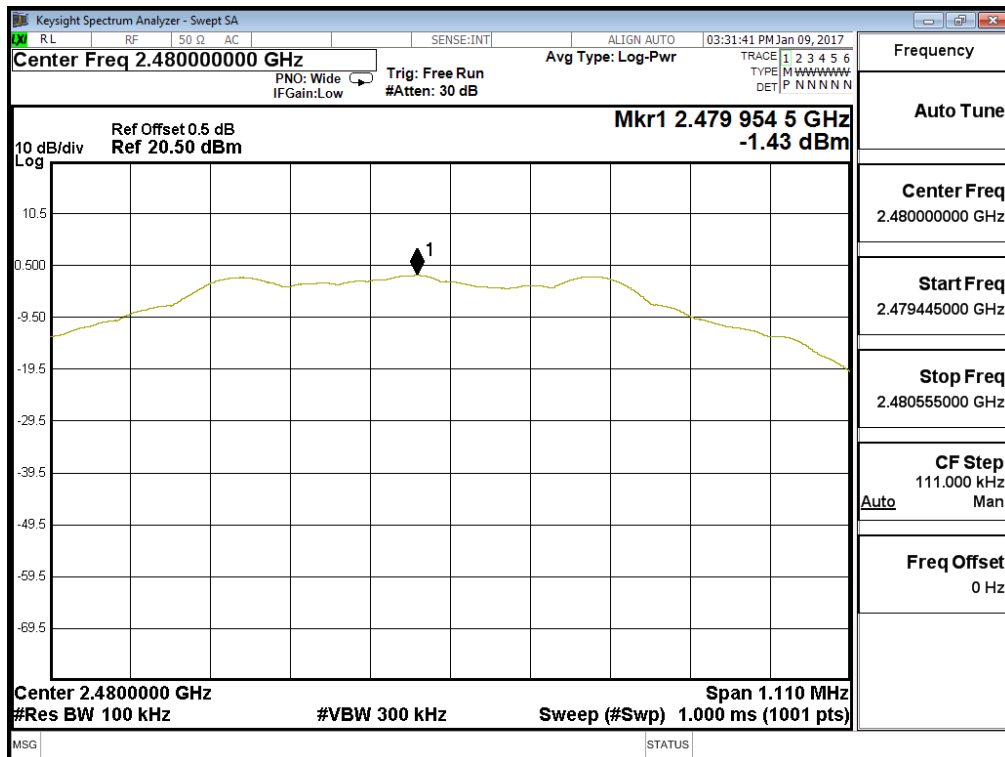

9. EMI Reduction Method During Compliance Testing

No modification was made during testing.

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs