



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 15.247

RSS-GEN, ISSUE 5, APRIL 2018

RSS-247, ISSUE 2, FEBRUARY 2017

TEST REPORT

For

DT Research, Inc.

6F, No.1, NingPo E. St. Taipei, Taiwan, 100

FCC ID: YE3801I
IC: 7647A-801I

Report Type: Class II permissive change	Product Name: Mobile Tablet
Report Number: <u>RDG181016009-00AA1</u>	
Report Date: <u>2018-11-09</u>	
Reviewed By: <u>Jerry Zhang</u> EMC Manager	
Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “**”.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
OBJECTIVE.....	3
TEST METHODOLOGY.....	3
MEASUREMENT UNCERTAINTY.....	4
TEST FACILITY.....	4
SYSTEM TEST CONFIGURATION.....	5
DESCRIPTION OF TEST CONFIGURATION.....	5
EUT EXERCISE SOFTWARE.....	6
EQUIPMENT MODIFICATIONS.....	6
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS.....	6
SUPPORT CABLE LIST AND DETAILS.....	6
BLOCK DIAGRAM OF TEST SETUP.....	7
SUMMARY OF TEST RESULTS.....	8
FCC §15.247 (i) , §1.1310 , §2.1091& RSS-102 §4- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	9
APPLICABLE STANDARD.....	9
FCC §15.203 & RSS-GEN CLAUSE 6.8 - ANTENNA REQUIREMENT.....	12
APPLICABLE STANDARD.....	12
ANTENNA INFORMATION AND CONNECTOR CONSTRUCTION.....	13
FCC §15.207 (a) & RSS-GEN CLAUSE 8.8 – AC LINE CONDUCTED EMISSIONS.....	14
APPLICABLE STANDARD.....	14
EUT SETUP.....	14
EMI TEST RECEIVER SETUP.....	14
TEST PROCEDURE.....	14
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	15
TEST EQUIPMENT LIST AND DETAILS.....	15
TEST DATA.....	15
FCC §15.209, §15.205 & §15.247(d) & RSS-247 CLAUSE 5.5,RSS -GEN CLAUSE 8.10- SPURIOUS EMISSIONS.....	18
APPLICABLE STANDARD.....	18
EUT SETUP.....	18
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP.....	19
TEST PROCEDURE.....	19
TEST EQUIPMENT LIST AND DETAILS.....	20
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	20
TEST DATA.....	20
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT.....	26
APPLICABLE STANDARD.....	26
TEST PROCEDURE.....	26
TEST EQUIPMENT LIST AND DETAILS.....	26
TEST DATA.....	26
FCC §15.247(d) & RSS-247 CLAUSE 5.5- BAND EDGES TESTING.....	28
APPLICABLE STANDARD.....	28
TEST PROCEDURE.....	28
TEST EQUIPMENT LIST AND DETAILS.....	29
TEST DATA.....	29

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:		Mobile Tablet
EUT Model:		DT301A
FCC ID:		YE3801I
IC:		7647A-801I
Rated Input Voltage:		DC 11.4V from battery or DC 19V from Adapter
Adapter Information	Model:	A11-065N1A
	Input:	100-240V~1.7A, 50/60Hz
	Output:	DC 19V, 3.42A 65W
External Dimension:		Length (28.5cm)*Width (20cm)*High (5.4cm)
Serial Number:		181016009
EUT Received Date:		2018.10.18

Objective

This report is prepared on behalf of *DT Research, Inc.* in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communications Commission's rules and RSS-247, Issue 2, February 2017, RSS-Gen, Issue 5, April 2018 of the Innovation, Science and Economic Development Canada.

The tests were performed in order to determine the EUT compliance with FCC Rules Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules and RSS-247, Issue 2, February 2017, RSS-Gen, Issue 5, April 2018 of the Innovation, Science and Economic Development Canada.

This is a class II permissive change application based on the Long range hopping transmitter WIT2410G module (module FCC ID: HSW-2410G, IC: 4492A-2410G) have a class II permissive change of hardware, which certified on 2018-02-07. The detail changes for the module please refer to the related documents for the module class II permissive change application

The changes will affect the RF exposure, AC Line Conducted Emissions, Conducted Output power, Band Edges, Spurious Emissions, and we will update the related test data.

Test Methodology

All measurements detailed in this test report were performed in accordance with ANSI C63.10-2013 "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices" and KDB 558074 D01 15.247 Meas Guidance v05. And RSS-247, Issue 2, February 2017, RSS-Gen, Issue 5, April 2018 of the Innovation, Science and Economic Development Canada.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB,200M~1GHz: 5.92 dB,1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218,the FCC Designation No. : CN1220.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062D.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in engineering mode.

The device have a Bluetooth transmitter with BDR(GFSK), EDR($\pi/4$ -DQPSK&8DPSK) and a long range hopping transmitter(FSK).

The long range hopping transmitter employs 76 channels as below table:

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2401.683	19	2419.185	38	2436.693	57	2454.201
1	2402.607	20	2420.107	39	2437.613	58	2455.121
2	2403.525	21	2421.029	40	2438.535	59	2456.041
3	2404.445	22	2421.949	41	2439.455	60	2456.963
4	2405.367	23	2422.869	42	2440.379	61	2457.887
5	2406.287	24	2423.789	43	2441.301	62	2458.808
6	2407.209	25	2424.713	44	2442.223	63	2459.73
7	2408.129	26	2425.633	45	2443.143	64	2460.652
8	2409.055	27	2426.557	46	2444.065	65	2461.572
9	2409.973	28	2427.477	47	2444.985	66	2462.492
10	2410.893	29	2428.399	48	2445.905	67	2463.414
11	2411.817	30	2429.321	49	2446.827	68	2464.336
12	2412.737	31	2430.245	50	2447.749	69	2465.256
13	2413.659	32	2431.165	51	2448.669	70	2466.178
14	2414.579	33	2432.085	52	2449.591	71	2467.100
15	2415.499	34	2433.007	53	2450.515	72	2468.020
16	2416.419	35	2433.927	54	2451.435	73	2468.944
17	2417.341	36	2434.847	55	2452.355	74	2469.866
18	2418.263	37	2435.771	56	2453.279	75	2470.788

Channel 0, 37 and channel 75 were tested.

EUT Exercise Software

And the software 'wincom.exe' was use for long range hopping transmitter test, which was provided by manufacturer. The maximum power level was configured by the software as below table:

Test Software Version	wincom.exe		
Test Frequency	2401.683 MHz	2435.771 MHz	2470.788 MHz
Power Level Setting	9	9	9

Equipment Modifications

No modification was made to the EUT.


Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Keenion	Earphone	KDM-911	6951812200215
TOSHIBA	HDD	DTP105	247BSYVUSRE8

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Earphone Cable	No	No	1.26	EUT	Earphone
USB Cable	yes	No	1.0	EUT	HDD

Block Diagram of Test Setup

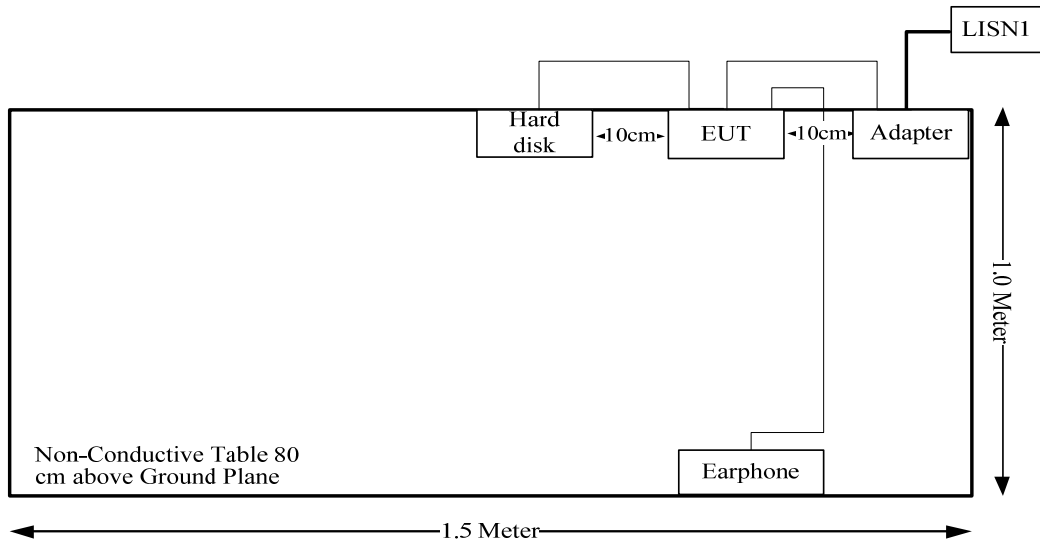

SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1091 RSS-102 Clause 4	Maximum Permissible Exposure (MPE)	Compliance ^{Note}
FCC§15.203, RSS-GEN Clause 6.8	Antenna Requirement	Compliance
FCC§15.207 (a), RSS-Gen Clause 8.8	Conducted Emissions	Compliance
FCC§15.205, §15.209, FCC §15.247(d), RSS-247 Clause 5.5, RSS-Gen Clause 8.10	Spurious Emissions	Compliance
FCC §15.247 (a)(1), RSS-247 Clause 5.1 b) RSS-Gen Clause 6.7	Emission Bandwidth	Compliance*
FCC §15.247(a)(1), RSS-247 Clause 5.1 b)	Channel Separation Test	Compliance*
FCC§15.247(a)(1)(iii), RSS-247 Clause 5.1 d)	Time of Occupancy (Dwell Time)	Compliance*
FCC§15.247(a)(1)(iii), RSS-247 Clause 5.1 d)	Quantity of hopping channel Test	Compliance*
FCC§15.247(b)(1), RSS-247 Clause 5.4 b)	Peak Output Power Measurement	Compliance
FCC§15.247(d) RSS-247 Clause 5.5	Band Edges	Compliance

Note: the Long Range Hopping Transmitter was not for potable use, it is used for distance measurement when fixed in the holder. Please refer to the use manual for detailly.

Compliance*: The Class II permissive change Application have not effected the result.

FCC §15.247 (i) , §1.1310 , §2.1091& RSS-102 §4- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

According to RSS-102 § 4Table 4, RF Field Strength Limits for Devices Used by the General Public (Uncontrolled Environment)

Table 4: RF Field Strength Limits for Devices Used by the General Public (Uncontrolled Environment)

Frequency Range (MHz)	Electric Field (V/m rms)	Magnetic Field (A/m rms)	Power Density (W/m ²)	Reference Period (minutes)
0.003-10 ²¹	83	90	-	Instantaneous*
0.1-10	-	0.73/ f	-	6**
1.1-10	87/ f ^{0.5}	-	-	6**
10-20	27.46	0.0728	2	6
20-48	58.07/ f ^{0.25}	0.1540/ f ^{0.25}	8.944/ f ^{0.5}	6
48-300	22.06	0.05852	1.291	6
300-6000	3.142 f ^{0.3417}	0.008335 f ^{0.3417}	0.02619f ^{0.6834}	6
6000-15000	61.4	0.163	10	6
15000-150000	61.4	0.163	10	616000/ f ^{1.2}
150000-300000	0.158 f ^{0.5}	4.21 x 10 ⁻⁴ f ^{0.5}	6.67 x 10 ⁻⁵ f	616000/ f ^{1.2}

Note: f is frequency in MHz.
 *Based on nerve stimulation (NS).
 ** Based on specific absorption rate (SAR).

Calculation Formula:

Prediction of power density at the distance of the applicable MPE limit:

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

Calculated Data:

For Mobile Use Condition:

Mode	Frequency (MHz)	Antenna Gain		Tune-up Power		Evaluation Distance (cm)	Power Density		MPE Limit		Ratio(S _i /S _{limit,i})	
		(dBi)	(numeric)	(dBm)	(mW)		(mW/cm ²)	(W/m ²)	FCC (mW/cm ²)	RSS-102 (W/m ²)	FCC	RSS-102
Bluetooth	2402-2480	3	2.00	6	3.98	20	0.00	0.02	1.0	5.35	0.002	0.003
Long Range Transmitter	2401.683-2470.788	1.64	1.46	17	50.12	20	0.01	0.15	1.0	5.35	0.015	0.027
WLAN 2.4GHz Main Chain	2412-2462	1.4	1.38	20	100.00	20	0.03	0.27	1.0	5.37	0.027	0.051
WLAN 2.4GHz Aux Chain	2412-2462	3	2.00	20	100.00	20	0.04	0.40	1.0	5.37	0.040	0.074
WLAN 5GHz Main Chain	5150-5850	4.98	3.15	14.8	30.20	20	0.02	0.19	1.0	9.05	0.019	0.021
WLAN 5GHz AuxChain	5150-5850	4.98	3.15	14.8	30.20	20	0.02	0.19	1.0	9.05	0.019	0.021
CDMA 850	824-849	0.4	1.10	24	251.19	20	0.05	0.55	0.55	2.58	0.100	0.213
CDMA1900	1850-1910	4	2.51	24	251.19	20	0.13	1.26	1.0	4.48	0.126	0.281
WCDMA Band 2	1850-1910	4	2.51	23	199.53	20	0.10	1.00	1.0	4.48	0.100	0.223
WCDMA Band 5	824-849	0.4	1.10	23	199.53	20	0.04	0.44	0.55	2.58	0.079	0.169
LTE Band 2	1850-1910	4	2.51	23.9	245.47	20	0.12	1.23	1.0	4.48	0.123	0.274
LTE Band 4	1710-1755	3	2.00	24.8	302.00	20	0.12	1.20	1.0	4.24	0.120	0.283
LTE Band 5	824-849	0.4	1.10	24.4	275.42	20	0.06	0.60	0.55	2.58	0.109	0.233
LTE Band 13	777-787	-0.3	0.93	24.1	257.04	20	0.05	0.48	0.518	2.47	0.092	0.193
LTE Band 17	704-716	-3.6	0.44	24	251.19	20	0.02	0.22	0.47	2.31	0.047	0.094

The WLAN or Bluetooth and LTE, Long range transmitter can transmit simultaneously:
 WLAN 2.4G band and 5G band can't transmit simultaneously
 WLAN and Bluetooth can't transmit simultaneously

For FCC:

$$\sum_i \frac{S_i}{S_{Limit,i}}$$

$$= \frac{S_{WLAN \text{ Main Chain-2.4}}}{S_{limit- WLAN \text{ Main Chain-2.4}}} + \frac{S_{WLAN \text{ Aux Chain-2.4}}}{S_{limit- WLAN \text{ Aux Chain-2.4}}} + \frac{S_{long}}{S_{limit-long}} + \frac{S_{CDMA1900}}{S_{limit-CDMA1900}}$$

$$= 0.027 + 0.04 + 0.015 + 0.126$$

$$= 0.208$$

$$< 1.0$$

For RSS-102:

$$\sum_i \frac{S_i}{S_{Limit,i}}$$

$$= \frac{S_{WLAN \text{ Main Chain-2.4}}}{S_{limit- WLAN \text{ Main Chain-2.4}}} + \frac{S_{WLAN \text{ Aux Chain-2.4}}}{S_{limit- WLAN \text{ Aux Chain-2.4}}} + \frac{S_{long}}{S_{limit-long}} + \frac{S_{LTE \text{ Band 4}}}{S_{limit-LTE \text{ Band 4}}}$$

$$= 0.051 + 0.074 + 0.027 + 0.283$$

$$= 0.435$$

$$< 1.0$$

Result: Compliance, The device meets MPE requirement for Devices Used by the General Public (Uncontrolled Environment) at distance ≥ 20 cm.

FCC §15.203 & RSS-GEN CLAUSE 6.8 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

According to RSS-Gen §6.8, The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

Antenna Information And Connector Construction

The EUT has one external antenna with RP-SMA connector for Long Range Hopping Transmitter, the antenna gain is 1.64dBi, all of them fulfill the requirement of this section. Please refer to the EUT photos.

Antenna	Antenna Type	Connector Type	input impedance (Ohm)	Antenna Gain /Frequency
Long Range Transmitter	Dipole	RP-SMA	50	1.64 dBi/2.4GHz


Result: Compliance.

FCC §15.207 (a) & RSS-GEN CLAUSE 8.8 – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207(a), RSS-GEN CLAUSE 8.8.

EUT Setup

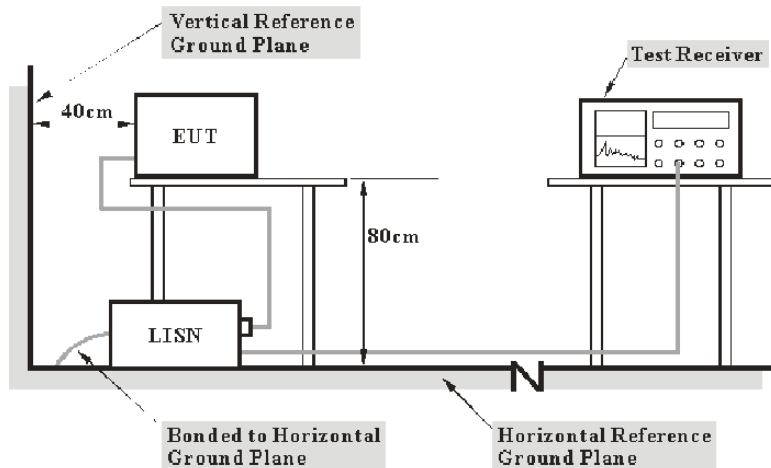

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 and RSS-Gen limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main LISN with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

V_C : corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF : voltage division factor of AMN or ISN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2017-12-11	2018-12-11
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-01	2018-09-05	2019-09-05
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A
R&S	Two-line V-network	ENV 216	101614	2017-12-08	2018-12-08

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

Temperature:	28.4 °C
Relative Humidity:	48 %
ATM Pressure:	100.2 kPa

The testing was performed by Lily Xie on 2018-10-25.

Test Mode: Transmitting


AC120V, 60 Hz, Line:

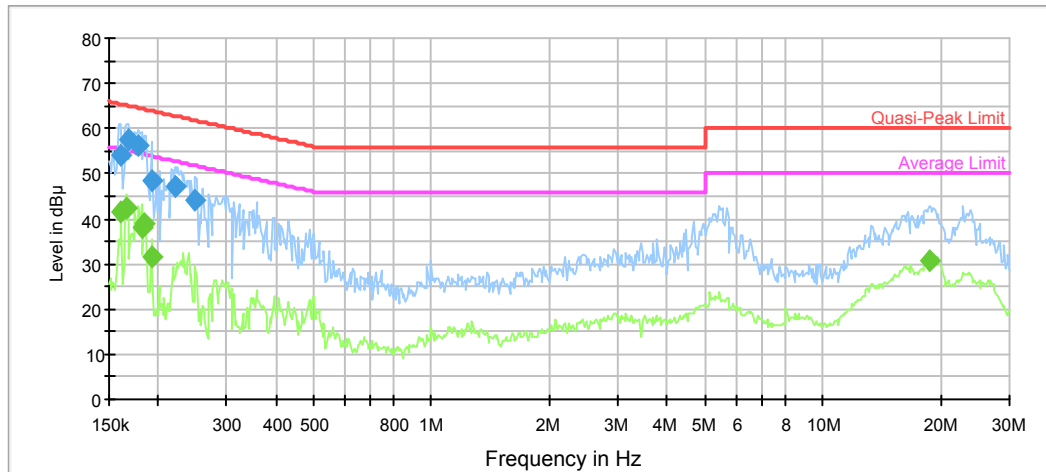

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.159873	54.2	9.000	L1	11.0	11.3	65.5	Compliance
0.167702	57.6	9.000	L1	10.9	7.5	65.1	Compliance
0.178741	56.3	9.000	L1	10.8	8.2	64.5	Compliance
0.192030	48.3	9.000	L1	10.7	15.6	63.9	Compliance
0.221645	47.3	9.000	L1	10.5	15.5	62.8	Compliance
0.249785	44.0	9.000	L1	10.3	17.8	61.8	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.161152	41.6	9.000	L1	11.0	13.8	55.4	Compliance
0.166371	42.2	9.000	L1	11.0	12.9	55.1	Compliance
0.181612	38.0	9.000	L1	10.8	16.4	54.4	Compliance
0.184529	39.0	9.000	L1	10.8	15.3	54.3	Compliance
0.192030	31.5	9.000	L1	10.7	22.4	53.9	Compliance
18.757459	30.9	9.000	L1	10.0	19.1	50.0	Compliance

AC120V, 60 Hz, Neutral:

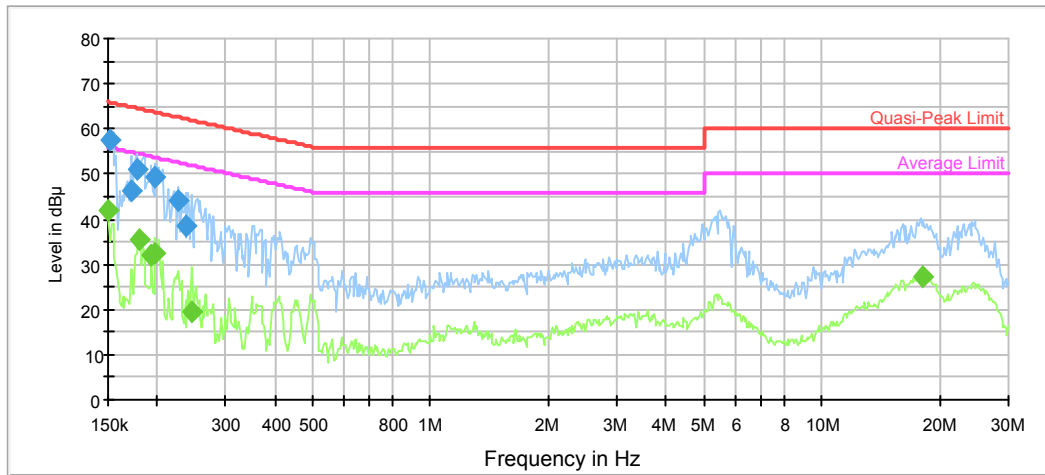

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.151200	57.6	9.000	N	11.1	8.3	65.9	Compliance
0.171759	46.1	9.000	N	10.9	18.8	64.9	Compliance
0.177322	51.0	9.000	N	10.8	13.6	64.6	Compliance
0.198249	49.3	9.000	N	10.6	14.4	63.7	Compliance
0.227007	44.0	9.000	N	10.4	18.6	62.6	Compliance
0.236234	38.7	9.000	N	10.4	23.5	62.2	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	42.0	9.000	N	11.2	14.0	56.0	Compliance
0.180171	35.6	9.000	N	10.8	18.9	54.5	Compliance
0.193566	32.1	9.000	N	10.7	21.8	53.9	Compliance
0.198249	32.4	9.000	N	10.6	21.3	53.7	Compliance
0.245835	19.6	9.000	N	10.3	32.3	51.9	Compliance
18.169036	27.4	9.000	N	10.0	22.6	50.0	Compliance


FCC §15.209, §15.205 & §15.247(d) & RSS-247 CLAUSE 5.5, RSS -GEN CLAUSE 8.10- SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205; RSS-247 Clause 5.5, RSS-GEN Clause 8.10

EUT Setup

Below 1GHz:

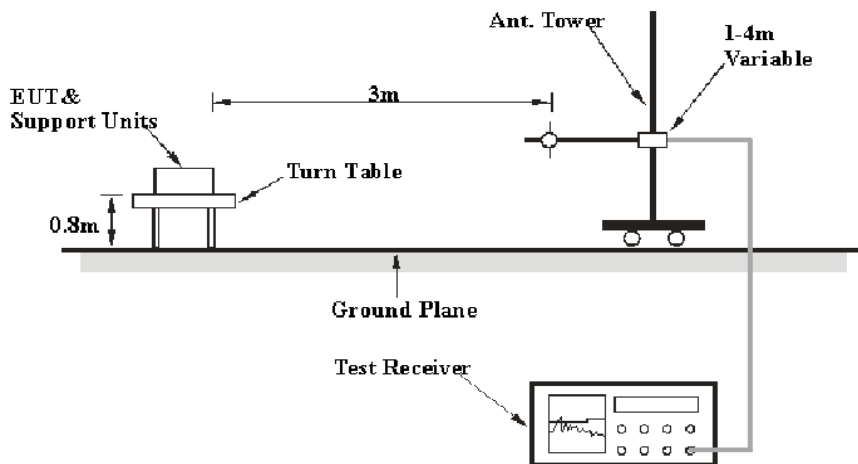

Above 1GHz:

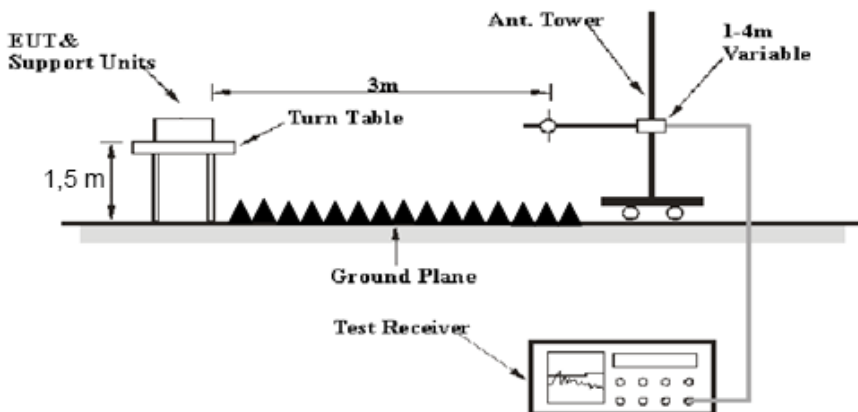

The radiated emission below 1GHz tests were performed in the 3 meters chamber test site A, above 1GHz tests were performed in the 3 meters chamber test site B, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 and the RSS-247 Clause 5.5, RSS-GEN Clause 8.10 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	AV

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and average detection modes for frequencies above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2017-12-11	2018-12-11
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2018-09-05	2019-09-05
HP	Amplifier	8447D	2727A05902	2018-09-05	2019-09-05
Agilent	Spectrum Analyzer	E4440A	SG43360054	2018-01-04	2019-01-04
ETS-Lindgren	Horn Antenna	3115	000 527 35	2016-01-05	2019-01-04
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2016-11-18	2019-11-18
MITEQ	Amplifier	AFS42-00101800- 25-S-42	2001271	2018-09-05	2019-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2018-06-27	2019-06-27
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-2.4J2.4J-50	C-0700-02	2018-06-27	2019-06-27
E-Microwave	Band-stop Filters	OBSF-2400-2483.5- S	OE01601525	2018-06-16	2019-06-16
Micro-tronics	High Pass Filter	HPM50111	S/N-G217	2018-06-16	2019-06-16

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data

Environmental Conditions


Temperature:	25.4~26.7°C
Relative Humidity:	39~40 %
ATM Pressure:	100.4~100.6 kPa

* The testing was performed by Vern Shen and Blake Yang from 2018-10-20 to 2018-10-26.

Test Mode: Transmitting


1) 30MHz-1GHz ((Long Range Hopping Transmitter with High channel was the worst)

Horizontal:

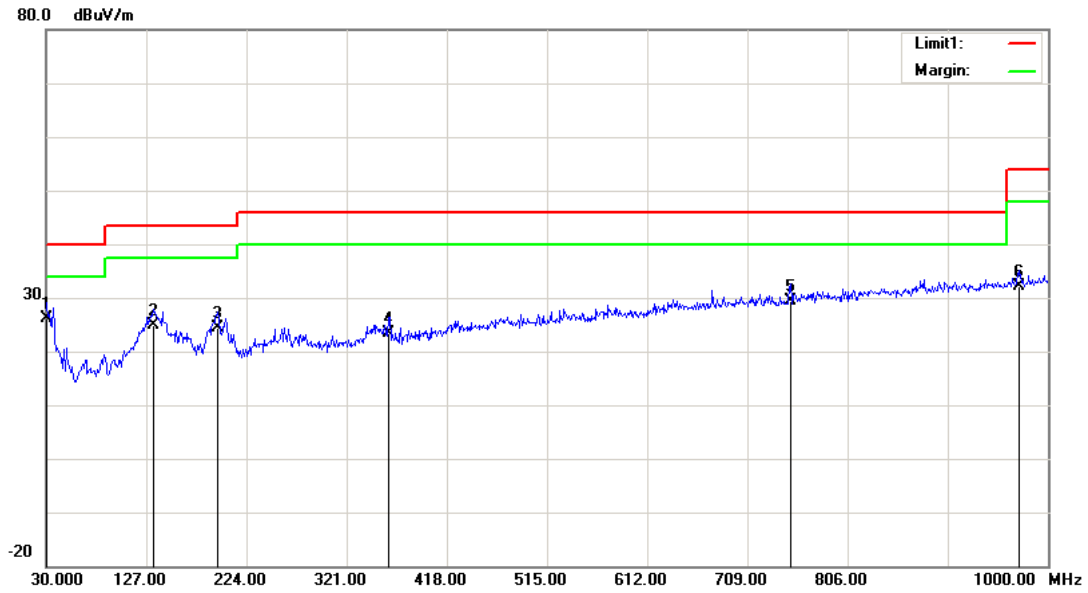

Frequency (MHz)	Receiver Reading (dBµV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
30.0000	24.34	QP	1.76	26.10	40.00	13.90
133.7900	29.85	QP	-5.05	24.80	43.50	18.70
195.8700	30.90	QP	-6.60	24.30	43.50	19.20
361.7400	26.09	QP	-2.79	23.30	46.00	22.70
750.7100	25.81	QP	3.69	29.50	46.00	16.50
971.8700	9.10	QP	23.00	32.10	54.00	21.90

Vertical:

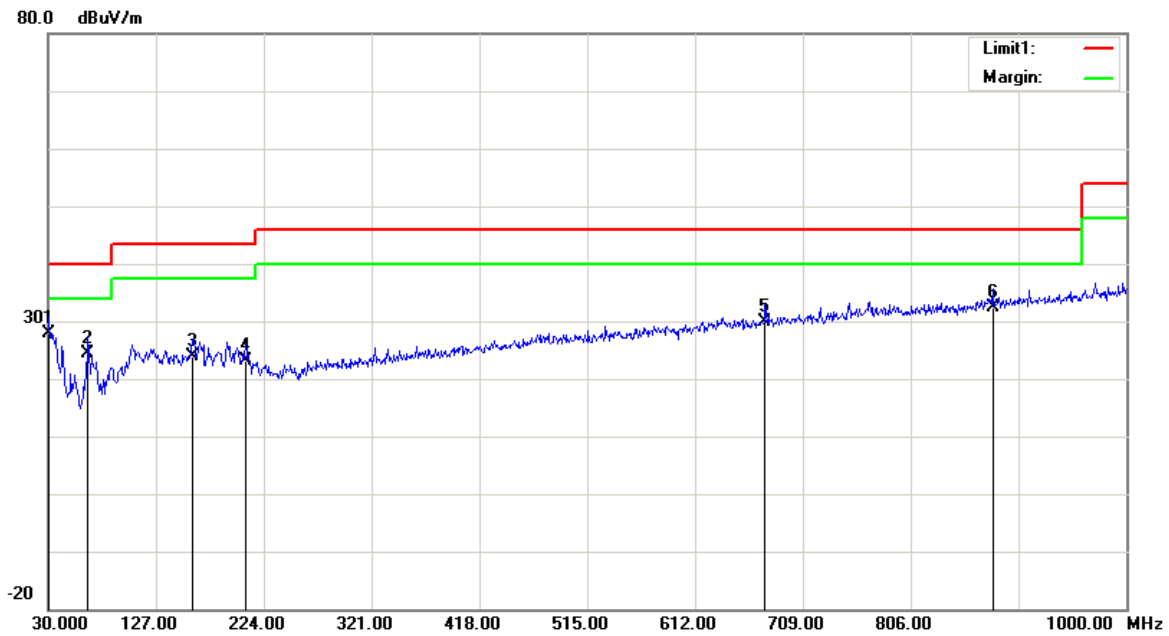




Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
30.0000	26.14	QP	1.76	27.90	40.00	12.10
65.8900	35.87	QP	-11.57	24.30	40.00	15.70
159.9800	29.65	QP	-5.85	23.80	43.50	19.70
207.5100	30.45	QP	-7.25	23.20	43.50	20.30
675.0500	27.49	QP	2.51	30.00	46.00	16.00
879.7200	36.76	QP	-4.26	32.50	46.00	13.50

2)1GHz-25GHz:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2401.683 MHz									
2401.68	68.63	PK	H	28.10	1.80	0.00	98.53	N/A	N/A
2401.68	67.24	AV	H	28.10	1.80	0.00	97.14	N/A	N/A
2401.68	78.94	PK	V	28.10	1.80	0.00	108.84	N/A	N/A
2401.68	77.59	AV	V	28.10	1.80	0.00	107.49	N/A	N/A
2390.00	26.16	PK	V	28.08	1.80	0.00	56.04	74.00	17.96
2390.00	13.04	AV	V	28.08	1.80	0.00	42.92	54.00	11.08
4803.37	47.52	PK	V	32.91	3.16	37.20	46.39	74.00	27.61
4803.37	35.82	AV	V	32.91	3.16	37.20	34.69	54.00	19.31
7205.05	53.65	PK	V	35.73	4.82	37.23	56.97	74.00	17.03
7205.05	45.36	AV	V	35.73	4.82	37.23	48.68	54.00	5.32
Middle Channel: 2435.771 MHz									
2435.77	69.53	PK	H	28.17	1.82	0.00	99.52	N/A	N/A
2435.77	68.12	AV	H	28.17	1.82	0.00	98.11	N/A	N/A
2435.77	79.92	PK	V	28.17	1.82	0.00	109.91	N/A	N/A
2435.77	78.41	AV	V	28.17	1.82	0.00	108.40	N/A	N/A
4871.54	46.73	PK	V	33.04	3.26	37.21	45.82	74.00	28.18
4871.54	35.25	AV	V	33.04	3.26	37.21	34.34	54.00	19.66
7307.31	53.41	PK	V	36.00	4.65	37.36	56.70	74.00	17.30
7307.31	44.87	AV	V	36.00	4.65	37.36	48.16	54.00	5.84
High Channel: 2470.788 MHz									
2470.79	70.42	PK	H	28.24	1.84	0.00	100.50	N/A	N/A
2470.79	69.04	AV	H	28.24	1.84	0.00	99.12	N/A	N/A
2470.79	81.53	PK	V	28.24	1.84	0.00	111.61	N/A	N/A
2470.79	80.15	AV	V	28.24	1.84	0.00	110.23	N/A	N/A
2483.50	26.58	PK	V	28.27	1.84	0.00	56.69	74.00	17.31
2483.50	14.36	AV	V	28.27	1.84	0.00	44.47	54.00	9.53
4941.58	46.35	PK	V	33.18	3.25	37.23	45.55	74.00	28.45
4941.58	35.46	AV	V	33.18	3.25	37.23	34.66	54.00	19.34
7412.36	52.46	PK	V	36.27	4.46	37.49	55.70	74.00	18.30
7412.36	43.73	AV	V	36.27	4.46	37.49	46.97	54.00	7.03




Worst plots (Low channel)
Horizontal

Fundamental Test with Band Rejection Filter

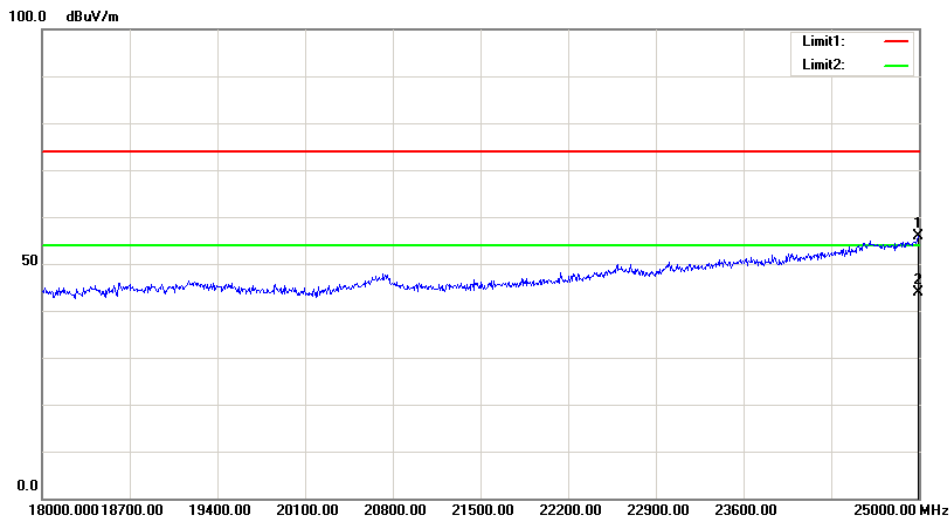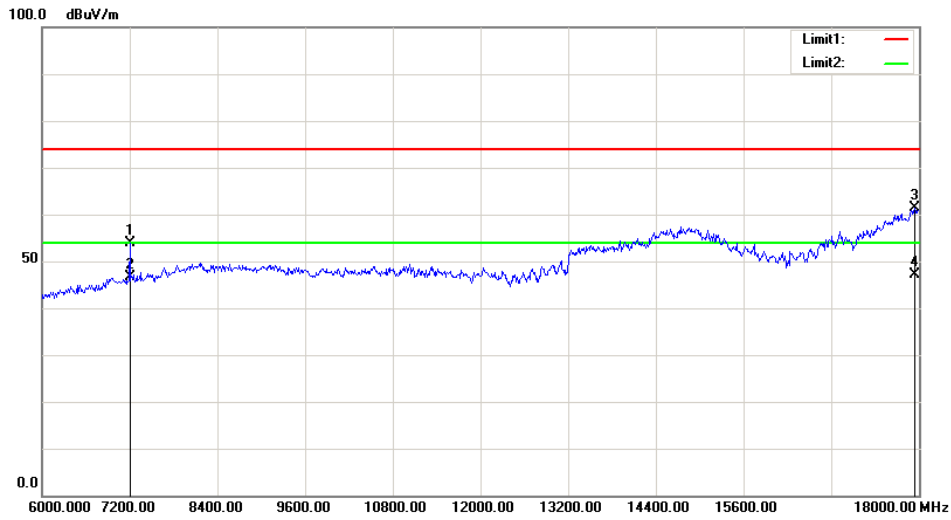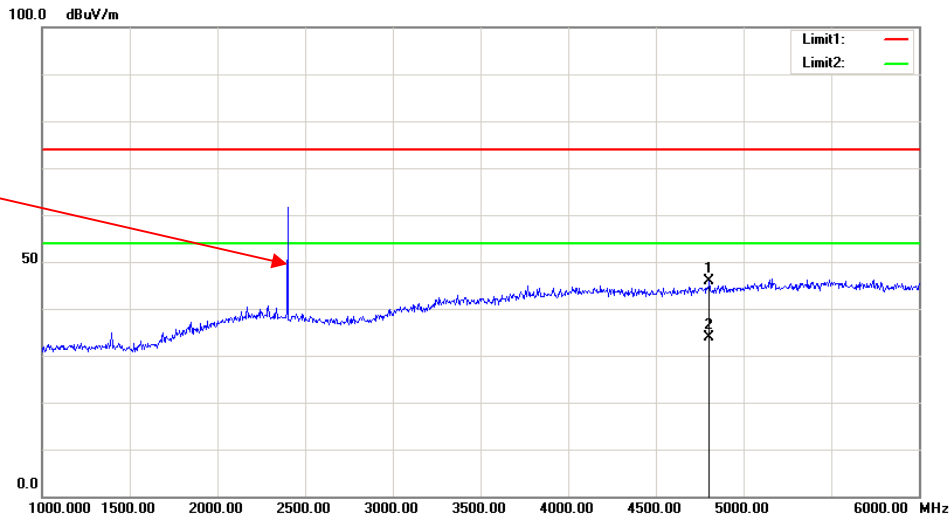

Vertical

Fundamental Test with Band Rejection Filter

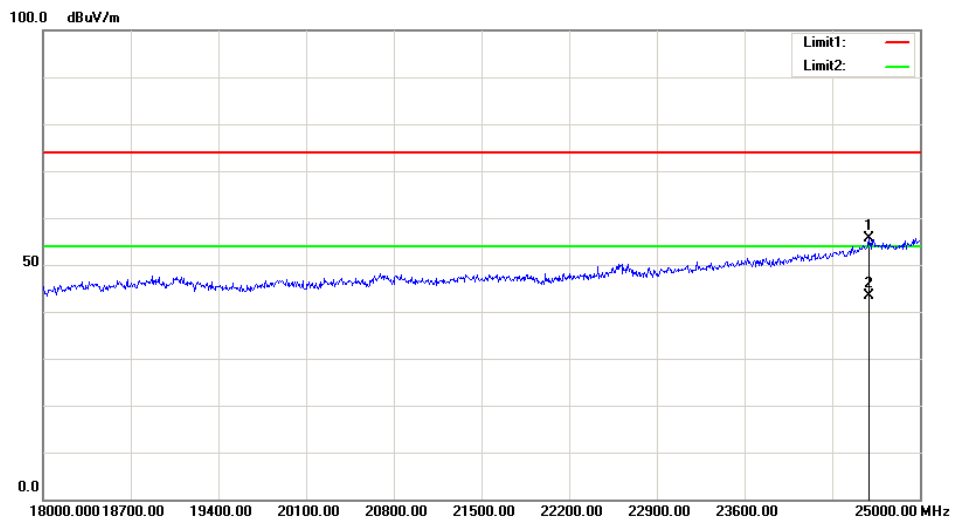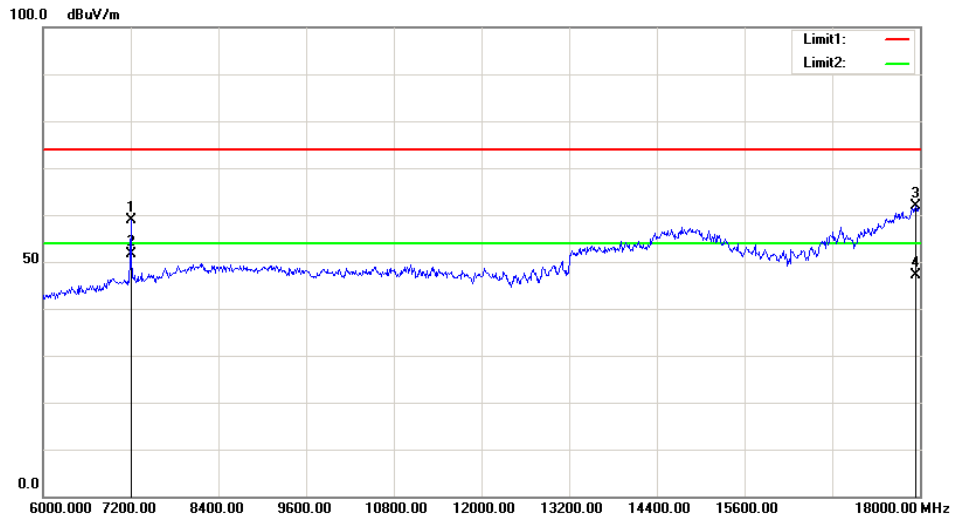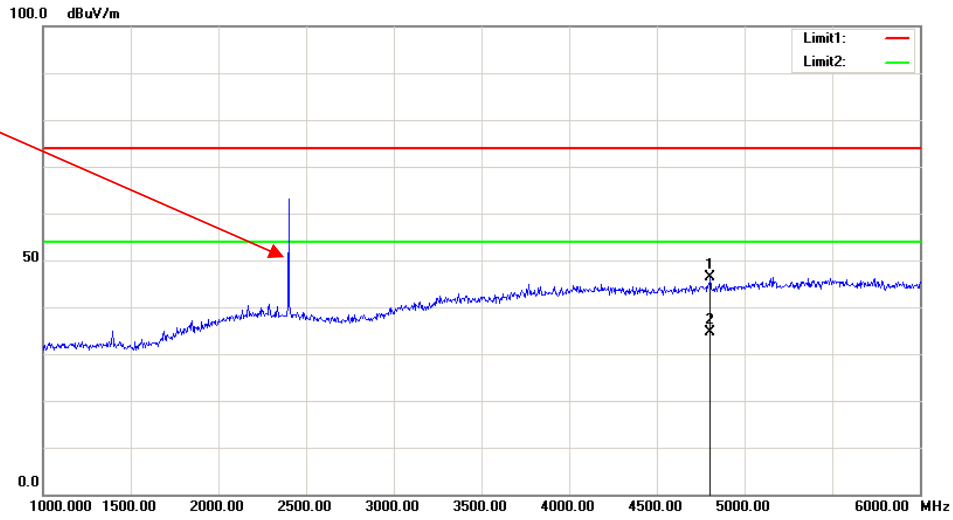

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	USB Wideband Power Sensor	U2022XA	MY5417006	2017-12-11	2018-12-11
E-Microwave	Blocking Control	EMDCB-00036	0E01201048	2018-05-06	2019-05-06
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	28.1 °C
Relative Humidity:	47 %
ATM Pressure:	100.3 kPa

* *The testing was performed by Tiago Huang on 2018-10-23.*

Test Result: Compliance.

Test Mode: Transmitting

Frequency (MHz)	Peak Conducted Output power (dBm)	Peak Conducted Output power Limit (dBm)	EIRP (dBm)	EIRP Limit For ISED (dBm)
2401.683	15.92	21	17.56	36
2435.771	15.91	21	17.55	36
2470.788	16.49	21	18.13	36

Note: The data above was tested in conducted mode.

FCC §15.247(d) & RSS-247 CLAUSE 5.5- BAND EDGES TESTING

Applicable Standard

According to FCC §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to RSS-247 Clause 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW/ VBW of spectrum analyzer to 100/300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2018-01-04	2019-01-04
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005011	Each time	N/A
Unknown	attenuator	3dB	3dB-1	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	28.3 °C
Relative Humidity:	42 %
ATM Pressure:	100 kPa

* *The testing was performed by Tiago Huang on 2018-11-09.*

Test Result: Compliance


Single mode:

Band Edge, Left Side

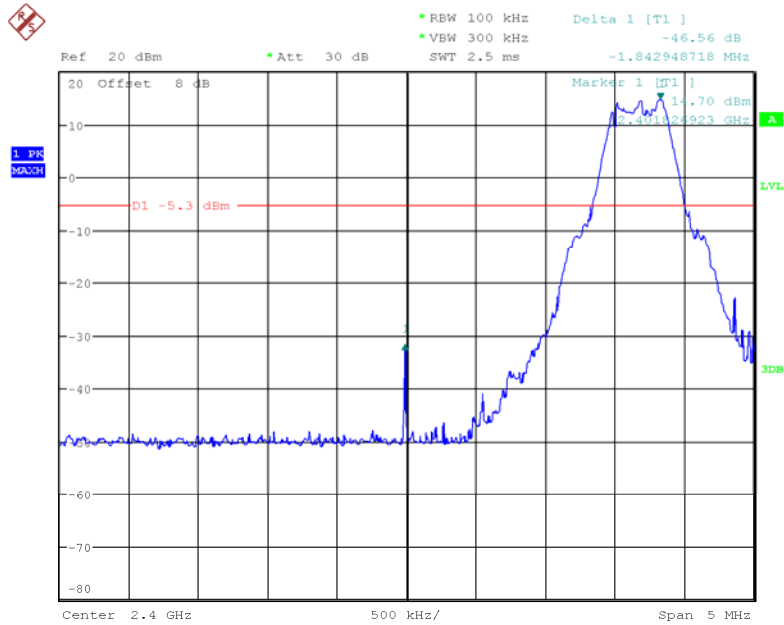

Date: 9.NOV.2018 16:42:53


Band Edge, Right Side

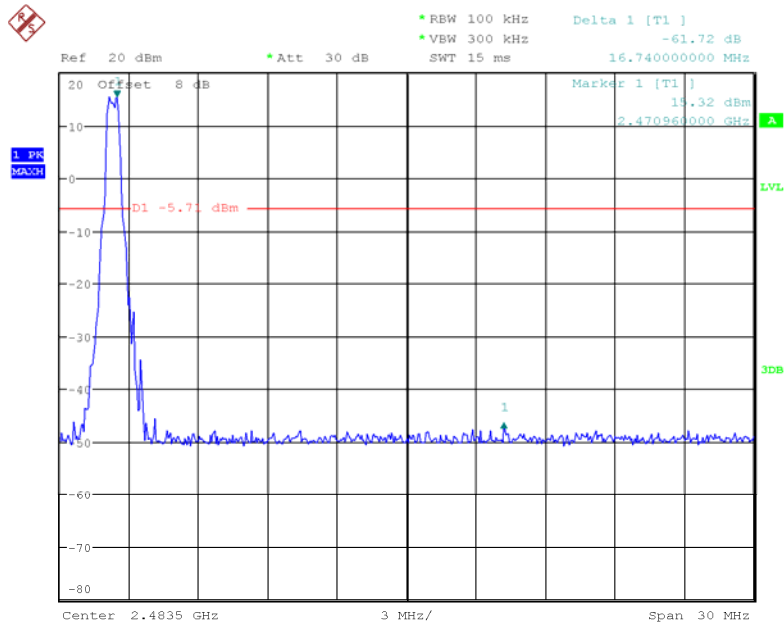

Date: 9.NOV.2018 16:24:35


Hopping mode:

Band Edge, Left Side

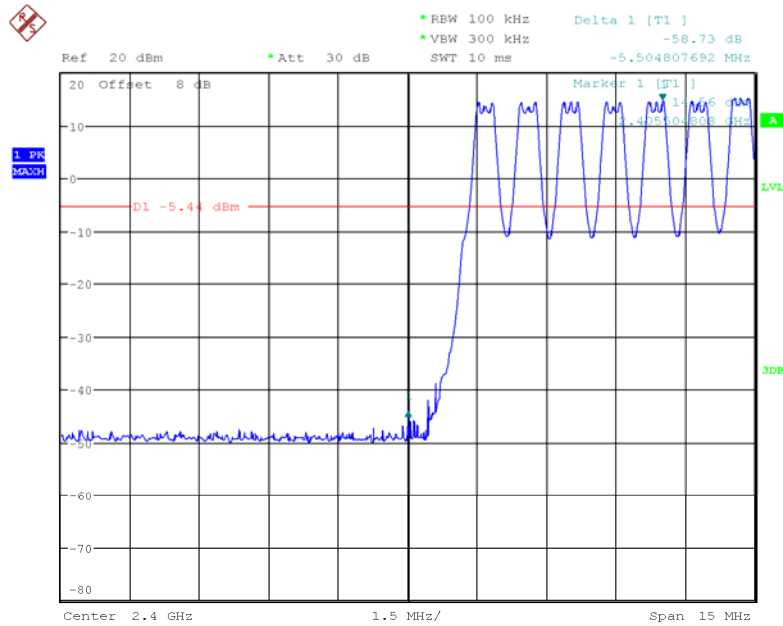

Date: 9.NOV.2018 16:38:57

Band Edge, Right Side

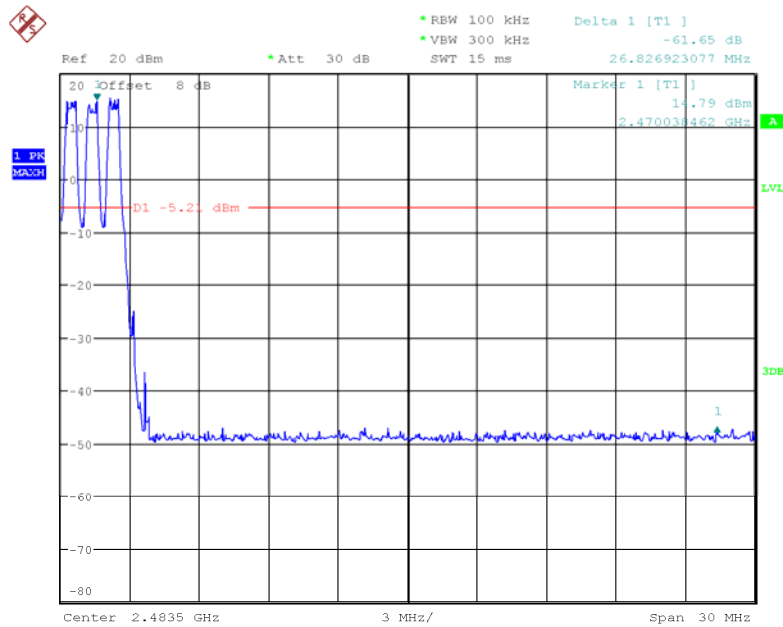

Date: 9.NOV.2018 16:51:56

***** END OF REPORT *****