



FCC 47 CFR PART 74 SUBPART H

TEST REPORT

For

Applicant : OPALUX ELECTRONICS MFY CO., LTD

Address : 21F, No.86 LONGWAN NEW RESIDENTIAL QUARTERS, NINGBO,
CHINA

Product Name : WIRELESS MICROPHONE

Model Name : SM500,U660,SX4,BG4,SM920,SM9090,SM550,SM6060,SM2000,
DM306,DM201

Brand Name : OPALUX, XSOUND, GEMINI, INTERNSOUND, GRAMMAR SOUND

FCC ID : YEB-SM500

Report No. : MOST100706F1

Date of Issue : July 26, 2010

Issued by : Most Technology Service Co., Ltd.

Address : No.5, 2nd Langshan Road, North District, Hi-tech Industrial
Park, Nanshan, Shenzhen, Guangdong, China

Tel : 86-755-8617 0306

Fax : 86-755-8617 0310

The report consists 44 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by MOST. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver.

CONTENTS

1. TEST RESULT CERTIFICATION	3
2. Technical Information.....	4
2.1 EUT Description	4
2.2 Objective.....	5
2.3 Test Standards and Results	5
3. Details of Test	6
3.1 Identification of the Responsible Testing Laboratory	6
3.2 Identification of the Responsible Testing Location	6
3.3 List of Test Equipments.....	7
3.4 Environmental Conditions.....	8
4. Test Methodology	9
4.1 General Test Procedures	9
4.2 Description of Test Modes	9
5. FCC Part 74 Requirements	10
5.1 RF Output Power (Radiated)	10
5.2 Modulation Deviation	13
5.3 Audio Frequency Response	17
5.4 Occupied Bandwidth.....	22
5.5 Radiated Spurious Emission.....	24
5.6 Frequency Stability vs. Temperature.....	34
5.7 Frequency Stability vs. Voltage	36
Annex A.....	38
Photographs of the Test Setup	38
Annex B.....	40
Photographs of the EUT	40

1. TEST RESULT CERTIFICATION

Applicant Name:	OPALUX ELECTRONICS MFY CO., LTD
Address:	21F, No.86 LONGWAN NEW RESIDENTIAL QUARTERS, NINGBO, CHINA
Manufacturer Name:	OPALUX ELECTRONICS MFY CO., LTD
Address:	21F, No.86 LONGWAN NEW RESIDENTIAL QUARTERS, NINGBO, CHINA
Brand Name:	OPALUX, XSOUND, GEMINI, INTERNSOUND, GRAMMAR SOUND
Equipment Under Test:	WIRELESS MICROPHONE
Model Number:	SM500, U660, SX4, BG4, SM920, SM9090, SM550, SM6060, SM2000, DM306, DM201
Series Model Difference description:	The series models are different in market name with the same functions and the same PCB.
FCC ID:	YEB-SM500
Test Standard	FCC 47 CFR Part 74 Subpart H
File Number:	MOST100706F1
Date of Test:	July 09, 2010 - July 26, 2010

We (MOST) hereby certify that:

The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI TIA 603:2004 and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 74 H.

The test results of this report relate only to the tested sample identified in this report.

Tested by (+ signature): Petter Ping
 Petter Ping July 26, 2010

Review by (+ signature): July Wen
 July Wen July 26, 2010

Approved by (+ signature): Terry Yang
 Terry Yang July 26, 2010

2. Technical Information

Note: the following data is based on the information by the applicant.

2.1 EUT Description

Product	WIRELESS MICROPHONE
Brand Name	OPALUX
Model Number	SM500
Power Supply	DC 3 V by Battery
Frequency Range	575.00 MHz-599.75 MHz
Modulation Technique	FM
Antenna Gain	1.0 dBi
Antenna Type	Internal
Temperature Range	-20°C-50°C

Note:

1. This submittal(s) (test report) is intended for FCC ID: YEB-SM500 filing to comply with the FCC Part 74, Subpart H Rules.
2. Please refer to Appendix B for the photographs of the EUT. For more details, please refer to the User's manual of the EUT.

2.2 Objective

The tests documented in this report were performed in accordance with ANSI TIA 603:2004 and FCC CFR 47 Rules Part 74 Subpart H.

2.3 Test Standards and Results

The EUT has been tested according to FCC CFR 47:

- Part 2: Frequency Allocations and Radio Treaty Matters: General Rules and Regulations (10-1-05 Edition)
- Part 74: Experimental Radio, Auxiliary, Special Broadcast and other program distributional services

Test items and the results are as bellow:

No	Test Type	Para. Number	Limit	Result
1	RF Output Power (Radiated)	2.1046(a); 74.861 e(1)	250 mW	PASS
2	Modulation Deviation	2.1047(b); 74.861 e(2)	Refer to 74.861e(2)	PASS
3	Audio Frequency Response	2.1047(a)	Refer to 2.1047(a)	PASS
4	Occupied Bandwidth	2.1049(c)(1); 74.861 e(5)	< 200 KHz	PASS
5	Radiated Spurious Emission	2.1053; 74.861 e(6)	Refer to 74.861e(6)	PASS
6	Frequency Stability vs. Temperature	2.1055(b); 74.861 e(4)	Refer to 74.861e(4)	PASS
7	Frequency Stability vs. Voltage	2.1055(a)(1); 74.861 e(4)	Refer to 74.861e(4)	PASS

3. Details of Test

3.1 Identification of the Responsible Testing Laboratory

Company:	Most Technology Service Co., Ltd
Address:	No.5, Langshan 2nd Rd., North Hi-Tech Industrial park ,Nanshan, Shenzhen, Guangdong ,China

3.2 Identification of the Responsible Testing Location

Test Site:	Most Technology Service Co., Ltd
Address:	No.5, Langshan 2nd Rd., North Hi-Tech Industrial park ,Nanshan, Shenzhen, Guangdong ,China
Description:	<p>There is one 3m semi-anechoic an area test sites and two line conducted labs for final test. The Open Area Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2003, ANSI TIA 603:2004 and CISPR 16 requirements.</p> <p>The FCC Registration Number is 490827.</p> <p>The CNAS Registration Number is CNAS L3573.</p>

3.3 List of Test Equipments

No.	Equipment	Manufacturer	Model No.	S/N	Calibration due date
1	Test Receiver	Rohde & Schwarz	ESCI	100492	2011/03/14
2	L.I.S.N.	Rohde & Schwarz	ENV216	100093	2011/03/14
3	Coaxial Switch	Anritsu Corp	MP59B	6200283933	2011/03/14
4	Terminator	Hubersuhner	50Ω	No.1	2011/03/14
5	RF Cable	SchwarzBeck	N/A	No.1	2011/03/14
6	Bilog Antenna	Sunol	JB3	A121206	2011/03/14
7	Cable	Resenberger	N/A	NO.1	2011/03/14
8	DC Power Filter	DuoJi	DL2×30B	N/A	2011/03/14
9	Single Phase Power Line Filter	DuoJi	FNF 202B30	N/A	2011/03/14
10	3 Phase Power Line Filter	DuoJi	FNF 402B30	N/A	2011/03/14
11	Absorbing Clamp	Luthi	MDS21	3635	2011/03/14
12	Coaxial Switch	Anritsu Corp	MP59B	6200283933	2011/03/14
13	AC Power Source	Kikusui	AC40MA	LM003232	2011/03/14
14	Test Analyzer	Kikusui	KHA1000	LM003720	2011/03/14
15	Line Impedence Network	Kikusui	LIN40MA-PCR-L	LM002352	2011/03/14
16	ESD Tester	Kikusui	KES4021	LM003537	2011/03/14
17	EMC PRO System	EM Test	UCS-500-M4	V0648102026	2011/03/14
18	Signal Generator	IFR	2032	203002/100	2011/03/14
19	Amplifier	A&R	150W1000	301584	2011/03/14
20	CDN	FCC	FCC-801-M3-25	107	2011/03/14
21	EM Injection Clamp	FCC	F-203I-23mm	403	2011/03/14
22	Telecommunication Antenna	European Antennas	PSA 75301R/170	0304213	2011/03/14

NOTE: Equipments listed above have been calibrated and are in the period of validation.

3.4 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

- Temperature: 15-35°C
- Humidity: 30-60%
- Atmospheric pressure: 86-106 k Pa

4. Test Methodology

4.1 General Test Procedures

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirement in Section 13.1.4.1 of ANSI TIA 603:2004. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Not Applicable (Since the EUT is powered by battery)

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in ANSI TIA 603:2004.

4.2 Description of Test Modes

The EUT has been tested under engineering test mode condition and the EUT staying in continuous transmitting mode.

5. FCC Part 74 Requirements


5.1 RF Output Power (Radiated)

LIMIT

According to CFR 47 section 74.861 e (1), the power of the measured unmodulated carrier power at the output of the transmitter power amplifier (antenna input power) may not exceed the following:

- (1) 54-72, 76-88, and 174-216 MHz bands: 50 mW;
- (2) 470-608 and 614-806 MHz bands: 250 mW

TEST CONFIGURATION

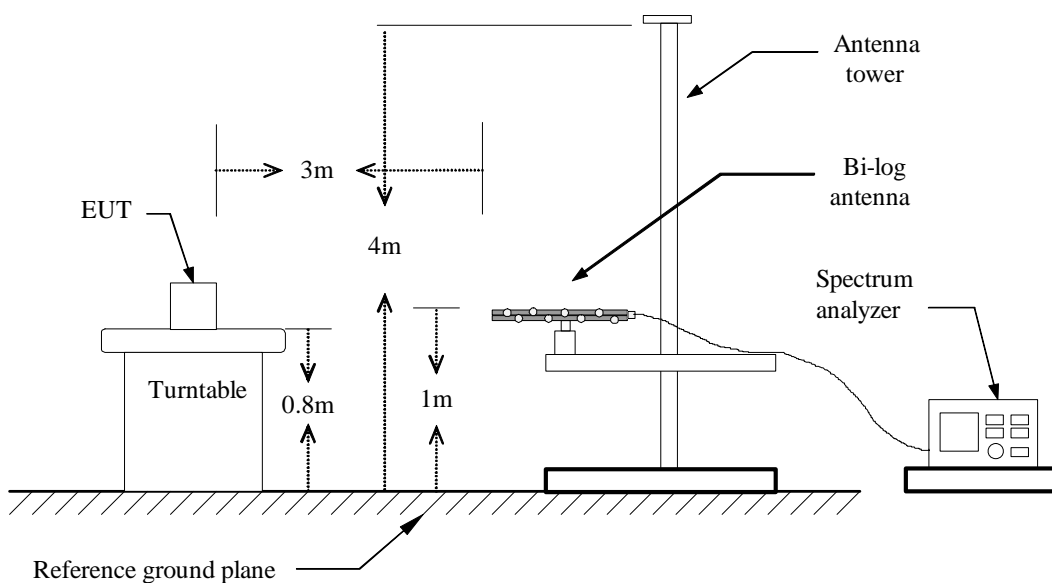

TEST PROCEDURE

1. On a test site, the EUT shall be placed on a turntable and in the position closest to the normal use as declared by the user.
2. The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
3. The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak

detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.

4. The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
5. The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
6. The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
7. The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.
8. The maximum signal level detected by the measuring receiver shall be noted.
9. The measurement shall be repeated with the test antenna set to horizontal polarization.
10. Replace the antenna with a proper Antenna (substitution antenna).
11. The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
12. The substitution antenna shall be connected to a calibrated signal generator.
13. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
14. The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.
15. The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.
16. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
17. The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.

TEST RESULTS

Peak Output Power

Frequency (MHz)	Antenna (H/V)	SG output power (dBm)	Antenna Gain (dB)	Cable Loss (dB)	Peak Output Power (dBm)	Peak Output Power (mW)	Limits (mW)
575.00	H	-13.86	0.98	6.05	-8.79	0.132	250
575.00	V	-3.34	0.98	6.05	2.14	1.637	250
587.50	H	-14.43	0.99	6.30	-9.12	0.122	250
587.50	V	-2.64	0.99	6.30	2.67	1.849	250
599.75	H	-14.52	0.99	6.50	-9.01	0.126	250
599.75	V	-2.66	0.99	6.50	2.85	1.928	250

Note:

Peak Output Power (dBm) = SG output power (dBm) – Cable losses (dB) + Antenna gain (dB)


5.2 Modulation Deviation

LIMIT

According to CFR 47 section 2.1047 a, for Voice modulation communication equipment, the frequency response of the audio modulation circuit over a range of 100 to 5000 Hz shall be measured.

According to CFR 47 section 74.861 e (1), any form of modulation may be used. A maximum deviation of ± 75 KHz is permitted when frequency modulation is employed.

TEST CONFIGURATION

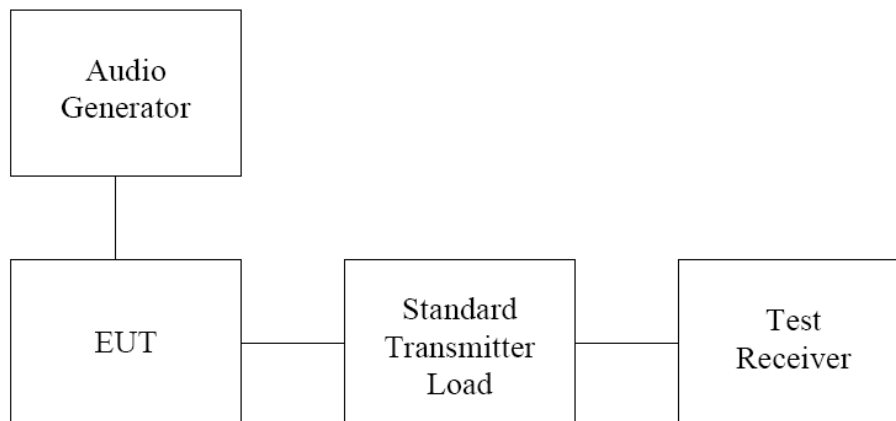

TEST PROCEDURE

Modulation limits is the transmitter circuit's ability to limit the transmitter from producing deviations in excess of rated system deviation.

The audio signal generator is connected to the audio input of the EUT with its full rating.


The modulation response is measured at certain modulation frequencies, related to 1000 Hz reference signal.

Tests are performed for positive and negative modulation.

TEST RESULTS


Low Channel: 575.00 MHz

Modulation Level (dB)	Peak Frequency Deviation							
	100 Hz (KHz)	300 Hz (KHz)	500 Hz (KHz)	1 KHz (KHz)	2.5 KHz (KHz)	3 KHz (KHz)	5 KHz (KHz)	15 KHz (KHz)
-20	13.46	13.91	14.51	15.82	16.56	17.50	18.80	19.51
-15	13.90	14.28	15.09	17.20	17.41	18.65	19.69	20.32
-10	14.06	14.85	15.61	17.79	18.25	19.11	20.45	21.55
-5	14.68	15.71	16.28	18.05	19.53	20.26	21.63	22.64
0	15.25	16.43	17.42	19.35	20.15	21.73	22.59	23.40
+5	16.14	17.36	18.09	20.16	21.62	22.80	23.46	25.21
+10	18.52	18.22	19.53	21.54	22.89	23.16	25.02	26.15
+15	20.64	21.10	20.65	22.65	24.23	24.69	26.26	27.23
+20	22.30	22.92	22.23	23.41	25.16	25.86	27.33	28.30

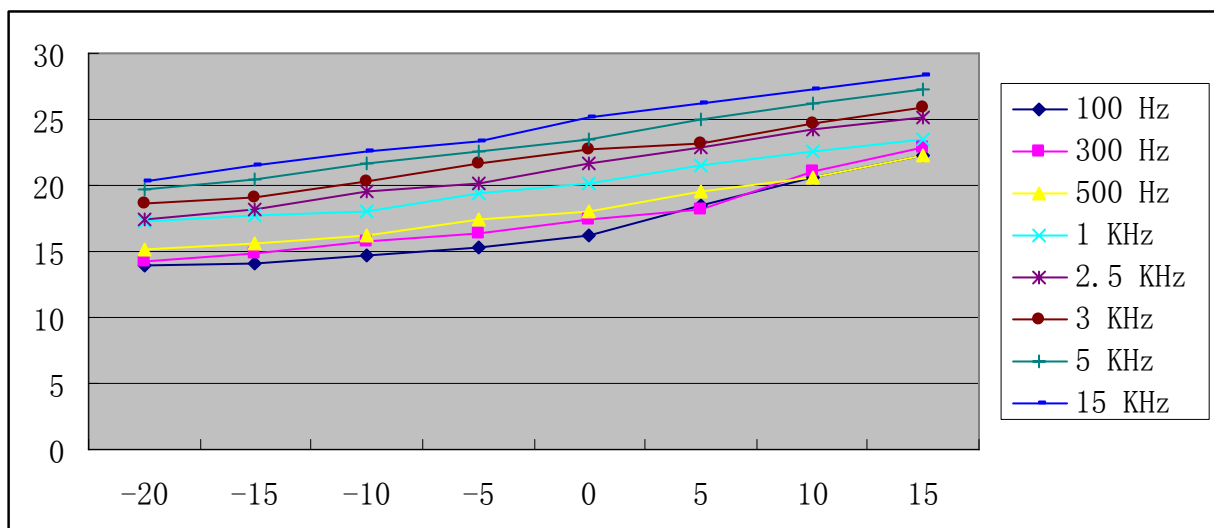


Middle Channel: 587.50 MHz

Modulation Level (dB)	Peak Frequency Deviation							
	100 Hz (KHz)	300 Hz (KHz)	500 Hz (KHz)	1 KHz (KHz)	2.5 KHz (KHz)	3 KHz (KHz)	5 KHz (KHz)	15 KHz (KHz)
-20	14.22	14.35	15.09	15.46	16.42	17.16	18.32	19.05
-15	15.15	14.89	15.62	16.32	17.15	17.53	18.88	19.76
-10	15.62	15.54	16.11	16.88	17.69	18.29	19.45	20.15
-5	16.28	16.25	16.74	17.52	18.25	19.26	20.13	20.89
0	16.64	17.42	17.51	18.65	19.04	20.16	20.68	21.56
+5	17.13	18.52	18.26	19.06	19.86	21.23	21.34	22.62
+10	18.42	19.46	19.85	20.23	20.15	21.96	22.52	23.25
+15	19.06	20.13	20.46	21.35	20.93	22.16	23.16	24.33
+20	20.25	20.62	21.35	22.19	21.62	22.62	24.22	25.32

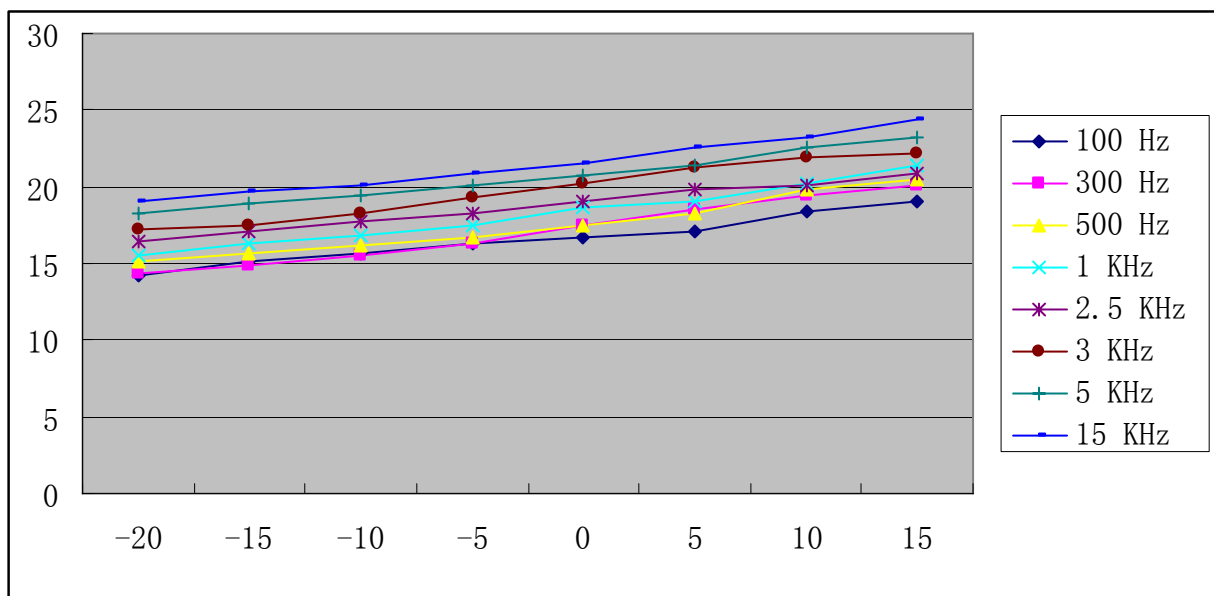

High Channel: 599.75 MHz

Modulation Level (dB)	Peak Frequency Deviation							
	100 Hz (KHz)	300 Hz (KHz)	500 Hz (KHz)	1 KHz (KHz)	2.5 KHz (KHz)	3 KHz (KHz)	5 KHz (KHz)	15 KHz (KHz)
-20	18.22	17.93	18.36	18.60	18.52	19.22	19.46	20.15
-15	18.65	18.16	19.09	19.25	19.64	20.53	20.14	20.62
-10	19.03	18.82	19.62	20.11	20.25	21.16	20.79	21.15
-5	19.58	19.43	20.15	20.84	21.39	22.65	21.43	21.62
0	20.46	20.21	20.68	21.32	22.42	23.42	22.65	22.18
+5	21.39	21.52	21.32	21.76	22.63	24.83	23.54	23.34
+10	22.02	22.30	21.99	22.06	23.80	25.06	24.80	24.25
+15	22.83	23.54	22.55	23.51	24.46	26.45	25.16	25.61
+20	23.18	24.25	23.42	24.49	25.38	27.69	26.03	26.28

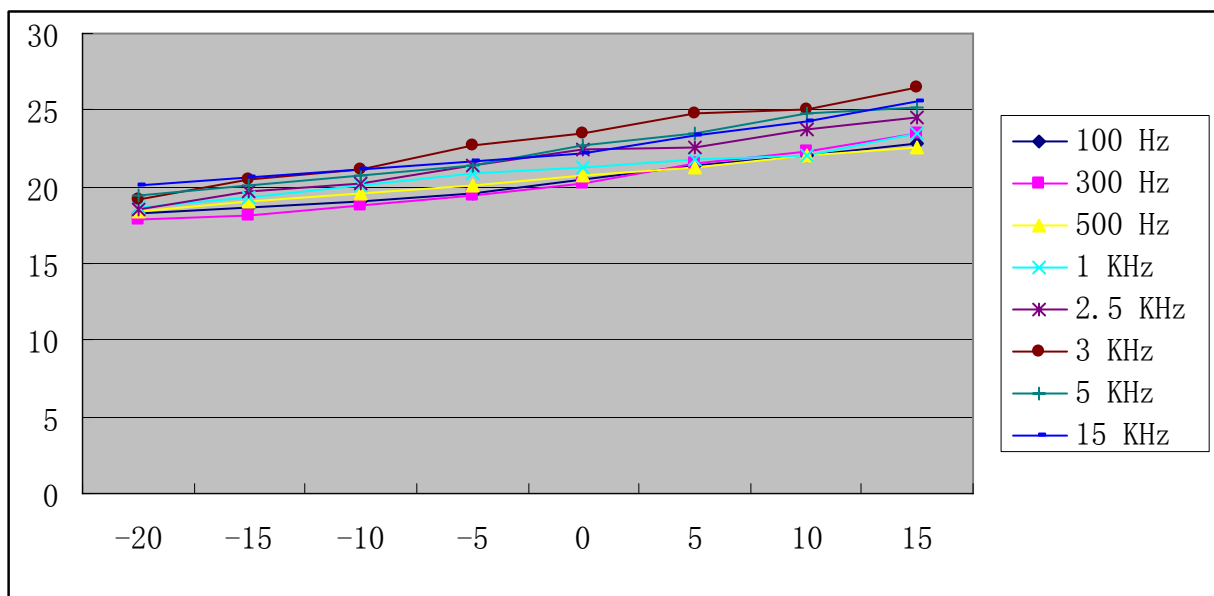


5.3 Audio Frequency Response

LIMIT

According to CFR 47 section 2.1047 a, for Voice modulation communication equipment, the frequency response of the audio modulation circuit over a range of 100 to 5000 Hz shall be measured.

According to CFR 47 section 74.861 e (1), any form of modulation may be used. A maximum deviation of ± 75 KHz is permitted when frequency modulation is employed.

TEST CONFIGURATION

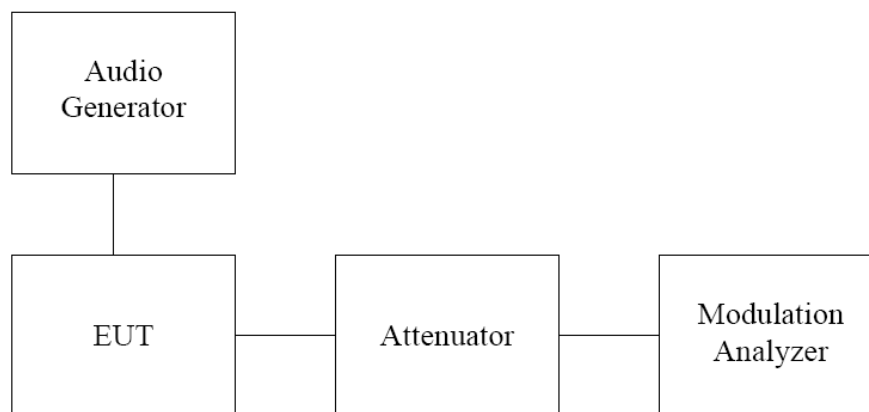

TEST PROCEDURE

1. The audio frequency response is the degree of the closeness to which the frequency deviation of the transmitter follows prescribed characteristics.
2. The frequency response of the audio modulation part is measured over a frequency range of 100Hz to 5000 Hz.
3. For 1000 Hz tone reference signal the audio generator level is adjusted to get 20% of the rated system deviation.
4. The deviations obtained over the frequency range from 100 HZ to 5000 Hz are recorded and compared with the reference deviation as follows:

$$\text{Audio Frequency Response} = 20 \log (\text{DEV freq} / \text{Dev ref})$$

TEST RESULTS

Low Channel: 575.00 MHz

Frequency (Hz)	Deviation (KHz)
100	10.06
200	10.44
300	10.98
400	11.19
500	11.52
600	12.05
700	12.46
800	12.83
900	13.12
1000	13.46
1200	13.69
1400	13.35
1600	13.21
1800	12.64
2000	12.23
2400	11.58
2800	11.42
3200	11.15
3600	10.69
4000	10.42
4500	10.21
5000	9.96


Middle Channel: 587.50 MHz

Frequency (Hz)	Deviation (KHz)
100	10.12
200	10.35
300	10.86
400	11.12
500	11.56
600	11.85
700	12.30
800	12.79
900	13.24
1000	13.62
1200	13.86
1400	13.93
1600	13.44
1800	13.05
2000	12.81
2400	12.36
2800	12.02
3200	11.66
3600	11.31
4000	11.08
4500	10.67
5000	10.49


High Channel: 599.75 MHz

Frequency (Hz)	Deviation (KHz)
100	9.86
200	10.18
300	10.62
400	10.89
500	11.24
600	11.68
700	11.92
800	12.35
900	12.60
1000	12.88
1200	13.46
1400	13.73
1600	13.39
1800	13.02
2000	12.85
2400	12.28
2800	12.06
3200	11.85
3600	11.56
4000	11.12
4500	10.81
5000	10.46


Low Channel: 575.00 MHz

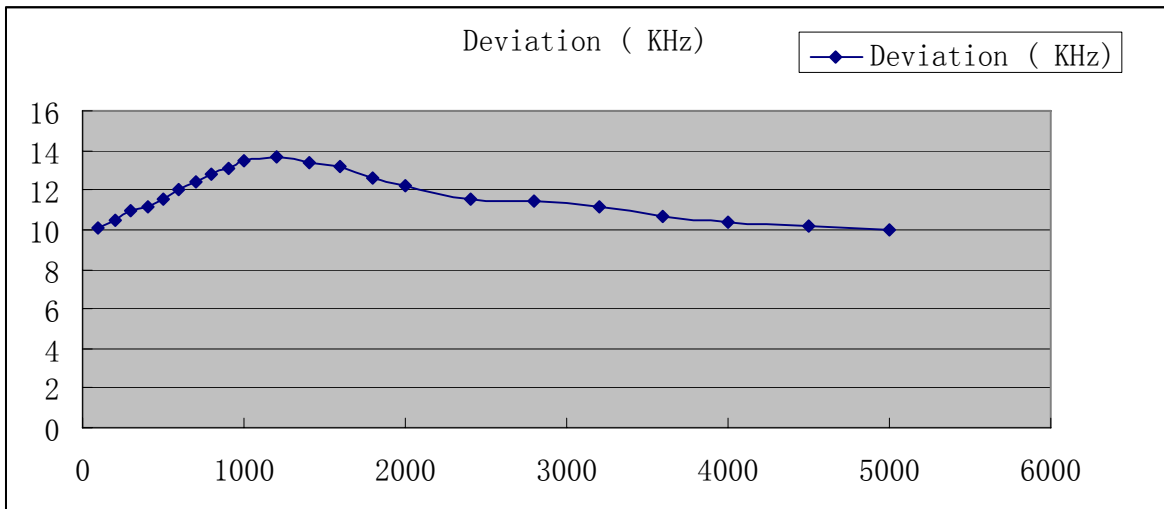

Middle Channel: 587.50 MHz

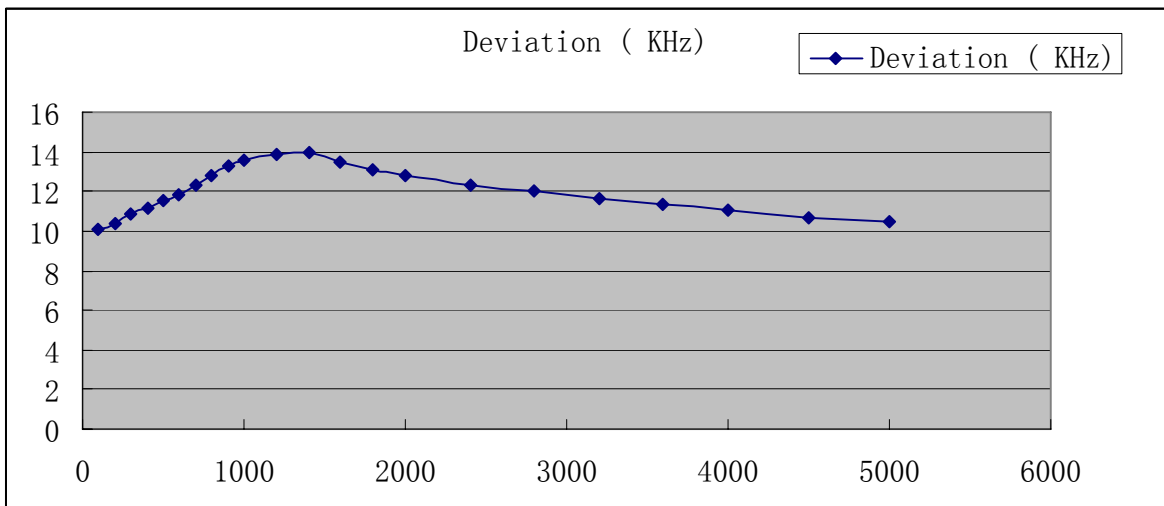

High Channel: 599.75 MHz

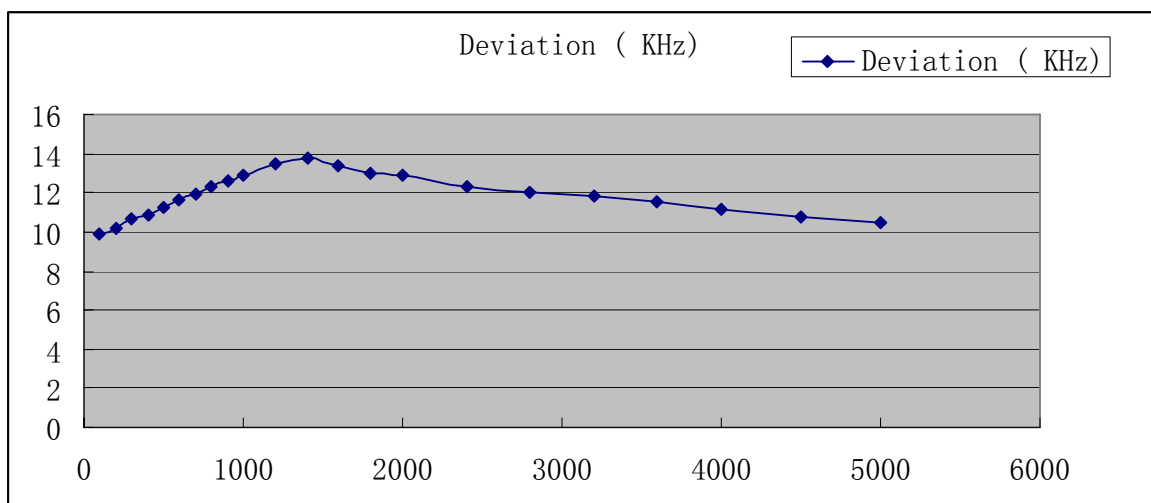


5.4 Occupied Bandwidth

LIMIT

According to CFR 47 section 74.861 e (5), the operating bandwidth shall no exceed 200 KHz.

Near the carrier an emission mask is defined by the standard.

TEST CONFIGURATION

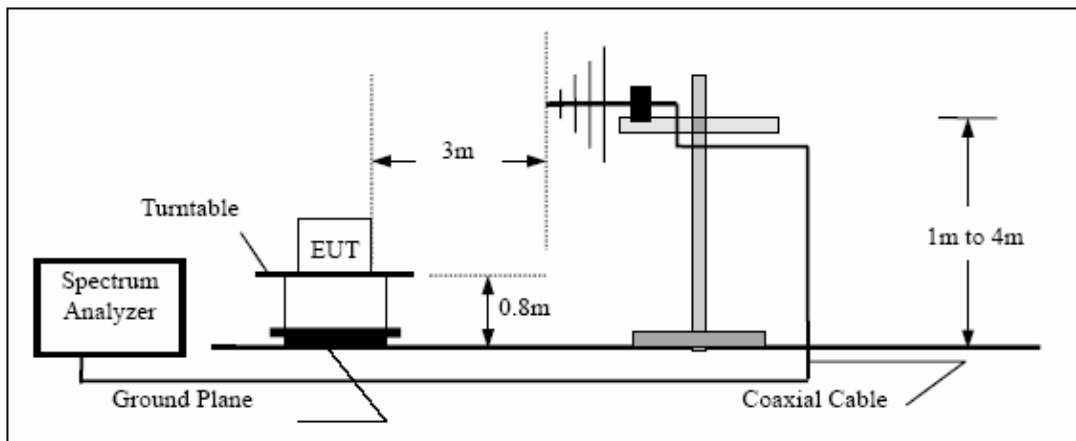

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. Set EUT as normal operation.
3. Set SPA center frequency=fundamental frequency, RBW, VBW=1 KHz, Span=50 KHz.
4. Set SPA max. Hold. Mark peak, -26dB.

TEST RESULTS

1000 Hz Modulation

Frequency	Occupied Bandwidth	Limit
575.00 MHz	135.6 KHz	200 KHz
587.50 MHz	140.5 KHz	200 KHz
599.75 MHz	138.2 KHz	200 KHz

2500 Hz Modulation

Frequency	Occupied Bandwidth	Limit
575.00 MHz	142.6 KHz	200 KHz
587.50 MHz	145.1 KHz	200 KHz
599.75 MHz	146.7 KHz	200 KHz


5.5 Radiated Spurious Emission

LIMIT

According to CFR 47 section 74.861 e (6), the mean power of emissions shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:

- (1) On any frequency removed from the operating frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: at least 25 dB;
- (2) On any frequency removed from the operating frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: at least 35 dB;
- (3) On any frequency removed from the operating frequency by more than 250 percent of the authorized bandwidth: at least $43 + 10 \log_{10} *$ (mean output power in watts) dB;

TEST CONFIGURATION

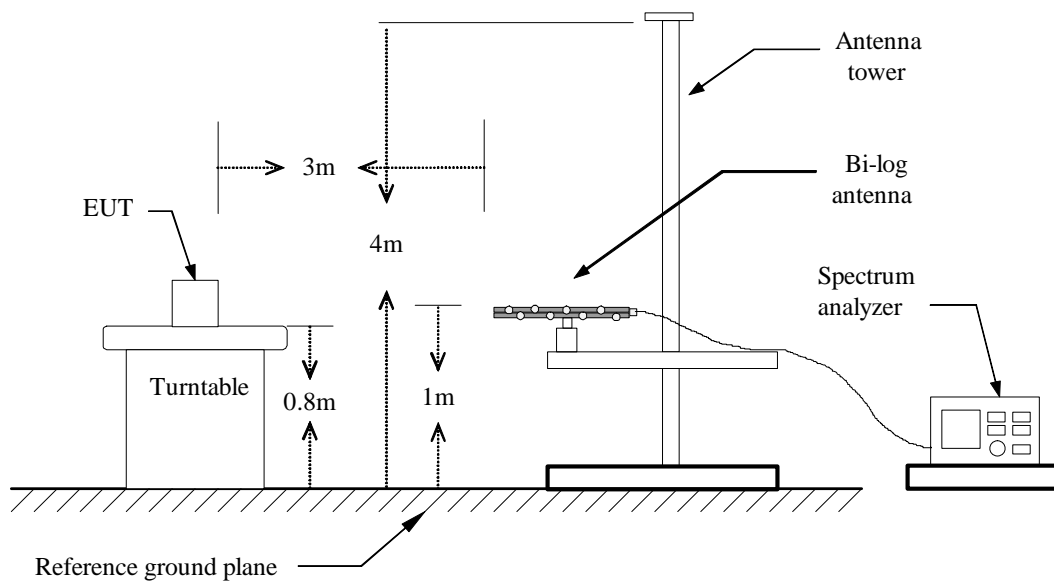

TEST PROCEDURE


1. On a test site, the EUT shall be placed on a turntable and in the position closest to the normal use as declared by the user.
2. The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
3. The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
4. The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
5. The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
6. The transmitter shall than be rotated through 360°in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
7. The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.
8. The maximum signal level detected by the measuring receiver shall be noted.
9. The measurement shall be repeated with the test antenna set to horizontal polarization.
10. Replace the antenna with a proper Antenna (substitution antenna).
11. The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
12. The substitution antenna shall be connected to a calibrated signal generator.
13. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
14. The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.
15. The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.
16. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
17. The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.

TEST RESULTS



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
 Guangdong, China
 Tel: 0755-86170306 Fax: 0755-86170310

Radiated Emission Measurement

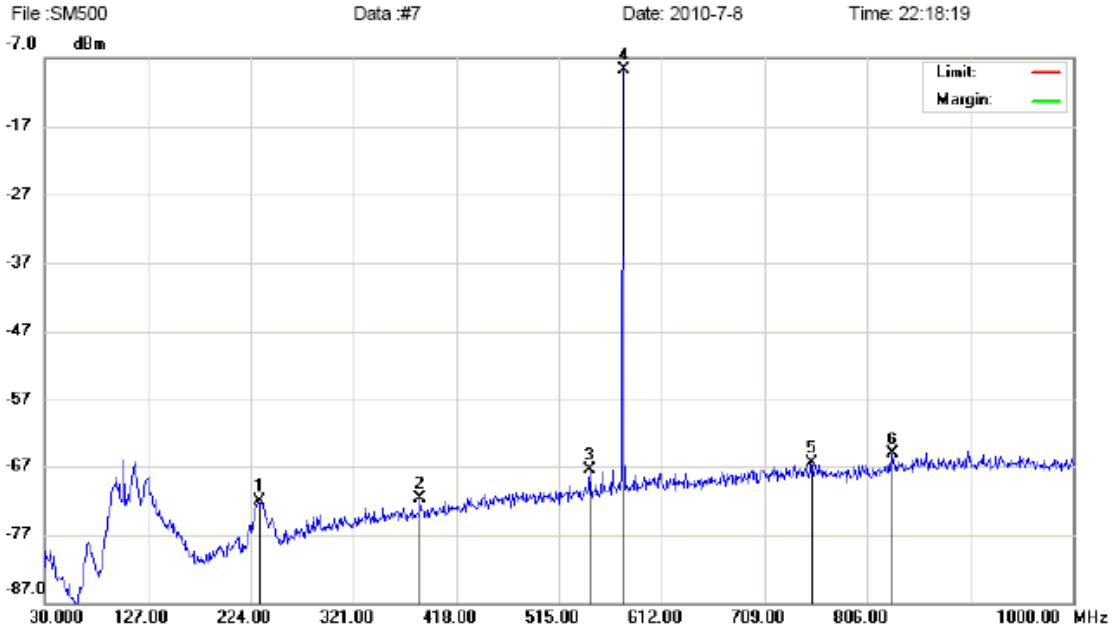

File: SM500 Data: #7 Date: 2010-7-8 Time: 22:18:19
 Site: site MOST 3M Polarization: *Horizontal* Temperature: 26
 Limit: Power: AC 120V/60Hz Humidity: 60 %
 EUT: WIRELESS MICROPHONE Distance:
 M/N: SM500
 Mode: NORMAL
 Note: CH-LOW


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1		230.7900	-104.32	32.13	-72.19					peak
2		384.0500	-101.66	30.03	-71.63					peak
3		544.1000	-100.34	32.80	-67.54					peak
4	*	575.1400	-42.08	33.29	-8.79					peak
5		752.6500	-101.95	35.48	-66.47					peak
6		828.3100	-100.88	35.85	-65.03					peak

*:Maximum data x:Over limit !:over margin



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
 Guangdong, China
 Tel: 0755-86170306 Fax: 0755-86170310

Radiated Emission Measurement

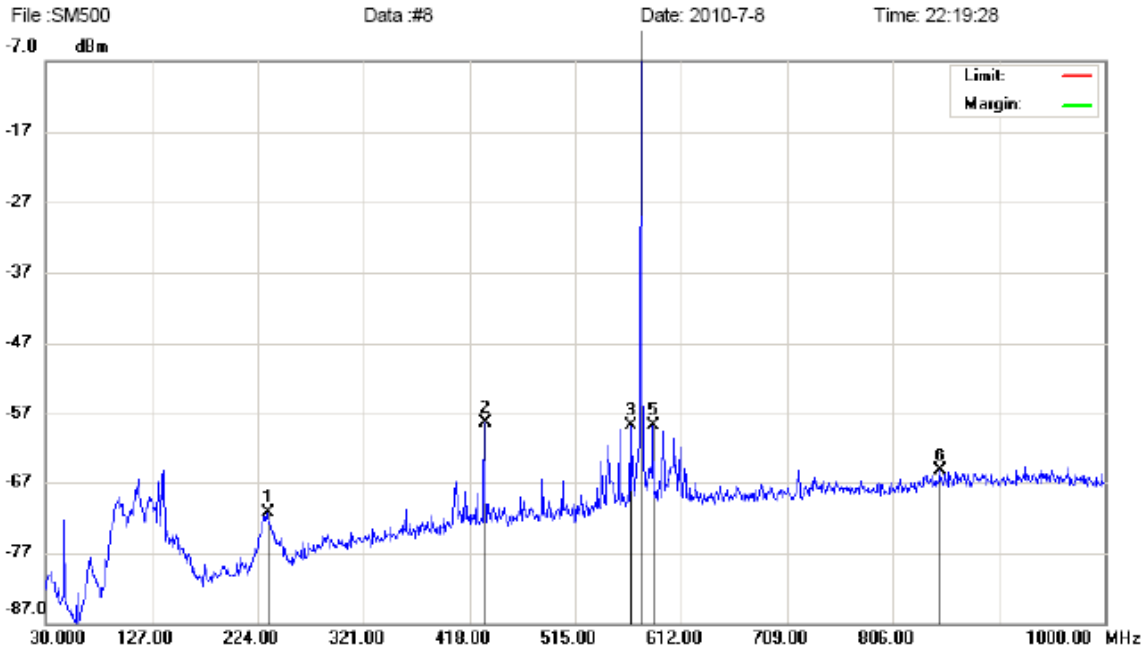

Site site MOST 3M Polarization: **Vertical** Temperature: 26
 Limit: Power: AC 120V/60Hz Humidity: 60 %
 EUT: WIRELESS MICROPHONE Distance:
 M/N: SM500
 Mode: NORMAL
 Note: CH-LOW


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1		232.7300	-103.05	31.78	-71.27					peak
2		431.5800	-89.69	31.31	-58.38					peak
3		565.4400	-91.92	33.13	-58.79					peak
4	*	575.1400	-31.15	33.29	2.14					peak
5		585.8100	-92.11	33.46	-58.65					peak
6		848.6800	-101.79	36.41	-65.38					peak

*:Maximum data x:Over limit !:over margin



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
 Guangdong, China
 Tel: 0755-86170306 Fax: 0755-86170310

Radiated Emission Measurement

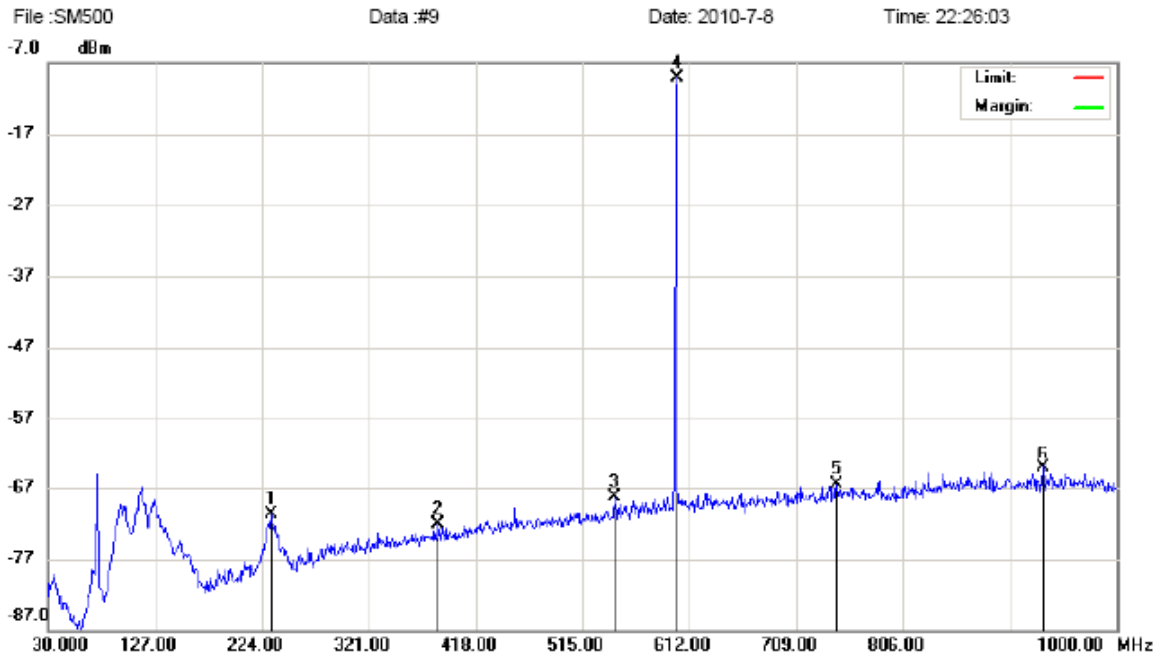

File : SM500 Data : #9 Date : 2010-7-8 Time : 22:26:03

Site site MOST 3M Polarization: *Horizontal* Temperature: 26
 Limit: Power: AC 120V/60Hz Humidity: 60 %
 EUT: WIRELESS MICROPHONE Distance:
 M/N: SM500
 Mode: NORMAL
 Note: CH-HIGH


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		231.7600	-102.61	31.96	-70.65					peak	
2		384.0500	-102.22	30.03	-72.19					peak	
3		544.1000	-101.07	32.80	-68.27					peak	
4	*	600.3600	-42.69	33.68	-9.01					peak	
5		745.8600	-101.94	35.43	-66.51					peak	
6		933.0700	-100.88	36.88	-64.00					peak	

*:Maximum data x:Over limit !:over margin



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
 Guangdong, China
 Tel: 0755-86170306 Fax: 0755-86170310

Radiated Emission Measurement

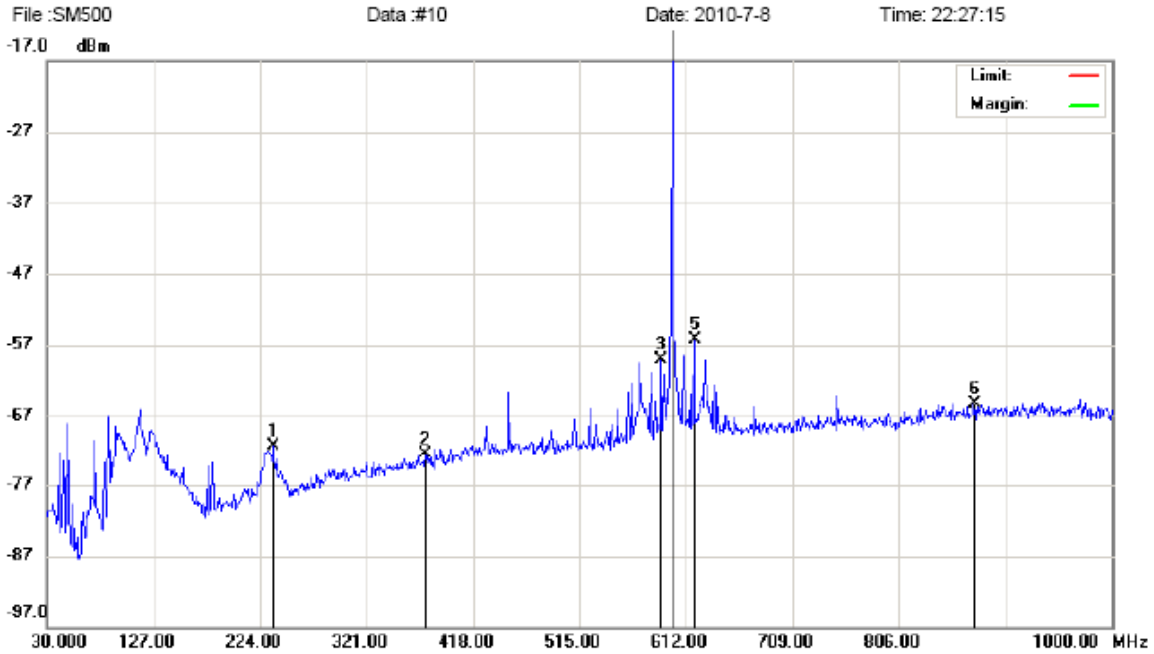

Site site MOST 3M Polarization: **Vertical** Temperature: 26
 Limit: Power: AC 120V/60Hz Humidity: 60 %
 EUT: WIRELESS MICROPHONE Distance:
 M/N: SM500
 Mode: NORMAL
 Note: CH-HIGH


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1		235.6400	-102.36	31.08	-71.28					peak
2		374.3500	-102.37	29.89	-72.48					peak
3		589.6900	-92.57	33.52	-59.05					peak
4	*	600.3600	-30.83	33.68	2.85					peak
5		619.7600	-90.08	33.75	-56.33					peak
6		873.9000	-101.88	36.59	-65.29					peak

*:Maximum data x:Over limit !:over margin



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
 Guangdong, China
 Tel: 0755-86170306 Fax: 0755-86170310

Radiated Emission Measurement

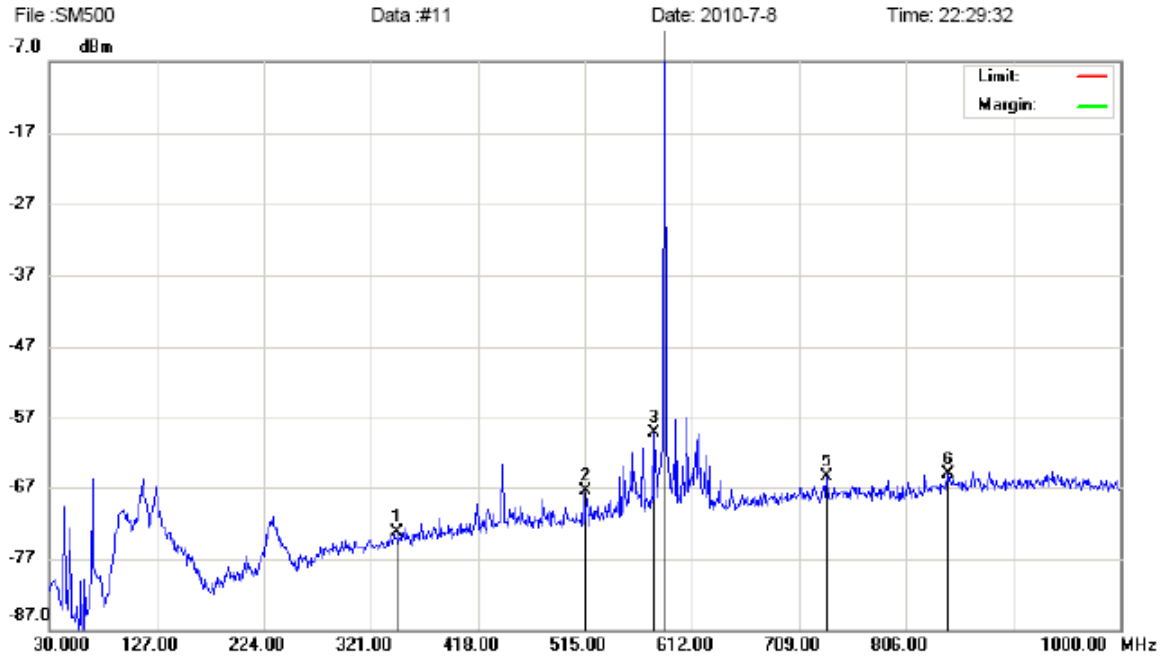

File :SM500 Data :#11 Date: 2010-7-8 Time: 22:29:32
 Site site MOST 3M Polarization: **Vertical** Temperature: 26
 Limit: Power: AC 120V/60Hz Humidity: 60 %
 EUT: WIRELESS MICROPHONE Distance:
 M/N: SM500
 Mode: NORMAL
 Note: CH-MID


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB	cm	degree		
1		345.2500	-102.64	29.40	-73.24					peak	
2		514.0300	-99.79	32.31	-67.48					peak	
3		577.0800	-92.41	33.32	-59.09					peak	
4	*	587.7500	-30.82	33.49	2.67					peak	
5		734.2199	-100.74	35.23	-65.51					peak	
6		843.8300	-101.39	36.28	-65.11					peak	

*:Maximum data x:Over limit !:over margin



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
 Guangdong, China
 Tel: 0755-86170306 Fax: 0755-86170310

Radiated Emission Measurement

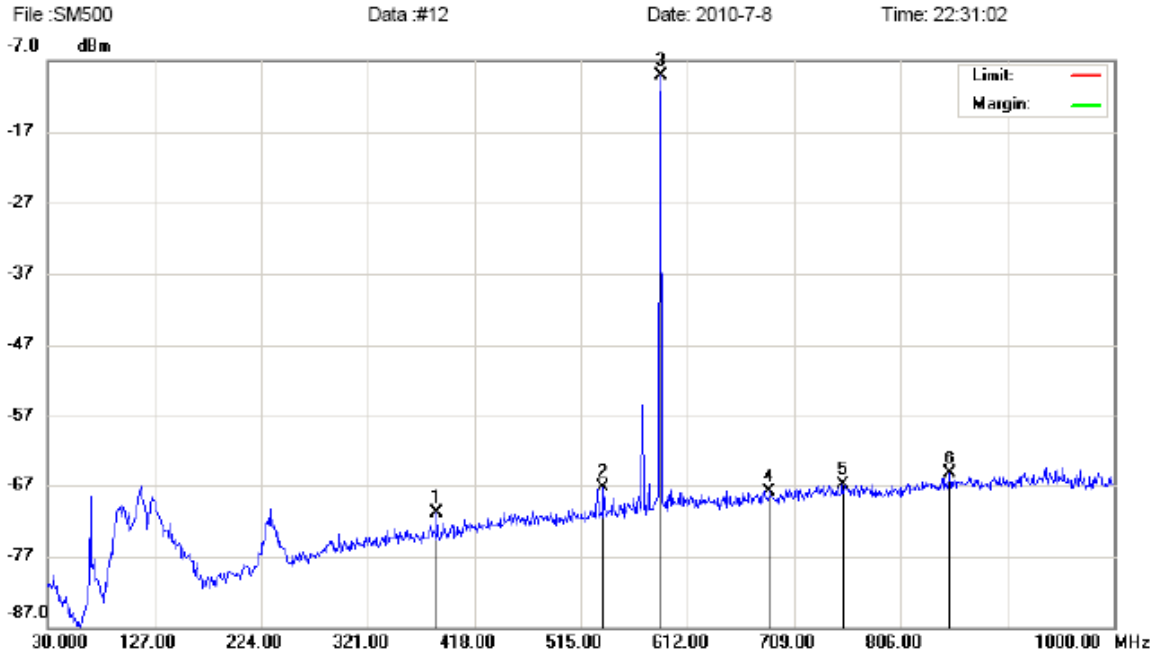

Site site MOST 3M Polarization: *Horizontal* Temperature: 26
 Limit: Power: AC 120V/60Hz Humidity: 60 %
 EUT: WIRELESS MICROPHONE Distance:
 M/N: SM500
 Mode: NORMAL
 Note: CH-MID

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		384.0500	-100.91	30.03	-70.88					peak	
2		535.3700	-99.96	32.66	-67.30					peak	
3	*	587.7500	-42.61	33.49	-9.12					peak	
4		686.6900	-102.31	34.43	-67.88					peak	
5		752.6500	-102.35	35.48	-66.87					peak	
6		850.6200	-101.76	36.45	-65.31					peak	

*:Maximum data x:Over limit !:over margin

Above 1000 MHz:

Frequency (MHz)	Antenna Polarization	S.G. (dBm)	Cable loss (dB)	Ant. Gain (dB)	Emission level (dBm)	Limit (dBm)	Margin (dB)
Low Channel-575.00 MHz							
1157.50	H	-39.67	1.49	9.41	-31.75	-13	-18.75
1735.00	H	-26.84	1.56	9.89	-18.51	-13	-5.51
--							>10
1157.50	V	-30.68	1.49	9.41	-22.76	-13	-9.76
1735.00	V	-26.18	1.56	9.89	-17.85	-13	-4.85
--							>10
Middle Channel-587.50 MHz							
1175.00	H	-39.38	1.54	10.30	-30.62	-13	-17.62
2942.50	H	-25.51	2.01	11.42	-16.10	-13	-3.10
--							>10
1175.00	V	-27.67	1.54	10.30	-18.91	-13	-5.91
2942.50	V	-25.43	2.01	11.42	-16.02	-13	-3.02
--							>10
High Channel-599.75 MHz							
1805.00	H	-26.1	1.57	10.35	-17.32	-13	-4.32
--	H					-13	>10
1210.00	V	-24.63	1.62	10.41	-15.84	-13	-2.84
--	V					-13	>10

Notes:


(1) $ERP = S.G \text{ Level} - \text{Cable Loss} + \text{Antenna Gain}$

$\text{Emission Level(ERP)} = \text{Reading Level} + \text{Factor}$

$\text{Reading} + \text{Factor} = S.G \text{ Level} - \text{Cable Loss} + \text{Antenna Gain}$

Maximum Transmitter Power (P)	2.85 dBm
Require attenuation	$43 + 10 \log_{10} (0.001928) = -15.85 \text{ dB}$
Emission Limits	$P - [43 + 10 \log_{10} (0.000234)] = -13 \text{ dBm}$

Emission Mask:

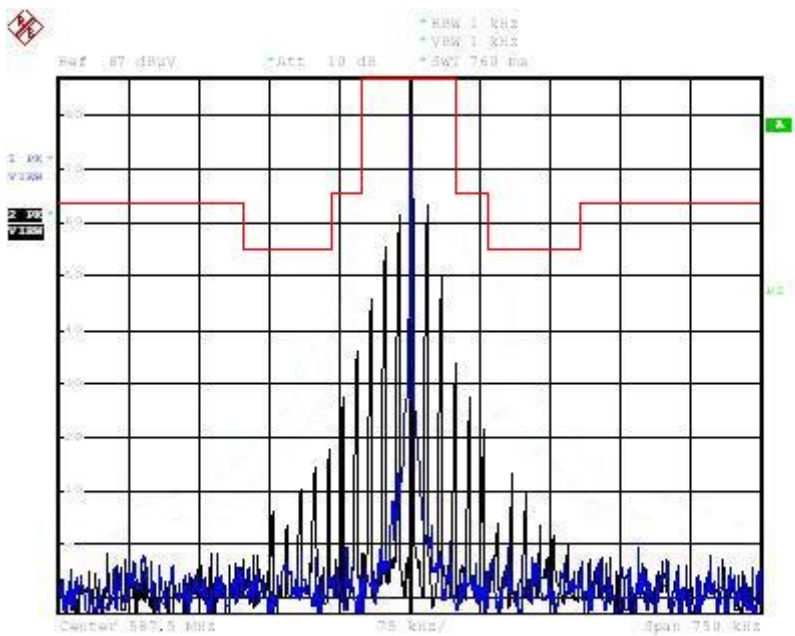

Middle Channel (587.50 MHz)

5.6 Frequency Stability vs. Temperature

LIMIT

According to CFR 47 section 74.861 e (4), the frequency tolerance of the transmitter shall be 0.005 percent.

TEST PROCEDURE

The EUT was connected to an external DC power supply and the RF output was connected to a frequency counter via feed through attenuators. The EUT was placed inside the temperature chamber. The DC leads and the RF output cable, exited the chamber through an opening made for that purpose.

After the temperature stabilized the frequency output was recorded form the counter.

RESULTS

Low Channel-575.00 MHz

Temperature (°C)	Frequency Error (KHz)	Frequency Error (%)	Limit (%)
-30	-7.100	-0.0012	±0.005
-20	-5.205	-0.00090	±0.005
-10	-3.685	-0.00064	±0.005
0	-1.560	-0.00027	±0.005
10	2.450	0.00043	±0.005
20	-3.050	-0.00053	±0.005
30	-4.245	-0.00074	±0.005
40	-6.260	-0.00109	±0.005
50	-7.550	-0.00131	±0.005

Middle Channel-587.50 MHz

Temperature (°C)	Frequency Error (KHz)	Frequency Error (%)	Limit (%)
-30	-6.655	-0.00113	±0.005
-20	-5.580	-0.00095	±0.005
-10	-4.136	-0.00070	±0.005
0	-2.075	-0.00035	±0.005
10	1.450	0.00025	±0.005
20	-1.609	-0.00027	±0.005
30	-3.225	-0.00055	±0.005
40	-4.146	-0.00070	±0.005
50	-5.220	-0.00089	±0.005

High Channel-599.75 MHz

Temperature (°C)	Frequency Error (KHz)	Frequency Error (%)	Limit (%)
-30	-6.180	-0.00103	±0.005
-20	-5.235	-0.00087	±0.005
-10	-4.050	-0.00068	±0.005
0	-2.635	-0.00044	±0.005
10	1.005	0.00017	±0.005
20	-2.182	-0.00036	±0.005
30	-3.335	-0.00056	±0.005
40	-5.260	-0.00088	±0.005
50	-7.240	-0.00121	±0.005

5.7 Frequency Stability vs. Voltage

LIMIT

According to CFR 47 section 74.861 e (4), the frequency tolerance of the transmitter shall be 0.005 percent.

TEST PROCEDURE

An external variable DC power supply was connected to the battery terminals of the equipment under test.

For hand carried, battery powered equipment primary supply voltage was reduced to the battery operating end point as specified by the manufacturer. The output frequency was recorded for each battery voltage.

RESULTS

Low Channel-575.00 MHz

Voltage (V)	Frequency Error (Hz)	Frequency Error (%)	Limit (%)
3.0	1126	0.00019	±0.005
2.5	1342	0.00023	±0.005
2.0	1580	0.00027	±0.005
1.8	1725	0.00030	±0.005
*			
*			

Middle Channel-587.50 MHz

Voltage (V)	Frequency Error (Hz)	Frequency Error (%)	Limit (%)
3.0	1235	0.00021	±0.005
2.5	1462	0.00025	±0.005
2.0	1705	0.00029	±0.005
1.8	1769	0.00030	±0.005
*			
*			



High Channel-599.75 MHz

Voltage (V)	Frequency Error (Hz)	Frequency Error (%)	Limit (%)
3.0	1190	0.00020	±0.005
2.5	1322	0.00022	±0.005
2.0	1568	0.00026	±0.005
1.8	1743	0.00029	±0.005
*			
*			

Annex A

Photographs of the Test Setup

Radio Emission Setup Photo

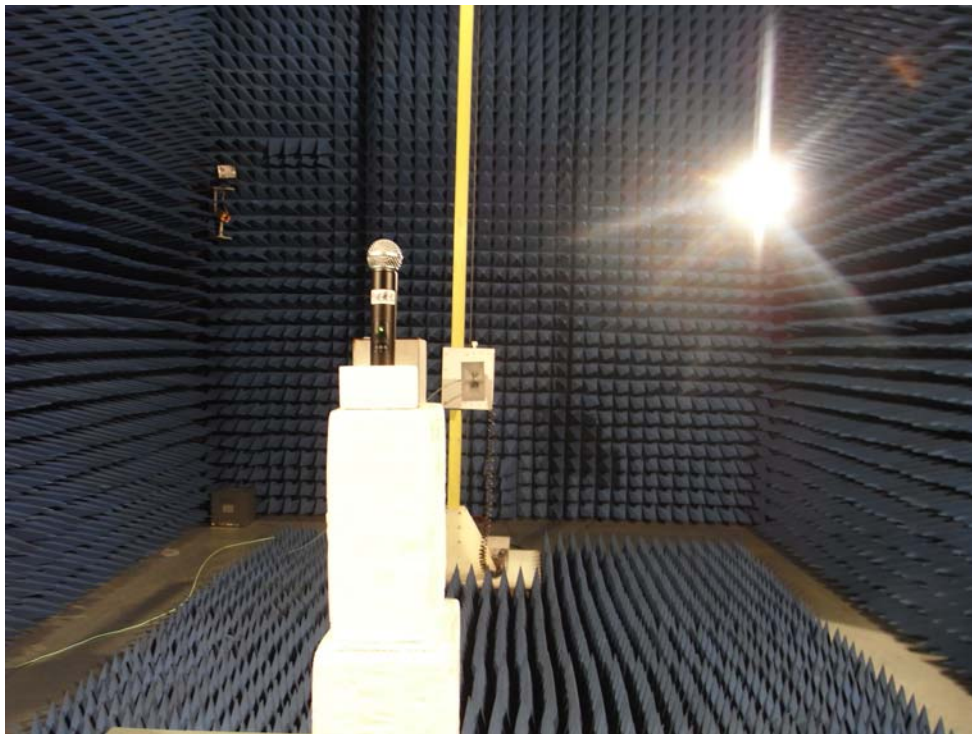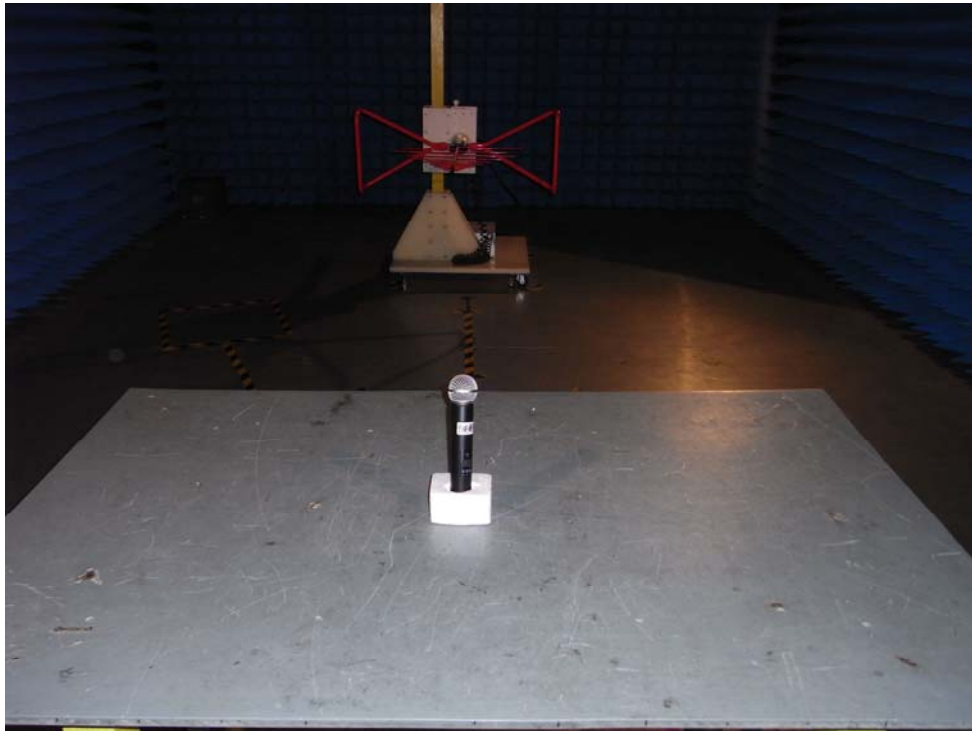

Annex B
Photographs of the EUT

FRONT VIEW OF SAMPLE



BACK VIEW OF SAMPLE




TOP VIEW OF SAMPLE




BOTTOM VIEW OF SAMPLE




INTERNAL PHOTO OF SAMPLE - 1

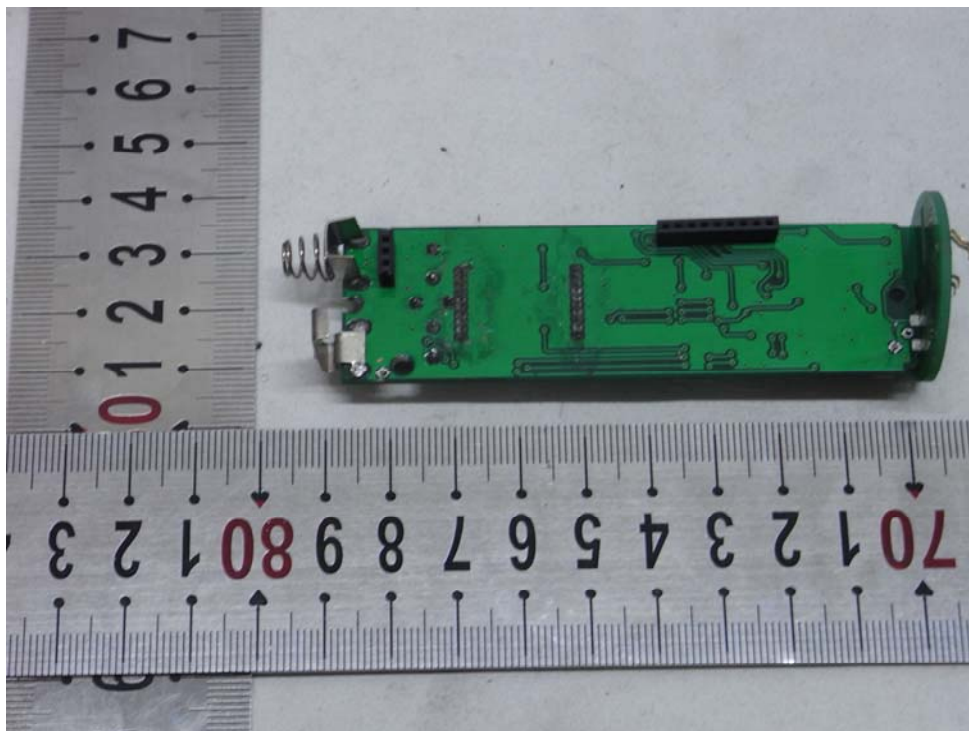


INTERNAL PHOTO OF SAMPLE - 2

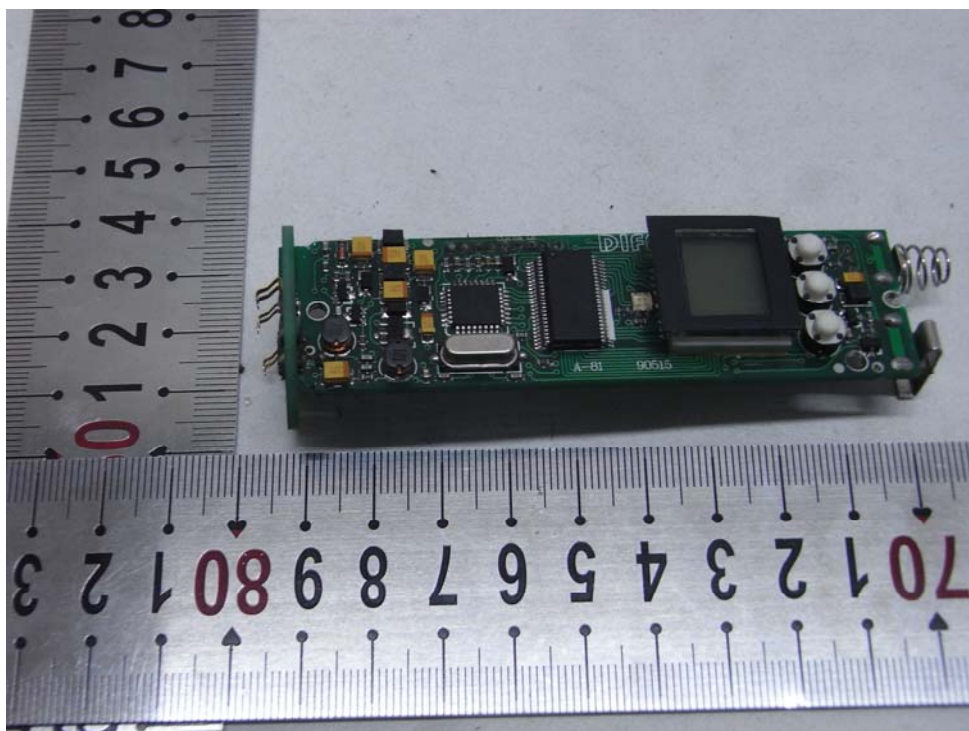

INTERNAL PHOTO OF SAMPLE - 3

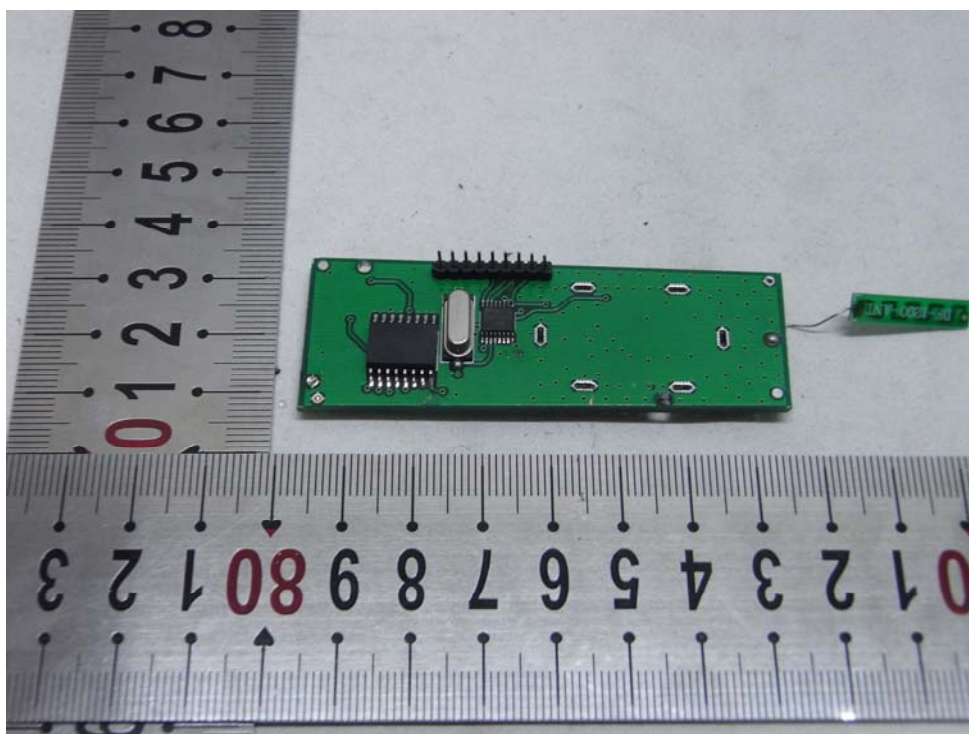

INTERNAL PHOTO OF SAMPLE - 4

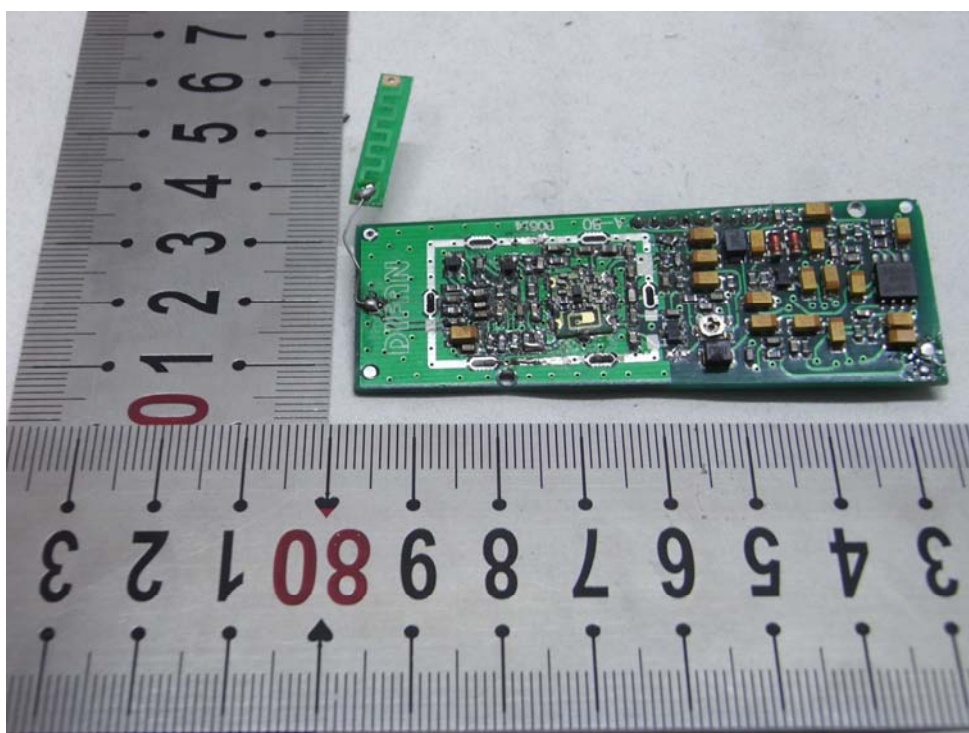

*** End of the Reports***