

EMC Test Report

*Application for Grant of Equipment Authorization
Industry Canada RSS-Gen Issue 3 / RSS 210 Issue 8
FCC Part 15, Subpart E*

Model: CELFI-RS240CU

IC CERTIFICATION #: 9298A-CRS240CU
FCC ID: YETCELFIR-S240CU

APPLICANT: Nextivity Inc.
12230 World Trade Drive Suite 250
San Diego, CA 92128

TEST SITE(S): Elliott Laboratories
41039 Boyce Road.
Fremont, CA. 94538-2435

IC SITE REGISTRATION #: 2845B-3, 2845B-5

REPORT DATE: November 3, 2011

FINAL TEST DATES: September 27, 29 and 30, 2011


TOTAL NUMBER OF PAGES: 50

PROGRAM MGR /
TECHNICAL REVIEWER:



David W. Bare
Chief Engineer

QUALITY ASSURANCE DELEGATE /
FINAL REPORT PREPARER:

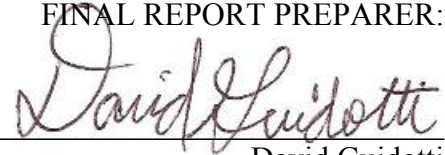

David Guidotti
Senior Technical Writer



Testing Cert #2016.01

Elliott Laboratories is accredited by the A2LA, certificate number 2016.01, to perform the test(s) listed in this report, except where noted otherwise. This report and the information contained herein represent the results of testing test articles identified and selected by the client performed to specifications and/or procedures selected by the client. National Technical Systems (NTS) makes no representations, expressed or implied, that such testing is adequate (or inadequate) to demonstrate efficiency, performance, reliability, or any other characteristic of the articles being tested, or similar products. This report should not be relied upon as an endorsement or certification by NTS of the equipment tested, nor does it represent any statement whatsoever as to its merchantability or fitness of the test article, or similar products, for a particular purpose. This report shall not be reproduced except in full.

REVISION HISTORY

Rev#	Date	Comments	Modified By
-	11-3-2011	First release	

TABLE OF CONTENTS

REVISION HISTORY	2
TABLE OF CONTENTS	3
SCOPE.....	4
OBJECTIVE	5
STATEMENT OF COMPLIANCE.....	5
DEVIATIONS FROM THE STANDARDS.....	5
TEST RESULTS SUMMARY	6
UNII / LELAN DEVICES	6
GENERAL REQUIREMENTS APPLICABLE TO ALL BANDS.....	7
MEASUREMENT UNCERTAINTIES.....	8
EQUIPMENT UNDER TEST (EUT) DETAILS.....	9
GENERAL.....	9
OTHER EUT DETAILS.....	9
ENCLOSURE.....	9
MODIFICATIONS.....	9
SUPPORT EQUIPMENT.....	10
EUT INTERFACE PORTS.....	10
EUT OPERATION.....	10
TEST SITE.....	11
GENERAL INFORMATION.....	11
CONDUCTED EMISSIONS CONSIDERATIONS.....	11
RADIATED EMISSIONS CONSIDERATIONS.....	11
MEASUREMENT INSTRUMENTATION.....	12
RECEIVER SYSTEM.....	12
INSTRUMENT CONTROL COMPUTER.....	12
LINE IMPEDANCE STABILIZATION NETWORK (LISN).....	12
FILTERS/ATTENUATORS.....	13
ANTENNAS.....	13
ANTENNA MAST AND EQUIPMENT TURNTABLE.....	13
INSTRUMENT CALIBRATION.....	13
TEST PROCEDURES	14
EUT AND CABLE PLACEMENT.....	14
CONDUCTED EMISSIONS.....	14
RADIATED EMISSIONS.....	14
RADIATED EMISSIONS.....	15
CONDUCTED EMISSIONS FROM ANTENNA PORT.....	17
BANDWIDTH MEASUREMENTS.....	17
SPECIFICATION LIMITS AND SAMPLE CALCULATIONS.....	18
CONDUCTED EMISSIONS SPECIFICATION LIMITS: FCC 15.207; FCC 15.107(A), RSS GEN.....	18
GENERAL TRANSMITTER RADIATED EMISSIONS SPECIFICATION LIMITS.....	19
RECEIVER RADIATED SPURIOUS EMISSIONS SPECIFICATION LIMITS.....	19
FCC 15.407 (A) OUTPUT POWER LIMITS.....	20
OUTPUT POWER LIMITS –LELAN DEVICES.....	20
SPURIOUS EMISSIONS LIMITS –UNII AND LELAN DEVICES.....	21
SAMPLE CALCULATIONS - CONDUCTED EMISSIONS.....	21
SAMPLE CALCULATIONS - RADIATED EMISSIONS.....	21
SAMPLE CALCULATIONS - FIELD STRENGTH TO EIRP CONVERSION.....	22
APPENDIX A TEST EQUIPMENT CALIBRATION DATA	23
APPENDIX B TEST DATA	24
END OF REPORT	50

SCOPE

An electromagnetic emissions test has been performed on the Nextivity Inc. model CELFI-RS240CU, pursuant to the following rules:

Industry Canada RSS-Gen Issue 3

RSS 210 Issue 8 "Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment"

FCC Part 15, Subpart E requirements for UNII Devices (using FCC KDB 789033, October, 2011)

Conducted and radiated emissions data has been collected, reduced, and analyzed within this report in accordance with measurement guidelines set forth in the following reference standards and as outlined in Elliott Laboratories test procedures:

ANSI C63.4:2003

FCC UNII test procedure KDB 789033, October 2011

The intentional radiator above has been tested in a simulated typical installation to demonstrate compliance with the relevant Industry Canada performance and procedural standards.

Final system data was gathered in a mode that tended to maximize emissions by varying orientation of EUT, orientation of power and I/O cabling, antenna search height, and antenna polarization.

Every practical effort was made to perform an impartial test using appropriate test equipment of known calibration. All pertinent factors have been applied to reach the determination of compliance.

OBJECTIVE

The primary objective of the manufacturer is compliance with the regulations outlined in the previous section.

Prior to marketing in the USA, all unlicensed transmitters and transceivers require certification. Receive-only devices operating between 30 MHz and 960 MHz are subject to either certification or a manufacturer's declaration of conformity, with all other receive-only devices exempt from the technical requirements.

Prior to marketing in Canada, Class I transmitters, receivers and transceivers require certification. Class II devices are required to meet the appropriate technical requirements but are exempt from certification requirements.

Certification is a procedure where the manufacturer submits test data and technical information to a certification body and receives a certificate or grant of equipment authorization upon successful completion of the certification body's review of the submitted documents. Once the equipment authorization has been obtained, the label indicating compliance must be attached to all identical units, which are subsequently manufactured.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product which may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

STATEMENT OF COMPLIANCE

The tested sample of Nextivity Inc. model CELFI-RS240CU complied with the requirements of the following regulations:

RSS 210 Issue 8 "Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment"
FCC Part 15, Subpart E requirements for UNII Devices

Maintenance of compliance is the responsibility of the manufacturer. Any modifications to the product should be assessed to determine their potential impact on the compliance status of the device with respect to the standards detailed in this test report.

The test results recorded herein are based on a single type test of Nextivity Inc. model CELFI-RS240CU and therefore apply only to the tested sample. The sample was selected and prepared by Rama Akella of Nextivity Inc.

DEVIATIONS FROM THE STANDARDS

No deviations were made from the published requirements listed in the scope of this report.

TEST RESULTS SUMMARY**UNII / LELAN DEVICES****Operation in the 5.47 – 5.725 GHz Band**

FCC Rule Part	RSS Rule Part	Description	Measured Value / Comments	Limit / Requirement	Result (margin)
15.407(a)(2)	-	26dB Bandwidth	29.5 MHz	N/A – limits output power if < 20MHz	N/A
-	A9.2	99% Bandwidth	26.6 MHz	N/A – limits output power if < 20MHz	N/A
15.407(a)(2)	A9.2(2)	Output Power	17.4 dBm (55mW) (Max eirp: 0/195 W)	24 dBm / 250mW (eirp < 30dBm)	Complies
15.407(a)(2)	A9.2(2)	Power Spectral Density	4.7 dBm/MHz	11 dBm/MHz	Complies
KDB 443999	A9	Non-operation in 5600 – 5650 MHz sub band	Device cannot operate in the 5600 – 5650 MHz band –refer to Operational Description		Complies

Requirements for all U-NII/LELAN bands

FCC Rule Part	RSS Rule Part	Description	Measured Value / Comments	Limit / Requirement	Result
15.407	A9.4(1)	Modulation	OFDM Digital Modulation is used	Digital modulation is required	Complies
15.407(b)(5) / 15.209	A9.3	Spurious Emissions below 1GHz	32.8dB μ V/m @ 36.382 MHz (-7.2dB)	Refer to page 21	Complies
15.407(b)(5) / 15.209	A9.3	Spurious Emissions above 1GHz	51.2dB μ V/m @ 5459.6MHz (-2.8dB)		Complies
15.407(a)(6)	-	Peak Excursion Ratio	11.3 dB	< 13dB	Complies
	A9.4(3)	Channel Selection	Spurious emissions tested at outermost channels in each band	Device was tested on the top, bottom and center channels in each band	N/A
15.31(m)			Measurements on 3 channels in each band		N/A
15.407 (c)	A9.4(4)	Operation in the absence of information to transmit	Operation never stops as information from cell tower is always present	Device shall automatically discontinue operation in the absence of information to transmit	Complies
15.407 (g)		Frequency Stability	Frequency stability is better than 10ppm	Signal shall remain within the allocated band	Complies
15.407 (h1)	A9.3	Transmit Power Control	TPC is not required as the device operates at below 500mW eirp	The U-NII device shall be able to operate with EIRP value lower than 24dBm (250mW)	Complies
15.407 (h2)	A9.3	Dynamic frequency Selection (device with radar detection)	Refer to separate test report, reference R85135	Threshold -62dBm Channel Availability Check > 60s Channel closing transmission time < 260ms Channel move time < 10s Non occupancy period > 30minutes	Complies

GENERAL REQUIREMENTS APPLICABLE TO ALL BANDS

FCC Rule Part	RSS Rule part	Description	Measured Value / Comments	Limit / Requirement	Result (margin)
15.203	-	RF Connector		Unique or integral antenna required	Complies
15.207	RSS GEN Table 2	AC Conducted Emissions	51.1dB μ V @ 0.168MHz (-14.0dB)	Refer to page 18	Complies
15.109	RSS GEN 7.2.3 Table 1	Receiver spurious emissions	30.8dB μ V/m @ 36.40MHz (-9.2dB)	Refer to page 19	Complies
15.247 (b) (5) 15.407 (f)	RSS 102	RF Exposure Requirements	Refer to MPE calculations in separate exhibit, RSS 102 declaration and User Manual statements.	Refer to OET 65, FCC Part 1 and RSS 102	Complies
-	A9.4(6)	User Manual	Refer to User Manual statements	Indoor use and antenna gain	Complies
-	A9.4(7)	User Manual	Refer to User Manual statements	Advice about high power radar potential interference	Complies
-	RSP 100 RSS GEN 7.1.5	User Manual	Refer to User Manual statements	Statement required regarding non-interference	Complies
-	RSP 100 RSS GEN 7.1.5	User Manual	Device does not detachable antennas	Statement for products with detachable antenna	Complies
-	RSP 100 RSS GEN 4.4.1	99% Bandwidth	26.7 MHz	Information only	N/A

MEASUREMENT UNCERTAINTIES

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level and were calculated in accordance with UKAS document LAB 34.

Measurement Type	Measurement Unit	Frequency Range	Expanded Uncertainty
RF power, conducted (power meter)	dBm	25 to 7000 MHz	± 0.52 dB
RF power, conducted (Spectrum analyzer)	dBm	25 to 7000 MHz	± 0.7 dB
Conducted emission of transmitter	dBm	25 to 26500 MHz	± 0.7 dB
Conducted emission of receiver	dBm	25 to 26500 MHz	± 0.7 dB
Radiated emission (substitution method)	dBm	25 to 26500 MHz	± 2.5 dB
Radiated emission (field strength)	dB μ V/m	25 to 1000 MHz	± 3.6 dB
		1000 to 40000 MHz	± 6.0 dB
Conducted Emissions (AC Power)	dB μ V	0.15 to 30 MHz	± 2.4 dB

EQUIPMENT UNDER TEST (EUT) DETAILS**GENERAL**

The Nextivity Inc. model CELFI-RS240CU is a WCDMA Cellular Repeater for indoor residential use. The system is composed of two units, the Window Unit (WU with model name of CELFI-RS240WU) and the Coverage Unit (CU with model name of CELFI-RS240CU) that connect wirelessly over a full-duplex wireless link in the RLAN band using a mixed OFDM and muxed cellular signal (up to three 5 MHz cellular channels) over a 30 MHz channel in each direction. The Cel-Fi WU transmits and receives Cellular signals from the base station and operates similar to a cellular handset. The Cel-Fi CU transmits and receives signals with the cellular handset and operates on frequencies similar to the cellular base station. Since the EUT could be placed on a table top during operation, the EUT was treated as table-top equipment during testing to simulate the end-user environment. The electrical rating of the EUT is 12VDC, 15W supplied from a power adapter rated 100-240 Volts, 50/60 Hz, 1 Amp.

The sample was received on September 26, 2011 and tested on September 27, 29 and 30, 2011. The following sample was tested:

Company	Model	Description	Serial Number	FCC ID
Nextivity	CELFY-RS240CU	CelFi Coverage Unit	131131000208	YETCELFY-RS240CU

OTHER EUT DETAILS

The following EUT details should be noted: The communication in the U-NII bands is a nominally 30 MHz proprietary OFDM signal. The WU transmits in the 5150-5350 MHz band only and receives in the 5470-5725 MHz band in normal use. During CU synchronization, the WU receives in both 5150-5350 and 5470-5725 MHz bands. The CU transmits in the 5470-5725 MHz band and receives in the 5150-5350 MHz band. Once communication is established between the WU and CU, there is 100% usage of the TX channel for both the WU and CU.

The antenna is integral to the device. Gain is 5.5 dBi.

ENCLOSURE

The CU enclosure is primarily constructed of plastic. It measures approximately 14.5 cm wide by 5.5 cm deep by 19.5 cm high.

MODIFICATIONS

No modifications were made to the EUT during the time the product was at Elliott.

SUPPORT EQUIPMENT

No support equipment was used during emissions testing.

EUT INTERFACE PORTS

The I/O cabling configuration during emissions testing was as follows:

Port		Description	Cable(s) Shielded/Unshielded	Length(m)
From	To			
AC/DC Power	Main	-	-	-

EUT OPERATION

During emissions testing, the EUT was configured to transmit a modulated 100% duty cycle signal at the selected power and frequency.

TEST SITE**GENERAL INFORMATION**

Final test measurements were taken at the test sites listed below. Pursuant to section 2.948 of the FCC's Rules and section 3.3 of RSP-100, construction, calibration, and equipment data has been filed with the Commission and with industry Canada.

Site	Registration Numbers		Location
	FCC	Canada	
Chamber 3	769238	2845B-3	41039 Boyce Road Fremont, CA 94538-2435
Chamber 5	211948	2845B-5	

ANSI C63.4:2003 recommends that ambient noise at the test site be at least 6 dB below the allowable limits. Ambient levels are below this requirement. The test site(s) contain separate areas for radiated and conducted emissions testing. Considerable engineering effort has been expended to ensure that the facilities conform to all pertinent requirements of ANSI C63.4:2003.

CONDUCTED EMISSIONS CONSIDERATIONS

Conducted emissions testing is performed in conformance with ANSI C63.4:2003. Measurements are made with the EUT connected to the public power network through a nominal, standardized RF impedance, which is provided by a line impedance stabilization network, known as a LISN. A LISN is inserted in series with each current-carrying conductor in the EUT power cord.

RADIATED EMISSIONS CONSIDERATIONS

The FCC has determined that radiation measurements made in a shielded enclosure are not suitable for determining levels of radiated emissions. Radiated measurements are performed in an open field environment or in a semi-anechoic chamber. The test sites are maintained free of conductive objects within the CISPR defined elliptical area incorporated in ANSI C63.4:2003 guidelines and meet the Normalized Site Attenuation (NSA) requirements of ANSI C63.4:2003.

MEASUREMENT INSTRUMENTATION

RECEIVER SYSTEM

An EMI receiver as specified in CISPR 16-1-1 is used for emissions measurements. The receivers used can measure over the frequency range of 9 kHz up to 2000 MHz. These receivers allow both ease of measurement and high accuracy to be achieved. The receivers have Peak, Average, and CISPR (Quasi-peak) detectors built into their design so no external adapters are necessary. The receiver automatically sets the required bandwidth for the CISPR detector used during measurements. If the repetition frequency of the signal being measured is below 20Hz, peak measurements are made in lieu of Quasi-Peak measurements.

For measurements above the frequency range of the receivers, a spectrum analyzer is utilized because it provides visibility of the entire spectrum along with the precision and versatility required to support engineering analysis. Average measurements above 1000MHz are performed on the spectrum analyzer using the linear-average method with a resolution bandwidth of 1 MHz and a video bandwidth of 10 Hz, unless the signal is pulsed in which case the average (or video) bandwidth of the measuring instrument is reduced to onset of pulse desensitization and then increased.

INSTRUMENT CONTROL COMPUTER

The receivers utilize either a Rohde & Schwarz EZM Spectrum Monitor/Controller or contain an internal Spectrum Monitor/Controller to view and convert the receiver measurements to the field strength at an antenna or voltage developed at the LISN measurement port, which is then compared directly with the appropriate specification limit. This provides faster, more accurate readings by performing the conversions described under Sample Calculations within the Test Procedures section of this report. Results are printed in a graphic and/or tabular format, as appropriate. A personal computer is used to record all measurements made with the receivers.

The Spectrum Monitor provides a visual display of the signal being measured. In addition, the controller or a personal computer run automated data collection programs which control the receivers. This provides added accuracy since all site correction factors, such as cable loss and antenna factors are added automatically.

LINE IMPEDANCE STABILIZATION NETWORK (LISN)

Line conducted measurements utilize a fifty microhenry Line Impedance Stabilization Network as the monitoring point. The LISN used also contains a 250 uH CISPR adapter. This network provides for calibrated radio frequency noise measurements by the design of the internal low pass and high pass filters on the EUT and measurement ports, respectively.

FILTERS/ATTENUATORS

External filters and precision attenuators are often connected between the receiving antenna or LISN and the receiver. This eliminates saturation effects and non-linear operation due to high amplitude transient events.

ANTENNAS

A loop antenna is used below 30 MHz. For the measurement range 30 MHz to 1000 MHz either a combination of a biconical antenna and a log periodic or a bi-log antenna is used. Above 1000 MHz, horn antennas are used. The antenna calibration factors to convert the received voltage to an electric field strength are included with appropriate cable loss and amplifier gain factors to determine an overall site factor, which is then programmed into the test receivers or incorporated into the test software.

ANTENNA MAST AND EQUIPMENT TURNTABLE

The antennas used to measure the radiated electric field strength are mounted on a non-conductive antenna mast equipped with a motor-drive to vary the antenna height. Measurements below 30 MHz are made with the loop antenna at a fixed height of 1m above the ground plane.

ANSI C63.4:2003 specifies that the test height above ground for table mounted devices shall be 80 centimeters. Floor mounted equipment shall be placed on the ground plane if the device is normally used on a conductive floor or separated from the ground plane by insulating material from 3 to 12 mm if the device is normally used on a non-conductive floor. During radiated measurements, the EUT is positioned on a motorized turntable in conformance with this requirement.

INSTRUMENT CALIBRATION

All test equipment is regularly checked to ensure that performance is maintained in accordance with the manufacturer's specifications. All antennas are calibrated at regular intervals with respect to tuned half-wave dipoles. An exhibit of this report contains the list of test equipment used and calibration information.

TEST PROCEDURES

EUT AND CABLE PLACEMENT

The regulations require that interconnecting cables be connected to the available ports of the unit and that the placement of the unit and the attached cables simulate the worst case orientation that can be expected from a typical installation, so far as practicable. To this end, the position of the unit and associated cabling is varied within the guidelines of ANSI C63.4:2003, and the worst-case orientation is used for final measurements.

CONDUCTED EMISSIONS

Conducted emissions are measured at the plug end of the power cord supplied with the EUT. Excess power cord length is wrapped in a bundle between 30 and 40 centimeters in length near the center of the cord. Preliminary measurements are made to determine the highest amplitude emission relative to the specification limit for all the modes of operation. Placement of system components and varying of cable positions are performed in each mode. A final peak mode scan is then performed in the position and mode for which the highest emission was noted on all current carrying conductors of the power cord.

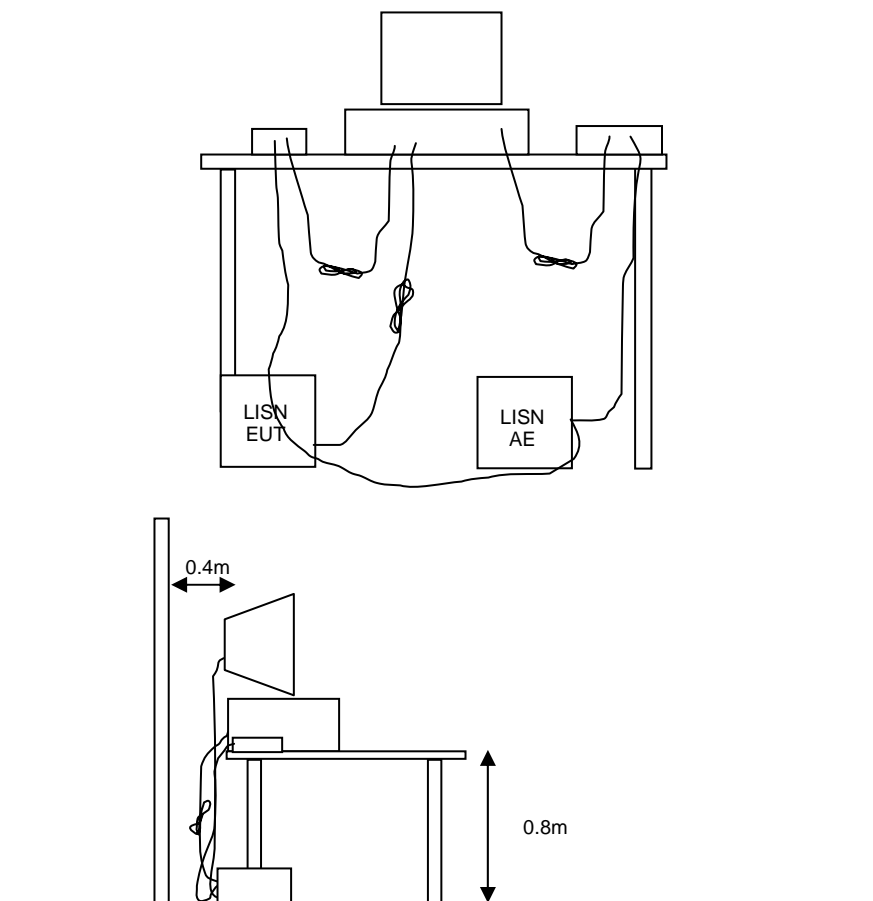


Figure 1 Typical Conducted Emissions Test Configuration


RADIATED EMISSIONS

A preliminary scan of the radiated emissions is performed in which all significant EUT frequencies are identified with the system in a nominal configuration. At least two scans are performed, one scan for each antenna polarization (horizontal and vertical; loop parallel and perpendicular to the EUT). During the preliminary scans, the EUT is rotated through 360°, the antenna height is varied (for measurements above 30 MHz) and cable positions are varied to determine the highest emission relative to the limit. Preliminary scans may be performed in a fully anechoic chamber for the purposes of identifying the frequencies of the highest emissions from the EUT.


A speaker is provided in the receiver to aid in discriminating between EUT and ambient emissions. Other methods used during the preliminary scan for EUT emissions involve scanning with near field magnetic loops, monitoring I/O cables with RF current clamps, and cycling power to the EUT.

Final maximization is a phase in which the highest amplitude emissions identified in the spectral search are viewed while the EUT azimuth angle is varied from 0 to 360 degrees relative to the receiving antenna. The azimuth, which results in the highest emission is then maintained while varying the antenna height from one to four meters (for measurements above 30 MHz, measurements below 30 MHz are made with the loop antenna at a fixed height of 1m). The result is the identification of the highest amplitude for each of the highest peaks. Each recorded level is corrected in the receiver using appropriate factors for cables, connectors, antennas, and preamplifier gain.

When testing above 18 GHz, the receive antenna is located at 1 meter from the EUT and the antenna height is restricted to a maximum of 2.5 meters.

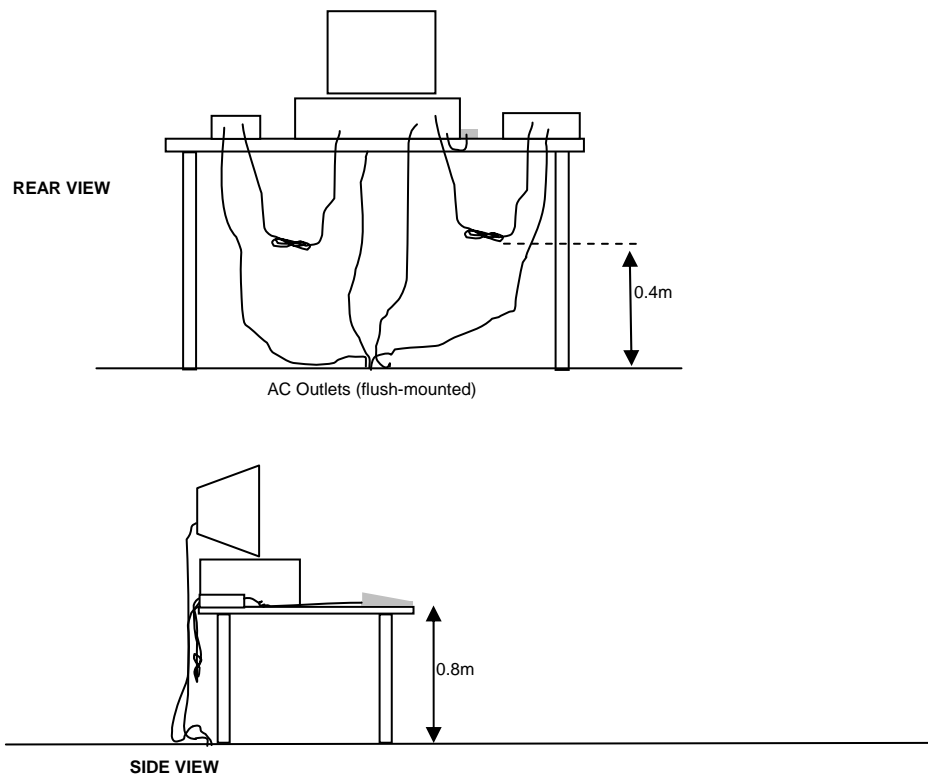


Typical Test Configuration for Radiated Field Strength Measurements

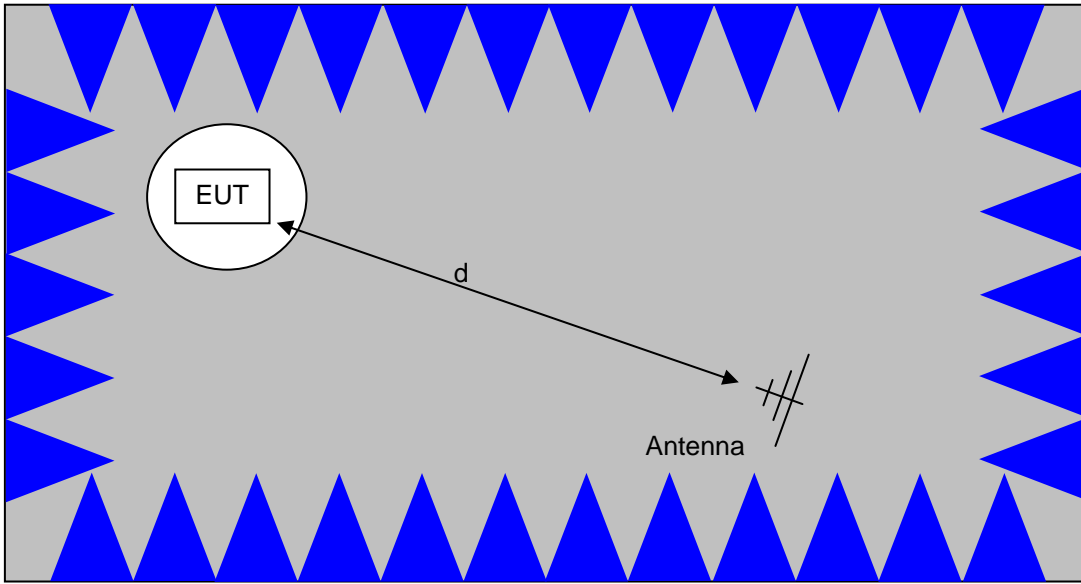

The anechoic materials on the walls and ceiling ensure compliance with the normalized site attenuation requirements of CISPR 16 / CISPR 22 / ANSI C63.4 for an alternate test site at the measurement distances used.


Floor-standing equipment is placed on the floor with insulating supports between the unit and the ground plane.

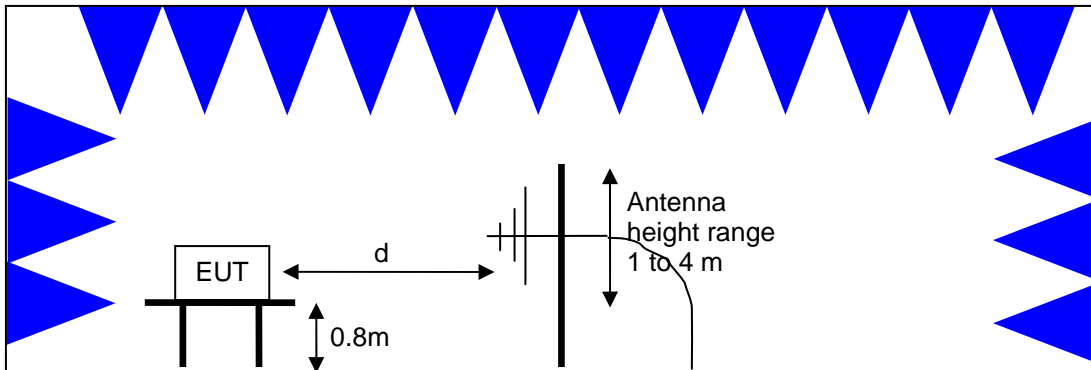

Test Configuration for Radiated Field Strength Measurements
Semi-Anechoic Chamber, Plan and Side Views

CONDUCTED EMISSIONS FROM ANTENNA PORT

Direct measurements of power, bandwidth and power spectral density are performed, where possible, with the antenna port of the EUT connected to either the power meter or spectrum analyzer via a suitable attenuator and/or filter. These are used to ensure that the front end of the measurement instrument is not overloaded by the fundamental transmission.

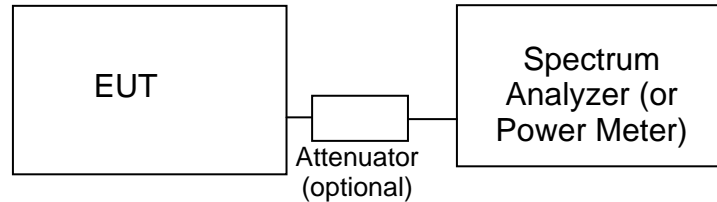**Test Configuration for Antenna Port Measurements**

Measurement bandwidths (video and resolution) are set in accordance with the relevant standards and Elliott's test procedures for the type of radio being tested. When power measurements are made using a resolution bandwidth less than the signal bandwidth the power is calculated by summing the power across the signal bandwidth using either the analyzer channel power function or by capturing the trace data and calculating the power using software. In both cases the summed power is corrected to account for the equivalent noise bandwidth (ENBW) of the resolution bandwidth used.

If power averaging is used (typically for certain digital modulation techniques), the EUT is configured to transmit continuously. Power averaging is performed using either the built-in function of the analyzer or, if the analyzer does not feature power averaging, using external software. In both cases the average power is calculated over a number of sweeps (typically 100). When the EUT cannot be configured to continuously transmit then either the analyzer is configured to perform a gated sweep to ensure that the power is averaged over periods that the device is transmitting or power averaging is disabled and a max-hold feature is used.

If a power meter is used to make output power measurements the sensor head type (peak or average) is stated in the test data table.

BANDWIDTH MEASUREMENTS

The 6dB, 20dB and/or 26dB signal bandwidth is measured in using the bandwidths recommended by ANSI C63.4. When required, the 99% bandwidth is measured using the methods detailed in RSS GEN.

SPECIFICATION LIMITS AND SAMPLE CALCULATIONS

The limits for conducted emissions are given in units of microvolts, and the limits for radiated emissions are given in units of microvolts per meter at a specified test distance. Data is measured in the logarithmic form of decibels relative to one microvolt, or dB microvolts (dBuV). For radiated emissions, the measured data is converted to the field strength at the antenna in dB microvolts per meter (dBuV/m). The results are then converted to the linear forms of uV and uV/m for comparison to published specifications.

For reference, converting the specification limits from linear to decibel form is accomplished by taking the base ten logarithm, then multiplying by 20. These limits in both linear and logarithmic form are as follows:

CONDUCTED EMISSIONS SPECIFICATION LIMITS: FCC 15.207; FCC 15.107(a), RSS GEN

The table below shows the limits for the emissions on the AC power line from an intentional radiator and a receiver.

Frequency (MHz)	Average Limit (dBuV)	Quasi Peak Limit (dBuV)
0.150 to 0.500	Linear decrease on logarithmic frequency axis between 56.0 and 46.0	Linear decrease on logarithmic frequency axis between 66.0 and 56.0
0.500 to 5.000	46.0	56.0
5.000 to 30.000	50.0	60.0

GENERAL TRANSMITTER RADIATED EMISSIONS SPECIFICATION LIMITS

The table below shows the limits for the spurious emissions from transmitters that fall in restricted bands¹ (with the exception of transmitters operating under FCC Part 15 Subpart D and RSS 210 Annex 9), the limits for all emissions from a low power device operating under the general rules of RSS 310 (tables 3 and 4), RSS 210 (table 2) and FCC Part 15 Subpart C section 15.209.

Frequency Range (MHz)	Limit (uV/m)	Limit (dBuV/m @ 3m)
0.009-0.490	2400/F _{KHz} @ 300m	67.6-20*log ₁₀ (F _{KHz}) @ 300m
0.490-1.705	24000/F _{KHz} @ 30m	87.6-20*log ₁₀ (F _{KHz}) @ 30m
1.705 to 30	30 @ 30m	29.5 @ 30m
30 to 88	100 @ 3m	40 @ 3m
88 to 216	150 @ 3m	43.5 @ 3m
216 to 960	200 @ 3m	46.0 @ 3m
Above 960	500 @ 3m	54.0 @ 3m

RECEIVER RADIATED SPURIOUS EMISSIONS SPECIFICATION LIMITS

The table below shows the limits for the spurious emissions from receivers as detailed in FCC Part 15.109, RSS 210 Table 2, RSS GEN Table 1 and RSS 310 Table 3. Note that receivers operating outside of the frequency range 30 MHz – 960 MHz are exempt from the requirements of 15.109.

Frequency Range (MHz)	Limit (uV/m @ 3m)	Limit (dBuV/m @ 3m)
30 to 88	100	40
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

¹ The restricted bands are detailed in FCC 15.203, RSS 210 Table 1 and RSS 310 Table 2

FCC 15.407 (a) OUTPUT POWER LIMITS

The table below shows the limits for output power and output power density. Where the signal bandwidth is less than 20 MHz the maximum output power is reduced to the power spectral density limit plus 10 times the log of the bandwidth (in MHz).

Operating Frequency (MHz)	Output Power	Power Spectral Density
5150 – 5250	50mW (17 dBm)	4 dBm/MHz
5250 – 5350	250 mW (24 dBm)	11 dBm/MHz
5725 – 5825	1 Watts (30 dBm)	17 dBm/MHz

For system using antennas with gains exceeding 6dBi, the output power and power spectral density limits are reduced by 1dB for every dB the antenna gain exceeds 6dBi. Fixed point-to-point applications using the 5725 – 5825 MHz band may use antennas with gains of up to 23dBi without this limitation. If the gain exceeds 23dBi then the output power limit of 1 Watt is reduced by 1dB for every dB the gain exceeds 23dBi.

The peak excursion envelope is limited to 13dB.

OUTPUT POWER LIMITS –LELAN DEVICES

The table below shows the limits for output power and output power density defined by RSS 210. Where the signal bandwidth is less than 20 MHz the maximum output power is reduced to the power spectral density limit plus 10 times the log of the bandwidth (in MHz).

Operating Frequency (MHz)	Output Power	Power Spectral Density
5150 – 5250	200mW (23 dBm) eirp	10 dBm/MHz eirp
5250 – 5350	250 mW (24 dBm) ² 1W (30dBm) eirp	11 dBm/MHz
5470 – 5725	250 mW (24 dBm) ³ 1W (30dBm) eirp	11 dBm/MHz
5725 – 5825	1 Watts (30 dBm) 4W eirp	17 dBm/MHz

In addition, the power spectral density limit shall be reduced by 1dB for every dB the highest power spectral density exceeds the “average” power spectral density) by more than 3dB. The “average” power spectral density is determined by dividing the output power by $10\log(\text{EBW})$ where EBW is the 99% power bandwidth.

Fixed point-to-point applications using the 5725 – 5825 MHz band may use antennas with gains of up to 23dBi without this limitation. If the gain exceeds 23dBi then the output power limit of 1 Watt is reduced by 1dB for every dB the gain exceeds 23dBi.

² If EIRP exceeds 500mW the device must employ TPC

³ If EIRP exceeds 500mW the device must employ TPC

SPURIOUS EMISSIONS LIMITS –UNII and LELAN DEVICES

The spurious emissions limits for signals below 1GHz are the FCC/RSS-GEN general limits. For emissions above 1GHz, signals in restricted bands are subject to the FCC/RSS GEN general limits. All other signals have a limit of –27dBm/MHz, which is a field strength of 68.3dBuV/m/MHz at a distance of 3m. This is an average limit so the peak value of the emission may not exceed –7dBm/MHz (88.3dBuV/m/MHz at a distance of 3m). For devices operating in the 5725-5850Mhz bands under the LELAN/UNII rules, the limit within 10Mhz of the allocated band is increased to –17dBm/MHz.

SAMPLE CALCULATIONS - CONDUCTED EMISSIONS

Receiver readings are compared directly to the conducted emissions specification limit (decibel form) as follows:

$$R_r - S = M$$

where:

R_r = Receiver Reading in dBuV

S = Specification Limit in dBuV

M = Margin to Specification in +/- dB

SAMPLE CALCULATIONS - RADIATED EMISSIONS

Receiver readings are compared directly to the specification limit (decibel form). The receiver internally corrects for cable loss, preamplifier gain, and antenna factor. The calculations are in the reverse direction of the actual signal flow, thus cable loss is added and the amplifier gain is subtracted. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

A distance factor, when used for electric field measurements above 30MHz, is calculated by using the following formula:

$$F_d = 20 * \text{LOG}_{10} (D_m/D_s)$$

where:

F_d = Distance Factor in dB

D_m = Measurement Distance in meters

D_s = Specification Distance in meters

For electric field measurements below 30MHz the extrapolation factor is either determined by making measurements at multiple distances or a theoretical value is calculated using the formula:

$$F_d = 40 * \text{LOG}_{10} (D_m/D_s)$$

Measurement Distance is the distance at which the measurements were taken and Specification Distance is the distance at which the specification limits are based. The antenna factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

The margin of a given emission peak relative to the limit is calculated as follows:

$$R_c = R_r + F_d$$

and

$$M = R_c - L_s$$

where:

R_r = Receiver Reading in dBuV/m

F_d = Distance Factor in dB

R_c = Corrected Reading in dBuV/m

L_s = Specification Limit in dBuV/m

M = Margin in dB Relative to Spec

SAMPLE CALCULATIONS - FIELD STRENGTH TO EIRP CONVERSION

Where the radiated electric field strength is expressed in terms of the equivalent isotropic radiated power (eirp), or where a field strength measurement of output power is made in lieu of a direct measurement, the following formula is used to convert between eirp and field strength at a distance of d (meters) from the equipment under test:

$$E = \frac{1000000 \sqrt{30 P}}{d} \quad \text{microvolts per meter}$$

where P is the eirp (Watts)

For a measurement at 3m the conversion from a logarithmic value for field strength (dBuV/m) to an eirp power (dBm) is -95.3dB.

Appendix A Test Equipment Calibration Data**Radiated Emissions, 1,000 - 18,000 MHz, 27-Sep-11**

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
EMCO	Antenna, Horn, 1-18 GHz	3115	786	12/11/2011
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1630	4/13/2012
Micro-Tronics	Band Reject Filter, 5470-5725 MHz	BRC50704-02	1681	9/8/2012
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	2199	2/23/2012
Hewlett Packard	SpecAn 9 kHz - 40 GHz, (SA40) Purple	8564E (84125C)	2415	7/28/2012

Radiated Emissions, 1,000 - 18,000 MHz, 29-Sep-11

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	785	5/18/2012
EMCO	Antenna, Horn, 1-18GHz	3115	868	6/8/2012
Hewlett Packard	SpecAn 9 kHz - 40 GHz, FT (SA40) Blue	8564E (84125C)	1393	8/9/2012
Micro-Tronics	Band Reject Filter, 5470-5725 MHz	BRC50704-02	1681	9/8/2012

Radiated Spurious Emissions, 30 - 18,000 MHz, 29-Sep-11

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	785	5/18/2012
EMCO	Antenna, Horn, 1-18GHz	3115	868	6/8/2012
Hewlett Packard	SpecAn 9 kHz - 40 GHz, FT (SA40) Blue	8564E (84125C)	1393	8/9/2012
Sunol Sciences	Biconilog, 30-3000 MHz	JB3	1657	5/28/2012
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1756	4/6/2012
Com-Power Corp.	Preamplifier, 30-1000 MHz	PA-103A	2359	2/15/2012

Conducted Emissions - AC Power Ports, 30-Sep-11

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
EMCO	LISN, 10 kHz-100 MHz, 25A	3825/2	1292	3/1/2012
Rohde & Schwarz	Pulse Limiter	ESH3 Z2	1594	5/17/2012
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1756	4/6/2012

Radio Antenna Port (Power and Spurious Emissions), 04-Oct-11

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Agilent	PSA, Spectrum Analyzer, (installed options, 111, 115, 123, 1DS, B7J, HYX,	E4446A	2139	1/26/2012
Thermotron	Temp Chamber (w/ F4 Watlow Controller)	S1.2	2170	7/8/2012

Appendix B Test Data

T84762 Pages 25 - 49



EMC Test Data

Client:	Nextivity Inc.	Job Number:	J84755
Model:	CELFI-RS240CU	T-Log Number:	T84762
		Account Manager:	Sheareen Washington
Contact:	Rama Akella	Project Manager:	David Bare
Emissions Standard(s):	FCC Part 15, 27	Class:	B
Immunity Standard(s):	-	Environment:	Radio

EMC Test Data

For The

Nextivity Inc.

Model

CELFI-RS240CU

Date of Last Test: 10/10/2011

Client: Nextivity Inc.	Job Number: J84755
Model: CELFI-RS240CU	T-Log Number: T84762
	Account Manager: Sheareen Washington
Contact: Rama Akella	
Standard: FCC Part 15, 27	Class: B

Conducted Emissions

(Elliott Laboratories Fremont Facility, Semi-Anechoic Chamber)

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 9/30/2011	Config. Used: 1
Test Engineer: John Caizzi	Config Change: none
Test Location: Fremont Chamber #5	EUT Voltage: 120V/60Hz

General Test Configuration

For tabletop equipment, the EUT was located on a wooden table inside the semi-anechoic chamber, 40 cm from a vertical coupling plane and 80cm from the LISN.

Ambient Conditions:	Temperature:	25 °C
	Rel. Humidity:	42 %

Summary of Results

Run #	Test Performed	Limit	Result	Margin
2	CE, AC Power, 120V/60Hz	Class B	Pass	51.1dBµV @ 0.168MHz (-14.0dB)

Modifications Made During Testing



No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Client: Nextivity Inc.	Job Number: J84755
Model: CELFI-RS240CU	T-Log Number: T84762
Contact: Rama Akella	Account Manager: Sheareen Washington
Standard: FCC Part 15, 27	Class: B

Run #2: AC Power Port Conducted Emissions, 0.15 - 30MHz, 120V/60Hz

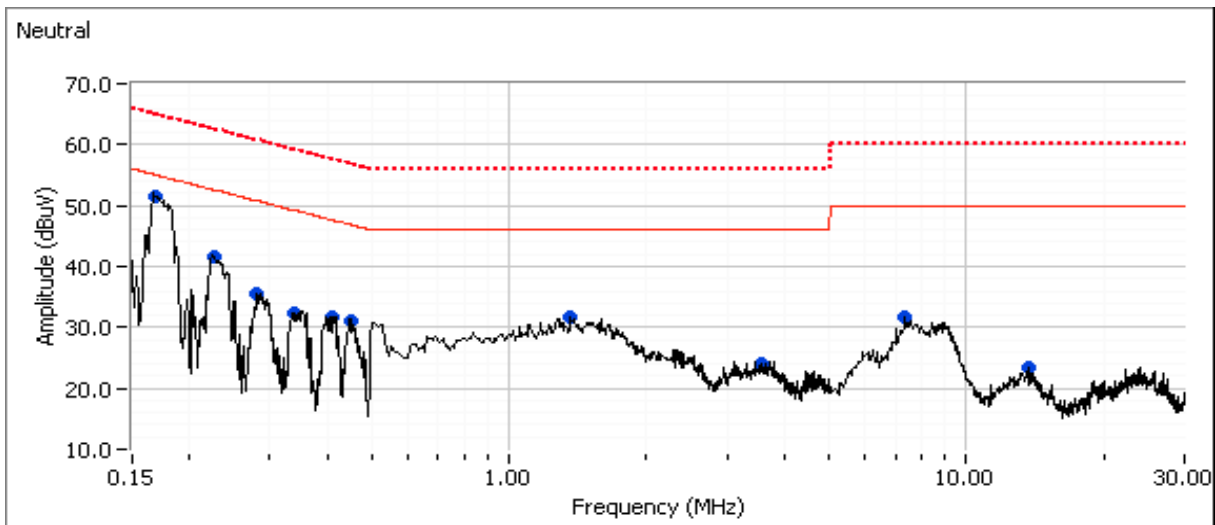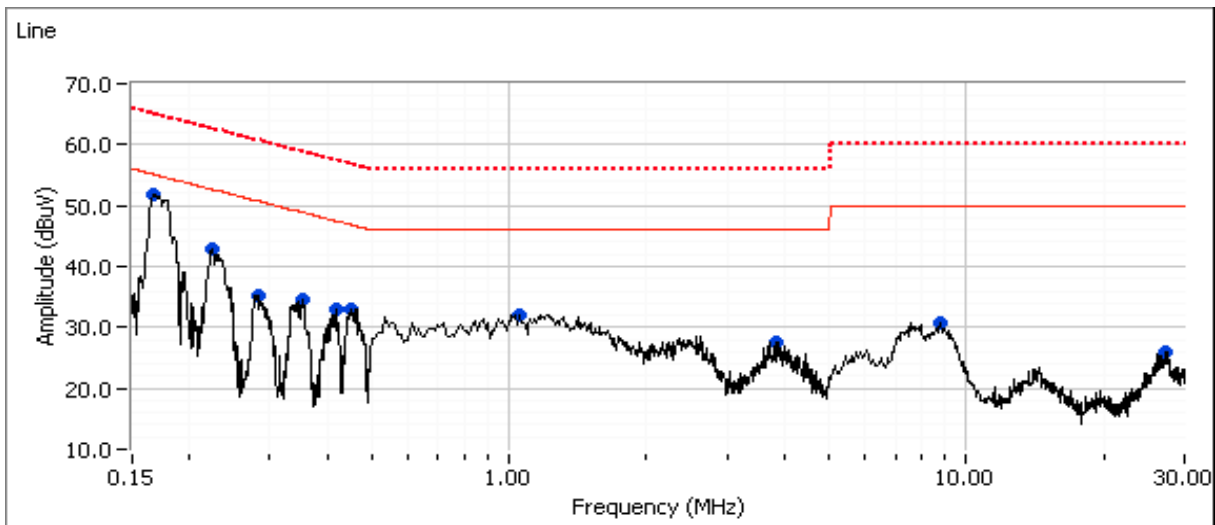

Client:	Nextivity Inc.	Job Number:	J84755
Model:	CELFI-RS240CU	T-Log Number:	T84762
Contact:	Rama Akella	Account Manager:	Sheareen Washington
Standard:	FCC Part 15, 27	Class:	B

Preliminary peak readings captured during pre-scan (peak readings vs. average limit)

Frequency MHz	Level dB μ V	AC Line	Class B		Detector QP/Ave	Comments
			Limit	Margin		
0.168	51.8	Line	55.1	-3.3	Peak	
0.225	42.9	Line	52.7	-9.8	Peak	
0.454	33.0	Line	46.8	-13.8	Peak	
1.054	32.0	Line	46.0	-14.0	Peak	
0.351	34.6	Line	48.8	-14.2	Peak	
0.417	32.9	Line	47.5	-14.6	Peak	
0.282	35.2	Line	50.8	-15.6	Peak	
3.846	27.7	Line	46.0	-18.3	Peak	
8.758	30.9	Line	50.0	-19.1	Peak	
27.395	26.0	Line	50.0	-24.0	Peak	
0.169	51.5	Neutral	55.0	-3.5	Peak	
0.224	41.7	Neutral	52.6	-10.9	Peak	
1.338	31.8	Neutral	46.0	-14.2	Peak	
0.279	35.4	Neutral	50.8	-15.4	Peak	
0.450	31.0	Neutral	46.9	-15.9	Peak	
0.412	31.6	Neutral	47.6	-16.0	Peak	
0.338	32.5	Neutral	49.3	-16.8	Peak	
7.355	31.7	Neutral	50.0	-18.3	Peak	
3.566	24.2	Neutral	46.0	-21.8	Peak	
13.667	23.3	Neutral	50.0	-26.7	Peak	



Client:	Nextivity Inc.	Job Number:	J84755
Model:	CELFI-RS240CU	T-Log Number:	T84762
Contact:	Rama Akella	Account Manager:	Sheareen Washington
Standard:	FCC Part 15, 27	Class:	B

Final quasi-peak and average readings

Frequency MHz	Level dB μ V	AC Line	Class B		Detector QP/Ave	Comments
			Limit	Margin		
0.168	37.1	Line	55.1	-18.0	AVG	
0.168	51.1	Line	65.1	-14.0	QP	
0.225	28.0	Line	52.6	-24.6	AVG	
0.225	41.0	Line	62.6	-21.6	QP	
0.454	22.4	Line	46.8	-24.4	AVG	
0.454	30.1	Line	56.8	-26.7	QP	
1.054	19.5	Line	46.0	-26.5	AVG	
1.054	29.2	Line	56.0	-26.8	QP	
0.351	21.7	Line	48.9	-27.2	AVG	
0.351	31.2	Line	58.9	-27.7	QP	
0.417	16.2	Line	47.5	-31.3	AVG	
0.417	29.4	Line	57.5	-28.1	QP	
0.169	37.4	Neutral	55.0	-17.6	AVG	
0.169	50.5	Neutral	65.0	-14.5	QP	
0.224	24.3	Neutral	52.7	-28.4	AVG	
0.224	40.3	Neutral	62.7	-22.4	QP	
1.338	18.9	Neutral	46.0	-27.1	AVG	
1.338	28.2	Neutral	56.0	-27.8	QP	
0.279	18.7	Neutral	50.8	-32.1	AVG	
0.279	33.5	Neutral	60.8	-27.3	QP	
0.450	19.4	Neutral	46.9	-27.5	AVG	
0.450	27.5	Neutral	56.9	-29.4	QP	
0.412	16.7	Neutral	47.6	-30.9	AVG	
0.412	27.9	Neutral	57.6	-29.7	QP	

Client:	Nextivity Inc.	Job Number:	J84755
Model:	CELFI-RS240CU	T-Log Number:	T84762
Contact:	Rama Akella	Account Manager:	Sheareen Washington
Standard:	FCC Part 15, 27	Class:	B

Test Configuration Photograph(s)

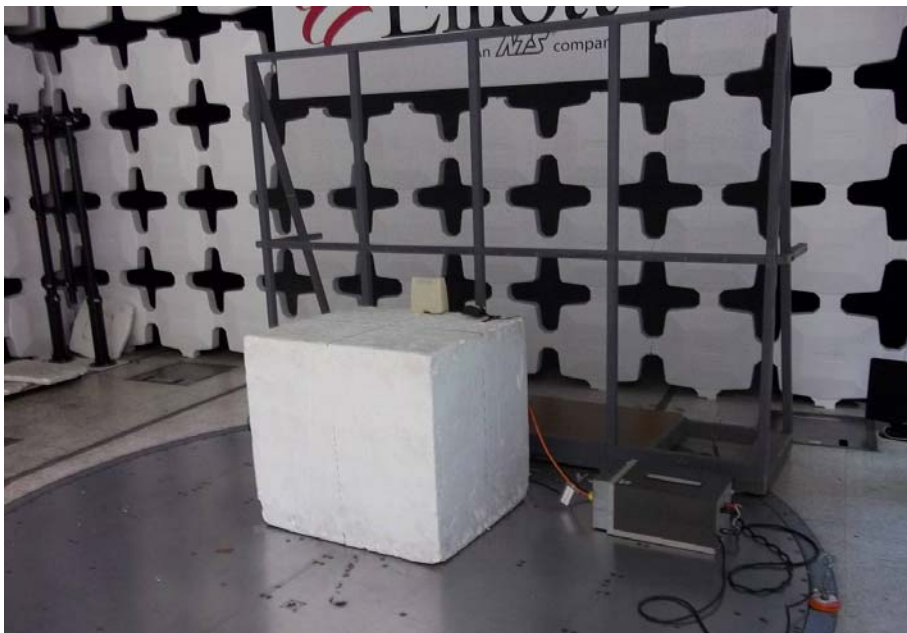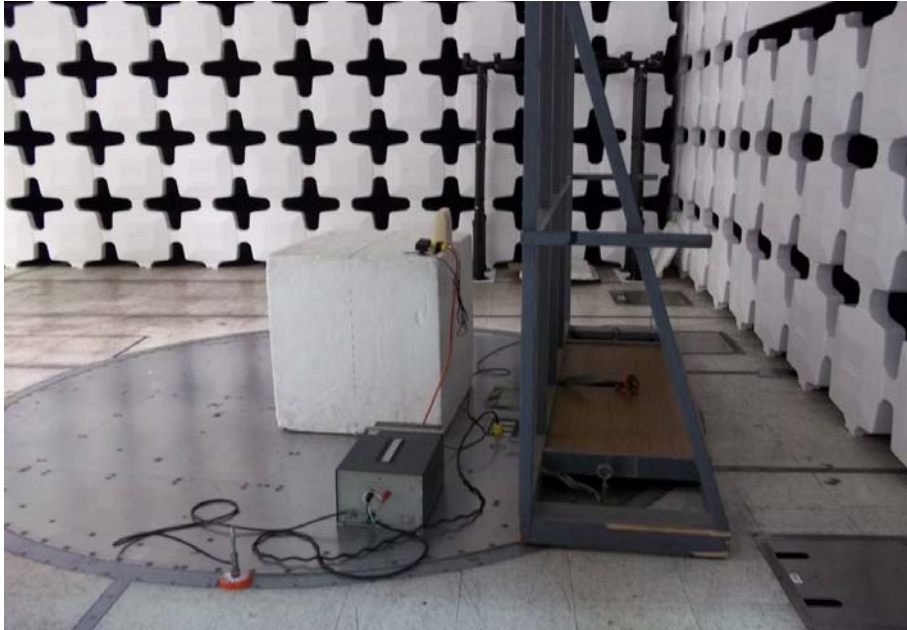

Client:	Nextivity Inc.	Job Number:	J84755
Model:	CELFI-RS240CU	T-Log Number:	T84762
Contact:	Rama Akella	Account Manager:	Sheareen Washington
Standard:	FCC Part 15, 27	Class:	B

Radiated Emissions

(Elliott Laboratories Fremont Facility, Semi-Anechoic Chamber)

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 9/29/2011	Config. Used: 1
Test Engineer: Mehran Birgani	Config Change: None
Test Location: Fremont Chamber #3	EUT Voltage: 120V/60Hz

General Test Configuration

The EUT and any local support equipment were located on the turntable for radiated emissions testing.

The test distance and extrapolation factor (if applicable) are detailed under each run description.

Note, preliminary testing indicates that the emissions were maximized by orientation of the EUT and elevation of the measurement antenna. Maximized testing indicated that the emissions were maximized by orientation of the EUT, elevation of the measurement antenna, and manipulation of the EUT's interface cables.

Ambient Conditions: Temperature: 18-23 °C
 Rel. Humidity: 30-40 %

Summary of Results

Run #	Test Performed	Limit	Result	Margin
1	Radiated Emissions 30 MHz - 18 GHz Maximized	FCC Class B	PASS	30.8dBµV/m @ 36.40MHz (-9.2dB)
2	Radiated Emissions 30 MHz - 18 GHz Maximized	FCC Class B	PASS	39.1dBµV/m @ 4263.3MHz (-14.9dB)

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.


Frequency Range	Test Distance	Limit Distance	Extrapolation Factor
1 - 10 GHz	3	3	0.0
10 - 18 GHz	1	3	-9.5

Client:	Nextivity Inc.	Job Number:	J84755
Model:	CELFI-RS240CU	T-Log Number:	T84762
Contact:	Rama Akella	Account Manager:	Sheareen Washington
Standard:	FCC Part 15, 27	Class:	B


Run #1: Maximized Readings, 30 - 18000 MHz (Receive at 5232 MHz)

Frequency MHz	Level dB μ V/m	Pol v/h	FCC Class B		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
36.401	32.4	V	40.0	-7.6	Peak	266	1.0	
36.401	30.8	V	40.0	-9.2	QP	265	1.0	
86.814	29.8	V	40.0	-10.2	Peak	97	1.0	
131.182	32.8	V	43.5	-10.7	Peak	236	1.0	
2448.330	41.8	H	54.0	-12.2	Peak	97	2.5	Peak reading with average limit
4263.330	38.9	H	54.0	-15.1	Peak	5	1.3	Peak reading with average limit
1898.330	36.1	V	54.0	-17.9	Peak	353	2.5	Peak reading with average limit

- Note 1: Above 1 GHz, the limit is based on an average measurement. In addition, the peak reading of any emission above 1 GHz can not exceed the average limit by more than 20 dB.
- Note 2: As there were no emissions observed above 14 GHz during the preliminary scan, or the size of the EUT did not exceed 1.6m above the ground plane, additional measures were not required to ensure that the emissions from the EUT were maintained within the beam-width of the antenna during antenna height maximization.

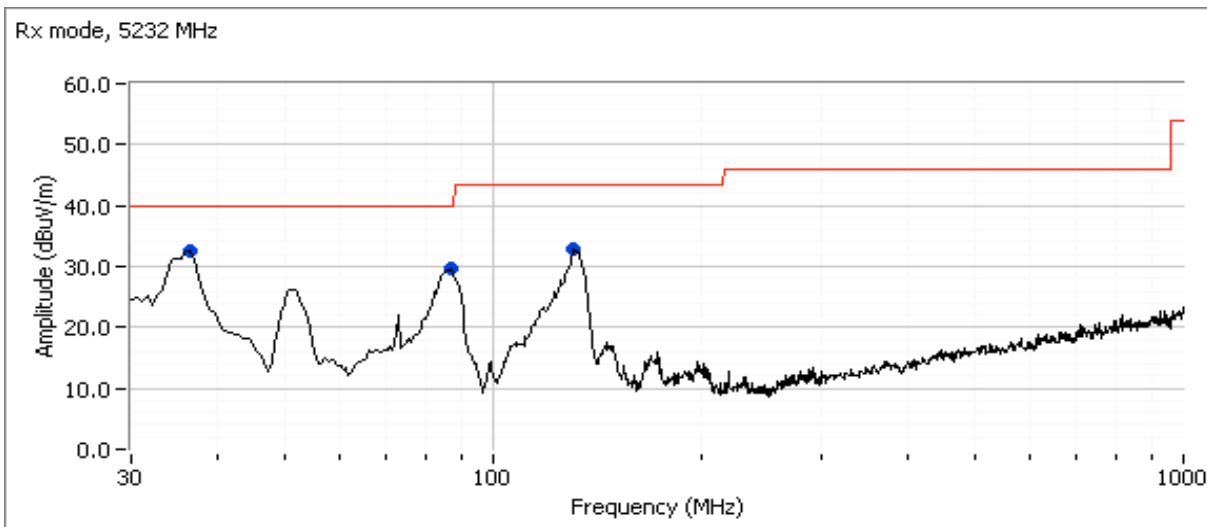

Client: Nextivity Inc.	Job Number: J84755
Model: CELFI-RS240CU	T-Log Number: T84762
Contact: Rama Akella	Account Manager: Sheareen Washington
Standard: FCC Part 15, 27	Class: B

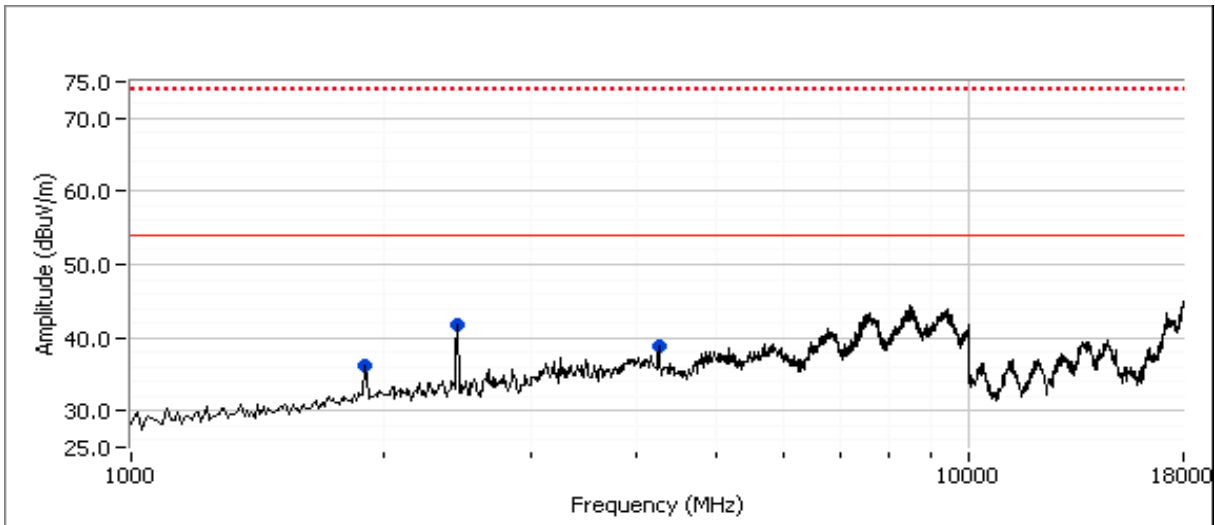


Client: Nextivity Inc.	Job Number: J84755
Model: CELFI-RS240CU	T-Log Number: T84762
Contact: Rama Akella	Account Manager: Sheareen Washington
Standard: FCC Part 15, 27	Class: B

Run #2: Maximized Readings, 1000 - 18000 MHz (Receive at 5285 MHz & 2132.5 MHz)


Frequency MHz	Level dB μ V/m	Pol v/h	FCC Class B		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
4263.330	39.1	H	54.0	-14.9	Peak	134	1.3	

- Note 1: Above 1 GHz, the limit is based on an average measurement. In addition, the peak reading of any emission above 1 GHz can not exceed the average limit by more than 20 dB.
- Note 2: As there were no emissions observed above 14 GHz during the preliminary scan, or the size of the EUT did not exceed 1.6m above the ground plane, additional measures were not required to ensure that the emissions from the EUT were maintained within the beam-width of the antenna during antenna height maximization.
- Note 3: Since the 30-1000 MHz scans in Run 1 above & Run 1b in Tx mode were almost identical & showed no radio related emissions, that scan was not repeated for this channel.

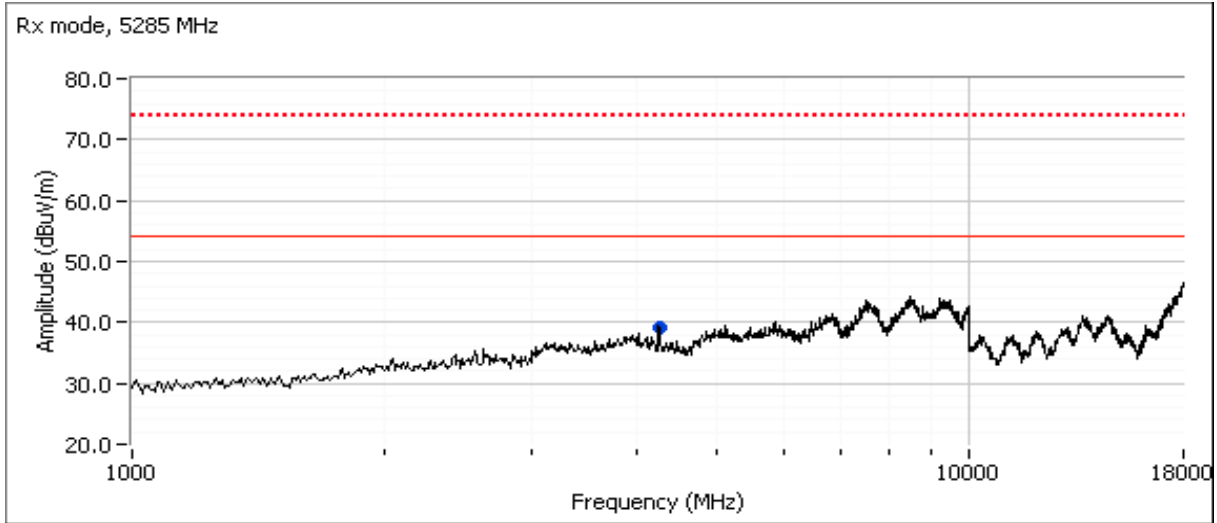

Client:	Nextivity Inc.	Job Number:	J84755
Model:	CELFI-RS240CU	T-Log Number:	T84762
Contact:	Rama Akella	Account Manager:	Sheareen Washington
Standard:	FCC Part 15, 27	Class:	B

Test Configuration Photograph(s)

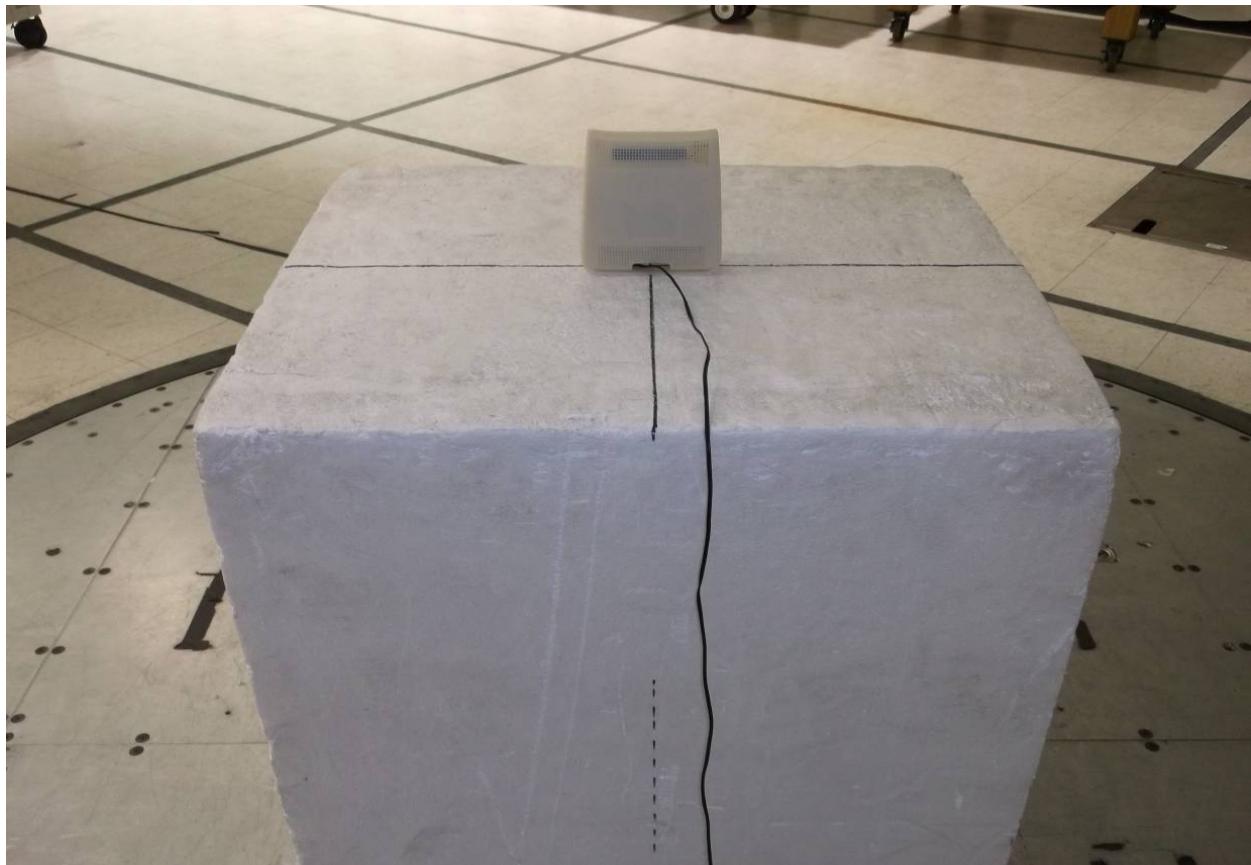

Client:	Nextivity Inc.	Job Number:	J84755
Model:	CELF1-RS240CU	T-Log Number:	T84762
Contact:	Rama Akella	Account Manager:	Sheareen Washington
Standard:	FCC Part 15, 27	Class:	N/A

RSS 210 and FCC 15.407 (UNII) Radiated Spurious Emissions

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

Ambient Conditions: Temperature: 18-23 °C
 Rel. Humidity: 30-40 %

Summary of Results

Run #	Mode	Channel	Power Setting	Measured Power	Test Performed	Limit	Result / Margin
3	802.11a Chain A	5470-5725 Low	8		Restricted Band Edge at 5460 MHz	15.209	51.2dB μ V/m @ 5459.6MHz (-2.8dB)
	802.11a Chain A	5470-5725 Low	8		Band Edge 5460 - 5470 MHz	15E	63.8dB μ V/m @ 5467.0MHz (-4.5dB)
	802.11a Chain A	5470-5725 Low	8		Radiated Emissions 1 - 40 GHz	FCC 15.209 / 15 E	45.8dB μ V/m @ 11048.9MHz (-8.2dB)
	802.11a Chain A	5470-5725 Center	8		Radiated Emissions 1 - 40 GHz	FCC 15.209 / 15 E	47.6dB μ V/m @ 11160.4MHz (-6.4dB)
	802.11a Chain A	5470-5725 High	8		Band Edge 5725MHz	15E	64.9dB μ V/m @ 5738.2MHz (-3.4dB)
	802.11a Chain A	5470-5725 High	8		Radiated Emissions 1 - 40 GHz	FCC 15.209 / 15 E	50.1dB μ V/m @ 11337.0MHz (-3.9dB)

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.


Client: Nextivity Inc.	Job Number: J84755
Model: CELFI-RS240CU	T-Log Number: T84762
Contact: Rama Akella	Account Manager: Sheareen Washington
Standard: FCC Part 15, 27	Class: N/A

Run #1, Radiated Spurious Emissions, 30 - 40,000 MHz. Operation in the 5470-5725 MHz Band
 Date of Test: 9/29/2011 Test Location: FT Chamber #3
 Test Engineer: M. Birgani

Note 1	Scans made between 18 - 40GHz with the measurement antenna moved around the card and its antennas 20-50cm from the device indicated there were no significant emissions in this frequency range
Note 2	For emissions in restricted bands, the limit of 15.209 was used which requires average and peak measurements.
Note 3	For emissions outside of the restricted bands the limit is -27dBm/MHz eirp (68.3dBuV/m) Peak.

Run #1a: Low Channel (5525 MHz)
 5350-5460 MHz Restricted Band Edge Signal Radiated Field Strength

Frequency	Level	Pol	FCC 15.209		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
5459.570	51.2	V	54.0	-2.8	AVG	270	1.1	RB 1 MHz;VB 10 Hz;Pk
5459.430	47.9	H	54.0	-6.1	AVG	117	1.1	RB 1 MHz;VB 10 Hz;Pk
5459.900	61.6	V	74.0	-12.4	PK	270	1.1	RB 1 MHz;VB 3 MHz;Pk
5444.530	58.6	H	74.0	-15.4	PK	117	1.1	RB 1 MHz;VB 3 MHz;Pk

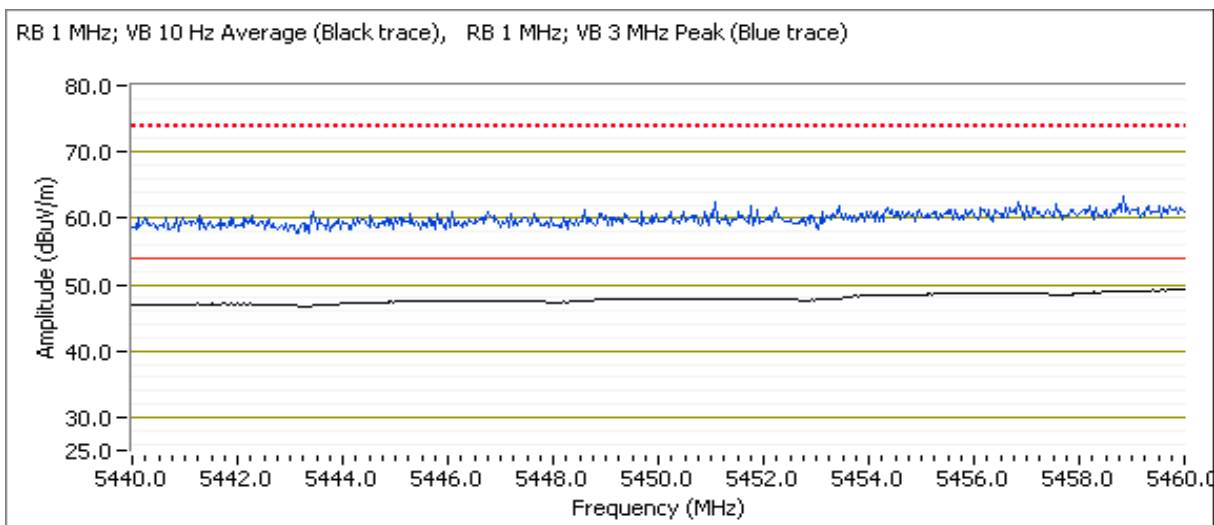


Client: Nextivity Inc.	Job Number: J84755
Model: CELFI-RS240CU	T-Log Number: T84762
Contact: Rama Akella	Account Manager: Sheareen Washington
Standard: FCC Part 15, 27	Class: N/A

5460 - 5470 MHz Band Edge Radiated Field Strength

Frequency MHz	Level dB μ V/m	Pol v/h	15 E		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
5467.030	63.8	V	68.3	-4.5	PK	30	1.0	RB 1 MHz;VB 3 MHz;Pk
5466.330	59.9	H	68.3	-8.4	PK	117	1.1	RB 1 MHz;VB 3 MHz;Pk


For emissions in the 5460-5470MHz frequency range the limit is -27dBm/MHz eirp (68.3dBuV/m) Peak.

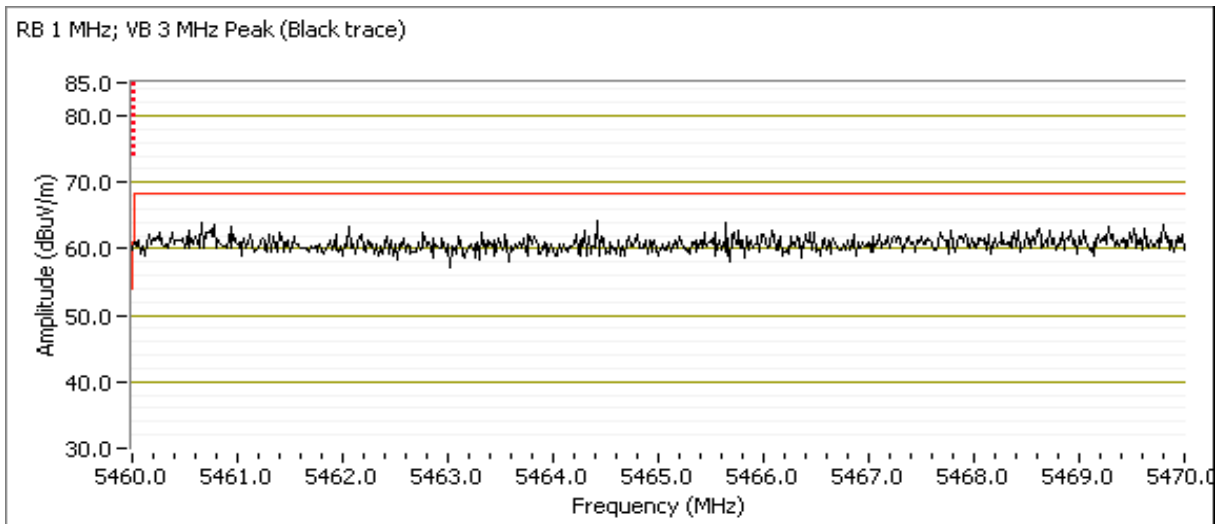

Client:	Nextivity Inc.	Job Number:	J84755
Model:	CELF1-RS240CU	T-Log Number:	T84762
Contact:	Rama Akella	Account Manager:	Sheareen Washington
Standard:	FCC Part 15, 27	Class:	N/A

Spurious Radiated Emissions:

Frequency MHz	Level dB μ V/m	Pol v/h	15.209 / 15E		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
11048.870	45.8	V	54.0	-8.2	AVG	273	1.3	RB 1 MHz;VB 10 Hz;Pk
11044.770	57.9	V	74.0	-16.1	PK	273	1.3	RB 1 MHz;VB 3 MHz;Pk
8530.000	45.6	H	68.3	-22.7	Peak	198	1.0	RB 1 MHz;VB 3 MHz;Pk
2448.330	40.4	H	68.3	-27.9	Peak	337	1.6	RB 1 MHz;VB 3 MHz;Pk

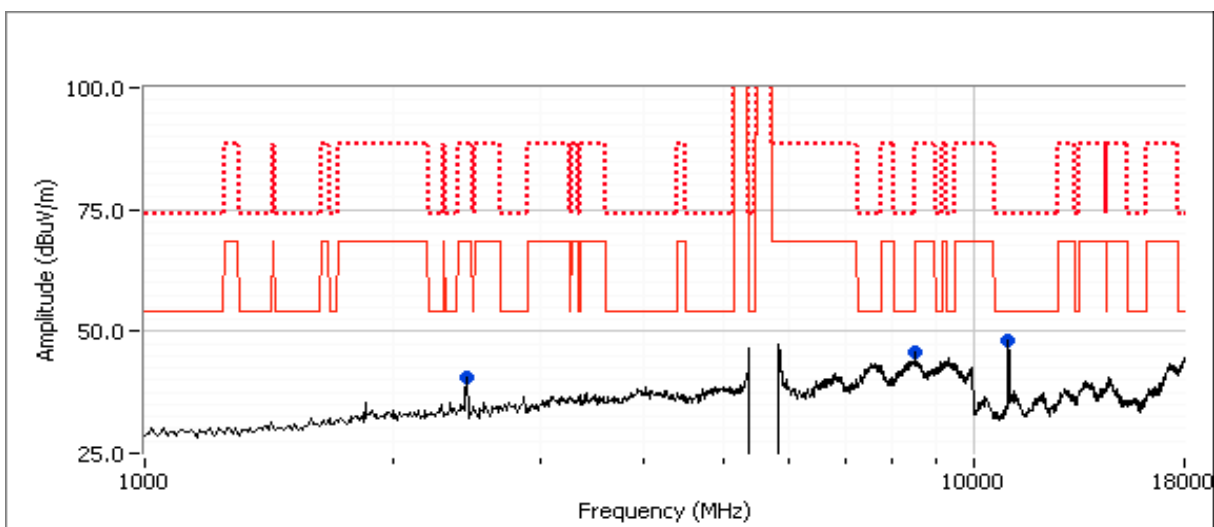


Client: Nextivity Inc.	Job Number: J84755
Model: CELFI-RS240CU	T-Log Number: T84762
Contact: Rama Akella	Account Manager: Sheareen Washington
Standard: FCC Part 15, 27	Class: N/A



Run #1b: Center Channel (5580 MHz)

Spurious Radiated Emissions:

Frequency MHz	Level dB μ V/m	Pol v/h	15.209 / 15E		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
36.382	32.8	V	40.0	-7.2	Peak	334	1.0	
36.382	29.1	V	40.0	-10.9	QP	290	1.0	
131.182	34.8	V	43.5	-8.7	Peak	276	1.0	
84.649	29.5	V	40.0	-10.5	Peak	105	1.0	
52.184	27.5	V	40.0	-12.5	Peak	327	1.0	
11160.370	47.6	V	54.0	-6.4	AVG	154	1.0	RB 1 MHz;VB 10 Hz;Pk
11160.400	59.3	V	74.0	-14.7	Peak	154	1.0	RB 1 MHz;VB 3 MHz;Pk
1898.330	45.3	V	68.3	-23.0	Peak	8	1.6	RB 1 MHz;VB 3 MHz;Pk
1751.670	42.5	V	68.3	-25.8	Peak	336	1.3	RB 1 MHz;VB 3 MHz;Pk

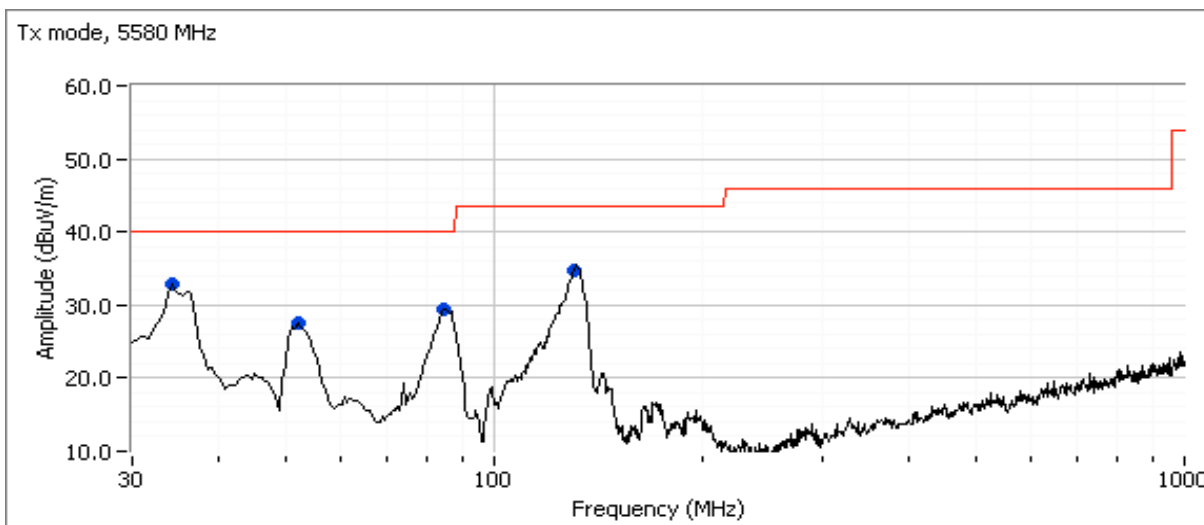

Client: Nextivity Inc.	Job Number: J84755
Model: CELFI-RS240CU	T-Log Number: T84762
Contact: Rama Akella	Account Manager: Sheareen Washington
Standard: FCC Part 15, 27	Class: N/A

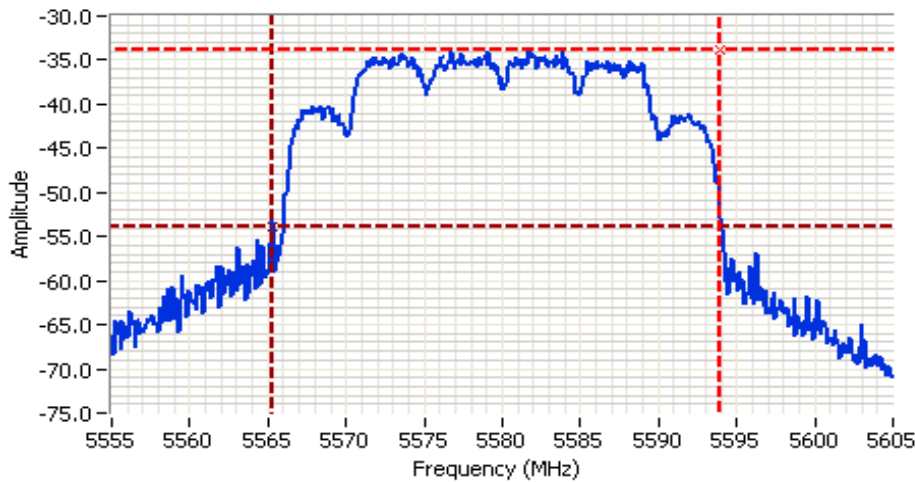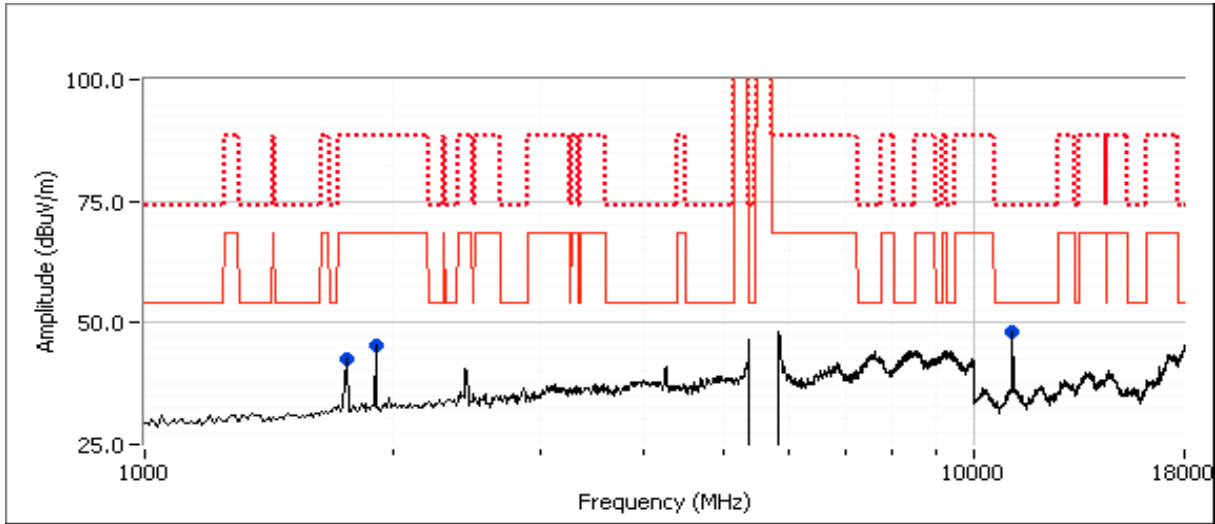
Analyzer Settings

Rohde&Schwarz, ESI
 CF: 5580.000 MHz
 SPAN: 50.000 MHz
 RB: 1.000 MHz
 VB: 3.000 MHz
 Detector: POS
 Attn: 0 DB
 RL Offset: 0.0 DB
 Sweep Time: 5.0ms
 Ref Lvl: -32.0 DBM

Comments

20dB BW: 28.7 MHz
 FH: 5593.98 MHz

Cursor 1	5593.9780	-33.80	
Cursor 2	5565.3206	-53.80	

Delta Freq. 28.657

Delta Amplitude 20.00



Client: Nextivity Inc.	Job Number: J84755
Model: CELFI-RS240CU	T-Log Number: T84762
Contact: Rama Akella	Account Manager: Sheareen Washington
Standard: FCC Part 15, 27	Class: N/A


Analyzer Settings

Rohde&Schwarz, ESI
 CF: 5670.000 MHz
 SPAN: 50.000 MHz
 RB: 1.000 MHz
 VB: 3.000 MHz
 Detector: POS
 Attn: 0 DB
 RL Offset: 0.0 DB
 Sweep Time: 5.0ms
 Ref Lvl: -32.0 DBM

Comments

20dB BW: 28.3 MHz
 FL: 5654.719 MHz

Cursor 1	5682.9760	-35.54	⊕ ⊖
Cursor 2	5654.7194	-55.54	⊕ ⊖

Delta Freq. 28.257

Delta Amplitude 20.00



Client:	Nextivity Inc.	Job Number:	J84755
Model:	CELFI-RS240CU	T-Log Number:	T84762
Contact:	Rama Akella	Account Manager:	Sheareen Washington
Standard:	FCC Part 15, 27	Class:	N/A


Run #1c: High Channel (5670 MHz)
5725 MHz Band Edge Radiated Field Strength

Frequency MHz	Level dB μ V/m	Pol v/h	15 E		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
5738.230	64.9	V	68.3	-3.4	PK	108	1.0	RB 1 MHz;VB 3 MHz;Pk
5737.600	59.3	H	68.3	-9.0	PK	298	1.0	RB 1 MHz;VB 3 MHz;Pk


For emissions immediately above 5725 MHz the limit is -27dBm/MHz eirp (68.3dBuV/m) Peak.

Spurious Radiated Emissions:

Frequency MHz	Level dB μ V/m	Pol v/h	15.209 / 15E		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
11337.000	50.1	V	54.0	-3.9	AVG	316	1.3	RB 1 MHz;VB 10 Hz;Pk
11336.830	61.3	V	74.0	-12.7	PK	316	1.3	RB 1 MHz;VB 3 MHz;Pk
1329.550	35.0	V	54.0	-19.0	AVG	99	2.2	RB 1 MHz;VB 10 Hz;Pk
2448.330	46.5	H	68.3	-21.8	PK	92	1.9	RB 1 MHz;VB 3 MHz;Pk
1325.950	46.4	V	74.0	-27.6	PK	99	2.2	RB 1 MHz;VB 3 MHz;Pk
1000.000	25.1	H	54.0	-28.9	AVG	210	1.0	RB 1 MHz;VB 10 Hz;Pk
1000.000	40.1	H	74.0	-33.9	PK	210	1.0	RB 1 MHz;VB 3 MHz;Pk

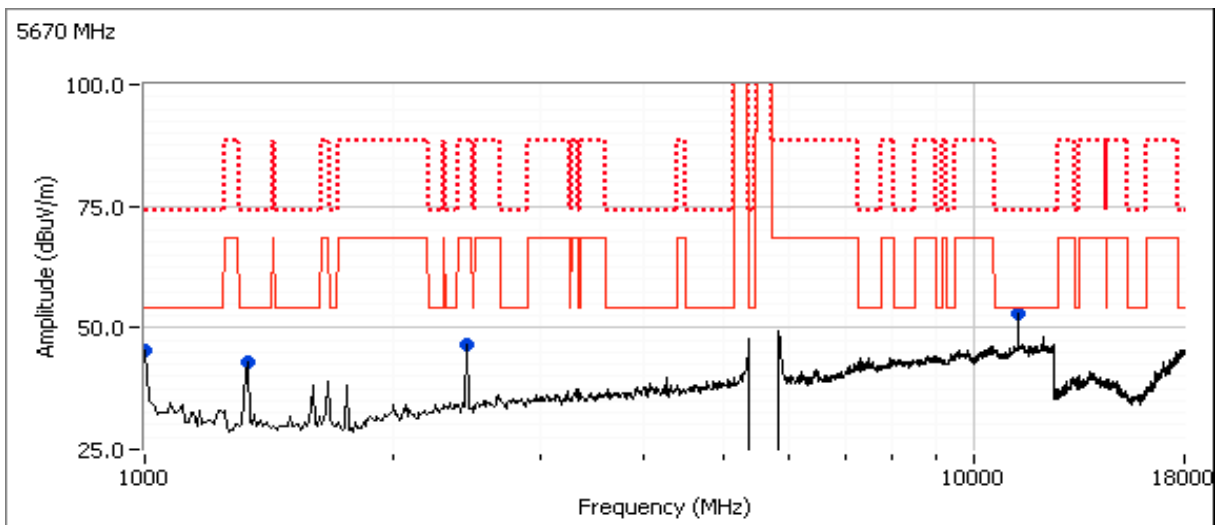

Client: Nextivity Inc.	Job Number: J84755
Model: CELFI-RS240CU	T-Log Number: T84762
	Account Manager: Sheareen Washington
Contact: Rama Akella	
Standard: FCC Part 15, 27	Class: N/A

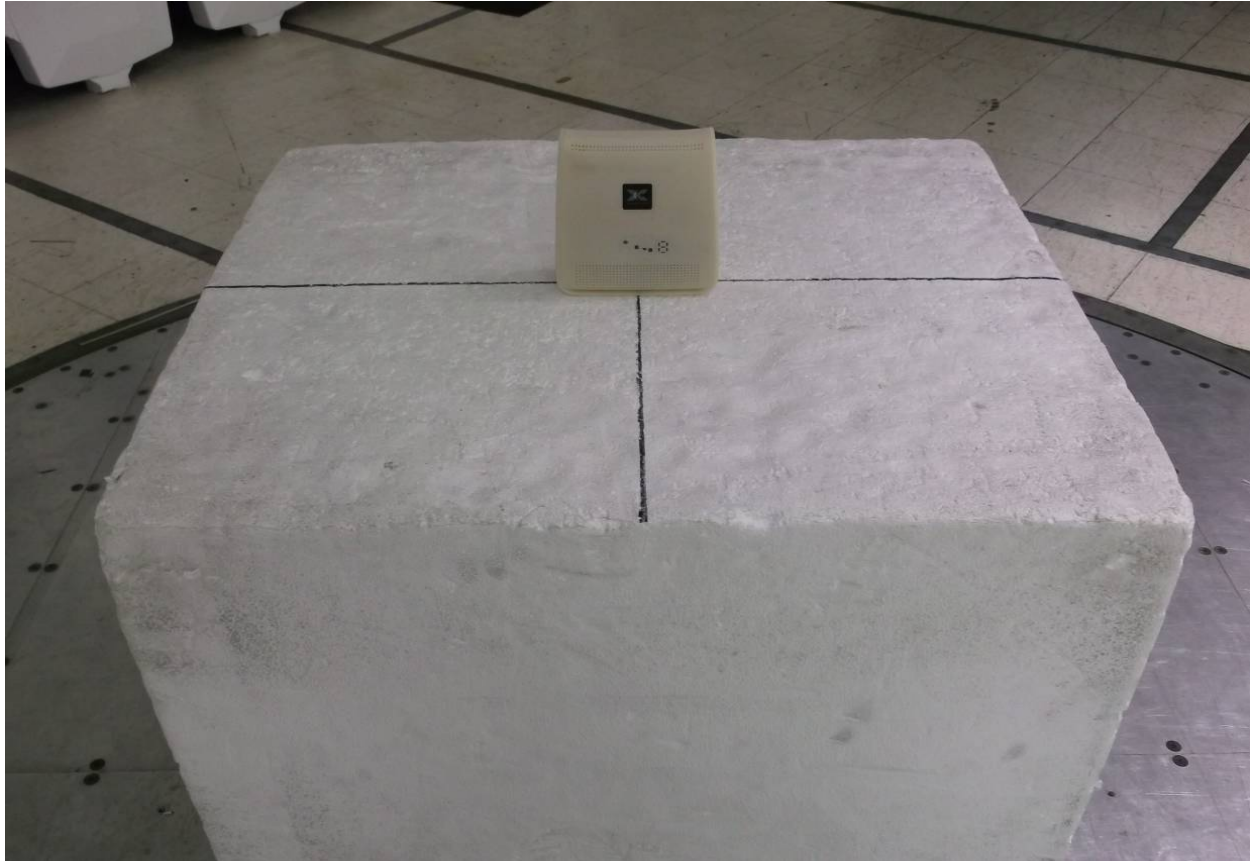

Client: Nextivity Inc.	Job Number: J84755
Model: CELFI-RS240CU	T-Log Number: T84762
Contact: Rama Akella	Account Manager: Sheareen Washington
Standard: FCC Part 15, 27	Class: N/A

Run #1: Bandwidth, Output Power and Power Spectral Density - Single Chain Systems

Note 1:	Output power measured using a spectrum analyzer (see plots below). RBW=1MHz, VB=3 MHz, sample detector, power averaging on (transmitted signal was continuous) and power integration over 50 MHz (method SA-1 of FCC KDB 789033).
Note 2:	Measured using the same analyzer settings used for output power.
Note 3:	For RSS-210 the limit for the 5150 - 5250 MHz band accounts for the antenna gain as the maximum eirp allowed is 10dBm/MHz. The limits are also corrected for instances where the highest measured value of the PSD exceeds the average PSD (calculated from the measured power divided by the measured 99% bandwidth) by more than 3dB by the amount that the measured value exceeds the average by more than 3dB.
Note 4:	99% Bandwidth measured in accordance with RSS GEN - RB > 1% of span and VB >=3xRB


Single Chain Operation, 5470- 5725 MHz Band

Antenna Gain (dBi): 5.5


EIRP: 195.0 mW

22.9 dBm

Frequency (MHz)	Software Setting	Bandwidth		Output Power ¹ dBm		Power (Watts)	PSD ² dBm/MHz			Result
		26dB	99% ⁴	Measured	Limit		Measured	FCC Limit	RSS Limit ³	
5525		36.0	26.7	16.7	24.0	0.046	3.8	11.0	11.0	Pass
5580		29.5	26.6	16.3	24.0	0.043	3.7	11.0	11.0	Pass
5670		30.5	26.6	17.4	24.0	0.055	4.7	11.0	11.0	Pass

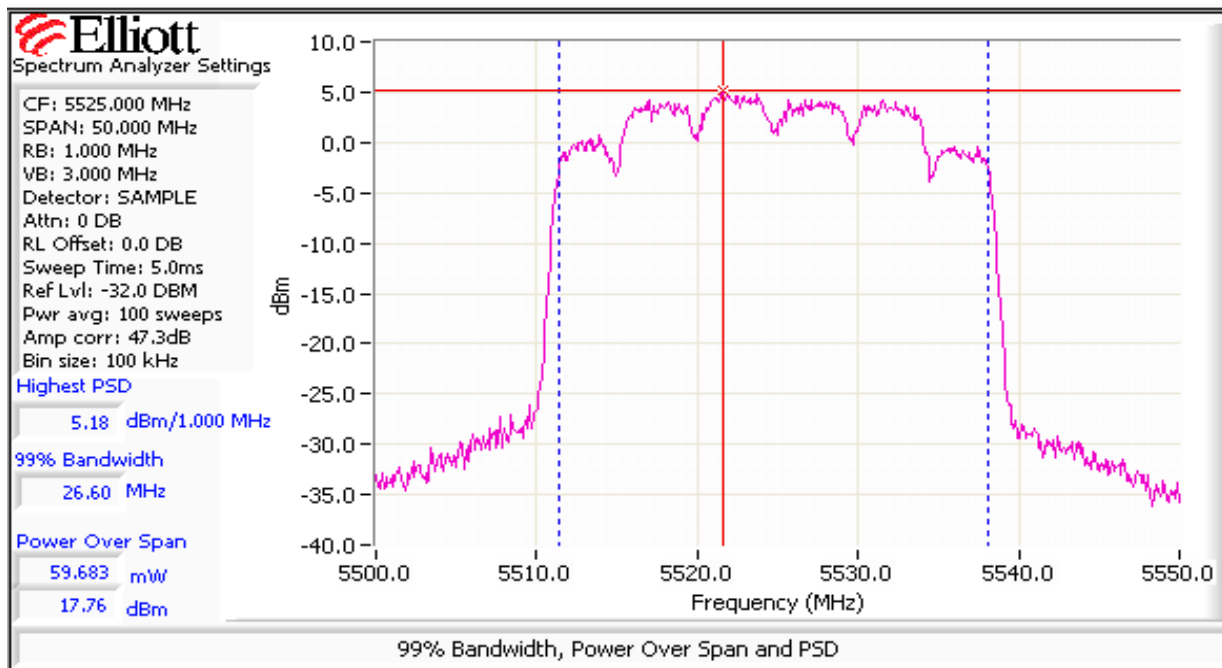

Client: Nextivity Inc.	Job Number: J84755
Model: CELFI-RS240CU	T-Log Number: T84762
Contact: Rama Akella	Account Manager: Sheareen Washington
Standard: FCC Part 15, 27	Class: N/A

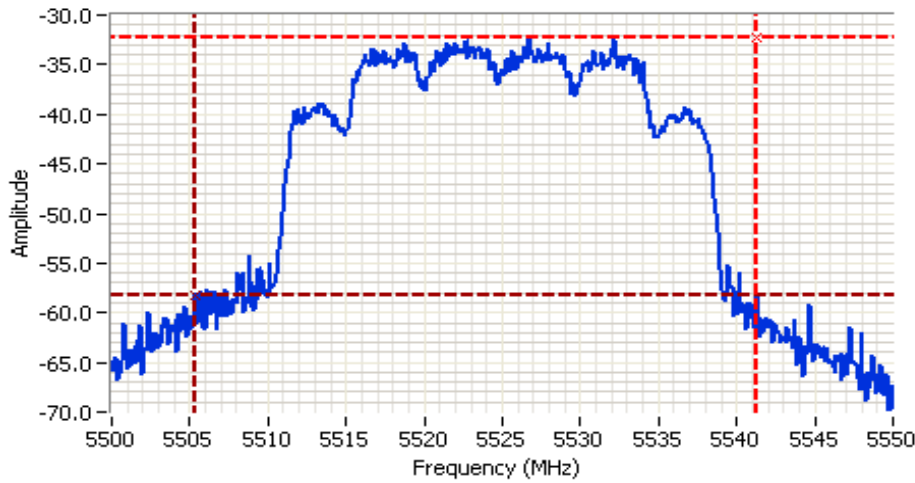

Analyzer Settings

Rohde&Schwarz, ESI
 CF: 5525.000 MHz
 SPAN: 50.000 MHz
 RB: 1.000 MHz
 VB: 3.000 MHz
 Detector: POS
 Attn: 0 DB
 RL Offset: 0.0 DB
 Sweep Time: 5.0ms
 Ref Lvl: -32.0 DBM

Comments

26dB BW: 35.972 MHz

Cursor 1	5541.2826	-32.25	
Cursor 2	5505.3106	-58.25	

Delta Freq. 35.972

Delta Amplitude 26.00



Run #2: Peak Excursion Measurement

20MHz: Device meets the requirement for the peak excursion


Freq		Peak Excursion(dB)		Freq		Peak Excursion(dB)		Freq		Peak Excursion(dB)	
(MHz)	Value	Limit	(MHz)	Value	Limit	(MHz)	Value	Limit	(MHz)	Value	Limit
5180		13.0	5260		13.0	5525	11.1	13.0			
5200		13.0	5300		13.0	5580	11.1	13.0			
5240		13.0	5320		13.0	5670	11.3	13.0			

Client: Nextivity Inc.	Job Number: J84755
Model: CELFI-RS240CU	T-Log Number: T84762
Contact: Rama Akella	Account Manager: Sheareen Washington
Standard: FCC Part 15, 27	Class: N/A


Plots Showing Peak Excursion

Trace A: RBW = 1MHz, VBW = 3MHz, Peak hold

Trace B: Same settings as used for power/PSD measurements (RBW = 1 MHz, VBW = 3MHz, Integrated average power)

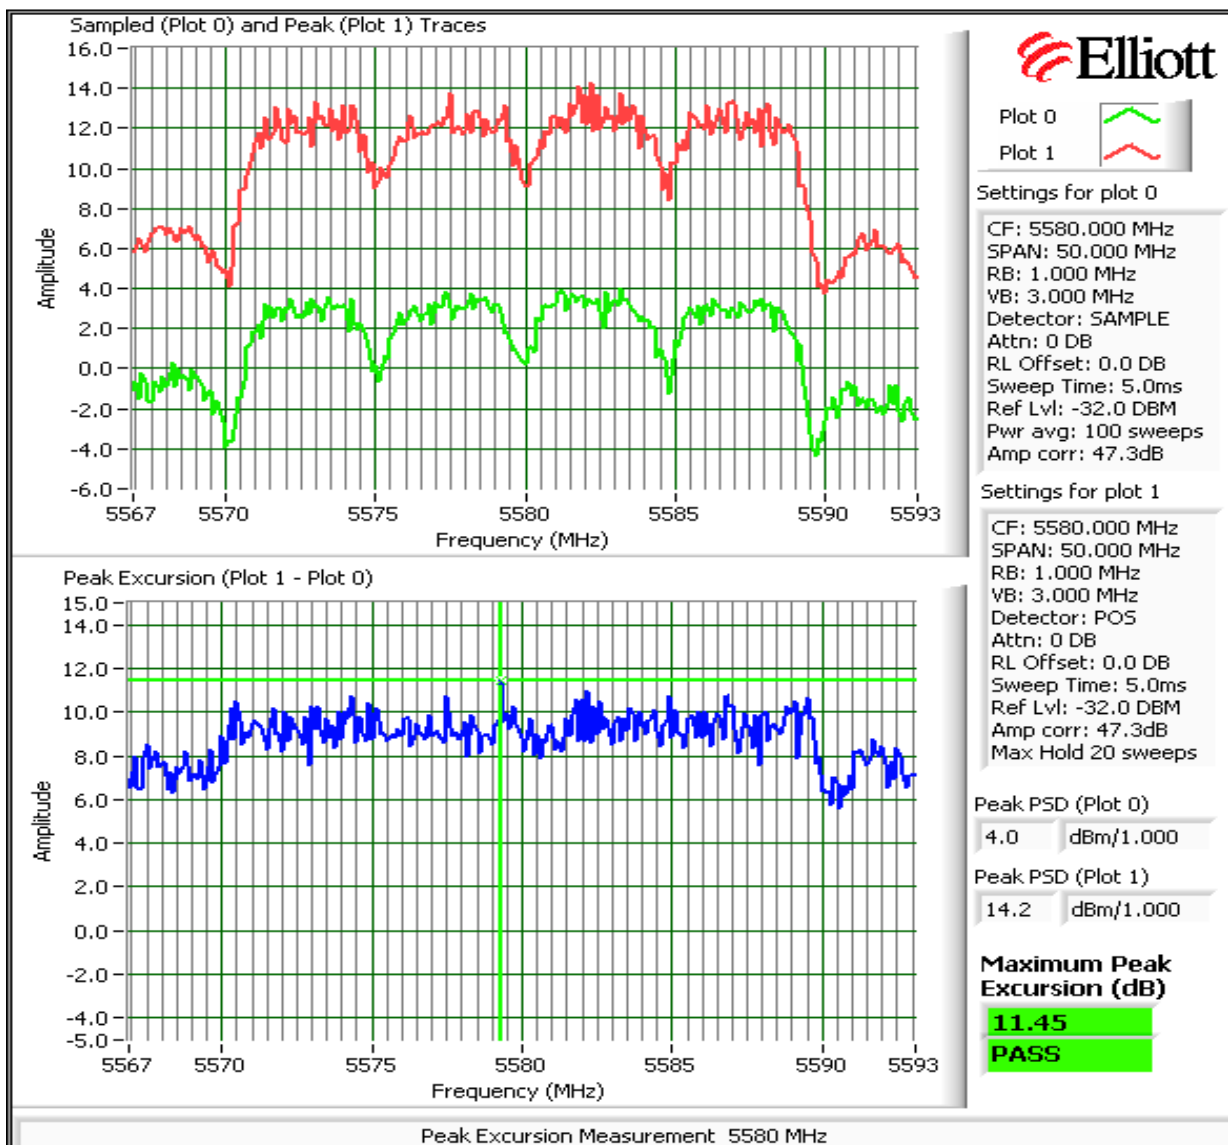

Client: Nextivity Inc.	Job Number: J84755
Model: CELFI-RS240CU	T-Log Number: T84762
	Account Manager: Sheareen Washington
Contact: Rama Akella	
Standard: FCC Part 15, 27	Class: N/A

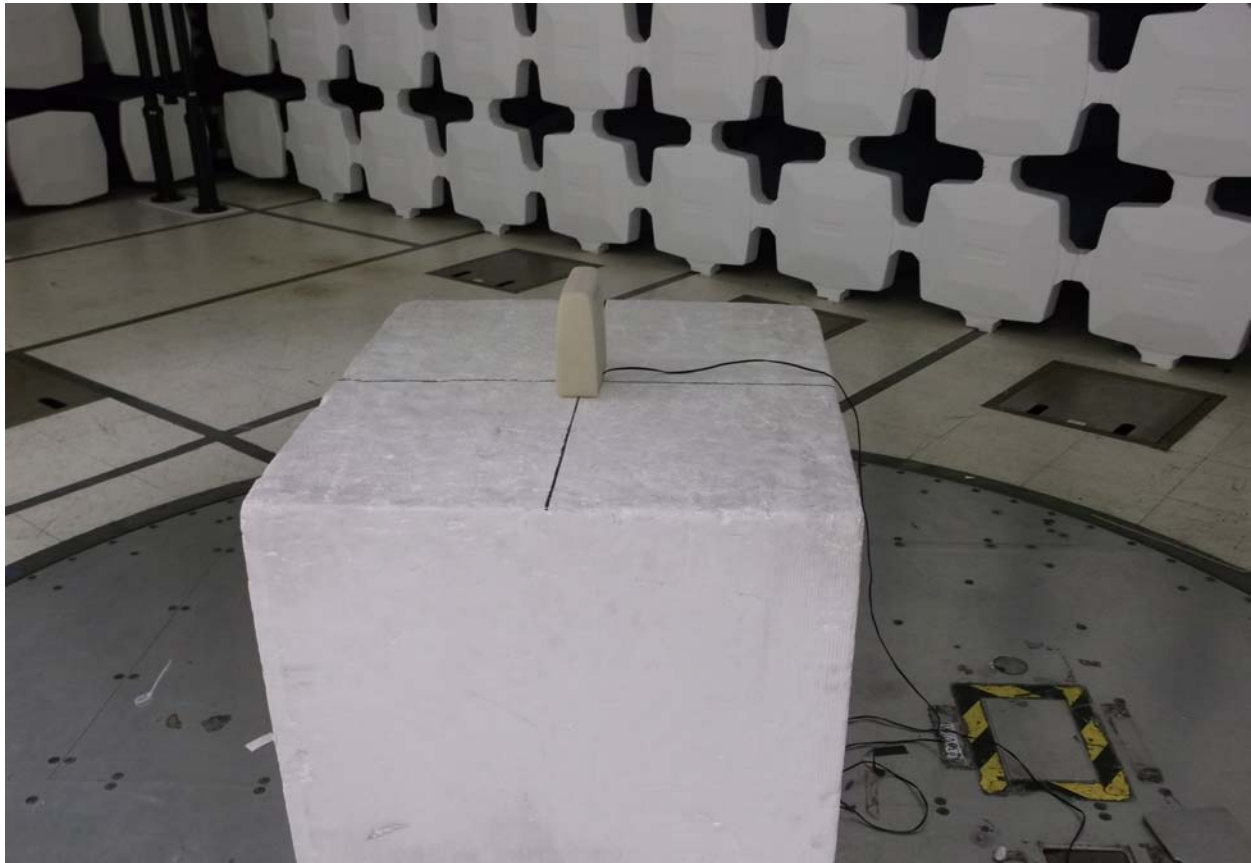

End of Report

This page is intentionally blank and marks the last page of this test report.