

***Radio Test Report
FCC Part 27 & RSS-139
(2110 MHz to 2155 MHz)***

Model: CELFI-RS240CU

IC CERTIFICATION #: 9298A-CRS240CU
FCC ID: YETCELFIR-S240CU

COMPANY: Nextivity Inc.
12230 World Trade Drive Suite 250
San Diego, CA 92128


TEST SITE(S): Elliott Laboratories
41039 Boyce Road.
Fremont, CA. 94538-2435

REPORT DATE: November 3, 2011

FINAL TEST DATES: October 4 and 10, 2011


TOTAL NUMBER OF PAGES: 38

PROGRAM MGR /
TECHNICAL REVIEWER:

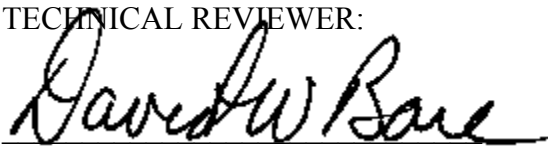

David W. Bare
Chief Engineer

QUALITY ASSURANCE DELEGATE /
FINAL REPORT PREPARER:



David Guidotti
Senior Technical Writer



Testing Cert #2016.01

Elliott Laboratories is accredited by the A2LA, certificate number 2016.01, to perform the test(s) listed in this report, except where noted otherwise. This report and the information contained herein represent the results of testing test articles identified and selected by the client performed to specifications and/or procedures selected by the client. National Technical Systems (NTS) makes no representations, expressed or implied, that such testing is adequate (or inadequate) to demonstrate efficiency, performance, reliability, or any other characteristic of the articles being tested, or similar products. This report should not be relied upon as an endorsement or certification by NTS of the equipment tested, nor does it represent any statement whatsoever as to its merchantability or fitness of the test article, or similar products, for a particular purpose. This report shall not be reproduced except in full.

REVISION HISTORY

Rev#	Date	Comments	Modified By
-	11-3-2011	First release	

TABLE OF CONTENTS

REVISION HISTORY	2
TABLE OF CONTENTS	3
SCOPE.....	4
OBJECTIVE	5
STATEMENT OF COMPLIANCE.....	5
DEVIATIONS FROM THE STANDARDS.....	5
TEST RESULTS.....	6
FCC PART 27 & RSS-139 (2110 – 2155 MHZ ADVANCED WIRELESS SERVICE)	6
EXTREME CONDITIONS	7
MEASUREMENT UNCERTAINTIES.....	7
EQUIPMENT UNDER TEST (EUT) DETAILS.....	8
GENERAL.....	8
OTHER EUT DETAILS.....	8
ENCLOSURE.....	8
MODIFICATIONS.....	8
SUPPORT EQUIPMENT.....	8
EUT INTERFACE PORTS	9
EUT OPERATION	9
TESTING	10
GENERAL INFORMATION.....	10
RF PORT MEASUREMENT PROCEDURES	11
OUTPUT POWER.....	11
BANDWIDTH MEASUREMENTS	12
CONDUCTED SPURIOUS EMISSIONS.....	12
TRANSMITTER MASK MEASUREMENTS.....	13
FREQUENCY STABILITY.....	13
TRANSIENT FREQUENCY BEHAVIOR:.....	13
RADIATED EMISSIONS MEASUREMENTS.....	14
INSTRUMENTATION	15
FILTERS/ATTENUATORS	15
ANTENNAS.....	15
ANTENNA MAST AND EQUIPMENT TURNTABLE.....	15
SAMPLE CALCULATIONS	16
SAMPLE CALCULATIONS - CONDUCTED SPURIOUS EMISSIONS	16
SAMPLE CALCULATIONS –RADIATED FIELD STRENGTH.....	16
SAMPLE CALCULATIONS –RADIATED POWER.....	17
RECEIVER RADIATED SPURIOUS EMISSIONS SPECIFICATION LIMITS	18
APPENDIX A TEST EQUIPMENT CALIBRATION DATA	19
APPENDIX B TEST DATA	20
END OF REPORT	38

SCOPE

Tests have been performed on the Nextivity Inc. model CELFI-RS240CU, pursuant to the relevant requirements of the following standard(s) in order to obtain device certification against the regulatory requirements of the Federal Communications Commission and Industry Canada.

- Code of Federal Regulations (CFR) Title 47 Part 2
- Industry Canada RSS-Gen Issue 3
- CFR 47 Part 27
- RSS-139 Issue 2

Conducted and radiated emissions data has been collected, reduced, and analyzed within this report in accordance with measurement guidelines set forth in the following reference standards and as outlined in Elliott Laboratories test procedures:

ANSI C63.4:2003
ANSI TIA-603-C August 17, 2004

The intentional radiator above has been tested in a simulated typical installation to demonstrate compliance with the relevant Industry Canada performance and procedural standards.

Every practical effort was made to perform an impartial test using appropriate test equipment of known calibration. All pertinent factors have been applied to reach the determination of compliance.

The test results recorded herein are based on a single type test of the Nextivity Inc. model CELFI-RS240CU and therefore apply only to the tested samples. The samples were selected and prepared by Rama Akella of Nextivity Inc.

OBJECTIVE

The primary objective of the manufacturer is compliance with the regulations outlined in the previous section.

Prior to marketing in the USA, the device requires certification. Prior to marketing in Canada, Class I transmitters, receivers and transceivers require certification.

Certification is a procedure where the manufacturer submits test data and technical information to a certification body and receives a certificate or grant of equipment authorization upon successful completion of the certification body's review of the submitted documents. Once the equipment authorization has been obtained, the label indicating compliance must be attached to all identical units, which are subsequently manufactured.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product which may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

STATEMENT OF COMPLIANCE

The tested samples of Nextivity Inc. model CELFI-RS240CU complied with the requirements of the standards and frequency bands declared in the scope of this test report.

Maintenance of compliance is the responsibility of the manufacturer. Any modifications to the product should be assessed to determine their potential impact on the compliance status of the device with respect to the standards detailed in this test report.

DEVIATIONS FROM THE STANDARDS

No deviations were made from the published requirements listed in the scope of this report.

TEST RESULTS**FCC Part 27 & RSS-139 (2110 – 2155 MHz Advanced Wireless Service)**

FCC	Canada	Description	Measured	Limit	Result
Transmitter Modulation, output power and other characteristics					
§2.1033 (c) (5) §27.5 (i) (2)	RSS-139 6.1 SRSP-513	Frequency range(s)	2117.5-2147.5 MHz	2110 – 2155 MHz	Complied
§2.1033 (c) (6) §2.1033 (c) (7) §2.1046 §27.50(d)	RSS-139 6.4	EIRP	0.020 Watts 13.5 dBm	1 Watt 30 dBm	Complied
§2.1033 (c) (4) §2.1047 §27.53(m)(4) (6)	RSS-139 6.2 / 6.5	Emission types	WCDMA, F9W	-	-
		Emission mask Note 2	< -13dBm at both band edges	-13dBm at band edge	Complied
§2.1049		Occupied Bandwidth	14.1 MHz	-	-
Transmitter spurious emissions					
§2.1051 §2.1053 §2.1057 §27.53(h)	RSS-139 6.5	At the antenna terminals	All emissions < -50 dBm	-13dBm	Complied
	RSS-139 6.5	Field strength	-28.1dBm @ 2108.0MHz (-15.1dB)	-13 dBm eirp	Complied
Receiver spurious emissions					
	RSS-139 6.6 & RSS-GEN	Field strength	30.8dBμV/m @ 36.40MHz (-9.2dB)	See limit table on page 18	Complied
Other details					
§2.1055 §27.54	RSS-139 6.3	Frequency stability	0.3 ppm	100 ppm Note 1	Complied
§2.1093	RSS-102	RF Exposure	0.04 mW/cm ² at 20cm	1.0 mW/cm ²	Complied
§2.1033 (c) (8)	-	Final radio frequency amplifying circuit's dc voltages and currents for normal operation over the power range	Refer to operational description	-	-
-	-	Antenna Gain	0.0 dBi	-	-
Notes					
Note 1 – The requirement for frequency stability is that the signal remains within the allocated band. A limit of 100 ppm is being used to ensure the signal remains within the allocated band as defined by the spurious limits at the channel edges.					
Note 2 – The measurement at the channel edge is made in a reference bandwidth of 1 MHz or at least 1% the emission bandwidth is used. For measurements more than 1MHz from the edge of the channel the measurement bandwidth is 1MHz.					

EXTREME CONDITIONS

Frequency stability is determined over extremes of temperature and voltage. The extremes of voltage were 85 to 115 percent of the nominal value.

The extremes of temperature were -30°C to +50°C as specified in FCC §2.1055(a)(1).

MEASUREMENT UNCERTAINTIES

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2) and were calculated in accordance with NAMAS document NIS 81 and M3003.

Measurement Type	Measurement Unit	Frequency Range	Expanded Uncertainty
RF frequency	Hz	25 to 7,000 MHz	1.7×10^{-7}
RF power, conducted	dBm	25 to 7,000 MHz	± 0.52 dB
Conducted emission of transmitter	dBm	25 to 40,000 MHz	± 0.7 dB
Conducted emission of receiver	dBm	25 to 40,000 MHz	± 0.7 dB
Radiated emission (substitution method)	dBm	25 to 40,000 MHz	± 2.5 dB
Radiated emission (field strength)	dBμV/m	25 to 1,000 MHz 1 to 40 GHz	± 3.6 dB ± 6.0 dB

EQUIPMENT UNDER TEST (EUT) DETAILS**GENERAL**

The Nextivity Inc. model CELFI-RS240CU is a WCDMA Cellular Repeater for indoor residential use. The system is composed of two units, the Window Unit (WU with model name of CELFI-RS240WU) and the Coverage Unit (CU with model name of CELFI-RS240CU) that connect wirelessly over a full-duplex wireless link in the RLAN band using a mixed OFDM and muxed cellular signal (up to three 5 MHz cellular channels) over a 30 MHz channel in each direction. The Cel-Fi WU transmits and receives Cellular signals from the base station and operates similar to a cellular handset. The Cel-Fi CU transmits and receives signals with the cellular handset and operates on frequencies similar to the cellular base station. Since the EUT could be placed on a table top during operation, the EUT was treated as table-top equipment during testing to simulate the end-user environment. The electrical rating of the EUT is 12VDC, 15W supplied from a power adapter rated 100-240 Volts, 50/60 Hz, 1 Amp.

The sample was received on September 26, 2011 and tested on October 4 and 10, 2011. The following samples were used for testing:

Company	Model	Description	Serial Number	FCC ID
Nextivity	CELFY-RS240CU	CelFi Coverage Unit	131131000208	YETCELFY-RS240CU
Nextivity	CELFY-RS240CU	CelFi Coverage Unit	131131000093	YETCELFY-RS240CU

OTHER EUT DETAILS

Sample serial # 130131000208 was used for radiated tests and serial # 130131000093 was used for antenna port tests. The communication in the cellular bands is a nominally three aggregated 5 MHz channels. The WU operates in the 1710-1755 MHz band and the CU operates in the 2110-2155 MHz band.

The antenna is integral to the device. Gain is 0.0 dBi.

ENCLOSURE

The CU enclosure is primarily constructed of plastic. It measures approximately 14.5 cm wide by 5.5 cm deep by 19.5 cm high.

MODIFICATIONS

No modifications were made to the EUT during the time the product was at Elliott.

SUPPORT EQUIPMENT

No support equipment was used during emissions testing.

EUT INTERFACE PORTS

The I/O cabling configuration during emissions testing was as follows:

Port		Description	Cable(s) Shielded/Unshielded	Length(m)
From	To			
AC/DC Power	Main	-	-	-

EUT OPERATION

During emissions testing, the EUT was configured to transmit a modulated 100% duty cycle signal at the selected power and frequency.

TESTING**GENERAL INFORMATION**

Antenna port measurements were taken at the Elliott Laboratories test site located at 41039 Boyce Road, Fremont, CA 94538-2435.

Radiated spurious emissions measurements were taken at the Elliott Laboratories Anechoic Chambers and/or Open Area Test Site(s) listed below. The sites conform to the requirements of ANSI C63.4: 2003 *American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz* and CISPR 16-1-4:2007 - *Specification for radio disturbance and immunity measuring apparatus and methods Part 1-4: Radio disturbance and immunity measuring apparatus Ancillary equipment Radiated disturbances*. They are on file with the FCC and industry Canada.


Site	Registration Numbers		Location
	FCC	Canada	
Chamber 4	211948	IC 2845B-4	41039 Boyce Road Fremont, CA 94538-2435

In the case of Open Area Test Sites, ambient levels are at least 6 dB below the specification limits with the exception of predictable local TV, radio, and mobile communications traffic.

Considerable engineering effort has been expended to ensure that the facilities conform to all pertinent requirements.

RF PORT MEASUREMENT PROCEDURES

Conducted measurements are performed with the EUT's rf input/output connected to the input of a spectrum analyzer, power meter or modulation analyzer. When required an attenuator, filter and/or dc block is placed between the EUT and the spectrum analyzer to avoid overloading the front end of the measurement device. Measurements are corrected for the insertion loss of the attenuators and cables inserted between the rf port of the EUT and the measurement equipment.

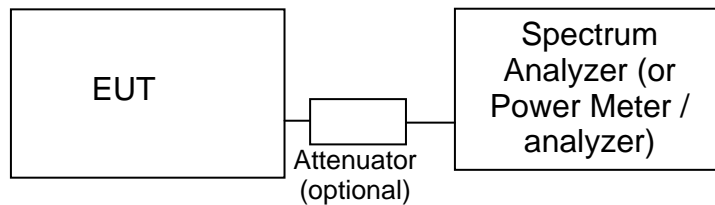

Test Configuration for Antenna Port Measurements

For devices with an integral antenna the output power and spurious emissions are measured as a field strength at a test distance of (typically) 3m and then converted to an eirp using a substitution measurement (refer to RADIATED EMISSIONS MEASUREMENTS). All other measurements are made as detailed below but with the test equipment connected to a measurement antenna directed at the EUT.

OUTPUT POWER

Output power is measured using a power meter and an average sensor head, a spectrum analyzer or a power meter and peak power sensor head as required by the relevant rule part(s). Where necessary measurements are gated to ensure power is only measured over periods that the device is transmitting.

Power measurements made directly on the rf power port are, when appropriate, converted to an EIRP by adding the gain of the highest gain antenna that can be used with the device under test, as specified by the manufacturer.

BANDWIDTH MEASUREMENTS

The 6dB, 20dB and/or 26dB signal bandwidth is measured in using the bandwidths recommended by ANSI C63.4. When required, the 99% bandwidth is measured using the methods detailed in RSS GEN. The measurement bandwidth is set to be at least 1% of the instrument's frequency span.

CONDUCTED SPURIOUS EMISSIONS

Initial scans are made using a peak detector (RBW=VBW) and using scan rates to ensure that the EUT transmits before the sweep moves out of each resolution bandwidth (for transmit mode measurements). Where the limits are expressed as an average power the spectrum analyzer is tuned to that frequency with a narrow span (wide enough to capture the emission and its sidebands) and the resolution and video bandwidths are adjusted as required by the reference measurement standards. For transmitter measurements the appropriate detector (average, peak, normal, sample, quasi-peak) is used when making measurements for licensed devices. For receiver conducted spurious measurements the detector is set to peak.

TRANSMITTER MASK MEASUREMENTS

The transmitter mask measurements are made using resolution bandwidths as specified in the pertinent rule part(s). Where narrower bandwidths are used the measurement is corrected to account for the reduced bandwidth by either using the adjacent channel power function of the spectrum analyzer to sum the power across the required measurement bandwidth. The frequency span of the analyzer is set to ensure the fundamental signal and all significant sidebands are displayed.

The top of the mask may be set by the total output power of the signal, the power of the unmodulated signal or the peak value of the signal in the reference bandwidth being used for the mask measurement.

FREQUENCY STABILITY

The EUT is placed inside a temperature chamber with all support and test equipment located outside of the chamber. The temperature is varied across the specified frequency range in 10 degree increments with frequency measurements made at each temperature step. The EUT is allowed enough time to stabilize at each temperature variation.

The spectrum analyzer is configured to give a 5- or 6-digit display for the marker-frequency function. The spectrum analyzer's built-in frequency counter is used to measure the maximum deviation of the fundamental frequency at each temperature. Where possible the device is set to transmit an unmodulated signal. Where this is not possible the frequency drift is determined by finding a stable point on the signal (e.g. the null at the centre of an OFDM signal) or by calculating a centre frequency based on the upper and lower XdB points (where X is typically 6dB or 10dB) on the signal's skirts.

TRANSIENT FREQUENCY BEHAVIOR:

The TIA/EIA 603 procedure is used to determine compliance with transient frequency timing requirements as the radio is keyed on and off.

The EUTs rf output is connected via a combiner/splitter to the test receiver/spectrum analyzer and to a diode detector. The test receiver or spectrum analyzer video output is connected to an oscilloscope, which is triggered by the output from the diode detector.

Plots showing Ton, T1, and T2 are made when turning on the transmitter and showing T3 when turning off the transmitter.

RADIATED EMISSIONS MEASUREMENTS

Receiver radiated spurious emissions measurements are made in accordance with ANSI C63.4:2003 by measuring the field strength of the emissions from the device at a specific test distance and comparing them to a field strength limit. Where the field strength limit is specified at a longer distance than the measurement distance the measurement is extrapolated to the limit distance.

Transmitter radiated spurious emissions are initially measured as a field strength. The eirp or erp limit as specified in the relevant rule part(s) is converted to a field strength at the test distance and the emissions from the EUT are then compared to that limit. Emissions within 20dB of this limit are the subjected to a substitution measurement.

All radiated emissions measurements are performed in two phases. A preliminary scan of emissions is conducted in either an anechoic chamber or on an OATS during which all significant EUT frequencies are identified with the system in a nominal configuration. At least two scans are performed across the complete frequency range of interest and at each operating frequency identified in the reference standard. One or more of these is with the antenna polarized vertically while the one or more of these is with the antenna polarized horizontally. Initial scans are made using a peak detector (RBW=VBW) and using scan rates to ensure that the EUT transmits before the sweep moves out of each resolution bandwidth (for transmit mode).

During the preliminary scans, the EUT is rotated through 360°, the antenna height is varied and cable positions are varied to determine the highest emission relative to the limit. For transmitter spurious emissions, where the limit is expressed as an effective radiated power, the eirp or erp is converted to a field strength limit.

Final measurements are made on an OATS or in a semi-anechoic chamber at the significant frequencies observed during the preliminary scan(s) using the same process of rotating the EUT and raising/lowering the measurement antenna to find the highest level of the emission. The field strength is recorded and, for receiver spurious emissions, compared to the field strength limit. For the final measurement the appropriate detectors (average, peak, normal, sample, quasi-peak) are used. For receiver measurements below 1GHz the detector is a Quasi-Peak detector, above 1GHz a peak detector is used and the peak value (RB=VB=1MHz) and average value (RB=1MHz, VB=10Hz) are recorded.

For transmitter spurious emissions, the radiated power of all emissions within 20dB of the calculated field strength limit are determined using a substitution measurement. The substitution measurement is made by replacing the EUT with an antenna of known gain (typically a dipole antenna or a double-ridged horn antenna), connected to a signal source. The output power of the signal generator is adjusted until the maximum field strength from the substitution antenna is similar to the field strength recorded from the EUT. The erp of the EUT is then calculated.

INSTRUMENTATION

An EMI receiver as specified in CISPR 16-1-1 is used for radiated emissions measurements. The receivers used can measure over the frequency range of 9 kHz up to 7000 MHz. These receivers allow both ease of measurement and high accuracy to be achieved. The receivers have Peak, Average, and CISPR (Quasi-peak) detectors built into their design so no external adapters are necessary.

For measurements above the frequency range of the receivers and for all conducted measurements a spectrum analyzer is utilized because it provides visibility of the entire spectrum along with the precision and versatility required to support engineering analysis.

Measurement bandwidths for the test instruments are set in accordance with the requirements of the standards referenced in this document.

Software control is used to correct the measurements for transducer factors (e.g. antenna) and the insertion loss of cables, attenuators and other series elements to obtain the final measurement value. This provides faster, more accurate readings by performing the conversions described under Sample Calculations within the Test Procedures section of this report. Results are exported in a graphic and/or tabular format, as appropriate.

FILTERS/ATTENUATORS

External filters and precision attenuators are often connected between the EUT antenna port or receiving antenna and the test receiver. This eliminates saturation effects and non-linear operation due to high amplitude transient events.

ANTENNAS

A combination of biconical, log periodic or bi-log antennas are used to cover the range from 30 MHz to 1000 MHz. Broadband antennas or tuned dipole antennas are used over the entire 25 to 1000 MHz frequency range as the reference antenna for substitution measurements.

Above 1000 MHz, a dual-ridge guide horn antenna or octave horn antenna are used as reference and measurement antennas.

The antenna calibration factors are included in site factors that are programmed into the test receivers and instrument control software when measuring the radiated field strength.

ANTENNA MAST AND EQUIPMENT TURNTABLE

The antennas used to measure the radiated electric field strength are mounted on a non-conductive antenna mast equipped with a motor-drive to vary the antenna height.

Table mounted devices are placed on a non-conductive table at a height of 80 centimeters above the floor. Floor mounted equipment is placed on the ground plane if the device is normally used on a conductive floor or separated from the ground plane by insulating material from 3 to 12 mm if the device is normally used on a non-conductive floor. The EUT is positioned on a motorized turntable to allow it to be rotated during testing to determine the angle with the highest level of emissions.

SAMPLE CALCULATIONS**SAMPLE CALCULATIONS - CONDUCTED SPURIOUS EMISSIONS**

Measurements are compared directly to the conducted emissions specification limit (decibel form). The calculation is as follows:

$$R_r - S = M$$

where:

$$\begin{aligned} R_r &= \text{Measured value in dBm} \\ S &= \text{Specification Limit in dBm} \\ M &= \text{Margin to Specification in +/- dB} \end{aligned}$$

SAMPLE CALCULATIONS - RADIATED FIELD STRENGTH

Measurements of radiated field strength are compared directly to the specification limit (decibel form). The receiver and/or control software corrects for cable loss, preamplifier gain, and antenna factor. The calculations are in the reverse direction of the actual signal flow, thus cable loss is added and the amplifier gain is subtracted. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

A distance factor is used when measurements are made at a test distance that is different to the specified limit distance by using the following formula:

$$F_d = 20 * \text{LOG}_{10} (D_m/D_s)$$

where:

$$\begin{aligned} F_d &= \text{Distance Factor in dB} \\ D_m &= \text{Measurement Distance in meters} \\ D_s &= \text{Specification Distance in meters} \end{aligned}$$

For electric field measurements below 30MHz the extrapolation factor is either determined by making measurements at multiple distances or a theoretical value is calculated using the formula:

$$F_d = 40 * \text{LOG}_{10} (D_m/D_s)$$

The margin of a given emission peak relative to the limit is calculated as follows:

$$R_c = R_r + F_d$$

and

$$M = R_c - L_s$$

where:

$$R_r = \text{Receiver Reading in dBuV/m}$$

- F_d = Distance Factor in dB
 R_c = Corrected Reading in dBuV/m
 L_s = Specification Limit in dBuV/m
 M = Margin in dB Relative to Spec

SAMPLE CALCULATIONS –RADIATED POWER

The erp/eirp limits for transmitter spurious measurements are converted to a field strength in free space using the following formula:

$$E = \frac{\sqrt{30 P G}}{d}$$

where:

- E = Field Strength in V/m
 P = Power in Watts
 G = Gain of isotropic antenna (numeric gain) = 1
 D = measurement distance in meters

The field strength limit is then converted to decibel form (dBuV/m) and the margin of a given emission peak relative to the limit is calculated (refer to *SAMPLE CALCULATIONS –RADIATED FIELD STRENGTH*).

When substitution measurements are required (all signals with less than 20dB of margin relative to the calculated field strength limit) the eirp of the spurious emission is calculated using:

$$P_{EUT} = P_s - (E_s - E_{EUT})$$

and

$$P_s = G + P_{in}$$

where:

- P_s = effective isotropic radiated power of the substitution antenna (dBm)
 P_{in} = power input to the substitution antenna (dBm)
 G = gain of the substitution antenna (dBi)
 E_s = field strength the substitution antenna (dBm) at eirp P_s
 E_{EUT} = field strength measured from the EUT

Where necessary the effective isotropic radiated power is converted to effective radiated power by subtracting the gain of a dipole (2.2dBi) from the eirp value.

RECEIVER RADIATED SPURIOUS EMISSIONS SPECIFICATION LIMITS

The table below shows the limits for the spurious emissions from receivers as detailed in FCC Part 15.109, RSS 210 Table 2, RSS GEN Table 1 and RSS 310 Table 3. Note that receivers operating outside of the frequency range 30 MHz – 960 MHz are exempt from the requirements of 15.109.

Frequency Range (MHz)	Limit (uV/m @ 3m)	Limit (dBuV/m @ 3m)
30 to 88	100	40
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

Appendix A Test Equipment Calibration Data**Radio Antenna Port (Power and Spurious Emissions), 04-Oct-11**

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Agilent	PSA, Spectrum Analyzer, (installed options, 111, 115, 123, 1DS, B7J, HYX,	E4446A	2139	1/26/2012
Thermotron	Temp Chamber (w/ F4 Watlow Controller)	S1.2	2170	7/8/2012

Signal Substitution, 10-Oct-11

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
EMCO	Antenna, Horn, 1-18 GHz (SA40-Red)	3115	1142	8/2/2012
Rohde & Schwarz	Power Meter, Single Channel	NRVS	1422	12/1/2011
Rohde & Schwarz	Power Sensor 100 uW - 2 Watts use with 20dB attenuator sn:100059 only	NRV-Z32	1423	9/1/2012
EMCO	Antenna, Horn, 1-18 GHz	3115	1561	6/22/2012
Agilent	MXG Analog Signal Generator	N5181A	2146	1/26/2012
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1538	11/2/2011

Radiated Emissions, 30 - 18,000 MHz, 04-Oct-11

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Hewlett Packard	Microwave Preamplifier, 1- 26.5GHz	8449B	785	5/18/2012
EMCO	Antenna, Horn, 1-18GHz	3115	868	6/8/2012
Hewlett Packard	High Pass filter, 3.5 GHz	P/N 84300-80038	1157	8/5/2012
Hewlett Packard	SpecAn 9 kHz - 40 GHz, FT (SA40) Blue	8564E (84125C)	1393	8/9/2012

Frequency Stability, 04-Oct-11

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Agilent	PSA, Spectrum Analyzer, (installed options, 111, 115, 123, 1DS, B7J, HYX,	E4446A	2139	1/26/2012
Thermotron	Temp Chamber (w/ F4 Watlow Controller)	S1.2	2170	7/8/2012

Appendix B Test Data

T84762 Pages 21 - 37



EMC Test Data

Client:	Nextivity Inc.	Job Number:	J84755
Model:	CELFI-RS240CU	T-Log Number:	T84762
		Account Manager:	Sheareen Washington
Contact:	Rama Akella	Project Manager:	David Bare
Emissions Standard(s):	FCC Part 15, 27	Class:	B
Immunity Standard(s):	-	Environment:	Radio

EMC Test Data

For The

Nextivity Inc.

Model

CELFI-RS240CU

Date of Last Test: 10/10/2011

Client:	Nextivity Inc.	Job Number:	J84755
Model:	CELFI-RS240CU	T-Log Number:	T84762
		Account Manager:	Sheareen Washington
Contact:	Rama Akella		
Standard:	FCC Part 15, 27	Class:	N/A

FCC Part 27 Power, Occupied Bandwidth, Frequency Stability and Spurious Emissions

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

With the exception of the radiated spurious emissions tests, all measurements are made with the EUT's rf port connected to the measurement instrument via an attenuator or dc-block if necessary. All amplitude measurements are adjusted to account for the attenuation between EUT and measuring instrument. For frequency stability measurements the EUT was placed inside an environmental chamber.

Radiated measurements are made with the EUT located on a non-conductive table, 3m from the measurement antenna.

Ambient Conditions:

Temperature:	18-23 °C
Rel. Humidity:	30-40 %

Summary of Results

Run #	Spacing	Test Performed	Limit	Pass / Fail	Result / Margin
1		Output Power	1 Watt EIRP	PASS	13.5dBm (0.02W) EIRP
2		99% or Occupied Bandwidth	-	-	14.1 MHz
3		Spurious Emissions (conducted)	-13 dBm	PASS	All emissions more than 20dB below the limit
4		Spurious emissions (radiated)	-13 dBm	PASS	-28.1dBm @ 2108.0MHz (-15.1dB)
5		Frequency Stability	193ppm	PASS	0.28ppm

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.



Radio Test Data

Client: Nextivity Inc.	Job Number: J84755
Model: CELFI-RS240CU	T-Log Number: T84762
	Account Manager: Sheareen Washington
Contact: Rama Akella	
Standard: FCC Part 15, 27	Class: N/A

Run #1: Output Power

Date: 10/4/2011

Engineer: M. Birgani

Location: FT Chamber #4

Cable + Combiner Loss: 0.0 dB

Attenuator: 10.0 dB

Total Loss: 10.0 dB

Cable ID(s):

Attenuator IDs: 2100

Power Setting ²	Frequency (MHz)	Output Power		Antenna Gain (dBi)	Result	EIRP		Output Power Peak	
		(dBm) ¹	mW			dBm	W	(dBm) ³	mW
Max	2117.5	12.5	17.8	0.0	Pass	12.5	0.018		
Max	2132.5	13.5	22.2	0.0	Pass	13.5	0.022		
Max	2147.5	13.3	21.6	0.0	Pass	13.3	0.022		

- Note 1: Output power measured using an average power meter
- Note 2: Power setting - the software power setting used during testing, included for reference only.
- Note 3: Output power measured using a spectrum analyzer with RBW=10MHz, VB=10 MHz, included for reference only

Run #2: Signal Bandwidth

Date: 10/4/2011

Engineer: M. Birgani

Location: FT Chamber #4

Cable + Combiner Loss: 0.4 dB

Attenuator: 20.0 dB

Total Loss: 20.4 dB


Cable ID(s):

Attenuator IDs:

Power Setting	Frequency (MHz)	Resolution Bandwidth	Bandwidth (MHz)	
			26dB	99%
Max	2117.5	300kHz	14.8	14.1
Max	2132.5	300kHz	14.8	14.0
Max	2147.5	300kHz	14.9	14.0

- Note 1: 99% bandwidth measured in accordance with RSS GEN, with RB > 1% of the span and VB > 3xRB

Client: Nextivity Inc.	Job Number: J84755
Model: CELFI-RS240CU	T-Log Number: T84762
Contact: Rama Akella	Account Manager: Sheareen Washington
Standard: FCC Part 15, 27	Class: N/A

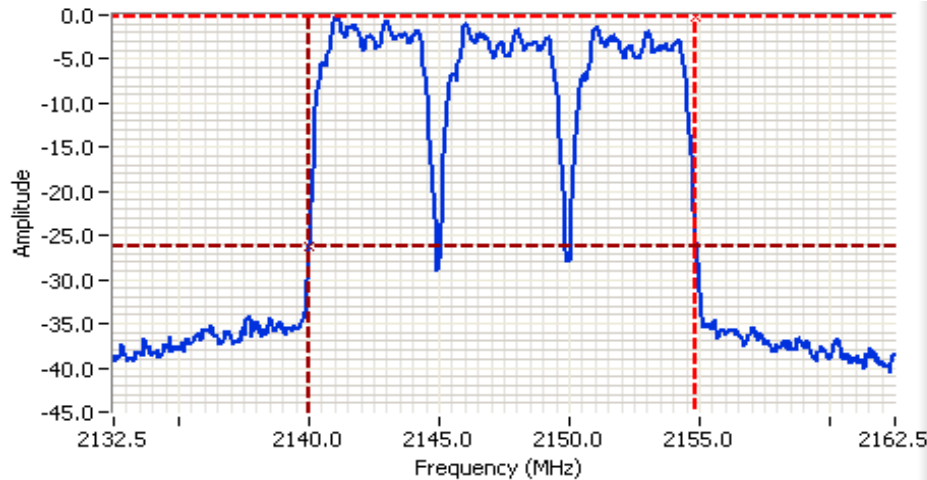
Analyzer Settings

Rohde&Schwarz, ESI
 CF: 2147.500 MHz
 SPAN: 30.000 MHz
 RB: 300 kHz
 VB: 1.000 MHz
 Detector: POS
 Attn: 30 DB
 RL Offset: 20.4 DB
 Sweep Time: 5.0ms
 Ref Lvl: 29.4 DBM


Comments

26dB BW: 14.9 MHz

Cursor 1	2154.8647	-0.21	
Cursor 2	2140.0150	-26.21	

Delta Freq. 14.850

Delta Amplitude 26.00

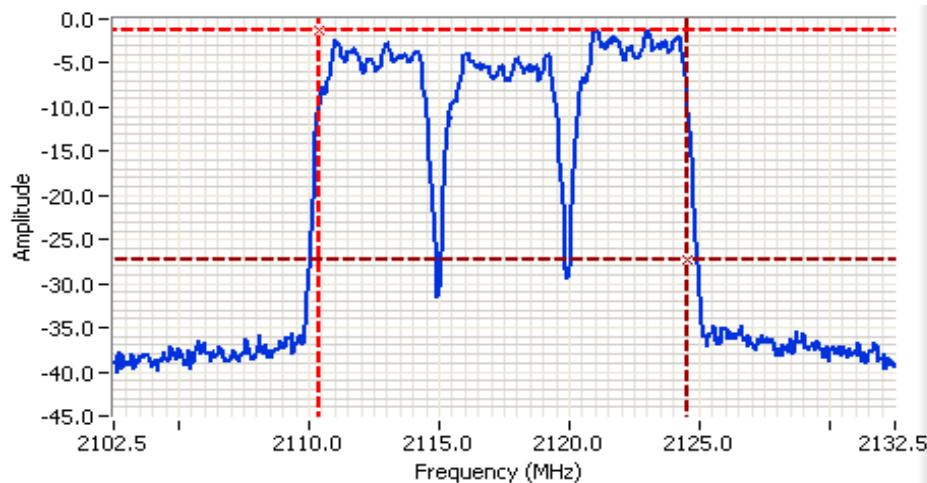
Analyzer Settings

Rohde&Schwarz, ESI
 CF: 2117.500 MHz
 SPAN: 30.000 MHz
 RB: 300 kHz
 VB: 1.000 MHz
 Detector: POS
 Attn: 30 DB
 RL Offset: 20.4 DB
 Sweep Time: 5.0ms
 Ref Lvl: 29.4 DBM

Comments

99% BW: 14.10 MHz

Cursor 1	2110.4200	-1.27	
Cursor 2	2124.5200	-27.27	

Delta Freq. 14.100

Delta Amplitude 26.00



Client: Nextivity Inc.	Job Number: J84755
Model: CELFI-RS240CU	T-Log Number: T84762
Contact: Rama Akella	Account Manager: Sheareen Washington
Standard: FCC Part 15, 27	Class: N/A

Run #3: Out of Band Spurious Emissions, Conducted

Date: 10/4/2011

Engineer: M. Birgani


Location: FT Chamber #4

Frequency (MHz)	Limit	Result
2117.5	-13dBm	PASS
2132.5	-13dBm	PASS
2147.5	-13dBm	PASS

The limit is taken from FCC Part 27.53(h), (1 MHz RB and 3 MHz VB), for BE plots 150kHz RB and 150kHz VB were used
At bandedges, RW can be lowered to 1% of the 26dB bandwidth


Frequency MHz	Level dBm	Lead	Limit	Margin	Detector QP/Ave	Comments

Plots for low channel, power setting = Max

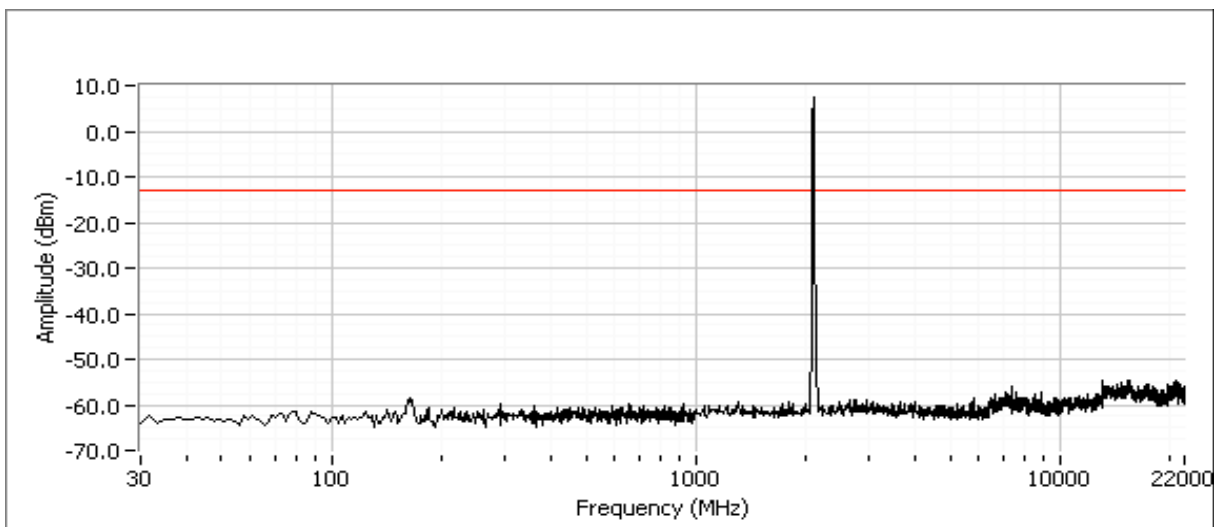


Client: Nextivity Inc.	Job Number: J84755
Model: CELFI-RS240CU	T-Log Number: T84762
Contact: Rama Akella	Account Manager: Sheareen Washington
Standard: FCC Part 15, 27	Class: N/A

Plots for center channel, power setting = Max

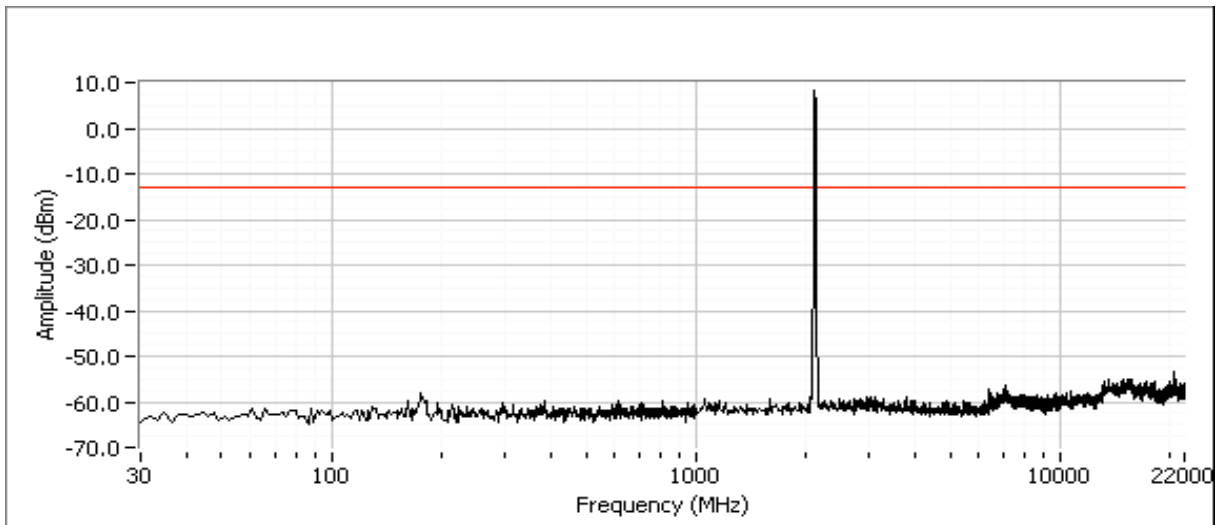

Plots for high channel, power setting = Max

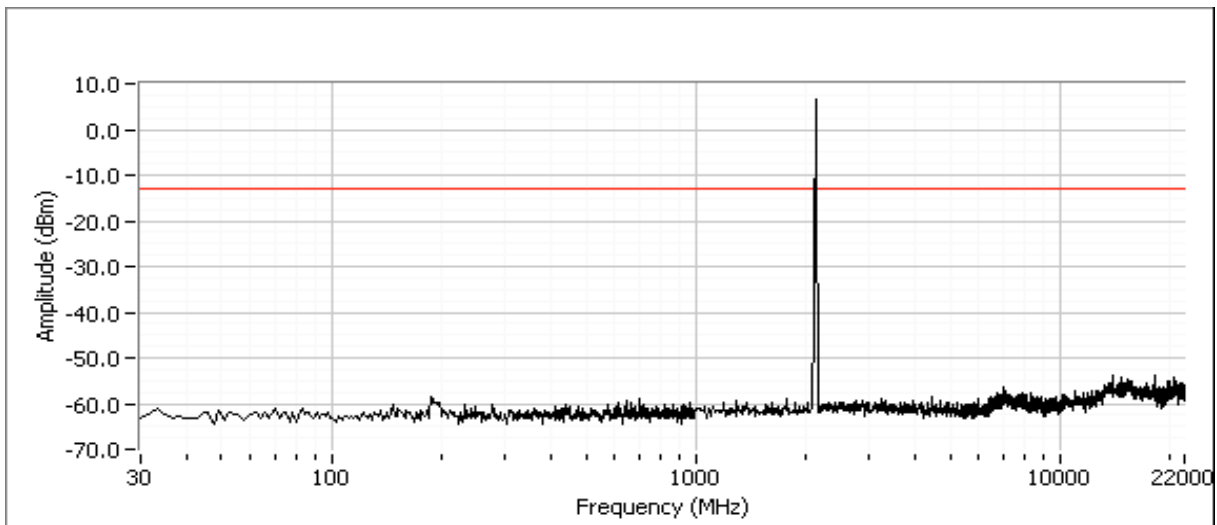

Client: Nextivity Inc.	Job Number: J84755
Model: CELFI-RS240CU	T-Log Number: T84762
Contact: Rama Akella	Account Manager: Sheareen Washington
Standard: FCC Part 15, 27	Class: N/A

Run #4: Out of Band Spurious Emissions, Radiated

Conducted limit (dBm): -13
 Approximate field strength limit @ 3m: 82.3 dBuV/m

The limit is taken from FCC Part 27.53(h), (1 MHz RB and 3 MHz VB) (150 kHz within 1 MHz of the band edge)
 EUT was transmitting on 3 channels simultaneously, at full power on each channel: 1712.5, 1717.5, 1722.5 MHz.


Run #4a - Preliminary measurements

Date: 10/10/2011 Engineer: M. Birgani, J. Liu Location: Fremont Chamber #4

Frequency	Level	Pol	FCC 90.210		Detector	Azimuth	Height	Comments	Channel
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters		
2107.980	68.7	V	82.3	-13.6	PK	284	1.1	Peak-RB 150 kHz; VB: 150 kHz	
2155.130	64.6	V	82.3	-17.7	PK	277	1.4	Peak-RB 150 kHz; VB: 150 kHz	


Note 1: The field strength limit in the tables above was calculated from the erp/eirp limit detailed in the standard using the free space propagation equation: $E = \sqrt{(30PG)/d}$. This limit is conservative - it does not consider the presence of the ground plane and, for erp limits, the dipole gain (2.2dBi) has not been included. The erp or eirp for all signals with less than 20dB of margin relative to this field strength limit is determined using substitution measurements.

Plots for low channel, power setting = max

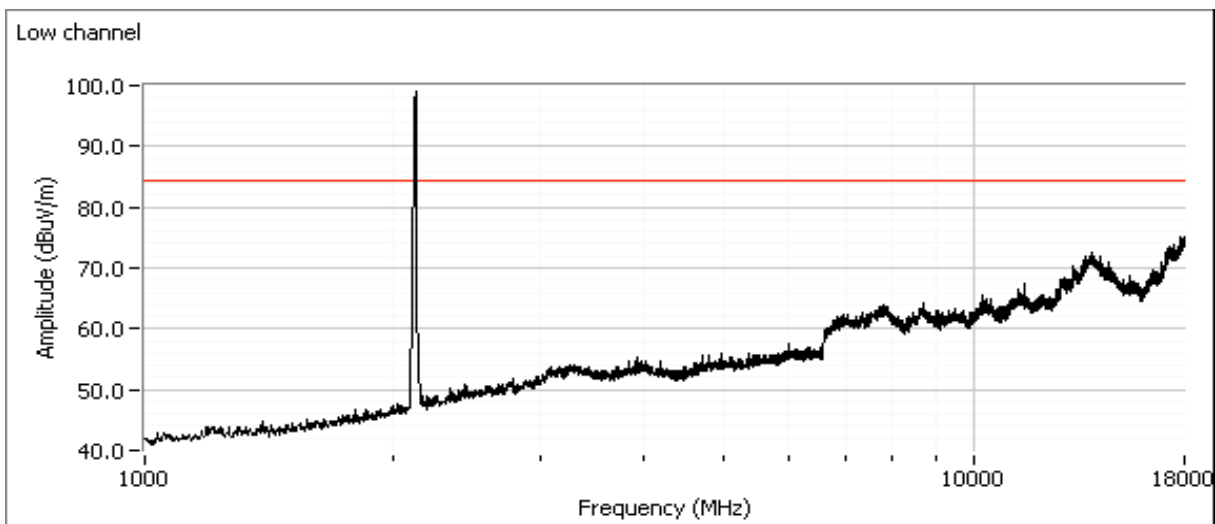


Client: Nextivity Inc.	Job Number: J84755
Model: CELFI-RS240CU	T-Log Number: T84762
Contact: Rama Akella	Account Manager: Sheareen Washington
Standard: FCC Part 15, 27	Class: N/A

Bandedge

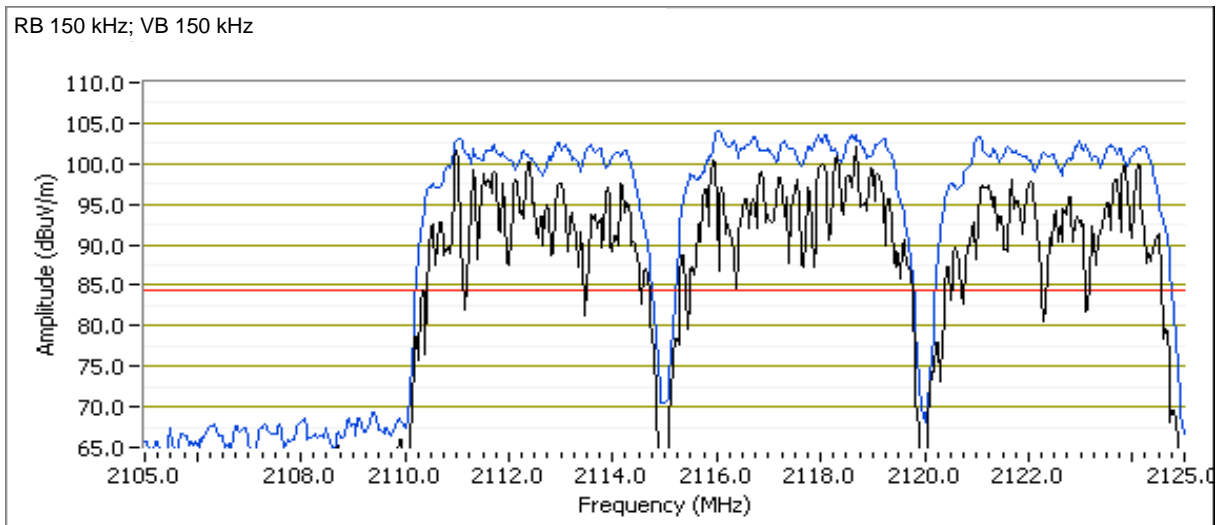


Plots for center channel, power setting = Max

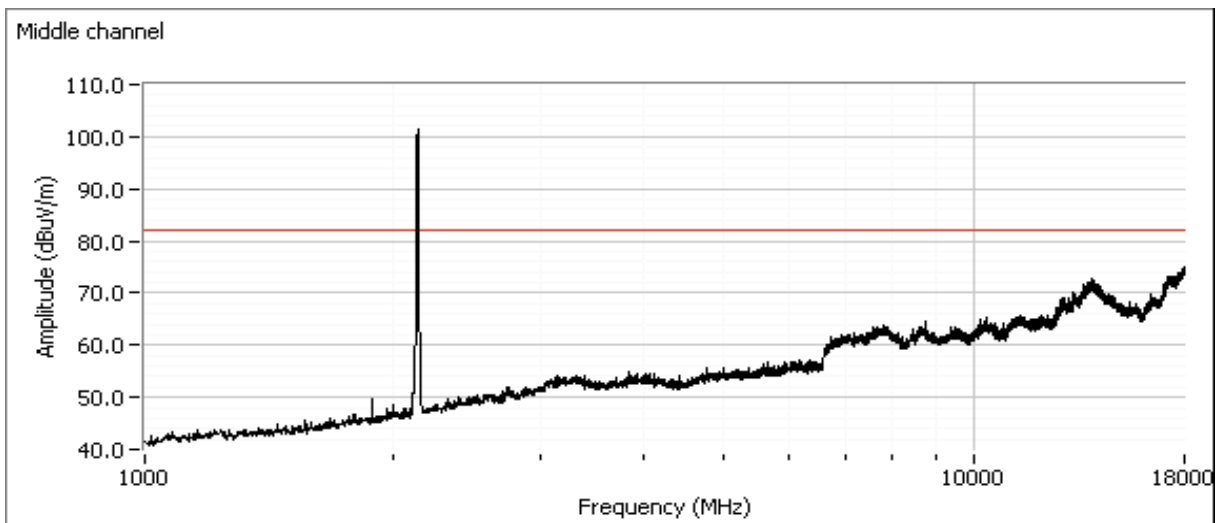


Client:	Nextivity Inc.	Job Number:	J84755
Model:	CELFI-RS240CU	T-Log Number:	T84762
Contact:	Rama Akella	Account Manager:	Sheareen Washington
Standard:	FCC Part 15, 27	Class:	N/A

Plots for high channel, power setting = Max

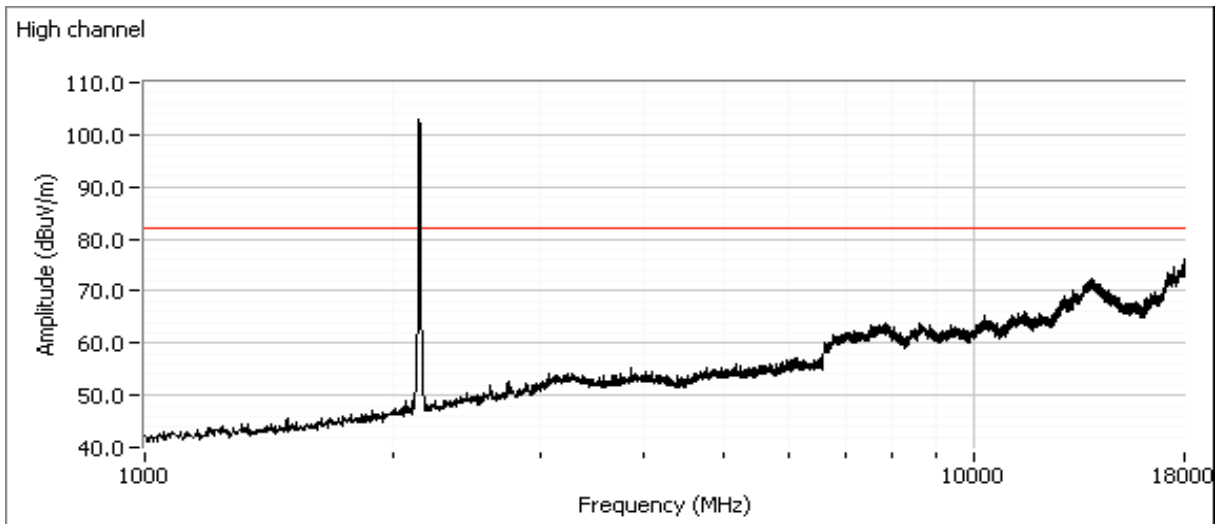

Bandedge

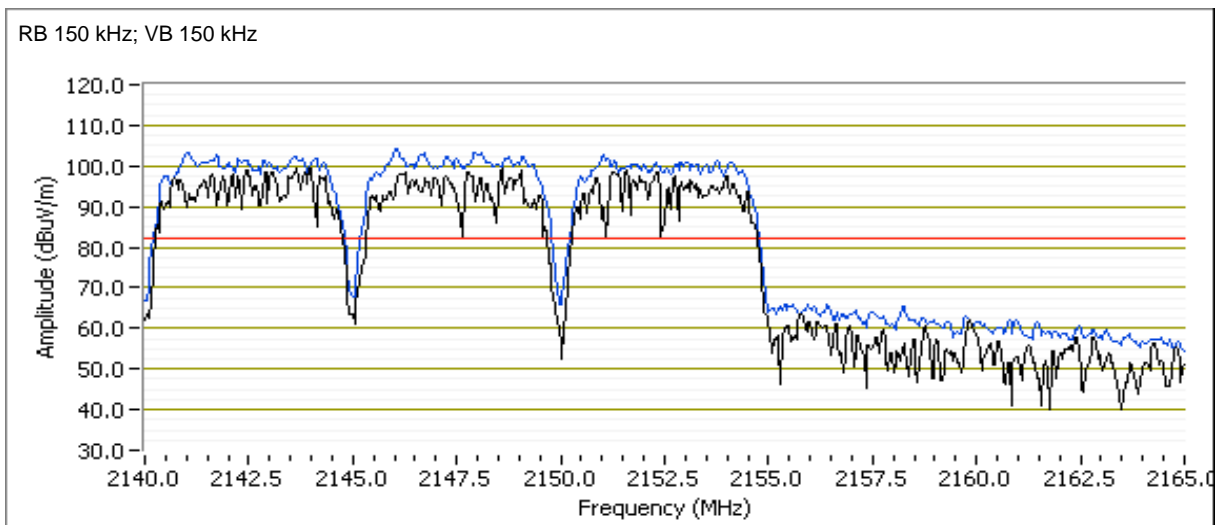



Radio Test Data

Client: Nextivity Inc.	Job Number: J84755
Model: CELFI-RS240CU	T-Log Number: T84762
Contact: Rama Akella	Account Manager: Sheareen Washington
Standard: FCC Part 15, 27	Class: N/A

Run #4b: - Final Field Strength Measurements and Substitution Measurements

EUT Field Strength

Frequency	Level	Pol	FCC 27.53		Detector	Azimuth	Height	Comments	Channel
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters		
2107.980	68.7	V	82.3	-13.6	PK	284	1.1	Peak-RB 150 kHz; VB: 150 kHz	
2155.130	64.6	V	82.3	-17.7	PK	277	1.4	Peak-RB 150 kHz; VB: 150 kHz	

- Note 1: The field strength limit in the tables above was calculated from the erp/eirp limit detailed in the standard using the free space propagation equation: $E = \sqrt{(30PG)/d}$. This limit is conservative - it does not consider the presence of the ground plane and, for erp limits, the dipole gain (2.2dBi) has not been included. The erp or eirp for all signals with less than 20dB of margin relative to this field strength limit is determined using substitution measurements.
- Note 2: Measurements are made with the antenna port terminated.

Substitution measurements

Frequency	Substitution measurements			Site	EUT measurements			eirp Limit	erp Limit	Margin
MHz	Pin ¹	Gain ²	FS ³	Factor ⁴	FS ⁵	eirp (dBm)	erp (dBm)	dBm	dBm	dB
Frequency	Level	Pol	FCC 27.53		Detector	Azimuth	Height	Comments	Channel	
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters			
2107.980	-13.5	8.6	91.9	96.8	68.7	-28.1	-30.3	-13.0		-15.1
2155.130	-13.7	8.9	91.3	96.1	64.6	-31.5	-33.7	-13.0		-18.5

- Note 1: Pin is the input power (dBm) to the substitution antenna
- Note 2: Gain is the gain (dBi) for the substitution antenna.
- Note 3: FS is the field strength (dBuV/m) measured from the substitution antenna.
- Note 4: Site Factor - this is the site factor to convert from a field strength in dBuV/m to an eirp in dBm.
- Note 5: EUT field strength as measured during initial run.



Radio Test Data

Client: Nextivity Inc.	Job Number: J84755
Model: CELFI-RS240CU	T-Log Number: T84762
	Account Manager: Sheareen Washington
Contact: Rama Akella	
Standard: FCC Part 15, 27	Class: N/A

Run #5: Frequency Stability

Date: 10/4/2011

Engineer: M. Birgani

Location: FT Lab #4

Nominal Frequency: 2140.1000 MHz

Frequency Stability Over Temperature

The EUT was soaked at each temperature for a minimum of 30 minutes prior to making the measurements to ensure the EUT and chamber had stabilized at that temperature.

Temperature (Celsius)	Frequency Measured (MHz)	Drift	
		(Hz)	(ppm)
-30	2140.100600	600	0.3
-20	2140.100450	450	0.2
-10	2140.100483	483	0.2
0	2140.100533	533	0.2
10	2140.100400	400	0.2
20	2140.100000	0	0.0
30	2140.100167	167	0.1
40	2140.100134	134	0.1
50	2140.100551	551	0.3
Worst case:		600	0.3

Frequency Stability Over Input Voltage

Nominal Voltage is 120VAC.

Voltage (AC)	Frequency Measured (MHz)	Drift	
		(Hz)	(ppm)
102.0	2140.100000	0	0.0
138.0	2140.100000	0	0.0
Worst case:		0	0.3

Note 1: Maximum drift of fundamental frequency was 100Hz before it shut down at 29.3 VAC.

Client: Nextivity Inc.	Job Number: J84755
Model: CELFI-RS240CU	T-Log Number: T84762
	Account Manager: Sheareen Washington
Contact: Rama Akella	
Standard: FCC Part 15, 27	Class: N/A

Run #6: Out of Band Spurious Emissions, Radiated

Conducted limit (dBm): -13
 Approximate field strength limit @ 3m: 82.3 dBuV/m


The limit is taken from FCC Part 27.53(h), (1 MHz RB and 3 MHz VB) (150 kHz within 1 MHz of the band edge)
 EUT was transmitting on 3 channels simultaneously, at full power on each channel: 1712.5, 1717.5, 1722.5 MHz.

Date: 10/10/2011 Engineer: Rafael Varelas Location: Fremont Chamber #4

Frequency MHz	Level dB μ V/m	Pol v/h	FCC 90.210		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments	Channel
			Limit	Margin					
38.116	33.2	V	82.2	-49.0	Peak	330	1.0		
65.711	27.8	V	82.2	-54.4	Peak	181	1.0		
105.752	27.9	V	82.2	-54.3	Peak	277	1.0		
131.182	26.5	H	82.2	-55.7	Peak	88	2.5		

Note 1: The field strength limit in the tables above was calculated from the erp/eirp limit detailed in the standard using the free space propagation equation: $E = \sqrt{(30PG)/d}$. This limit is conservative - it does not consider the presence of the ground plane and, for erp limits, the dipole gain (2.2dBi) has not been included. The erp or eirp for all signals with less than 20dB of margin relative to this field strength limit is determined using substitution measurements.

Note 2: Emissions observed below 1 GHz were not affected by changing channels.

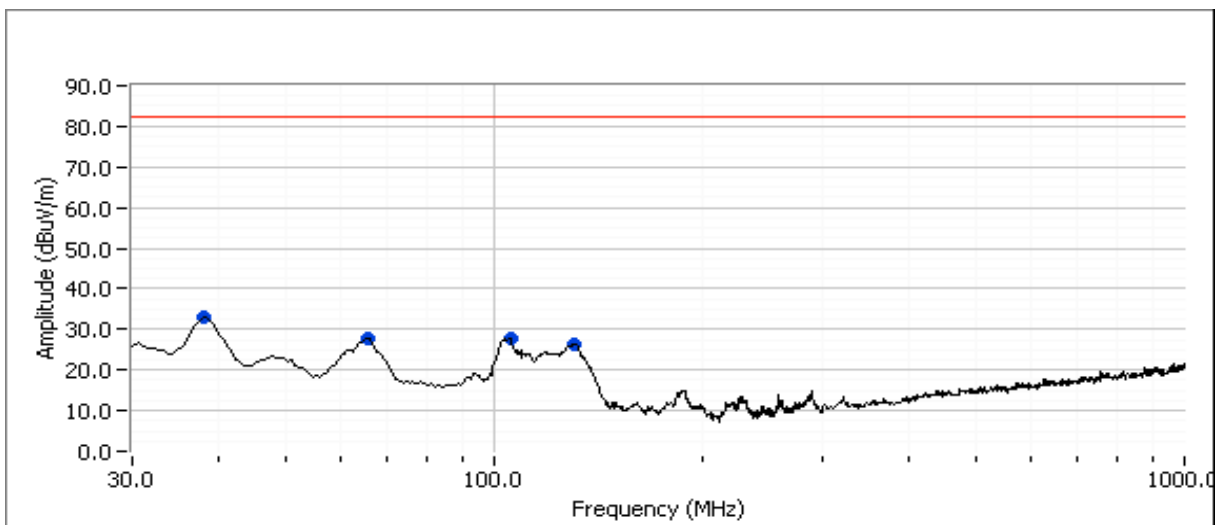

Client:	Nextivity Inc.	Job Number:	J84755
Model:	CELFI-RS240CU	T-Log Number:	T84762
Contact:	Rama Akella	Account Manager:	Sheareen Washington
Standard:	FCC Part 15, 27	Class:	B

Radiated Emissions

(Elliott Laboratories Fremont Facility, Semi-Anechoic Chamber)

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 9/29/2011	Config. Used: 1
Test Engineer: Mehran Birgani	Config Change: None
Test Location: Fremont Chamber #3	EUT Voltage: 120V/60Hz

General Test Configuration

The EUT and any local support equipment were located on the turntable for radiated emissions testing.

The test distance and extrapolation factor (if applicable) are detailed under each run description.

Note, preliminary testing indicates that the emissions were maximized by orientation of the EUT and elevation of the measurement antenna. Maximized testing indicated that the emissions were maximized by orientation of the EUT, elevation of the measurement antenna, and manipulation of the EUT's interface cables.

Ambient Conditions: Temperature: 18-23 °C
 Rel. Humidity: 30-40 %

Summary of Results

Run #	Test Performed	Limit	Result	Margin
1	Radiated Emissions 30 MHz - 18 GHz Maximized	FCC Class B	PASS	30.8dBµV/m @ 36.40MHz (-9.2dB)
2	Radiated Emissions 30 MHz - 18 GHz Maximized	FCC Class B	PASS	39.1dBµV/m @ 4263.3MHz (-14.9dB)

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.


Frequency Range	Test Distance	Limit Distance	Extrapolation Factor
1 - 10 GHz	3	3	0.0
10 - 18 GHz	1	3	-9.5

Client:	Nextivity Inc.	Job Number:	J84755
Model:	CELFI-RS240CU	T-Log Number:	T84762
Contact:	Rama Akella	Account Manager:	Sheareen Washington
Standard:	FCC Part 15, 27	Class:	B


Run #1: Maximized Readings, 30 - 18000 MHz (Receive at 5232 MHz)

Frequency MHz	Level dB μ V/m	Pol v/h	FCC Class B		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
36.401	32.4	V	40.0	-7.6	Peak	266	1.0	
36.401	30.8	V	40.0	-9.2	QP	265	1.0	
86.814	29.8	V	40.0	-10.2	Peak	97	1.0	
131.182	32.8	V	43.5	-10.7	Peak	236	1.0	
2448.330	41.8	H	54.0	-12.2	Peak	97	2.5	Peak reading with average limit
4263.330	38.9	H	54.0	-15.1	Peak	5	1.3	Peak reading with average limit
1898.330	36.1	V	54.0	-17.9	Peak	353	2.5	Peak reading with average limit

- Note 1: Above 1 GHz, the limit is based on an average measurement. In addition, the peak reading of any emission above 1 GHz can not exceed the average limit by more than 20 dB.
- Note 2: As there were no emissions observed above 14 GHz during the preliminary scan, or the size of the EUT did not exceed 1.6m above the ground plane, additional measures were not required to ensure that the emissions from the EUT were maintained within the beam-width of the antenna during antenna height maximization.

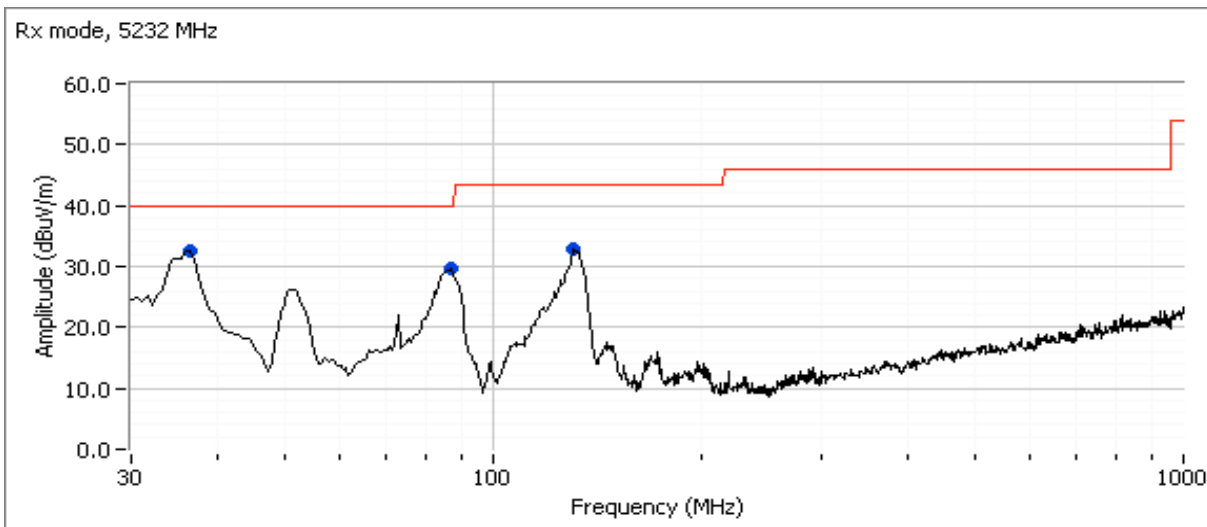

Client: Nextivity Inc.	Job Number: J84755
Model: CELFI-RS240CU	T-Log Number: T84762
Contact: Rama Akella	Account Manager: Sheareen Washington
Standard: FCC Part 15, 27	Class: B

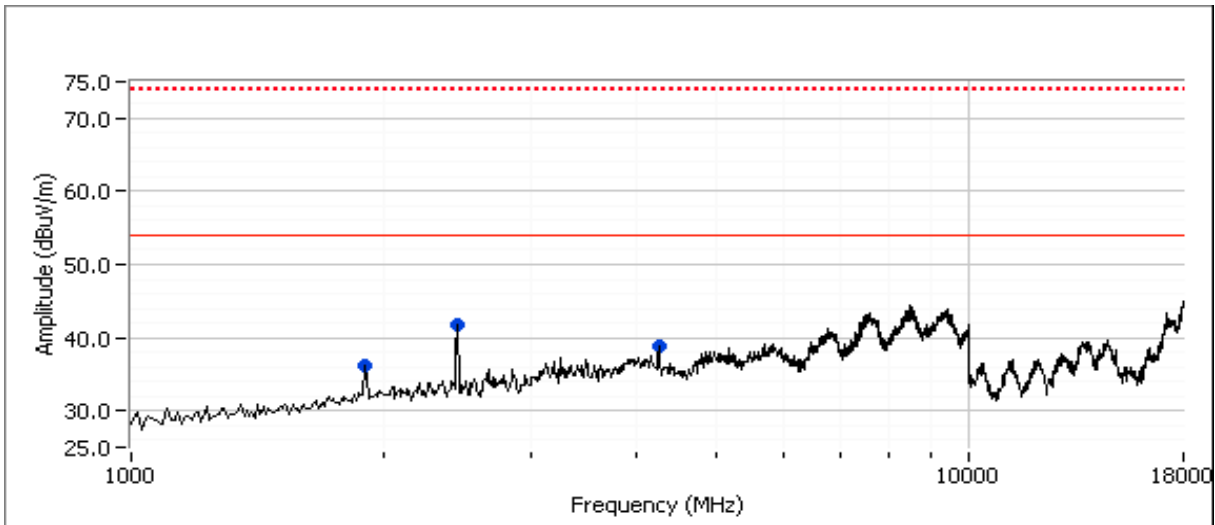


Client: Nextivity Inc.	Job Number: J84755
Model: CELFI-RS240CU	T-Log Number: T84762
Contact: Rama Akella	Account Manager: Sheareen Washington
Standard: FCC Part 15, 27	Class: B

Run #2: Maximized Readings, 1000 - 18000 MHz (Receive at 5285 MHz & 2132.5 MHz)


Frequency MHz	Level dB μ V/m	Pol v/h	FCC Class B		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
4263.330	39.1	H	54.0	-14.9	Peak	134	1.3	

- Note 1: Above 1 GHz, the limit is based on an average measurement. In addition, the peak reading of any emission above 1 GHz can not exceed the average limit by more than 20 dB.
- Note 2: As there were no emissions observed above 14 GHz during the preliminary scan, or the size of the EUT did not exceed 1.6m above the ground plane, additional measures were not required to ensure that the emissions from the EUT were maintained within the beam-width of the antenna during antenna height maximization.
- Note 3: Since the 30-1000 MHz scans in Run 1 above & Run 1b in Tx mode were almost identical & showed no radio related emissions, that scan was not repeated for this channel.

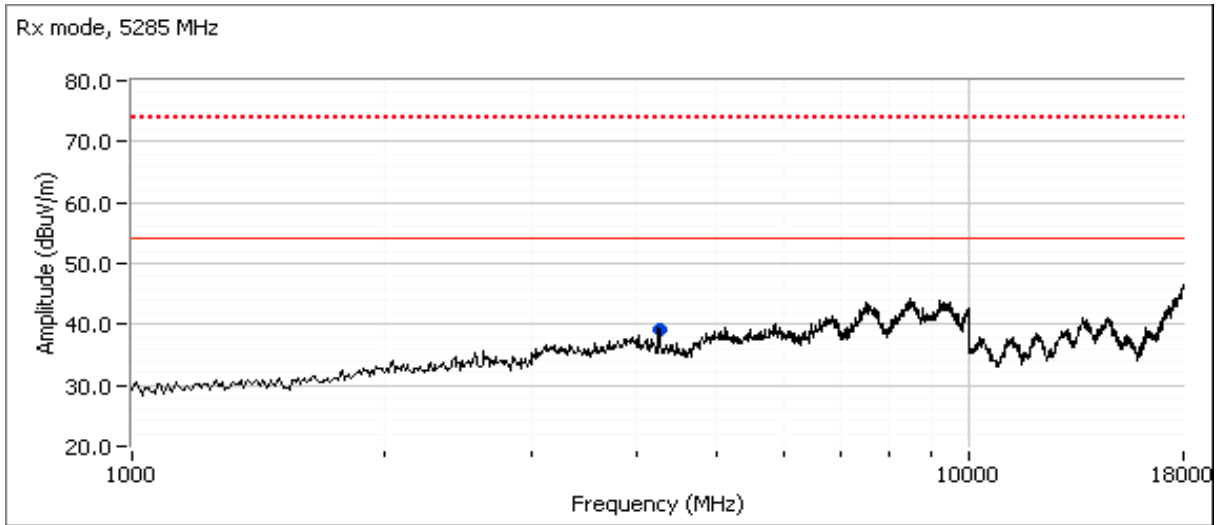

Client:	Nextivity Inc.	Job Number:	J84755
Model:	CELFI-RS240CU	T-Log Number:	T84762
Contact:	Rama Akella	Account Manager:	Sheareen Washington
Standard:	FCC Part 15, 27	Class:	B

Test Configuration Photograph(s)

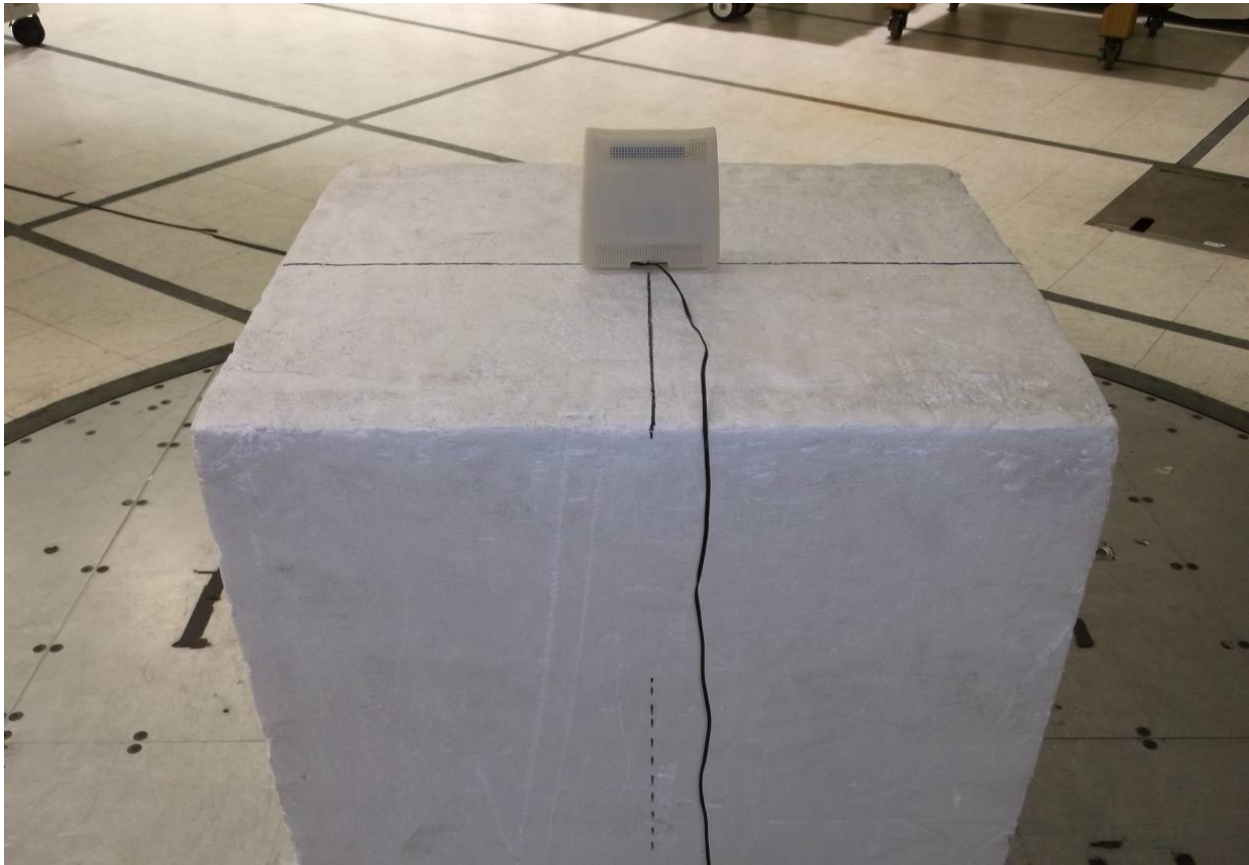

End of Report

This page is intentionally blank and marks the last page of this test report.