



---

**Choose certainty.  
Add value.**

# Report On

Application for Grant of Equipment Authorization of the  
Nextivity Inc.

Cel-Fi DUO RAINIER Smart Cellular Signal Booster

FCC CFR 47 Part 20  
RSS-131

Report No. SD72116210-0416H

June 2016

FCC ID: NU: YETD32-21266NU  
CU: YETD32-21266CU  
IC: NU: 9298A-D3221266NU  
CU: 9298A-D3221266CU  
Report No. SD72116210-0416H



|                           |                                                                                                                                                                                               |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>REPORT ON</b>          | Radio Testing of the<br>Nextivity Inc.<br>Smart Cellular Signal Booster                                                                                                                       |
| <b>TEST REPORT NUMBER</b> | SD72116210-0416H                                                                                                                                                                              |
| <b>PREPARED FOR</b>       | Nextivity Inc.<br>12230 World Trade Drive, Suite 250<br>San Diego, CA 92128                                                                                                                   |
| <b>CONTACT PERSON</b>     | CK Li<br>Sr. Principal Engineer, Regulatory<br>(858) 829-1692<br>CLi@NextivityInc.com                                                                                                         |
| <b>PREPARED BY</b>        | <br>Xiaoying Zhang<br><b>Name</b><br>Authorized Signatory<br>Title: EMC/Wireless Test Engineer               |
| <b>APPROVED BY</b>        | <br>Juan M. Gonzalez<br><b>Name</b><br>Authorized Signatory<br>Title: Commercial Wireless EMC Lab Manager |
| <b>DATED</b>              | June 02, 2016                                                                                                                                                                                 |

FCC ID: NU: YETD32-21266NU  
CU: YETD32-21266CU  
IC: NU: 9298A-D3221266NU  
CU: 9298A-D3221266CU  
Report No. SD72116210-0416H



## Revision History

| SD72116210-0416H<br>Nextivity Inc.<br>Cel-Fi DUO RAINIER<br>Smart Cellular Signal Booster |                 |              |        |                   |                 |
|-------------------------------------------------------------------------------------------|-----------------|--------------|--------|-------------------|-----------------|
| DATE                                                                                      | OLD REVISION    | NEW REVISION | REASON | PAGES<br>AFFECTED | APPROVED BY     |
| 06/02/16                                                                                  | Initial Release |              |        |                   | Juan M Gonzalez |
|                                                                                           |                 |              |        |                   |                 |
|                                                                                           |                 |              |        |                   |                 |
|                                                                                           |                 |              |        |                   |                 |
|                                                                                           |                 |              |        |                   |                 |



## CONTENTS

| Section  | Page No                                                         |
|----------|-----------------------------------------------------------------|
| <b>1</b> | <b>REPORT SUMMARY ..... 5</b>                                   |
| 1.1      | Introduction ..... 6                                            |
| 1.2      | Brief Summary of Results..... 7                                 |
| 1.3      | Product Information ..... 8                                     |
| 1.4      | EUT Test configuration..... 10                                  |
| 1.5      | Deviations from the Standard..... 15                            |
| 1.6      | Modification Record ..... 15                                    |
| 1.7      | Test Methodology..... 15                                        |
| 1.8      | Test Facility Location..... 15                                  |
| 1.9      | Test Facility Registration ..... 15                             |
| <b>2</b> | <b>TEST DETAILS ..... 17</b>                                    |
| 2.1      | Authorized Frequency Band Verification ..... 18                 |
| 2.2      | Authorized CMRS Provider ..... 21                               |
| 2.3      | Maximum Power Measurement and Booster Gain Computation ..... 27 |
| 2.4      | Intermodulation Product ..... 29                                |
| 2.5      | Out of Band Emissions ..... 33                                  |
| 2.6      | Noise Limit ..... 38                                            |
| 2.7      | Uplink Inactivity ..... 41                                      |
| 2.8      | Variable Booster Gain ..... 44                                  |
| 2.9      | Oscillation Detection..... 48                                   |
| 2.10     | Out of Band Gain Limit..... 51                                  |
| <b>3</b> | <b>TEST EQUIPMENT USED ..... 54</b>                             |
| 3.1      | Test Equipment Used ..... 55                                    |
| 3.2      | Measurement Uncertainty ..... 56                                |
| <b>4</b> | <b>Diagram Of Test Setup ..... 57</b>                           |
| 4.1      | Test Setup Diagram ..... 58                                     |
| <b>5</b> | <b>ACCREDITATION, DISCLAIMERS AND COPYRIGHT ..... 63</b>        |
| 5.1      | Accreditation, Disclaimers and Copyright..... 64                |

FCC ID: NU: YETD32-21266NU  
CU: YETD32-21266CU  
IC: NU: 9298A-D3221266NU  
CU: 9298A-D3221266CU  
Report No. SD72116210-0416H



## **SECTION 1**

### **REPORT SUMMARY**

**Radio Testing of the  
Nextivity Inc.  
Cel-Fi DUO RAINIER Smart Cellular Signal Booster**



## 1.1 INTRODUCTION

The information contained in this report is intended to show verification of the Nextivity Inc. Smart Cellular Signal Booster to the requirements of the following:

- FCC CFR 47 Part 20
- RSS-131

|                               |                                                                                                                                                                                                                                                                                                            |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Objective                     | To perform Radio Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.                                                                                                                                                      |
| Manufacturer                  | Nextivity Inc.                                                                                                                                                                                                                                                                                             |
| Model Name                    | Cel-Fi DUO RAINIER                                                                                                                                                                                                                                                                                         |
| Model Number(s)               | D32-2/12/66NU<br>D32-2/12/66CU                                                                                                                                                                                                                                                                             |
| FCC ID Number                 | NU: YETD32-21266NU<br>CU: YETD32-21266CU                                                                                                                                                                                                                                                                   |
| IC Number                     | NU: 9298A-D3221266NU<br>CU: 9298A-D3221266CU                                                                                                                                                                                                                                                               |
| Serial Number(s)              | 296546000554 (NU) and 297546000407 (CU)<br>296546000622 (NU) and 297546000353 (CU)                                                                                                                                                                                                                         |
| Number of Samples Tested      | 4                                                                                                                                                                                                                                                                                                          |
| Test Specification/Issue/Date | <ul style="list-style-type: none"> <li>• FCC CRF 47 Part 20 (October 1, 2015).</li> <li>• RSS-131 – Zone Enhancers (Issue 3, January 2016)</li> <li>• KDB935210 (D04 Provider Specific booster Measurements v01r01) Provider-Specific Consumer Signal Booster Compliance Measurements Guidance.</li> </ul> |
| Start of Test                 | May 10, 2016                                                                                                                                                                                                                                                                                               |
| Finish of Test                | May 19, 2016                                                                                                                                                                                                                                                                                               |
| Name of Engineer(s)           | Xiaoying Zhang                                                                                                                                                                                                                                                                                             |
| Related Document(s)           | <ul style="list-style-type: none"> <li>• Supporting documents for EUT certification are separate exhibits.</li> </ul>                                                                                                                                                                                      |



## 1.2 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out in accordance with FCC CFR 47 Part 20 with cross-reference to the corresponding KDB935210 D04 is shown below.

| Section    | Spec Clause                                      |               | Test Description                                                                 | Result     |
|------------|--------------------------------------------------|---------------|----------------------------------------------------------------------------------|------------|
|            | FCC Part 20                                      | KDB935210 D04 |                                                                                  |            |
| 2.1<br>2.2 | 20.21 (e)(3) Frequency Bands<br>20.21 (a)(4)     | 7.1           | Authorized Frequency Band Verification<br>Test and authorized CMRS provider test | Compliant* |
| 2.3        | 20.21(e)(9)(i)(D) Power Limits                   | 7.2           | Maximum Power measurement procedure                                              | Compliant* |
|            | 20.21(e)(9)(i)(B) Bidirectional Capability       | 7.3           | Maximum Booster Gain Computer                                                    |            |
|            | 20.21(e)(9)(i)(C)(1) and (2) Booster Gain Limits |               |                                                                                  |            |
| 2.4        | 20.21(e)(9)(i)(G) Intermodulation Limit          | 7.4           | Intermodulation Product                                                          | Compliant* |
| 2.5        | 20.21(e)(9)(i)(F) Out of Band Gain Limit         | 7.5           | Out-of-Band Emissions                                                            | Compliant  |
| -          | 2.1051                                           | 7.6           | Conducted Spurious Emissions                                                     | N/A**      |
| 2.6        | 20.21(e)(9)(i)(A) Noise Limits                   | 7.7           | Noise Limits                                                                     | Compliant* |
|            | 20.21(e)(9)(i)(I) Transmit Power Off Mode        |               |                                                                                  |            |
| 2.7        | 20.21(e)(9)(i)(J) Uplink Inactivity              | 7.8           | Uplink inactivity                                                                | Compliant* |
| 2.8        | 20.21(e)(9)(i)(C)(1) Booster Gain Limits         | 7.9           | Variable Booster Gain                                                            | Compliant* |
|            | 20.21(e)(9)(i)(I) Transmit Power Off Mode        |               |                                                                                  |            |
| -          | 2.1049                                           | 7.10          | Occupied Bandwidth                                                               | N/A*       |
| 2.9        | 20.21(e)(9)(ii)(A) Anti-Oscillation              | 7.11          | Oscillation Detection                                                            |            |
| -          | 2.1053                                           | 7.12          | Radiated Spurious Emissions                                                      | N/A*       |
| -          | 20.21(e)(9)(i)(B) Bidirectional Capability       | 7.13          | Spectrum Block Filtering                                                         | N/A**      |
|            | 20.21(e)(3) Frequency Band                       |               |                                                                                  |            |
| 2.10       | 20.21(e)(9)(i)(E) Out of Band Gain Limit         | 7.14          | Out of Band Gain                                                                 | Compliant* |
| -          | 2.1055                                           | 7.15          | Frequency Stability                                                              | N/A*       |

Compliant\*- A variant of the EUT was previously approved under FCC IDs YETD32-21366NU and YETD32-21366CU under model Number D32-2/13/66. The EUT is identical with this model with the exception of LTE Band 12 support instead of LTE B13. All measurement according to FCC Part 20 for LTE B2 and LTE Band 4 were from this variant and covered under test report SD72112724-0116J

N/A\* - Not Applicable. Different Standard Applies; Refer to test report SD72116210-0416F for LTE Band 2, SD72116210-0416E for LTE Band 12 and SD72116210-0416G for LTE Band 4.

N/A\*\* - Not Applicable. The EUT does not utilize spectrum block filtering.

### **1.3 PRODUCT INFORMATION**

#### **1.3.1 Technical Description**

The Equipment Under Test (EUT) was a Nextivity Inc. Cel-Fi DUO RAINIER Smart Cellular Signal Booster. The EUT is a LTE Signal Booster to improve voice and data cellular performance in large enterprise environments. The EUT consists of two separate units: the Network Unit (NU) and the Coverage Unit (CU). The NU comprises a transmitter and receiver which communicate with the cell tower and the CU. Users place the NU in an area with the strongest signal from the carrier network. The CU is then placed in the center of the home or office, or in the area where the best signal quality is best needed. The NU and CU are placed at varying distances apart and are communicated via Ethernet cables. The LTE Band 12 function of the EUT were verified in this test report.



### 1.3.2 EUT General Description

| EUT Description                         | Smart Cellular Signal Booster                                                                                                         |    |    |       |       |
|-----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|----|----|-------|-------|
| Model Name                              | Cel-Fi DUO RAINIER                                                                                                                    |    |    |       |       |
| Model Number(s)                         | D32-2/12/66NU<br>D32-2/12/66CU                                                                                                        |    |    |       |       |
| Rated Voltage                           | 12V DC via external AC/DC adapter                                                                                                     |    |    |       |       |
| Mode Verified                           | LTE Band 12                                                                                                                           |    |    |       |       |
| Frequency Bands                         | Band 12:<br>NU: 699 - 716MHz<br>CU: 729 - 746MHz                                                                                      |    |    |       |       |
| Channel Bandwidth                       | 5MHz, 10MHz                                                                                                                           |    |    |       |       |
| Capability                              | LTE Band 2, Band 12, Band 4/UNII and BT-LE                                                                                            |    |    |       |       |
| Primary Unit (EUT)                      | <input type="checkbox"/> Production<br><input checked="" type="checkbox"/> Pre-Production<br><input type="checkbox"/> Engineering     |    |    |       |       |
| Manufacturer Declared Temperature Range | 0°C to 40°C                                                                                                                           |    |    |       |       |
| Antenna Type                            | PCB PIFA                                                                                                                              |    |    |       |       |
| Manufacturer                            | Nextivity Inc.                                                                                                                        |    |    |       |       |
| Antenna Model                           | N/A                                                                                                                                   |    |    |       |       |
| Antenna Gain                            | <table border="1"> <thead> <tr> <th>NU</th><th>CU</th></tr> </thead> <tbody> <tr> <td>0 dBi</td><td>0 dBi</td></tr> </tbody> </table> | NU | CU | 0 dBi | 0 dBi |
| NU                                      | CU                                                                                                                                    |    |    |       |       |
| 0 dBi                                   | 0 dBi                                                                                                                                 |    |    |       |       |

## 1.4 EUT TEST CONFIGURATION

### 1.4.1 Test Configuration Description

| Test Configuration | Description                                                                                                                                                                                                                                                                          |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A                  | Test Mode - Downlink (CU TX). Input signal is applied to B12 antenna port of NU. Output is monitored from B12 Top antenna port of CU.<br>(refer to 1.4.4 Figure 2)                                                                                                                   |
| B                  | Test Mode - Uplink (NU TX). Input signal is applied to B12 antenna port of CU. Output is monitored from B12 Top antenna port of NU.<br>(refer to 1.4.4 Figure 3)                                                                                                                     |
| C                  | Normal Mode - Downlink (CU TX). Base Station Simulator is employed to send a modulated signal to B12 antenna port of NU. B12 Top antenna port of CU is terminated with a 50Ω load.<br>(refer to 1.4.4 Figure 1)                                                                      |
| D                  | Normal Mode - Uplink (NU TX). Base Station Simulator is employed to send a modulated signal to B12 antenna port of NU. Input signal is applied to B12 antenna port of CU.<br>(refer to 1.4.4 Figure 1)                                                                               |
| E                  | Inter-modulation. Test setup identical to Test Configuration A and B above with the addition of another signal applied to the input of the EUT. A coupler was used in the setup to ensure that the additional signal is directed to the EUT input port.<br>(refer to 1.4.4 Figure 4) |
| F                  | Max Downlink noise limit testing - A 50 Ohm Termination is connected to the NU antenna port and Measure the Noise Limit at the CU antenna port.<br>(refer to 1.4.4 Figure 5)                                                                                                         |
| G                  | Max Uplink noise limit testing - A 50 Ohm Termination is connected to the CU antenna port. A signal is connected to a step attenuator and then applied to the NU antenna port. Output is monitored from B12 Top antenna port of NU.<br>(refer to 1.4.4 Figure 6)                     |
| H                  | Max Downlink noise limit testing - A 50 Ohm Termination is connected to the CU antenna port. A signal is connected to a step attenuator and then applied to the NU antenna port. Output is monitored from B12 Top antenna port of CU.<br>(refer to 1.4.4 Figure 6)                   |

### 1.4.2 EUT Exercise Software

Manufacturer provided a configuration software (conformanceTest.exe)

### 1.4.3 Support Equipment and I/O cables

| Manufacturer    | Equipment/Cable                             | Description                                                                 |
|-----------------|---------------------------------------------|-----------------------------------------------------------------------------|
| Hon-Kwang       | I.T.E Power Supply (2X)                     | Model HK-AX-120A167-US S/N: FB0000101 and FB0000075                         |
| -               | Support USB cable                           | 1.75 meters, shielded Type A to Micro B connector                           |
| Nextivity       | Support USB cable                           | Custom 1.0 meter shielded USB Type A to DB9 for the Shielded Test Enclosure |
| Sony            | Support Laptop                              | M/N PCG-31311L S/N 27545534 3006488                                         |
| Sony            | Support Laptop AC Adapter                   | M/N PCGA-AC19V9 S/N 147839091 0023259                                       |
| Rhode & Schwarz | Support Wideband Radio Communication Tester | M/N CMW500 S/N 1201.0002k50/103829                                          |
| Mini-Circuits   | Support Coaxial SMA Fixed Attenuator (x4)   | M/N VAT-30W2 30dB DC-6GHz                                                   |
| Agilent         | 11dB Step Attenuator                        | M/N 8494B<br>Frequency Range DC - 18GHz<br>S/N 2812A17193                   |
| Agilent         | 110dB Step Attenuator                       | M/N 8496B<br>Frequency Range DC - 18GHz<br>S/N MY42143874                   |
| K&L             | 1500 - 3000 MHz Tuneable Bypass Filter      | M/N 5BT-1500/3000-5-N/N                                                     |
| Ramsey          | Support Shielded Test Enclosure             | M/N STE3300 S/N 3676 with custom USB cable and AC/DC Adapter                |

#### 1.4.4 Simplified Test Configuration Diagram

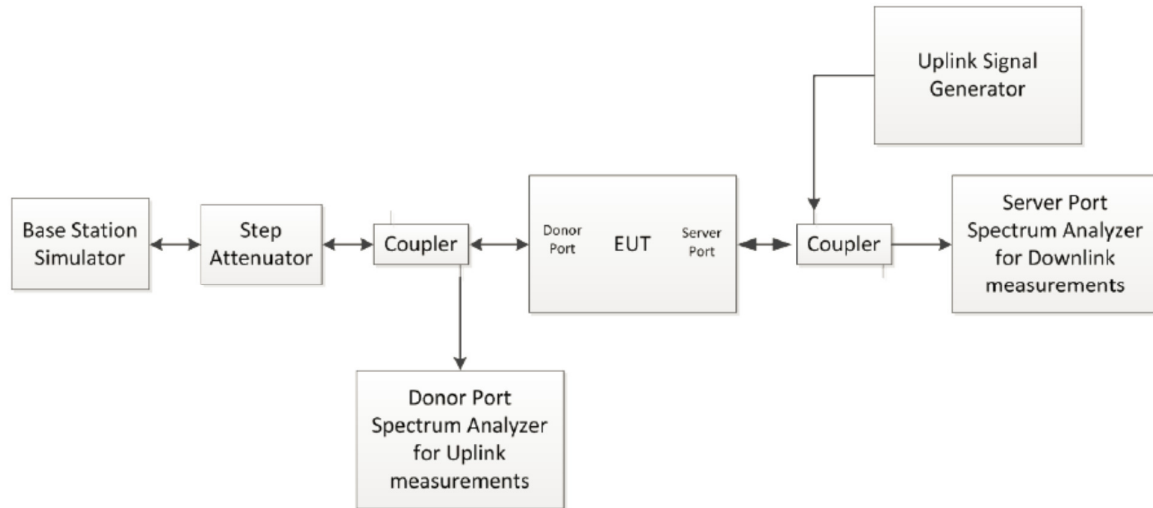


Figure 1: Test Configuration in Normal Mode

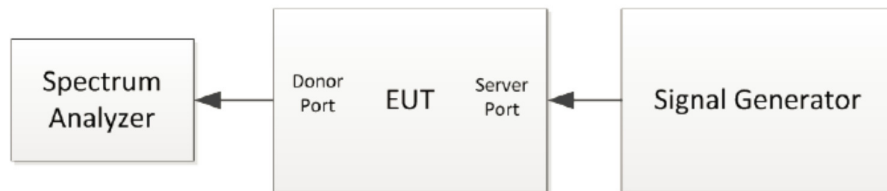


Figure 2: Uplink Test Configuration in Test Mode



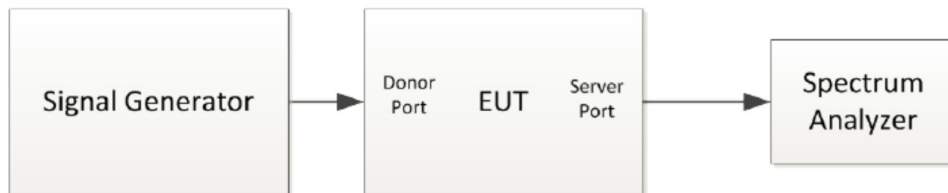



Figure 3: Downlink Test Configuration in Test Mode

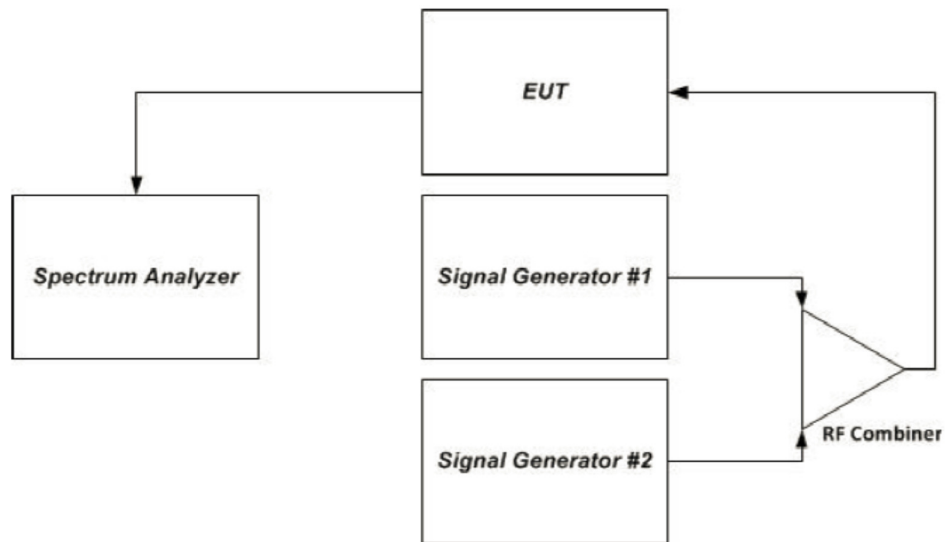

**Figure 4 – Intermodulation product instrumentation test setup**

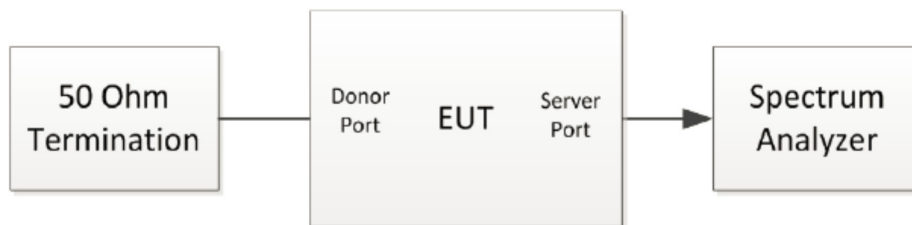

**Figure 5: Maximum downlink noise limit test configuration**

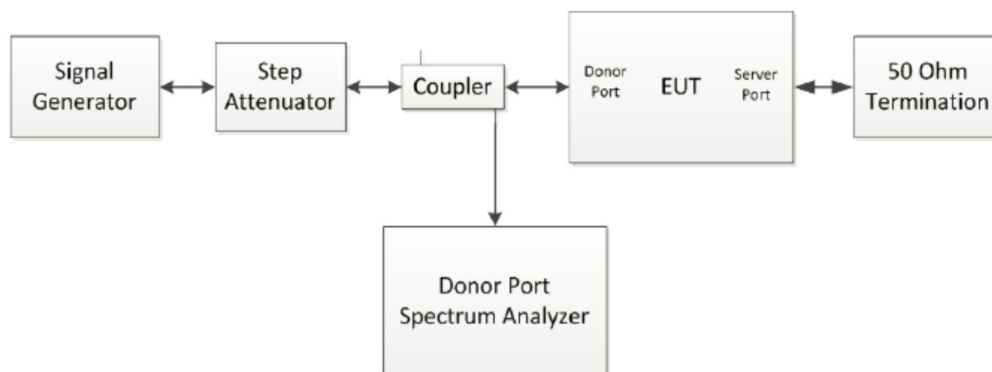

**Figure 6: Uplink RSSI dependent noise limit test configuration**

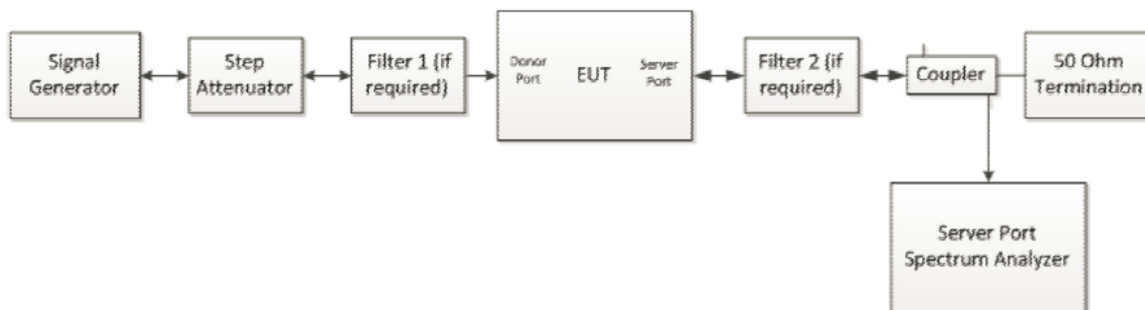


Figure 7: Downlink RSSI dependent noise limit test configuration



## 1.5 DEVIATIONS FROM THE STANDARD

No deviations from the applicable test standards or test plan were made during testing.

## 1.6 MODIFICATION RECORD

| Description of Modification                                                                    | Modification Fitted By | Date Modification Fitted |
|------------------------------------------------------------------------------------------------|------------------------|--------------------------|
| Serial Number 296546000554 (NU) and 297546000407 (CU), 296546000622 (NU) and 297546000353 (CU) |                        |                          |
| N/A                                                                                            |                        |                          |

The table above details modifications made to the EUT during the test programme. The modifications incorporated during each test (if relevant) are recorded on the appropriate test pages.

## 1.7 TEST METHODOLOGY

All measurements contained in this report were conducted as per KDB935210 D04 Provider-Specific Consumer Signal Boosters Compliance Measurements Guidance (January 5, 2015).

## 1.8 TEST FACILITY LOCATION

### 1.8.1 TÜV SÜD America Inc. (Mira Mesa)

10040 Mesa Rim Road, San Diego, CA 92121-2912 (32.901268,-117.177681). Phone: 858 678 1400 FAX: 858-546 0364

### 1.8.2 TÜV SÜD America Inc. (Rancho Bernardo)

Building #8, 16530 Via Esprillo, San Diego, CA 92127-1708 (33.018644,-117.092409). Phone: 858 942 5542 Fax: 858 546 0364.

## 1.9 TEST FACILITY REGISTRATION

### 1.9.1 FCC – Registration No.: US1146

TUV SUD America Inc. (San Diego), is an accredited test facility with the site description report on file and has met all the requirements specified in §2.948 of the FCC rules. The acceptance letter from the FCC is maintained in our files and the Registration is US1146.

FCC ID: NU: YETD32-21266NU  
CU: YETD32-21266CU  
IC: NU: 9298A-D3221266NU  
CU: 9298A-D3221266CU  
Report No. SD72116210-0416H



**1.9.2 Innovation, Science and Economic Development Canada Registration No.: 3067A**

The 10m Semi-anechoic chamber of TÜV SÜD America Inc. (San Diego) has been registered by Certification and Engineering Bureau of Innovation, Science and Economic Development Canada for radio equipment testing with Registration No. 3067A.

FCC ID: NU: YETD32-21266NU  
CU: YETD32-21266CU  
IC: NU: 9298A-D3221266NU  
CU: 9298A-D3221266CU  
Report No. SD72116210-0416H



## **SECTION 2**

### **TEST DETAILS**

**Radio Testing of the  
Nextivity Inc.  
Cel-Fi DUO RAINIER Smart Cellular Signal Booster**



## **2.1 AUTHORIZED FREQUENCY BAND VERIFICATION**

### **2.1.1 Specification Reference**

FCC 47 CFR Part 20, Clause 20.21 (e)(3)  
FCC 47 CFR Part 20, Clause 20.21(a)(4)  
KDB935210 D04, Clause 7.1

### **2.1.2 Standard Applicable**

FCC 47 CFR Part 20, Clause 20.21 (e)(3) Frequency Bands:  
Consumer Signal Boosters must be designed and manufactured such that they only operate on the frequencies used for the provision of subscriber-based services under parts 22 (Cellular), 24 (Broadband PCS), 27 (AWS-1, 700 MHz Lower A-E Blocks, and 700 MHz Upper C Block), and 90 (Specialized Mobile Radio) of this chapter. The Commission will not certificate any Consumer Signal Boosters for operation on part 90 of this chapter (Specialized Mobile Radio) frequencies until the Commission releases a public notice announcing the date Consumer Signal Boosters may be used in the band.

FCC 47 CFR Part 20, Clause 20.21(a)(4) Self Monitoring:  
The subscriber operates the Consumer Signal Booster on frequencies used for the provision of subscriberbased services under parts 22 (Cellular), 24 (Broadband PCS), 27 (AWS-1, 700 MHz Lower A-E Blocks, and 700 MHz Upper C Block), and 90 (Specialized Mobile Radio) of this chapter. Operation on part 90 (Specialized Mobile Radio) frequencies is permitted upon the Commission's release of a public notice announcing the date Consumer Signal Boosters may be used in the band;

### **2.1.3 Equipment Under Test and Modification State**

Serial No: 296546000554 (NU) and 297546000407 (CU) / Test Configuration A and B

### **2.1.4 Date of Test/Initial of test personnel who performed the test**

May 11, 2016/XYZ

### **2.1.5 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.1.6 Environmental Conditions**


Test performed at TÜV SÜD America Inc. Rancho Bernardo facility.

|                     |         |
|---------------------|---------|
| Ambient Temperature | 27.7°C  |
| Relative Humidity   | 45.8%   |
| ATM Pressure        | 99.0kPa |


## 2.1.7 Additional Observations

- 1) This is conducted Test. Test procedure is per Section 7.1.1 of KDB935210 (D04 Provider Specific Booster Measurements v01r01). Appropriate offset (line losses) applied.
- 2) The EUT operated in Test Mode, with the gain manually set to the maximum gain and a minimum bandwidth setting (5MHz).
- 3) Setup the EUT according to Figure 2 or 3 of Section 6.3.3 of KDB935210 (D04 Provider Specific Booster Measurements v01r01) as appropriate.
- 4) Evaluations are conducted at CU and NU antenna ports B12.
- 5) Both uplink and downlink bands for LTE B12 were tested.
- 6) The signal generator was set to transmit a 5MHz LTE signal.
- 7) DL: B12:729 – 746MHz;  
 UL: B12:699 – 716MHz;

## 2.1.8 Test Results

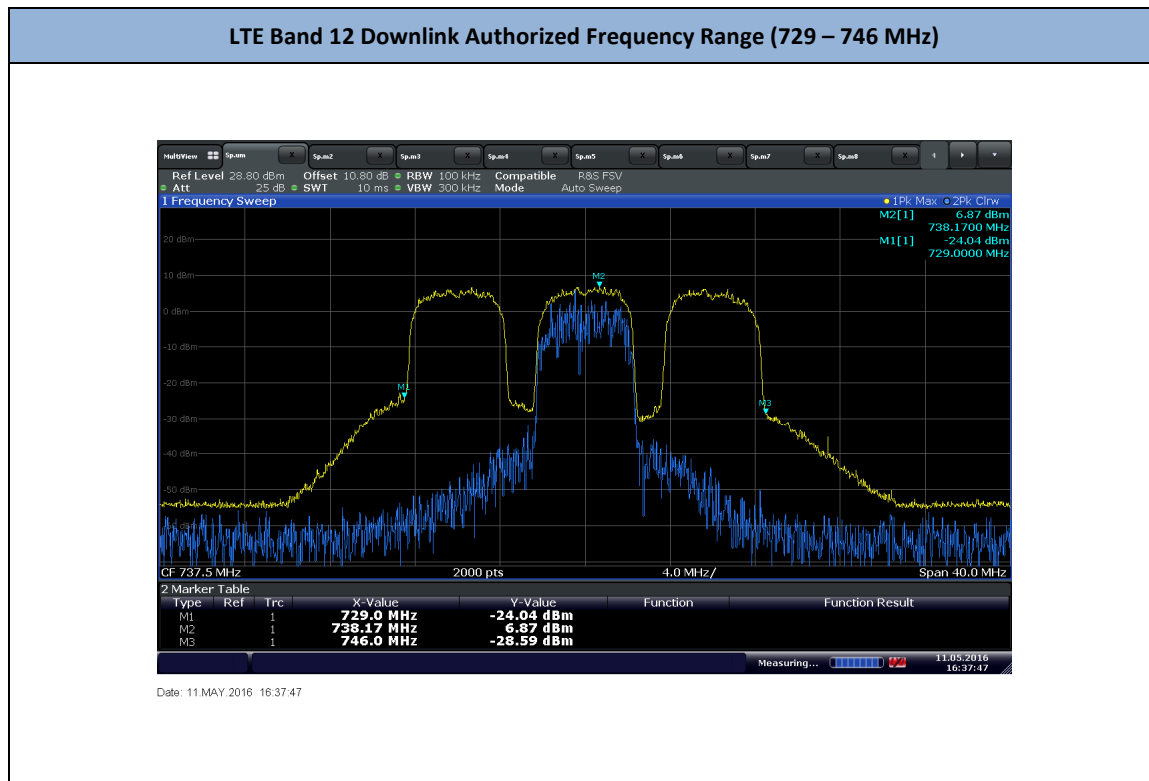

### LTE Band 12 Uplink Authorized Frequency Range (699 – 716 MHz)

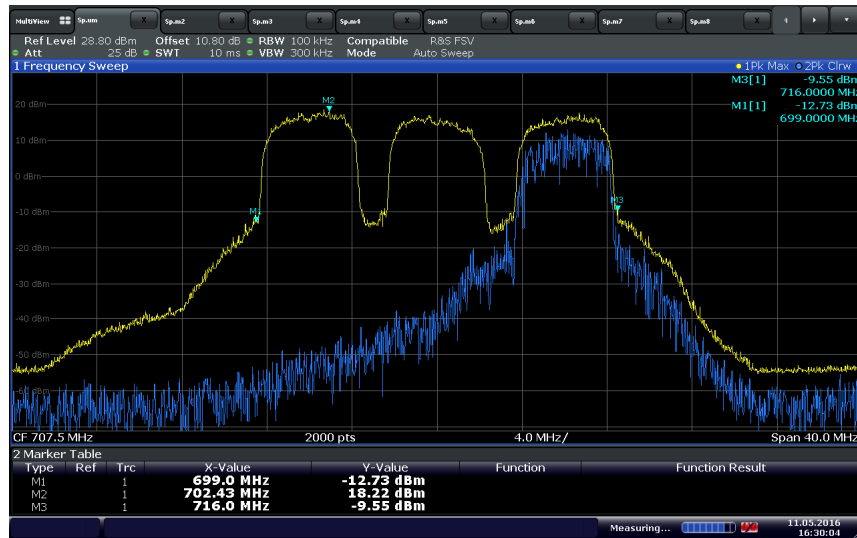

Date: 11 MAY 2016 16:30:04



## **2.2 AUTHORIZED CMRS PROVIDER**

### **2.2.1 Specification Reference**

FCC 47 CFR Part 20, Clause 20.21 (e)(3)  
FCC 47 CFR Part 20, Clause 20.21(a)(4)  
KDB935210 D04, Clause 7.1

### **2.2.2 Standard Applicable**

FCC 47 CFR Part 20, Clause 20.21 (e)(3) Frequency Bands:  
Consumer Signal Boosters must be designed and manufactured such that they only operate on the frequencies used for the provision of subscriber-based services under parts 22 (Cellular), 24 (Broadband PCS), 27 (AWS-1, 700 MHz Lower A-E Blocks, and 700 MHz Upper C Block), and 90 (Specialized Mobile Radio) of this chapter. The Commission will not certificate any Consumer Signal Boosters for operation on part 90 of this chapter (Specialized Mobile Radio) frequencies until the Commission releases a public notice announcing the date Consumer Signal Boosters may be used in the band.

FCC 47 CFR Part 20, Clause 20.21(a)(4) Self Monitoring:  
The subscriber operates the Consumer Signal Booster on frequencies used for the provision of subscriber-based services under parts 22 (Cellular), 24 (Broadband PCS), 27 (AWS-1, 700 MHz Lower A-E Blocks, and 700 MHz Upper C Block), and 90 (Specialized Mobile Radio) of this chapter. Operation on part 90 (Specialized Mobile Radio) frequencies is permitted upon the Commission's release of a public notice announcing the date Consumer Signal Boosters may be used in the band;

### **2.2.3 Equipment Under Test and Modification State**

Serial No: 296546000622 (NU) and 297546000353 (CU) / Test Configuration C and D

### **2.2.4 Date of Test/Initial of test personnel who performed the test**

May 18, 2016/XYZ

### **2.2.5 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.2.6 Environmental Conditions**


Test performed at TÜV SÜD America Inc. Rancho Bernardo facility.

|                     |         |
|---------------------|---------|
| Ambient Temperature | 26.9°C  |
| Relative Humidity   | 46.1%   |
| ATM Pressure        | 99.1kPa |


## 2.2.7 Additional Observations

- 1) This is conducted Test. Test procedure is per Section 7.1.2 of KDB935210 (D04 Provider Specific Booster Measurements v01r01). Appropriate offset (line losses) applied.
- 2) The EUT operated in Normal Mode, with the gain manually set to the maximum gain and a minimum bandwidth setting (5MHz).
- 3) Setup the EUT according to Figure 1 of Section 6.3.2 of KDB935210 (D04 Provider Specific Booster Measurements v01r01) with the Base Station Simulator transmitting an authorized CMRS provider signal to the booster.
- 4) Evaluations are conducted at CU and NU antenna ports B12.
- 5) Both uplink and downlink bands for LTE B12 were tested.
- 6) The Base Station Simulator was set to transmit a 5MHz LTE signal.
- 7) The authorized CMRS Provider ID: 123/456
- 8) Two Non- authorized CMRS Provider signals were verified.
- 9) DL: B12:729 – 746MHz;  
UL: B12:699 – 716MHz;

## 2.2.8 Test Results

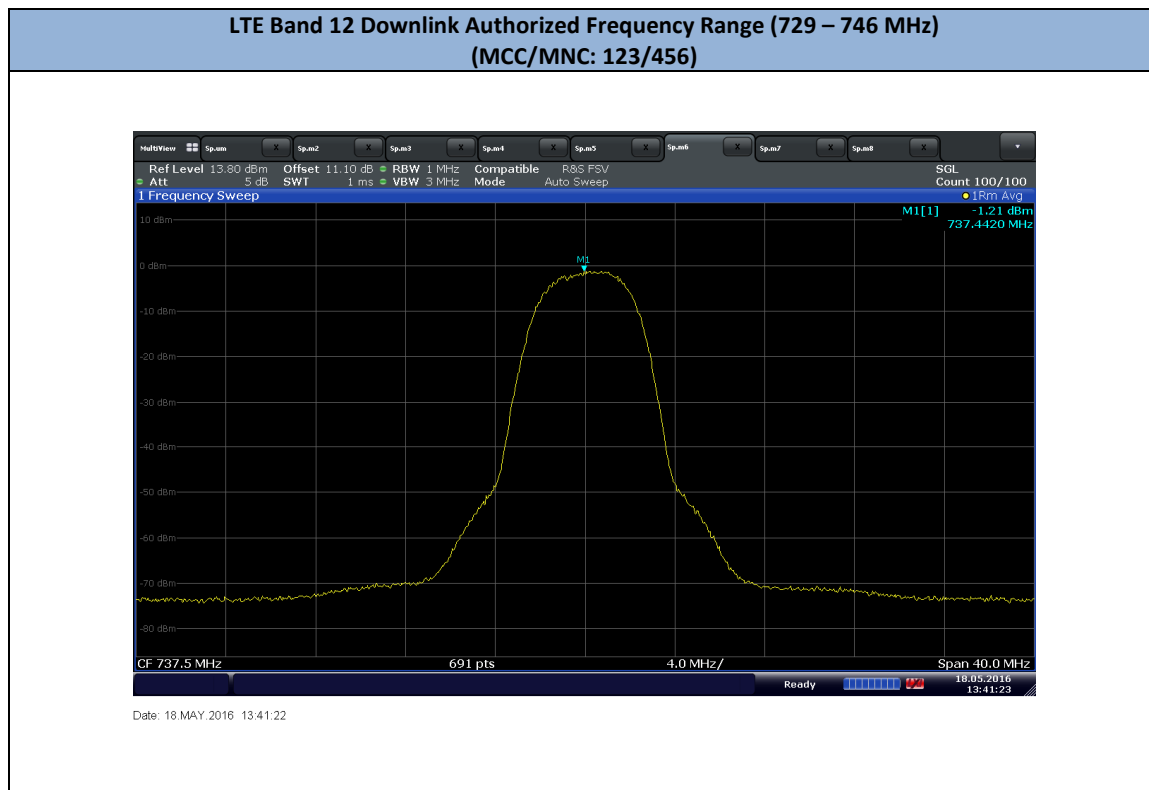


**LTE Band 12 Downlink Authorized Frequency Range (729 – 746 MHz)  
 (MCC/MNC: 123/070)**

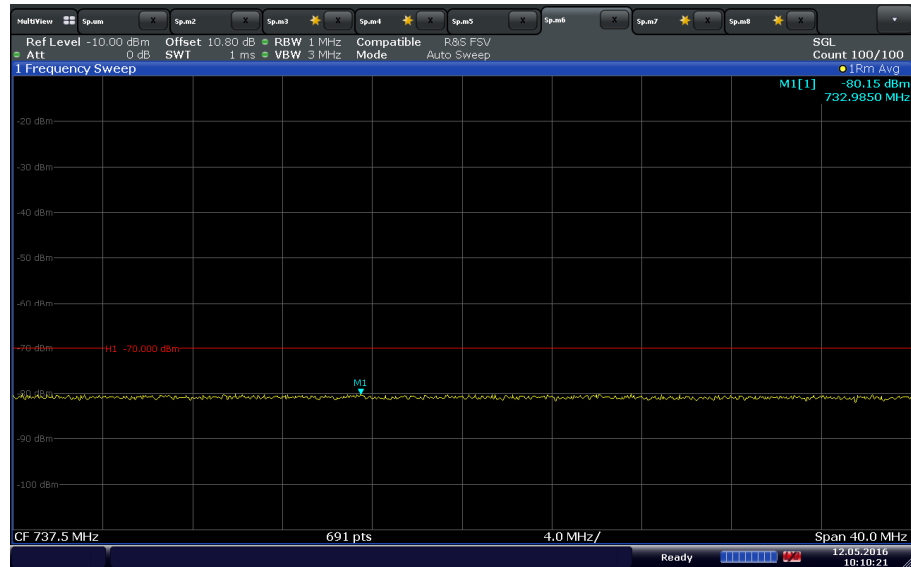


Date: 12.MAY.2016 10:10:20

**LTE Band 12 Downlink Authorized Frequency Range (729 – 746 MHz)  
 (MCC/MNC: 123/120)**

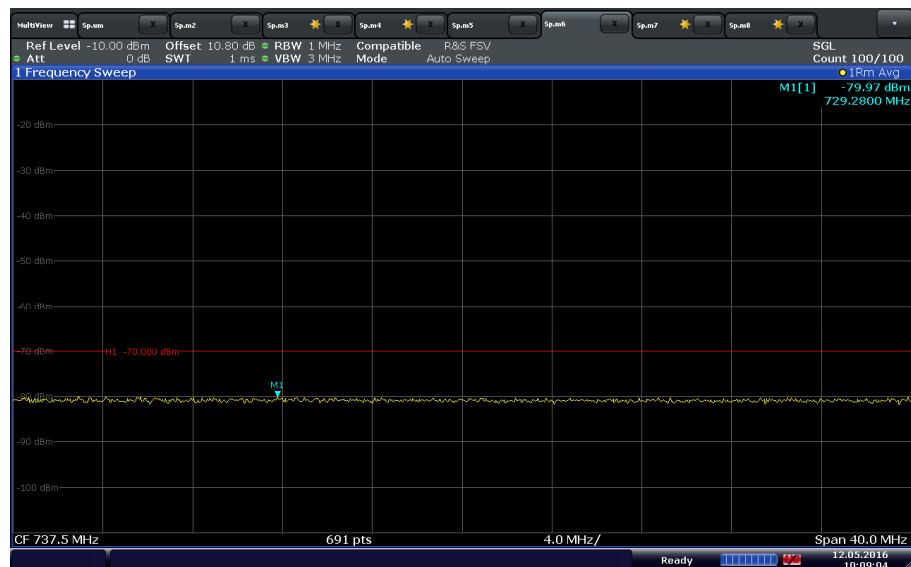


Date: 12.MAY.2016 10:09:03

**LTE Band 12 Uplink Authorized Frequency Range (699 – 716 MHz)**  
**(MCC/MNC: 123/456)**

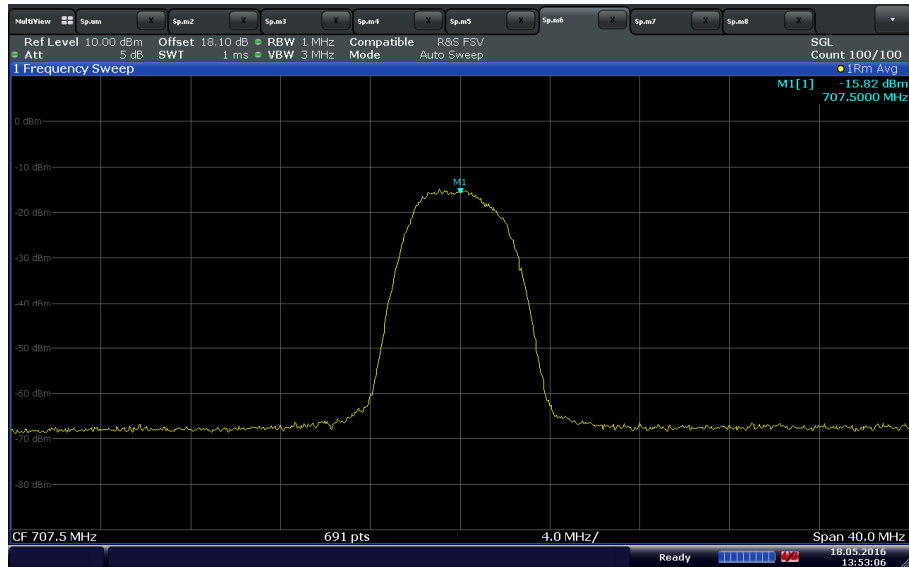


Date: 18.MAY.2016 13:53:06

**LTE Band 12 Uplink Authorized Frequency Range (699 – 716 MHz)**  
**(MCC/MNC: 123/070)**

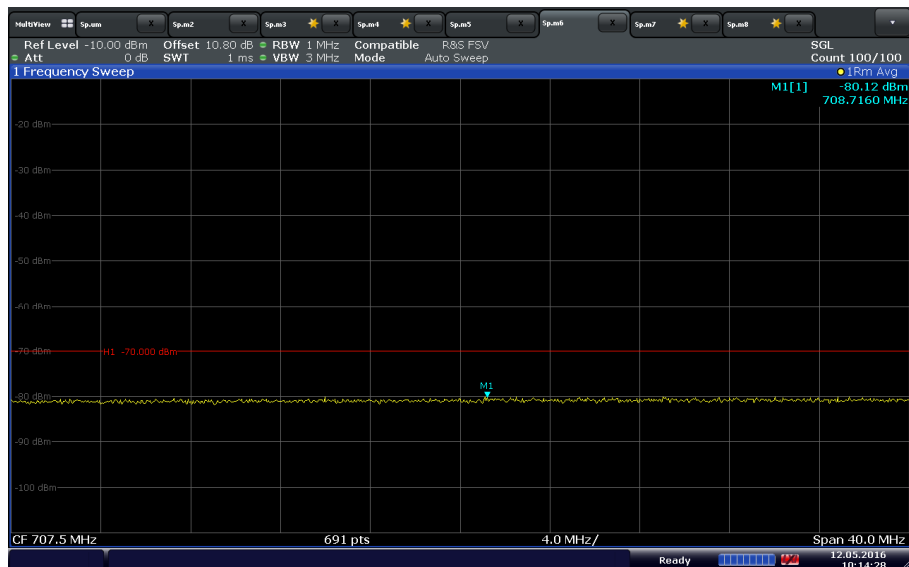

Date: 12.MAY.2016 10:14:28

### LTE Band 12 Uplink Authorized Frequency Range (699 – 716 MHz) (MCC/MNC: 123/120)

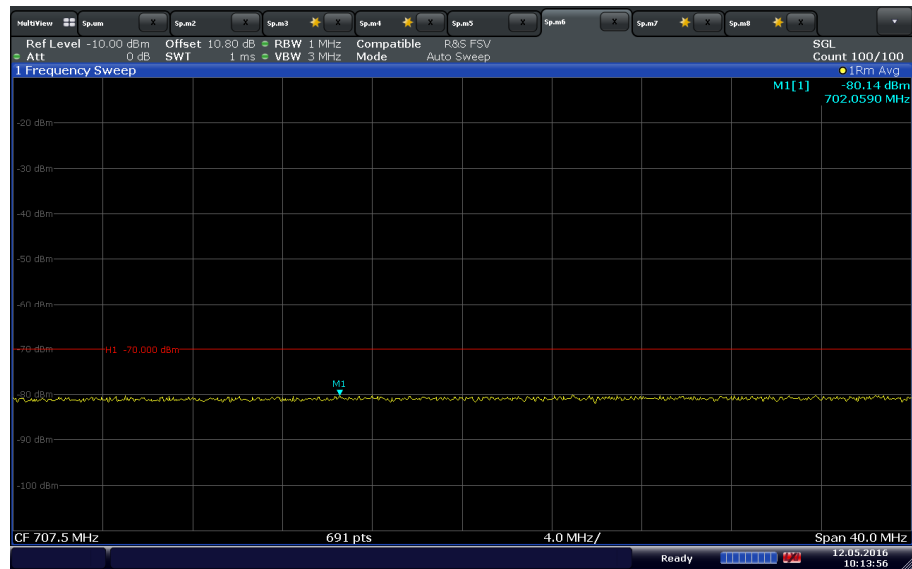


Date: 12.MAY.2016 10:13:56

### LTE Band 12 Downlink Inactive time after reset



Date: 13.MAY.2016 10:47:45



## **2.3 MAXIMUM POWER MEASUREMENT AND BOOSTER GAIN COMPUTATION**

### **2.3.1 Specification Reference**

FCC 47 CFR Part 20, Clause 20.21(e)(9)(i)(D)  
FCC 47 CFR Part 20, Clause 20.21(e)(9)(i)(B)  
FCC 47 CFR Part 20, Clause 20.21(e)(9)(i)(C)(1) and (2)  
KDB935210 D04, Clause 7.2  
KDB935210 D04, Clause 7.3

### **2.3.2 Standard Applicable**

FCC 47 CFR Part 20, Clause 20.21(e)(9)(i)(B) Bidirectional Capability:  
Consumer Boosters must be able to provide equivalent (within 9dB as per ANSI ASC C63) uplink and downlink gain and conducted uplink power output that is at least 0.05 watts. One-way consumer boosters (i.e., uplink only, downlink only, uplink impaired, downlink impaired) are prohibited. Spectrum block filtering used must provide uplink filter attenuation not less than the downlink filter attenuation, and where RSSI is measured after spectrum block filtering is applied referenced to the booster's input port for each band of operation.

FCC 47 CFR Part 20, Clause 20.21(e)(9)(i)(D) Power Limits:  
A booster's uplink power must not exceed 1 watt composite conducted power and equivalent isotropic radiated power (EIRP) for each band of operation. Downlink power shall not exceed 0.05 watt (17dBm) composite and 10 dBm per channel conducted and EIRP for each band of operation. Compliance with power limits will use instrumentation calibrated in terms of RMS equivalent voltage.

FCC 47 CFR Part 20, Clause 20.21(e)(9)(i)(C) Booster Gain Limits.  
The gain of the frequency selective consumer booster shall meet the limits below.  
(1) The uplink and downlink gain in dB of a frequency selective consumer booster referenced to its input and output ports shall not exceed BSCL - 28 dB - (40 dB - MSCL).  
(2) The uplink and downlink maximum gain of a frequency selective consumer booster referenced to its input and output ports shall not exceed 19.5 dB + 20 Log (Frequency), or 100 dB for systems having automatic gain adjustment based on isolation measurements between booster donor and server antennas.  
Where, Frequency is the uplink midband frequency of the supported spectrum bands in MHz.

### **2.3.3 Equipment Under Test and Modification State**

Serial No: 296546000554 (NU) and 297546000407 (CU)/ Test Configuration A and B

### **2.3.4 Date of Test/Initial of test personnel who performed the test**

May 16, 2016/XYZ

### **2.3.5 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### 2.3.6 Environmental Conditions

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility.

Ambient Temperature 26.1°C  
 Relative Humidity 44.8%  
 ATM Pressure 99.0kPa

### 2.3.7 Additional Observations

- 1) This is conducted Test. Test procedure is per Section 7.2.2 of KDB935210 (D04 Provider Specific Booster Measurements v01r01). Appropriate offset (line losses) applied.
- 2) The EUT operated in Test Mode, with the gain manually set to the maximum gain and a minimum bandwidth setting (5MHz).
- 3) Setup the EUT according to Figure 2 or 3 of Section 6.3.3 of KDB935210 (D04 Provider Specific Booster Measurements v01r01) as appropriate.
- 4) Evaluations are conducted at CU and NU antenna ports B12.
- 5) Maximum Gain of the booster was calculated.
- 6) The Gain with Maximum Transmitter Input Level (-20dBm for Downlink and 0dBm for Uplink) injected was also calculated.
- 7) Operational uplink and downlink bands for LTE B12 were tested.
- 8) The signal generator was set to transmit a 10MHz LTE.

### 2.3.8 Test Results

| Maximum Gain/Maximum Power |                       |                   |                    |                   |            |                  |           |                 |               |                          |
|----------------------------|-----------------------|-------------------|--------------------|-------------------|------------|------------------|-----------|-----------------|---------------|--------------------------|
| Band                       | Frequency Range (MHz) | Input Power (dBm) | Output Power (dBm) | Antenna Gain (dB) | EIRP (dBm) | EIRP Limit (dBm) | Gain (dB) | Gain Limit (dB) | UL vs DL Gain | UL vs DL Gain Limit (dB) |
| LTE Band 12 Downlink       | 729 - 746             | -85               | 12.23              | 0                 | 12.23      | <17              | 97.23     | 100             | 1.07          | 9                        |
| LTE Band 12 Uplink         | 699 - 716             | -76               | 20.16              | 0                 | 20.16      | 17-30            | 96.16     | 100             |               |                          |

| Maximum Gain/Maximum Power with Maximum Transmitter Input Level |                       |                   |                    |                   |            |                  |           |                 |
|-----------------------------------------------------------------|-----------------------|-------------------|--------------------|-------------------|------------|------------------|-----------|-----------------|
| Band                                                            | Frequency Range (MHz) | Input Power (dBm) | Output Power (dBm) | Antenna Gain (dB) | EIRP (dBm) | EIRP Limit (dBm) | Gain (dB) | Gain Limit (dB) |
| LTE Band 12 Downlink                                            | 729 - 746             | -20               | 12.12              | 0                 | 12.12      | <17              | 32.12     | 100             |
| LTE Band 12 Uplink                                              | 699 - 716             | 0                 | 19.87              | 0                 | 19.87      | 17-30            | 19.87     | 100             |

## **2.4 INTERMODULATION PRODUCT**

### **2.4.1 Specification Reference**

FCC 47 CFR Part 20. Clause 20.21(e)(9)(i)(G)  
KDB935210 D04, Clause 7.4

### **2.4.2 Standard Applicable**

FCC 47 CFR Part 20. Clause 20.21(e)(9)(i)(G) Intermodulation Limits:  
The transmitted intermodulation products of a consumer booster at its uplink and downlink ports shall not exceed the power level of -19 dBm for the supported bands of operation. Compliance with intermodulation limits will use boosters operating at maximum gain and maximum rated output power, with two continuous wave (CW) input signals spaced 600 kHz apart and centered in the pass band of the booster, and with a 3 kHz measurement bandwidth.

### **2.4.3 Equipment Under Test and Modification State**

Serial No: 296546000554 (NU) and 297546000407 (CU) / Test Configuration E

### **2.4.4 Date of Test/Initial of test personnel who performed the test**

May 16, 2016/XYZ

### **2.4.5 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.4.6 Environmental Conditions**


Test performed at TÜV SÜD America Inc. Rancho Bernardo facility.

|                     |         |
|---------------------|---------|
| Ambient Temperature | 26.1C   |
| Relative Humidity   | 44.8%   |
| ATM Pressure        | 99.0kPa |


## 2.4.7 Additional Observations

- 1) This is conducted Test. Test procedure is per Section 7.4 of KDB935210 (D04 Provider Specific Booster Measurements v01r01). Appropriate offset (line losses) applied.
- 2) The EUT operated in Test Mode with the gain manually set to the maximum gain and a minimum bandwidth setting (5MHz).
- 3) Setup the EUT according to Figure 4 of Section 7.4 of KDB935210 (D04 Provider Specific Booster Measurements v01r01).
- 4) Evaluations are conducted at CU and NU antenna ports B12.
- 5) Operational uplink and downlink bands for LTE B12 were tested.

## 2.4.8 Test Results

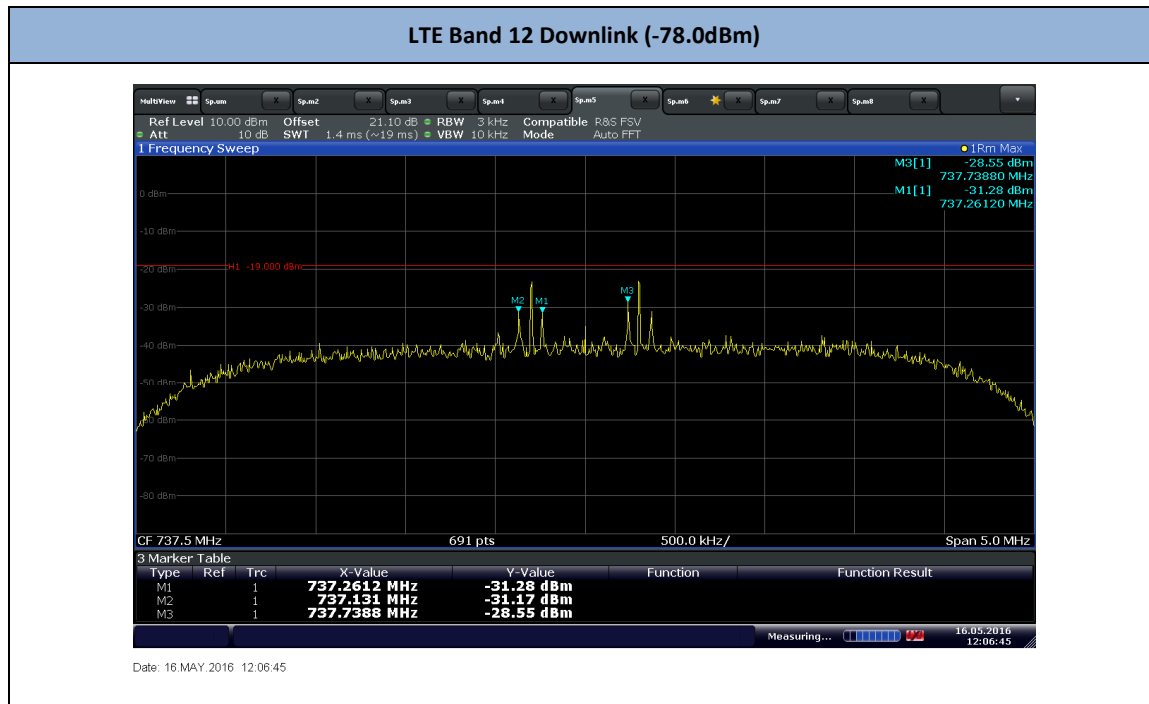


### LTE Band 12 Downlink (-68.0dBm)

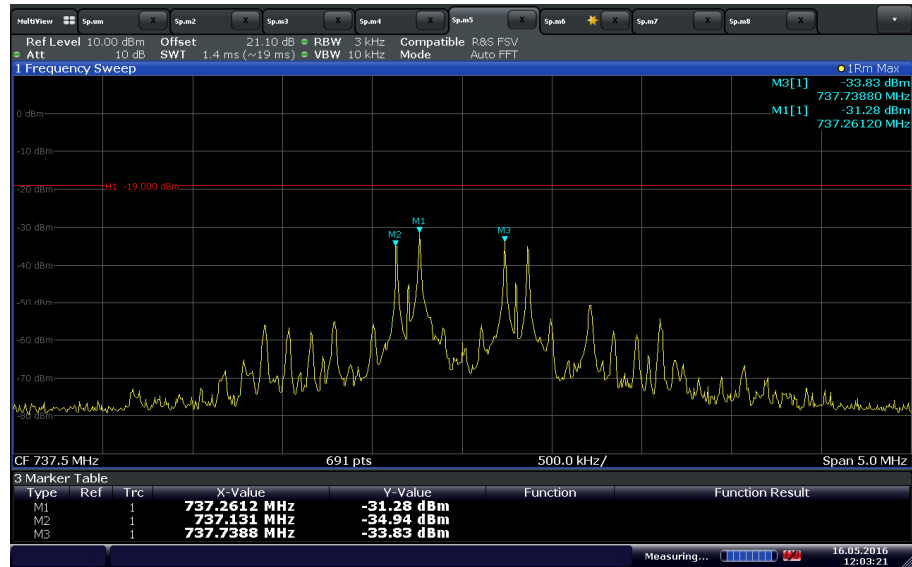


Date: 16 MAY 2016 12:03:22

### LTE Band 12 Uplink (-84dBm)

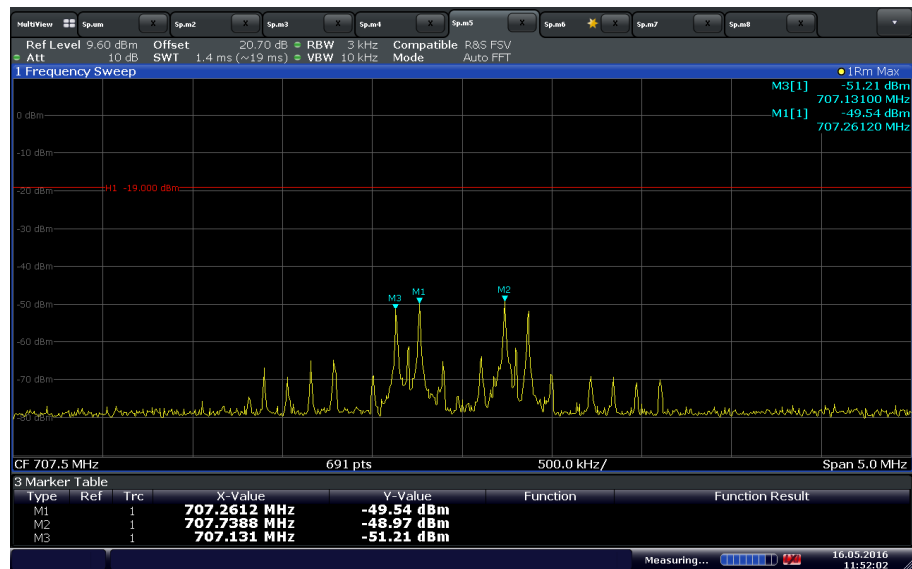

Date: 16 MAY 2016 11:52:02

### LTE Band 12 Uplink (-74dBm)

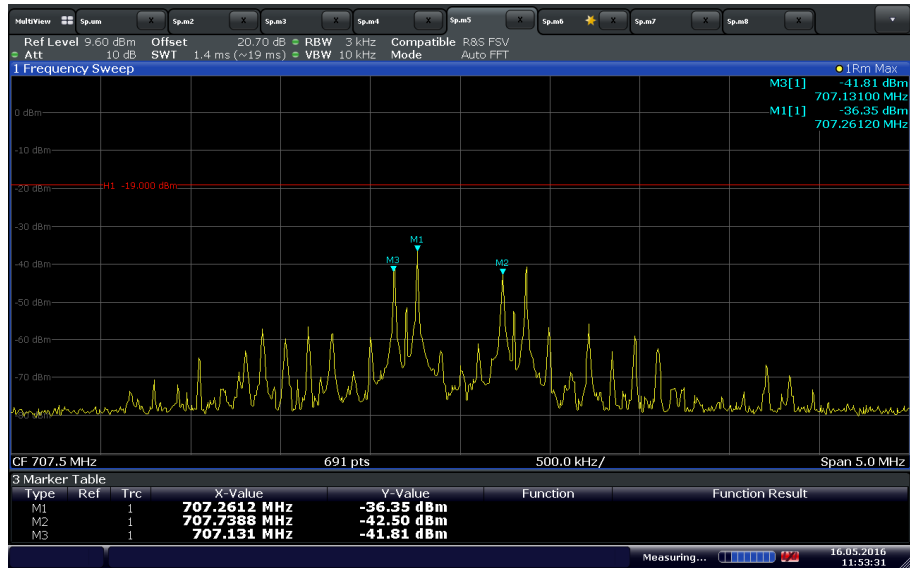

Date: 16.MAY.2016 11:53:31

## **2.5 OUT OF BAND EMISSIONS**

### **2.5.1 Specification Reference**

FCC 47 CFR Part 20. Clause 20.21(e)(9)(i)(F)  
KDB935210 D04, Clause 7.5

### **2.5.2 Standard Applicable**

FCC 47 CFR Part 20. Clause 20.21(e)(9)(i)(F) Out of Band Emissions Limits:  
Booster out of band emissions (OOBE) shall meet the FCC's mobile emission limits for the supported bands of operation. Compliance to OOBE limits will utilize high peak-to-average CMRS signal types..

### **2.5.3 Equipment Under Test and Modification State**

Serial No: 296546000554 (NU) and 297546000407 (CU) / Test Configuration A

### **2.5.4 Date of Test/Initial of test personnel who performed the test**

May 16, 2016/XYZ

### **2.5.5 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.5.6 Environmental Conditions**

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility.


|                     |         |
|---------------------|---------|
| Ambient Temperature | 26.1C   |
| Relative Humidity   | 44.8%   |
| ATM Pressure        | 99.0kPa |

### **2.5.7 Additional Observations**

- 1) This is conducted Test. Test procedure is per Section 7.5 of KDB935210 (D04 Provider Specific Booster Measurements v01r01). Appropriate offset (line losses) applied.
- 2) The EUT operated in Test Mode, with the gain manually set to the maximum gain and a 10MHz bandwidth setting.
- 3) Evaluations are conducted at CU and NU antenna ports B12.
- 4) Operational uplink and downlink bands for LTE B12 were tested.
- 5) Signal: 10MHz LTE.


## 2.5.8 Test Results

### LTE Band 12 Downlink 5MHz Bandwidth Low Channel (-85 dBm)

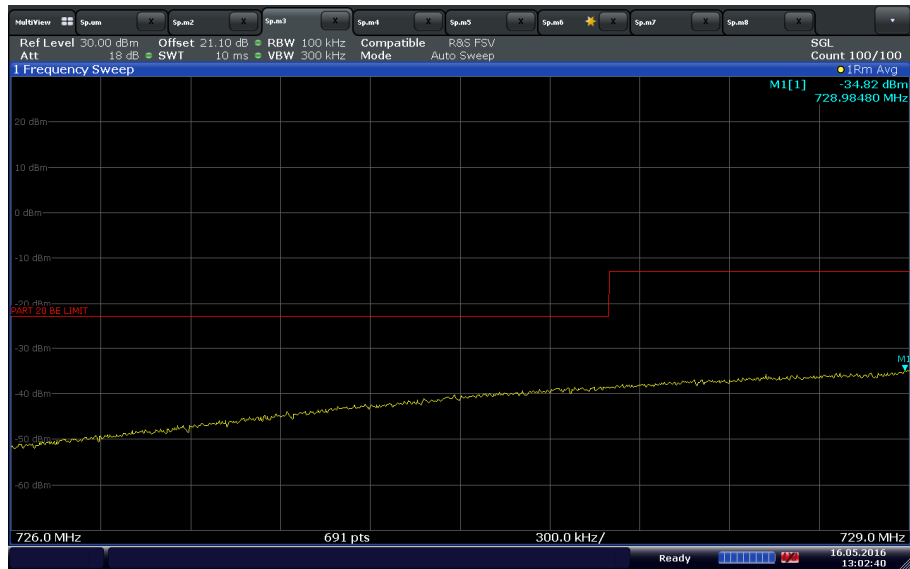


Date: 16.MAY.2016 13:02:41

### LTE Band 12 Downlink 5MHz Bandwidth Low Channel (-20 dBm)

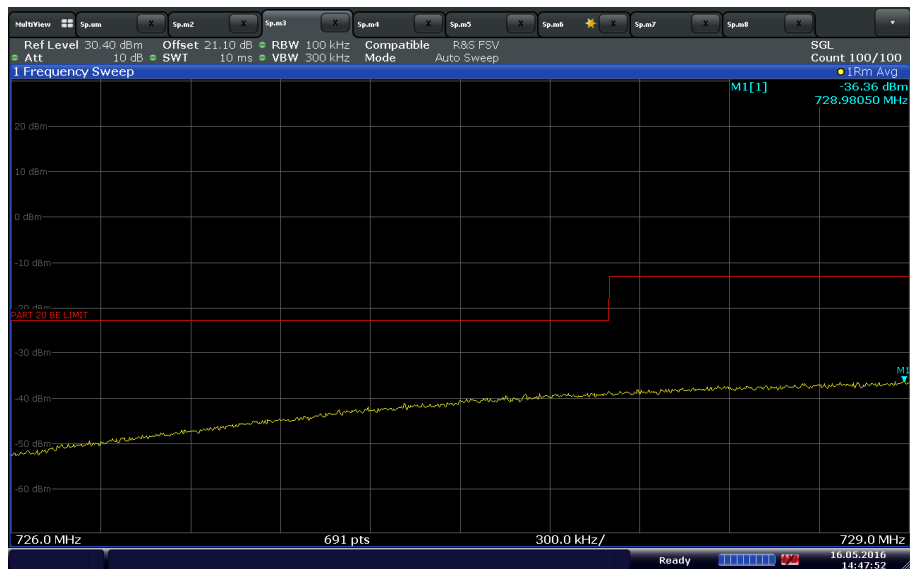


Date: 16.MAY.2016 14:47:52

### LTE Band 12 Downlink 5MHz Bandwidth High Channel (-85 dBm)

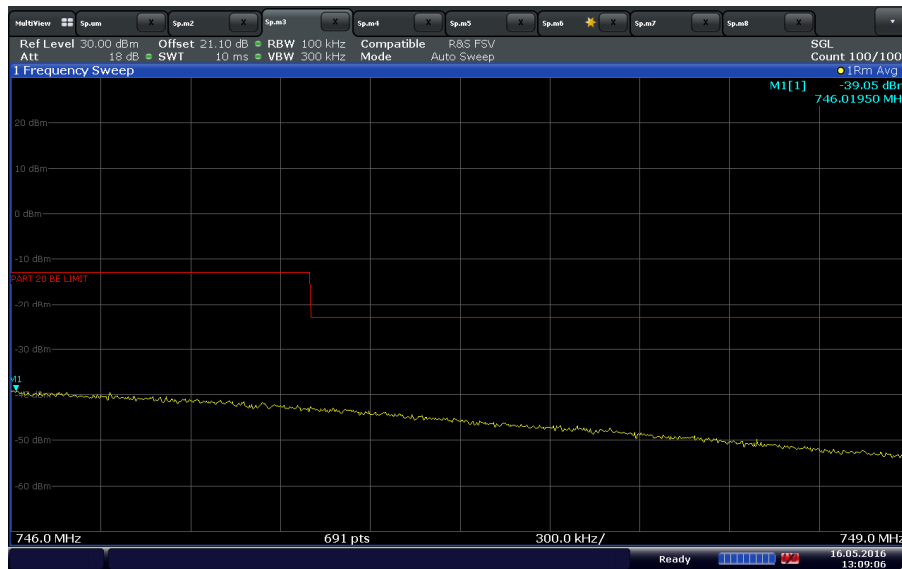


Date: 16 MAY 2016 13:09:06

### LTE Band 12 Downlink 5MHz Bandwidth High Channel (-20 dBm)

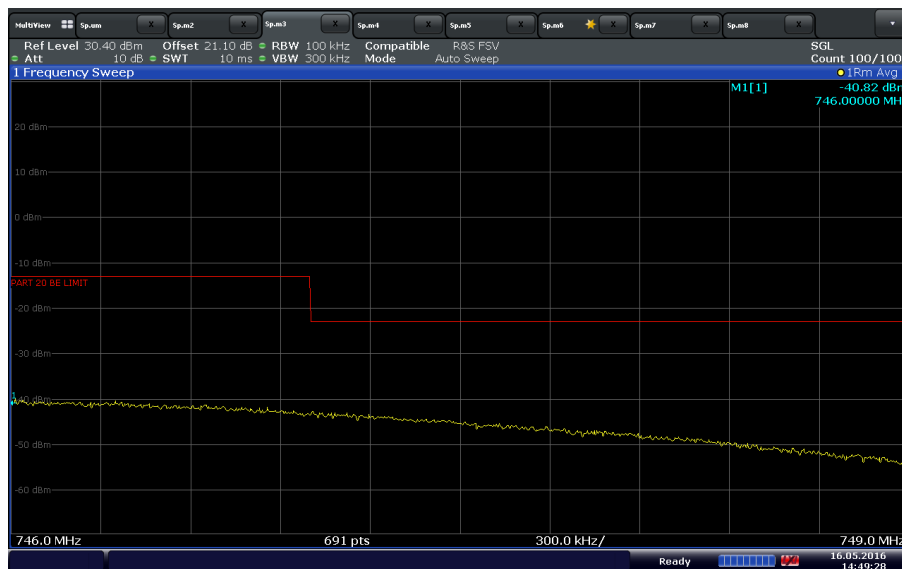


Date: 16 MAY 2016 14:49:28

### LTE Band 12 Uplink 5MHz Bandwidth Low Channel (-76 dBm)

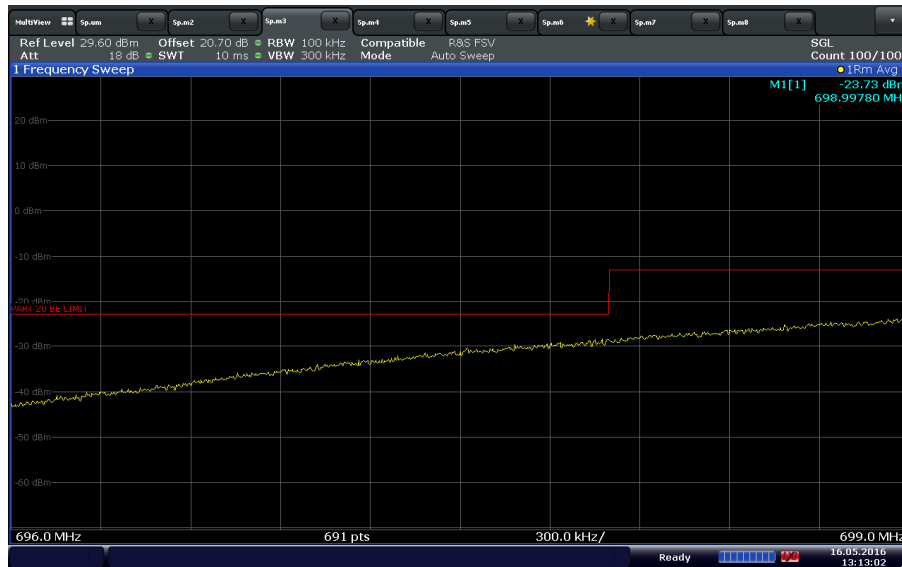


Date: 16.MAY.2016 13:13:03

### LTE Band 12 Uplink 5MHz Bandwidth Low Channel (0 dBm)

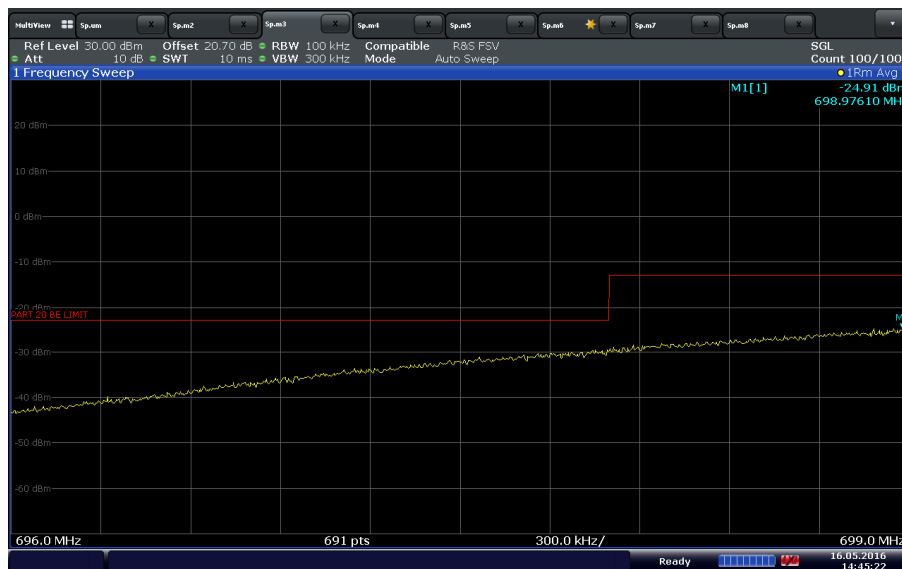


Date: 16.MAY.2016 14:45:21

### LTE Band 12 Uplink 5MHz Bandwidth High Channel (-76 dBm)

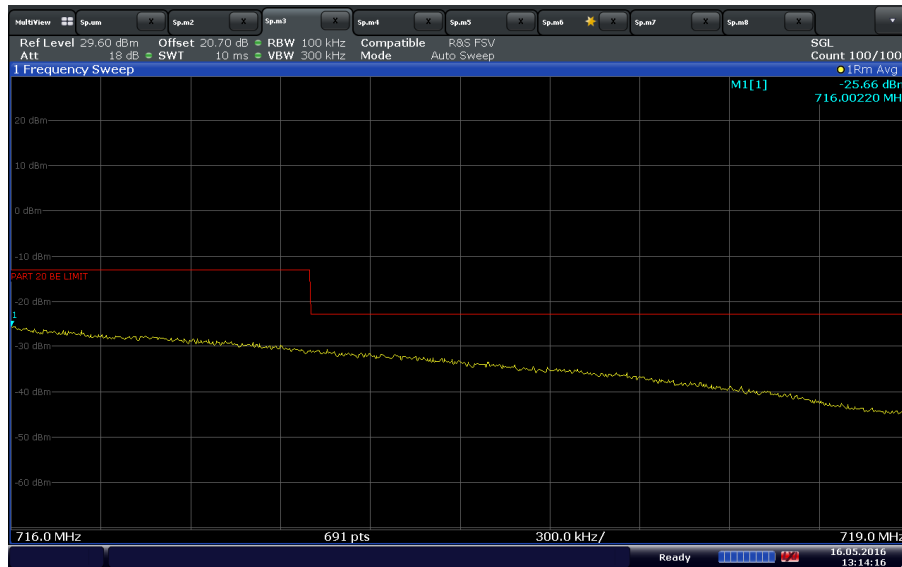

Date: 16.MAY.2016 13:14:16

### LTE Band 12 Uplink 5MHz Bandwidth High Channel (0 dBm)

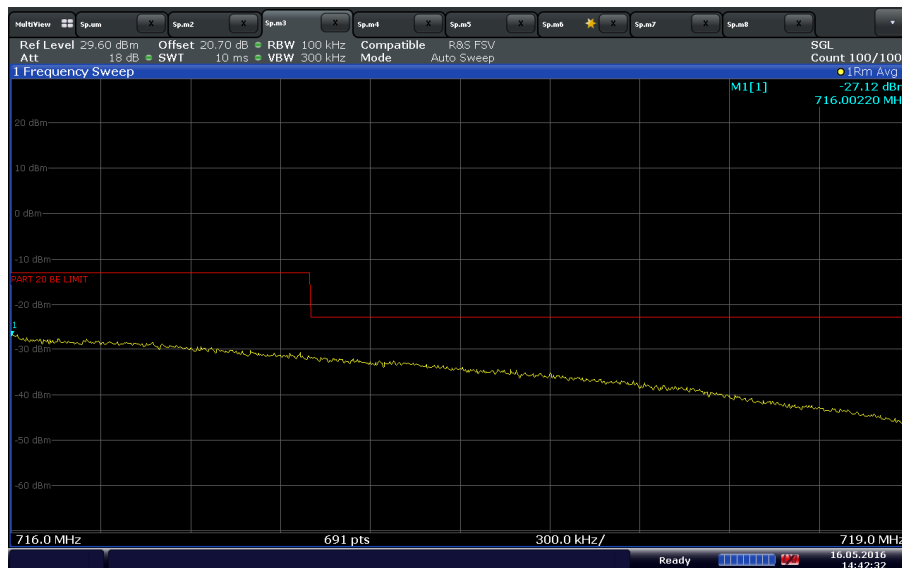

Date: 16.MAY.2016 14:42:32

## **2.6 NOISE LIMIT**

### **2.6.1 Specification Reference**

FCC 47 CFR Part 20. Clause 20.21(e)(9)(i)(A)  
FCC 47 CFR Part 20. Clause 20.21(e)(9)(i)(I)  
KDB935210 D04, Clause 7.7

### **2.6.2 Standard Applicable**

FCC 47 CFR Part 20. Clause 20.21(e)(9)(i)(A) Noise Limits.:

The transmitted noise power in dBm/MHz of frequency selective consumer boosters outside the licensee's spectrum blocks at their uplink and downlink ports shall not exceed the following limits:

(1) -103 dBm/MHz - RSSI

(i) Where RSSI is the downlink composite signal power received in dBm for frequencies in the band of operation outside the licensee's spectrum block as measured after spectrum block filtering is applied and is referenced to the booster's donor port for each band of operation. RSSI is expressed in negative dB units relative to 1 mW.

(ii) Boosters with MSCL less than 40 dB, shall reduce the Noise output in (A) by 40 dB - MSCL, where MSCL is the minimum coupling loss in dB between the wireless device and booster's server port. MSCL must be calculated or measured for each band of operation and provided in compliance test reports.

(2)(i) Maximum downlink noise power shall not exceed  $-102.5 \text{ dBm/MHz} + 20 \log_{10}(\text{Frequency})$ , where Frequency is the uplink mid-band frequency of the supported spectrum bands in MHz.

(ii) Compliance with Noise limits will use instrumentation calibrated in terms of RMS equivalent voltage, and with booster input ports terminated or without input signals applied within the band of measurement.

FCC 47 CFR Part 20. Clause 20.21(e)(9)(i)(I) Transmit Power Off Mode.

When the consumer booster cannot otherwise meet the noise and gain limits defined herein it must operate in "Transmit Power OFF Mode." In this mode of operation, the uplink and downlink noise power shall not exceed -70 dBm/MHz and uplink gain shall not exceed the lesser of 23 dB or MSCL.

### **2.6.3 Equipment Under Test and Modification State**

Serial No: 296546000554 (NU) and 297546000407 (CU) / Test Configuration E, F and G

### **2.6.4 Date of Test/Initial of test personnel who performed the test**

May 16, 2016/XYZ

### **2.6.5 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

## 2.6.6 Environmental Conditions/ Test Location

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility

Ambient Temperature 26.1°C  
Relative Humidity 44.8%  
ATM Pressure 99.0kPa

## 2.6.7 Additional Observations

- 1) This is conducted Test. Test procedure is per Section 7.7 of KDB935210 (D04 Provider Specific Booster Measurements v01r01). Appropriate offset (line losses) applied.
- 2) The EUT operated in Test Mode with the gain manually set to the maximum gain and a minimum bandwidth setting (5MHz).
- 3) For Maximum Noise (frequency Dependent) testing, setup the EUT according to Figure 5 of Section 7.7 of KDB935210 (D04 Provider Specific Booster Measurements v01r01).
- 4) Maximum Noise (frequency Dependent) evaluations are conducted at CU antenna ports B12. Operational downlink band for LTE B12 were tested.
- 5) For Maximum Noise (RSSI Dependent and Transmit Power off mode) and Noise Response Time tests, setup the EUT according to Figure 5 of Figure 6 or 7 of Section 7.7 of KDB935210 (D04 Provider Specific Booster Measurements v01r01) as appropriate.
- 6) Maximum Noise (RSSI Dependent and Transmit Power off mode) and Noise Response Time evaluations are conducted at CU and NU antenna ports B12. Operational uplink and downlink bands for LTE B12 were tested.
- 7) Signal generator was configured to transmit: 200 kHz AWGN.

## 2.6.8 Test Results

| Maximum Noise (Frequency Dependent) |                       |                     |                  |             |
|-------------------------------------|-----------------------|---------------------|------------------|-------------|
| Band                                | Frequency Range (MHz) | Max Noise (dBm/MHz) | Limit* (dBm/MHz) | Margin (dB) |
| LTE Band 12 Downlink                | 729 - 746             | -69.83              | -74.03           | 4.17        |

\*:  $-102.5 \text{ dBm/MHz} + 20 \log_{10}(\text{Frequency})$ , where Frequency is the uplink mid-band frequency of the supported spectrum bands in MHz. (Downlink only)

| Maximum Noise (RSSI Dependent and Transmit Power off mode) |                 |                                     |                     |                 |             |
|------------------------------------------------------------|-----------------|-------------------------------------|---------------------|-----------------|-------------|
| Band                                                       | Frequency (MHz) | Signal Generator Output Level (dBm) | Max Noise (dBm/MHz) | Limit (dBm/MHz) | Margin (dB) |
| LTE Band 12 Downlink                                       | 729 - 746       | -60.4                               | -75.81              | -47.6           | 28.21       |
|                                                            |                 | -50.4                               | -75.51              | -57.6           | 17.91       |
|                                                            |                 | -40.4                               | -75.84              | -70.0           | 5.84        |
|                                                            |                 | -30.4                               | -75.4               | -70.0           | 5.4         |
|                                                            |                 | -25.4                               | -75.45              | -70.0           | 5.45        |
|                                                            |                 | -23.4**                             | -76.27              | -70.0           | 6.27        |
| LTE Band 12 Uplink                                         | 699 - 716       | -70.6                               | -76.05              | -37.4           | 38.65       |
|                                                            |                 | -60.6                               | -75.97              | -47.4           | 28.57       |
|                                                            |                 | -50.6                               | -74.78              | -57.4           | 17.38       |
|                                                            |                 | -43.6**                             | -76.17              | -64.4           | 11.77       |
|                                                            |                 | -40.6                               | -76.32              | -67.4           | 8.92        |
|                                                            |                 | -30.6                               | -76.94              | -70.0           | 6.94        |

\*\* : Transmit Power off mode

| Noise Response Time  |                 |                           |             |              |
|----------------------|-----------------|---------------------------|-------------|--------------|
| Band                 | Frequency (MHz) | Noise Response Time (Sec) | Limit (Sec) | Margin (Sec) |
| LTE Band 12 Downlink | 729 - 746       | 0.077                     | 3           | 2.923        |
| LTE Band 12 Uplink   | 699 - 716       | 0.42                      | 3           | 2.58         |

## **2.7 UPLINK INACTIVITY**

### **2.7.1 Specification Reference**

FCC 47 CFR Part 20. Clause 20.21(e)(9)(i)(J)  
KDB935210 D04, Clause 7.8

### **2.7.2 Standard Applicable**

FCC 47 CFR Part 20. Clause 20.21(e)(9)(i)(J) Uplink Inactivity:  
Uplink Inactivity. When a consumer booster is not serving an active device connection after 5 seconds the uplink noise power shall not exceed -70 dBm/MHz.

### **2.7.3 Equipment Under Test and Modification State**

Serial No: 296546000622 (NU) and 297546000353 (CU) / Test Configuration C and D

### **2.7.4 Date of Test/Initial of test personnel who performed the test**

May 18, 2016/XYZ

### **2.7.5 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.7.6 Environmental Conditions**

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility.

|                     |         |
|---------------------|---------|
| Ambient Temperature | 26.9C   |
| Relative Humidity   | 46.1%   |
| ATM Pressure        | 99.1kPa |

#### 2.7.7 Additional Observations

- 1) This is conducted Test.
- 2) Test procedure is per Section 7.8 of KDB935210 (D04 Provider Specific Booster Measurements v01r01). Appropriate offset (line losses) applied.
- 3) The EUT operated in Normal Mode with a minimum bandwidth setting (5MHz).
- 4) Setup the EUT according to Figure 1 of Section 6.3.2 of KDB935210 (D04 Provider Specific Booster Measurements v01r01).
- 5) Evaluations are conducted at NU antenna port B12.
- 6) Operational uplink band for LTE B12 was tested.
- 7) Signal: 5MHz LTE.

#### 2.7.8 Test Results

| Uplink Inactivity |                 |                        |             |              |
|-------------------|-----------------|------------------------|-------------|--------------|
| Band              | Frequency (MHz) | UL Inactive Time (Sec) | Limit (Sec) | Margin (Sec) |
| Band 12           | 707.5           | 1.48                   | 5.0         | 3.52         |

### LTE Band 12 Uplink 5MHz Bandwidth Mid Channel



Date: 18 MAY 2016 14:30:28

## **2.8 VARIABLE BOOSTER GAIN**

### **2.8.1 Specification Reference**

FCC 47 CFR Part 20. Clause 20.21(e)(9)(i)(C)(1)  
FCC 47 CFR Part 20. Clause 20.21(e)(9)(i)(I)  
KDB935210 D04, Clause 7.9

### **2.8.2 Standard Applicable**

FCC 47 CFR Part 20. Clause 20.21(e)(9)(i)(C)(1) Booster Gain Limits:  
The gain of the frequency selective consumer booster shall meet the limits below.

- 1) The uplink and downlink gain in dB of a frequency selective consumer booster referenced to its input and output ports shall not exceed BSCL - 28dB - (40 dB - MSCL).
  - (i) Where BSCL is the coupling loss between the booster's donor port and the base station's input port, and MSCL is the minimum coupling loss in dB between the wireless device and the booster's server port. MSCL must be calculated or measured for each band of operation and provided in compliance test reports.
  - (ii) In order of preference, BSCL is determined as follows: determine path loss between the base station and the booster; such measurement shall be based on measuring the received forward pilot/control channel power at the booster and reading the pilot/control channel transmit power from the base station as defined in the system information messages sent by the base station; estimate BSCL by assuming that the base station is transmitting at a level of +25 dBm per channel (assume a small, lightly loaded cell) and measuring the total received signal power level within the channel in dBm (RPCH) received at the booster input port. BSCL is then calculated as 25- RPCH; or assume that the BSCL is 70dB without performing any measurement.

FCC 47 CFR Part 20. Clause 20.21(e)(9)(i)(I) Transmit Power Off Mode.  
When the consumer booster cannot otherwise meet the noise and gain limits defined herein it must operate in "Transmit Power OFF Mode." In this mode of operation, the uplink and downlink noise power shall not exceed -70 dBm/MHz and uplink gain shall not exceed the lesser of 23 dB or MSCL.

### **2.8.3 Equipment Under Test and Modification State**

Serial No: 296546000622 (NU) and 297546000353 (CU) / Test Configuration C and D

### **2.8.4 Date of Test/Initial of test personnel who performed the test**

May 19, 2016/XYZ

### **2.8.5 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

## 2.8.6 Environmental Conditions

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility.

Ambient Temperature 27.1°C  
 Relative Humidity 45.9%  
 ATM Pressure 99.0kPa

## 2.8.7 Additional Observations

- 1) This is conducted Test.
- 2) Test procedure is per Section 7.9 of KDB935210 (D04 Provider Specific Booster Measurements v01r01). Appropriate offset (line losses) applied.
- 3) The EUT operated in Normal Mode;
- 4) Setup the EUT according to Figure 1 of Section 6.3.2 of KDB935210 (D04 Provider Specific Booster Measurements v01r01).
- 5) Evaluations are conducted at CU and NU antenna ports B12.
- 6) Variable Gain: Operational uplink and downlink bands for LTE B12 were tested.
- 7) Uplink Gain Timing: Operational uplink band for LTE B12 was tested.
- 8) Signal: 5MHz LTE.
- 9) MSCL:  
 $L_p = 20\log f + 20\log d - 27.5$   
 $L_p$  = Basic free space path loss,  
 $f$  = frequency in MHz,  
 $d$  = separation distance in meters (2m)  
 lowest MSCL value was utilized.
- 10) BSCL:  
 The coupling loss (in dB) between the donor port (NU) of the Consumer Booster and the input port of the Base Station

## 2.8.8 Test Results

| LTE B12 Downlink Gain vs RPDH and BSCL - Middle Channel |           |                      |           |            |             |
|---------------------------------------------------------|-----------|----------------------|-----------|------------|-------------|
| RPDH Power (dBm)                                        | BSCL (dB) | Measured Power (dBm) | Gain (dB) | Limit (dB) | Margin (dB) |
| -84.3                                                   | 108.8     | -8.53                | 75.77     | 77.8       | 2.03        |
| -74.3                                                   | 98.8      | -8.54                | 65.76     | 67.8       | 2.04        |
| -64.3                                                   | 88.8      | -8.69                | 55.61     | 57.8       | 2.19        |
| -54.3                                                   | 78.8      | -8.49                | 45.81     | 47.8       | 1.99        |
| -44.3                                                   | 68.6      | -8.59                | 35.71     | 37.8       | 1.89        |
| -34.3                                                   | 58.8      | -8.76                | 25.54     | 27.8       | 2.26        |

| B12 Uplink Gain vs RPCH and BSCL - Middle Channel |           |                      |           |            |             |
|---------------------------------------------------|-----------|----------------------|-----------|------------|-------------|
| RPCH Power (dBm)                                  | BSCL (dB) | Measured Power (dBm) | Gain (dB) | Limit (dB) | Margin (dB) |
| -84.3                                             | 108.8     | -10.75               | 59.25     | 77.8       | 18.55       |
| -74.3                                             | 98.8      | -12.85               | 57.15     | 67.8       | 10.65       |
| -64.3                                             | 88.8      | -18.70               | 51.3      | 57.8       | 6.5         |
| -54.3                                             | 78.8      | -25.59               | 44.41     | 47.8       | 3.39        |
| -44.3                                             | 68.6      | -34.56               | 35.44     | 37.8       | 2.16        |
| -34.3                                             | 58.8      | -44.62               | 25.38     | 27.8       | 2.42        |

| Uplink Gain Timing |                 |                      |             |              |
|--------------------|-----------------|----------------------|-------------|--------------|
| Band               | Frequency (MHz) | UL Gain Timing (Sec) | Limit (Sec) | Margin (Sec) |
| Band 12 Uplink     | 707.5           | 0.16                 | 3           | 2.84         |

## 2.8.9 Test Results





## **2.9 OSCILLATION DETECTION**

### **2.9.1 Specification Reference**

FCC 47 CFR Part 20. Clause 20.21(e)(9)(ii)(A)  
KDB935210 D04, Clause 7.11

### **2.9.2 Standard Applicable**

FCC 47 CFR Part 20. Clause 20.21(e)(9)(ii)(A) Anti-Oscillation:  
Consumer boosters must be able to detect and mitigate (i.e., by automatic gain reduction or shut down), any oscillations in uplink and downlink bands. Oscillation detection and mitigation must occur automatically within 0.3 seconds in the uplink band and within 1 second in the downlink band. In cases where oscillation is detected, the booster must continue mitigation for at least one minute before restarting. After five such restarts, the booster must not resume operation until manually reset.

### **2.9.3 Equipment Under Test and Modification State**

Serial No: 296546000622 (NU) and 297546000353 (CU), 296546000554 (NU) and 297546000407 (CU) /  
Test Configuration C and D

### **2.9.4 Date of Test/Initial of test personnel who performed the test**

May 12 and 18, 2016/XYZ

### **2.9.5 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.9.6 Environmental Conditions**

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility.

|                     |                |
|---------------------|----------------|
| Ambient Temperature | 26.9°C         |
| Relative Humidity   | 46.1 - 47.0%   |
| ATM Pressure        | 99.1 - 99.2kPa |

## 2.9.7 Additional Observations

- 1) This is conducted Test.
- 2) Test procedure is per Section 7.11 of KDB935210 (D04 Provider Specific Booster Measurements v01r01). Appropriate offset (line losses) applied.
- 3) The EUT operated in Normal Mode when testing Oscillation Mitigation Time;
- 4) Setup the EUT according to Figure 1 of Section 6.3.2 of KDB935210 (D04 Provider Specific Booster Measurements v01r01) for Normal Mode.
- 5) The EUT operated in Test Mode when testing Re-Try event;
- 6) Setup the EUT according to Figure 2 and Figure 3 of Section 6.3.3 of KDB935210 (D04 Provider Specific Booster Measurements v01r01) for Test Mode.
- 7) Evaluations are conducted at CU and NU antenna ports B12.
- 8) Signal: 5MHz LTE.

## 2.9.8 Test Results Summary

| Band             | Frequency (MHz) | Mitigation Time (Sec) | Limit (Sec) | Margin (Sec) |
|------------------|-----------------|-----------------------|-------------|--------------|
| Band 12 Downlink | 737.5           | 0.043                 | 0.3         | 0.257        |
| Band 12 Uplink   | 707.5           | 0.080                 | 0.3         | 0.220        |

| Band             | Frequency (MHz) | Re-Try Event | Limit Event | Margin (dB) |
|------------------|-----------------|--------------|-------------|-------------|
| Band 12 Downlink | 751             | 0            | 5           | 5           |
| Band 12 Uplink   | 782             | 0            | 5           | 5           |


## 2.9.9 Test Plots

### LTE Band 12 Downlink 5MHz Bandwidth Mid Channel



Date: 18.MAY.2016 15:16:51

### LTE Band 12 Uplink 5MHz Bandwidth Mid Channel

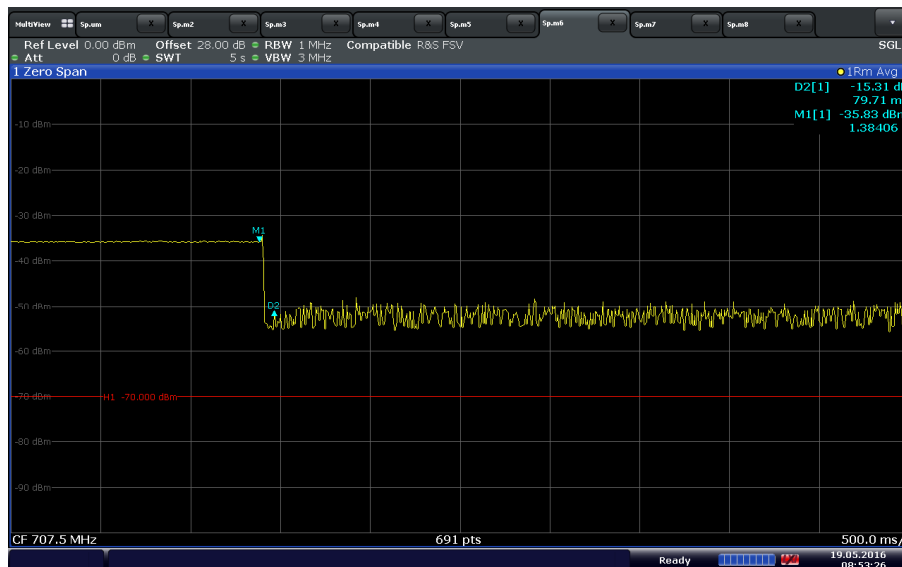

Date: 19.MAY.2016 08:53:26



## **2.10 OUT OF BAND GAIN LIMIT**

### **2.10.1 Specification Reference**

FCC 47 CFR Part 20. Clause 20.21(e)(9)(i)(E)  
KDB935210 D04, Clause 7.14

### **2.10.2 Standard Applicable**

FCC 47 CFR Part 20. Clause 20.21(e)(9)(i)(E) Out of Band Gain Limits.:

(1) A frequency selective booster shall have the following minimum attenuation referenced to the gain in the center of the pass band of the booster:

(i) -20 dB at the band edge, where band edge is the end of the licensee's allocated spectrum,

(ii) -30 dB at 1 MHz offset from band edge,

(iii) -40 dB at 5 MHz offset from band edge.

(2) A frequency selective booster having maximum gain greater than 80 dB (referenced to the center of the pass band) shall limit the out of band gain to 60 dB at 0.2 MHz offset from the band edge, and 45 dB at 1 MHz offset from the band edge, where band edge is the end of the licensee's allocated spectrum.

### **2.10.3 Equipment Under Test and Modification State**

Serial No: 296546000554 (NU) and 297546000407 (CU) / Test Configuration A and B

### **2.10.4 Date of Test/Initial of test personnel who performed the test**

May 16, 2016 /XYZ

### **2.10.5 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.10.6 Environmental Conditions/ Test Location**

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility

|                     |         |
|---------------------|---------|
| Ambient Temperature | 26.1C   |
| Relative Humidity   | 44.8%   |
| ATM Pressure        | 99.0kPa |

## 2.10.7 Additional Observations

- 1) This is conducted Test. Test procedure is per Section 7.14 of KDB935210 (D04 Provider Specific Booster Measurements v01r01). Appropriate offset (line losses) applied.
- 2) The EUT operated in Test Mode with the gain manually set to the maximum gain and a minimum bandwidth setting (5MHz).
- 3) Setup the EUT according to Figure 2 or 3 of Section 6.3.3 of KDB935210 (D04 Provider Specific Booster Measurements v01r01) as appropriate.
- 4) Evaluations are conducted at CU and NU antenna ports B12.
- 5) Operational uplink and downlink bands for LTE B12 were tested.
- 6) The signal generator was set to transmit a CW signal with output power level set to that as determined in clause 7.1.2 of KDB935210 (D04 Provider Specific Booster Measurements v01r01).

## 2.10.8 Test Results

| Out of Band Gain Limit<br>Band 12 Downlink (729 – 746MHz) |                      |                       |              |                    |
|-----------------------------------------------------------|----------------------|-----------------------|--------------|--------------------|
| Offset<br>(MHz)                                           | Input Power<br>(dBm) | Output Power<br>(dBm) | Gain<br>(dB) | Gain Limit<br>(dB) |
| Centre Frequency                                          | -78.0                | 4.72                  | 82.72        | -                  |
| 0 (Low Band Edge)                                         | -78.0                | -65.01                | 12.99        | 62.7               |
| -0.2                                                      | -78.0                | -65.14                | 12.86        | 60                 |
| -1                                                        | -78.0                | -65.64                | 12.36        | 45                 |
| -5                                                        | -78.0                | -65.77                | 12.23        | 42.7               |
| 0 (High Band Edge)                                        | -78.0                | -65.48                | 12.52        | 62.7               |
| +0.2                                                      | -78.0                | -65.61                | 12.39        | 60                 |
| +1                                                        | -78.0                | -65.62                | 12.38        | 45                 |
| +5                                                        | -78.0                | -65.80                | 12.2         | 42.7               |

| Out of Band Gain Limit<br>Band 12 Uplink (699 – 716MHz) |                      |                       |              |                    |
|---------------------------------------------------------|----------------------|-----------------------|--------------|--------------------|
| Offset<br>(MHz)                                         | Input Power<br>(dBm) | Output Power<br>(dBm) | Gain<br>(dB) | Gain Limit<br>(dB) |
| Centre Frequency                                        | -69.0                | 12.62                 | 81.62        | -                  |
| 0 (Low Band Edge)                                       | -69.0                | -66.06                | 2.94         | 61.62              |
| -0.2                                                    | -69.0                | -66.09                | 2.91         | 60                 |
| -1                                                      | -69.0                | -66.21                | 2.79         | 45                 |
| -5                                                      | -69.0                | -66.33                | 2.67         | 41.62              |
| 0 (High Band Edge)                                      | -69.0                | -65.95                | 3.05         | 61.62              |
| +0.2                                                    | -69.0                | -66.04                | 2.96         | 60                 |
| +1                                                      | -69.0                | -66.10                | 2.9          | 45                 |
| +5                                                      | -69.0                | -66.21                | 2.79         | 41.62              |

FCC ID: NU: YETD32-21266NU  
CU: YETD32-21266CU  
IC: NU: 9298A-D3221266NU  
CU: 9298A-D3221266CU  
Report No. SD72116210-0416H



### **SECTION 3**

#### **TEST EQUIPMENT USED**

### 3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

| ID Number (SDGE/SDRB)        | Test Equipment                              | Type      | Serial Number        | Manufacturer    | Cal Date                  | Cal Due Date |
|------------------------------|---------------------------------------------|-----------|----------------------|-----------------|---------------------------|--------------|
| Antenna Conducted Port Setup |                                             |           |                      |                 |                           |              |
| 7604                         | P-Series Power Meter                        | N1912A    | SG45100273           | Agilent         | 05/27/15                  | 05/27/16     |
| 7605                         | 50MHz-18GHz Wideband Power Sensor           | N1921A    | MY51100054           | Agilent         | 04/19/16                  | 04/19/17     |
| 7582                         | Signal/Spectrum Analyzer                    | FSW26     | 101614               | Rhode & Schwarz | 10/05/15                  | 10/05/16     |
| 7608                         | Vector Signal Generator                     | SMBV100A  | 259021               | Rhode & Schwarz | 29/07/15                  | 29/07/16     |
| 7562                         | Wideband Radio Communication Tester         | CMW 500   | 1201.0002k50 /103829 | Rhode & Schwarz | For Signal Only           |              |
| -                            | 11dB Step Attenuator                        | 8494B     | 2812A17193           | Agilent         | Verified by 7582 and 7608 |              |
| -                            | 110 dB Step Attenuator                      | 8496B     | MY42143874           | Agilent         | Verified by 7582 and 7608 |              |
| 8825                         | 20dB Attenuator                             | 46-20-34  | BK5773               | Weinschel Corp. | Verified by 7582 and 7608 |              |
| -                            | 10dB Attenuator                             | PE7010-10 | -                    | Pasternack      | Verified by 7582 and 7608 |              |
| -                            | 3dB Attenuator                              | PE7010-6  | -                    | Pasternack      | Verified by 7582 and 7608 |              |
| Miscellaneous                |                                             |           |                      |                 |                           |              |
| 6792                         | Multimeter                                  | 3478A     | 2911A70964           | Hewlett Packard | 08/14/15                  | 08/14/16     |
| 7560                         | Barometer/Temperature /Humidity Transmitter | iBTHX-W   | 1240476              | Omega           | 10/19/15                  | 10/19/16     |
|                              | Test Software                               | EMC32     | V8.53                | Rhode & Schwarz | N/A                       |              |

### 3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:

#### 3.2.1 General Direct Conducted Antenna Port Measurement

| Contribution                    |                            | Probability Distribution Type | Probability Distribution $x_i$ | Standard Uncertainty $u(x_i)$ | $[u(x_i)]^2$ |
|---------------------------------|----------------------------|-------------------------------|--------------------------------|-------------------------------|--------------|
| 1                               | Receiver/Spectrum Analyzer | Rectangular                   | 0.57                           | 0.33                          | 0.11         |
| 2                               | Cables                     | Rectangular                   | 0.50                           | 0.29                          | 0.08         |
| 3                               | EUT Setup                  | Rectangular                   | 1.00                           | 0.58                          | 0.33         |
| Combined Uncertainty ( $u_c$ ): |                            |                               |                                |                               | 0.72         |
| Coverage Factor (k):            |                            |                               |                                |                               | 2            |
| Expanded Uncertainty:           |                            |                               |                                |                               | 1.45         |


FCC ID: NU: YETD32-21266NU  
CU: YETD32-21266CU  
IC: NU: 9298A-D3221266NU  
CU: 9298A-D3221266CU  
Report No. SD72116210-0416H




## **SECTION 4**

### **DIAGRAM OF TEST SETUP**


#### 4.1 TEST SETUP DIAGRAM

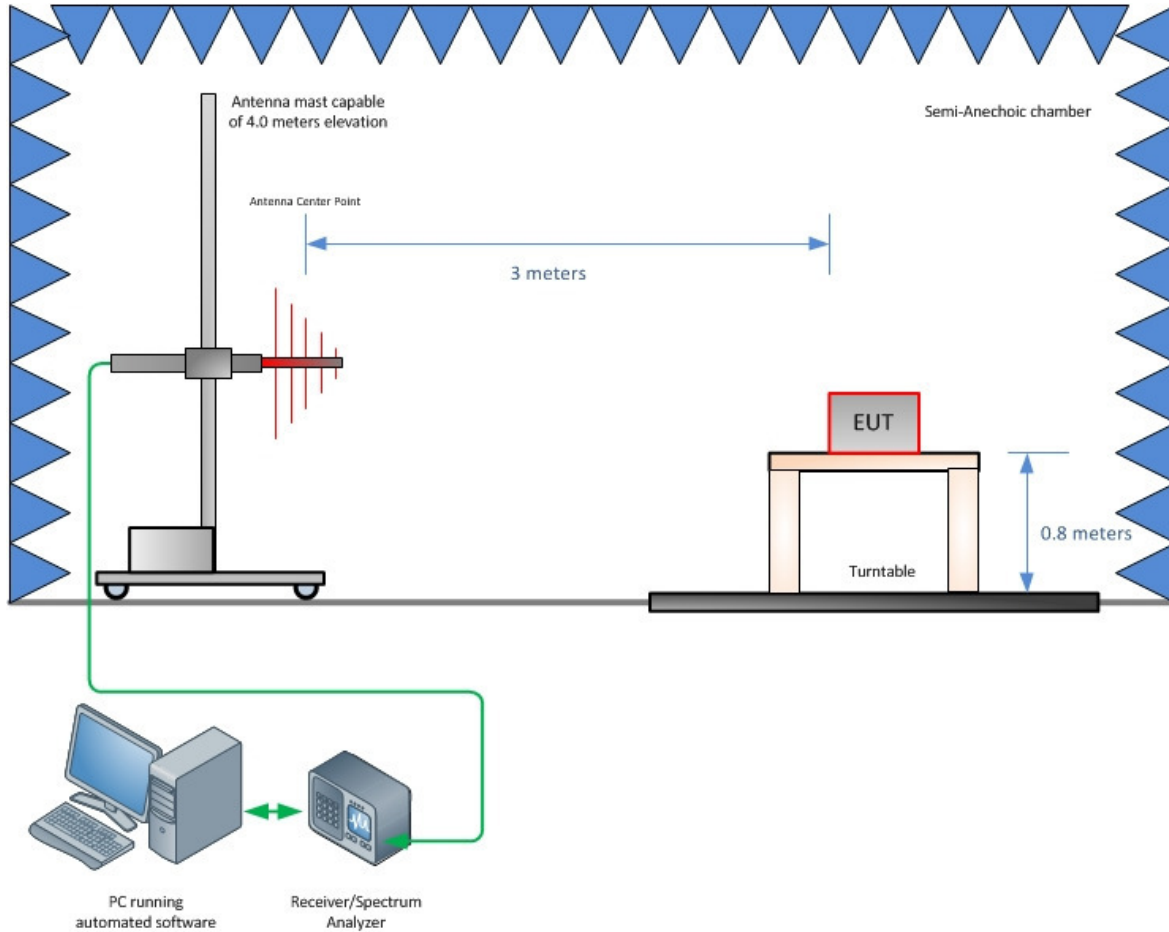


**Radiated Emission Test Setup (Below 1GHz)**

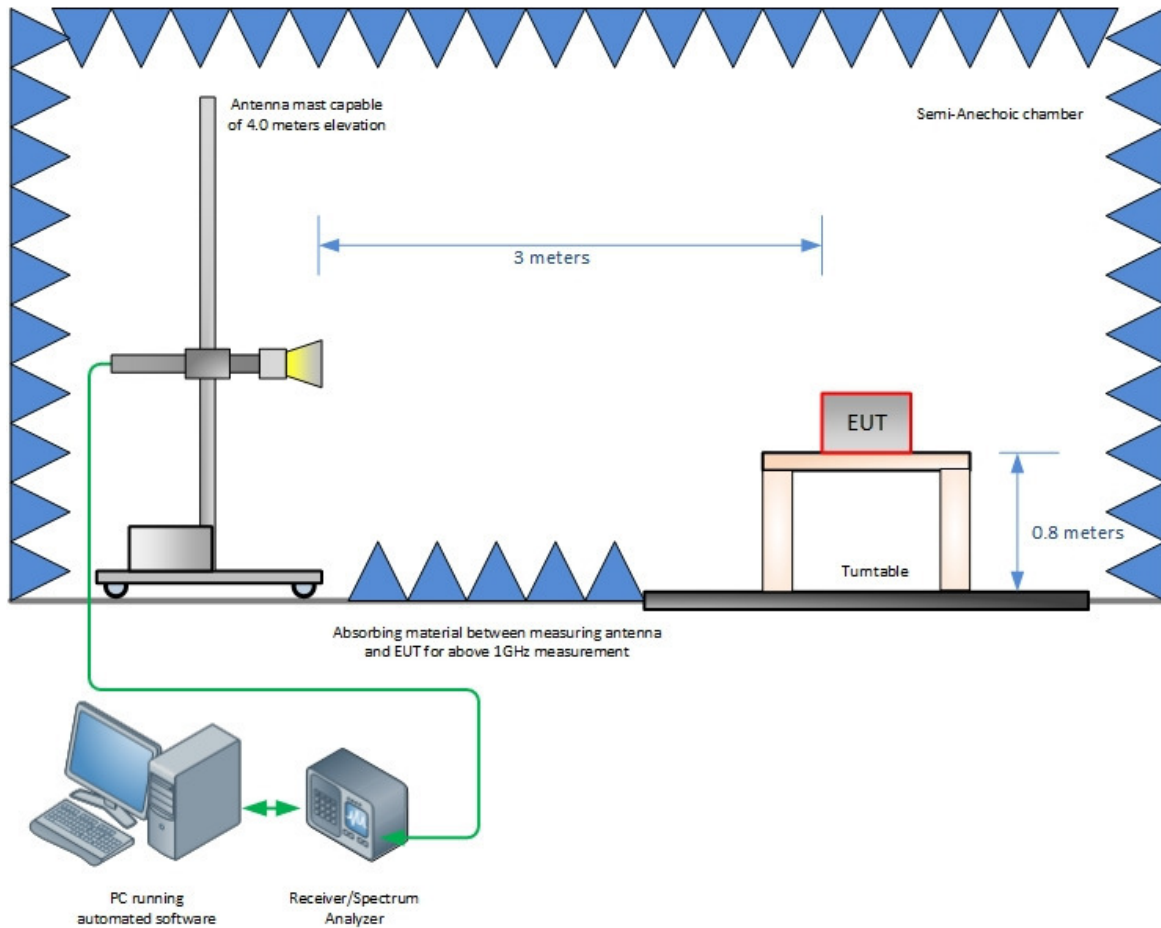


**Radiated Emission Test Setup (Above 1GHz)**

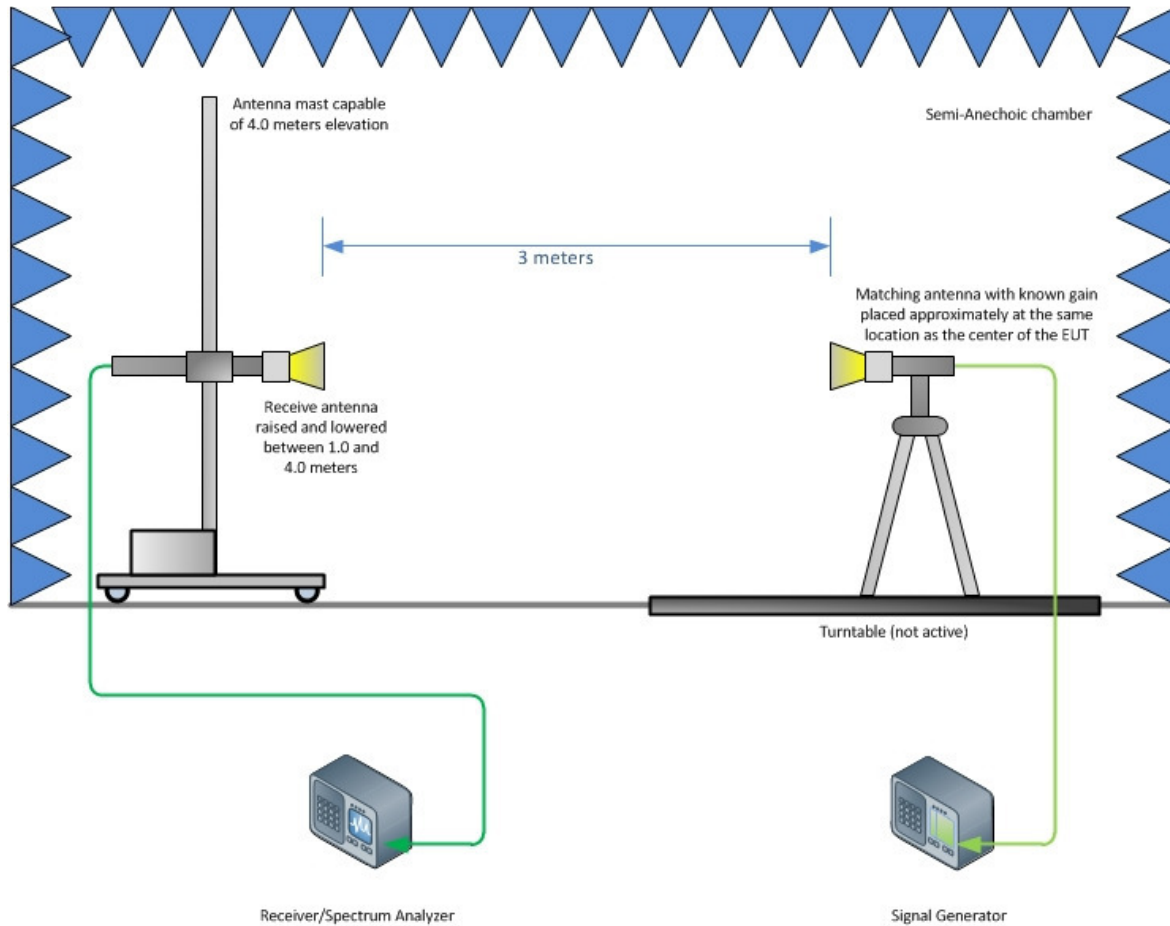

**Substitution Test Method (Above 1GHz, if applicable)**

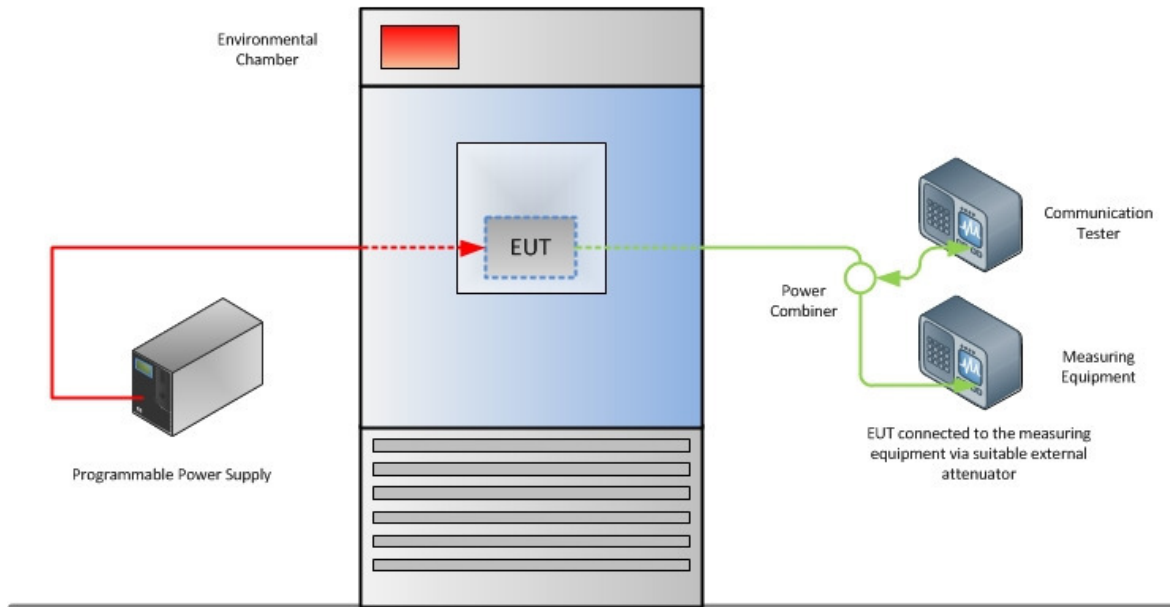

**Frequency Stability Test Configuration**

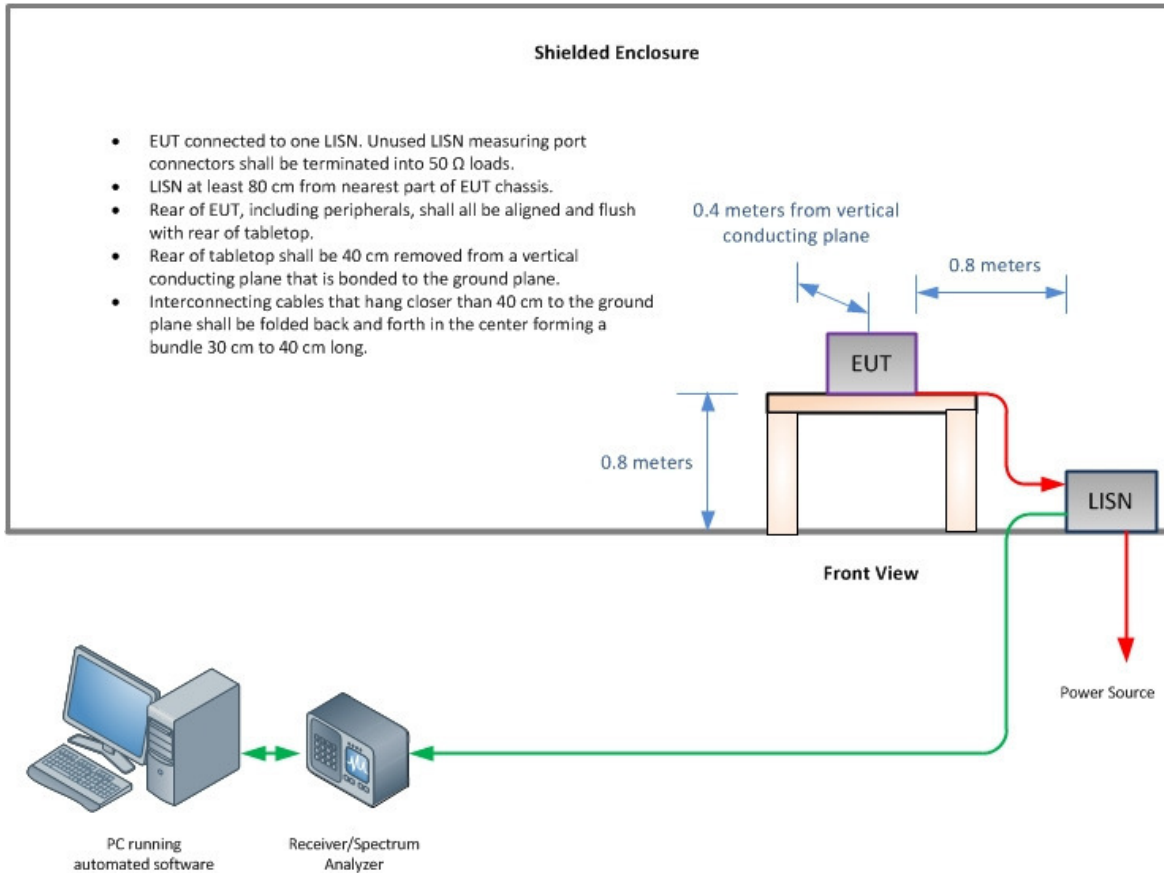

**Conducted Emissions Test Configuration (if applicable)**

FCC ID: NU: YETD32-21266NU  
CU: YETD32-21266CU  
IC: NU: 9298A-D3221266NU  
CU: 9298A-D3221266CU  
Report No. SD72116210-0416H



## **SECTION 5**

### **ACCREDITATION, DISCLAIMERS AND COPYRIGHT**



## 5.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT

TÜV SÜD America Inc.'s reports apply only to the specific sample tested under stated test conditions. It is the manufacturer's responsibility to assure the continued compliance of production units of this model. TÜV SÜD America, Inc. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD America, Inc.'s issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and TÜV SÜD America, Inc., extracts from the test report shall not be reproduced, except in full without TÜV SÜD America, Inc.'s written approval.

This report must not be used to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the federal government.

TÜV SÜD America, Inc. and its professional staff hold government and professional organization certifications for AAMI, ACIL, AEA, ANSI, IEEE, A2LA, NIST and VCCI.



A2LA Cert. No. 2955.13

