



America

---

**Choose certainty.  
Add value.**

## Report On

Application for Grant of Equipment Authorization of the  
Nextivity Inc.

Cel-Fi DUOSmart Cellular Signal Booster

FCC CFR 47 Part 2 and Part 24  
IC RSS-Gen and RSS-133

Report No. SD72112724-0116B Rev1.0

June 2016

FCC ID: NU: YETD32-21366NU  
CU: YETD32-21366CU  
IC: N/A  
Report No. SD72112724-0116B Rev1.0





**REPORT ON** Radio Testing of the  
Nextivity Inc.  
Cel-Fi DUOSmart Cellular Signal Booster

**TEST REPORT NUMBER** SD72112724-0116B Rev1.0

**PREPARED FOR** Nextivity Inc.  
11230 World Trade Drive, Suite 250  
San Diego, CA 92128

**CONTACT PERSON** CK Li  
Sr. Principal Engineer, Regulatory  
(858) 829-1692  
CLi@NextivityInc.com

**PREPARED BY**   
Xiaoying Zhang  
**Name**  
Authorized Signatory  
Title: EMC/Wireless Test Engineer

**APPROVED BY**   
Juan M. Gonzalez  
**Name**  
Authorized Signatory  
Title: Commercial Wireless EMC Lab Manager

**DATED** June 02, 2016

FCC ID: NU: YETD32-21366NU  
 CU: YETD32-21366CU  
 IC: N/A  
 Report No. SD72112724-0116B Rev1.0



**Revision History**

| SD72112724-0116B Rev1.0<br>Nextivity Inc.<br>M/N D32-2/13/66<br>Cel-Fi DUOSmart Cellular Signal Booster |                 |              |  |                |                 |
|---|-----------------|--------------|--|----------------|-----------------|
| DATE  | OLD REVISION    | NEW REVISION | REASON   | PAGES AFFECTED | APPROVED BY     |
| 04/22/16  | Initial Release |              |  |                | Juan M Gonzalez |
| 06/02/2016  | Initial Release | Rev1.0       | Change 1.3.2 Capability to LTE (Band 2, 13 and 4)/UNII and BT LE |                | Juan M Gonzalez |
|   |                 |              |  |                |                 |
|   |                 |              |  |                |                 |
|   |                 |              |  |                |                 |



## CONTENTS

| Section  | Page No  |
|----------|--|
| <b>1</b> | <b>REPORT SUMMARY..... 5</b>                             |
| 1.1      | Introduction ..... 6                                     |
| 1.2      | Brief Summary of Results..... 7                          |
| 1.3      | Product Information ..... 8                              |
| 1.4      | EUT Test Configuration ..... 11                          |
| 1.5      | Deviations from the Standard..... 15                     |
| 1.6      | Modification Record ..... 15                             |
| 1.7      | Test Methodology..... 15                                 |
| 1.8      | Test Facility Location..... 15                           |
| 1.9      | Test Facility Registration..... 15                       |
| 1.10     | Sample Calculations ..... 17                             |
| <b>2</b> | <b>TEST DETAILS ..... 18</b>                             |
| 2.1      | Transmitter Conducted Output Power ..... 19              |
| 2.2      | Equivalent Isotropic Radiated Power..... 23              |
| 2.3      | Occupied Bandwidth..... 25                               |
| 2.4      | Peak-Average Ratio..... 36                               |
| 2.5      | Band Edge ..... 43                                       |
| 2.6      | Conducted Spurious Emissions ..... 52                    |
| 2.7      | Field Strength Of Spurious Radiation ..... 57            |
| 2.8      | Frequency Stability ..... 72                             |
| 2.9      | Power Line Conducted Emissions ..... 76                  |
| <b>3</b> | <b>TEST EQUIPMENT USED ..... 82</b>                      |
| 3.1      | Test Equipment Used..... 83                              |
| 3.2      | Measurement Uncertainty ..... 85                         |
| <b>4</b> | <b>DIAGRAM OF TEST SETUP ..... 87</b>                    |
| 4.1      | Test Setup Diagram..... 88                               |
| <b>5</b> | <b>ACCREDITATION, DISCLAIMERS AND COPYRIGHT ..... 93</b> |
| 5.1      | Accreditation, Disclaimers and Copyright..... 94         |

FCC ID: NU: YETD32-21366NU  
CU: YETD32-21366CU  
IC: N/A  
Report No. SD72112724-0116B Rev1.0



## **SECTION 1**

### **REPORT SUMMARY**

Radio Testing of the  
Nextivity Inc.  
Cel-Fi DUO Smart Cellular Signal Booster



## 1.1 INTRODUCTION

The information contained in this report is intended to show verification of the Nextivity Inc. Smart Cellular Signal Booster to the requirements of the following:

- FCC CFR 47 Part 2 and Part 24
- IC RSS-Gen and RSS-133.

|                               |   |
|-------------------------------|---|
| Objective                     | To perform Radio Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.   |
| Manufacturer                  | Nextivity Inc.  |
| Model Number(s)               | D32-2/13/66   |
| FCC ID                        | NU: YETD32-21366NU<br>CU: YETD32-21366CU  |
| IC Number                     | N/A (Manufacturer not seeking IC Certification at the time of verification)   |
| Serial Number(s)              | 921550000015 (NU and CU)  |
| Number of Samples Tested      | 2   |
| Test Specification/Issue/Date | <ul style="list-style-type: none"><li>• FCC CFR 47 Part 2 and Part 24 (October 1, 2015).</li><li>• RSS-133 – 2 GHz Personal Communications Services (Issue 6, January 2013).</li><li>• RSS-Gen - General Requirements and Information for the Certification of Radio Apparatus (Issue 4, November 2014).</li></ul>  |
| Start of Test                 | January 07, 2016  |
| Finish of Test                | February 02, 2016   |
| Name of Engineer(s)           | Xiaoying Zhang  |
| Related Document(s)           | <ul style="list-style-type: none"><li>• ANSI/TIA-603-C-2004 – Land Mobile FM or PM – Communications Equipment – Measurement and Performance Standards.</li><li>• KDB971168 (D01 Power Meas License Digital Systems v02r02) Measurement Guidance For Certification Of Licensed Digital Transmitters</li><li>• KDB412172 D01 Determining ERP and EIRP v01r01 (Guidelines for Determining the Effective Radiated Power (ERP) and Equivalent Isotropically Radiated Power (EIRP) of a RF Transmitting System.</li><li>• Supporting documents for EUT certification are separate exhibits.</li></ul> |



## 1.2 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out in accordance with FCC CFR 47 Part 2 and Part 24 with cross-reference to the corresponding IC RSS standard is shown below.

| Section | Spec Clause |             |             | Test Description                     | Result    |
|---------|-------------|-------------|-------------|--------------------------------------|-----------|
|         | FCC Part 2  | FCC Part 24 | RSS-133     |                                      |           |
| 2.1     | 2.1046      | -           | 6.4         | Transmitter Conducted Output Power   | Compliant |
| 2.2     | -           | 24.232 (c)  | 6.4         | Equivalent Isotropic Radiated Power  | Compliant |
| 2.3     | 2.1049      | 24.238 (b)  | RSS-Gen 6.6 | Occupied Bandwidth                   | Compliant |
| 2.4     | -           | 24.232 (d)  | 6.4         | Peak-Average Ratio                   | Compliant |
| 2.5     | 2.1051      | 24.238 (a)  | 6.5         | Band Edge                            | Compliant |
| 2.6     | 2.1051      | 24.238 (a)  | 6.5         | Conducted Spurious Emissions         |           |
| 2.7     | 2.1053      | 24.238 (a)  | 6.5         | Field Strength Of Spurious Radiation | Compliant |
| 2.8     | 2.1055      | 24.235      | 6.3         | Frequency Stability                  | Compliant |
| -       | -           | -           | 6.6         | Receiver Spurious Emissions          | N/A       |
| 2.9     | -           | -           | RSS-Gen 8.8 | Power Line Conducted Emission        | Compliant |

N/A -Not applicable. EUT has no Stand-Alone receiver port



### **1.3 PRODUCT INFORMATION**

#### **1.3.1 Technical Description**

The Equipment Under Test (EUT) was a Nextivity Inc. Cel-Fi DUOSmart Cellular Signal Booster. The EUT is a signal booster for indoor residential, small business and small enterprise use. It consists of two units: the Network Unit (NU), and the Coverage Unit (CU). NU and CU are shipped and sold as one unit. The NU transmits and receives Cellular signals from the base station and operates similar to a cellular handset. The CU transmits and receives signals with the cellular handset and operates on frequencies similar to the cellular base station. The NU and CU are connected wirelessly over a full-duplex wireless link in the UNII band using a mixed OFDM and muxed cellular signal over a 30 or 40 MHz channel in each direction. The CU also includes Bluetooth LE connectivity. With the use of smartphone application, it allows user to register the product, update software, capture/display details metrics of the system. NU does not support Bluetooth LE. The LTE Band 2 function of the EUT were verified in this test report.





**1.3.2 EUT General Description**

EUT Description Smart Cellular Signal Booster

Model Name Cel-Fi DUO

Model Number(s) D32-2/13/66

Rated Voltage 12VDC via external AC/DC adapter

Mode Verified LTE Band 2

Frequency Range NU: 1850 MHz – 1910 MHz  
 CU: 1930 MHz – 1990 MHz

Capability LTE (Band 2, 13 and 4)/UNII and BT LE

Primary Unit (EUT)  Production  
 Pre-Production  
 Engineering

Manufacturer Declared Temperature Range 0°C to 40°C

Antenna Type PCB PIFA

Manufacturer Nextivity Inc.

Antenna Model N/A

|                      |      |      |
|----------------------|------|------|
| Maximum Antenna Gain | NU   | CU   |
|                      | 2dBi | 2dBi |



**1.3.3 Transmit Frequency Table**

| Mode                | Channel Bandwidth (MHz) | Tx Frequency (MHz) | Emission Designator              | EIRP             |                |
|---------------------|-------------------------|--------------------|----------------------------------|------------------|----------------|
|                     |                         |                    |                                  | Max. Power (dBm) | Max. Power (W) |
| LTE Band 2 Downlink | 5                       | 1932.5 - 1987.5    | 4M34F9W<br>4M34W7D               | 11.88            | 0.02           |
|                     | 10                      | 1935 - 1985        | 8M80F9W<br>8M80W7D               | 14.83            | 0.03           |
|                     | 15                      | 1937.5 - 1982.5    | 13M6F9W<br>13M6W7D               | 16.02            | 0.04           |
|                     | <b>20</b>               | <b>1940 - 1980</b> | <b>18M3F9W</b><br><b>18M3W7D</b> | <b>18.02</b>     | <b>0.06</b>    |
| LTE Band 2 Uplink   | 5                       | 1852.5 - 1907.5    | 4M31F9W<br>4M31W7D               | 23.70            | 0.23           |
|                     | 10                      | 1855 - 1905        | 8M86F9W<br>8M86W7D               | 23.68            | 0.23           |
|                     | 15                      | 1857.5 - 1902.5    | 13M6F9W<br>13M6W7D               | 23.24            | 0.21           |
|                     | <b>20</b>               | <b>1860 - 1900</b> | <b>18M2F9W</b><br><b>18M2W7D</b> | <b>23.77</b>     | <b>0.24</b>    |



## 1.4 EUT TEST CONFIGURATION

### 1.4.1 Test Configuration Description

| Test Configuration | Description   |
|--------------------|---|
| A                  | Downlink (CU TX). Input signal is applied to B2 antenna port of NU. Output is monitored from B2 Top antenna port of CU.                           |
| B                  | Uplink (NU TX). Input signal is applied to B2 antenna port of CU. Output is monitored from B2 Top antenna port of NU.                             |
| C                  | Radiated test setup. Downlink (CU TX). Input signal is applied to B2 antenna port of NU. B2 Top antenna port of CU is terminated with a 50Ω load. |
| D                  | Radiated test setup. Uplink (NU TX). Input signal is applied to B2 antenna port of CU. B2 Top antenna port of NU is terminated with a 50Ω load.   |

### 1.4.2 EUT Exercise Software

Manufacturer provided a configuration software (ConformanceTest.exe) running from a support laptop where both EUT are connected via USB.

### 1.4.3 Support Equipment and I/O cables


| Manufacturer    | Equipment/Cable                             | Description   |
|-----------------|---|---|
| Hon-Kwang       | AC/DC Adapter (EUT)                         | M/N HK-AB-120A250-US P/N 290N025-001, 12VDC 2.5A                            |
| -               | Support USB cable                           | 1.75 meters, shielded Type A to Micro B connector                           |
| Nextivity       | Support USB cable                           | Custom 1.0 meter shielded USB Type A to DB9 for the Shielded Test Enclosure |
| Sony            | Support Laptop                              | M/N PCG-31311L S/N 27545534 3006488   |
| Sony            | Support Laptop AC Adapter                   | M/N PCGA-AC19V9 S/N 147839091 0023259                                       |
| Rhode & Schwarz | Support Wideband Radio Communication Tester | M/N CMW500 S/N 1201.0002k50/103829  |
| Mini-Circuits   | Support Coaxial SMA Fixed Attenuator (x4)   | M/N VAT-30W2 30dB DC-6GHz   |
| Ramsey          | Support Shielded Test Enclosure             | M/N STE3300 S/N 3042 with custom USB cable and AC/DC Adapter                |

#### 1.4.4 Worst Case Configuration

Worst-case configuration used in this test report per Transmitter Conducted Output Power (Section 2.1 of this test report). This is for single channel verification, otherwise all three channels (Low, Mid and High) are verified:


| Mode                | Bandwidth | Channel No.        | Frequency |
|---------------------|-----------|--------------------|-----------|
| LTE Band 2 Downlink | 20MHz     | Mid Channel 900    | 1960MHz   |
| LTE Band 2 Uplink   | 20MHz     | High Channel 19100 | 1900MHz   |

EUT is a mobile device. Final installation position is unknown at the time of verification. For radiated measurements X, Y and Z orientations were verified. No major variation in emissions observed between the three (3) orientations. Verifications performed using "Z" configuration.

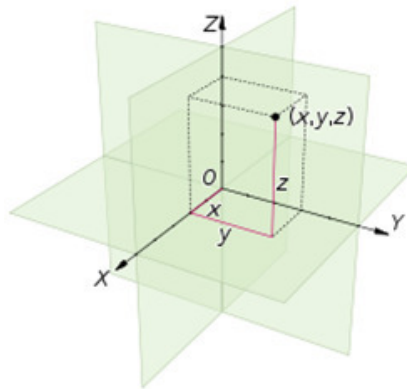


1.4.5 Simplified Test Configuration Diagram


**Downlink (CU Tx) Conducted Test**

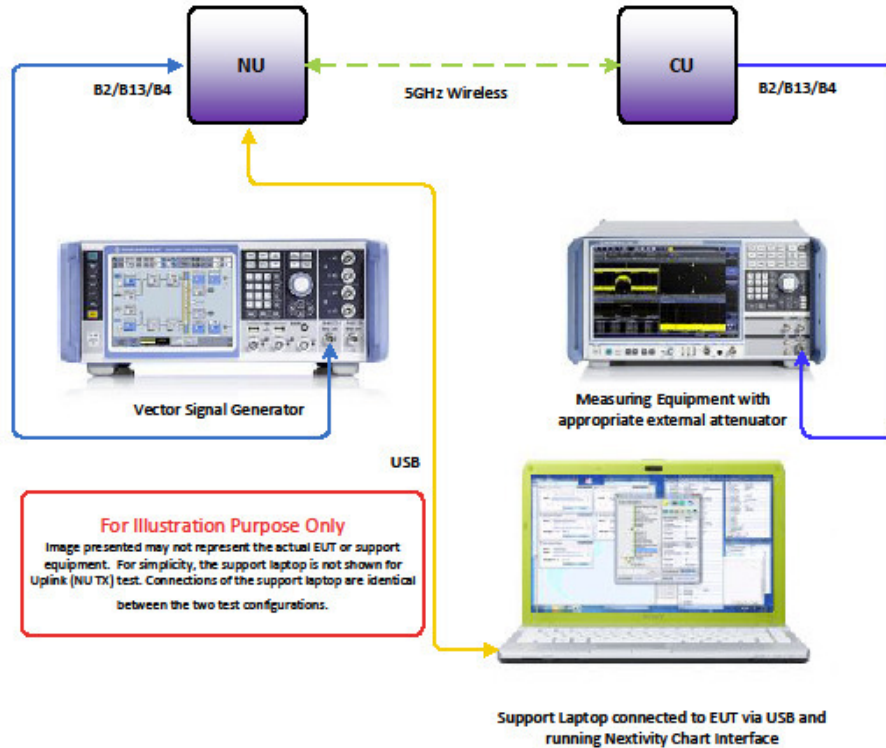


**Uplink (NU Tx) Conducted Test**

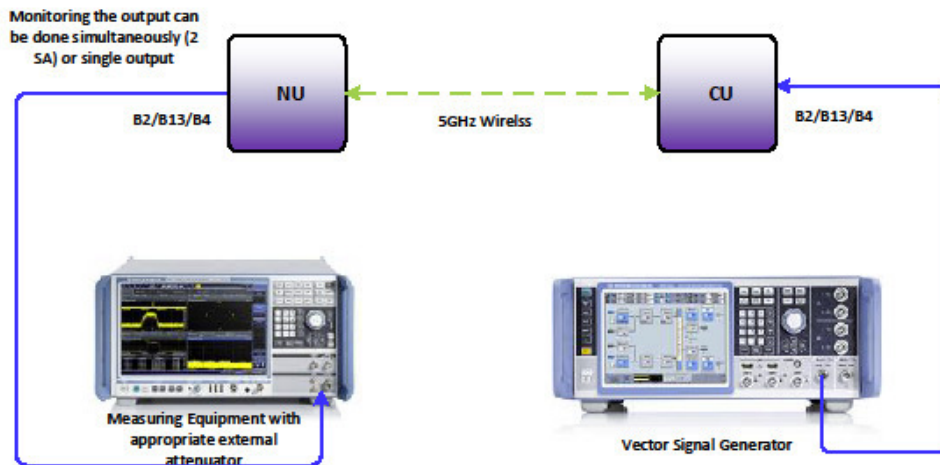

### Radiated Testing (Downlink)

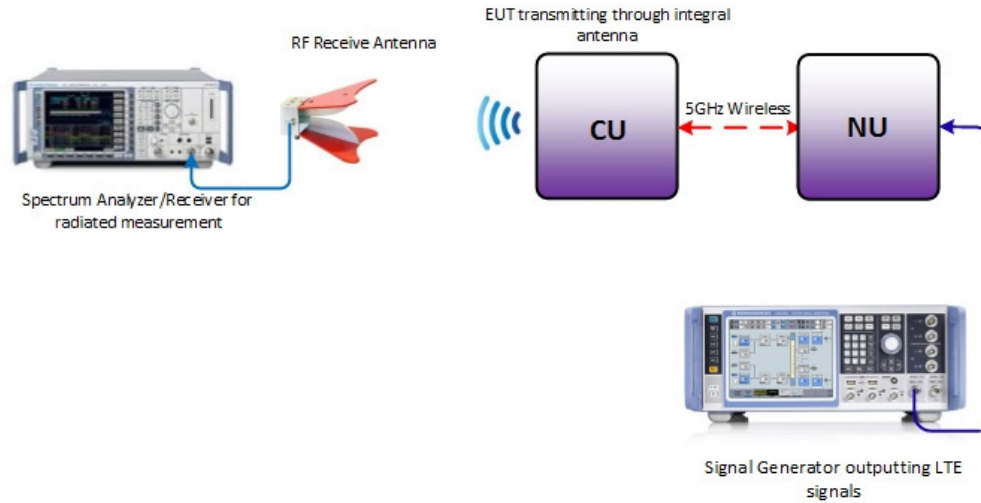

### Radiated Testing (Uplink)

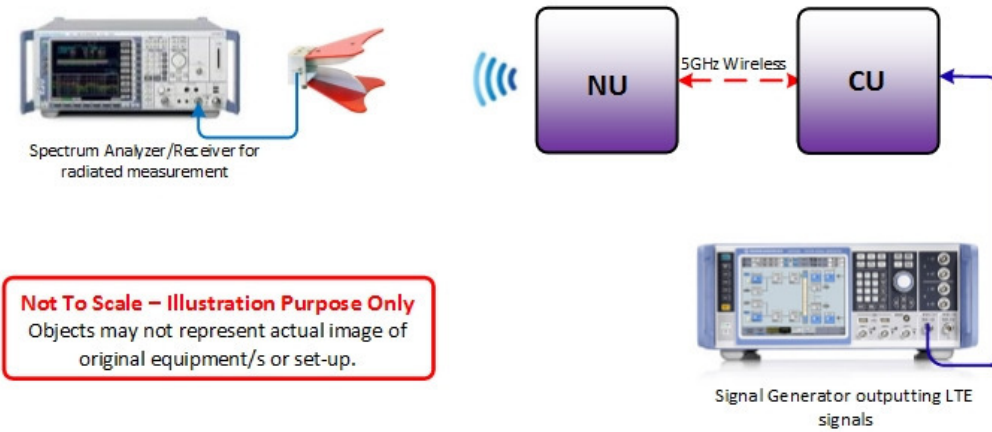

**Not To Scale – Illustration Purpose Only**  
Objects may not represent actual image of original equipment/s or set-up.



**1.5 DEVIATIONS FROM THE STANDARD**

No deviations from the applicable test standards or test plan were made during testing.

**1.6 MODIFICATION RECORD**

| Description of Modification            | Modification Fitted By | Date Modification Fitted |
|--|------------------------|--------------------------|
| Serial Number 921550000015 (NU and CU) |                        |                          |
| N/A                                    |                        |                          |

The table above details modifications made to the EUT during the test programme. The modifications incorporated during each test (if relevant) are recorded on the appropriate test pages.

**1.7 TEST METHODOLOGY**

All measurements contained in this report were conducted with ANSI C63.26 2015, American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services For conducted (if applicable) and radiated emissions the equipment under test (EUT) was configured to measure its highest possible emission level. This level was based on the maximized cable configuration from exploratory testing per ANSI C63.26-2015. The test modes were adapted according to the Operating Instructions provided by the manufacturer/client.

**1.8 TEST FACILITY LOCATION**

**1.8.1 TÜV SÜD America Inc. (Mira Mesa)**

10040 Mesa Rim Road, San Diego, CA 92121-2912 (32.901268,-117.177681). Phone: 858 678 1400 FAX: 858-546 0364

**1.8.2 TÜV SÜD America Inc. (Rancho Bernardo)**

Building #8, 16530 ViaEsprillo, San Diego, CA 92127-1708 (33.018644,-117.092409). Phone: 858 942 5542 Fax: 858 546 0364.

**1.9 TEST FACILITY REGISTRATION**

**1.9.1 FCC – Registration No.: US1146**

TUV SUD America Inc. (San Diego), is an accredited test facility with the site description report on file and has met all the requirements specified in §2.948 of the FCC rules. The acceptance letter from the FCC is maintained in our files and the Registration is US1146.

FCC ID: NU: YETD32-21366NU  
CU: YETD32-21366CU  
IC: N/A  
Report No. SD72112724-0116B Rev1.0



**1.9.2 Innovation, Science and Economic Development Canada Registration No.: 3067A**

The 10m Semi-anechoic chamber of TÜV SÜD America Inc. (San Diego) has been registered by Certification and Engineering Bureau of Innovation, Science and Economic Development Canada for radio equipment testing with Registration No. 3067A.





**1.10 SAMPLE CALCULATIONS**

**1.10.1 LTE Emission Designator**

Emission Designator = 1M30F9W  
 F = Frequency Modulation  
 9= Composite Digital Info  
 W = Combination (Audio/Data)

**1.10.2 Spurious Radiated Emission (below 1GHz)**

|   |                            |       |             |
|---|----------------------------|-------|-------------|
| Measuring equipment raw measurement (dBµV/m) @ 30 MHz |                            |       | 24.4        |
| Correction Factor (dB)                                | Asset# 1066 (cable)        | 0.3   | -12.6       |
|   | Asset# 1172 (cable)        | 0.3   |             |
|   | Asset# 1016 (preamplifier) | -30.7 |             |
|   | Asset# 1175(cable)         | 0.3   |             |
|   | Asset# 1002 (antenna)      | 17.2  |             |
| Reported QuasiPeak Final Measurement (dBµV/m) @ 30MHz |                            |       | <b>11.8</b> |

**1.10.3 Spurious Radiated Emission – Substitution Method**

Example = 84dBµV/m @ 1413 MHz (numerical sample only)

The field strength reading of 84dBµV/m @ 1413 MHz (2<sup>nd</sup> Harmonic of 706.5 MHz) is the maximized measurement when the EUT is on the turntable measured at 3 meters. The gain of the substituted antenna is 7.8dBi while the transmit cable loss is 1.0 dB (cable between signal generator and the substituted antenna). The signal generator level is adjusted until the 84dBµV/m level at the receiving end is replicated (identical test setup, i.e. same antenna, cable/s and preamp). If the adjusted signal generator level is -18dBm, then we have the following for both EIRP and ERP as required:

$$\begin{aligned}
 P_{EIRP} &= -18 \text{ dBm} + 7.8 \text{ dBi} - 1 \text{ dB} \\
 &= 11.2 \text{ dBm} \\
 P_{ERP} &= P_{EIRP} - 2.15 \text{ dB} \\
 &= 11.2 \text{ dBm} - 2.15 \text{ dB} \\
 &= 9.05 \text{ dBm}
 \end{aligned}$$

FCC ID: NU: YETD32-21366NU  
CU: YETD32-21366CU  
IC: N/A  
Report No. SD72112724-0116B Rev1.0



## **SECTION 2**

### **TEST DETAILS**

Radio Testing of the  
Nextivity Inc.  
Cel-Fi DUOSmart Cellular Signal Booster



## **2.1 TRANSMITTER CONDUCTED OUTPUT POWER**

### **2.1.1 Specification Reference**

FCC 47 CFR Part 2, Clause 2.1046 (a) and (c)  
RSS-133, Clause 6.4

### **2.1.2 Standard Applicable**

(a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in §2.1033(c)(8). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

(c) For measurements conducted pursuant to paragraphs (a) and (b) of this section, all calculations and methods used by the applicant for determining carrier power or peak envelope power, as appropriate, on the basis of measured power in the radio frequency load attached to the transmitter output terminals shall be shown. Under the test conditions specified, no components of the emission spectrum shall exceed the limits specified in the applicable rule parts as necessary for meeting occupied bandwidth or emission limitations.

### **2.1.3 Equipment Under Test and Modification State**

Serial No: 921550000015 (NU and CU)/ Test Configuration A and B

### **2.1.4 Date of Test/Initial of test personnel who performed the test**

January 07, 2016/XYZ

### **2.1.5 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.1.6 Environmental Conditions**

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility.

|                     |         |
|---------------------|---------|
| Ambient Temperature | 22.6°C  |
| Relative Humidity   | 46.4 %  |
| ATM Pressure        | 98.8kPa |



**2.1.7 Additional Observations**

- This is a conducted test using an average power meter.
- The path loss was measured and entered as a level offset.
- Both Peak and Average measurements presented.


**2.1.8 Test Results**

| <i>Downlink</i> |                  |                |                        |                            |                         |
|-----------------|------------------|----------------|------------------------|----------------------------|-------------------------|
| <b>Band</b>     | <b>Bandwidth</b> | <b>Channel</b> | <b>Frequency (MHz)</b> | <b>Average Power (dBm)</b> | <b>Peak Power (dBm)</b> |
| LTE Band 2      | 5MHz             | 625            | 1932.5                 | 9.10                       | 19.48                   |
|                 |                  | 900            | 1960                   | 9.88                       | 20.41                   |
|                 |                  | 1175           | 1987.5                 | 9.26                       | 19.61                   |
|                 | 10MHz            | 650            | 1935                   | 12.06                      | 22.28                   |
|                 |                  | 900            | 1960                   | 12.83                      | 24.48                   |
|                 |                  | 1150           | 1985                   | 11.59                      | 23.95                   |
|                 | 15MHz            | 675            | 1937.5                 | 13.03                      | 23.77                   |
|                 |                  | 900            | 1960                   | 14.02                      | 24.71                   |
|                 |                  | 1125           | 1982.5                 | 12.60                      | 23.40                   |
|                 | 20MHz            | 700            | 1940                   | 15.30                      | 25.67                   |
|                 |                  | <b>900</b>     | <b>1960</b>            | <b>16.02</b>               | <b>26.61</b>            |
|                 |                  | 1100           | 1980                   | 15.17                      | 25.07                   |




| <i>Uplink</i> |                  |                |                        |                            |                         |
|---------------|------------------|----------------|------------------------|----------------------------|-------------------------|
| <b>Band</b>   | <b>Bandwidth</b> | <b>Channel</b> | <b>Frequency (MHz)</b> | <b>Average Power (dBm)</b> | <b>Peak Power (dBm)</b> |
| LTE Band 2    | 5MHz             | 18625          | 1852.5                 | 21.70                      | 31.97                   |
|               |                  | 18900          | 1880                   | 21.62                      | 33.05                   |
|               |                  | 19175          | 1907.5                 | 21.45                      | 31.15                   |
|               | 10MHz            | 18650          | 1855                   | 21.58                      | 31.28                   |
|               |                  | 18900          | 1880                   | 21.56                      | 31.38                   |
|               |                  | 19150          | 1955                   | 21.68                      | 31.72                   |
|               | 15MHz            | 18675          | 1857.5                 | 20.96                      | 31.27                   |
|               |                  | 18900          | 1880                   | 21.18                      | 31.53                   |
|               |                  | 19125          | 1902.5                 | 21.24                      | 30.86                   |
|               | 20MHz            | 18700          | 1860                   | 21.76                      | 32.08                   |
|               |                  | 18900          | 1880                   | 21.59                      | 31.71                   |
|               |                  | <b>19100</b>   | <b>1900</b>            | <b>21.77</b>               | <b>31.10</b>            |

**2.1.9 Sample Test Plot**

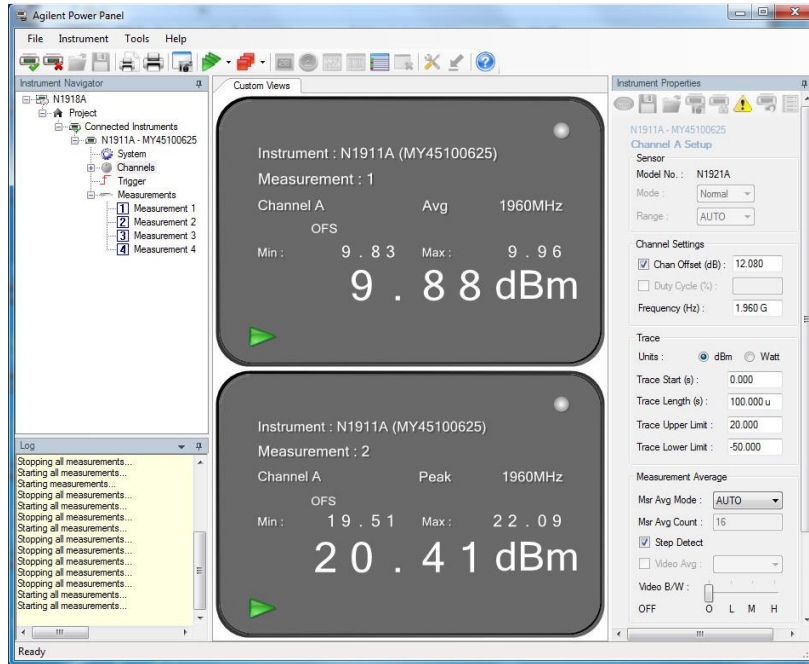

**LTE Band 2 DL 5MHz Bandwidth Mid Channel**

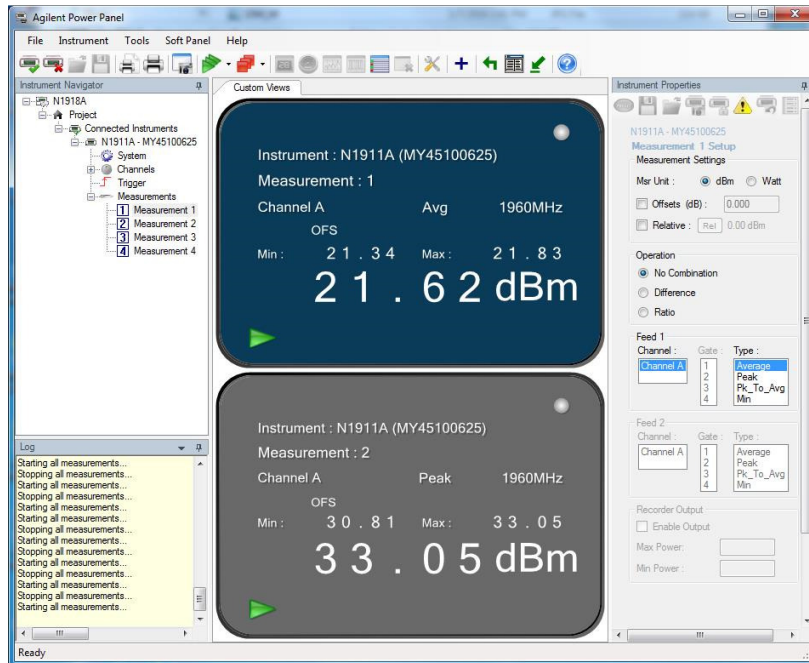

**LTE Band 2 UL 5MHz Bandwidth Mid Channel**



## 2.2 EQUIVALENT ISOTROPIC RADIATED POWER

### 2.2.1 Specification Reference

FCC 47 CFR Part 24, Clause 24.232(c)  
RSS-133, Clause 6.4

### 2.2.2 Standard Applicable

Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

### 2.2.3 Equipment Under Test and Modification State

Serial No: 921550000015 (NU and CU)

### 2.2.4 Date of Test/Initial of test personnel who performed the test

January 07, 2016/XYZ

### 2.2.5 Additional Observations

- EIRP was calculated as per Section 1.3.2 of KDB412172 D01 (Determining ERP and EIRP v01).
- Calculation formula in logarithmic terms:

$$EIRP = P_T + G_T - L_c$$

Where:

$P_T$  = transmitter conducted output power dBm (Section 2.1 of this test report)

$G_T$  = gain of the transmitting antenna, in dBi (EIRP);

$L_c$  = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

### 2.2.6 Sample Computation

$$\begin{aligned} ERP &= P_T + G_T - L_c \\ &= 23.19 \text{ (Average)} + 0.13 \text{ (max. gain)} - 5.28 \text{ (cable loss)} \\ &= 18.04 \text{ dBm} \end{aligned}$$

### 2.2.7 Test Results

Compliant. See attached table.



| <i>Downlink</i> |            |                 |                        |                    |              |             |
|-----------------|------------|-----------------|------------------------|--------------------|--------------|-------------|
| Bandwidth       | Channel    | Frequency (MHz) | Max Power Average(dBm) | Antenna Gain (dBi) | EIRP (dBm)   | Limit (dBm) |
| 5.0MHz          | 625        | 1932.5          | 9.10                   | 2.0                | 11.10        | 33          |
|                 | 900        | 1960            | 9.88                   | 2.0                | 11.88        | 33          |
|                 | 1175       | 1987.5          | 9.26                   | 2.0                | 11.26        | 33          |
| 10MHz           | 650        | 1935            | 12.06                  | 2.0                | 14.06        | 33          |
|                 | 900        | 1960            | 12.83                  | 2.0                | 14.83        | 33          |
|                 | 1150       | 1985            | 11.59                  | 2.0                | 13.59        | 33          |
| 15MHz           | 675        | 1937.5          | 13.03                  | 2.0                | 15.03        | 33          |
|                 | 900        | 1960            | 14.02                  | 2.0                | 16.02        | 33          |
|                 | 1125       | 1982.5          | 12.60                  | 2.0                | 14.60        | 33          |
| 20.0MHz         | 700        | 1940            | 15.30                  | 2.0                | 17.30        | 33          |
|                 | <b>900</b> | <b>1960</b>     | <b>16.02</b>           | <b>2.0</b>         | <b>18.02</b> | <b>33</b>   |
|                 | 1100       | 1980            | 15.17                  | 2.0                | 17.17        | 33          |

| <i>Uplink</i> |              |                 |                         |                    |              |             |
|---------------|--------------|-----------------|-------------------------|--------------------|--------------|-------------|
| Bandwidth     | Channel      | Frequency (MHz) | Max Power Average (dBm) | Antenna Gain (dBi) | EIRP (dBm)   | Limit (dBm) |
| 5.0MHz        | 18625        | 1852.5          | 21.70                   | 2.0                | 23.70        | 33          |
|               | 18900        | 1880            | 21.62                   | 2.0                | 23.62        | 33          |
|               | 19175        | 1907.5          | 21.45                   | 2.0                | 23.45        | 33          |
| 10MHz         | 18650        | 1855            | 21.58                   | 2.0                | 23.58        | 33          |
|               | 18900        | 1880            | 21.56                   | 2.0                | 23.56        | 33          |
|               | 19150        | 1955            | 21.68                   | 2.0                | 23.68        | 33          |
| 15MHz         | 18675        | 1857.5          | 20.96                   | 2.0                | 22.96        | 33          |
|               | 18900        | 1880            | 21.18                   | 2.0                | 23.18        | 33          |
|               | 19125        | 1902.5          | 21.24                   | 2.0                | 23.24        | 33          |
| 20.0MHz       | 18700        | 1860            | 21.76                   | 2.0                | 23.76        | 33          |
|               | 18900        | 1880            | 21.59                   | 2.0                | 23.59        | 33          |
|               | <b>19100</b> | <b>1900</b>     | <b>21.77</b>            | <b>2.0</b>         | <b>23.77</b> | <b>33</b>   |





## **2.3 OCCUPIED BANDWIDTH**

### **2.3.1 Specification Reference**

FCC 47 CFR Part 2, Clause 2.1049  
FCC 47 CFR Part 24, Clause 24.238(b)  
RSS-Gen, Clause 6.6

### **2.3.2 Standard Applicable**

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

### **2.3.3 Equipment Under Test and Modification State**

Serial No: 921550000015 (NU and CU) / Test Configuration A and B

### **2.3.4 Date of Test/Initial of test personnel who performed the test**

January 07, 2016/XYZ

### **2.3.5 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.3.6 Environmental Conditions**

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility.

|                     |         |
|---------------------|---------|
| Ambient Temperature | 22.6°C  |
| Relative Humidity   | 46.4 %  |
| ATM Pressure        | 98.8kPa |

### **2.3.7 Additional Observations**

- This is a conducted test. Both 26dB bandwidth and 99% bandwidth presented.
- All channels for emission bandwidth verification verified.
- The span is between two and five times the anticipated OBW.
- The RBW is set to 1% of the OBW while the VBW is  $\geq 3X$  RBW.
- The detector is peak and the trace mode is max hold.
- Only test plots for middle channel were presented as the representative configuration.
- The SA built-in emission bandwidth measurement feature is utilized. The power level setting is set to 99% while "x dB" is set to -26.



**2.3.8 Test Results**

| <i>Downlink</i> |                  |                |                        |                  |                       |
|-----------------|------------------|----------------|------------------------|------------------|-----------------------|
| <b>Band</b>     | <b>Bandwidth</b> | <b>Channel</b> | <b>Frequency (MHz)</b> | <b>OBW (MHz)</b> | <b>-26dB BW (MHz)</b> |
| LTE Band 2      | 5MHz             | 625            | 1932.5                 | 4.25             | 4.75                  |
|                 |                  | 900            | 1960                   | 4.34             | 4.92                  |
|                 |                  | 1175           | 1987.5                 | 4.34             | 4.89                  |
|                 | 10MHz            | 650            | 1935                   | 8.80             | 9.55                  |
|                 |                  | 900            | 1960                   | 8.56             | 9.61                  |
|                 |                  | 1150           | 1985                   | 8.80             | 9.55                  |
|                 | 15MHz            | 675            | 1937.5                 | 13.37            | 14.41                 |
|                 |                  | 900            | 1960                   | 13.63            | 14.59                 |
|                 |                  | 1125           | 1982.5                 | 13.55            | 14.59                 |
|                 | 20MHz            | 700            | 1940                   | 18.06            | 19.22                 |
|                 |                  | 900            | 1960                   | 18.29            | 19.68                 |
|                 |                  | 1100           | 1980                   | 18.06            | 19.57                 |




America

| <i>Uplink</i> |           |         |                 |           |                |
|---------------|-----------|---------|-----------------|-----------|----------------|
| Band          | Bandwidth | Channel | Frequency (MHz) | OBW (MHz) | -26dB BW (MHz) |
| LTE Band 2    | 5MHz      | 625     | 1852.5          | 4.28      | 4.86           |
|               |           | 900     | 1880            | 4.31      | 4.89           |
|               |           | 1175    | 1907.5          | 4.31      | 4.92           |
|               | 10MHz     | 650     | 1855            | 8.86      | 9.55           |
|               |           | 900     | 1880            | 8.86      | 9.61           |
|               |           | 1150    | 1905            | 8.80      | 9.55           |
|               | 15MHz     | 675     | 1857.5          | 13.55     | 14.59          |
|               |           | 900     | 1880            | 13.63     | 14.59          |
|               |           | 1125    | 1902.5          | 13.37     | 14.50          |
|               | 20MHz     | 700     | 1860            | 18.18     | 19.45          |
|               |           | 900     | 1880            | 18.06     | 19.45          |
|               |           | 1100    | 1900            | 18.06     | 19.45          |



LTE Band 2 Downlink 5MHz BandwidthMid Channel 99% OBW

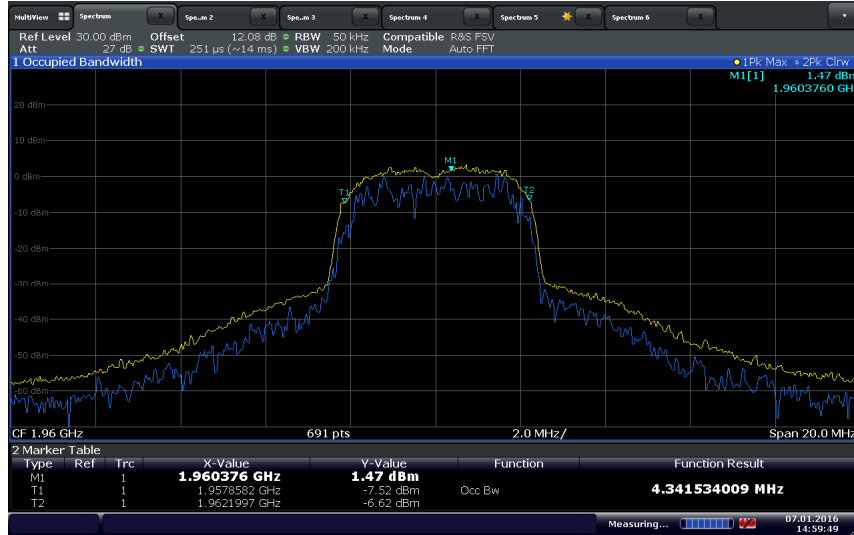

Date: 7 JAN 2016 14:59:49

LTE Band 2 Downlink 5MHz BandwidthMid Channel-26dB BW



Date: 7 JAN 2016 15:01:48




**LTE Band 2 Downlink 10MHz Bandwidth Mid Channel 99% OBW**



Date: 7 JAN 2016 14:38:05


**LTE Band 2 Downlink 10MHz Bandwidth Mid Channel-26dB BW**

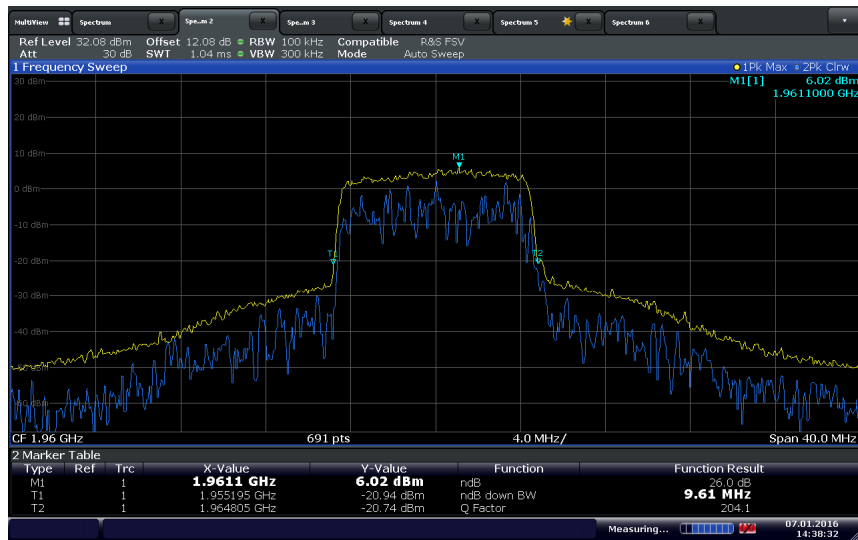


Date: 7 JAN 2016 14:38:32



**LTE Band 2 Downlink 15MHz Bandwidth Mid Channel 99% OBW**

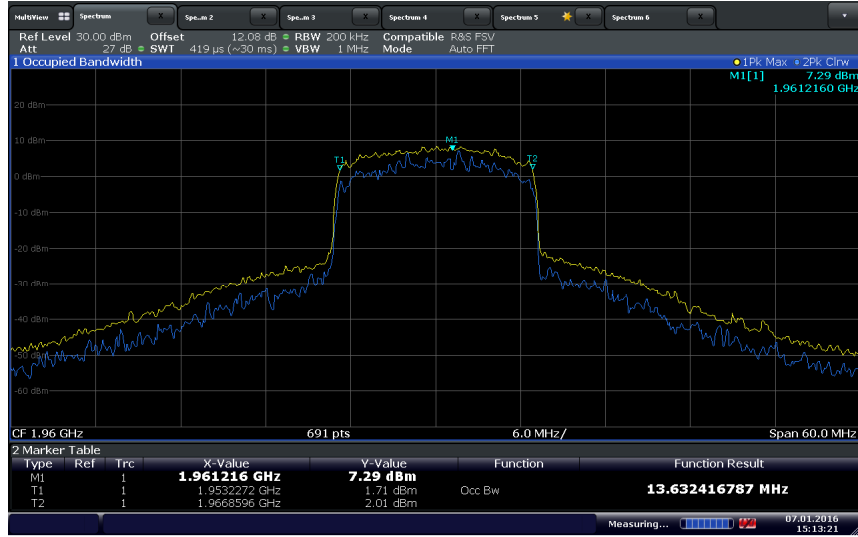

**LTE Band 2 Downlink 15MHz Bandwidth Mid Channel-26dB BW**

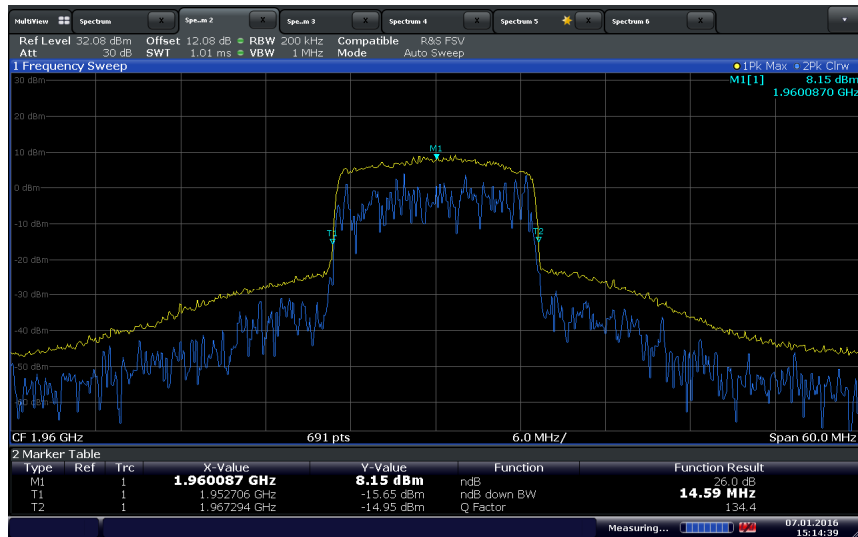




**LTE Band 2 Downlink 20MHz Bandwidth Mid Channel 99% OBW**



Date: 7 JAN 2016 15:24:40

**LTE Band 2 Downlink 20MHz Bandwidth Mid Channel -26dB BW**

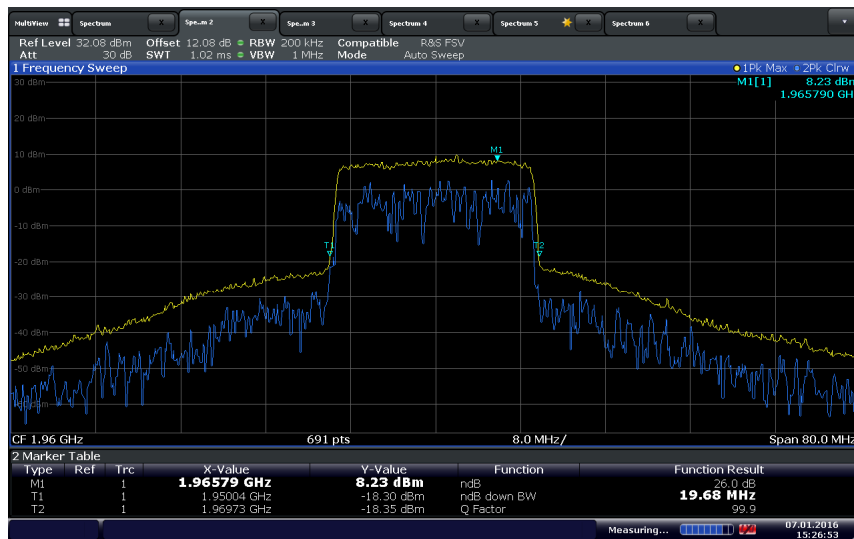


Date: 7 JAN 2016 15:26:53




America

### LTE Band 2 Uplink 5MHz Bandwidth Mid Channel 99% OBW

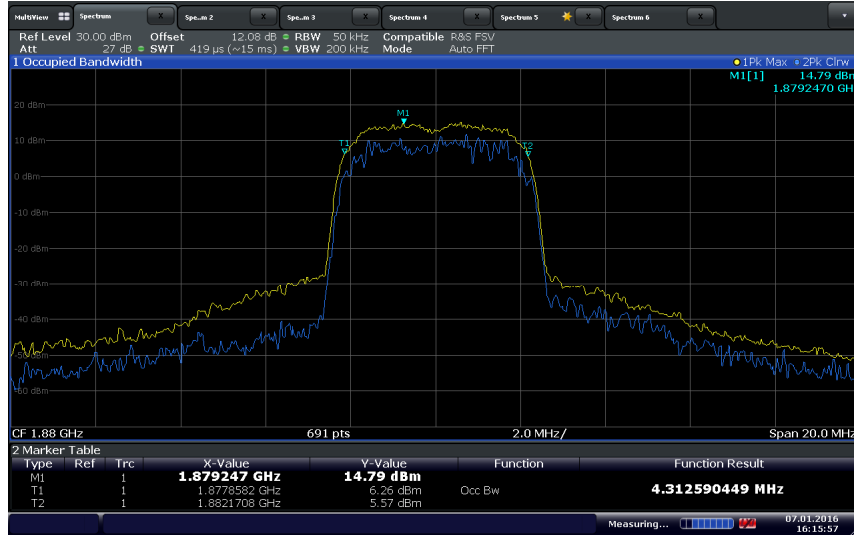

Date: 7 JAN 2016 16:15:57

### LTE Band 2 Uplink 5MHz Bandwidth Mid Channel-26dB BW

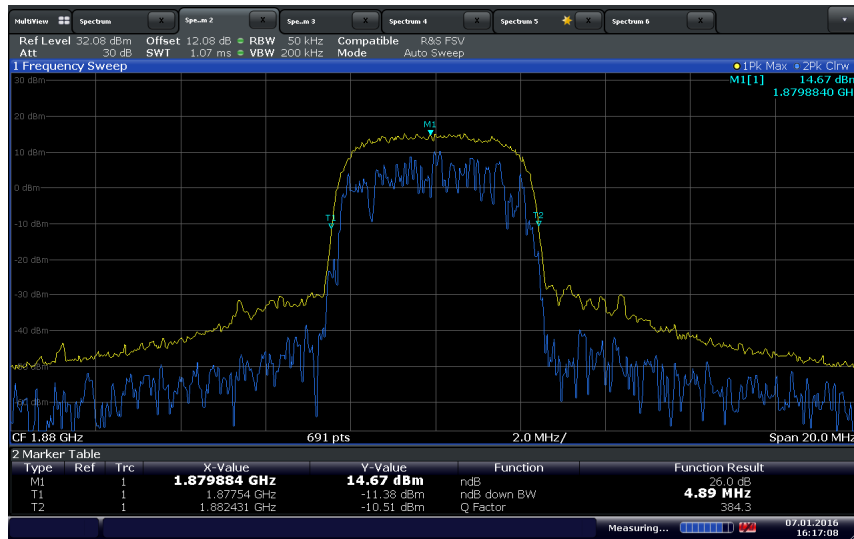


Date: 7 JAN 2016 16:17:08





LTE Band 2 Uplink 10MHz Bandwidth Mid Channel 99% OBW

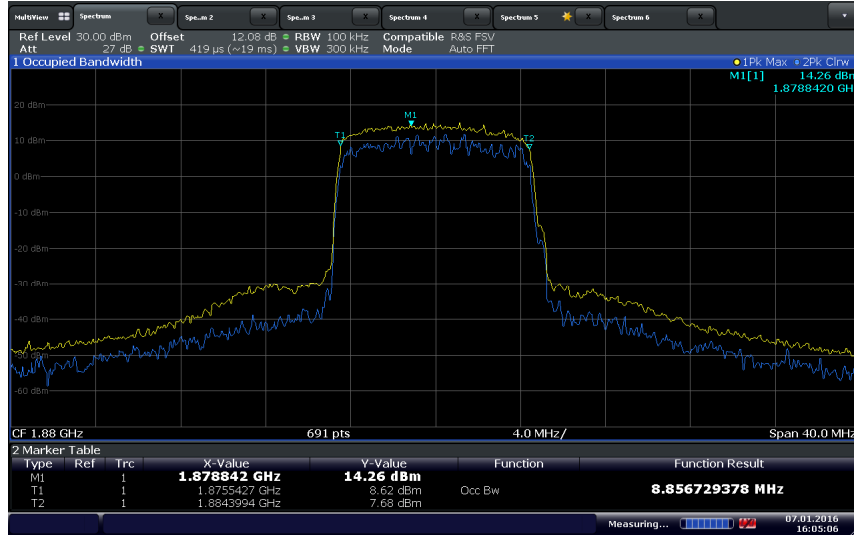

Date: 7 JAN 2016 16:05:06

LTE Band 2 Uplink 10MHz Bandwidth Mid Channel-26dB BW



Date: 7 JAN 2016 16:06:20




LTE Band 2 Uplink 15MHz Bandwidth Mid Channel 99% OBW



Date: 7 JAN 2016 15:55:33

LTE Band 2 Uplink 15MHz Bandwidth Mid Channel-26dB BW

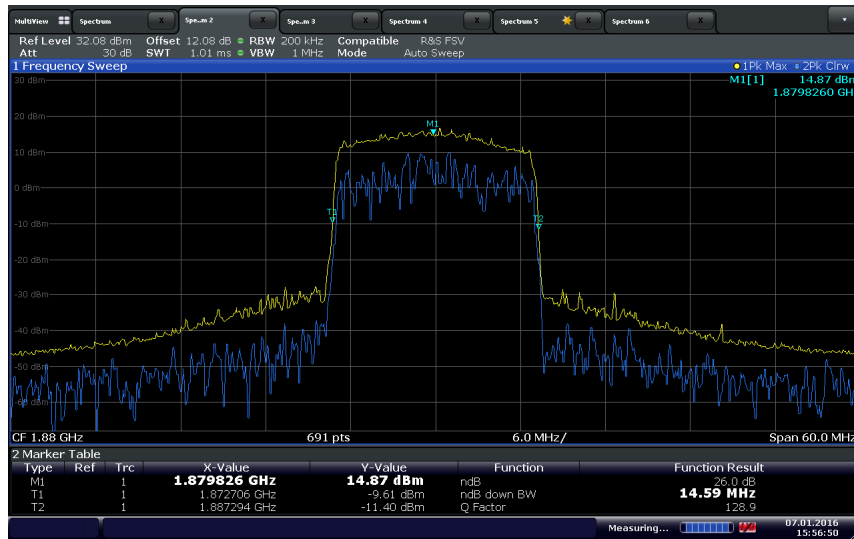

Date: 7 JAN 2016 15:56:50




LTE Band 2 Uplink 20MHz Bandwidth Mid Channel 99% OBW



Date: 7 JAN 2016 15:50:25

LTE Band 2 Uplink 20MHz Bandwidth Mid Channel-26dB BW

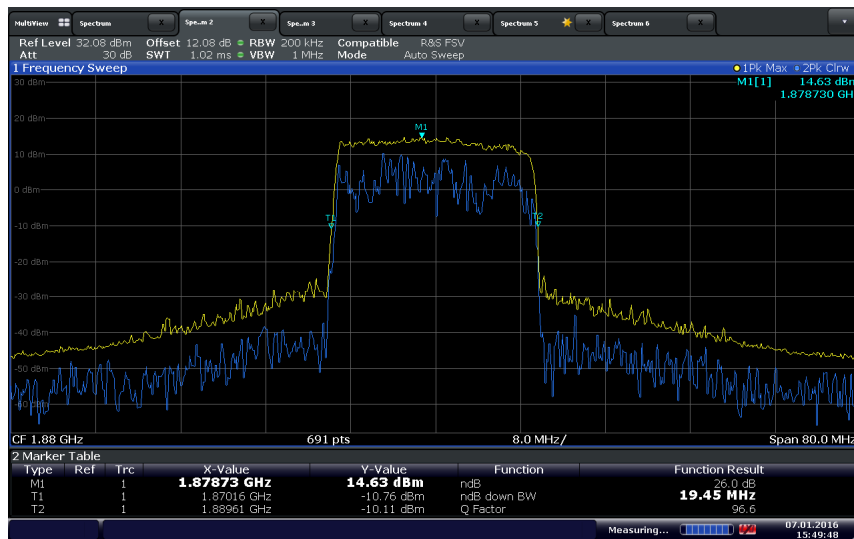

Date: 7 JAN 2016 15:49:49



## **2.4 PEAK-AVERAGE RATIO**

### **2.4.1 Specification Reference**

FCC 47 CFR Part 24, Clause 24.232(d)  
RSS-133, Clause 6.4

### **2.4.2 Standard Applicable**

Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB

### **2.4.3 Equipment Under Test and Modification State**

Serial No: 921550000015 (NU and CU) / Test Configuration A and B

### **2.4.4 Date of Test/Initial of test personnel who performed the test**

January 08, 2016/XYZ

### **2.4.5 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.4.6 Environmental Conditions**

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility.

|                     |         |
|---------------------|---------|
| Ambient Temperature | 21.9°C  |
| Relative Humidity   | 43.3%   |
| ATM Pressure        | 99.3kPa |

### **2.4.7 Additional Observations**

- This is a conducted test. Test procedure is per Section 5.7 of KDB971168 (D01 Power Meas License Digital Systems v02r02). Appropriate offset (line losses) applied.
- Measurement was done using the Spectrum Analyzer's Complementary Cumulative Distribution Function (CCDF) measurement profile. The built-in function is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth (crest factor or peak-to-average ratio) The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signals spends at or above the level defines the probability for that particular power level.
- Procedure is per Section 5.7.1 of KDB971168.
- RBW was set to maximum the SA can support.
- The maximum PAR level associated with a probability of 0.1% was recorded.



- There are no measured PAR levels greater than 13dB. EUT complies.
- Only test plots for middle channel were presented as the representative configuration.

**2.4.8 Test Results**

| <i>Downlink</i> |                  |                |                        |                 |
|-----------------|------------------|----------------|------------------------|-----------------|
| <b>Band</b>     | <b>Bandwidth</b> | <b>Channel</b> | <b>Frequency (MHz)</b> | <b>PAR (dB)</b> |
| LTE Band 2      | 5MHz             | 625            | 1932.5                 | 11.41           |
|                 |                  | 900            | 1960                   | 11.46           |
|                 |                  | 1175           | 1987.5                 | 10.46           |
|                 | 10MHz            | 650            | 1935                   | 11.27           |
|                 |                  | 900            | 1960                   | 10.92           |
|                 |                  | 1150           | 1985                   | 11.07           |
|                 | 15MHz            | 675            | 1937.5                 | 11.61           |
|                 |                  | 900            | 1960                   | 11.15           |
|                 |                  | 1125           | 1982.5                 | 11.16           |
|                 | 20MHz            | 700            | 1940                   | 11.57           |
|                 |                  | 900            | 1960                   | 10.91           |
|                 |                  | 1100           | 1980                   | 11.43           |





America

| <i>Uplink</i> |                  |                |                        |                 |
|---------------|------------------|----------------|------------------------|-----------------|
| <b>Band</b>   | <b>Bandwidth</b> | <b>Channel</b> | <b>Frequency (MHz)</b> | <b>PAR (dB)</b> |
| LTE Band 2    | 5MHz             | 18625          | 1852.5                 | 10.70           |
|               |                  | 18900          | 1880                   | 9.91            |
|               |                  | 19175          | 1907.5                 | 9.54            |
|               | 10MHz            | 18650          | 1855                   | 10.44           |
|               |                  | 18900          | 1880                   | 10.49           |
|               |                  | 19150          | 1955                   | 9.62            |
|               | 15MHz            | 18675          | 1857.5                 | 11.32           |
|               |                  | 18900          | 1880                   | 10.92           |
|               |                  | 19125          | 1902.5                 | 10.36           |
|               | 20MHz            | 18700          | 1860                   | 10.31           |
|               |                  | 18900          | 1880                   | 10.51           |
|               |                  | 19100          | 1900                   | 9.85            |



**2.4.9 Sample Test Plot**

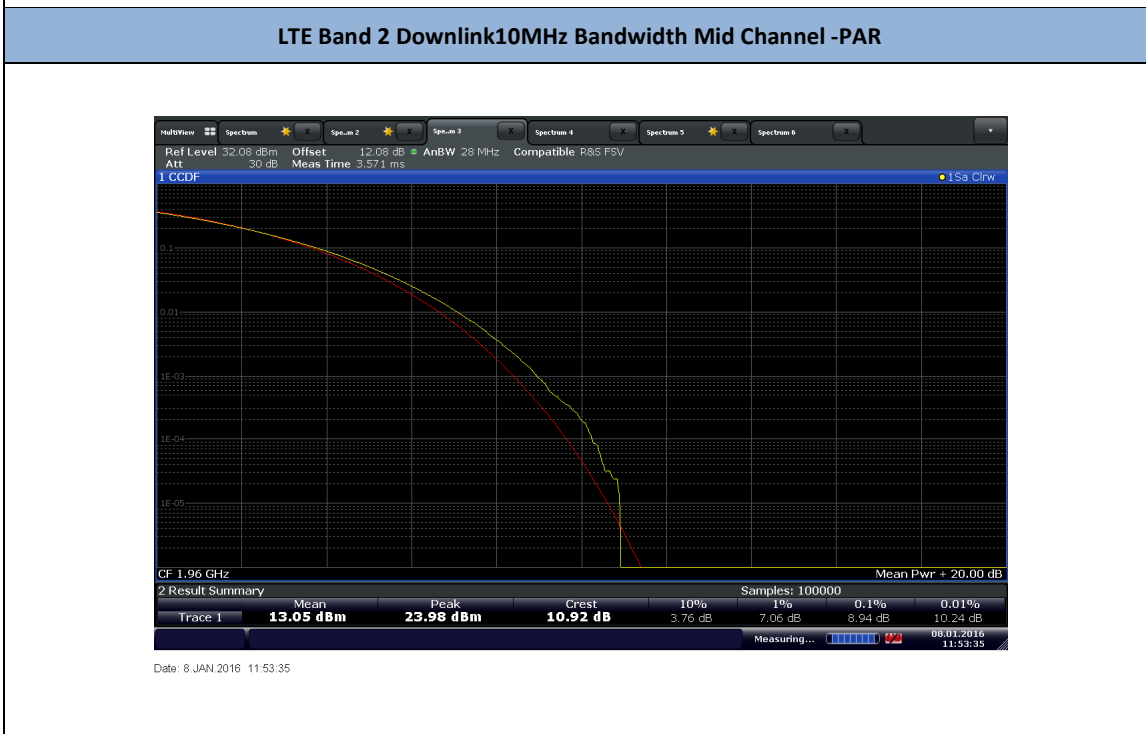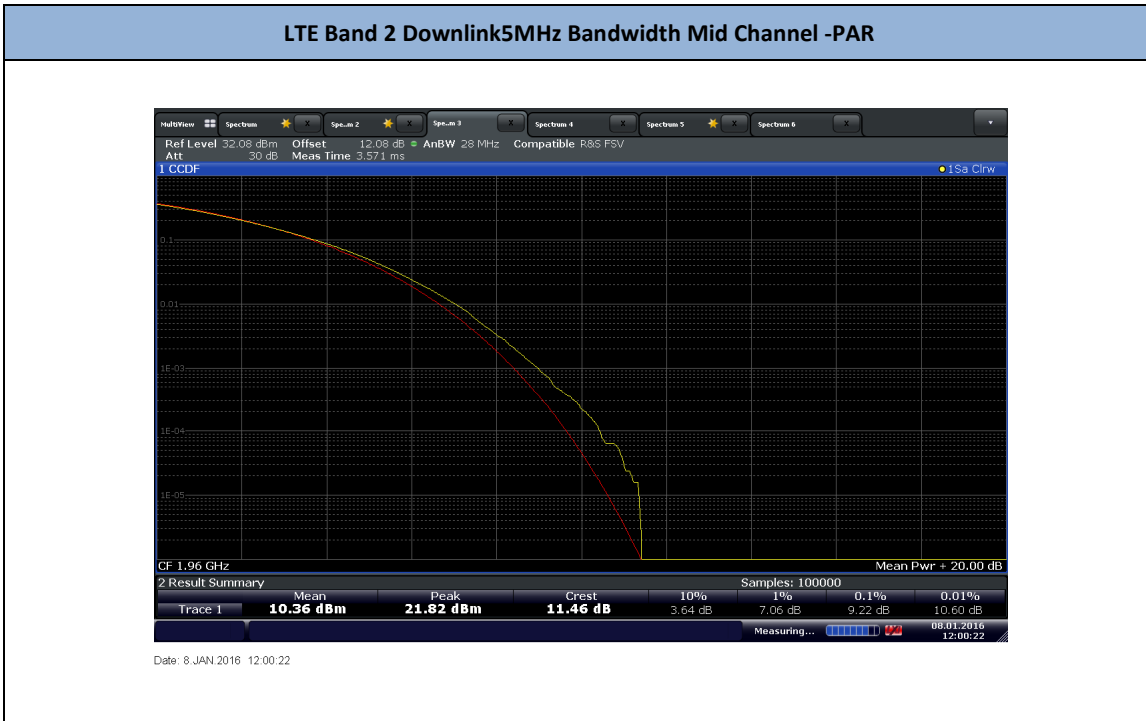



America

### LTE Band 2 Downlink15MHz Bandwidth Mid Channel -PAR



Date: 8 JAN 2016 11:44:06

### LTE Band 2 Downlink20MHz Bandwidth Mid Channel -PAR



Date: 8 JAN 2016 11:42:05





### LTE Band 2 Uplink 5MHz Bandwidth Mid Channel -PAR



Date: 8 JAN 2016 11:00:16

### LTE Band 2 Uplink 10MHz Bandwidth Mid Channel -PAR



Date: 8 JAN 2016 11:05:12



America

### LTE Band 2 Uplink 15MHz Bandwidth Mid Channel -PAR



Date: 8 JAN 2016 11:10:42

### LTE Band 2 Uplink 20MHz Bandwidth Mid Channel -PAR



Date: 8 JAN 2016 11:20:20



## **2.5 BAND EDGE**

### **2.5.1 Specification Reference**

FCC 47 CFR Part 24, Clause 24.238(a)  
RSS-133, Clause 6.5.1

### **2.5.2 Standard Applicable**

Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

### **2.5.3 Equipment Under Test and Modification State**

Serial No: 921550000015 (NU and CU) / Test Configuration A and B

### **2.5.4 Date of Test/Initial of test personnel who performed the test**

January 08, 2016/XYZ

### **2.5.5 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.5.6 Environmental Conditions**

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility.

|                     |         |
|---------------------|---------|
| Ambient Temperature | 21.9°C  |
| Relative Humidity   | 43.3%   |
| ATM Pressure        | 99.3kPa |

### **2.5.7 Additional Observations**

- This is a conducted test.
- Test guidance is per Section 6 of KDB971168 (D01 Power Meas License Digital Systems v02r02).
- The path loss was measured and entered as a level offset.
- For band edge measurements, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter was employed.
- The limit is set to -13dBm.


### **2.5.8 Test Results**

See attached plots.




America

### LTE Band 2 Downlink 5MHz Bandwidth Low Channel Band Edge

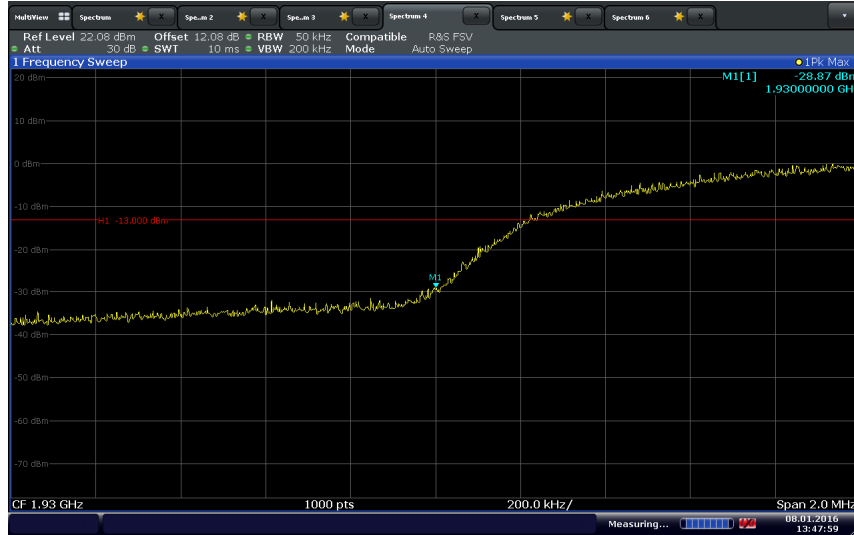

Date: 8 JAN 2016 13:47:59

### LTE Band 2 Downlink 5MHz Bandwidth High Channel Band Edge

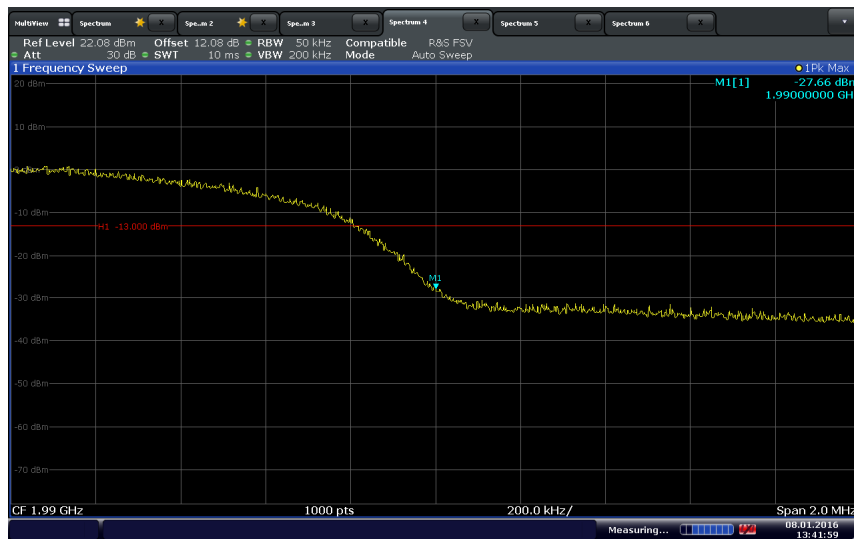


Date: 8 JAN 2016 13:41:59




America

### LTE Band 2 Downlink 10MHz Bandwidth Low Channel Band Edge

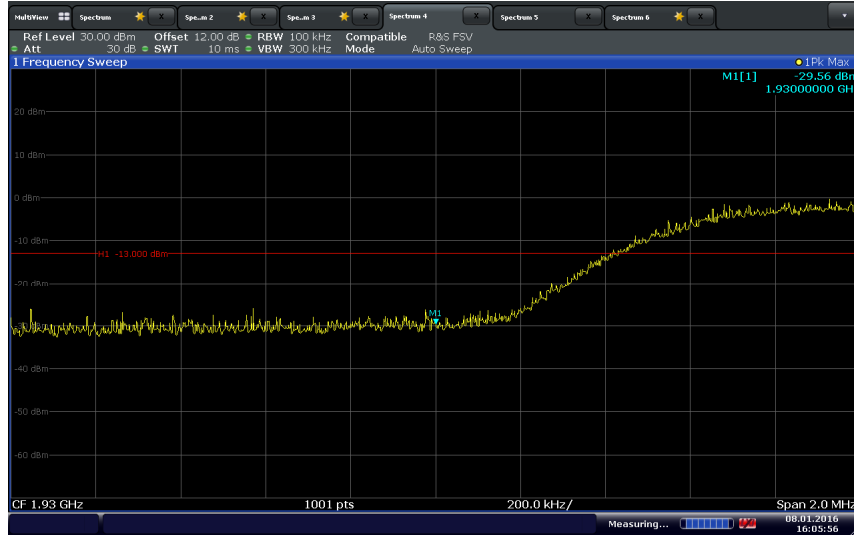

Date: 8 JAN 2016 16:05:56

### LTE Band 2 Downlink 10MHz Bandwidth High Channel Band Edge

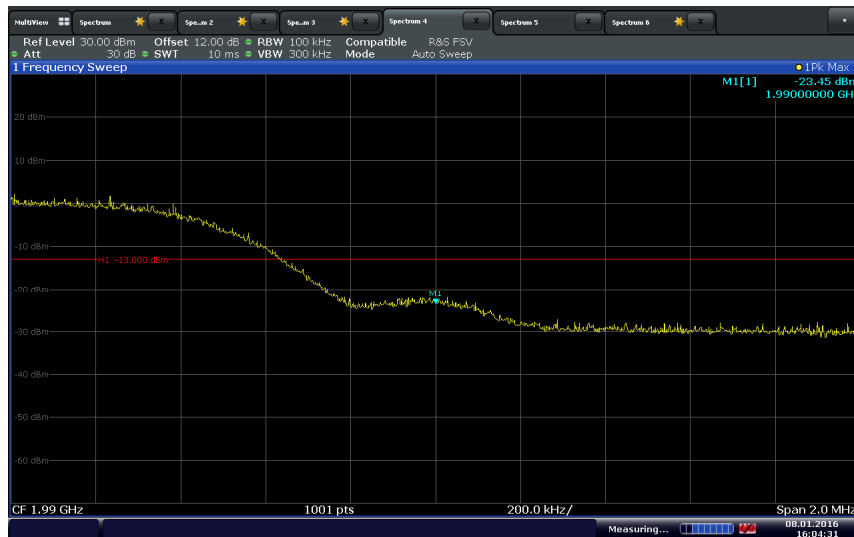


Date: 8 JAN 2016 16:04:31




America

### LTE Band 2 Downlink 15MHz Bandwidth Low Channel Band Edge

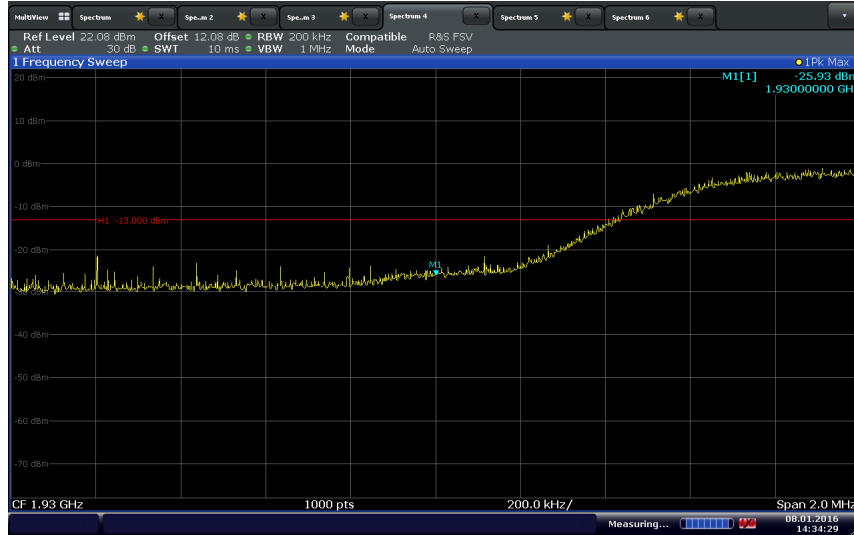


### LTE Band 2 Downlink 15MHz Bandwidth High Channel Band Edge

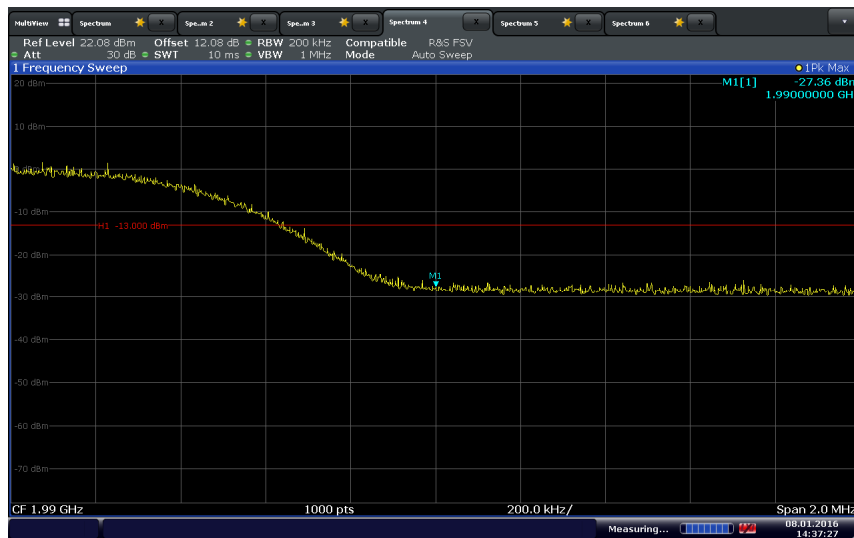




America

### LTE Band 2 Downlink 20MHz Bandwidth Low Channel Band Edge

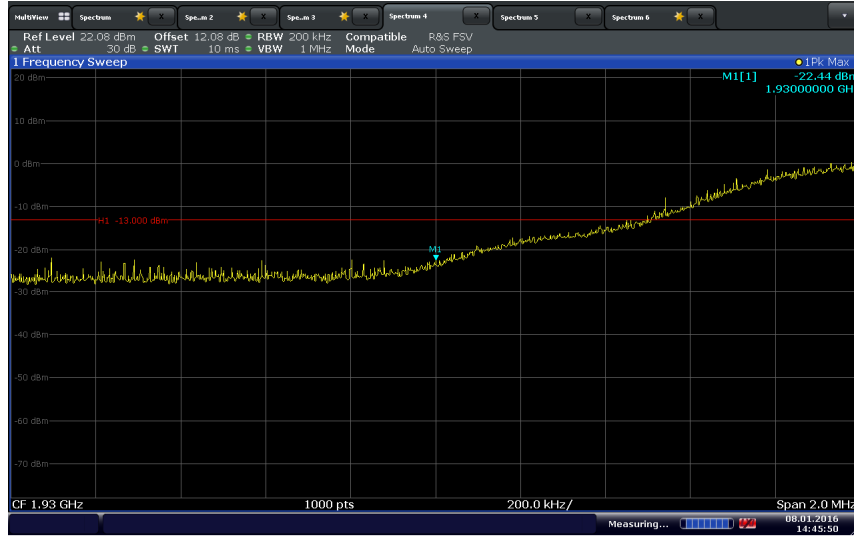

Date: 8 JAN 2016 14:45:50


### LTE Band 2 Downlink 20MHz Bandwidth High Channel Band Edge

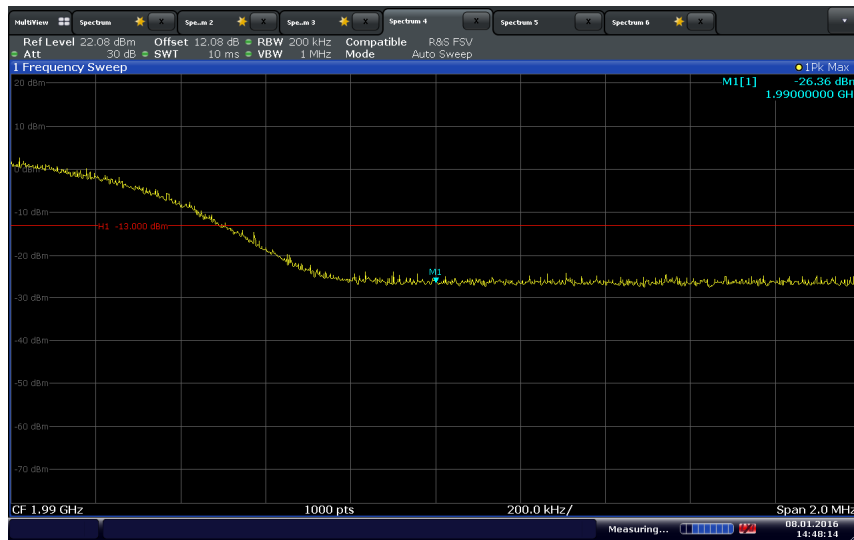

Date: 8 JAN 2016 14:48:14




### LTE Band 2 Uplink 5MHz Bandwidth Low Channel Band Edge

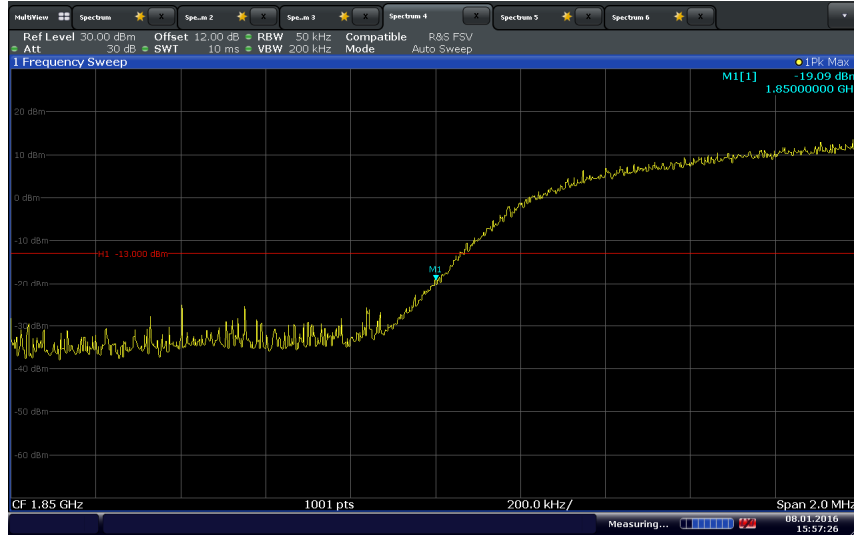

Date: 8 JAN 2016 15:57:27

### LTE Band 2 Uplink 5MHz Bandwidth High Channel Band Edge

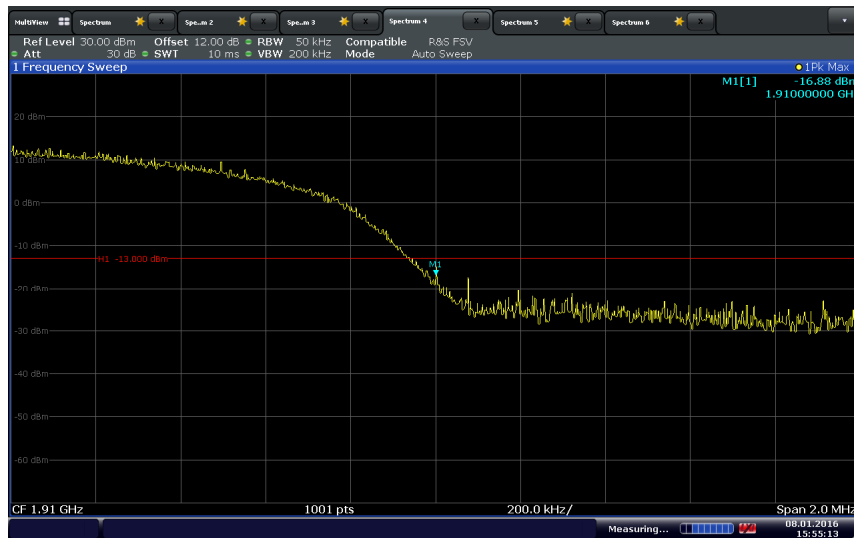


Date: 8 JAN 2016 15:55:13






### LTE Band 2 Uplink 10MHz Bandwidth Low Channel Band Edge

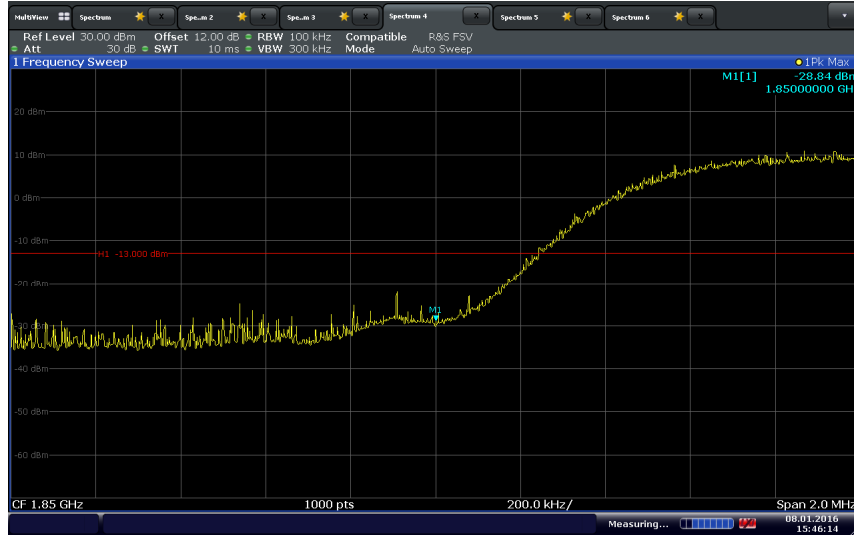

Date: 8 JAN 2016 15:46:14

### LTE Band 2 Uplink 10MHz Bandwidth High Channel Band Edge

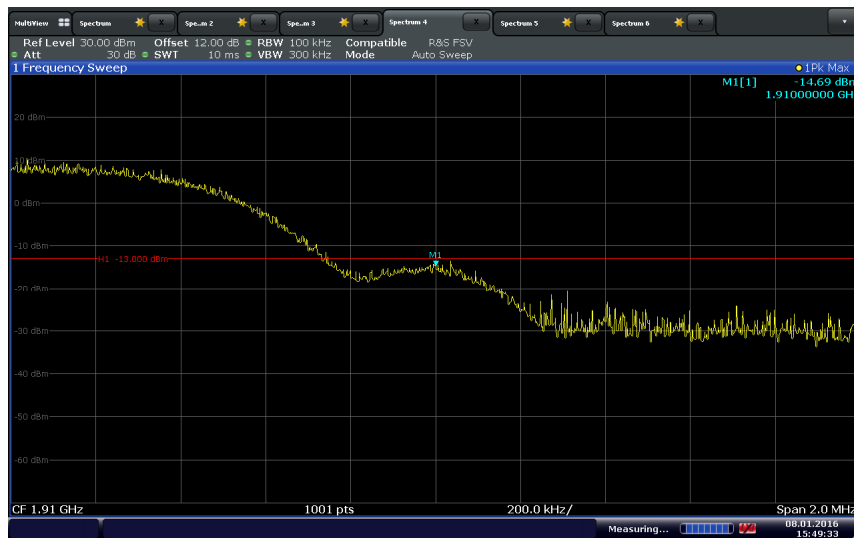


Date: 8 JAN 2016 15:49:33




America

### LTE Band 2 Uplink 15MHz Bandwidth Low Channel Band Edge

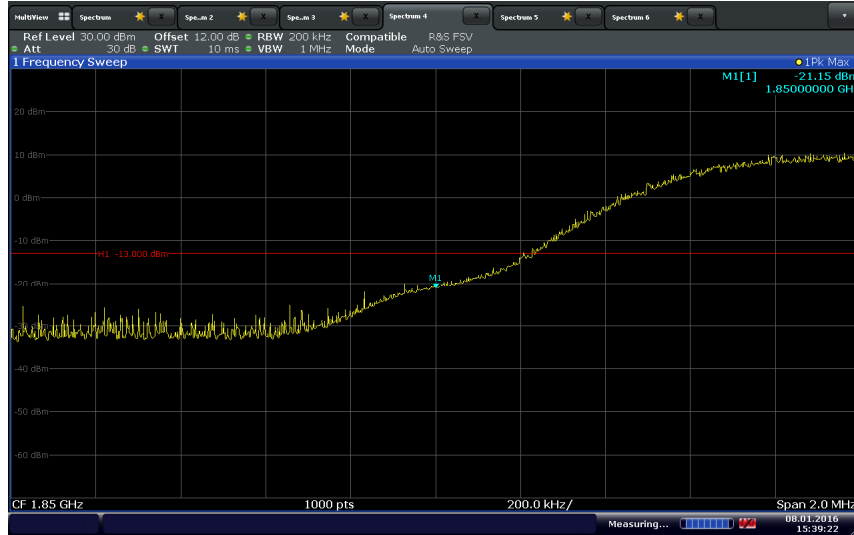

Date: 8 JAN 2016 15:39:23

### LTE Band 2 Uplink 15MHz Bandwidth High Channel Band Edge

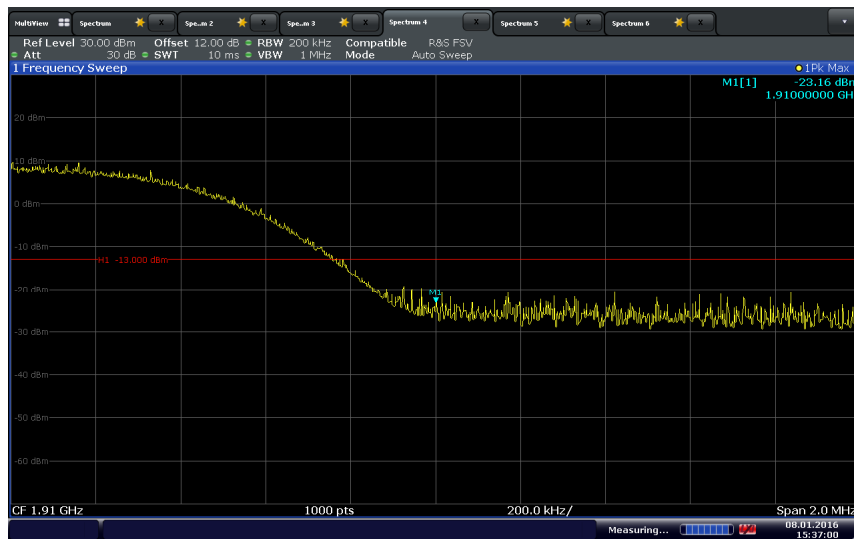


Date: 8 JAN 2016 15:37:00




America

### LTE Band 2 Uplink 20MHz Bandwidth Low Channel Band Edge

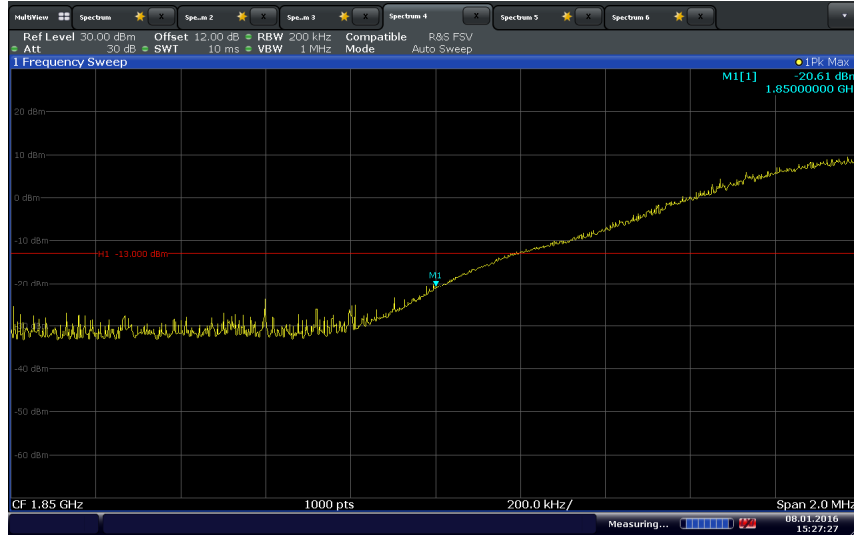

Date: 8 JAN 2016 15:27:27

### LTE Band 2 Uplink 20MHz Bandwidth High Channel Band Edge

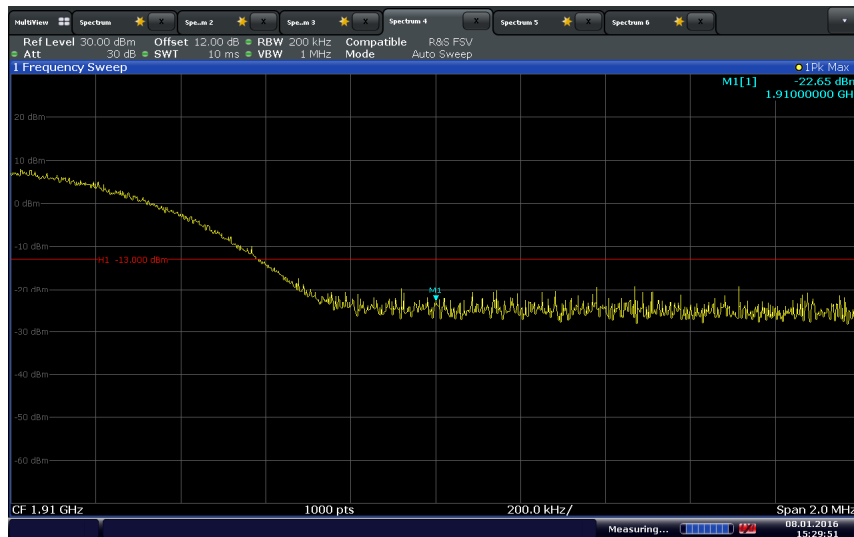

Date: 8 JAN 2016 15:29:31



## **2.6 CONDUCTED SPURIOUS EMISSIONS**

### **2.6.1 Specification Reference**

FCC 47 CFR Part 24, Clause 24.238(a)  
RSS-133, Clause 6.5.1

### **2.6.2 Standard Applicable**

Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

### **2.6.3 Equipment Under Test and Modification State**

Serial No: 921550000015 (NU and CU) / Test Configuration A and B

### **2.6.4 Date of Test/Initial of test personnel who performed the test**

January 08, 2016/XYZ

### **2.6.5 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.6.6 Environmental Conditions**

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility.

|                     |         |
|---------------------|---------|
| Ambient Temperature | 21.9°C  |
| Relative Humidity   | 43.3%   |
| ATM Pressure        | 99.3kPa |

### **2.6.7 Additional Observations**


- This is a conducted test.
- The path loss was measured and entered as a level offset.
- A resolution bandwidth of 1MHz was used.
- The limit is set to -13dBm.
- Only test plots for middle channel were presented as the representative configuration.

### **2.6.8 Test Results**


See attached plots.



### LTE Band 2 Downlink 5MHz Bandwidth Mid Channel Conducted Spurious Emissions

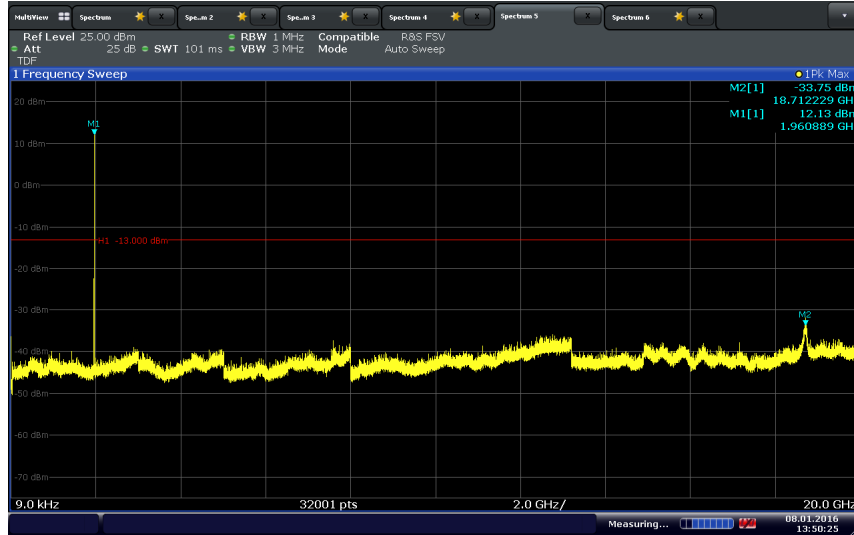


### LTE Band 2 Downlink 10MHz Bandwidth Mid Channel Conducted Spurious Emissions

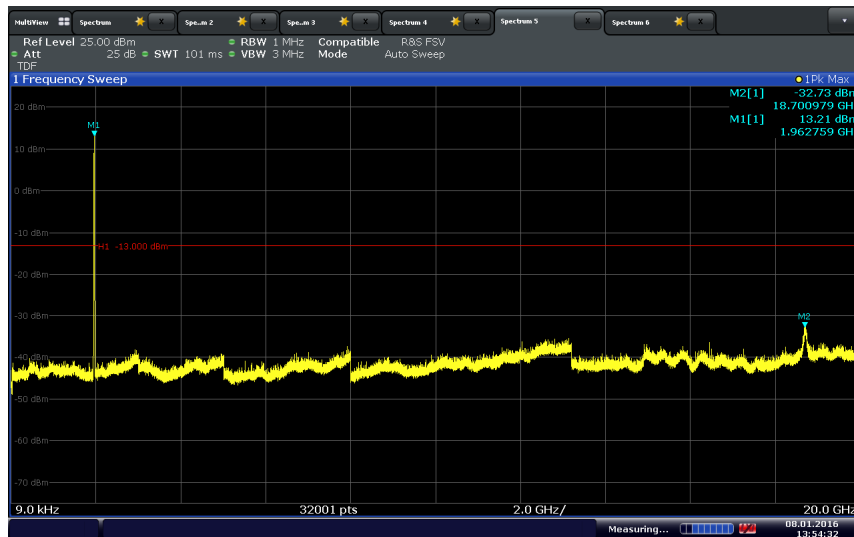




### LTE Band 2 Downlink 15MHz Bandwidth Mid Channel Conducted Spurious Emissions

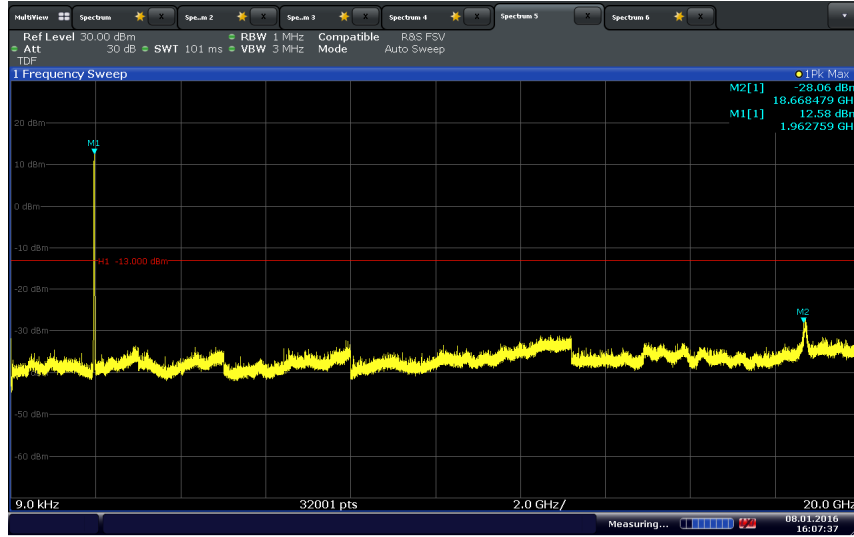


### LTE Band 2 Downlink 20MHz Bandwidth Mid Channel Conducted Spurious Emissions

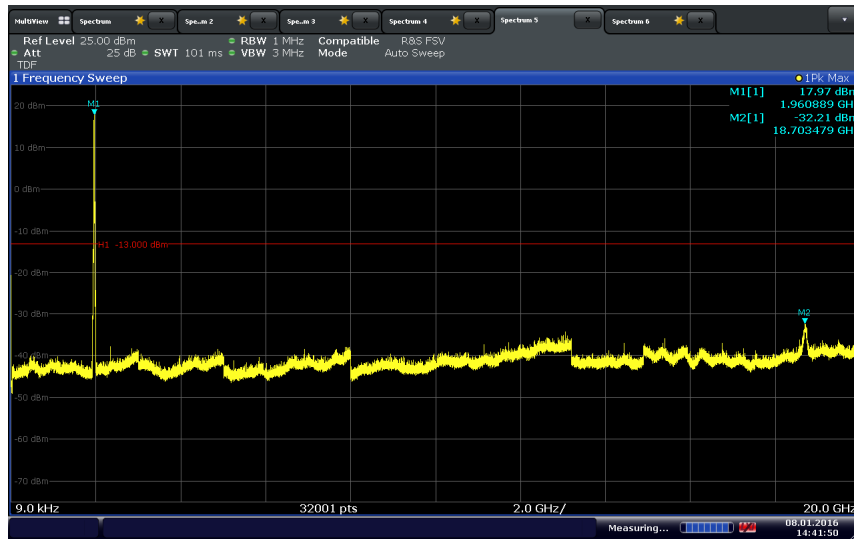




### LTE Band 2 Uplink 5MHz Bandwidth Mid Channel Conducted Spurious Emissions

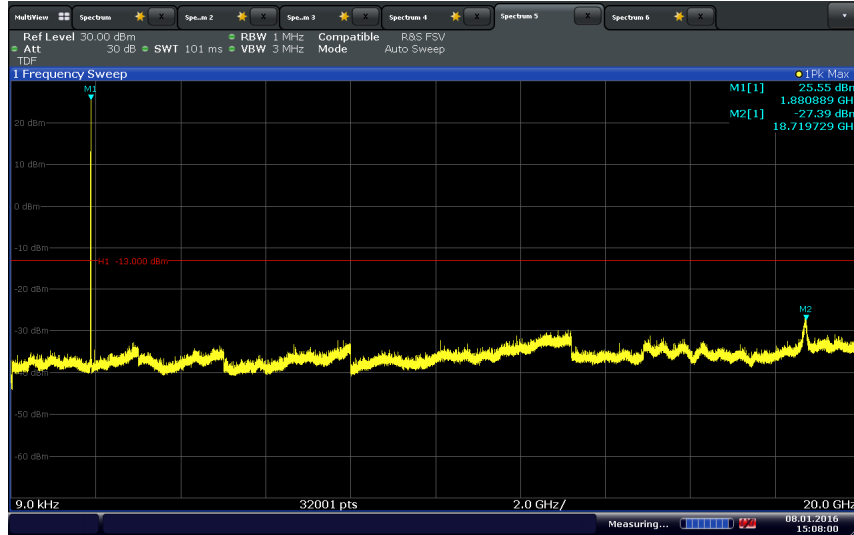

### LTE Band 2 Uplink 10MHz Bandwidth Mid Channel Conducted Spurious Emissions

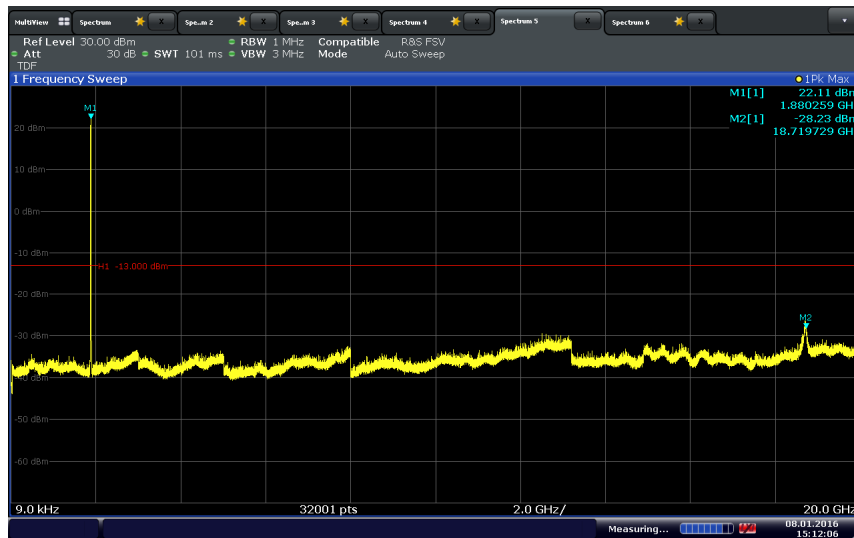




America

### LTE Band 2 Uplink 15MHz Bandwidth Mid Channel Conducted Spurious Emissions



### LTE Band 2 Uplink 20MHz Bandwidth Mid Channel Conducted Spurious Emissions

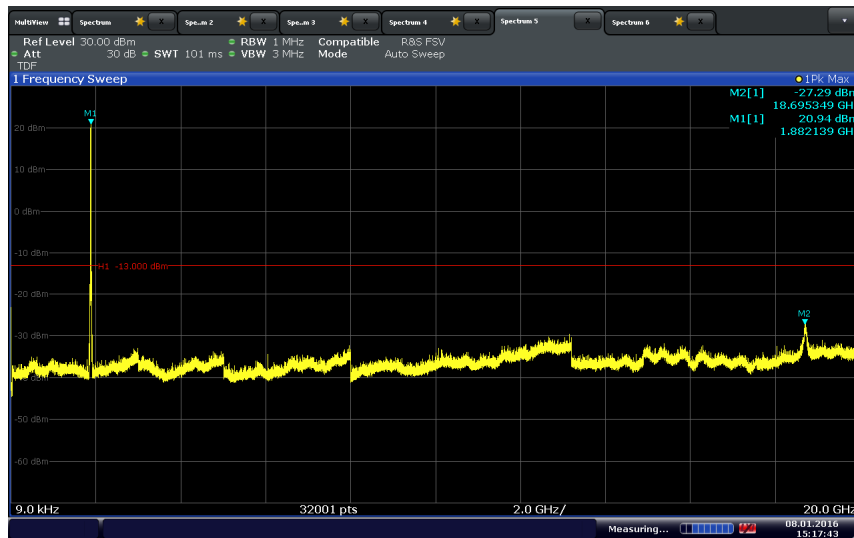





## **2.7 FIELD STRENGTH OF SPURIOUS RADIATION**

### **2.7.1 Specification Reference**

FCC 47CFR Part 2, Clause 2.1053  
FCC 47CFR Part 24, Clause 24.238(a)  
RSS-133, Clause 6.5

### **2.7.2 Standard Applicable**

Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

### **2.7.3 Equipment Under Test and Modification State**

Serial No: 921550000015 (NU and CU) / Test Configuration C and D

### **2.7.4 Date of Test/Initial of test personnel who performed the test**

January 19, 20 and 22, 2016/XYZ

### **2.7.5 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.7.6 Environmental Conditions**

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility.

|                     |                |
|---------------------|----------------|
| Ambient Temperature | 22.3 - 22.8°C  |
| Relative Humidity   | 32.5 - 55.8%   |
| ATM Pressure        | 99.6 - 99.8kPa |

### **2.7.7 Additional Observations**

- This is a radiated test using substitution method as per Unwanted Emissions: Radiated Spurious method of measurement of ANSI/TIA/EIA-603-C 2004, August 17, 2004.
- Only the worst case configuration presented in this test report.
- Measurement was done using EMC32 V8.53 automated software. Reported level is the actual level with all the correction factors factored in. Correction Factor column is for informational purposes only.


### **2.7.8 Test Results**

See attached plots.



America

**2.7.9 Test Results Below 1GHz (Downlink Worst Case Configuration)- 20MHz Bandwidth Middle Channel**

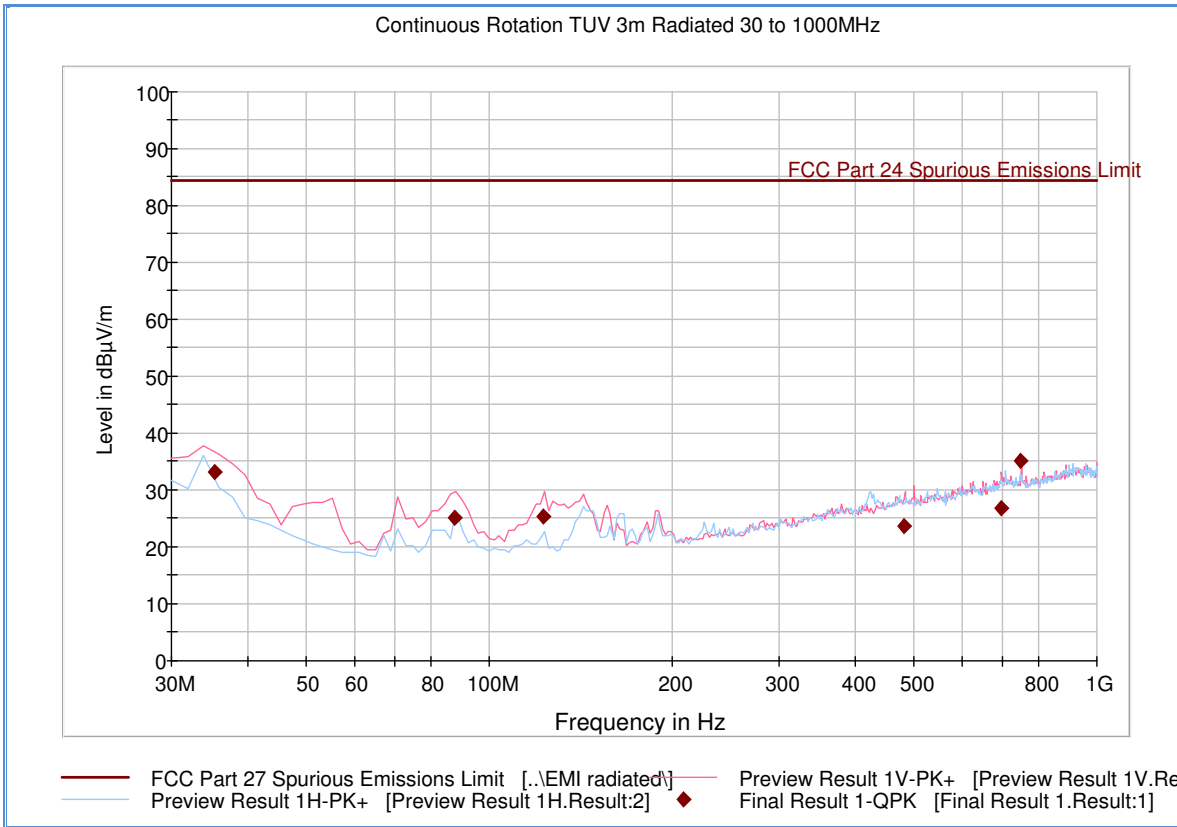


**Quasi Peak Data**

| Frequency (MHz) | QuasiPeak (dBµV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBµV/m) |
|-----------------|--------------------|-----------------|-----------------|-------------|--------------|---------------|------------|-------------|----------------|
| 35.367776       | 33.3               | 1000.0          | 120.000         | 100.0       | V            | 207.0         | -8.6       | 51.1        | 84.4           |
| 87.756633       | 25.2               | 1000.0          | 120.000         | 100.0       | V            | 228.0         | -15.6      | 59.2        | 84.4           |
| 122.866613      | 25.5               | 1000.0          | 120.000         | 100.0       | V            | 65.0          | -15.2      | 58.9        | 84.4           |
| 482.645852      | 23.6               | 1000.0          | 120.000         | 127.0       | V            | 172.0         | -1.4       | 60.8        | 84.4           |
| 695.113507      | 26.9               | 1000.0          | 120.000         | 122.0       | V            | 260.0         | 3.0        | 57.5        | 84.4           |
| 750.022365      | 35.2               | 1000.0          | 120.000         | 100.0       | V            | 18.0          | 3.6        | 49.2        | 84.4           |

**Test Notes:** Only worst case channel presented for spurious emissions below 1GHz. Only case spurious emissions within 20dB of the calculated limit will be proven by substitution method.



**2.7.10 Test Results Below 1GHz (Uplink Worst Case Configuration) - 20MHz Bandwidth High Channel**

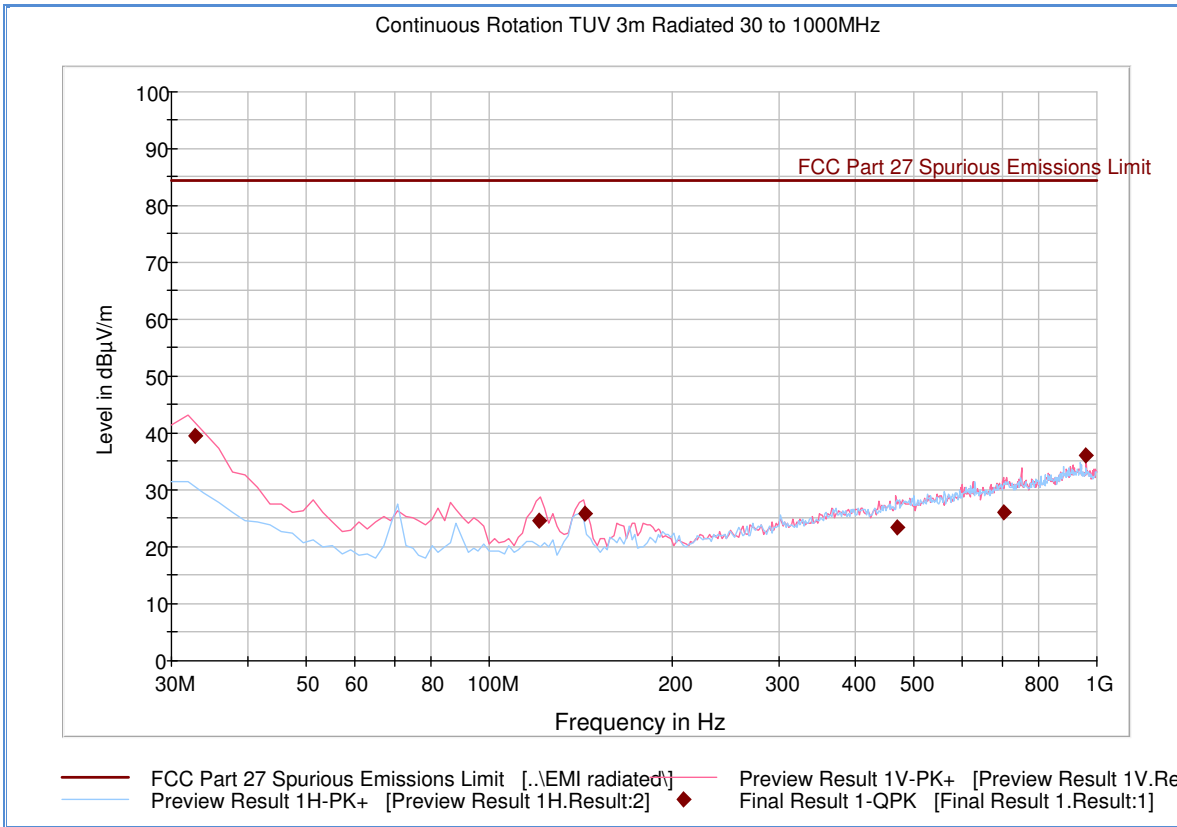


**Quasi Peak Data**

| Frequency (MHz) | QuasiPeak (dBµV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBµV/m) |
|-----------------|--------------------|-----------------|-----------------|-------------|--------------|---------------|------------|-------------|----------------|
| 32.800000       | 39.5               | 1000.0          | 120.000         | 102.0       | V            | 317.0         | -7.1       | 42.7        | 82.2           |
| 120.522725      | 24.6               | 1000.0          | 120.000         | 105.0       | V            | 13.0          | -15.1      | 57.6        | 82.2           |
| 143.345491      | 25.9               | 1000.0          | 120.000         | 102.0       | V            | 54.0          | -13.9      | 56.3        | 82.2           |
| 468.574749      | 23.3               | 1000.0          | 120.000         | 143.0       | V            | 47.0          | -2.0       | 58.9        | 82.2           |
| 701.745170      | 26.2               | 1000.0          | 120.000         | 356.0       | V            | 356.0         | 3.1        | 56.0        | 82.2           |
| 960.082244      | 36.1               | 1000.0          | 120.000         | 102.0       | V            | 9.0           | 6.4        | 46.1        | 82.2           |

**Test Notes:** Only worst case channel presented for spurious emissions below 1GHz. Only case spurious emissions within 20dB of the calculated limit will be proven by substitution method.



**2.7.11 Test Results Above 1GHz - Downlink20MHz Low Channel**

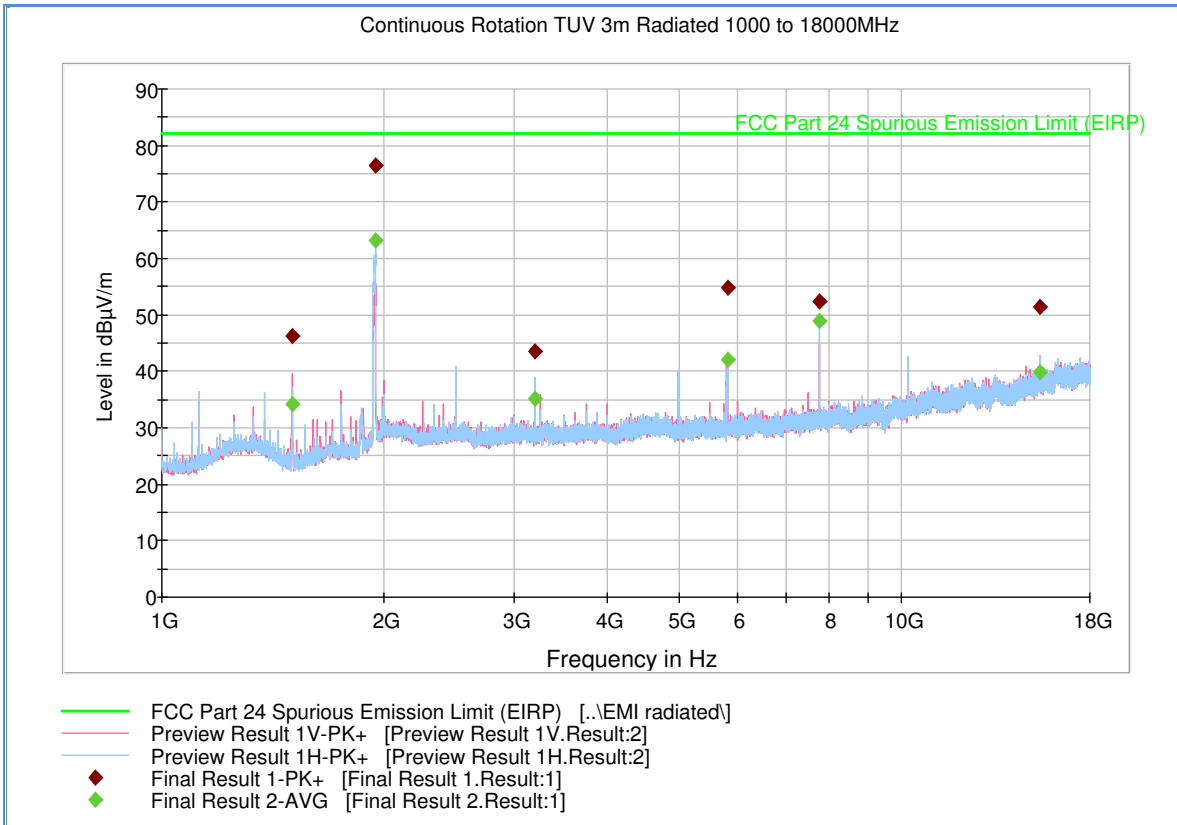

**Peak Data**

| Frequency (MHz) | MaxPeak (dBµV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBµV/m) |
|-----------------|------------------|-----------------|-----------------|-------------|--------------|---------------|------------|-------------|----------------|
| 1500.000000     | 46.2             | 1000.0          | 1000.000        | 138.7       | V            | 337.0         | -6.3       | 36.0        | 82.2           |
| 1942.166667     | 76.4             | 1000.0          | 1000.000        | 103.7       | H            | 338.0         | -1.5       | Fundamental |                |
| 3200.000000     | 43.5             | 1000.0          | 1000.000        | 113.7       | V            | 0.0           | 0.2        | 38.8        | 82.2           |
| 5832.100000     | 54.9             | 1000.0          | 1000.000        | 199.5       | H            | 56.0          | 4.3        | 27.3        | 82.2           |
| 7759.966667     | 52.4             | 1000.0          | 1000.000        | 300.2       | H            | 260.0         | 7.1        | 29.9        | 82.2           |
| 15375.200000    | 51.4             | 1000.0          | 1000.000        | 403.0       | H            | 180.0         | 15.8       | 30.8        | 82.2           |

**Average Data**

| Frequency (MHz) | Average (dBµV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBµV/m) |
|-----------------|------------------|-----------------|-----------------|-------------|--------------|---------------|------------|-------------|----------------|
| 1500.000000     | 34.3             | 1000.0          | 1000.000        | 138.7       | V            | 337.0         | -6.3       | 48.0        | 82.2           |
| 1942.166667     | 63.1             | 1000.0          | 1000.000        | 103.7       | H            | 338.0         | -1.5       | Fundamental |                |
| 3200.000000     | 35.1             | 1000.0          | 1000.000        | 113.7       | V            | 0.0           | 0.2        | 47.1        | 82.2           |
| 5832.100000     | 41.9             | 1000.0          | 1000.000        | 199.5       | H            | 56.0          | 4.3        | 40.3        | 82.2           |
| 7759.966667     | 49.0             | 1000.0          | 1000.000        | 300.2       | H            | 260.0         | 7.1        | 33.2        | 82.2           |
| 15375.200000    | 39.8             | 1000.0          | 1000.000        | 403.0       | H            | 180.0         | 15.8       | 42.5        | 82.2           |

FCC ID: NU: YETD32-21366NU  
 CU: YETD32-21366CU  
 IC: N/A  
 Report No. SD72112724-0116B Rev1.0



America


**Substitution Data**

| Frequency (MHz) | Field Strength @ 3 meters (dBμV/m) | Cable Loss (dB) | Substitution Antenna Gain (dBi) | Signal Generator Level (dBm) | Substitution Data SGL+AG-CL (dBm) | Limit (dBm) | Compliance |
|-----------------|------------------------------------|-----------------|---------------------------------|------------------------------|-----------------------------------|-------------|------------|
|                 |                                    |                 |                                 |                              |                                   |             |            |
|                 |                                    |                 |                                 |                              |                                   |             |            |

**Test Notes:** Substitution data not required since margin is >20dB compared to the -13dBm limit (converted to field strength @ 3 meters).



**2.7.12 Test Results Above 1GHz - Downlink20MHz Bandwidth Mid Channel**

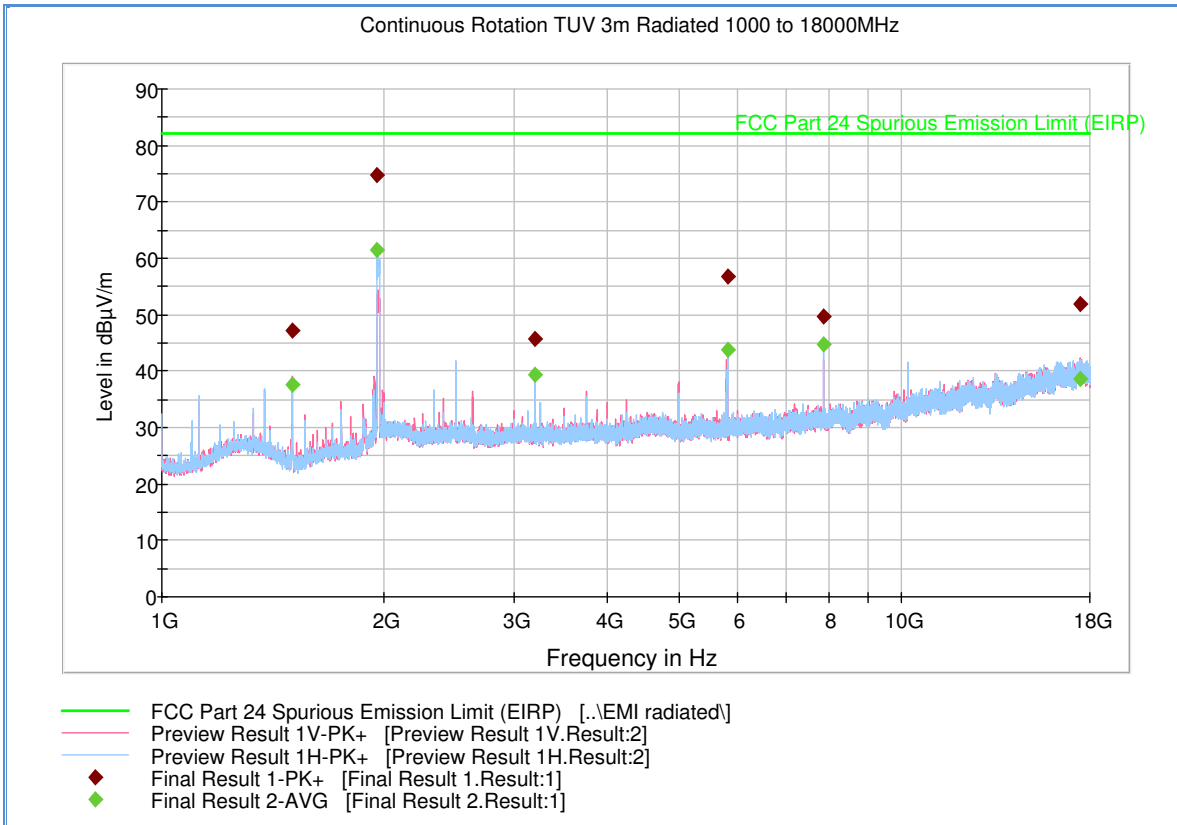

**Peak Data**

| Frequency (MHz) | MaxPeak (dBµV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBµV/m) |
|-----------------|------------------|-----------------|-----------------|-------------|--------------|---------------|------------|-------------|----------------|
| 1500.000000     | 47.1             | 1000.0          | 1000.000        | 130.7       | V            | 225.0         | -6.3       | 35.1        | 82.2           |
| 1952.366667     | 74.7             | 1000.0          | 1000.000        | 103.7       | H            | 337.0         | -1.4       | Fundamental |                |
| 3200.200000     | 45.7             | 1000.0          | 1000.000        | 103.7       | V            | 74.0          | 0.2        | 36.6        | 82.2           |
| 5817.766667     | 56.7             | 1000.0          | 1000.000        | 202.3       | V            | 115.0         | 4.3        | 25.5        | 82.2           |
| 7840.033333     | 49.7             | 1000.0          | 1000.000        | 299.3       | H            | 269.0         | 7.2        | 32.5        | 82.2           |
| 17465.633333    | 51.9             | 1000.0          | 1000.000        | 402.7       | V            | 16.0          | 18.1       | 30.3        | 82.2           |

**Average Data**

| Frequency (MHz) | Average (dBµV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBµV/m) |
|-----------------|------------------|-----------------|-----------------|-------------|--------------|---------------|------------|-------------|----------------|
| 1500.000000     | 37.6             | 1000.0          | 1000.000        | 130.7       | V            | 225.0         | -6.3       | 44.6        | 82.2           |
| 1952.366667     | 61.5             | 1000.0          | 1000.000        | 103.7       | H            | 337.0         | -1.4       | Fundamental |                |
| 3200.200000     | 39.4             | 1000.0          | 1000.000        | 103.7       | V            | 74.0          | 0.2        | 42.8        | 82.2           |
| 5817.766667     | 43.7             | 1000.0          | 1000.000        | 202.3       | V            | 115.0         | 4.3        | 38.6        | 82.2           |
| 7840.033333     | 44.7             | 1000.0          | 1000.000        | 299.3       | H            | 269.0         | 7.2        | 37.5        | 82.2           |
| 17465.633333    | 38.7             | 1000.0          | 1000.000        | 402.7       | V            | 16.0          | 18.1       | 43.5        | 82.2           |

FCC ID: NU: YETD32-21366NU  
 CU: YETD32-21366CU  
 IC: N/A  
 Report No. SD72112724-0116B Rev1.0




**Substitution Data**

| Frequency (MHz) | Field Strength @ 3 meters (dBμV/m) | Cable Loss (dB) | Substitution Antenna Gain (dBi) | Signal Generator Level (dBm) | Substitution Data SGL+AG-CL (dBm) | Limit (dBm) | Compliance |
|-----------------|------------------------------------|-----------------|---------------------------------|------------------------------|-----------------------------------|-------------|------------|
|                 |                                    |                 |                                 |                              |                                   |             |            |
|                 |                                    |                 |                                 |                              |                                   |             |            |

**Test Notes:** Substitution data not required since margin is >20dB compared to the -13dBm limit (converted to field strength @ 3 meters).



**2.7.13 Test Results Above 1GHz - Downlink20MHz Bandwidth High Channel**

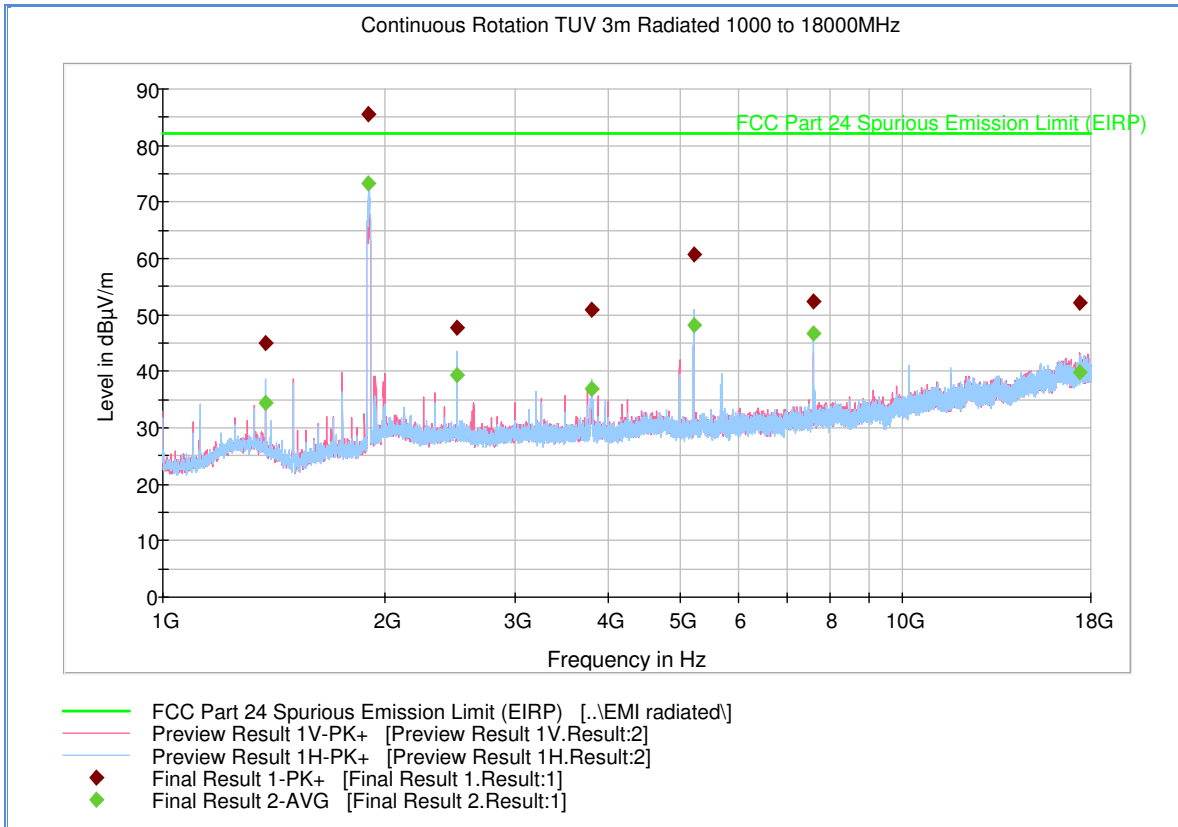

**Peak Data**

| Frequency (MHz) | MaxPeak (dBµV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBµV/m) |
|-----------------|------------------|-----------------|-----------------|-------------|--------------|---------------|------------|-------------|----------------|
| 1375.166667     | 45.0             | 1000.0          | 1000.000        | 124.7       | H            | 230.0         | -5.6       | 37.2        | 82.2           |
| 1899.266667     | 85.6             | 1000.0          | 1000.000        | 173.6       | H            | 138.0         | -1.9       | Fundamental |                |
| 2500.166667     | 47.8             | 1000.0          | 1000.000        | 99.8        | V            | 284.0         | -0.8       | 34.5        | 82.2           |
| 3801.400000     | 50.8             | 1000.0          | 1000.000        | 208.5       | H            | 96.0          | 1.4        | 31.4        | 82.2           |
| 5235.233333     | 60.8             | 1000.0          | 1000.000        | 207.5       | H            | -1.0          | 3.4        | 21.5        | 82.2           |
| 7600.166667     | 52.3             | 1000.0          | 1000.000        | 301.2       | H            | 127.0         | 7.0        | 29.9        | 82.2           |
| 17400.466667    | 52.1             | 1000.0          | 1000.000        | 245.4       | V            | 61.0          | 18.1       | 30.1        | 82.2           |

**Average Data**

| Frequency (MHz) | Average (dBµV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBµV/m) |
|-----------------|------------------|-----------------|-----------------|-------------|--------------|---------------|------------|-------------|----------------|
| 1375.166667     | 34.3             | 1000.0          | 1000.000        | 124.7       | H            | 230.0         | -5.6       | 47.9        | 82.2           |
| 1899.266667     | 73.4             | 1000.0          | 1000.000        | 173.6       | H            | 138.0         | -1.9       | Fundamental |                |
| 2500.166667     | 39.4             | 1000.0          | 1000.000        | 99.8        | V            | 284.0         | -0.8       | 42.8        | 82.2           |
| 3801.400000     | 37.0             | 1000.0          | 1000.000        | 208.5       | H            | 96.0          | 1.4        | 45.2        | 82.2           |
| 5235.233333     | 48.2             | 1000.0          | 1000.000        | 207.5       | H            | -1.0          | 3.4        | 34.1        | 82.2           |
| 7600.166667     | 46.7             | 1000.0          | 1000.000        | 301.2       | H            | 127.0         | 7.0        | 35.6        | 82.2           |
| 17400.466667    | 39.8             | 1000.0          | 1000.000        | 245.4       | V            | 61.0          | 18.1       | 42.5        | 82.2           |



FCC ID: NU: YETD32-21366NU  
 CU: YETD32-21366CU  
 IC: N/A  
 Report No. SD72112724-0116B Rev1.0



America


**Substitution Data**

| Frequency (MHz) | Field Strength @ 3 meters (dBμV/m) | Cable Loss (dB) | Substitution Antenna Gain (dBi) | Signal Generator Level (dBm) | Substitution Data SGL+AG-CL (dBm) | Limit (dBm) | Compliance |
|-----------------|------------------------------------|-----------------|---------------------------------|------------------------------|-----------------------------------|-------------|------------|
|                 |                                    |                 |                                 |                              |                                   |             |            |
|                 |                                    |                 |                                 |                              |                                   |             |            |

**Test Notes:**Substitution data not required since margin is >20dB compared to the -13dBm limit (converted to field strength @ 3 meters).



**2.7.14 Test Results Above 1GHz - Uplink 20MHz Low Channel**

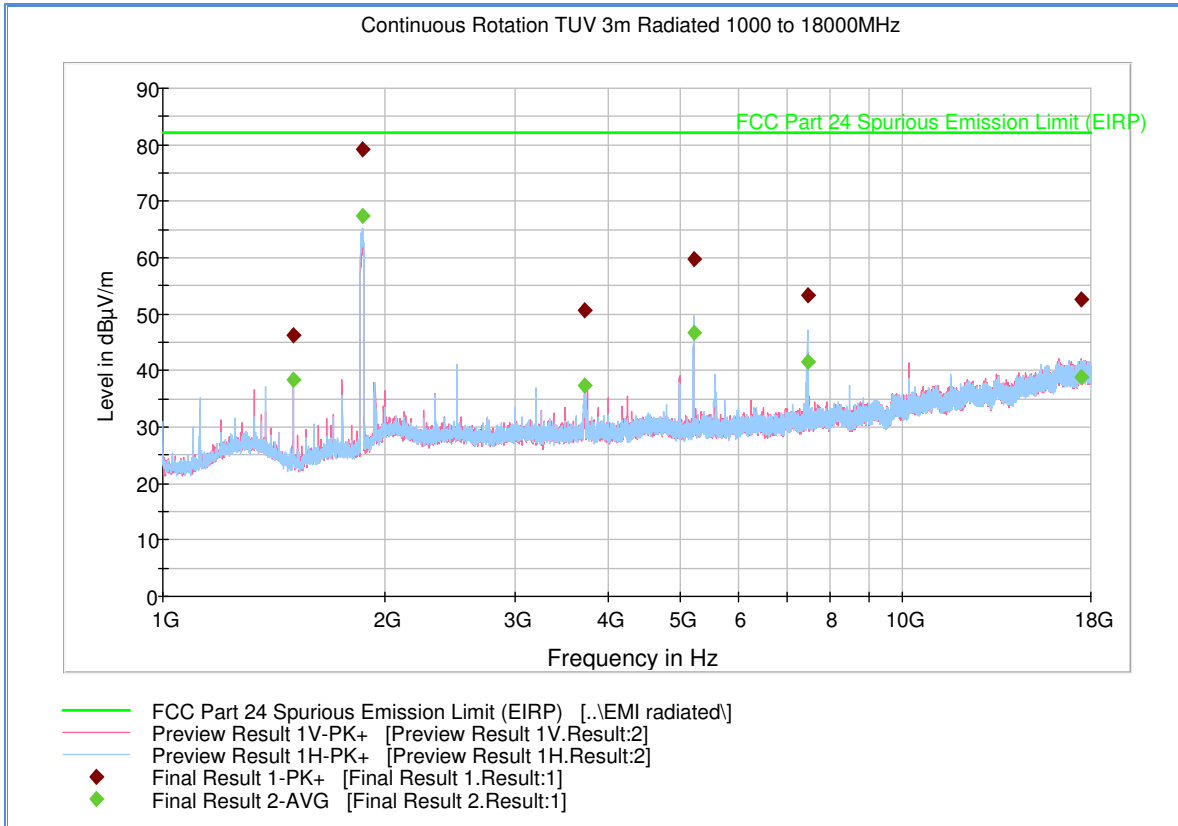

**Peak Data**

| Frequency (MHz) | MaxPeak (dBµV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBµV/m) |
|-----------------|------------------|-----------------|-----------------|-------------|--------------|---------------|------------|-------------|----------------|
| 1500.000000     | 46.1             | 1000.0          | 1000.000        | 207.5       | V            | 292.0         | -6.3       | 36.1        | 82.2           |
| 1861.000000     | 79.1             | 1000.0          | 1000.000        | 103.7       | H            | 171.0         | -2.8       | Fundamental |                |
| 3721.133333     | 50.8             | 1000.0          | 1000.000        | 121.7       | H            | 182.0         | 1.2        | 31.5        | 82.2           |
| 5226.600000     | 59.7             | 1000.0          | 1000.000        | 226.4       | H            | 9.0           | 3.4        | 22.5        | 82.2           |
| 7439.966667     | 53.3             | 1000.0          | 1000.000        | 198.5       | H            | 152.0         | 6.8        | 28.9        | 82.2           |
| 17470.133333    | 52.7             | 1000.0          | 1000.000        | 403.5       | V            | 195.0         | 18.0       | 29.6        | 82.2           |

**Average Data**

| Frequency (MHz) | Average (dBµV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBµV/m) |
|-----------------|------------------|-----------------|-----------------|-------------|--------------|---------------|------------|-------------|----------------|
| 1500.000000     | 38.3             | 1000.0          | 1000.000        | 207.5       | V            | 292.0         | -6.3       | 43.9        | 82.2           |
| 1861.000000     | 67.3             | 1000.0          | 1000.000        | 103.7       | H            | 171.0         | -2.8       | Fundamental |                |
| 3721.133333     | 37.3             | 1000.0          | 1000.000        | 121.7       | H            | 182.0         | 1.2        | 45.0        | 82.2           |
| 5226.600000     | 46.8             | 1000.0          | 1000.000        | 226.4       | H            | 9.0           | 3.4        | 35.4        | 82.2           |
| 7439.966667     | 41.5             | 1000.0          | 1000.000        | 198.5       | H            | 152.0         | 6.8        | 40.7        | 82.2           |
| 17470.133333    | 39.0             | 1000.0          | 1000.000        | 403.5       | V            | 195.0         | 18.0       | 43.3        | 82.2           |

FCC ID: NU: YETD32-21366NU  
 CU: YETD32-21366CU  
 IC: N/A  
 Report No. SD72112724-0116B Rev1.0



America


**Substitution Data**

| Frequency (MHz) | Field Strength @ 3 meters (dBμV/m) | Cable Loss (dB) | Substitution Antenna Gain (dBi) | Signal Generator Level (dBm) | Substitution Data SGL+AG-CL (dBm) | Limit (dBm) | Compliance |
|-----------------|------------------------------------|-----------------|---------------------------------|------------------------------|-----------------------------------|-------------|------------|
|                 |                                    |                 |                                 |                              |                                   |             |            |
|                 |                                    |                 |                                 |                              |                                   |             |            |

**Test Notes:** Substitution data not required since margin is >20dB compared to the -13dBm limit (converted to field strength @ 3 meters).



**2.7.15 Test Results Above 1GHz - Uplink 20MHz Bandwidth Mid Channel**

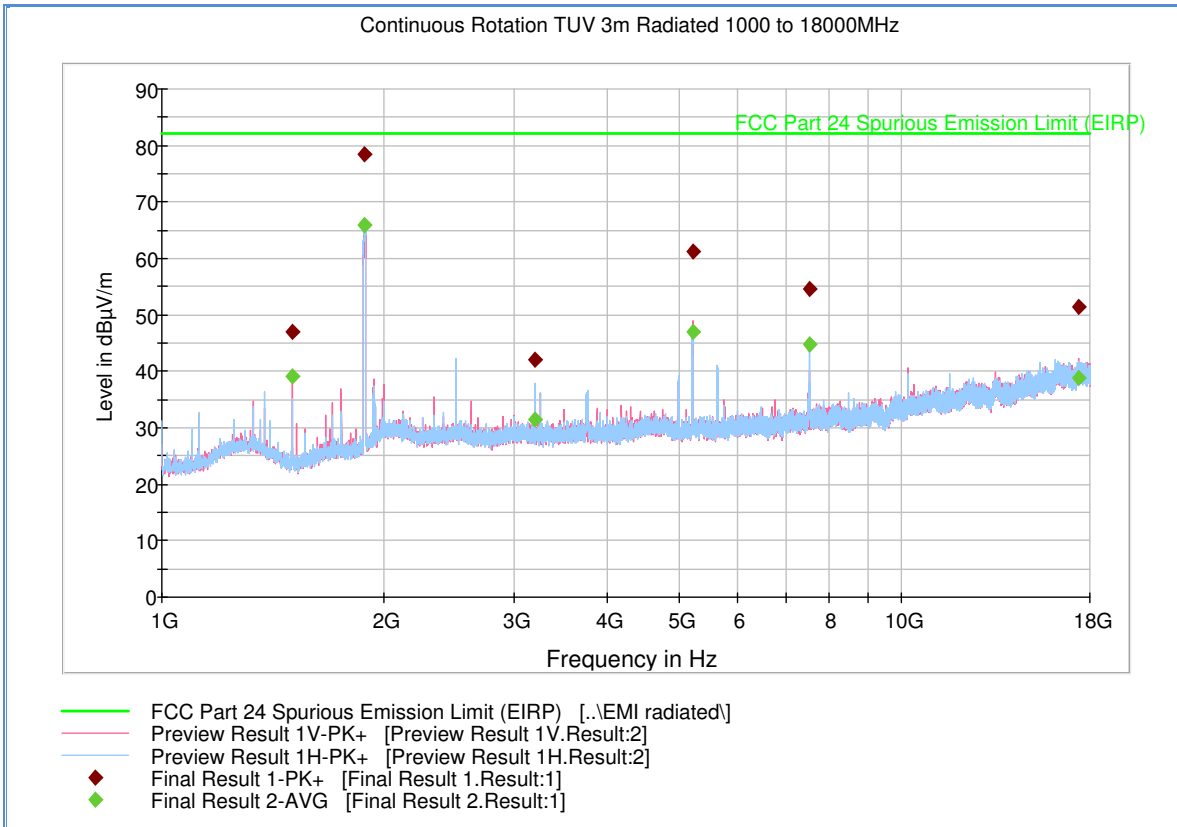

**Peak Data**

| Frequency (MHz) | MaxPeak (dBµV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBµV/m) |
|-----------------|------------------|-----------------|-----------------|-------------|--------------|---------------|------------|-------------|----------------|
| 1500.000000     | 47.0             | 1000.0          | 1000.000        | 199.5       | V            | 291.0         | -6.3       | 35.3        | 82.2           |
| 1882.100000     | 78.5             | 1000.0          | 1000.000        | 116.7       | H            | 199.0         | -2.3       | Fundamental |                |
| 3200.400000     | 42.0             | 1000.0          | 1000.000        | 102.7       | H            | 54.0          | 0.2        | 40.3        | 82.2           |
| 5232.266667     | 61.3             | 1000.0          | 1000.000        | 197.5       | V            | 269.0         | 3.4        | 20.9        | 82.2           |
| 7519.866667     | 54.5             | 1000.0          | 1000.000        | 181.6       | H            | 117.0         | 6.9        | 27.7        | 82.2           |
| 17410.333333    | 51.4             | 1000.0          | 1000.000        | 345.1       | V            | 121.0         | 18.1       | 30.9        | 82.2           |

**Average Data**

| Frequency (MHz) | Average (dBµV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBµV/m) |
|-----------------|------------------|-----------------|-----------------|-------------|--------------|---------------|------------|-------------|----------------|
| 1500.000000     | 39.1             | 1000.0          | 1000.000        | 199.5       | V            | 291.0         | -6.3       | 43.2        | 82.2           |
| 1882.100000     | 66.0             | 1000.0          | 1000.000        | 116.7       | H            | 199.0         | -2.3       | Fundamental |                |
| 3200.400000     | 31.5             | 1000.0          | 1000.000        | 102.7       | H            | 54.0          | 0.2        | 50.8        | 82.2           |
| 5232.266667     | 47.0             | 1000.0          | 1000.000        | 197.5       | V            | 269.0         | 3.4        | 35.2        | 82.2           |
| 7519.866667     | 44.8             | 1000.0          | 1000.000        | 181.6       | H            | 117.0         | 6.9        | 37.4        | 82.2           |
| 17410.333333    | 38.8             | 1000.0          | 1000.000        | 345.1       | V            | 121.0         | 18.1       | 43.4        | 82.2           |

FCC ID: NU: YETD32-21366NU  
 CU: YETD32-21366CU  
 IC: N/A  
 Report No. SD72112724-0116B Rev1.0




**Substitution Data**

| Frequency (MHz) | Field Strength @ 3 meters (dBμV/m) | Cable Loss (dB) | Substitution Antenna Gain (dBi) | Signal Generator Level (dBm) | Substitution Data SGL+AG-CL (dBm) | Limit (dBm) | Compliance |
|-----------------|------------------------------------|-----------------|---------------------------------|------------------------------|-----------------------------------|-------------|------------|
|                 |                                    |                 |                                 |                              |                                   |             |            |
|                 |                                    |                 |                                 |                              |                                   |             |            |

**Test Notes:** Substitution data not required since margin is >20dB compared to the -13dBm limit (converted to field strength @ 3 meters).



**2.7.16 Test Results Above 1GHz - Uplink 20MHz Bandwidth High Channel**

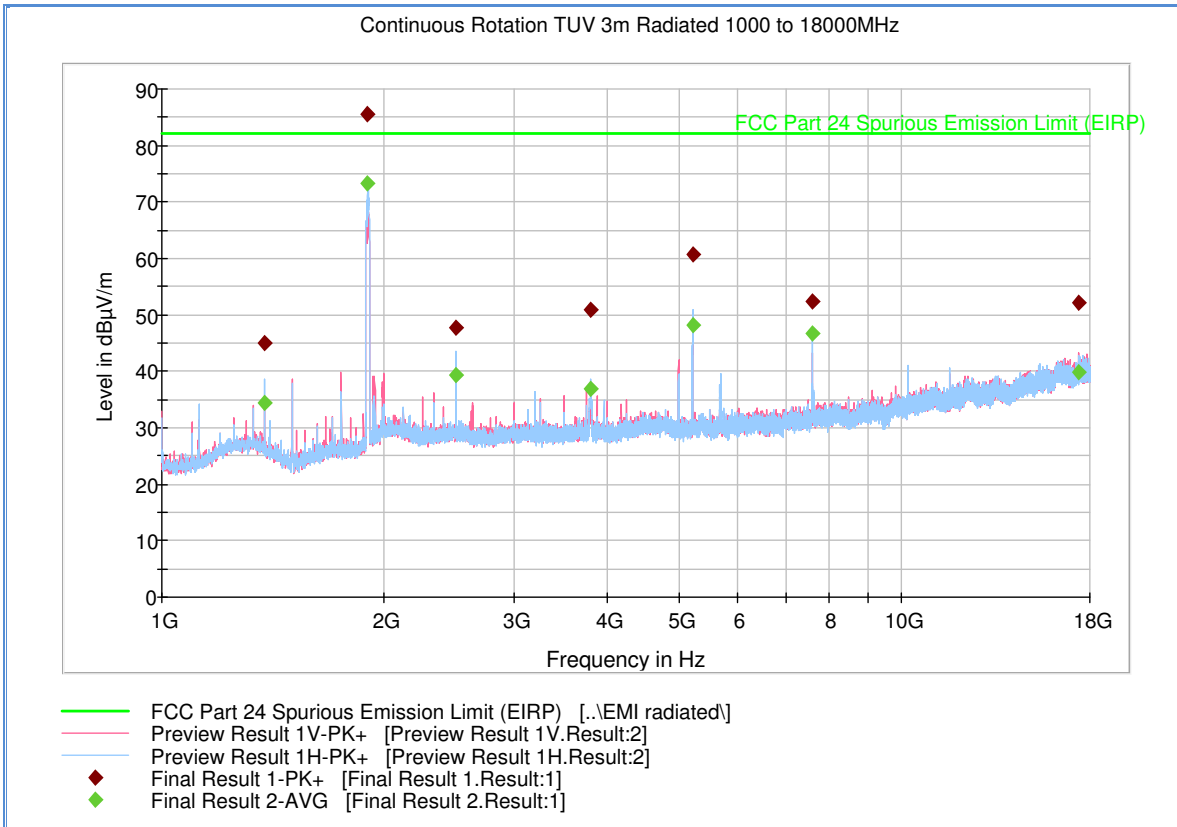

**Peak Data**

| Frequency (MHz) | MaxPeak (dBµV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBµV/m) |
|-----------------|------------------|-----------------|-----------------|-------------|--------------|---------------|------------|-------------|----------------|
| 1375.166667     | 45.0             | 1000.0          | 1000.000        | 124.7       | H            | 230.0         | -5.6       | 37.2        | 82.2           |
| 1899.266667     | 85.6             | 1000.0          | 1000.000        | 173.6       | H            | 138.0         | -1.9       | Fundamental |                |
| 2500.166667     | 47.8             | 1000.0          | 1000.000        | 99.8        | V            | 284.0         | -0.8       | 34.5        | 82.2           |
| 3801.400000     | 50.8             | 1000.0          | 1000.000        | 208.5       | H            | 96.0          | 1.4        | 31.4        | 82.2           |
| 5235.233333     | 60.8             | 1000.0          | 1000.000        | 207.5       | H            | -1.0          | 3.4        | 21.5        | 82.2           |
| 7600.166667     | 52.3             | 1000.0          | 1000.000        | 301.2       | H            | 127.0         | 7.0        | 29.9        | 82.2           |
| 17400.466667    | 52.1             | 1000.0          | 1000.000        | 245.4       | V            | 61.0          | 18.1       | 30.1        | 82.2           |

**Average Data**

| Frequency (MHz) | Average (dBµV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBµV/m) |
|-----------------|------------------|-----------------|-----------------|-------------|--------------|---------------|------------|-------------|----------------|
| 1375.166667     | 34.3             | 1000.0          | 1000.000        | 124.7       | H            | 230.0         | -5.6       | 47.9        | 82.2           |
| 1899.266667     | 73.4             | 1000.0          | 1000.000        | 173.6       | H            | 138.0         | -1.9       | Fundamental |                |
| 2500.166667     | 39.4             | 1000.0          | 1000.000        | 99.8        | V            | 284.0         | -0.8       | 42.8        | 82.2           |
| 3801.400000     | 37.0             | 1000.0          | 1000.000        | 208.5       | H            | 96.0          | 1.4        | 45.2        | 82.2           |
| 5235.233333     | 48.2             | 1000.0          | 1000.000        | 207.5       | H            | -1.0          | 3.4        | 34.1        | 82.2           |
| 7600.166667     | 46.7             | 1000.0          | 1000.000        | 301.2       | H            | 127.0         | 7.0        | 35.6        | 82.2           |
| 17400.466667    | 39.8             | 1000.0          | 1000.000        | 245.4       | V            | 61.0          | 18.1       | 42.5        | 82.2           |

FCC ID: NU: YETD32-21366NU  
 CU: YETD32-21366CU  
 IC: N/A  
 Report No. SD72112724-0116B Rev1.0



America

**Substitution Data**

| Frequency (MHz) | Field Strength @ 3 meters (dBμV/m) | Cable Loss (dB) | Substitution Antenna Gain (dBi) | Signal Generator Level (dBm) | Substitution Data SGL+AG-CL (dBm) | Limit (dBm) | Compliance |
|-----------------|------------------------------------|-----------------|---------------------------------|------------------------------|-----------------------------------|-------------|------------|
|                 |                                    |                 |                                 |                              |                                   |             |            |
|                 |                                    |                 |                                 |                              |                                   |             |            |

**Test Notes:** Substitution data not required since margin is >20dB compared to the -13dBm limit (converted to field strength @ 3 meters).



## **2.8 FREQUENCY STABILITY**

### **2.8.1 Specification Reference**

FCC 47CFR Part 2, Clause 2.1055  
FCC 47CFR Part 24, Clause 24.235  
RSS-133, Clause 6.3

### **2.8.2 Standard Applicable**

(§24.235) The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

### **2.8.3 Equipment Under Test and Modification State**

Serial No: 921550000015 (NU and CU)/ Test Configuration A and B

### **2.8.4 Date of Test/Initial of test personnel who performed the test**

February 01 and 02, 2016/XYZ

### **2.8.5 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.8.6 Environmental Conditions**

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility.

|                     |                |
|---------------------|----------------|
| Ambient Temperature | 21.3 - 22.8°C  |
| Relative Humidity   | 26.6 - 29.0%   |
| ATM Pressure        | 99.2 - 99.7kPa |

### **2.8.7 Additional Observations**

- This is a conducted test.
- The EUT was operated at 120.0VAC nominal voltage and was placed in the temperature chamber for the series of evaluations performed.
- Input Type "Tones" was selected and the EUT was injected a CW signal from a Signal Generator and maximum frequency error was monitored using the spectrum analyzer.





- The Temperature was reduced to -30°C and allowed to sit for 1 hour to allow the equipment and chamber temperature to stabilize. The measurements on both downlink and uplink were then performed. The temperature was then increased by 10°C steps and allowed to settle before taking the next set of measurements.
- Voltage variation was also performed at 85% and 115% of the nominal voltage.
- Middle Channel was tested as the representative configuration.

**2.8.8 Test Results Summary**

| LTE B2 Downlink      |                         |                                     |
|----------------------|-------------------------|-------------------------------------|
| <i>Voltage (VAC)</i> | <i>Temperature (°C)</i> | <i>Frequency Deviation (Hz/ppm)</i> |
| <b>120</b>           | -30                     | 0 / 0                               |
|                      | -20                     | 0 / 0                               |
|                      | -10                     | 0 / 0                               |
|                      | 0                       | 0 / 0                               |
|                      | +10                     | 0 / 0                               |
|                      | +20                     | 0 / 0                               |
|                      | +30                     | 0 / 0                               |
|                      | +40                     | 0 / 0                               |
|                      | +50                     | 0 / 0                               |

| LTE B2 Downlink         |                      |                                     |
|-------------------------|----------------------|-------------------------------------|
| <i>Temperature (°C)</i> | <i>Voltage (VAC)</i> | <i>Frequency Deviation (Hz/ppm)</i> |
| <b>20</b>               | 102                  | 0 / 0                               |
|                         | 138                  | 0 / 0                               |




America

| LTE B2 Uplink        |                         |                                     |
|----------------------|-------------------------|-------------------------------------|
| <i>Voltage (VAC)</i> | <i>Temperature (°C)</i> | <i>Frequency Deviation (Hz/ppm)</i> |
| <b>120</b>           | -30                     | 0 / 0                               |
|                      | -20                     | 0 / 0                               |
|                      | -10                     | 0 / 0                               |
|                      | 0                       | 0 / 0                               |
|                      | +10                     | 0 / 0                               |
|                      | +20                     | 0 / 0                               |
|                      | +30                     | 0 / 0                               |
|                      | +40                     | 0 / 0                               |
|                      | +50                     | 0 / 0                               |

| LTE B2 Uplink           |                      |                                     |
|-------------------------|----------------------|-------------------------------------|
| <i>Temperature (°C)</i> | <i>Voltage (VAC)</i> | <i>Frequency Deviation (Hz/ppm)</i> |
| <b>20</b>               | 102                  | 0 / 0                               |
|                         | 138                  | 0 / 0                               |



### 2.8.9 Sample Test Plots

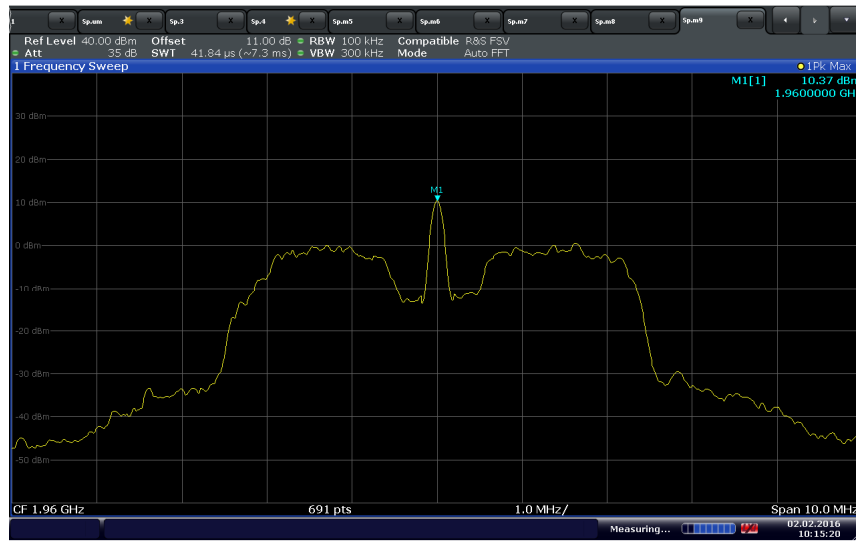

Date: 2.FEB.2016 10:15:20

Downlink Mid Channel 120VAC @ 20°C



**2.9 POWER LINE CONDUCTED EMISSIONS**

**2.9.1 Specification Reference**

RSS-Gen 8.8

**2.9.2 Standard Applicable**

A radio apparatus that is designed to be connected to the public utility (AC) power line shall ensure that the radio frequency voltage, which is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz-30 MHz, shall not exceed the limits in table below.

Unless the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in table below. The more stringent limit applies at the frequency range boundaries.

| Frequency of emission (MHz) | Conducted limit (dBµV) |           |
|-----------------------------|------------------------|-----------|
|                             | Quasi-peak             | Average   |
| 0.15-0.5                    | 66 to 56*              | 56 to 46* |
| 0.5-5                       | 56                     | 46        |
| 5-30                        | 60                     | 50        |

*\*Decreases with the logarithm of the frequency.*

**2.9.3 Equipment Under Test and Modification State**

Serial No: 921550000015 (NU and CU) / Default Test Configuration

**2.9.4 Date of Test/Initial of test personnel who performed the test**

January 18, 2016/XYZ

**2.9.5 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

**2.9.6 Environmental Conditions**

Ambient Temperature      22.5 °C  
 Relative Humidity          52.6.%  
 ATM Pressure                99.9 kPa



**2.9.7 Additional Observations**


- The EUT was verified using AC adapter supplied by the manufacturer..
- EUT verified using input voltage of 120VAC 60Hz.
- There are no significant variations in test results between each operating modes. Only the normal operation mode observed is presented.
- Measurement was done using EMC32 automated software. Reported level is the actual level with all the correction factors factored in. Correction Factor column is for informational purposes only. See Section 2.2.8 for sample computation.

**2.9.8 Sample Computation (Conducted Emission – Quasi Peak)**

|  |                                |      |             |
|--|--------------------------------|------|-------------|
| Measuring equipment raw measurement (db $\mu$ V) @ 150kHz                  |                                |      | 5.5         |
| Correction Factor (dB)   | Asset# 8607 (20 dB attenuator) | 19.9 | 20.7        |
|  | Asset# 1177 (cable)            | 0.15 |             |
|  | Asset# 1176 (cable)            | 0.35 |             |
|  | Asset# 7567 (LISN)             | 0.30 |             |
| <b>Reported QuasiPeak Final Measurement (db<math>\mu</math>V) @ 150kHz</b> |                                |      | <b>26.2</b> |



**2.9.9 Test Results - Conducted Emissions Line 1 – Hot (NU)**

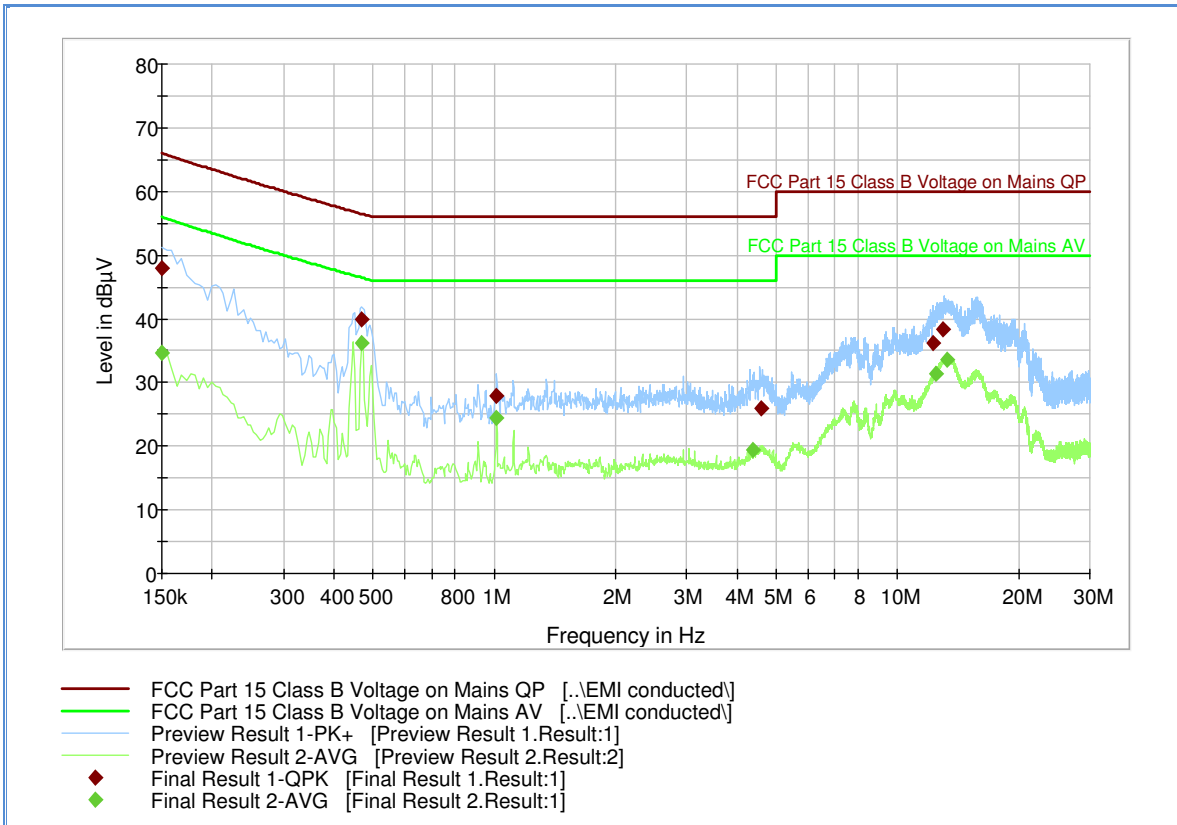

**Quasi Peak**


| Frequency (MHz) | QuasiPeak (dBµV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin - QPK (dB) | Limit - QPK (dBµV) |
|-----------------|------------------|-----------------|-----------------|--------|------|------------|-------------------|--------------------|
| 0.150000        | 47.9             | 1000.0          | 9.000           | Off    | L1   | 20.1       | 18.1              | 66.0               |
| 0.469500        | 40.0             | 1000.0          | 9.000           | Off    | L1   | 20.1       | 16.5              | 56.5               |
| 1.014000        | 28.0             | 1000.0          | 9.000           | Off    | L1   | 20.2       | 28.0              | 56.0               |
| 4.609500        | 25.9             | 1000.0          | 9.000           | Off    | L1   | 20.5       | 30.1              | 56.0               |
| 12.246000       | 36.2             | 1000.0          | 9.000           | Off    | L1   | 20.6       | 23.8              | 60.0               |
| 12.997500       | 38.4             | 1000.0          | 9.000           | Off    | L1   | 20.6       | 21.6              | 60.0               |

**Average**

| Frequency (MHz) | Average (dBµV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin - Ave (dB) | Limit - Ave (dBµV) |
|-----------------|----------------|-----------------|-----------------|--------|------|------------|-------------------|--------------------|
| 0.150000        | 34.6           | 1000.0          | 9.000           | Off    | L1   | 20.1       | 21.4              | 56.0               |
| 0.469500        | 36.3           | 1000.0          | 9.000           | Off    | L1   | 20.1       | 10.2              | 46.5               |
| 1.014000        | 24.4           | 1000.0          | 9.000           | Off    | L1   | 20.2       | 21.6              | 46.0               |
| 4.366500        | 19.5           | 1000.0          | 9.000           | Off    | L1   | 20.4       | 26.5              | 46.0               |
| 12.408000       | 31.4           | 1000.0          | 9.000           | Off    | L1   | 20.6       | 18.6              | 50.0               |
| 13.263000       | 33.7           | 1000.0          | 9.000           | Off    | L1   | 20.6       | 16.3              | 50.0               |



**2.9.10 FCC Conducted Emissions Line 2 – Neutral (NU)**

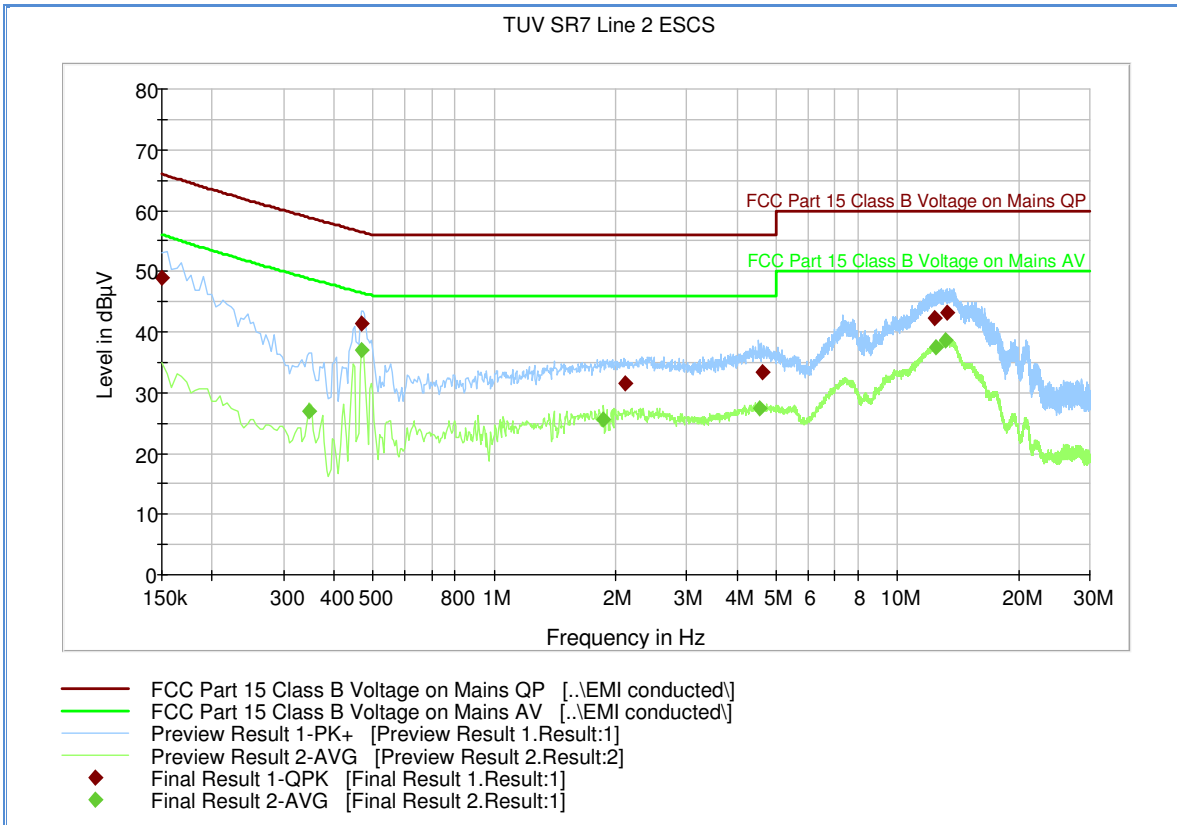

**Quasi Peak**


| Frequency (MHz) | QuasiPeak (dBµV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin - QPK (dB) | Limit - QPK (dBµV) |
|-----------------|------------------|-----------------|-----------------|--------|------|------------|-------------------|--------------------|
| 0.150000        | 49.0             | 1000.0          | 9.000           | Off    | N    | 20.1       | 17.0              | 66.0               |
| 0.469500        | 41.5             | 1000.0          | 9.000           | Off    | N    | 20.1       | 15.0              | 56.5               |
| 2.107500        | 31.5             | 1000.0          | 9.000           | Off    | N    | 20.3       | 24.5              | 56.0               |
| 4.623000        | 33.4             | 1000.0          | 9.000           | Off    | N    | 20.4       | 22.6              | 56.0               |
| 12.358500       | 42.4             | 1000.0          | 9.000           | Off    | N    | 20.7       | 17.6              | 60.0               |
| 13.281000       | 43.2             | 1000.0          | 9.000           | Off    | N    | 20.6       | 16.8              | 60.0               |

**Average**

| Frequency (MHz) | Average (dBµV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin - Ave (dB) | Limit - Ave (dBµV) |
|-----------------|----------------|-----------------|-----------------|--------|------|------------|-------------------|--------------------|
| 0.348000        | 26.9           | 1000.0          | 9.000           | Off    | N    | 20.2       | 21.9              | 48.8               |
| 0.469500        | 37.1           | 1000.0          | 9.000           | Off    | N    | 20.1       | 9.4               | 46.5               |
| 1.860000        | 25.7           | 1000.0          | 9.000           | Off    | N    | 20.2       | 20.3              | 46.0               |
| 4.537500        | 27.5           | 1000.0          | 9.000           | Off    | N    | 20.4       | 18.5              | 46.0               |
| 12.435000       | 37.5           | 1000.0          | 9.000           | Off    | N    | 20.7       | 12.5              | 50.0               |
| 13.177500       | 38.5           | 1000.0          | 9.000           | Off    | N    | 20.6       | 11.5              | 50.0               |



**2.9.11 Test Results - Conducted Emissions Line 1 – Hot (CU)**

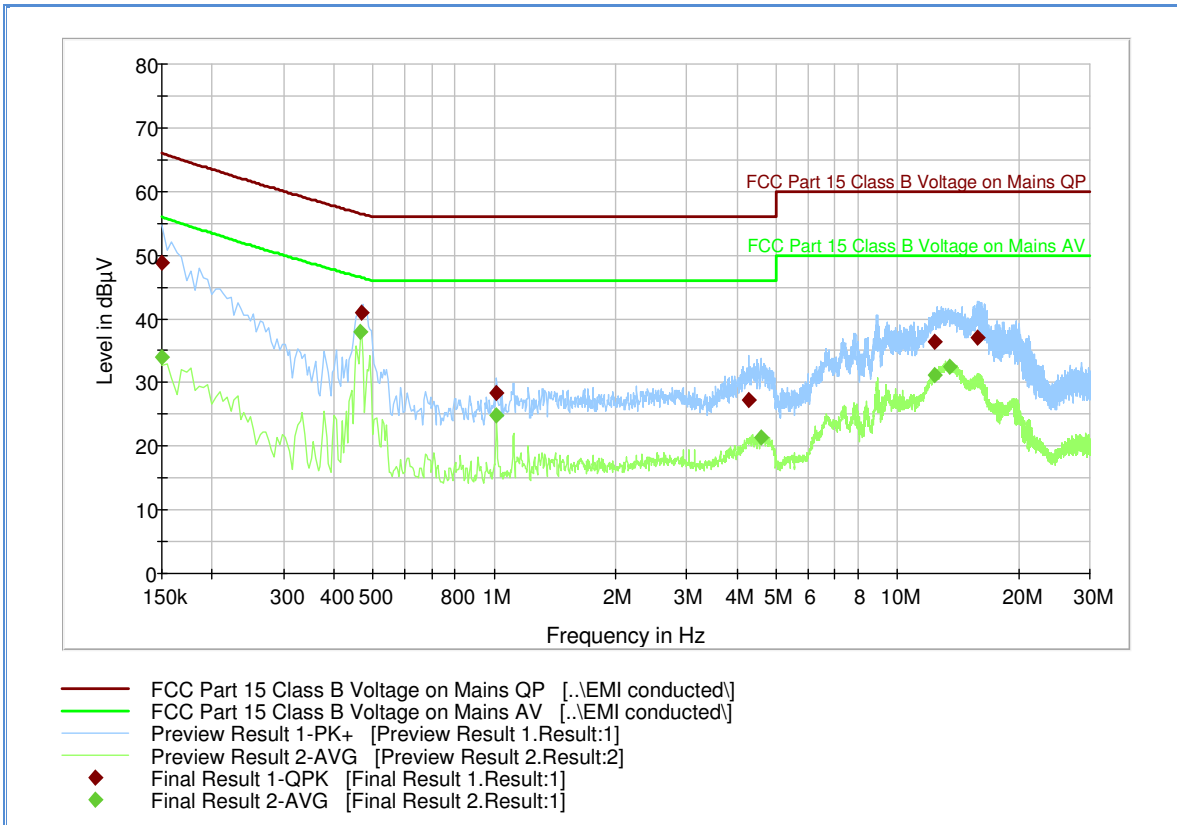

**Quasi Peak**

| Frequency (MHz) | QuasiPeak (dBµV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin - QPK (dB) | Limit - QPK (dBµV) |
|-----------------|------------------|-----------------|-----------------|--------|------|------------|-------------------|--------------------|
| 0.150000        | 48.9             | 1000.0          | 9.000           | Off    | L1   | 20.1       | 17.1              | 66.0               |
| 0.469500        | 40.9             | 1000.0          | 9.000           | Off    | L1   | 20.1       | 15.6              | 56.5               |
| 1.014000        | 28.3             | 1000.0          | 9.000           | Off    | L1   | 20.2       | 27.7              | 56.0               |
| 4.285500        | 27.2             | 1000.0          | 9.000           | Off    | L1   | 20.4       | 28.8              | 56.0               |
| 12.363000       | 36.4             | 1000.0          | 9.000           | Off    | L1   | 20.6       | 23.6              | 60.0               |
| 15.841500       | 37.1             | 1000.0          | 9.000           | Off    | L1   | 20.6       | 22.9              | 60.0               |


**Average**

| Frequency (MHz) | Average (dBµV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin - Ave (dB) | Limit - Ave (dBµV) |
|-----------------|----------------|-----------------|-----------------|--------|------|------------|-------------------|--------------------|
| 0.150000        | 33.9           | 1000.0          | 9.000           | Off    | L1   | 20.1       | 22.1              | 56.0               |
| 0.465000        | 37.8           | 1000.0          | 9.000           | Off    | L1   | 20.1       | 8.7               | 46.5               |
| 1.014000        | 24.9           | 1000.0          | 9.000           | Off    | L1   | 20.2       | 21.1              | 46.0               |
| 4.582500        | 21.3           | 1000.0          | 9.000           | Off    | L1   | 20.4       | 24.7              | 46.0               |
| 12.403500       | 31.3           | 1000.0          | 9.000           | Off    | L1   | 20.6       | 18.7              | 50.0               |
| 13.452000       | 32.4           | 1000.0          | 9.000           | Off    | L1   | 20.6       | 17.6              | 50.0               |





**2.9.12 FCC Conducted Emissions Line 2 – Neutral (CU)**

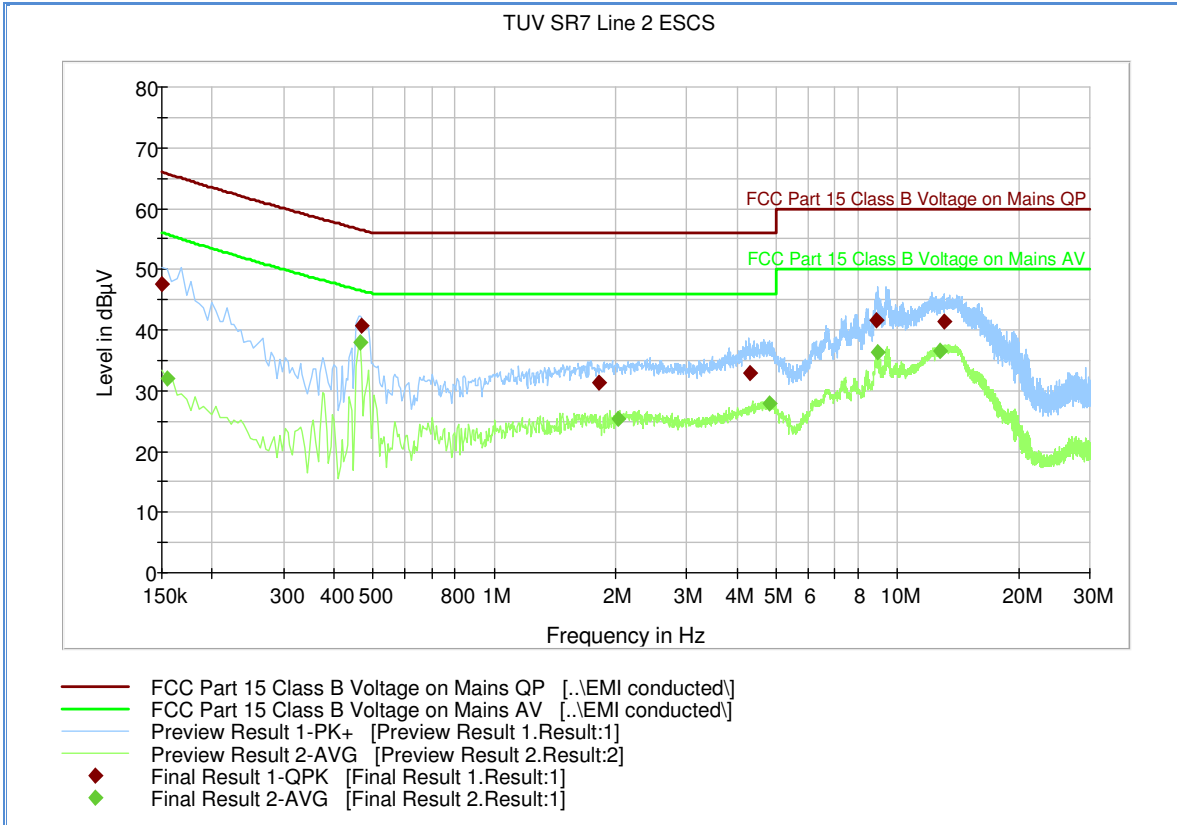

**Quasi Peak**

| Frequency (MHz) | QuasiPeak (dBµV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin - QPK (dB) | Limit - QPK (dBµV) |
|-----------------|------------------|-----------------|-----------------|--------|------|------------|-------------------|--------------------|
| 0.150000        | 47.4             | 1000.0          | 9.000           | Off    | N    | 20.1       | 18.6              | 66.0               |
| 0.469500        | 40.8             | 1000.0          | 9.000           | Off    | N    | 20.1       | 15.7              | 56.5               |
| 1.819500        | 31.2             | 1000.0          | 9.000           | Off    | N    | 20.2       | 24.8              | 56.0               |
| 4.312500        | 32.9             | 1000.0          | 9.000           | Off    | N    | 20.4       | 23.1              | 56.0               |
| 8.875500        | 41.6             | 1000.0          | 9.000           | Off    | N    | 20.5       | 18.4              | 60.0               |
| 13.101000       | 41.4             | 1000.0          | 9.000           | Off    | N    | 20.6       | 18.6              | 60.0               |

**Average**

| Frequency (MHz) | Average (dBµV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin - Ave (dB) | Limit - Ave (dBµV) |
|-----------------|----------------|-----------------|-----------------|--------|------|------------|-------------------|--------------------|
| 0.154500        | 32.0           | 1000.0          | 9.000           | Off    | N    | 20.0       | 23.7              | 55.7               |
| 0.465000        | 37.8           | 1000.0          | 9.000           | Off    | N    | 20.1       | 8.7               | 46.5               |
| 2.031000        | 25.4           | 1000.0          | 9.000           | Off    | N    | 20.1       | 20.6              | 46.0               |
| 4.803000        | 27.8           | 1000.0          | 9.000           | Off    | N    | 20.5       | 18.2              | 46.0               |
| 8.938500        | 36.2           | 1000.0          | 9.000           | Off    | N    | 20.5       | 13.8              | 50.0               |
| 12.741000       | 36.6           | 1000.0          | 9.000           | Off    | N    | 20.7       | 13.4              | 50.0               |

FCC ID: NU: YETD32-21366NU  
CU: YETD32-21366CU  
IC: N/A  
Report No. SD72112724-0116B Rev1.0



### **SECTION 3**

#### **TEST EQUIPMENT USED**



### 3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

| ID Number (SDGE/SDRB)               | Test Equipment                       | Type                | Serial Number        | Manufacturer               | Cal Date                  | Cal Due Date |
|-------------------------------------|--------------------------------------|---------------------|----------------------|----------------------------|---------------------------|--------------|
| <b>Antenna Conducted Port Setup</b> |                                      |                     |                      |                            |                           |              |
| 7604                                | P-Series Power Meter                 | N1912A              | SG45100273           | Agilent                    | 05/27/15                  | 05/27/16     |
| 7605                                | 50MHz-18GHz Wideband Power Sensor    | N1921A              | MY51100054           | Agilent                    | 04/10/15                  | 04/10/16     |
| 7582                                | Signal/Spectrum Analyzer             | FSW26               | 101614               | Rhode & Schwarz            | 10/05/15                  | 10/05/16     |
| 7608                                | Vector Signal Generator              | SMBV100A            | 259021               | Rhode & Schwarz            | 07/29/15                  | 07/29/16     |
| 7562                                | Wideband Radio Communication Tester  | CMW 500             | 1201.0002k50 /103829 | Rhode & Schwarz            | For signalling            |              |
| 8772                                | 10dB Attenuator                      | 606-10-1F4/DR       | -                    | MECA                       | Verified by 7582 and 7608 |              |
| <b>Radiated Emissions</b>           |                                      |                     |                      |                            |                           |              |
| 1033                                | Bilog Antenna                        | 3142C               | 00044556             | EMCO                       | 09/25/15                  | 09/25/16     |
| 7575                                | Double-ridged waveguide horn antenna | 3117                | 00155511             | EMCO                       | 04/27/15                  | 04/27/16     |
| 8628                                | Pre-amplifier                        | QLJ 01182835-JO     | 8986002              | QuinStar Technologies Inc. | 03/20/15                  | 03/20/16     |
| 1040                                | EMI Test Receiver                    | ESIB40              | 100292               | Rhode & Schwarz            | 09/29/15                  | 09/29/16     |
| 1049                                | EMI Test Receiver                    | ESU                 | 100133               | Rhode & Schwarz            | 03/11/15                  | 03/11/16     |
| 1016                                | Pre-amplifier                        | PAM-0202            | 187                  | PAM                        | 12/15/15                  | 12/15/16     |
| 1153                                | High-frequency cable                 | SucoFlex 100 SX     | N/A                  | Suhner                     | 04/03/15                  | 04/03/16     |
| 8543                                | High-frequency cable                 | Micropore 19057793  | N/A                  | United Microwave Products  | 09/03/15                  | 09/03/16     |
| 1151                                | Pre-amplifier                        | TS-PR26             | 100026               | Rhode & Schwarz            | 05/03/15                  | 05/03/16     |
| <b>Conducted Emissions</b>          |                                      |                     |                      |                            |                           |              |
| 1024                                | EMI Test Receiver                    | ESCS 30             | 847793/001           | Rhode & Schwarz            | 04/10/15                  | 04/10/16     |
| 7567                                | LISN                                 | FCC-LISN-50-25-2-10 | 120304               | Fischer Custom Comm.       | 07/14/15                  | 07/14/16     |
| 7568                                | LISN                                 | FCC-LISN-50-25-2-10 | 120305               | Fischer Custom Comm.       | 10/28/15                  | 10/28/16     |
| 8822                                | 20dB Attenuator                      | 34-20-34            | N/A                  | MCE / Weinschel            | 02/20/15                  | 02/20/16     |
| 8824                                | 20dB Attenuator                      | 34-20-34            | N/A                  | MCE / Weinschel            | 02/20/15                  | 02/20/16     |
| 7562                                | Wideband Radio Communication Tester  | CMW 500             | 1201.0002k50 /103829 | Rhode & Schwarz            | For signalling            |              |

FCC ID: NU: YETD32-21366NU  
 CU: YETD32-21366CU  
 IC: N/A  
 Report No. SD72112724-0116B Rev1.0



America

| Miscellaneous |                                  |        |                 |                 |                  |          |
|---------------|----------------------------------|--------|-----------------|-----------------|------------------|----------|
| 6792          | Multimeter                       | 3478A  | 2911A70964      | Hewlett Packard | 08/14/15         | 08/14/16 |
| 11312         | Mini Environmental Quality Meter | 850027 | CF099-56010-340 | Sper Scientific | 04/09/15         | 04/09/16 |
|               | DC Power Supply                  | 35010M | D102007S        | Protek          | Verified by 6792 |          |
|               | Test Software                    | EMC32  | V8.53           | Rhode & Schwarz | N/A              |          |



### 3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:

#### 3.2.1 Conducted Measurements

| Contribution                    |                            | Probability Distribution Type | Probability Distribution $x_i$ | Standard Uncertainty $u(x_i)$ | $[u(x_i)]^2$ |
|---------------------------------|----------------------------|-------------------------------|--------------------------------|-------------------------------|--------------|
| 1                               | Receiver/Spectrum Analyzer | Rectangular                   | 0.36                           | 0.21                          | 0.04         |
| 2                               | Cables                     | Rectangular                   | 0.50                           | 0.29                          | 0.08         |
| 3                               | LISN                       | Rectangular                   | 0.66                           | 0.38                          | 0.15         |
| 4                               | Attenuator                 | Rectangular                   | 0.30                           | 0.17                          | 0.03         |
| 5                               | EUT Setup                  | Rectangular                   | 1.00                           | 0.58                          | 0.33         |
| Combined Uncertainty ( $u_c$ ): |                            |                               |                                |                               | 0.80         |
| Coverage Factor (k):            |                            |                               |                                |                               | 2            |
| Expanded Uncertainty:           |                            |                               |                                |                               | 1.59         |

#### 3.2.2 Radiated Measurements (Below 1GHz)

| Contribution                    |                            | Probability Distribution Type | Probability Distribution $x_i$ | Standard Uncertainty $u(x_i)$ | $[u(x_i)]^2$ |
|---------------------------------|----------------------------|-------------------------------|--------------------------------|-------------------------------|--------------|
| 1                               | Receiver/Spectrum Analyzer | Rectangular                   | 0.45                           | 0.26                          | 0.07         |
| 2                               | Cables                     | Rectangular                   | 0.50                           | 0.29                          | 0.08         |
| 3                               | Preamp                     | Rectangular                   | 0.50                           | 0.29                          | 0.08         |
| 4                               | Antenna                    | Rectangular                   | 0.75                           | 0.43                          | 0.19         |
| 5                               | Site                       | Rectangular                   | 2.70                           | 1.56                          | 2.43         |
| 6                               | EUT Setup                  | Rectangular                   | 1.00                           | 0.58                          | 0.33         |
| Combined Uncertainty ( $u_c$ ): |                            |                               |                                |                               | 1.78         |
| Coverage Factor (k):            |                            |                               |                                |                               | 2            |
| Expanded Uncertainty:           |                            |                               |                                |                               | 3.57         |

#### 3.2.3 Radiated Emission Measurements (Above 1GHz)

| Contribution                    |                            | Probability Distribution Type | Probability Distribution $x_i$ | Standard Uncertainty $u(x_i)$ | $[u(x_i)]^2$ |
|---------------------------------|----------------------------|-------------------------------|--------------------------------|-------------------------------|--------------|
| 1                               | Receiver/Spectrum Analyzer | Rectangular                   | 0.57                           | 0.33                          | 0.11         |
| 2                               | Cables                     | Rectangular                   | 0.70                           | 0.40                          | 0.16         |
| 3                               | Preamp                     | Rectangular                   | 0.50                           | 0.29                          | 0.08         |
| 4                               | Antenna                    | Rectangular                   | 0.37                           | 0.21                          | 0.05         |
| 5                               | Site                       | Rectangular                   | 2.70                           | 1.56                          | 2.43         |
| 6                               | EUT Setup                  | Rectangular                   | 1.00                           | 0.58                          | 0.33         |
| Combined Uncertainty ( $u_c$ ): |                            |                               |                                |                               | 1.78         |
| Coverage Factor (k):            |                            |                               |                                |                               | 2            |
| Expanded Uncertainty:           |                            |                               |                                |                               | 3.56         |



**3.2.4 Conducted Antenna Port Measurement**

| Contribution                    |                            | Probability Distribution Type | Probability Distribution $x_i$ | Standard Uncertainty $u(x_i)$ | $[u(x_i)]^2$ |
|---------------------------------|----------------------------|-------------------------------|--------------------------------|-------------------------------|--------------|
| 1                               | Receiver/Spectrum Analyzer | Rectangular                   | 0.57                           | 0.33                          | 0.11         |
| 2                               | Cables                     | Rectangular                   | 0.50                           | 0.29                          | 0.08         |
| 3                               | EUT Setup                  | Rectangular                   | 1.00                           | 0.58                          | 0.33         |
| Combined Uncertainty ( $u_c$ ): |                            |                               |                                |                               | 0.72         |
| Coverage Factor (k):            |                            |                               |                                |                               | 2            |
| Expanded Uncertainty:           |                            |                               |                                |                               | 1.45         |

FCC ID: NU: YETD32-21366NU  
CU: YETD32-21366CU  
IC: N/A  
Report No. SD72112724-0116B Rev1.0




## SECTION 4

### DIAGRAM OF TEST SETUP




America

#### 4.1 TEST SETUP DIAGRAM

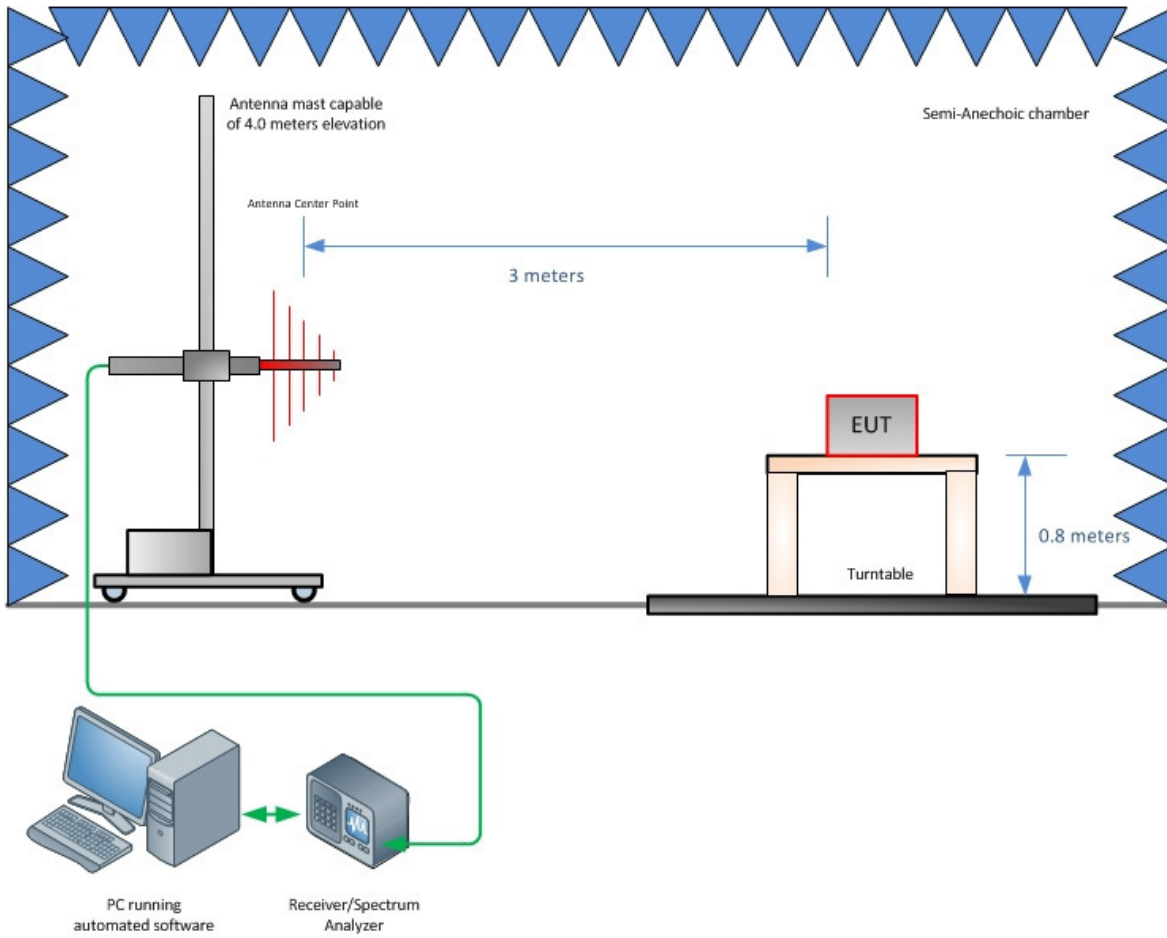


**Radiated Emission Test Setup (Below 1GHz)**




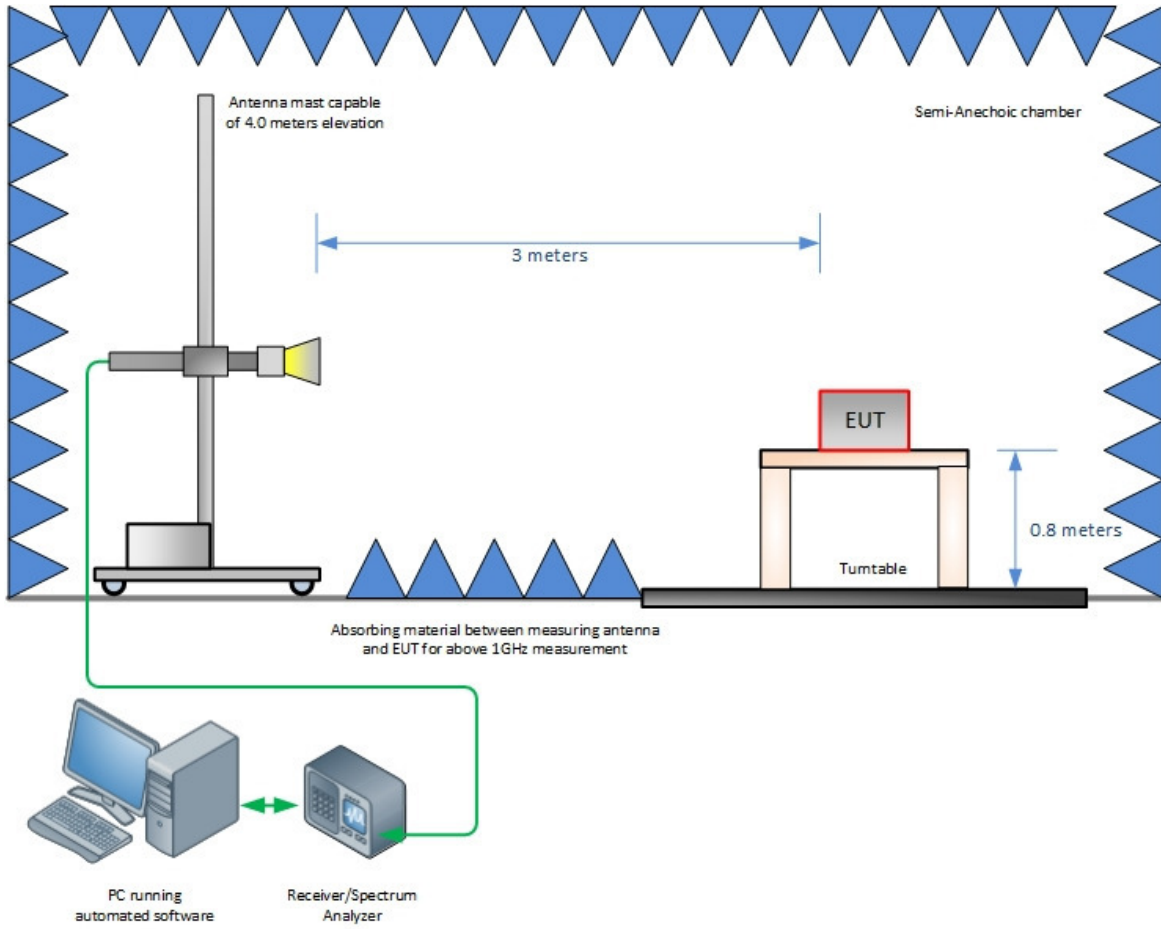


**Radiated Emission Test Setup (Above 1GHz)**

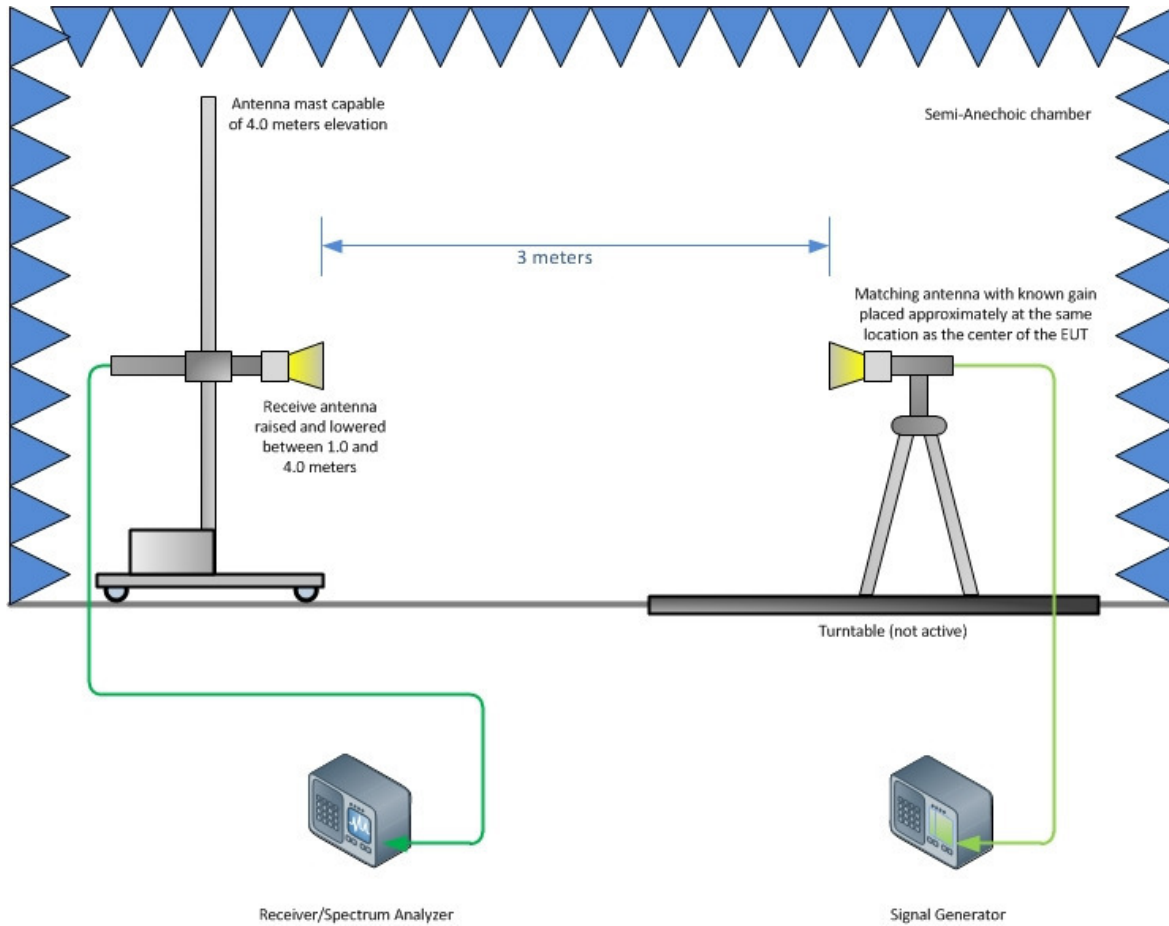

**Substitution Test Method (Above 1GHz, if applicable)**

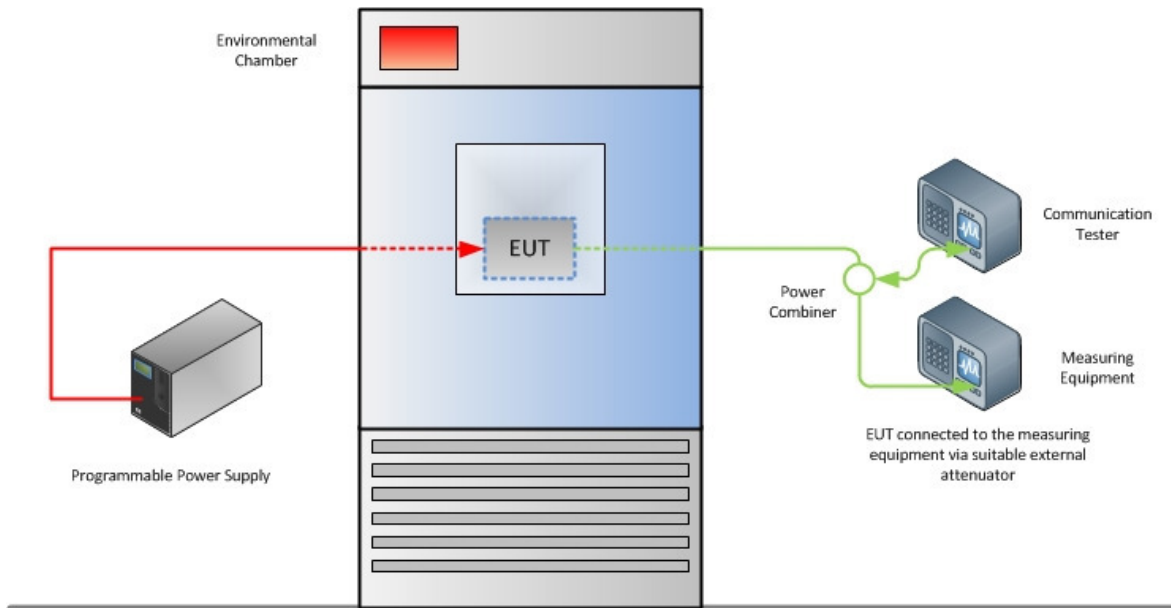

**Frequency Stability Test Configuration**

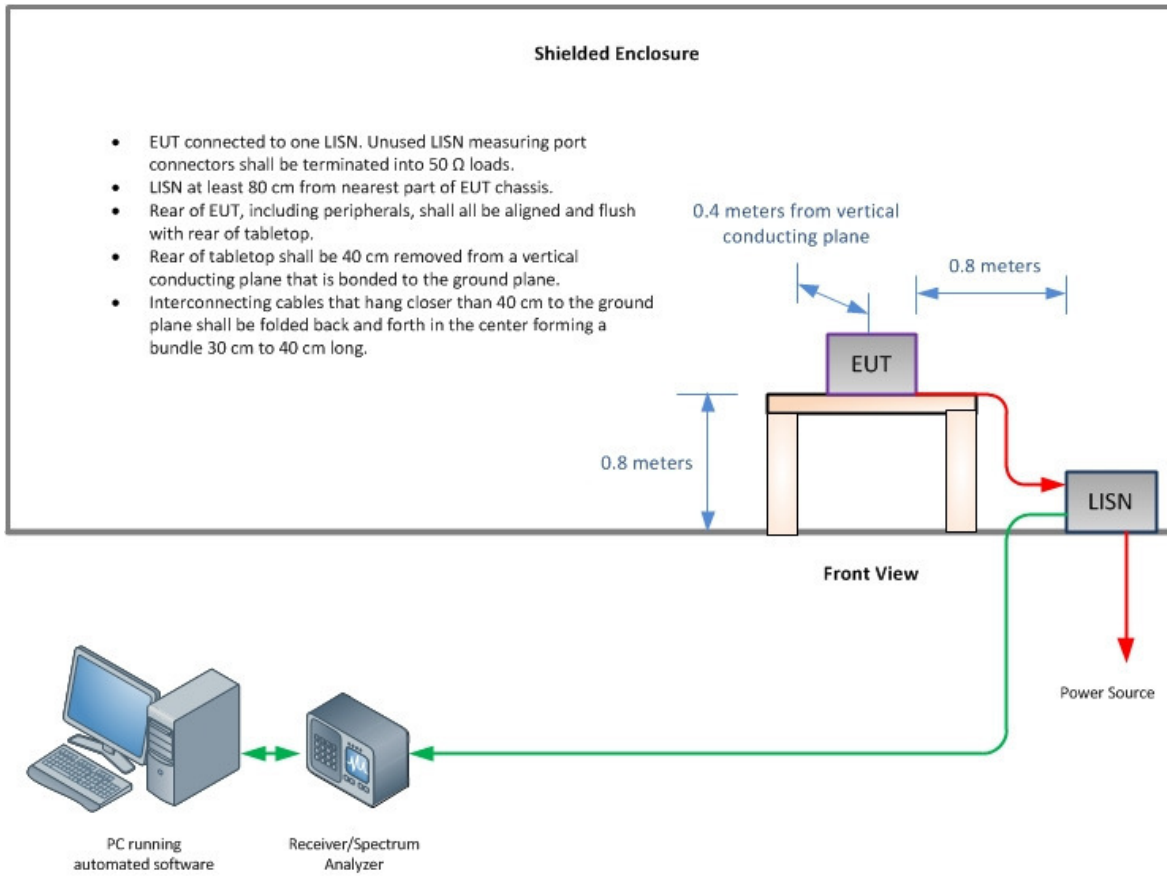

**Conducted Emissions Test Configuration (if applicable)**

FCC ID: NU: YETD32-21366NU  
CU: YETD32-21366CU  
IC: N/A  
Report No. SD72112724-0116B Rev1.0



## SECTION 5

### ACCREDITATION, DISCLAIMERS AND COPYRIGHT



**5.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT**

TÜV SÜD America Inc.'s reports apply only to the specific sample tested under stated test conditions. It is the manufacturer's responsibility to assure the continued compliance of production units of this model. TÜV SÜD America, Inc. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD America, Inc.'s issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and TÜV SÜD America, Inc., extracts from the test report shall not be reproduced, except in full without TÜV SÜD America, Inc.'s written approval.

This report must not be used to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the federal government.

TÜV SÜD America, Inc. and its professional staff hold government and professional organization certifications for AAMI, ACIL, AEA, ANSI, IEEE, A2LA, NIST and VCCI.



A2LA Cert. No. 2955.13

