


Radio Testing of the

Nextivity Inc.
Industrial Signal Booster
Model: Cel-Fi G43
G43-CBBE
In accordance with

FCC CFR 47 Part 90
RSS-140 issue 1 (April 2018)
RSS-119 Issue 12 (May 2015), A1 (2022)
RSS-131 issue 4 (December 2022)

Nextivity Inc.
16550 West Bernardo Drive, Bldg 5, Suite 550,
San Diego, CA 92127, USA
Date: November 2024
Document Number: 721004904C Issue 01 | Version Number: 01

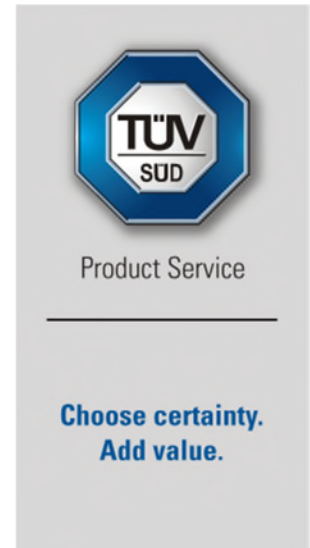

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Authorized Signatory	Ferdinand S. Custodio	11/11/2024	

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Product Service document control rules.

EXECUTIVE SUMMARY

Test reports and supporting documents of this product was reviewed and the EUT in general was confirmed to be in compliance with FCC CFR 47 Part 90, RSS-140 issue 1 (April 2018), RSS-119 Issue 12 (May 2015), A1 (2022) and RSS-131 issue 4 (December 2022).



A2LA Cert. No. 2955.13

DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD Product Service with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD Product Service. No part of this document may be reproduced without the prior written approval of TÜV SÜD Product Service. © 2016 TÜV SÜD Product Service.

ACCREDITATION

Our A2LA Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our A2LA Accreditation.

TÜV SÜD America, Inc.
10040 Mesa Rim Road
San Diego, CA 92121-2912



TÜV SÜD America, Inc.
Rancho Bernardo Facility
16936 Via Del Campo
San Diego, CA 92127

Phone: 858 678 1400
www.tuv-sud-america.com



America

TÜV SÜD America Inc., 10040 Mesa Rim Road, San Diego, CA 92121
Tel: (858) 678-1400. Website: www.TUVamerica.com

REPORT ON	Radio Testing of the Nextivity Inc. Cel-Fi G43 Industrial Signal Booster
TEST REPORT NUMBER	721004904C
REPORT DATE	November 2023
PREPARED FOR	Nextivity Inc. 16550 West Bernardo Drive, Bldg 5, Suite 550, San Diego, CA 92127, USA
CONTACT PERSON	CK Li Sr. Principal Engineer, Regulatory (858) 485-9422 CLi@NextivityInc.com
PREPARED BY	 _____ Name: Miguel Angel Rabago Garcia Authorized Signatory Title: Wireless Test Engineer
APPROVED BY	 _____ Name: Ferdinand S. Custodio Authorized Signatory Title: Senior EMC Test Engineer / Wireless Team Lead



TÜV SÜD America Inc., 10040 Mesa Rim Road, San Diego, CA 92121
Tel: (858) 678-1400. Website: www.TUVamerica.com

Revision History

721004904C Nextivity Inc. Cel-Fi G43 Industrial Signal Booster					
DATE	OLD REVISION	NEW REVISION	REASON	PAGES AFFECTED	APPROVED BY
11/11/2024	—	Initial Release			Ferdinan S. Custodio

CONTENTS

Section	Page No
1 Report Summary.....	4
1.1 Introduction	5
1.2 Brief Summary of Results	7
1.3 Product Information	8
1.4 EUT Test Configuration	12
1.5 Deviations from the Standard	16
1.6 Modification Record	16
1.7 Test Methodology	16
1.8 Test Facility Location	16
1.9 Test Facility Registration	16
2 Test Details.....	18
2.1 Transmitter Conducted Output Power	19
2.2 Effective Radiated Power	22
2.3 Occupied Bandwidth	24
2.4 Peak-Average Ratio.....	28
2.5 Band Edge	31
2.6 Conducted Spurious Emissions.....	35
2.7 Frequency Stability	42
2.8 AGC Threshold Level	48
2.9 Out-of-Band Rejection	50
2.10 Input-Versus-Output Signal Comparison	53
2.11 Input and Output Power and Amplifier/Booster Gain	63
2.12 Noise Figure	65
2.13 Out-of-Band/Out-of-Block (Intermodulation) and Spurious Emissions.....	68
2.14 Field Strength of Spurious Emissions.....	71
3 Test Equipment Used.....	75
3.1 Test Equipment Used	76
4 Measurement Uncertainty.....	77
4.1 Measurement Uncertainty	78
5 Diagram of Test Setup	80
5.1 Test Setup Diagram	81
6 Accreditation, Disclaimers and Copyright.....	85
6.1 Accreditation, Disclaimers and Copyright.....	86



SECTION 1

REPORT SUMMARY

Radio Testing of the
Nextivity Inc.
Cel-Fi G43 Industrial Signal Booster



1.1 INTRODUCTION

The information contained in this report is intended to show verification of the Nextivity Inc. Cel-Fi G43-CBBE to the requirements of FCC CFR 47 Part 90, RSS-140 issue 1 (April 2018), RSS-119 Issue 12 (May 2015), A1 (2022) and RSS-131 issue 4 (December 2022).

Cel-Fi GO G43-CBBE (EUT) contains two G41-BE boards, and one G41-CE. G41-BE and G41-CE were previously tested and certified as as FCC ID: RYETG41-BE and FCC ID: YETG41-CE. Test results presented in this report except for Field Strength of Spurious Emissions are being leveraged from 72189913E Nextivity G41-CE FCC Part 90 RSS-131 B14 Test Report.

Objective	To perform Radio Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.
Manufacturer	Nextivity Inc.
Model Name	Cel-Fi G43
Model Number(s)	G43-CBBE
EUT	Industrial Signal Booster
FCC ID	YETG43-CBBE
Serial Number(s)	864402002419 (G43-CBBE), 560311000026 (G41-CE)
Number of Samples Tested	2
Test Specification/Issue/Date	<ul style="list-style-type: none"> • FCC CFR 47 Part 90 (October 1, 2022) • RSS-140 - Equipment Operating in the Public Safety Broadband Frequency Bands 758-768 MHz and 788-798 MHz (issue 1, April 2018) • RSS-119 – Land Mobile and Fixed Equipment Operating in the Frequency Range 27.41-960 MHz (issue 12, May 2015, A1 April 2022) • RSS-131 – Zone Enhancers (issue 4, Updated December 2022) • SRSP-540 - Technical Requirements for Public Safety Broadband Systems in the Bands 758-768 MHz and 788-798 MHz (issue 1, April 2018) • SRSP-511 - Technical Requirements for Land Mobile Radio Services Operating in the Bands 768-776 MHz and 798-806 MHz (issue 2, December 2017) • RSS-Gen - General Requirements for Compliance of Radio Apparatus (Issue 5, November 2019 Amendment 1) • ANSI C63.26-2015: American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services



Start of Test	September 14, 2023 (G41-CE), October 15, 2024 (G43-CBBE)
Finish of Test	October 18, 2023 (G41-CE), October 22, 2024 (G43-CBBE)
Name of Engineer(s)	Miguel Agel Rabago Garcia/MARG
Related Document(s)	<ul style="list-style-type: none">• KDB971168 D01 Power Meas License Digital Systems v03r01 (Measurement Guidance for Certification of Licensed Digital Transmitters)• KDB412172 D01 Determining ERP and EIRP v01r01 (Guidelines for Determining the Effective Radiated Power (ERP) and Equivalent Isotropically Radiated Power (EIRP) of a RF Transmitting System)• KDB 935210 D05 v01r04 Measurements Guidance for Industrial and Non-Consumer Signal Booster, Repeater, And Amplifier Devices• Product Spec for RFQ_Sapporo G41-BE_US_v1.pdf• Supporting documents for EUT certification are separate exhibits.• 72189913G Nextivity G41-CE FCC Part 20 RSS-131 B2, 4, 5, 25 Test Report• 72189913E Nextivity G41-CE FCC Part 90 RSS-131 B14 Test Report.

1.2 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out in accordance with FCC CFR 47 Part 90 is shown below:

Section	Part 2	Part 90	RSS-140	RSS-119	KDB 935210 D05/ RSS-131	Test Description	Result
2.1	2.1046	-	-	-	-10.2	Transmitter Conducted Output Power	Compliant
2.2	2.1046	90.219(d)(3)(i) 90.219(e)(1)	4.3	5.4	-	Effective Radiated Power	Compliant
2.3	2.1049	90.219(e)(4)(ii)	RSS- Gen 6.7	5.5	-	Occupied Bandwidth	Compliant
2.4	-	-	4.3	-	-	Peak-Average Ratio	Compliant
2.5	-	90.543(e)(3)(5)	4.4	-	-	Band Edge	Compliant
2.6	2.1051	90.219(e)(3) 90.543(e)(2)(3)(4)(5) 90.543(c)(f)	4.4	5.8.9.2	4.7.3/10.6	Conducted Spurious Emissions	Compliant
2.7	2.1055	90.213 90.539(b)	4.2	5.9	4.8/ 9.4	Frequency Stability	Compliant
-	-	-	RSS-Gen 7.1		-	Receiver Spurious Emissions	N/A*
2.8	-	-	-	-	4.2/ -	AGC Threshold Level	Compliant
2.9	-	-	-	-	4.3/ 9.1	Out of Band Rejection	Compliant
2.10	-	90.219(e)(4)(ii)	-	-	4.4/ 9.2	Input-versus-output signal comparison	Compliant
-	-	90.219 (e)(4)(iii) 90.210 90.543(a)	-	5.8.9	4.4/ -	Emission Mask and Adjacent Channel Power	N/A**
2.11	-	90.219(e)(1)	-	-	4.5/ 10.3	Input / Output Power and Amplifier / Booster Gain	Compliant
2.12	-	90.219(e)(2)	-	-	4.6/10.4	Noise Figure	Compliant
2.13	2.1051	90.219(e)(3) 90.543(c)	4.4	5.8.9.2	4.7/ -	Out-of-band/out-of-block (Intermodulation) and Spurious Emissions	Compliant
2.14	2.1053	90.219(e)(3) 90.543(e)(1)(3)(f)	4.4	-	4.9/ -	Field Strength of Spurious Emissions	Compliant

N/A* Not required as per RSS-GEN 5.3. EUT is not a Stand-alone receiver.

N/A** The EUT is an equipment without audio low pass filter and mask C applies. The received signal is wideband LTE 14 10 MHz signal, and it does not meet the unwanted Emission Mask C limits of § 90.210 which is for narrow band. Therefore, emission mask is not applicable to the retransmitted output signals.

Note: Test results from section 2.1 to section 2.13 presented in this report are being leveraged from 72189913E Nextivity G41-CE FCC Part 90 RSS-131 B14 Test Report.

1.3 PRODUCT INFORMATION

1.3.1 Technical Description

CEL-FI GO G43 is a multi-operator LTE Provider Specific Signal solution that ensures reliable in-building 4G connectivity for up to three Mobile Network Operator (MNO) signals.

Cel-FiTMLittle Foot is a single box LTE Signal Booster consist of two G41-BE and one G41-CE PCBs. Little Foot is for indoor environments and target for North America market.

EUT is powered by external 12VDC Power adaptor


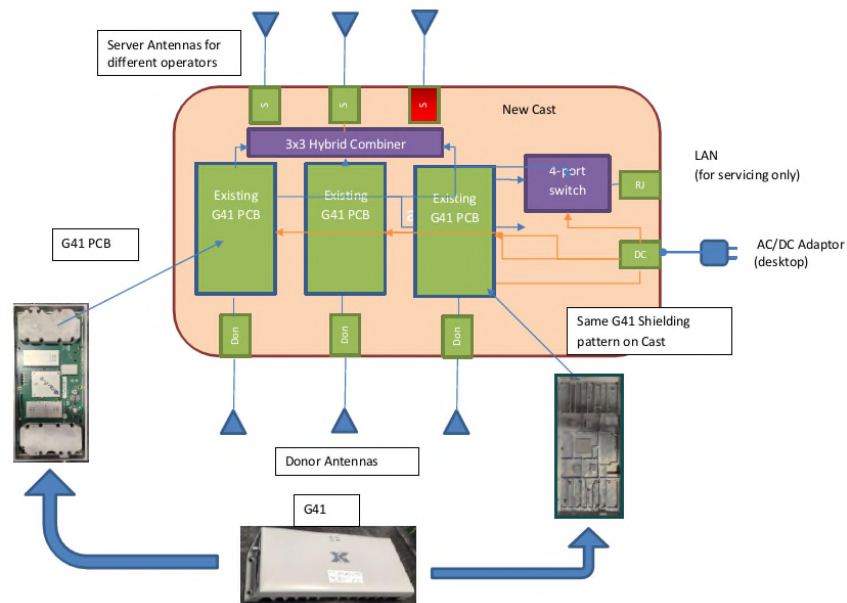


Figure 1: System Overview

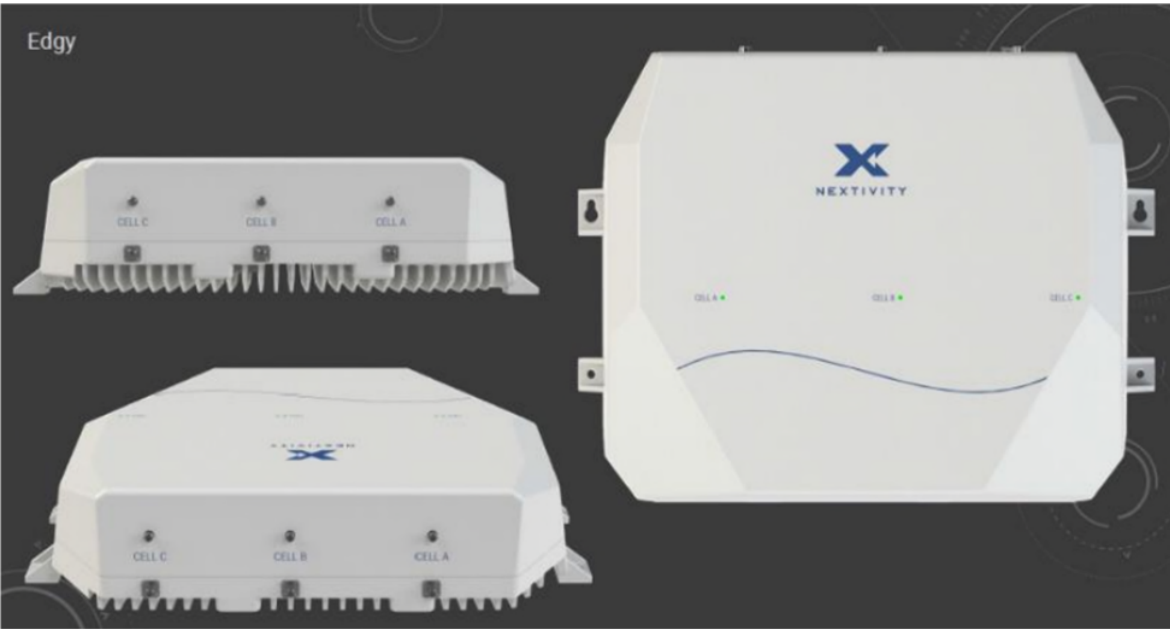

Equipment under Test

1.3.2 EUT General Description

EUT Description	Industrial Signal Booster
Trade Name	Cel-Fi™
Model Name	Cel-Fi G43
Model Number(s)	G43-CBBE
Rated Voltage	12V DC via external AC/DC adaptor
Mode Verified	LTE Band 14
Frequency Bands	LTE Band 2: UL: 1850 - 1910MHz DL: 1930 - 1990MHz LTE Band 4: UL: 1710 - 1755MHz DL: 2110 - 2155MHz LTE Band 5: UL: 824 - 849MHz DL: 869 - 894MHz LTE Band 12: UL: 699 - 716MHz DL: 729 - 746MHz LTE Band 13: UL: 777 - 787MHz DL: 746 - 756MHz

LTE Band 14: UL: 788 - 798MHz
DL: 758 - 768MHz
LTE Band 25: UL: 1850 - 1915MHz
DL: 1930 - 1995MHz

Product Specifications

Signal Bandwidth (MHz)	LTE Band 2, 4, 25		LTE Band 5		LTE Band 14	
	DL (dBm)	UL (dBm)	DL (dBm)	UL (dBm)	DL (dBm)	UL (dBm)
5	Max. 16	22	Max. 16	20	N/A	
10					13 dBm	22
15			N/A		N/A	
20			N/A		N/A	

Power Tolerance (dBm) ± 2

Capability LTE (Band 2, 4, 5, 12, 13, 14 and 25)

Primary Unit (EUT) ☐ Production
☐ Pre-Production
☒ Engineering

Environment Fixed, Indoor

Manufacturer Declared Temperature Range 0°C to 40°C

Antenna Type External Antenna (SMA Connectors)

Antenna Model N/A

Antenna gain N/A

Input and Output ports Impedance 50 Ohms

Gain

Frequency	Max System Gain
< 1 GHz	95 dB
>1 GHz	100 dB

Maximum Antenna System (Antenna + Cable) Gain.

Port	Max System (Antenna & Cable) Gain
Server Port	15.04
Donnor Port	17.6

Note: *Maximum System Gain was calculated to comply with MPE for Simultaneous Transmission.

1.3.3 Transmit Frequency Table

Mode	Channel Bandwidth	Tx Frequency (MHz)	Emission Designator	Conducted Power	
				Max. Power Avg (dBm)	Max. Power Avg (W)
LTE Band 2 Downlink	5	1932.5 – 1987.5	4M63F9W	9.83	0.009616123
	10	1935 – 1985	8M96F9W	12.46	0.01761976
	15	1937 – 1982.5	13M4F9W	14.46	0.027925438
	20	1940 – 1980	17M9F9W	15.87	0.038636698
LTE Band 2 Uplink	5	1852.5 – 1907.5	4M47F9W	21.79	0.151008015
	10	1855 – 1905	8M98F9W	21.86	0.153461698
	15	1857.5 – 1902.5	13M4F9W	21.72	0.148593564
	20	1860 - 1900	17M9F9W	21.62	0.145211162
LTE Band 4 Downlink	5	2110 - 2155	4M72F9W	9.95	0.009885531
	10	2110 - 2155	9M31F9W	12.57	0.018071741
	15	2110 - 2155	13M6F9W	14.45	0.027861212
	20	2110 - 2155	18M4F9W	15.59	0.0362243
LTE Band 4 Uplink	5	1710 - 1755	4M64F9W	22.08	0.161435856
	10	1710 - 1755	9M26F9W	22.2	0.165958691
	15	1710 - 1755	13M6F9W	22.32	0.170608239
	20	1710 - 1755	18M4F9W	22.09	0.161808004
LTE Band 5 Downlink	5	871.4 – 891.6	4M73F9W	9.92	0.009817479
	10	871.4 – 891.6	9M24F9W	12.1	0.016218101
LTE Band 5 Uplink	5	826.4 – 846.6	4M73F9W	19.66	0.092469817
	10	826.4 – 846.6	9M24F9W	19.57	0.09057326
LTE Band 12 Downlink	5	729 - 746	4M73F9W	9.73	0.009397233
	10	729 - 746	9M24F9W	12.7	0.018620871
LTE Band 12 Uplink	5	699 - 716	4M64F9W	19.56	0.090364947
	10	699 - 716	9M25F9W	19.81	0.095719407
LTE Band 13 Downlink	5	746 - 756	4M62F9W	9.95	0.009885531
	10	746 - 756	9M20F9W	11.41	0.013835664
LTE Band 13 Uplink	5	777 - 787	4M72F9W	19.78	0.095060479

	10	777 - 787	9M17F9W	19.49	0.088920112
LTE Band 14 Downlink	10 MHz	758 - 768	8M86F9W	12.27	0.0168655303
LTE Band 14 Uplink	10 MHz	788 - 798	8M85F9W	21.08	0.1282330583
LTE Band 25 Downlink	5	1932.5 – 1992.5	4M63F9W	9.68	0.009289664
	10	1935 – 1990	8M96F9W	12.31	0.017021585
	15	1937.5 – 1987.5	13M4F9W	13.6	0.022908677
	20	1940 – 1985	17M9F9W	13.89	0.024490632
LTE Band 25 Uplink	5	1852.5 – 1912.5	4M47F9W	20.84	0.121338885
	10	1855 – 1910	8M98F9W	20.79	0.11994993
	15	1857.5 – 1907.5	13M4F9W	20.95	0.124451461
	20	1860 – 1905	17M9F9W	21.6	0.144543977

NOTE: CONDUCTED POWER MEASUREMENTS FOR BAND 2, 4, 5, AND 25 ARE FROM 72189913G NEXTIVITY G41-CE FCC PART 20 RSS-131 B2, 4, 5, 25 TEST REPORT

1.4 EUT TEST CONFIGURATION

1.4.1 Test Configuration Description

Test Configuration	Description
A	Downlink. Input signal is applied to the antenna port of Donor (NU). Output is monitored from the antenna port of Server (CU).
B	Uplink. Input signal is applied to the antenna port of Server (CU). Output is monitored from the antenna port of Donor (NU).
C	Radiated test setup. Downlink. Input signal is applied to the antenna port of Donor (NU). The antenna port of Server (CU) is terminated with a 50Ω load or Signal Generator.
D	Radiated test setup. Uplink. Input signal is applied to the antenna port of Server (CU). The antenna port of Donor (NU) is terminated with a 50Ω load or Signal Generator.
E	Radiated test setup The EUT is in "Burn in Mode". All antennas transmitting at the same time as worst case The antenna ports are terminated with a 50Ω load or Singal Generator.

1.4.2 EUT Exercise Software


Manufacturer Provided a Nextivity Chart Interface v2.0.0.16

1.4.3 Support Equipment and I/O cables

Manufacturer	Equipment/Cable	Description
Lenovo	Support Laptop	M/N: 20AR-S4250S, S/N: PC-03DGHKK 125/02
Lenovo	Support Laptop AC Adapter	M/N: ADLX90NLC2A S/N: 11S45N0247Z1ZS9B6926Z5
Dell	Support Laptop	M/N: Latitude D630 PP18L S/N: 5SBJBG1
Dell	Support Laptop AC Adapter	M/N: PA-1900-02D S/N: 5SBJBG1
Nextivity	Support USB cable x 1	Custom 1.0 meter shielded USB Type A to Micro B cable
SIMSUKIAN	AC/DC Adapter	M/N: SK03T1-1200250V S/N: 22080308000658 IP: 100-240VAC 50/60Hz 0.6A; OP: 12VDC 2.5A 30.0W
Rohde & Schwarz	Vector Signal Generator	M/N: SMBV100A, S/N: 259021
Agilent	ESG Vectot Signal Generator	S/N: MY47271206 M/N:E4438C
Aeroflex	Signal Generator	M/N: 3005, S/N: 3005A/09L


1.4.4 Simplified Test Configuration Diagram


Downlink (CU Tx) Conducted Test

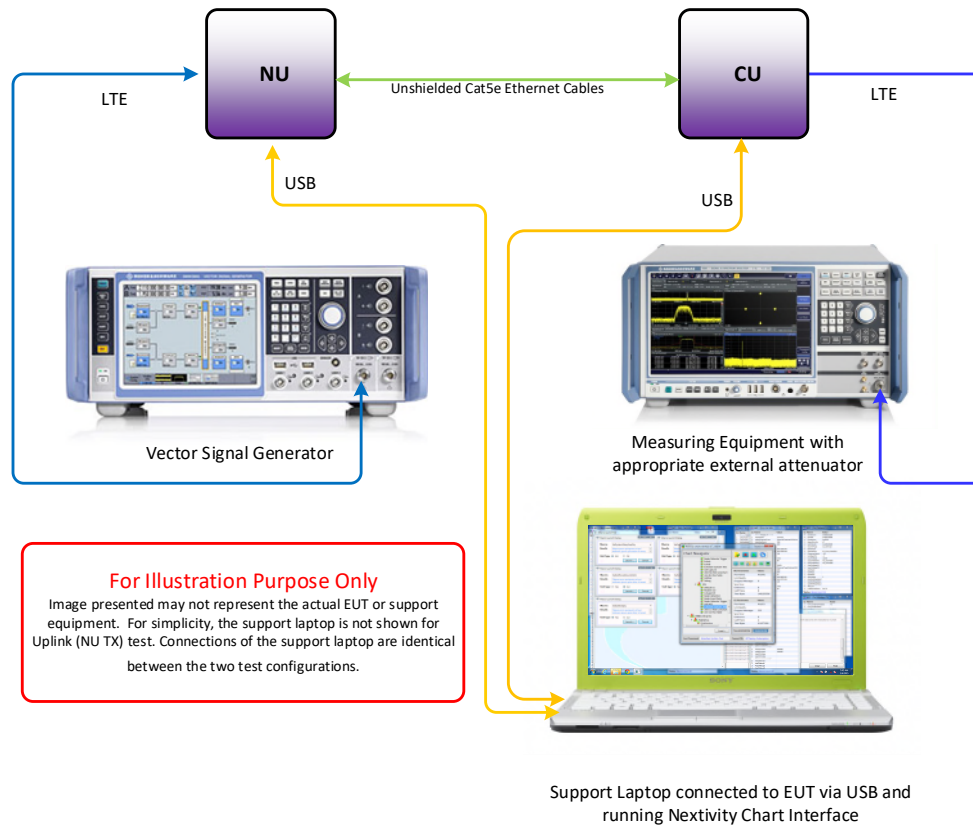

Uplink (NU Tx) Conducted Test

Monitoring the output can be done simultaneously (2 SA) or single output

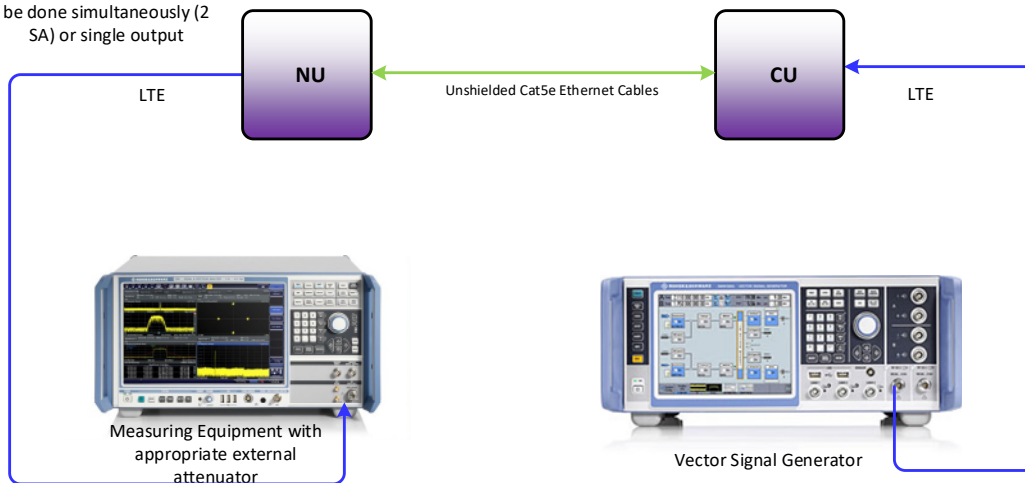

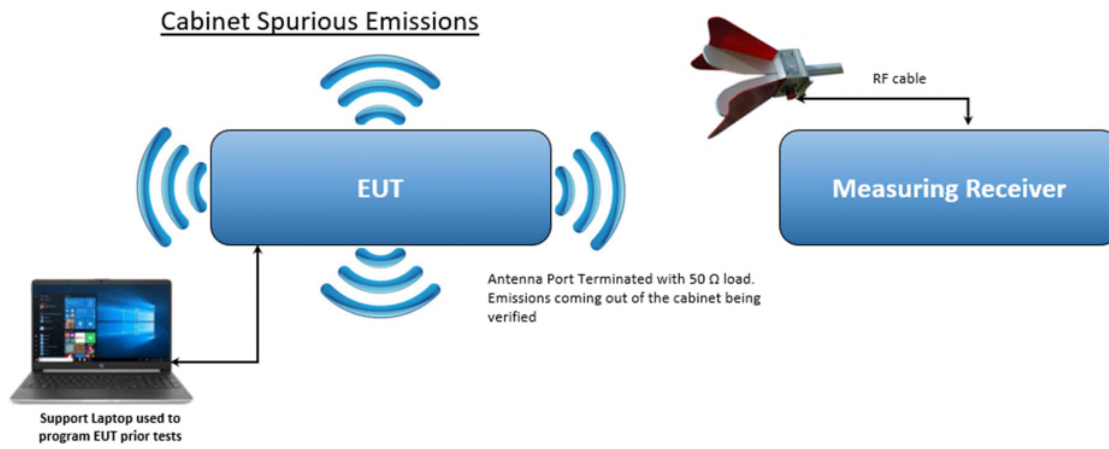



1.5 DEVIATIONS FROM THE STANDARD

No deviations from the applicable test standards or test plan were made during testing.

1.6 MODIFICATION RECORD

Description of Modification	Modification Fitted By	Date Modification Fitted
Serial Number: 864402002419.	-	-

The table above details modifications made to the EUT during the test program. The modifications incorporated during each test (if relevant) are recorded on the appropriate test pages.

1.7 TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.26 2015, American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

For conducted (if applicable) and radiated emissions the equipment under test (EUT) was configured to measure its highest possible emission level. This level was based on the maximized cable configuration from exploratory testing per ANSI C63.26-2015. The test modes were adapted according to the Operating Instructions provided by the manufacturer/client.

1.8 TEST FACILITY LOCATION

1.8.1 TÜV SÜD America Inc. (Mira Mesa)

10040 Mesa Rim Road, San Diego, CA 92121-2912 (32.901268,-117.177681). Phone: (858) 678 1400 Fax: (858) 546 0364.

1.8.2 TÜV SÜD America Inc. (Rancho Bernardo)

16936 Via Del Campo, San Diego, CA 92127-1708 (33.018644,-117.092409). Phone: (858) 678 1400 Fax: (858) 546 0364.

1.9 TEST FACILITY REGISTRATION

1.9.1 FCC – Designation No.: US1146

TÜV SÜD America Inc. (San Diego), is an accredited test facility with the site description report on file and has met all the requirements specified in §2.948 of the FCC rules. The acceptance letter from the FCC is maintained in our files and the Designation is US1146.



1.9.2 Innovation, Science and Economic Development Canada (IC) Registration No.: 3067A-1 & 22806-1

The 10m Semi-anechoic chamber of TUV SUD America Inc. (San Diego Rancho Bernardo) has been registered by Certification and Engineering Bureau of Innovation, Science and Economic Development Canada for radio equipment testing with Registration No. 3067A-1.

The 3m Semi-anechoic chamber of TUV SUD America Inc. (San Diego Mira Mesa) has been registered by Certification and Engineering Bureau of Innovation, Science and Economic Development Canada for radio equipment testing with Registration No. 22806-1.

1.9.3 BSMI – Laboratory Code: SL2-IN-E-028R (US0102)

TUV Product Service Inc. (San Diego) is a recognized EMC testing laboratory by the BSMI under the MRA (Mutual Recognition Arrangement) with the United States. Accreditation includes CNS 13438 up to 6GHz.

1.9.4 NCC (National Communications Commission - US0102)

TUV SUD America Inc. (San Diego) is listed as a Foreign Recognized Telecommunication Equipment Testing Laboratory and is accredited to ISO/IEC 17025 (A2LA Certificate No.2955.13) which under APEC TEL MRA Phase 1 was designated as a Conformity Assessment Body competent to perform testing of equipment subject to the Technical Regulations covered under its scope of accreditation including RTTE01, PLMN01 and PLMN08 for TTE type of testing and LP002 for Low-Power RF Device type of testing.

1.9.5 VCCI – Registration No. A-0412 and A-0413

TUV SUD America Inc. (San Diego) is a VCCI registered measurement facility which includes radiated field strength measurement, radiated field strength measurement above 1GHz, mains port interference measurement and telecommunication port interference measurement.

1.9.6 RRA – Identification No. US0102

TUV SUD America Inc. (San Diego) is National Radio Research Agency (RRA) recognized laboratory under Phase I of the APEC Tel MRA.

1.9.7 OFCA – U.S. Identification No. US0102

TUV SUD America Inc. (San Diego) is recognized by Office of the Communications Authority (OFCA) under Appendix B, Phase I of the APEC Tel MRA.



SECTION 2

TEST DETAILS

Radio Test of the
Nextivity Inc.
Cel-Fi G43 Industrial Signal Booster



2.1 TRANSMITTER CONDUCTED OUTPUT POWER

2.1.1 Specification Reference

FCC 47 CFR Part 2, Clause 2.1046
RSS-119, Clause 10.2

2.1.2 Standard Applicable

The conducted power measurements were made in accordance to FCC Part 2 Clause 2.1046:
(a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in §2.1033(c)(8). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

(c) For measurements conducted pursuant to paragraphs (a) and (b) of this section, all calculations and methods used by the applicant for determining carrier power or peak envelope power, as appropriate, on the basis of measured power in the radio frequency load attached to the transmitter output terminals shall be shown. Under the test conditions specified, no components of the emission spectrum shall exceed the limits specified in the applicable rule parts as necessary for meeting occupied bandwidth or emission limitations.

RSS-131, 10.2: The output power of the zone enhancer shall comply with the transmitter output power of the equipment with which it is to be used and shall be within ± 1.0 dB of the manufacturer's rated output power listed in zone enhancer equipment specifications.

2.1.3 Equipment Under Test and Modification State

Serial No: 560311000026/ Test Configuration A and B

2.1.4 Date of Test/Initial of Test Personnel who Performed the Test

September 14, 2023 / MARG

2.1.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.1.6 Environmental Conditions/ Test Location

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility

Ambient Temperature	26.3°C
Relative Humidity	48.6%
ATM Pressure	99.7kPa

2.1.7 Additional Observations


- This is a conducted test using power meter.
- The path loss was measured and entered as a level offset.
- Both Peak and Average measurements presented.
- LTE Band 14 only supports 10 MHz bandwidth..

2.1.8 Test Results


LTE Band 14 Downlink						
Bandwidth (MHz)	Channel	Frequency (MHz)	Average Power (dBm)	PK Power (dBm)	Limit According to Manufacturer (dBm)	RSS-131 Limit (dB)
10	-	-	-	-		
	5330	763.0	12.27	24.41	13	± 1 Manufacturer declared
	-	-	-	-		

LTE Band 14 Uplink						
Bandwidth (MHz)	Channel	Frequency (MHz)	Average Power (dBm)	PK Power (dBm)	Limit According to Manufacturer (dBm)	RSS-131 Limit (dB)
10	-	-	-	-		
	23330	793.0	21.08	30.46	22	± 1 Manufacturer declared
	-	-	-	-		

2.1.9 Sample Test Plot

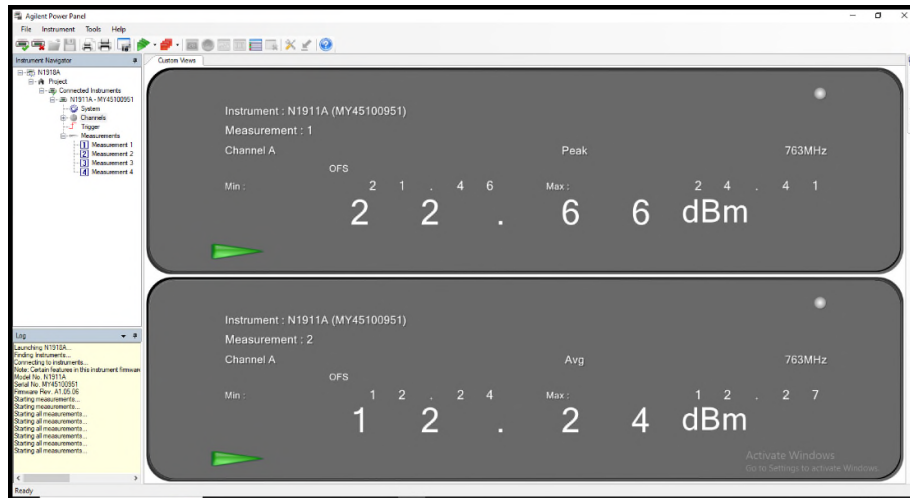

LTE Band 14 DL 10 MHz Bandwidth Middle Channel

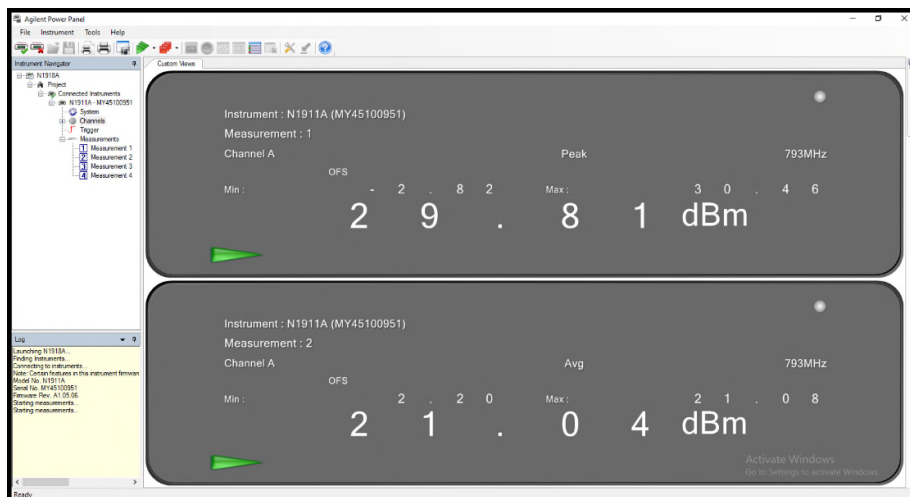

LTE Band 14 UL 10 MHz Bandwidth Middle Channel



2.2 EFFECTIVE RADIATED POWER

2.2.1 Specification Reference

FCC 47 CFR Part 90, Clause 90.219(d)(3)(i),

2.2.2 Standard Applicable

FCC 47 CFR Part 90, Clause 90.219:

Except as set forth in paragraph (d)(3)(ii) of this section, signal boosters must be deployed such that the radiated power of each retransmitted channel, on the forward link and on the reverse link, does not exceed 5 Watts effective radiated power (ERP)

2.2.3 Equipment Under Test and Modification State

Serial No: 560311000026

2.2.4 Date of Test/Initial of Test Personnel who Performed the Test

September 14, 2023 / MARG

2.2.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.2.6 Environmental Conditions/ Test Location

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility

Ambient Temperature	26.3°C
Relative Humidity	48.6%
ATM Pressure	99.7kPa

2.2.7 Additional Observations

- ERP and EIRP were calculated as per Section 1.2 and 1.3 of KDB412172 D01 (Determining ERP and EIRP v01).
- Calculation formula in logarithmic terms:

$$\text{ERP or EIRP} = P_T + G_T - L_C$$

Where:

P_T = transmitter output power, expressed in dBm (Section 2.1 of this test report)

G_T = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

$G_T(\text{dBd}) = G_T(\text{dBi}) - 2.15 \text{ dB}$

L_C = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

2.2.8 Sample Computation

$$\begin{aligned} \text{ERP} &= P_T + G_T - L_C - 2.15\text{dB} \\ &= 29.87 \text{ (Peak)} + 0.13 \text{ (max. gain)} - 3.84 \text{ (cable loss)} - 2.15 \\ &= 24.01 \text{ dBm} \end{aligned}$$

2.2.9 Test Results

LTE Band 14 Downlink					
Bandwidth (MHz)	Frequency (MHz)	Max Power Average (dBm)	Max System Gain (dBi)*	ERP (dBm)	Limit (dBm)
10	-	-	-	-	-
	763.0	12.27	17.52	29.79	36.99
	-	-	-	-	-

Note: *Maximum System Gain was used to comply with MPE when simultaneous transmission.

LTE Band 14 Uplink					
Bandwidth (MHz)	Frequency (MHz)	Max Power Average (dBm)	Max System Gain (dBi)*	ERP (dBm)	Limit (dBm)
10	-	-	-	-	-
	793.0	21.08	8.05	29.11	36.99
	-	-	-	-	-

Note: *Maximum System Gain was used to comply with MPE when simultaneous transmission.



2.3 OCCUPIED BANDWIDTH

2.3.1 Specification Reference

FCC 47 CFR Part 2, Clause 2.1049
RSS-GEN Issue 5, Clause 6.7

2.3.2 Standard Applicable

FCC Part 2.1049, RSS-GEN 6.7

The transmitted signal bandwidth shall be reported as the 99% emission bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

Using the occupied bandwidth measurement function in the spectrum analyzer, the 99% occupied bandwidth was measured.

2.3.3 Equipment Under Test and Modification State

Serial No: 560311000026 / Test Configuration A and B

2.3.4 Date of Test/Initial of test personnel who performed the test

September 14, 18, 2023 / MARG

2.3.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.3.6 Environmental Conditions/ Test Location

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility

Ambient Temperature	21.0 – 24.8°C
Relative Humidity	30.9 – 51.8%
ATM Pressure	98.6 – 99.3kPa

2.3.7 Additional Observations

- This is a conducted test.
- Using the occupied bandwidth measurement function in the spectrum analyzer, the 99% occupied bandwidth was measured.
- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.
- The RBW is set to 1% of the OBW while the VBW is $\geq 3X$ RBW.
- The detector is peak and the trace mode is max hold.
- LTE Band 14 only supports 10 MHz bandwidth..


2.3.8 Test Results and Sample Test Plot

LTE Band 14 Downlink				
Bandwidth (MHz)	Channel	Frequency (MHz)	OBW (MHz)	-26dB BW (MHz)
10	-	-	-	-
	5330	763.0	8.92	9.46
	-	-	-	-

LTE Band 14 Uplink				
Bandwidth (MHz)	Channel	Frequency (MHz)	OBW (MHz)	-26dB BW (MHz)
10	-	-	-	-
	23330	793.0	8.89	9.42
	-	-	-	-




LTE Band 14 Downlink (10 MHz BW) / Middle Channel 763 MHz / 99%OBW

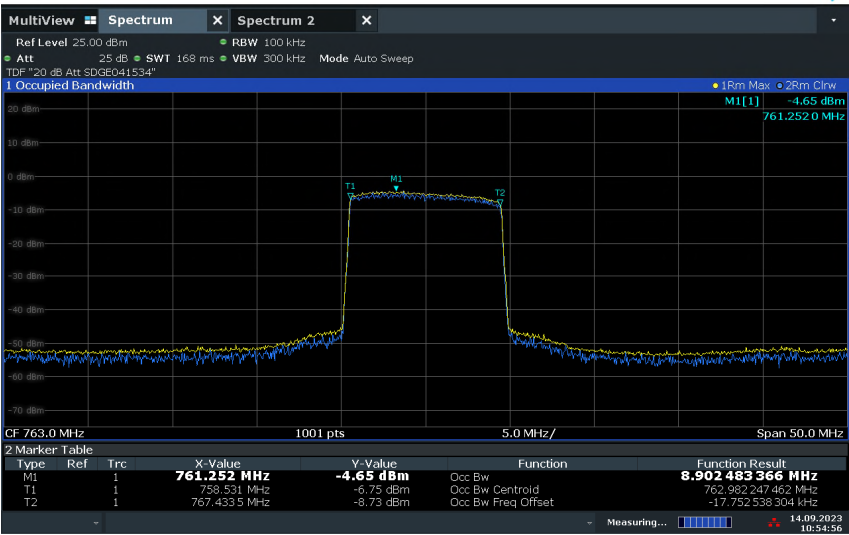

10:54:56 14.09.2023

LTE Band 14 Downlink (10 MHz BW) / Middle Channel 763 MHz / 26dB BW

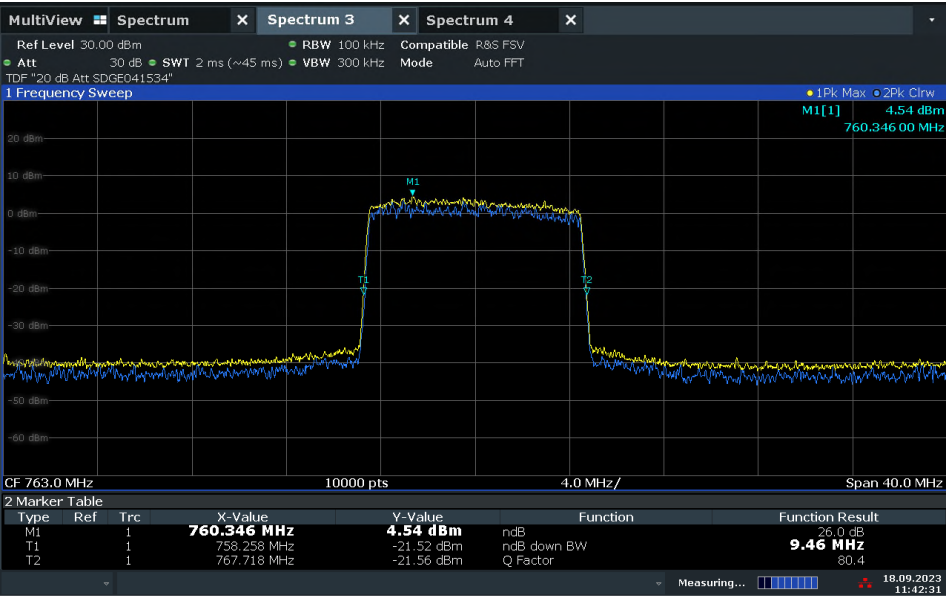

11:42:32 18.09.2023

LTE Band 14 Uplink (10 MHz BW) / Middle Channel 793 MHz / 99%OBW**LTE Band 14 Uplink (10 MHz BW) / Middle Channel 793 MHz / 26dB BW**



2.4 PEAK-AVERAGE RATIO

2.4.1 Specification Reference

RSS-140 Issue 1, Clause 4.3

2.4.2 Standard Applicable

RSS-140 clause 4.3

The peak-to-average power ratio (PAPR) of the transmitter shall not exceed 13 dB for more than 0.1% of the time and shall use a signal corresponding to the highest PAPR during periods of continuous transmission.

2.4.3 Equipment Under Test and Modification State

Serial No: 560311000026 / Test Configuration A and B

2.4.4 Date of Test/Initial of Test Personnel who Performed the Test

September 14, 2023 / MARG

2.4.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.4.6 Environmental Conditions/ Test Location

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility

Ambient Temperature	20.9°C
Relative Humidity	23.2%
ATM Pressure	98.6kPa

2.4.7 Additional Observations

- This is a conducted test.
- Measurement was done using the Spectrum Analyzer's Complementary Cumulative Distribution Function (CCDF) measurement profile. The built-in function is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth (crest factor or peak-to-average ratio). A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth.
- RBW was set to maximum the SA can support.
- There are no measured PAR levels greater than 13dB.


2.4.8 Test Results

LTE Band 14 Downlink			
Bandwidth (MHz)	Channels	Frequency (MHz)	PAR (dB)
10 MHz	-	-	-
	5330	763.0	11.05
	-	-	-

LTE Band 14 Uplink			
Bandwidth (MHz)	Channels	Frequency (MHz)	PAR (dB)
10 MHz	-	-	-
	23330	793.0	9.18
	-	-	-



2.4.9 Sample Test Plot

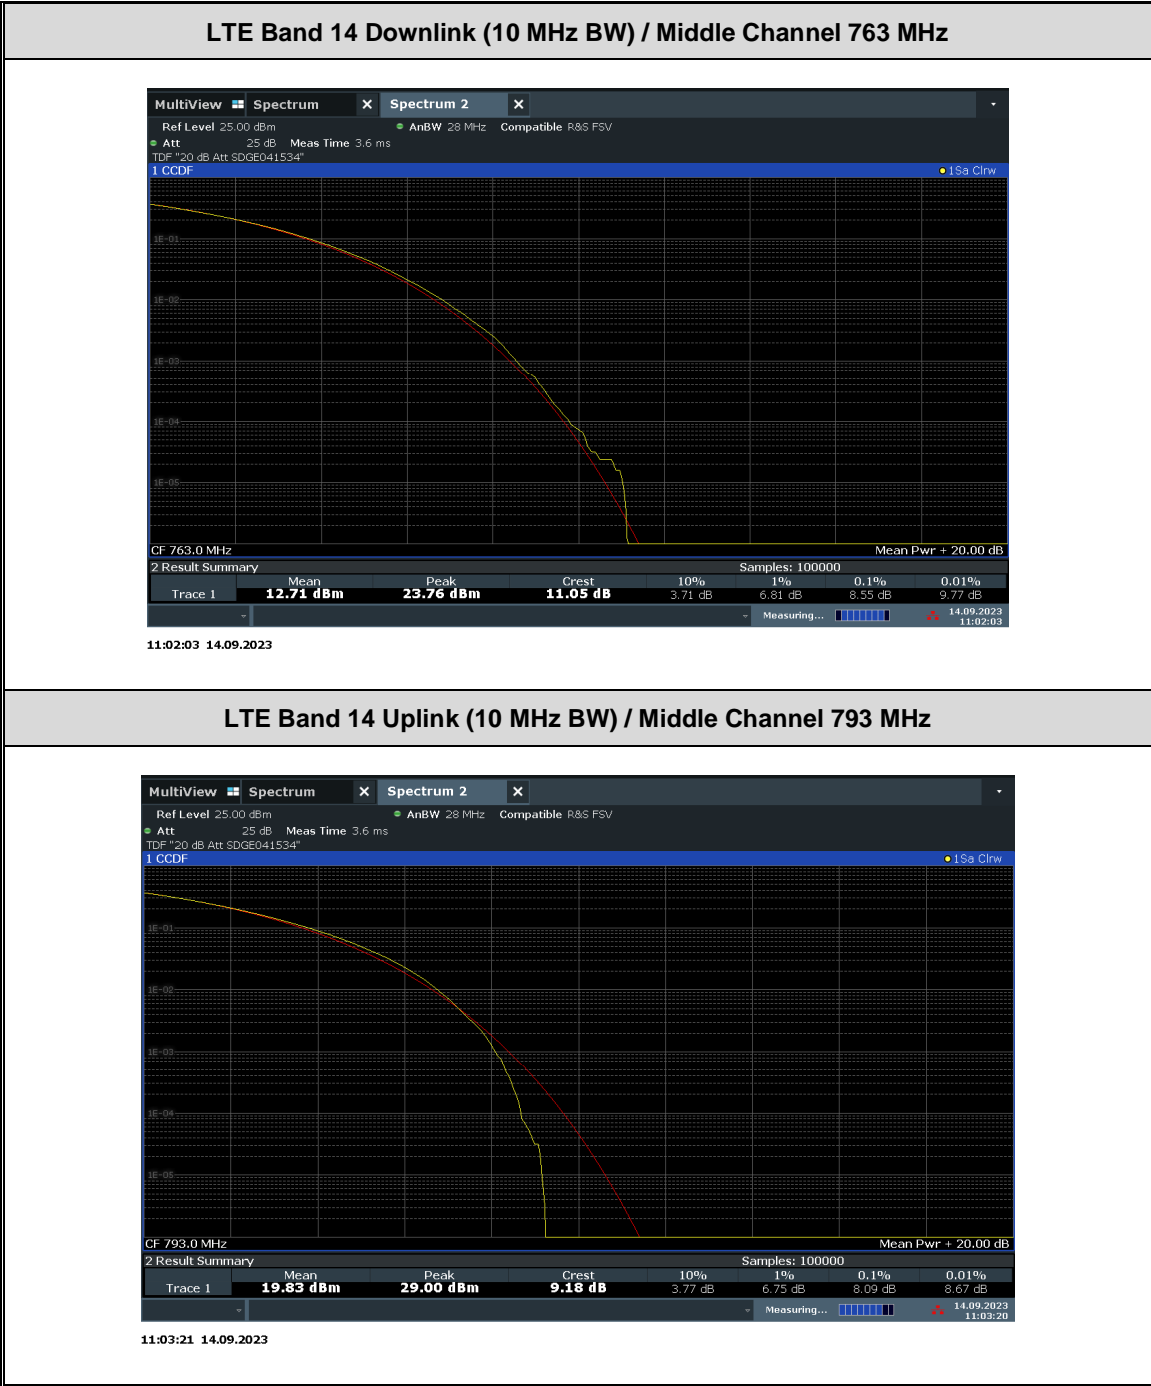



2.5 BAND EDGE

2.5.1 Specification Reference

FCC 47 CFR Part 2, Clause 2.1051
FCC 47 CFR Part 90.543 (e)(3)(5)
RSS-140, Clause 4.4
KDB971168 Clause 6.1

2.5.2 Standard Applicable

FCC 47 CFR Part 90, Clause 90.543:

(e) For operations in the 758–768 MHz and the 788–798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(3) On any frequency between 775–788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log (P)$ dB.

(5) Compliance with the provisions of paragraph (e)(3) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of 30 kHz may be employed.

RSS-140:

4.4 Transmitter unwanted emissions limits

The power of any unwanted emission outside the bands 758-768 MHz and 788-798 MHz shall be attenuated below the transmitter output power P in dBW as follows, where p is the transmitter output power in watts:

a. For any frequency between 769-775 MHz and 799-806 MHz:

- i $76 + 10 \log (p)$, dB in a 6.25 kHz band for fixed and base station equipment
- ii $65 + 10 \log (p)$, dB in a 6.25 kHz band for mobile and portable/hand-held equipment

b For any frequency between 775-788 MHz, above 806 MHz, and below 758 MHz: $43 + 10 \log (p)$, dB in a bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency bands 758-768 MHz and 788-798 MHz, a resolution bandwidth of 30 kHz may be employed.

2.5.3 Equipment Under Test and Modification State

Serial No: 560311000026 / Test Configuration A and B

2.5.4 Date of Test/Initial of Test Personnel who Performed the Test

September 14, 2023 / MARG

2.5.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.



2.5.6 Environmental Conditions/ Test Location


Test performed at TÜV SÜD America Inc. Rancho Bernardo facility

Ambient Temperature	20.9°C
Relative Humidity	25.2%
ATM Pressure	99.7kPa


2.5.7 Additional Observations

- This is a conducted test. Test guidance is per Section 6.1 of KDB971168 (D01 Power Meas License Digital Systems v03r01).
- The path loss was measured and entered as a Transducer Factor
- For LTE Band 14, RBW was set to 30 kHz and the limit for emissions 100 kHz outside of the low frequency edge and the high frequency edge of each frequency block range(s) was set to:


$$\text{Limit} = -13\text{dBm} + 10\lg(30/100) = -18.23 \text{ dBm}$$

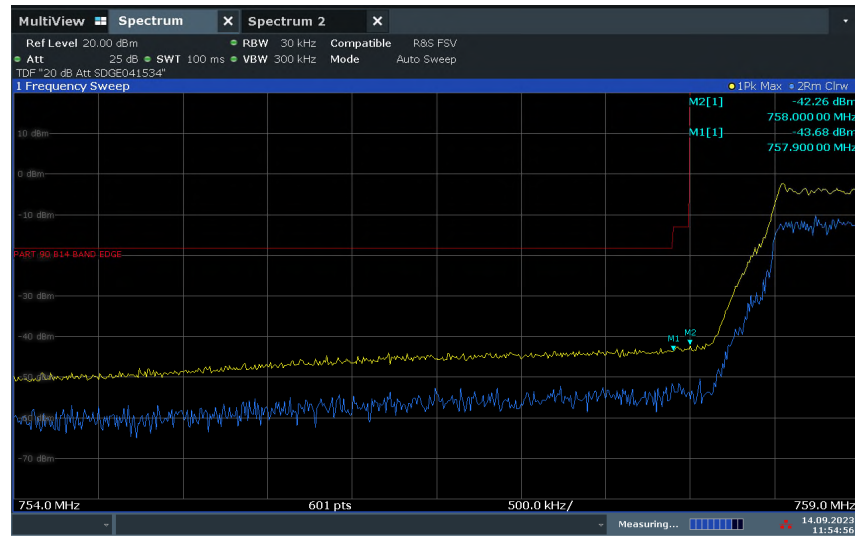2.5.8 Test Results**LTE Band 14 Downlink 10MHz Bandwidth Middle Channel Low Band Edge**


11:54:56 14.09.2023

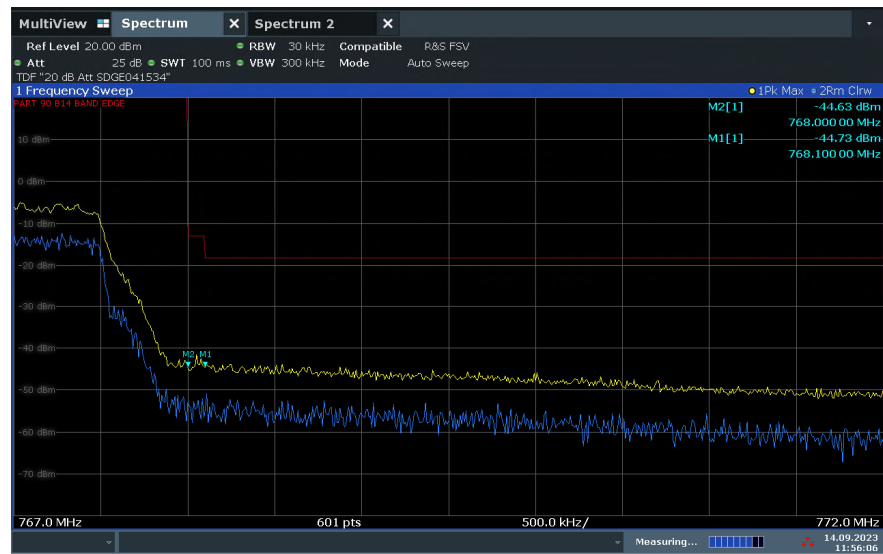LTE Band 14 Downlink 10MHz Bandwidth Middle Channel High Band Edge

11:56:06 14.09.2023

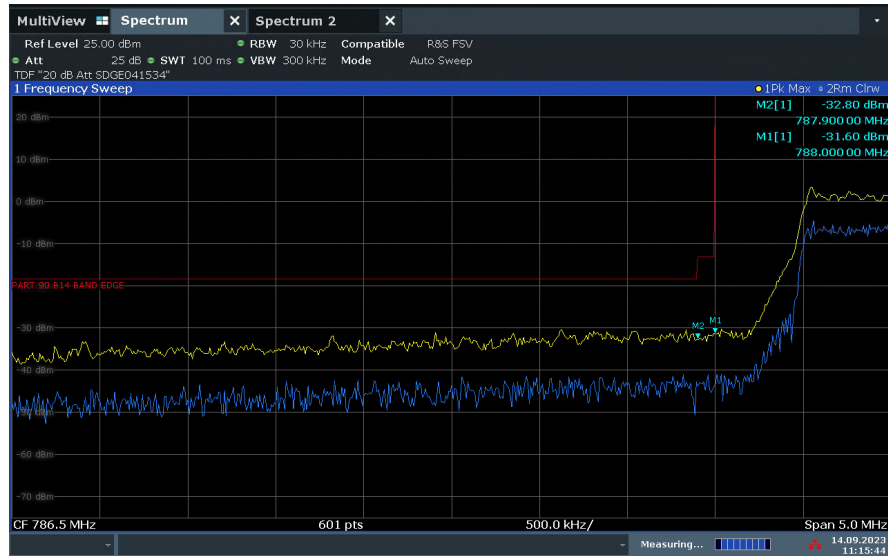LTE Band 14 Uplink 10MHz Bandwidth Middle Channel Low Band Edge

11:15:45 14.09.2023

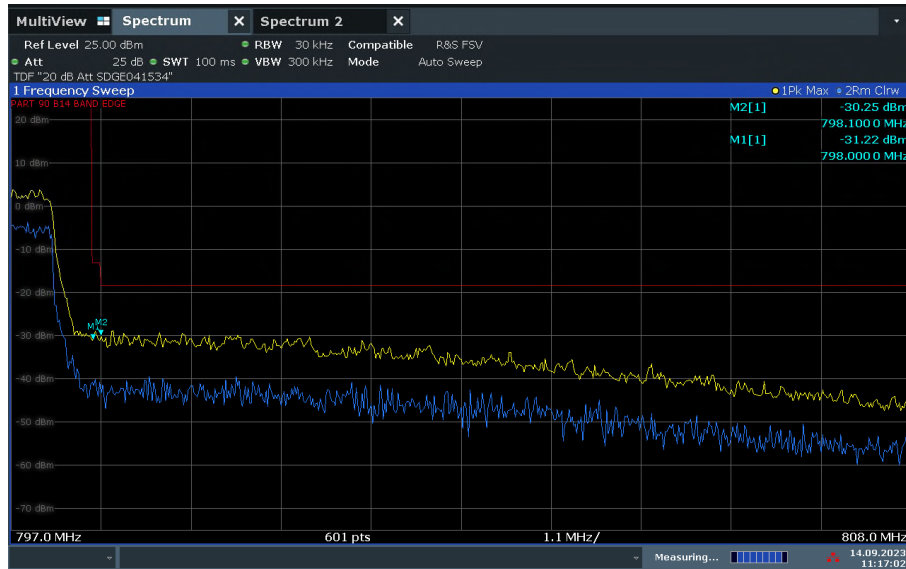LTE Band 14 Uplink 10MHz Bandwidth Middle Channel High Band Edge

11:17:03 14.09.2023



2.6 CONDUCTED SPURIOUS EMISSIONS

2.6.1 Specification Reference

FCC 47 CFR Part 2, Clause 2.1051
 FCC 47 CFR Part 90, Clause 90.219(e)(3)
 FCC 47 CFR Part 90, Clause 90.543(e)(2)(3)(4)(5)(f)
 RSS-140, Clause 4.4
 RSS-131, Clause 10.6
 KDB935210 D05, Clause 4.73

2.6.2 Standard Applicable

FCC 47 CFR Part 90, Clause 90.219(e)(3)
 Spurious emissions from a signal booster must not exceed -13 dBm within any 100 kHz measurement bandwidth.

FCC 47 CFR Part 90, Clause 90.543:

(e) For operations in the 758–768 MHz and the 788–798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(2) On all frequencies between 769–775 MHz and 799–805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.

(3) On any frequency between 775–788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log (P)$ dB.

(4) Compliance with the provisions of paragraphs (e)(1) and (2) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

(5) Compliance with the provisions of paragraph (e)(3) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of 30 kHz may be employed.

(f) For operations in the 758–775 MHz and 788–805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

RSS-140, Clause 4.4:

4.4 Transmitter unwanted emissions limits

The power of any unwanted emission outside the bands 758-768 MHz and 788-798 MHz shall be attenuated below the transmitter output power P in dBW as follows, where p is the transmitter output power in watts:

a. For any frequency between 769-775 MHz and 799-806 MHz:

- i $76 + 10 \log (p)$, dB in a 6.25 kHz band for fixed and base station equipment
- ii $65 + 10 \log (p)$, dB in a 6.25 kHz band for mobile and portable/hand-held equipment

b For any frequency between 775-788 MHz, above 806 MHz, and below 758 MHz: $43 + 10 \log (p)$, dB in a bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and



adjacent to the frequency bands 758-768 MHz and 788-798 MHz, a resolution bandwidth of 30 kHz may be employed.

In addition, the equivalent isotropically radiated power (e.i.r.p.) of all emissions, including harmonics in the band 1559-1610 MHz, shall not exceed -70 dBW/MHz for wideband emissions, and -80 dBW/kHz for discrete emissions of less than 700 Hz bandwidth.

RSS-131, Clause 10.6:

Zone enhancers shall meet the following requirements;

1. Minor departures from the exact reference frequencies of the input signals are permitted provided the retransmitted signals meet the frequency stability limit specified in RSS-119 for the equipment with which the zone enhancer is to be used.
2. The retransmitted signals shall meet the unwanted emissions limits in RSS-119 that applies to the equipment with which the zone enhancer is to be used,

2.6.3 Equipment Under Test and Modification State

Serial No: 560311000026 / Test Configuration A and B

2.6.4 Date of Test/Initial of Test Personnel who Performed the Test

September 14, 2023 / MARG

2.6.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.6.6 Environmental Conditions/ Test Location

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility


Ambient Temperature	20.9 – 24.9°C
Relative Humidity	23.2 – 50.2%
ATM Pressure	98.6 – 99.7kPa

2.6.7 Additional Observations


- This is a conducted test. Test guidance is per Section 4.7.3 of KDB935210 (Measurements Guidance for Industrial and Non-Consumer Signal Booster, Repeater, And Amplifier Devices D05 v01r04).
- The transducer factor (TDF) used is from the external attenuators and cables used.
- Detector is peak and trace is set to max hold as the worst case setting.
- The spectrum was searched from 9 kHz to up to the 10th harmonic
- All low, middle and high channels for all supporting bandwidths were verified and only middle channel presented in this test report as representative configuration.

2.6.8 Test Results

LTE Band 14 Downlink 10MHz Bandwidth Middle Channel Conducted Spurious Emissions

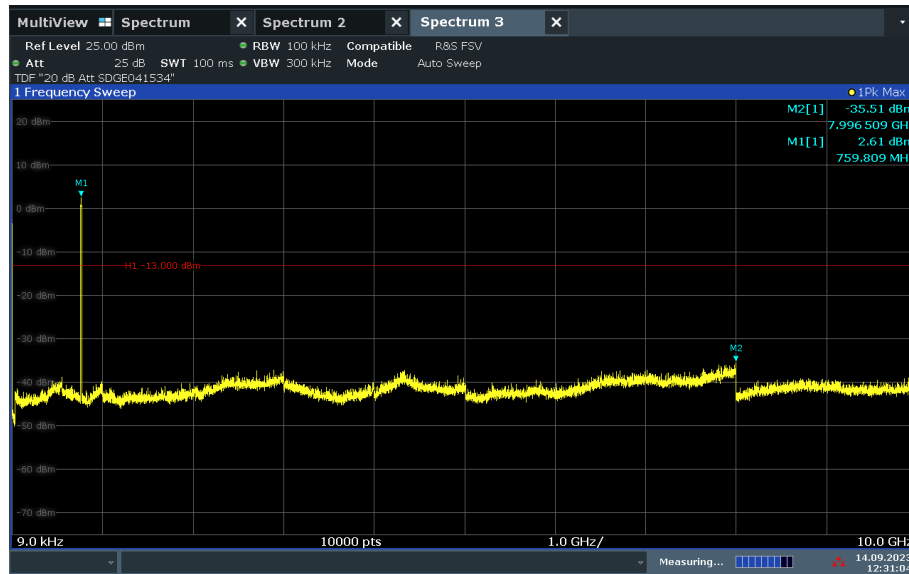


12:31:04 14.09.2023

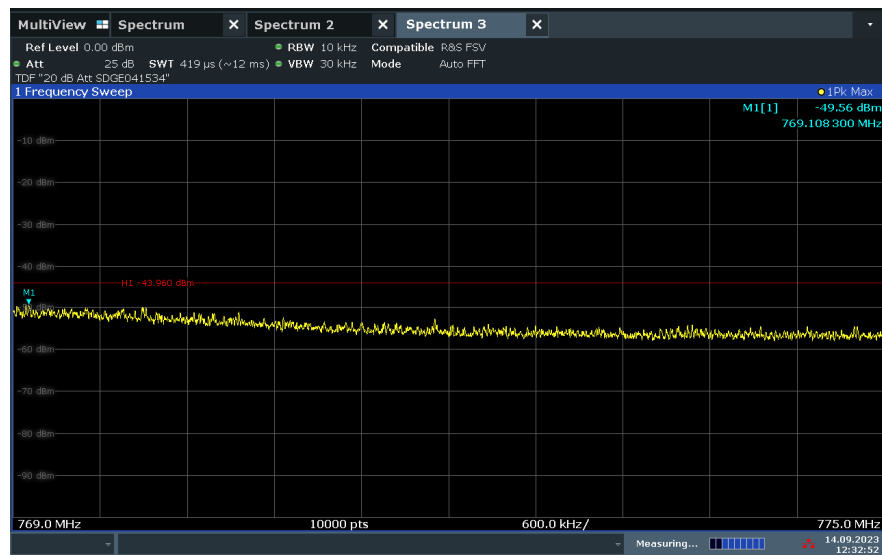
LTE Band 14 Downlink 10MHz Bandwidth Middle Channel Conducted Spurious Emissions
769 – 775 MHz


12:32:53 14.09.2023

$$\text{Limit} = -46 + 10\lg(10/6.25) = -43.96 \text{ dBm}$$

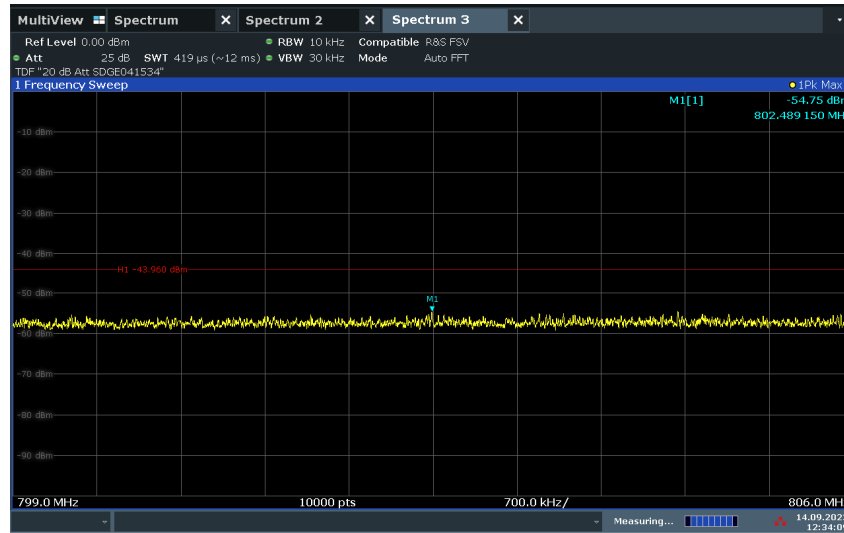
**LTE Band 14 Downlink 10MHz Bandwidth Middle Channel Conducted Spurious Emissions
799 – 806 MHz**

$$\text{Limit} = -46 + 10\lg(10/6.25) = -43.96 \text{ dBm}$$

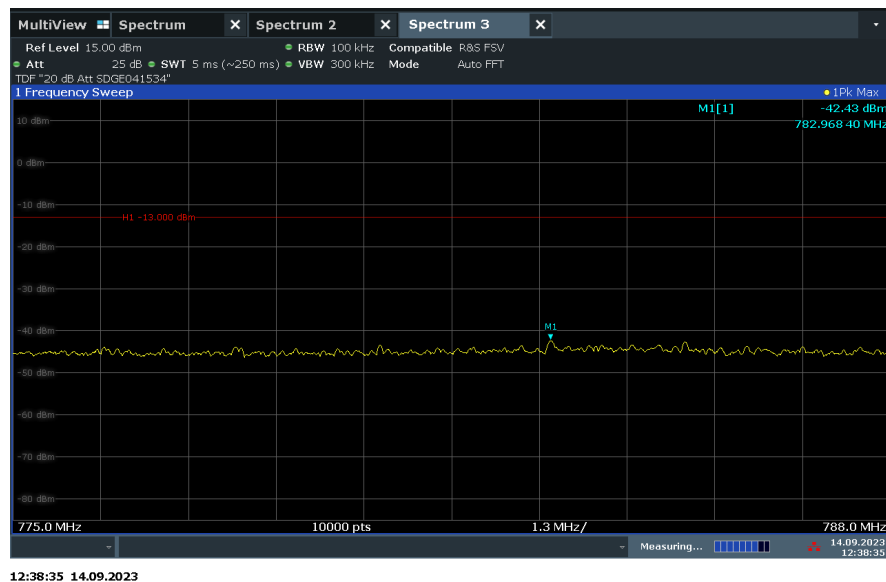**LTE Band 14 Downlink 10MHz Bandwidth Middle Channel Conducted Spurious Emissions
775 – 788 MHz**

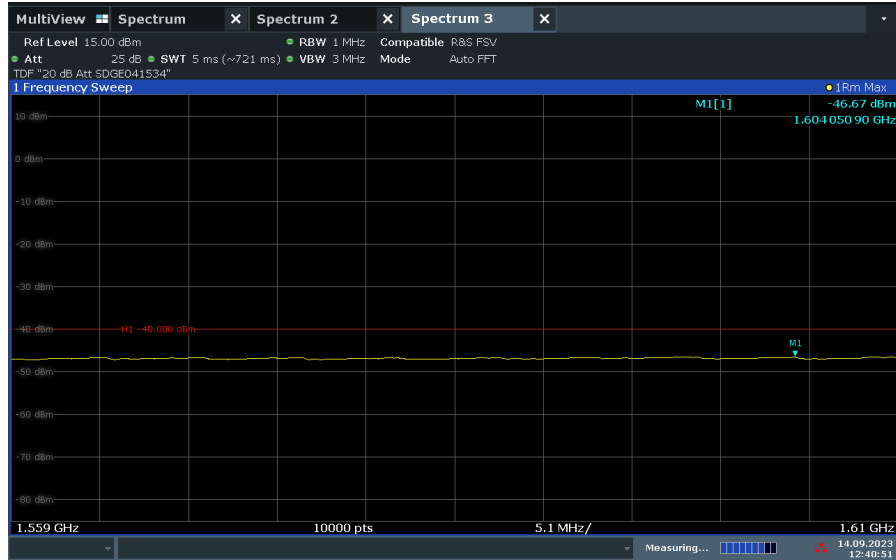
**LTE Band 14 Downlink 10MHz Bandwidth Middle Channel Conducted Spurious Emissions
1559 – 1610 MHz (EIRP)**

12:40:51 14.09.2023

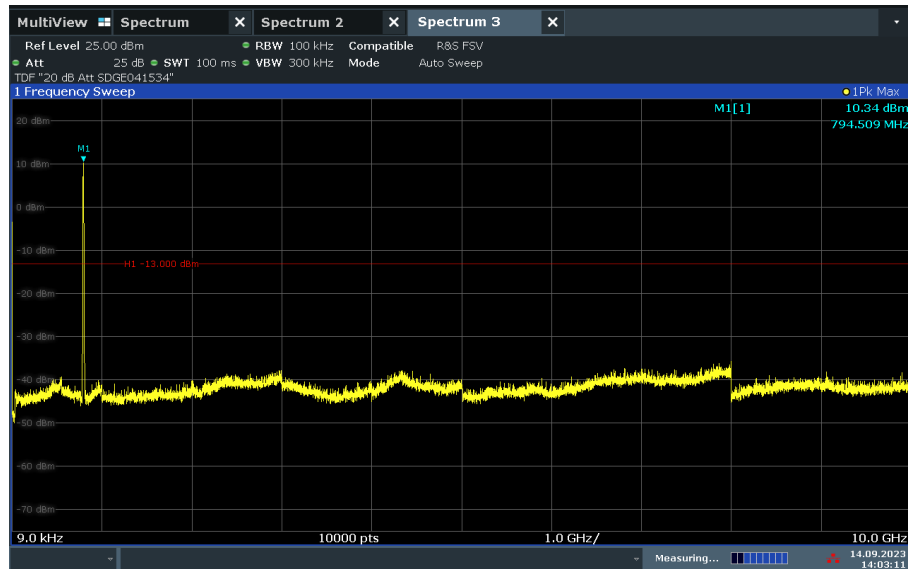LTE Band 14 Uplink 10MHz Bandwidth Middle Channel Conducted Spurious Emissions


14:03:12 14.09.2023

LTE Band 14 Uplink 10MHz Bandwidth Middle Channel Conducted Spurious Emissions 769 – 775 MHz

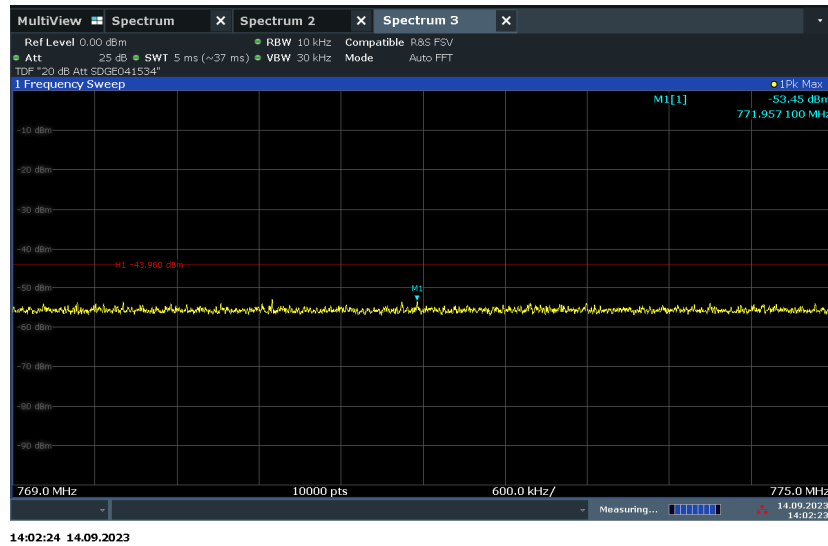


$$\text{Limit} = -46 + 10\lg(10/6.25) = -43.96 \text{ dBm}$$


LTE Band 14 Uplink 10MHz Bandwidth Middle Channel Conducted Spurious Emissions 799 – 806 MHz

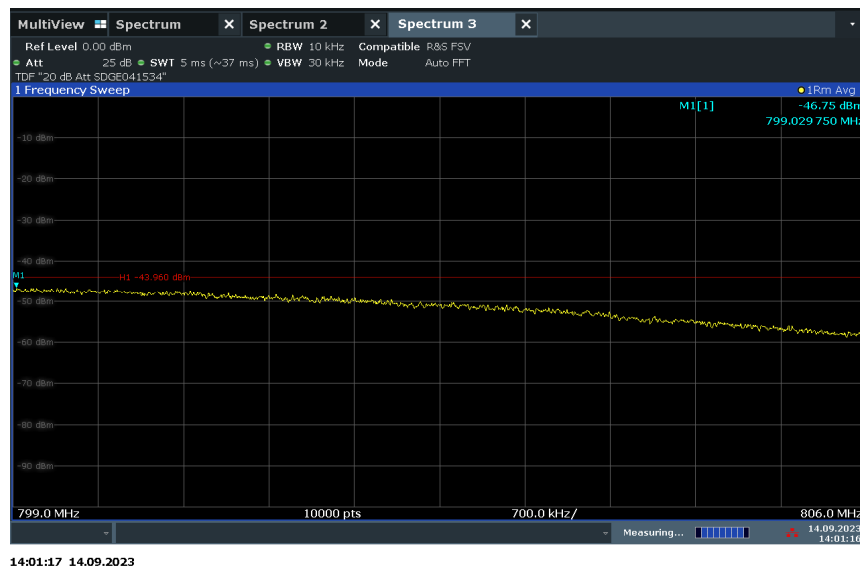

$$\text{Limit} = -46 + 10\lg(10/6.25) = -43.96 \text{ dBm}$$

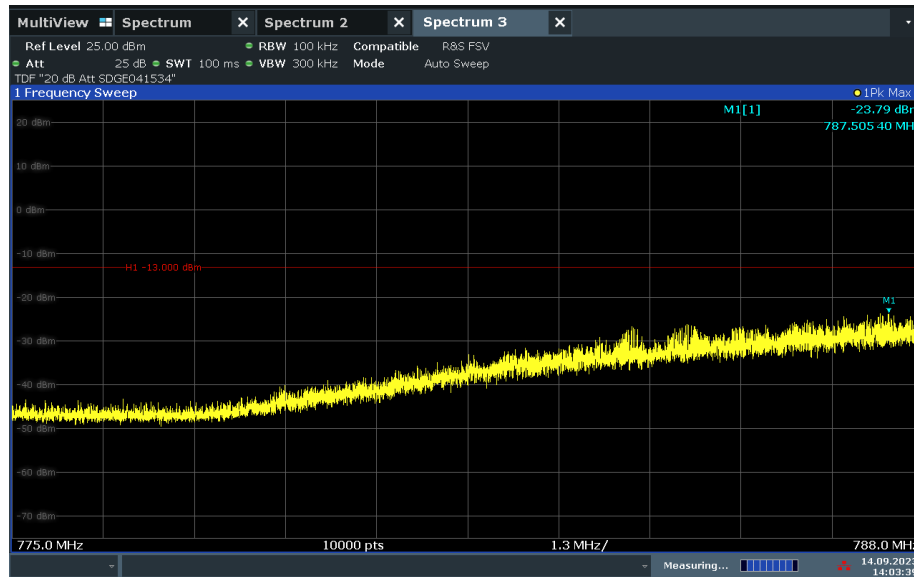**LTE Band 14 Uplink 10MHz Bandwidth Middle Channel Conducted Spurious Emissions
775 – 788 MHz**

14:03:40 14.09.2023

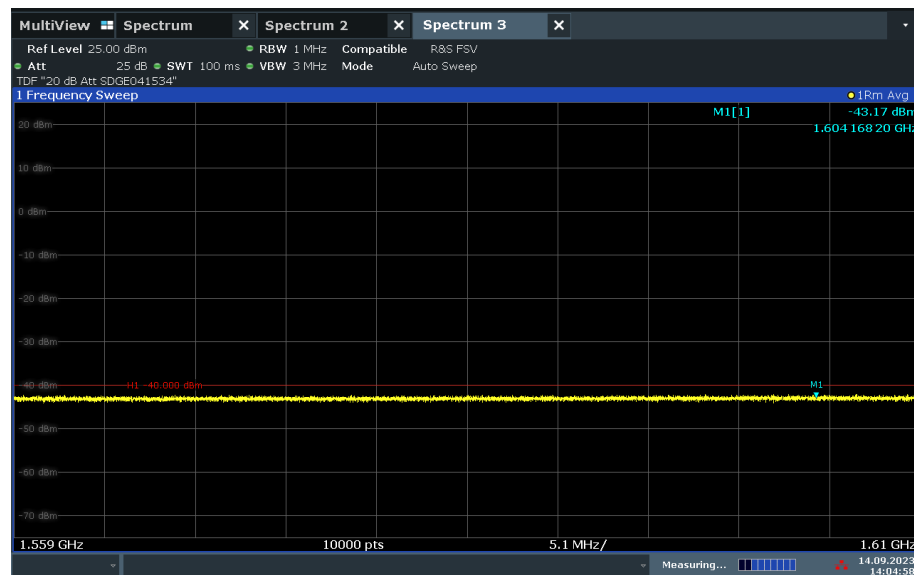**LTE Band 14 Uplink 10MHz Bandwidth Middle Channel Conducted Spurious Emissions
1559 – 1610 MHz (EIRP)**

14:04:58 14.09.2023

2.7 FREQUENCY STABILITY

2.7.1 Specification Reference

FCC 47 CFR Part 2, Clause 2.1055
 FCC 47 CFR Part 90, Clause 90.539(b)
 RSS-140, Clause 4.2
 KDB935210 D05, Clause 4.8.
 RSS-131, Clause 9.4
 RSS-119, Clause 5.9

2.7.2 Standard Applicable

FCC 47 CFR Part 2, Clause 2.1055:

(a) The frequency stability shall be measured with variation of ambient temperature as follows:

(1) From -30° to + 50° centigrade for all equipment except that specified in paragraphs (a) (2) and (3) of this section.

FCC 47 CFR Part 90, Clause 90.539(b):

Transmitters designed to operate in 769–775 MHz and 799–805 MHz frequency bands must meet the frequency stability requirements in this section.

(b) The frequency stability of base transmitters operating in the narrowband segment must be 100 parts per billion or better.

FCC 47 CFR Part 90, Clause 90.213:

(a) Unless noted elsewhere, transmitters used in the services governed by this part must have a minimum frequency stability as specified in the following table:

MINIMUM FREQUENCY STABILITY			
[Parts per million (ppm)]			
Frequency range (MHz)	Fixed and base stations	Mobile stations	
		Over 2 watts output power	2 watts or less output power
Below 25	^{1 2 3} 100	100	200
25–50	20	20	50
72–76	5	5	50
150–174	^{5 11} 5	⁶ 5	^{4 6} 50
216–220	1.0	1.0	1.0
220–222 ¹²	0.1	1.5	1.5
421–512	^{7 11 14} 2.5	⁸ 5	⁸ 5
806–809	¹⁴ 1.0	1.5	1.5
809–824	¹⁴ 1.5	2.5	2.5
851–854	1.0	1.5	1.5
854–869	1.5	2.5	2.5
896–901	¹⁴ 0.1	1.5	1.5
902–928	2.5	2.5	2.5
902–928 ¹³	2.5	2.5	2.5
929–930	1.5	1.5	1.5
935–940	0.1	1.5	1.5
1427–1435	⁹ 300	300	300
Above 2450 ¹⁰	300	300	300

RSS-140, Clause 4.2:

The frequency stability shall be sufficient to ensure that the occupied bandwidth stays within the operating frequency block when tested to the temperature and supply voltage variations specified in RSS-Gen.

RSS-119, Clause 5.9:

The frequency error of frequency difference shall not exceed the limits specified in Table 18

Table 18 – Transient Frequency Behaviour

Channel Bandwidth (kHz)	Time Intervals (Notes 1, 2)	Maximum Frequency Difference (kHz)	Transient Duration Limit (ms)	
			138-174 MHz	406.1-512 MHz
25	t ₁	±25	5	10
	t ₂	±12.5	20	25
	t ₃	±25	5	10
12.5	t ₁	±12.5	5	10
	t ₂	±6.25	20	25
	t ₃	±12.5	5	10
6.25	t ₁	±6.25	5	10
	t ₂	±3.125	20	25
	t ₃	±6.25	5	10

RSS-131, Clause 9.4:

Industrial zone enhancers shall comply with the frequency stability given in the RSS that applies to the equipment with which the zone enhancer is to be used. In cases where the frequency stability limit is not given in the applicable RSS, the equipment shall comply with a frequency stability of ± 1.5 ppm.

For zone enhancers with no input signal processing capability such as modulation, or if the zone enhancer does not incorporate an internal oscillator circuit component, the frequency stability measurement in this section is not required.

2.7.3 Equipment Under Test and Modification State

Serial No: 560311000026 / Test Configuration A and B

2.7.4 Date of Test/Initial of Test Personnel who Performed the Test

September 15, October 18, 2023/ MARG

2.7.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.7.6 Environmental Conditions/ Test Location

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility

Ambient Temperature	23.4 – 25.3°C
Relative Humidity	30.9 – 50.3%
ATM Pressure	98.6 – 99.0kPa

2.7.7 Additional Observations

- This is a conducted test.
- The EUT was operated at 120.0VAC nominal voltage and was placed in the temperature chamber for the series of evaluations performed.
- For LTE band 14, test performed in 10 MHz Bandwidth Middle channel as the representative configuration. Input Type "Tones" was selected and the EUT was injected a CW signal from a Signal Generator and maximum frequency error was monitored using the spectrum analyser.
- The Temperature was reduced to -30°C and allowed to sit for 1 hour to allow the equipment and chamber temperature to stabilize. The measurements on both downlink and uplink were then performed. The temperature was then increased by 10°C steps and allowed to settle before taking the next set of measurements. The EUT was tested over the temperature -30°C to +50°C.
- Voltage variation was also performed at 85% and 115% of the nominal voltage.

2.7.8 Test Results Summary

LTE B14 Downlink – 10 MHz BW Middle Channel				
Voltage (VDC)	Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
120	-30	0	0	-
	-20	0	0	-
	-10	0	0	-
	0	0	0	-
	+10	0	0	-
	+20	0	0	-
	+30	0	0	-
	+40	0	0	-
	+50	0	0	-
102	+20	0	0	-
138		0	0	-

LTE B14 Downlink Frequency Range					
Channel	Temperature (°C)	Voltage (VAC)	F _L (MHz)	F _H (MHz)	Limit (MHz)
Low Channel	-30	120	758.5432	-	>758
	+20	102	758.5403	-	
		120	758.5436	-	
		138	758.5383	-	
	+50	120	758.5400	-	
High Channel	-30	120	-	767.43527	<768
	+20	102	-	767.4341	
		120	-	767.4388	
		138	-	767.4321	
	+50	120	-	767.4284	


The frequency stability of the EUT is sufficient to keep it within the authorized frequency ranges at any temperature interval and voltage variations across the measured range.

LTE B14 Uplink – 10 MHz BW Middle Channel				
Voltage (VDC)	Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
120	-30	0	0	-
	-20	0	0	-
	-10	0	0	-
	0	0	0	-
	+10	0	0	-
	+20	0	0	-
	+30	0	0	-
	+40	0	0	-
	+50	0	0	-
102	+20	0	0	-
138		0	0	-

LTE B14 Uplink Frequency Range					
Channel	Temperature (°C)	Voltage (VAC)	F _L (MHz)	F _H (MHz)	Limit (MHz)
Low Channel	-30	120	788.5557	-	>788
	+20	102	788.5601	-	
		120	788.5593	-	
		138	788.5627	-	
	+50	120	788.5577	-	
High Channel	-30	120	-	797.4662	<798
	+20	102	-	797.4624	
		120	-	797.4544	
		138	-	797.4605	
	+50	120	-	797.4594	


The frequency stability of the EUT is sufficient to keep it within the authorized frequency ranges at any temperature interval and voltage variations across the measured range.

2.7.9 Sample Test Plots

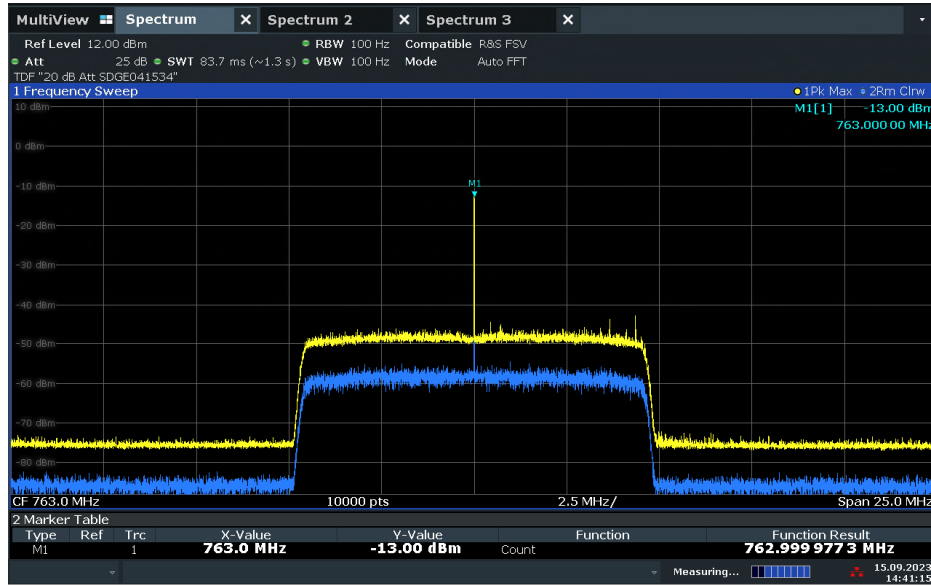


14:41:15 15.09.2023

LTE Band 14 Downlink Middle Channel 120VAC @ 20°C

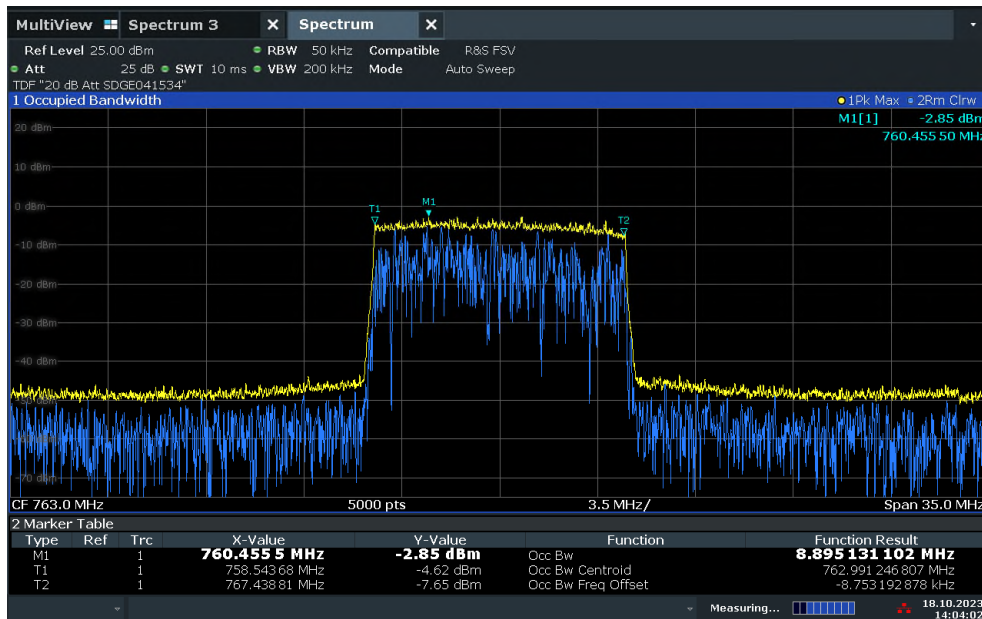

14:04:02 18.10.2023

LTE B14 Downlink Middle Channel Low Edge and High Edge @ 20°C Nominal Voltage

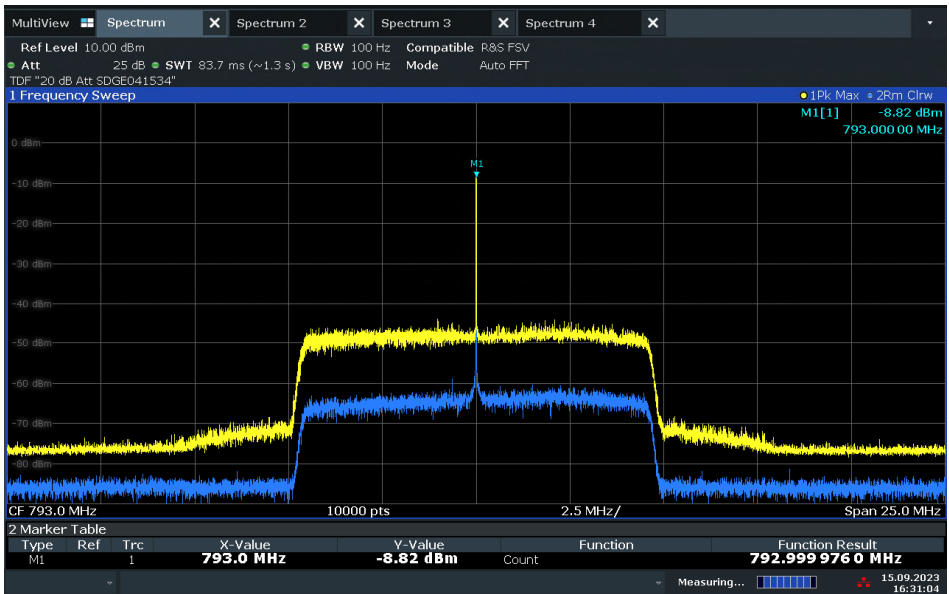

16:31:04 15.09.2023

LTE Band 14 Uplink Middle Channel 120VAC @ 20°C



11:34:51 18.10.2023

LTE B14 Uplink Middle Channel Low Edge and High Edge @ 20°C Nominal Voltage



2.8 AGC THRESHOLD LEVEL

2.8.1 Specification Reference

KDB 935210 D05, Clause 4.2

2.8.2 Standard Applicable

AGC Threshold Level is tested according to KDB 935210 D05, Clause 4.2:

The AGC threshold shall be determined by applying the procedure of 3.2 (of the current KDB), but with the signal generator configured to produce a test signal defined in Table 1, a CW input signal or a digitally modulated signal, consistent with the discussion about signal type in 4.1.

Devices intended for use in 700 MHz Public Safety Broadband spectrum shall be tested using representative band-limited AWGN signal (99% OBW of 4.1 MHz) or the applicable signal type (e.g., LTE)

2.8.3 Equipment Under Test and Modification State

Serial No: 560311000026 / Test Configuration A and B

2.8.4 Date of Test/Initial of Test Personnel who Performed the Test

September 14, 2023 / MARG

2.8.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.8.6 Environmental Conditions/ Test Location

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility

Ambient Temperature	24.9°C
Relative Humidity	50.2%
ATM Pressure	99.3kPa

2.8.7 Additional Observations

- This is a conducted test.
- For LTE Band 14 LTE, 10 MHz bandwidth Signal was used as the applicable test signal type, a power meter was used according to method 4.5.4 of this KDB, and a spectrum analyser was used according to method 4.5.3 with setting as below when testing input power of the EUT:
 - a) RBW = 100 kHz, VBW \geq 3 x RBW
 - b) Peak Detector, Trace mode to Max Hold
 - c) Span is at least 1 MHz
- The AGC threshold level was recorded when increasing the input level until a 1 dB increase in the input signal power no longer causes a 1 dB increase in the output signal power.
- Both downlink and uplink are tested.

2.8.8 Test Results

LTE Band 14						
Mode	Bandwidth (MHz)	Channel	Frequency (MHz)	Average Power		AGC Threshold Level (dBm)
				(dBm)	(W)	
Downlink	10	5330	763.0	12.27	0.01686553	-82.3
Uplink	10	23330	793.0	21.08	0.128233058	-73.2

2.9 OUT-OF-BAND REJECTION

2.9.1 Specification Reference

KDB 935210 D05, Clause 4.3
RSS-131, Clause 9.1

2.9.2 Standard Applicable

RSS-131, Clause 9.1:

The gain-versus-frequency response and the 20 dB passband bandwidth of the zone enhancer shall be reported. The zone enhancer shall reject amplification of other signals outside the passband of the zone enhancer.

Out-of-Band Rejection is tested according to KDB 935210 D05, Clause 4.3.

2.9.3 Equipment Under Test and Modification State

Serial No: 560311000026 / Test Configuration A and B

2.9.4 Date of Test/Initial of Test Personnel who Performed the Test

September 18, October 17, 2023 / MARG

2.9.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.9.6 Environmental Conditions/ Test Location

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility

Ambient Temperature	22.5 - 25.3°C
Relative Humidity	43.6 - 44.9%
ATM Pressure	98.8 - 99.3kPa

2.9.7 Additional Observations


- This is a conducted test.
- The path loss was measured and entered as a Transducer Factor
- A swept CW signal whose frequency range is $\pm 250\%$ of the manufacturer's specified pass band is configured for the testing.
- The internal gain control of the EUT is set to the maximum gain. The input signal type is set to tones (CW).
- The CW is 3 dB below the ACG threshold (determined according to section 3.2 and 4.2 of the current KDB), and doesn't activate the AGC threshold throughout the test.
- Dwell time is 10 ms.
- Frequency Step is 50 kHz.
- RBW is between 1% and 5% of the manufacturer's rated pass band.
- VBW is 3 x RBW.
- Detector is peak and trace is max hold.
- The peak amplitude frequency f_0 is determined and two additional -20 dB markers are determined using the marker-delta method).


- The 20dB Bandwidth plot is recorded as the out-of-band rejection frequency response.
- Both downlink and uplink are tested.

2.9.8 Test Results

LTE Band 14						
Mode	Bandwidth (MHz)	Channel	Frequency (MHz)	-20 dBc Point		20 dB BW (MHz)
				T1 (MHz)	T2 (MHz)	
Downlink	10	5330	763.0	758.17	767.818	9.65
Uplink	10	23330	793.0	788.17	797.806	9.64

2.9.9 Sample Test Plots

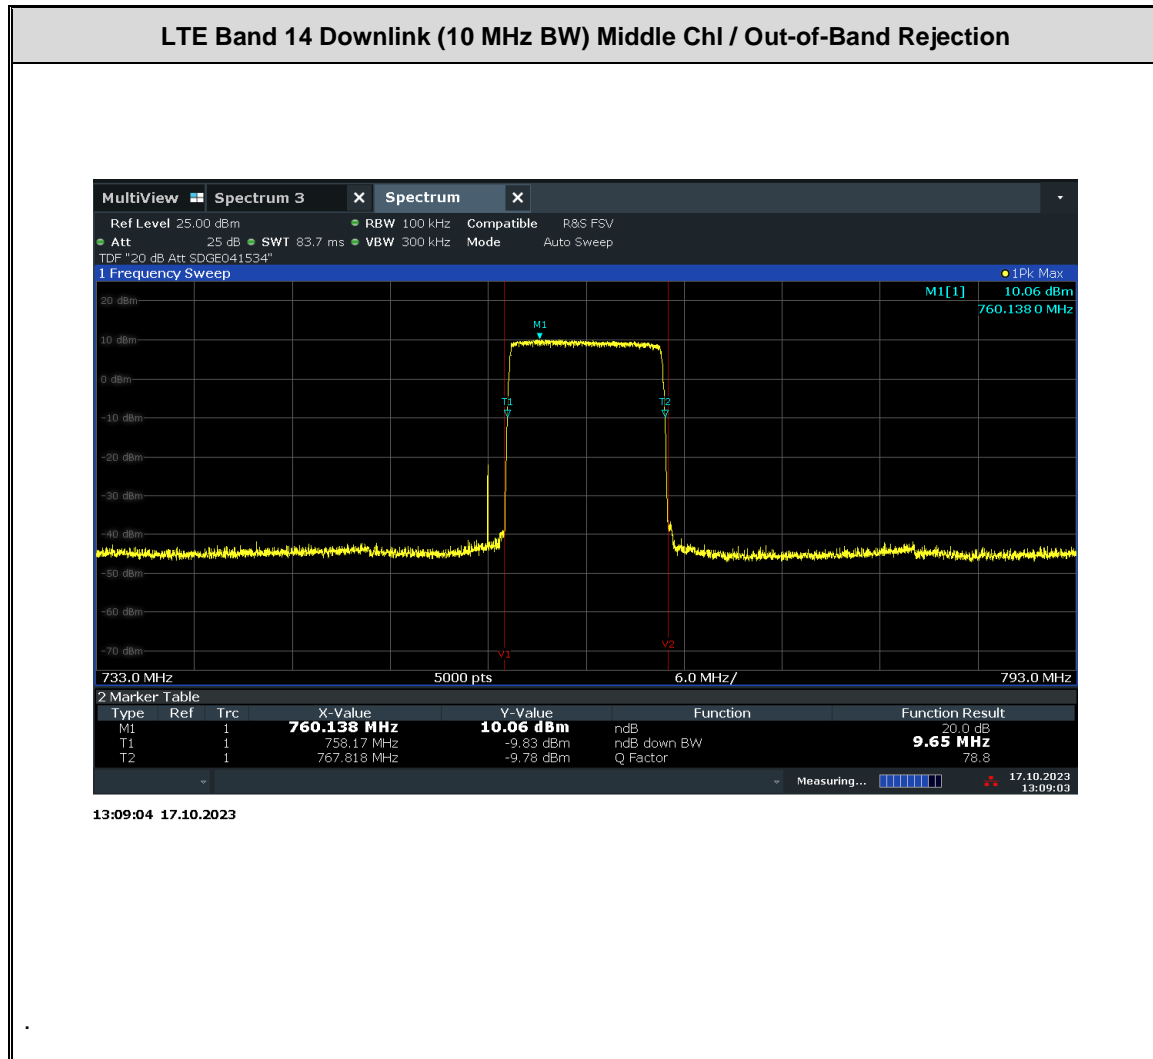

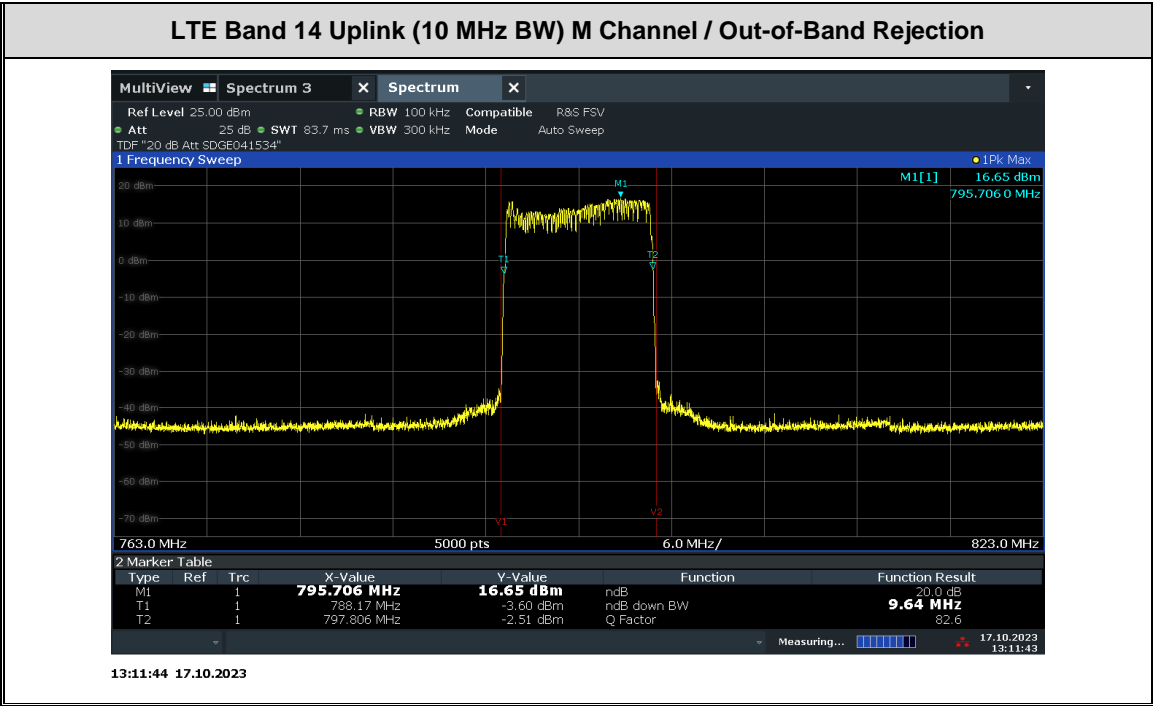



2.10 INPUT-VERSUS-OUTPUT SIGNAL COMPARISON

2.10.1 Specification Reference

FCC 47 CFR Part 90, Clause 90.219 (e)(4)(ii)
RSS-131, Clause 9.2
KDB 935210 D05, Clause 4.4

2.10.2 Standard Applicable

FCC 47 CFR Part 90, Clause 90.219 (e)(4):
(ii) There is no change in the occupied bandwidth of the retransmitted signals.

RSS-131, Clause 9.2
The spectral growth of the 26 dB bandwidth or occupied bandwidth of the output signal shall be less than 5% of the input signal spectrum.

Input-versus-Output Signal Comparison is tested according to KDB 935210 D05, Clause 4.4.

2.10.3 Equipment Under Test and Modification State

Serial No: 560311000026/ Test Configuration A and B

2.10.4 Date of Test/Initial of Test Personnel who Performed the Test

September 18, 2023 / MARG

2.10.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.10.6 Environmental Conditions/ Test Location

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility

Ambient Temperature	24.9°C
Relative Humidity	50.2%
ATM Pressure	99.4kPa

2.10.7 Additional Observations

- The path loss was measured and entered as an Transducer factor
- For LTE Band 14, the signal generator is configured to transmit LTE 10 MHz Bandwidth signal.
- The signal amplitude is just below the AGC threshold (determined according to section 3.2 and 4.2 of the current KDB), and not more than 0.5 dB below.
- Span is between 2 times to 5 times the emission bandwidth (EBW) or alternatively, the OBW.
- RBW is 1% to 5% of the anticipated OBW, VBW is $> 3 \times$ RBW.
- Set the reference level of spectrum analyser to accommodate the maximum input amplitude level.
- Detector is positive peak and trace is max hold.
- The peak amplitude frequency f_0 is determined and the 99% occupied bandwidth was measured with the OBW function of spectrum analyser.
- Repeat the testing with the input signal connected directly to the spectrum analyser.
- Compare the spectral plot of the input signal to the output signal.
- Repeat the testing with input signal amplitude set to 3 dB above AGC threshold.
- Both downlink and uplink are tested.

2.10.8 Test Results


Compliant. There is no spectral growth of OBW and 26 dB bandwidth that is more than than 5% of the input signal spectrum.

LTE Band 14 Downlink							
Signal Level	Bandwidth (MHz)	Channel	Frequency (MHz)	99% OBW (MHz)		-26 dB BW (MHz)	
				Output	Input*	Output	Input*
AGC Threshold Level	10	5330	763.0	8.88	8.97	9.46	9.93
AGC + 3 dB Level				8.88	8.96	9.47	9.98


* Since the AGC Threshold level and AGC + 3 dB level for downlink are as low as -82.3 dBm, which is about the noise floor, the input levels are adjusted to get the right input 99% OBW and -26 dB BW when testing.

LTE Band 14 Uplink							
Signal Level	Bandwidth (MHz)	Channel	Frequency (MHz)	99% OBW (MHz)		-26 dB BW (MHz)	
				Output	Input*	Output	Input*
AGC Threshold Level	10	23330	793.0	8.89	8.97	9.42	9.97
AGC + 3 dB Level				8.89	8.97	9.43	9.96

* Since the AGC Threshold level and AGC + 3 dB level for Uplink are as low as -78.2 dBm, which is close to the noise floor, the input levels are adjusted to get the right input 99% OBW and -26 dB BW when testing.

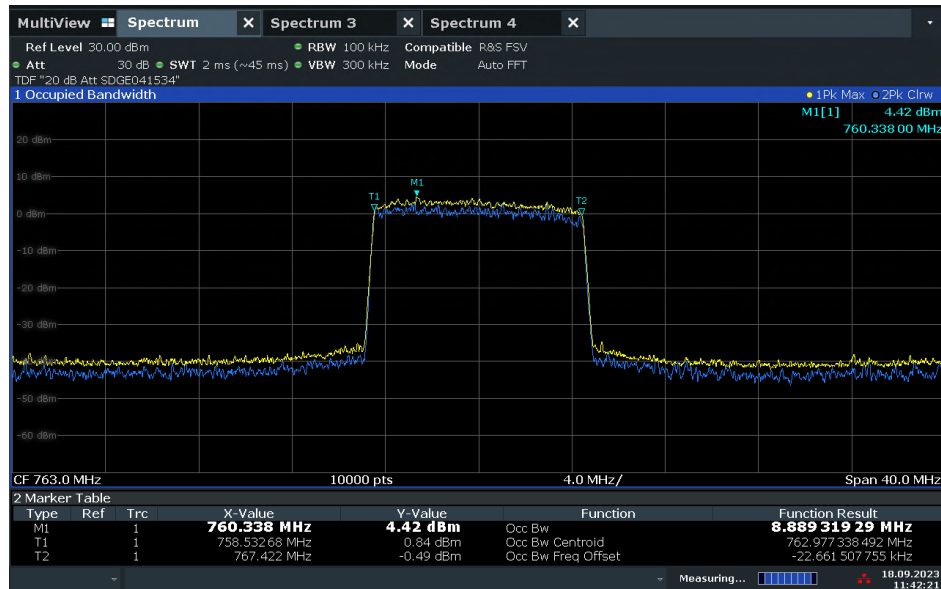
LTE Band 14 Downlink (10 MHz BW) Mid Channel / 99% OBW at Output port with Input signal at AGC Threshold Level

11:42:22 18.09.2023

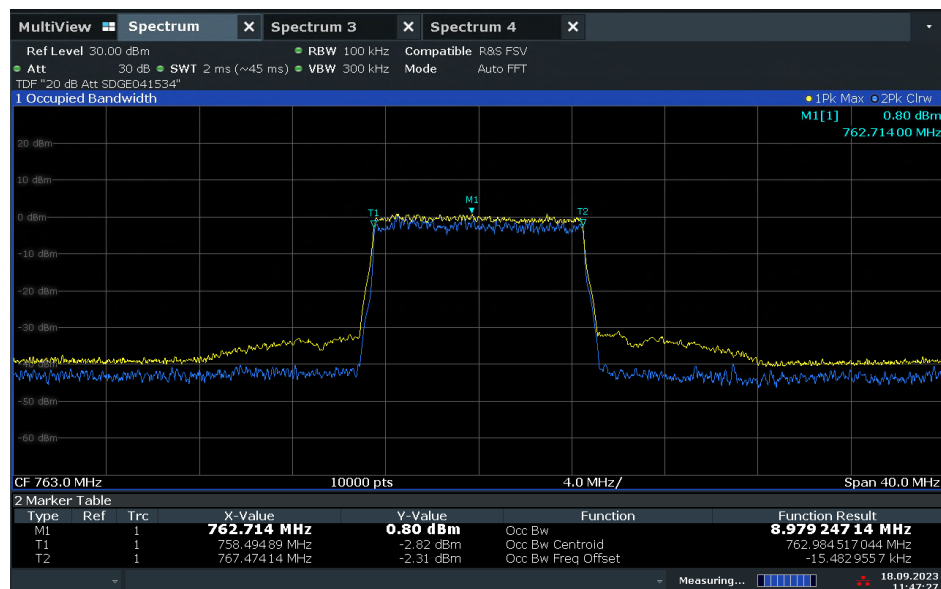LTE Band 14 Downlink (10 MHz BW) Mid Channel / 99% OBW at Input port (Adjusted Level)

11:47:28 18.09.2023

LTE Band 14 Downlink (10 MHz BW) Mid Channel / 26 dB BW at Output port with Input signal at AGC Threshold Level

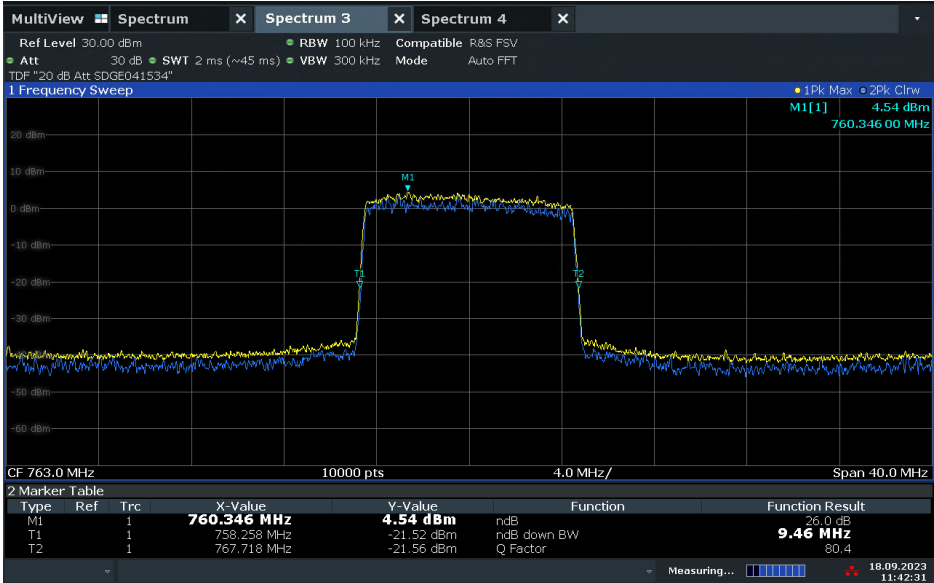


11:42:32 18.09.2023


LTE Band 14 Downlink (10 MHz BW) Mid Channel / 26 dB BW at Input port (Adjusted Level)



11:47:38 18.09.2023

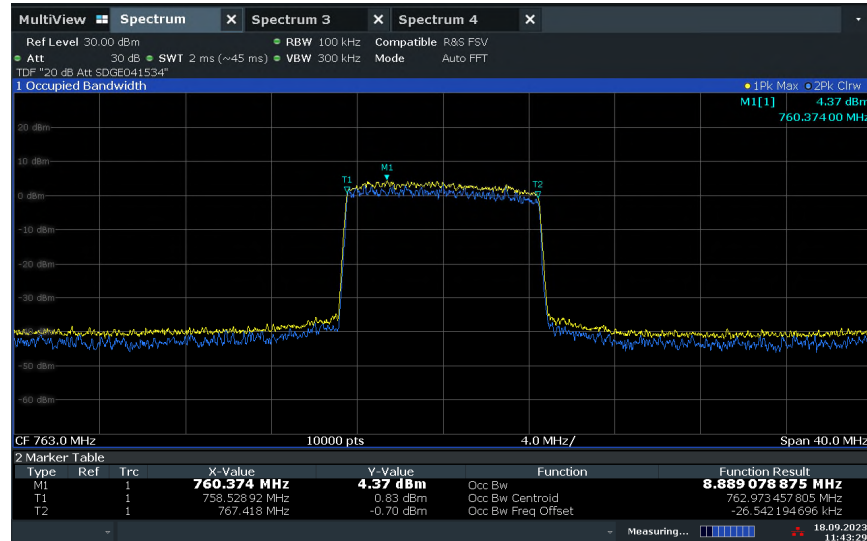LTE Band 14 Downlink (10 MHz BW) Mid Channel / 99% OBW at Output port with Input signal at AGC + 3 dB Level


11:43:29 18.09.2023

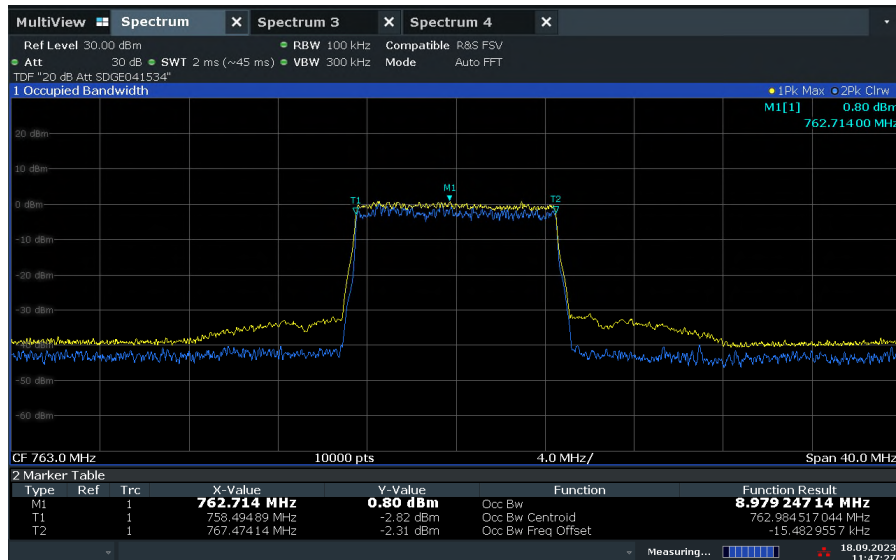LTE Band 14 Downlink (10 MHz BW) Mid Channel / 99% OBW at Input port (Adjusted Level)


11:47:28 18.09.2023




LTE Band 14 Downlink (10 MHz BW) Mid Channel / 26 dB BW at Output port with Input signal at AGC + 3 dB Level

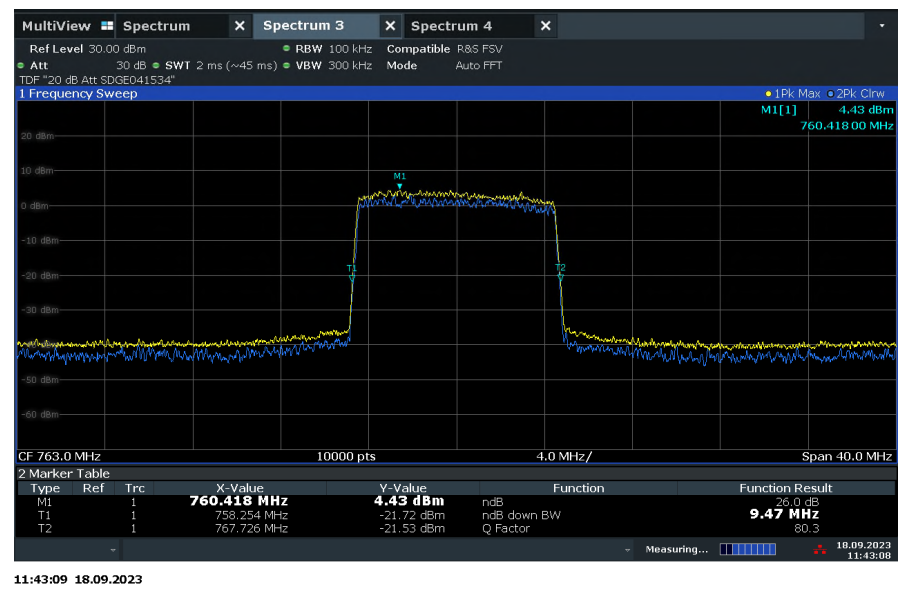


LTE Band 14 Downlink (10 MHz BW) Mid Channel / 26 dB BW at Input port (Adjusted Level)

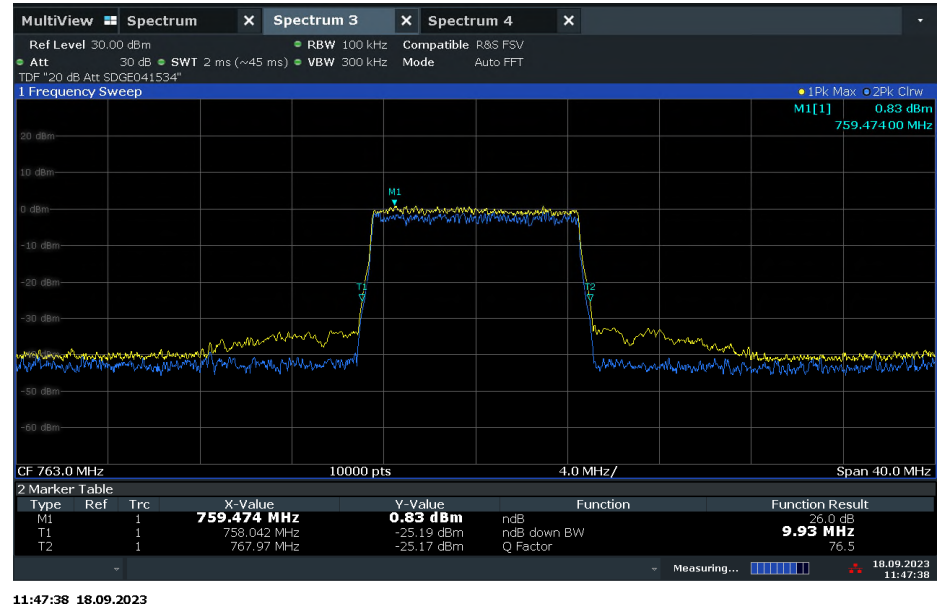


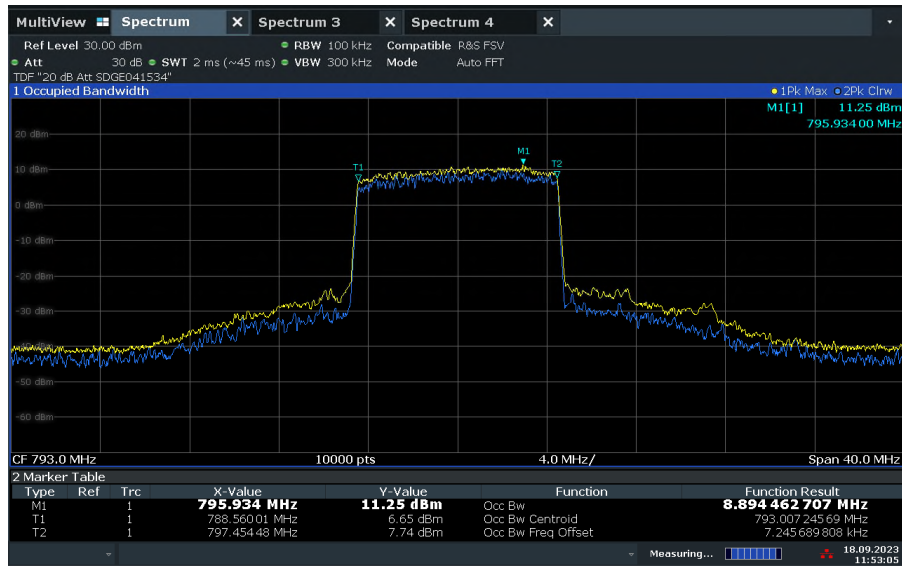LTE Band 14 Uplink (10 MHz BW) Mid Channel / 99% OBW at Output port with Input signal at AGC Threshold Level


11:53:05 18.09.2023

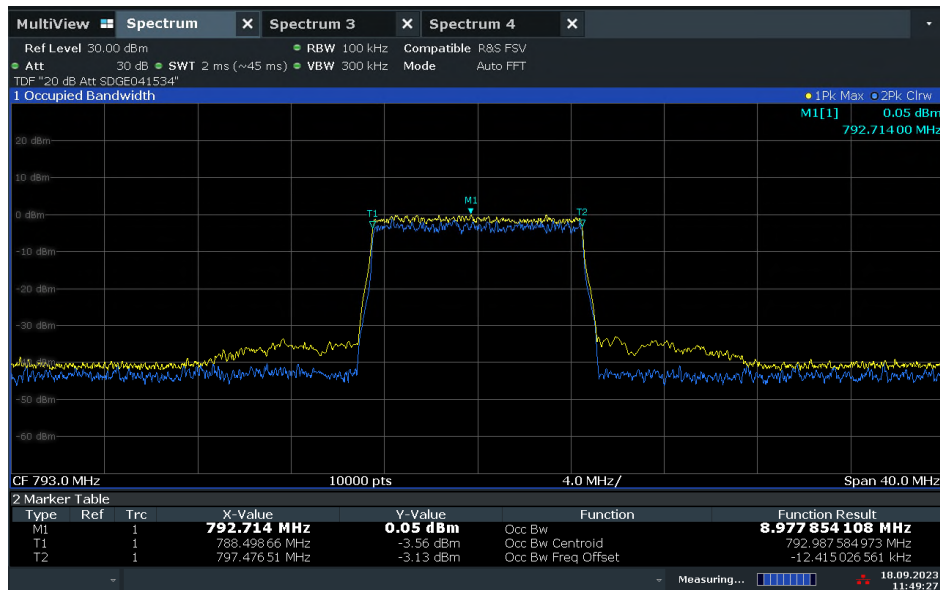LTE Band 14 Uplink (10 MHz BW) Mid Channel / 99% OBW at Input port (Adjusted Level)


11:49:27 18.09.2023

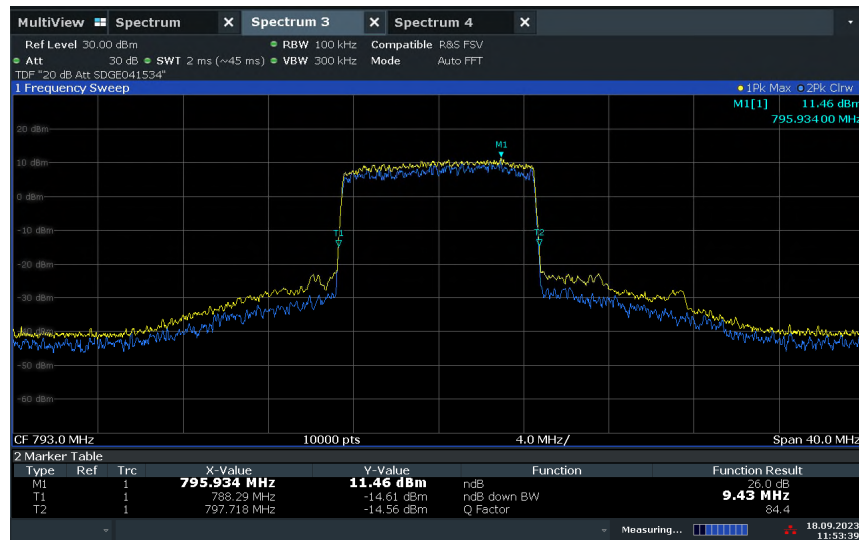LTE Band 14 Uplink (10 MHz BW) Mid Channel / 26 dB BW at Output port with Input signal at AGC Threshold Level


11:53:40 18.09.2023

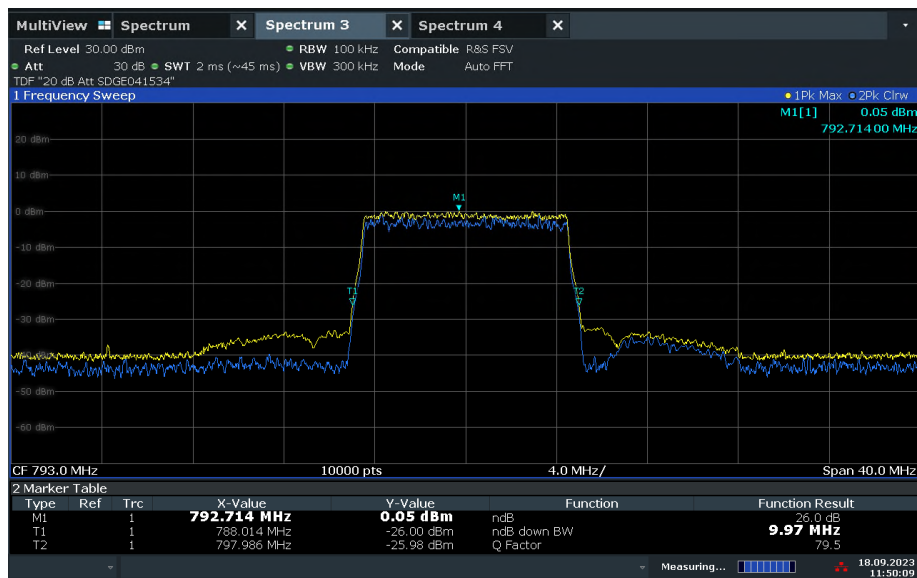LTE Band 14 Uplink (10 MHz BW) Mid Channel / 26 dB BW at Input port (Adjusted Level)


11:50:10 18.09.2023

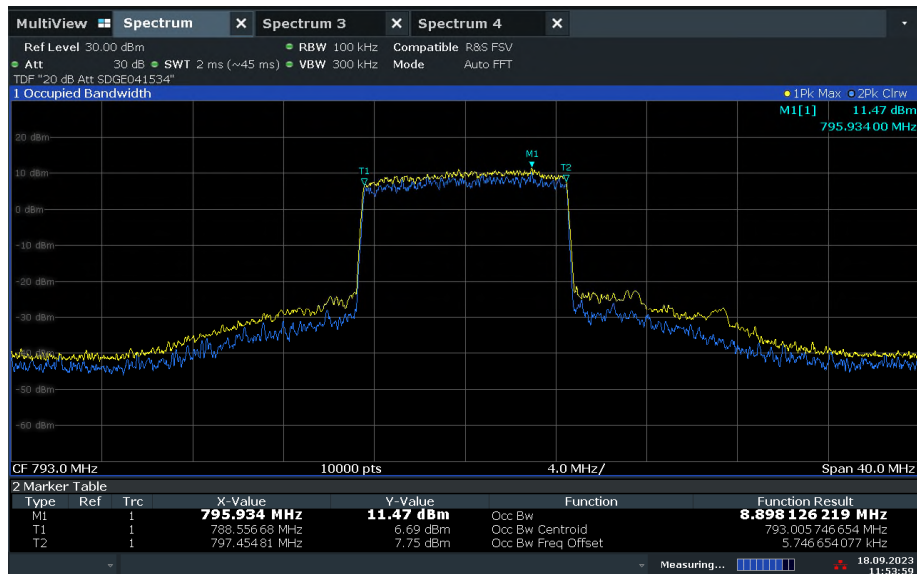LTE Band 14 Uplink (10 MHz BW) Mid Channel / 99% OBW at Output port with Input signal at AGC + 3 dB Level

11:53:59 18.09.2023

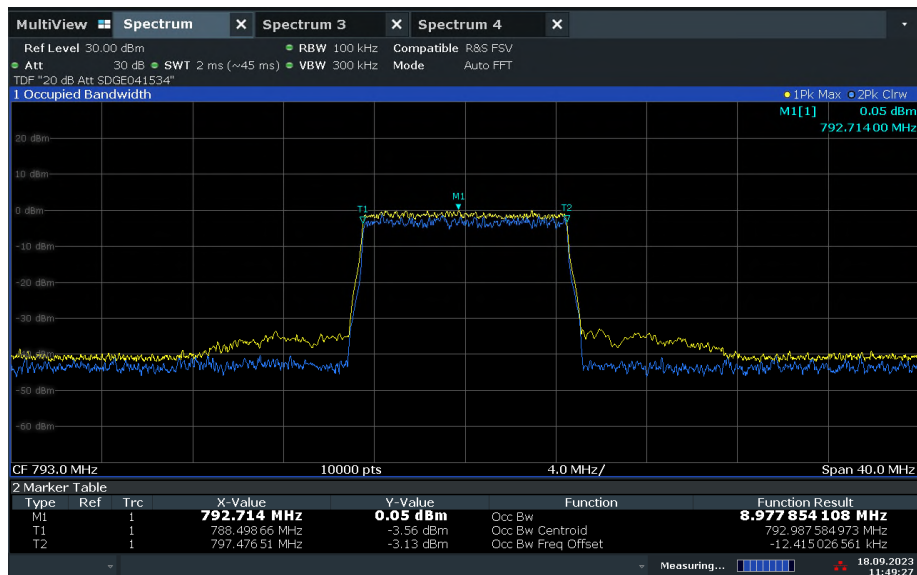LTE Band 14 Uplink (10 MHz BW) Mid Channel / 99% OBW at Input port (Adjusted Level)

11:49:27 18.09.2023

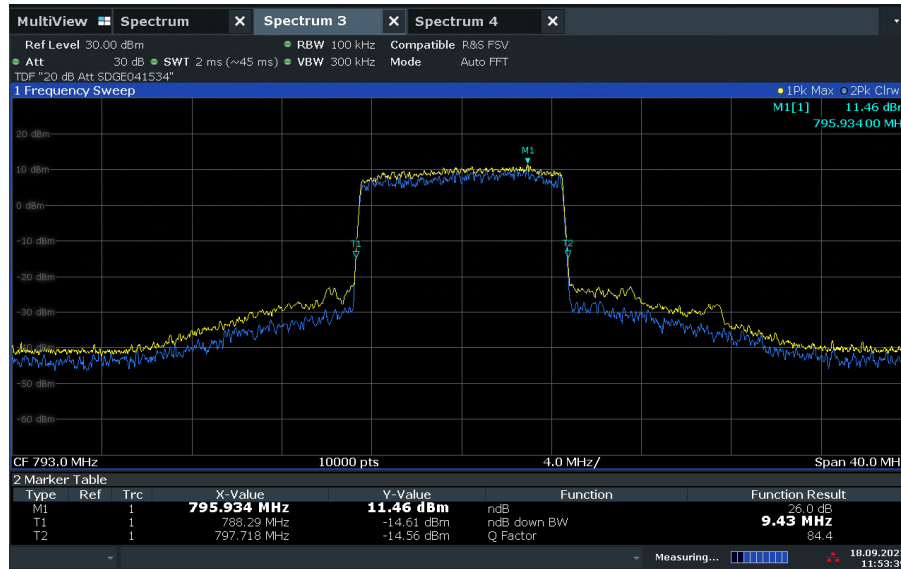LTE Band 14 Uplink (10 MHz BW) Mid Channel / 26 dB BW at Output port with Input signal at AGC + 3 dB Level

11:53:40 18.09.2023

LTE Band 14 Uplink (10 MHz BW) Mid Channel / 26 dB BW at Input port (Adjusted Level)

11:50:10 18.09.2023



2.11 INPUT AND OUTPUT POWER AND AMPLIFIER/BOOSTER GAIN

2.11.1 Specification Reference

FCC 47 CFR Part 90, Clause 90.219(e)(1)
RSS-131, Clause 9.3
KDB 935210 D05, Clause 4.5

2.11.2 Standard Applicable

FCC 47 CFR Part 90, Clause 90.219(e):

(1) The output power capability of a signal booster must be designed for deployments providing a radiated power not exceeding 5 Watts ERP for each retransmitted channel.

RSS-131, Clause 9.3

The zone enhancer gain shall not exceed the nominal gain (i.e the maximum gain at any frequency within the zone enhancer's passband) by more than 1.0 dB. Outside of the 20 dB passband bandwidth, the gain shall not exceed the gain at the 20 dB point.

2.11.3 Equipment Under Test and Modification State

Serial No: 560311000026/ Test Configuration A and B

2.11.4 Date of Test/Initial of test Personnel Who Performed The Test

September 18, 2023 / MARG

2.11.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.11.6 Environmental Conditions/ Test Location

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility

Ambient Temperature	24.9°C
Relative Humidity	50.2%
ATM Pressure	99.3kPa

2.11.7 Additional Observations

- This is a conducted test.
- The path loss was measured and entered as an offset.
- The internal gain control of the EUT is adjusted to the maximum gain.
- The input power levels (uplink and downlink) are set to maximum input ratings, and confirm the device is not capable of operating in saturation (non-linear mode) during the test.
- For LTE B14, the signal generator was configured for LTE 10 MHz signal as the intended operating signal type.
- A power meter was used to measure the power according to KDB 935210 D05 clause 4.5.3.
- Both downlink and uplink are tested.

2.11.8 Test Results

Compliant. The booster gain does not exceed the nominal gain (95 dB for LTE B14) by more than 1.0 dB.

LTE Band 14 Input and Output Power and Gain						
Mode	Bandwidth (MHz)	Channel	Frequency (MHz)	AGC Threshold Input (dBm)	Output Power (dBm)	Booster Gain (dB)
Downlink	10	5330	763.0	-82.3	12.27	94.57
Uplink	10	23330	793.0	-73.2	21.08	94.28

LTE Band 14 Input and Output Power and Gain						
Mode	Bandwidth (MHz)	Channel	Frequency (MHz)	AGC Threshold + 3dB Input (dBm)	Output Power (dBm)	Booster Gain (dB)
Downlink	10	5330	763.0	-79.3	12.85	92.15
Uplink	10	23330	793.0	-70.2	21.07	91.27



2.12 NOISE FIGURE

2.12.1 Specification Reference

FCC 47 CFR Part 90, Clause 90.219 (e)(2)
KDB 935210 D05, Clause 4.6
RSS-131, Clause 10.4

2.12.2 Standard Applicable

FCC Part 90.219 (e)(2):
The noise figure of a signal booster must not exceed 9 dB in either direction.

RSS-131, Clause 10.4:
Zone enhancers working with equipment certified under RSS-119 shall comply with the following noise limits:

The noise figure of a zone enhancer shall not exceed 9 dB in either direction.

2.12.3 Equipment Under Test and Modification State

Serial No: 560311000026/ Test Configuration A and B

2.12.4 Date of Test/Initial of Test Personnel who Performed the Test

September 18, 2023 / MARG

2.12.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.12.6 Environmental Conditions/ Test Location

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility

Ambient Temperature	23.0°C
Relative Humidity	44.8%
ATM Pressure	99.1kPa

2.12.7 Additional Observations

- The path loss was measured and entered as an offset.
- For LTE Band 14, 10 MHz Bandwidth LTE was tested as representative configuration. The Downlink and Uplink Gains are measured with a LTE signal injected to the device under test.
- The input of the EUT is terminated when measuring the noise output.
- The spectrum analyser was set to 100 trace average in RMS mode.
- RBW is 1 MHz, VBW is > 3 x RBW.
- Channel power was recorded.
- The noise figure was calculated using the following formula:

$$\text{Noise Figure (NF)} = N - \text{Gain} + 174 \text{ dB} - 10\lg_{10}(B)$$

- N = Noise Power Output in dBm/MHz
- Gain = Gain of the device under test
- B = Resolution Bandwidth of spectrum analyzer in Hz
- 174 = Thermal noise for 1 Hz RBW at room temperature

- Both Downlink and Uplink are tested.


2.12.8 Test Results

LTE Band 14 Booster Gain					
Mode	Bandwidth (MHz)	Frequency (MHz)	Input Power (dBm)	Output Power (dBm/MHz)	Gain (dB)
Downlink	10	763.0	-82.3	12.27	94.57
Uplink	10	793.0	-73.2	21.08	94.28


LTE Band 14 Noise Figure							
Mode	Bandwidth (MHz)	Frequency (MHz)	RBW (MHz)	Noise Output (dBm/MHz)	Booster Gain (dB)	Noise Figure (dB)	Limit (dB)
Downlink	10	763.0	1	-17.79	94.57	3.93	9
Uplink	10	793.0	1	-18.08	94.28	3.64	9

$$\begin{aligned} \text{Downlink Noise Figure} &= N - \text{Gain} + 174 \text{ dB} - 10\lg_{10}(B) \\ &= -15.93 - 94.52 + 174 \text{ dB} - 10\lg_{10}(B) \\ &= 3.55 \text{ dB} \end{aligned}$$

$$\begin{aligned} \text{Uplink Noise Figure} &= N - \text{Gain} + 174 \text{ dB} - 10\lg_{10}(B) \\ &= -16.18 - 94.69 + 174 \text{ dB} - 10\lg_{10}(B) \\ &= 3.13 \text{ dB} \end{aligned}$$

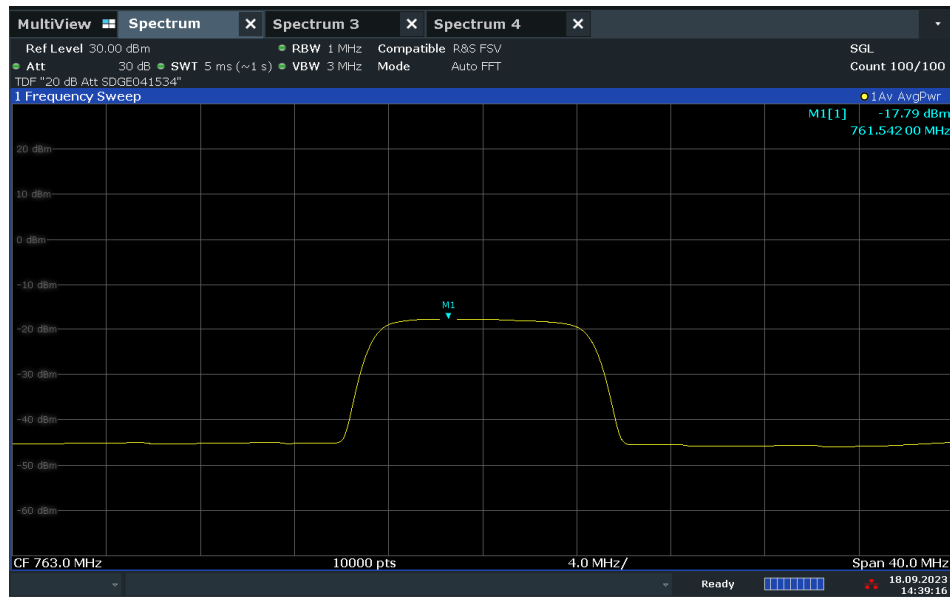LTE Band 14 Downlink (10 MHz BW) Middle Channel / Noise Output

14:39:16 18.09.2023

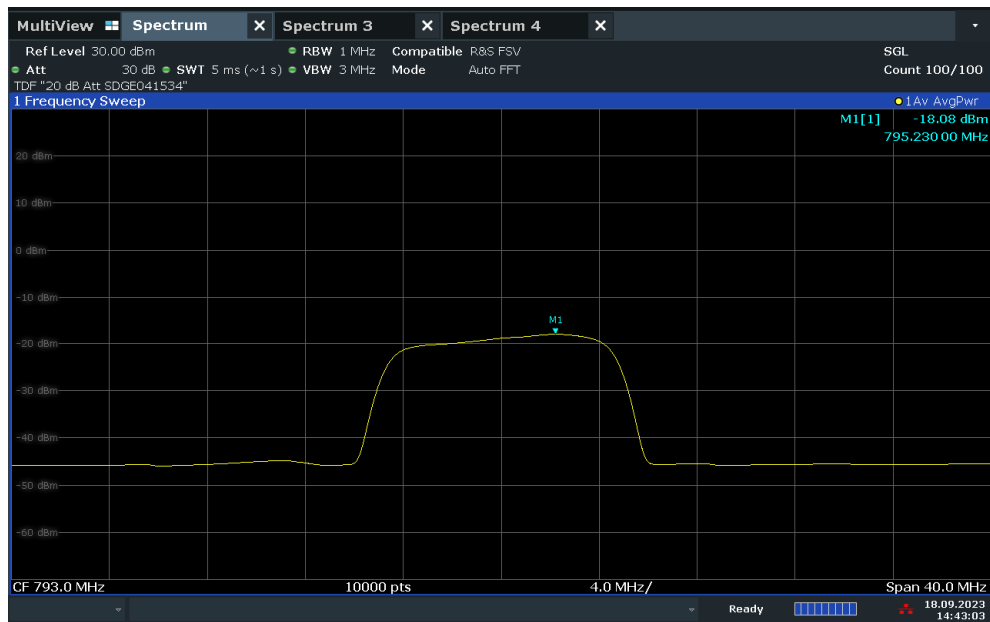LTE Band 14 Uplink (10 MHz BW) Middle Channel / Noise Output

14:43:03 18.09.2023

2.13 OUT-OF-BAND/OUT-OF-BLOCK (INTERMODULATION) AND SPURIOUS EMISSIONS

2.13.1 Specification Reference

FCC 47 CFR Part 2, Clause 2.1051
 FCC 47 CFR Part 90, Clause 90.219(e)(3)
 FCC 47 CFR Part 90, Clause 90.543(c)
 RSS-140, Clause 4.4
 RSS-119, Clause 5.8.9.2
 KDB 935210 D05, Clause 4.7
 RSS-131, Clause 10.3.

2.13.2 Standard Applicable

FCC 47 CFR Part 90.219(e):
 (3) Spurious emission from a signal booster must not exceed -13 dBm within any 100kHz measurement bandwidth.

FCC 47 CFR Part 90.543:
 (c) Out-of-band emission limit. On any frequency outside of the frequency ranges covered by the ACP tables in this section, the power of any emission must be reduced below the mean output power (P) by at least $43 + 10 \log(p)$ dB in a 100 kHz bandwidth for frequencies less than 1 GHz, and in a 1 MHz bandwidth for frequencies greater than 1 GHz.

RSS-140, Clause 4.4 Transmitter unwanted emissions limits:
 The power of any unwanted emission outside the bands 758-768 MHz and 788-798 MHz shall be attenuated below the transmitter output power P in dBW as follows, where p is the transmitter output power in watts:

- a. For any frequency between 769-775 MHz and 799-806 MHz:
 - i $76 + 10 \log(p)$, dB in a 6.25 kHz band for fixed and base station equipment
 - ii $65 + 10 \log(p)$, dB in a 6.25 kHz band for mobile and portable/hand-held equipment

b For any frequency between 775-788 MHz, above 806 MHz, and below 758 MHz: $43 + 10 \log(p)$, dB in a bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency bands 758-768 MHz and 788-798 MHz, a resolution bandwidth of 30 kHz may be employed.

In addition, the equivalent isotropically radiated power (e.i.r.p.) of all emissions, including harmonics in the band 1559-1610 MHz, shall not exceed -70 dBW/MHz for wideband emissions, and -80 dBW/kHz for discrete emissions of less than 700 Hz bandwidth.

For LTE Band 41, out-of-Band/Out-of-Block and spurious emissions is tested according to KDB 935210 D05, Clause 3.6.

RSS-119, Clause 5.8.9.2 Out-of-Band Emission Limit:

On any frequency outside of the ranges specified in the ACP tables 13 to 16, the power of any emission shall be attenuated below the mean output power P (dBW) by at least $43 + 10 \log_{10}(p)$, measured in a 100 kHz bandwidth for frequencies less than or equal to 1 GHz, and in a 1 MHz bandwidth for frequencies greater than 1 GHz.

In addition, for operations in the bands 768-776 MHz and 798-806 MHz, all emissions (including harmonics in the band 1559-1610 MHz), shall not exceed:

- 70 dBW/MHz equivalent isotropically radiated power (e.i.r.p.) for wideband emissions, and
- 80 dBW/kHz e.i.r.p. for discrete emissions of less than 700 Hz bandwidth

RSS-131, Clause 10.3:

The effective radiated power (ERP) of the intermodulation products shall not exceed -30 dBm in a 10 KHz measurement bandwidth.



2.13.3 Equipment Under Test and Modification State

Serial No: 560311000026/ Test Configuration A and B

2.13.4 Date of Test/Initial of Test Personnel who Performed the Test

September 14, 2023 / MARG

2.13.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.13.6 Environmental Conditions/ Test Location

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility


Ambient Temperature	25.9°C
Relative Humidity	51.6%
ATM Pressure	98.9kPa

2.13.7 Additional Observations


- The path loss or the transducer factor (TDF) from the external attenuators and cables was measured and entered as an offset.
- 10 MHz Bandwidth was tested as representative configuration for LTE Band 14
- For spurious emissions, the spectrum analyser was set to peak detector and trace is max hold.
- RBW is 100 kHz, VBW is $> 3 \times \text{RBW}$.
- Intermodulation-product spurious emission measurements are not required for LTE Band 14 since it only support single-channel boosters and can't accommodate two simultaneous signals within the pass band.
- Both Downlink and Uplink are tested.

2.13.8 Test Results

LTE Band 14 Downlink (10 MHz BW) Middle Channel / Spurious Emissions

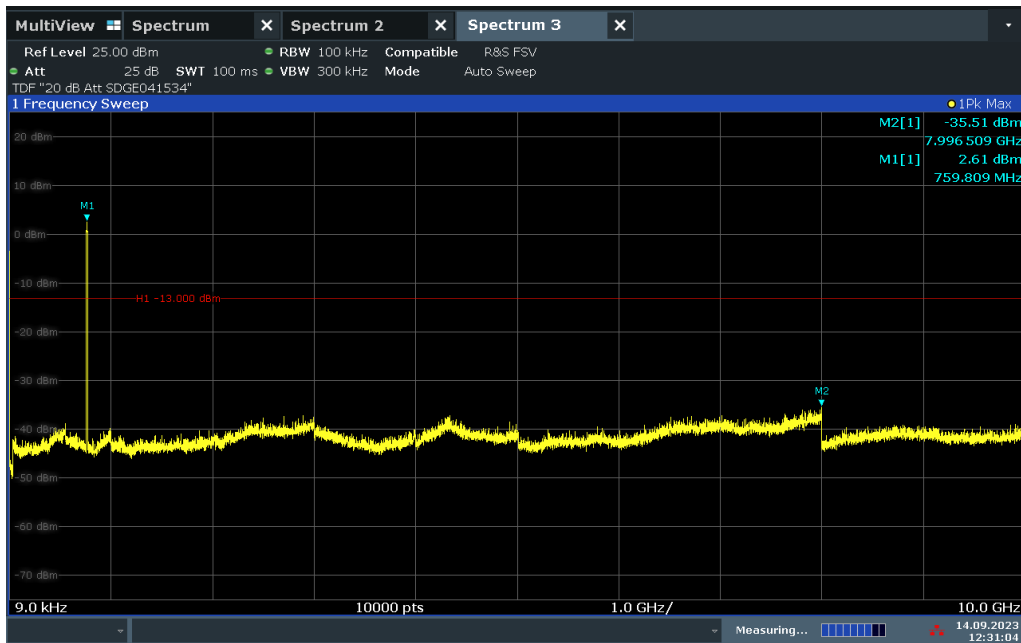

LTE Band 14 Uplink (10 MHz BW) Middle Channel / Spurious Emissions

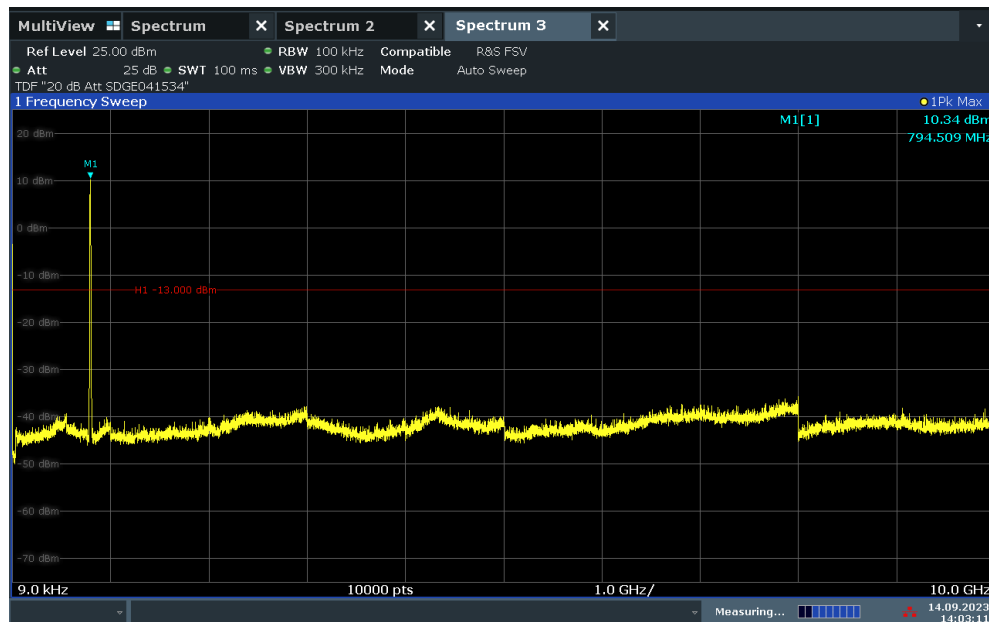



2.14 FIELD STRENGTH OF SPURIOUS EMISSIONS

2.14.1 Specification Reference

FCC 47 CFR Part 2, Clause 2.1053
FCC 47 CFR Part 90, Clause 90.219(e)(3)
FCC 47 CFR Part 90, Clause 90.543(e)(1)(3)(f)
KDB 935210 D05, Clause 4.9

2.14.2 Standard Applicable

FCC 47 CFR Part 90, Clause 90.219(e)(3)

(e) Device Specifications. In addition to the general rules for equipment certification in § 90.203(a)(2) and part 2, subpart J of this chapter, a signal booster must also meet the rules in this paragraph.

(3) Spurious emissions from a signal booster must not exceed -13 dBm within any 100 kHz measurement bandwidth.

FCC 47 CFR Part 90, Clause 90.543(e)(1)(3)(f)

(e) For operations in the 758–768 MHz and the 788–798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On all frequencies between 769–775 MHz and 799–805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations.

(3) On any frequency between 775–788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log (P)$ dB.

(f) For operations in the 758–775 MHz and 788–805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

2.14.3 Equipment Under Test and Modification State.

Serial No: 864402002419 / Test Configuration E

2.14.4 Date of Test/Initial of test personnel who performed the test.

October 15, 16 and 22, 2024 / MARG

2.14.5 Test Equipment Used.

The major items of test equipment used for the above tests are identified in Section 3.1.

2.14.6 Environmental Conditions

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility

Ambient Temperature	23.5°C	24.1°C
Relative Humidity	28.5%	98.6%
ATM Pressure	99.0kPa	51.7kPa

2.14.7 Additional Observations

- This is a radiated test. The spectrum was searched covering 30MHz up to the 10th harmonic of the highest frequency radio (Only Noise Floor observed above 18GHz)
- EUT was tested on "Burn in Mode" where all the antennas were transmitting at the same time as worst case.
- Measurement was done using EMC 32 automated software for radiated methods. Reported level is the actual level with all the correction factors factored in. the Correction Factor column is for informational purposes only.
- Fundamentals from LTE and BLE were ignored for this test.

2.14.8 Limit Conversion Example.

-13dBm erp to Field strength at 3m

Using equation: $E \text{ (dB}\mu\text{V/m)} = \text{ERP (dBm)} - 20\log(D) + 104.8 + 2.15$; where D is the measurement distance (in the far field region) in m.

-13dBm ERP = 84.4 dB μ V/m at 3m distance.


2.14.9 Sample Computation (Radiated Emission 30 MHz to 1 GHz).

Measuring equipment raw measurement (db μ V) @ 30 MHz			24.4
Correction Factor (dB/m)	Asset# 1026 (cable)	0.8	-7.0
	Asset# 1057 (cable)	0.2	
	Asset# 1016 (preamplifier)	-30.8	
	Asset# 8850 (cable)	0.2	
	Asset# 1033 (antenna)	17.2	
	Asset# 8771 (6-dB attenuator)	5.4	
Reported QuasiPeak Final Measurement (db μ V/m) @ 30MHz			17.4

2.14.10 Sample Computation (Radiated Emissions above 1 GHz).

Measuring equipment raw measurement (db μ V) @ 2629 MHz			37.59
Correction Factor (dB/m)	Asset# 1016 (preamplifier)	-31.9	3
	Asset# 1175(cable)	2.5	
	Asset# 7631 (antenna)	32.4	
Reported Peak Final Measurement (db μ V/m) @ 30MHz			40.59

2.14.11 FCC Part 90 Test Results 30 MHz to 1 GHz

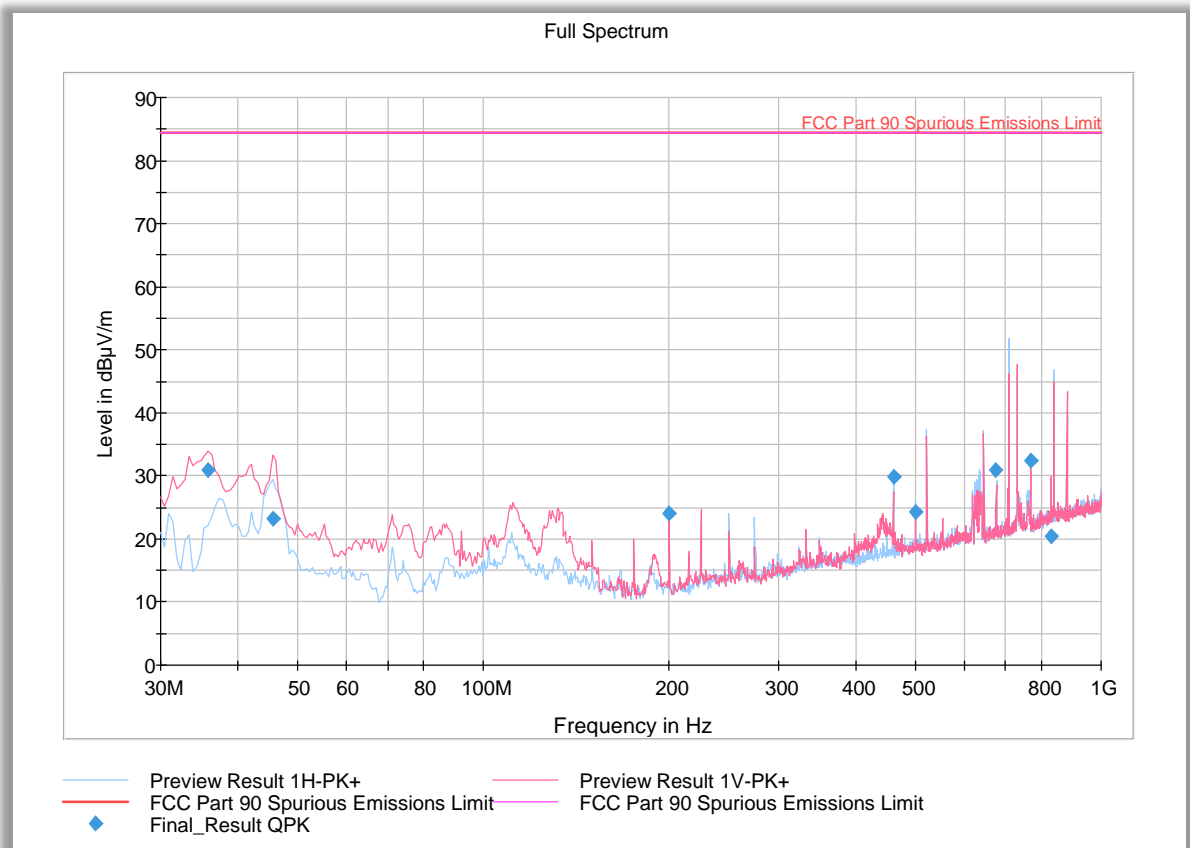


Quasi Peak Data

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
35.820000	30.98	84.40	53.42	1000.0	120.000	116.0	V	278.0	-13.6
45.560000	23.12	84.40	61.28	1000.0	120.000	183.0	V	15.0	-10.5
199.990000	24.06	84.40	60.34	1000.0	120.000	103.0	V	36.0	-11.0
460.800000	29.76	84.40	54.64	1000.0	120.000	103.0	H	84.0	-4.3
499.965000	24.18	84.40	60.22	1000.0	120.000	208.0	H	70.0	-3.2
675.820000	30.93	84.40	53.47	1000.0	120.000	142.0	V	148.0	0.0
768.010000	32.34	84.40	52.06	1000.0	120.000	153.0	V	157.0	1.5
830.085000	20.49	84.40	63.91	1000.0	120.000	103.0	V	343.0	3.1

2.14.12 FCC Part 90 Test Results 1GHz to 18GHz

Full Spectrum

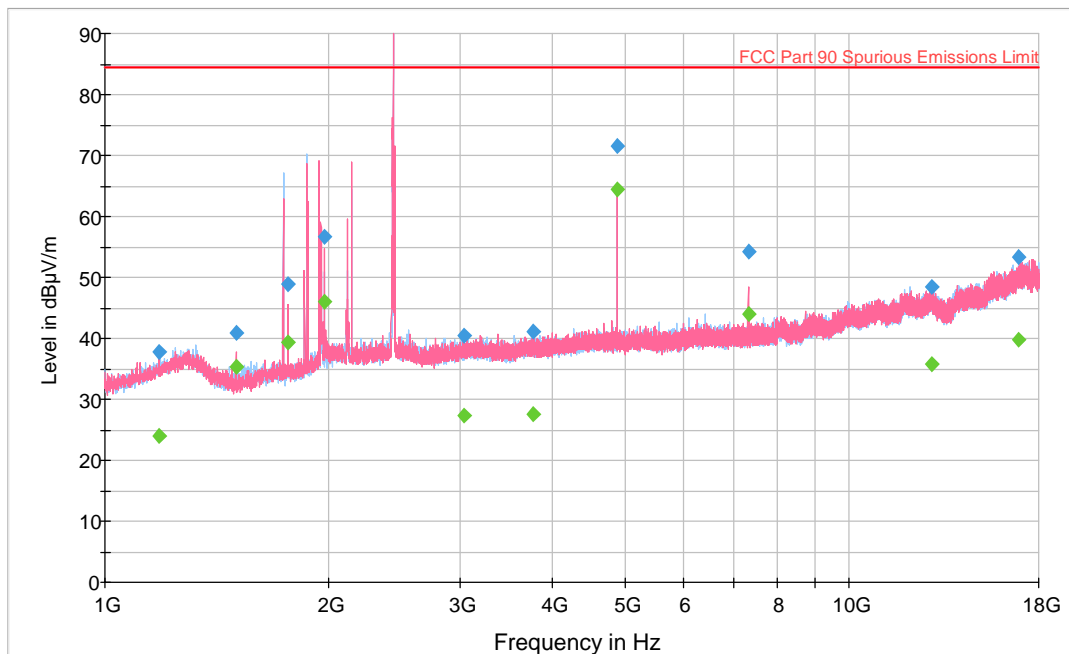

— Preview Result 1H-PK+ — Preview Result 1V-PK+
 — FCC Part 90 Spurious Emissions Limit — FCC Part 90 Spurious Emissions Limit
 — FCC Part 90 Spurious Emissions Limit ◆ Final_Result PK+
 ◆ Final_Result AVG

Peak Data

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1182.066667	37.89	84.40	46.51	1000.0	1000.000	108.0	V	335.0	-6.7
1500.033333	40.91	84.40	43.49	1000.0	1000.000	196.0	V	223.0	-6.7
1761.033333	48.87	84.40	35.53	1000.0	1000.000	210.0	V	20.0	-4.1
1972.966667	56.56	84.40	27.84	1000.0	1000.000	201.0	V	113.0	-2.3
3041.233333	40.44	84.40	43.96	1000.0	1000.000	345.0	V	133.0	0.8
3759.600000	41.13	84.40	43.27	1000.0	1000.000	126.0	H	325.0	2.7
4879.966667	71.61	84.40	12.79	1000.0	1000.000	238.0	V	132.0	4.8
7320.033333	54.30	84.40	30.10	1000.0	1000.000	280.0	V	133.0	8.5
12897.966667	48.50	84.40	35.90	1000.0	1000.000	330.0	V	133.0	16.5
16893.233333	53.43	84.40	30.97	1000.0	1000.000	308.0	H	324.0	22.4

Average Data

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1182.066667	24.09	84.40	60.31	1000.0	1000.000	108.0	V	335.0	-6.7
1500.033333	35.37	84.40	49.03	1000.0	1000.000	196.0	V	223.0	-6.7
1761.033333	39.33	84.40	45.07	1000.0	1000.000	210.0	V	20.0	-4.1
1972.966667	46.05	84.40	38.35	1000.0	1000.000	201.0	V	113.0	-2.3
3041.233333	27.23	84.40	57.17	1000.0	1000.000	345.0	V	133.0	0.8
3759.600000	27.66	84.40	56.74	1000.0	1000.000	126.0	H	325.0	2.7
4879.966667	64.46	84.40	19.94	1000.0	1000.000	238.0	V	132.0	4.8
7320.033333	43.90	84.40	40.50	1000.0	1000.000	280.0	V	133.0	8.5
12897.966667	35.74	84.40	48.66	1000.0	1000.000	330.0	V	133.0	16.5



TEST EQUIPMENT USED

3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

3.1.1 Test Equipment

ID Number (SDGE/SDRB)	Test Equipment	Type	Serial Number	Manufacturer	Cal Date
Antenna Conducted Port Setup					
7608	Vector Signal Generator	SMBV100A	259021	Rhode & Schwarz	10/03/2025
7582	Signal/Spectrum Analyzer	FSW26	101614	Rohde & Schwarz	12/21/2023
-	Power Splitter	ZN2PD2-50-S+	SUU27701207	Mini Circuits	Verified with (7608) and (7582)
7610	DFS Radar Simulator and Analyzer*	Aeroflex 3005	30050A/09L	Aeroflex	NCR (for signaling purposes only)
-	20dB Attenuator	5W DC-18GHz 20dB (ATX3518-20)	N/A	MCL	Verified by 7608 and 7582
7662	Power Meter	N1911A	MY451000951	Agilent	04/04/2024
7605	Wideband Power Meter	N1921A	MY51100054	Agilent	04/14/2024
8848	Step Attenuator	RSP	834500/009	Rhode & Schwarz	Verified by 7608 and 7582
-	Directional Coupler	4226-20	N/A	Narda	Verified by 7608 and 7582
Radiated Spurious Emissions					
1033	BiConiLog Antenna	3142C	00044556	ETS Lindgren	10/16/25
68302	EMI Test Receiver	ESW44	103418	Rohde & Schwarz	07/02/25
51235	RF Pre-Amp (9kHz to 1GHz)	310	412802	Sonoma	08/14/25
68301	EMI Test Receiver	ESW44	103417	Rohde & Schwarz	07/05/25
30181	1-18GHz DRG Horn	3117	155511	ETS-Lindgren	08/20/26
8628	Pre-Amplifier	QLJ-01182835-JO	8986002	Quinstar	02/19/25
9001	Horn antenna (18-26.5GHz)	HO42S	101	Custom Microwave	10/26/25
40815	18GHz to 40GHz Low Noise Amplifier	SLKKa-30-6	19D18	Spacek Labs	10/22/25
Miscellaneous					
43003	True RMS Multimeter	85 III	96880143	Fluke	01/09/2024
7579	Temperature Chamber	115	151617	TestQuity	12/21/23
6672	D.C. Power Supply	E3611A	KR73012637	Hewlett Packard	NCR
68516	Barometric Pressure/Humidity/Temperature Sensor	SD700	A.107085	Extech Instruments	08/24/25
-	Test Software	EMC32	V11.50.0	Rhode & Schwarz	NCR

All Test Instruments were within calibration during testing.



SECTION 4

MEASUREMENT UNCERTAINTY

4.1 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:

4.1.1 CONDUCTED ANTENNA PORT MEASUREMENT

	Input Quantity (Contribution) X_i	Value	Prob. Dist.	Divisor	$u_i(x)$	$u_i(x)^2$
1	Receiver reading	0.10 dB	Normal, k=1	1.000	0.10	0.01
2	Cable attenuation	1.00 dB	Normal, k=2	2.000	0.50	0.25
3	Received sinewave accuracy	0.07 dB	Normal, k=2	2.000	0.04	0.00
4	Receiver pulse amplitude	0.00 dB	Rectangular	1.732	0.00	0.00
5	Receiver pulse repetition rate	0.00 dB	Rectangular	1.732	0.00	0.00
6	Noise floor proximity	0.00 dB	Rectangular	1.732	0.00	0.00
7	Frequency interpolation	0.10 dB	Rectangular	1.732	0.06	0.00
8	Mismatch	0.07 dB	U-shaped	1.414	0.05	0.00
Combined standard uncertainty				Normal	0.52 dB	
Expanded uncertainty				Normal, k=2	1.03 dB	

4.1.2 Radiated Measurements (30MHz to 1 GHz).

Input Quantity (Contribution) X_i	Value		Prob. Dist.	Divisor	$u_i(x)$	$u_i(x)^2$
Receiver reading	0.10	dB	Normal, k=1	1.000	0.10	0.01
Attenuation: antenna-receiver	0.20	dB	Normal, k=2	2.000	0.10	0.01
Antenna factor AF	0.75	dB	Normal, k=2	2.000	0.38	0.14
Receiver sinewave accuracy	1.10	dB	Normal, k=2	2.000	0.55	0.30
Receiver pulse amplitude	1.50	dB	Rectangular	1.732	0.87	0.75
Receiver pulse repetition rate	1.50	dB	Rectangular	1.732	0.87	0.75
Noise floor proximity	0.50	dB	Rectangular	1.732	0.29	0.08
Mismatch: antenna-receiver	0.95	dB	U-shaped	1.414	0.67	0.45
AF frequency interpolation	0.30	dB	Rectangular	1.732	0.17	0.03
AF height deviations	0.10	dB	Rectangular	1.732	0.06	0.00
Directivity difference at 3 m	3.12	dB	Rectangular	1.732	1.80	3.24
Phase center location at 3 m	1.00	dB	Rectangular	1.732	0.58	0.33
Cross-polarisation	0.90	dB	Rectangular	1.732	0.52	0.27
Balance	0.00	dB	Rectangular	1.732	0.00	0.00
Site imperfections	3.64	dB	Triangular	2.449	1.49	2.21
Separation distance at 3 m	0.30	dB	Rectangular	1.732	0.17	0.03
Effect of setup table material	0.40	dB	Rectangular	1.732	0.23	0.05
Table height at 3 m	0.10	dB	Normal, k=2	2.000	0.05	0.00
Near-field effects	0.00	dB	Triangular	2.449	0.00	0.00
Effect of ambient noise on OATS	0.00	dB				0.00
Combined standard uncertainty				Normal	2.95 dB	
Expanded uncertainty				Normal, k=2	5.89 dB	

4.1.3 Radiated Emissions Measurements (Above 1GHz).


Input Quantity (Contribution) X_i	Value		Prob. Dist.	Divisor	$u_i(x)$	$u_i(x)^2$
Receiver reading	0.10	dB	Normal, k=1	1.000	0.10	0.01
Attenuation: antenna-receiver	0.30	dB	Normal, k=2	2.000	0.15	0.02
Preamplifier Gain	0.20	dB	Normal, k=2	2.000	0.10	0.01
Antenna factor AF	0.37	dB	Normal, k=2	2.000	0.19	0.03
Sinewave accuracy	0.57	dB	Normal, k=2	2.000	0.29	0.08
Instability of preamp gain	1.21	dB	Rectangular	1.732	0.70	0.49
Noise floor proximity	0.70	dB	Rectangular	1.732	0.40	0.16
Mismatch: antenna-preamplifier	1.41	dB	U-shaped	1.414	1.00	0.99
Mismatch: preamplifier-receiver	1.30	dB	U-shaped	1.414	0.92	0.85
AF frequency interpolation	0.30	dB	Rectangular	1.732	0.17	0.03
Directivity difference at 3 m	1.50	dB	Rectangular	1.732	0.87	0.75
Phase center location at 3 m	0.30	dB	Rectangular	1.732	0.17	0.03
Cross-polarisation	0.90	dB	Rectangular	1.732	0.52	0.27
Site imperfections VSWR (Method 2)	4.16	dB	Triangular	2.449	1.70	2.89
Effect of setup table material	1.15	dB	Rectangular	1.732	0.66	0.44
Separation distance at 3 m	0.30	dB	Rectangular	1.732	0.17	0.03
Table height at 3 m	0.00	dB	Normal, k=1	2.000	0.00	0.00
Combined standard uncertainty				Normal	2.66 dB	
Expanded uncertainty				Normal, k=2	5.32 dB	




SECTION 5

DIAGRAM OF TEST SETUP


5.1 TEST SETUP DIAGRAM

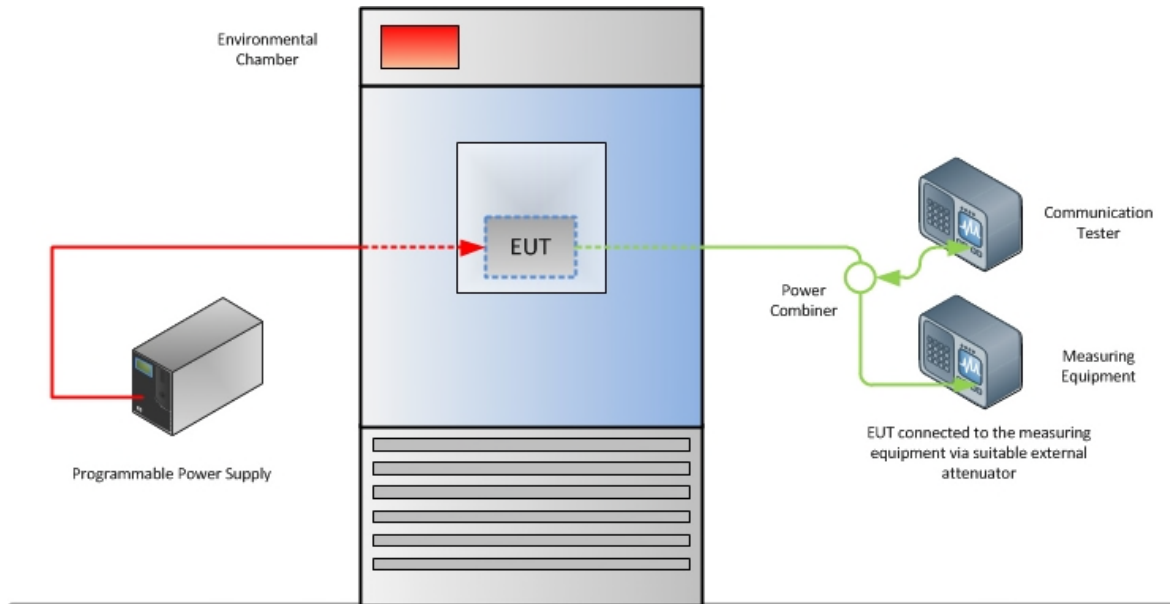


Frequency Stability Test Configuration

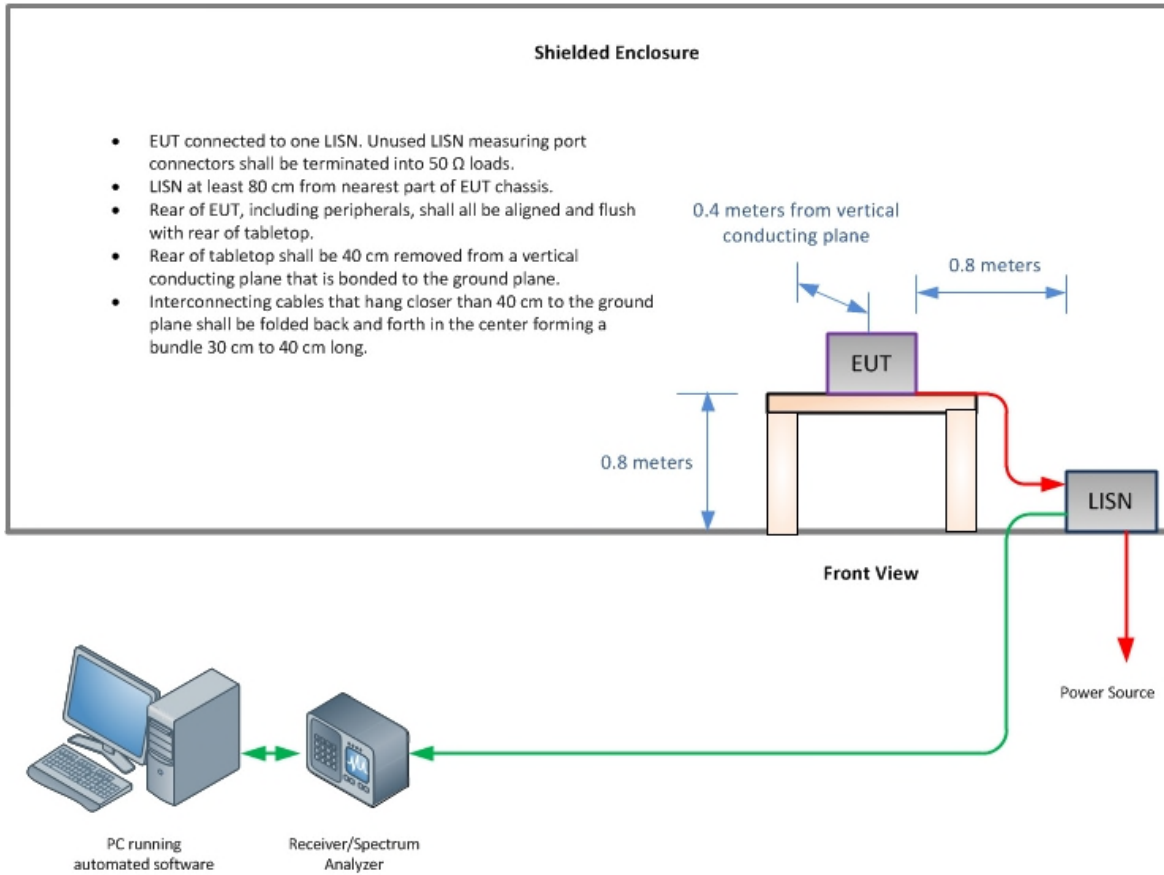

Conducted Emissions Test Configuration (if applicable)

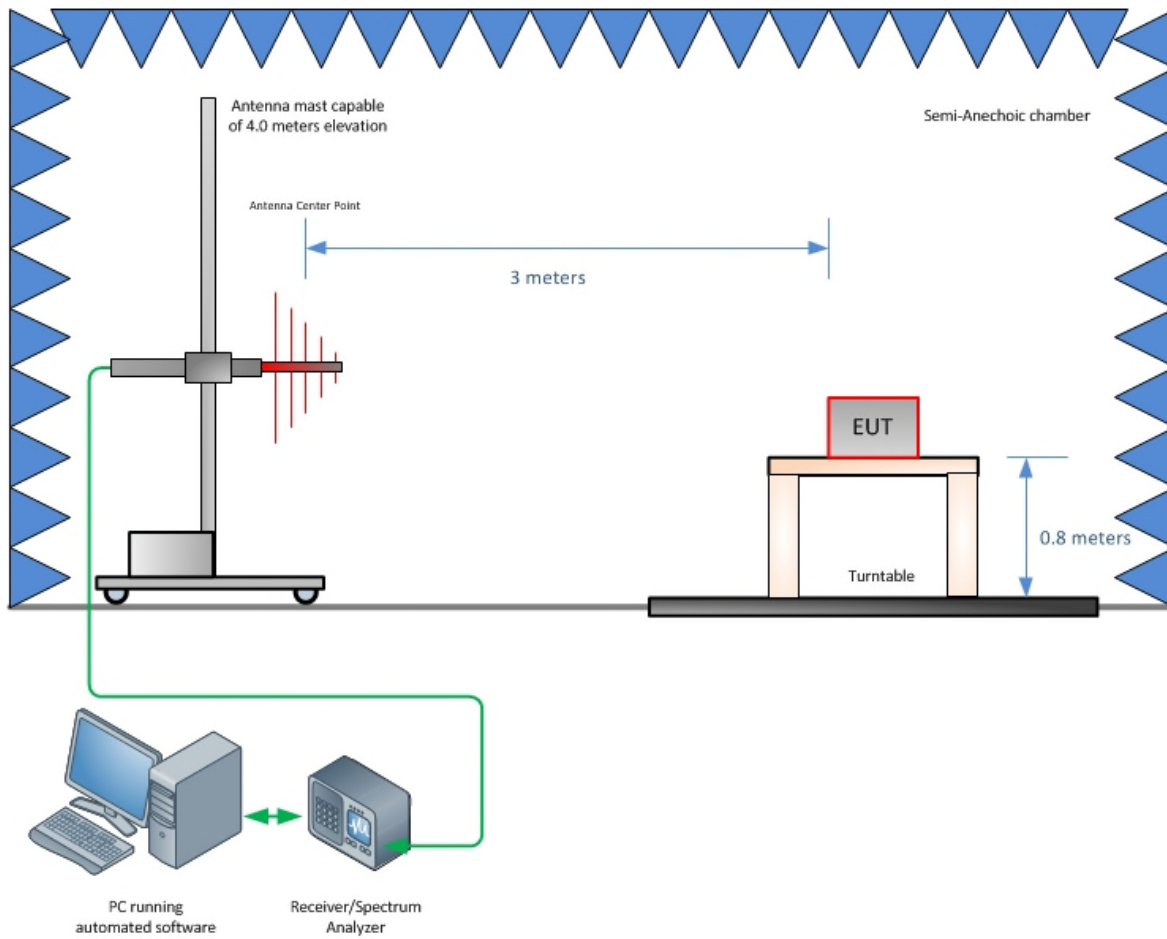

Radiated Emission Test Setup (Below 1GHz)

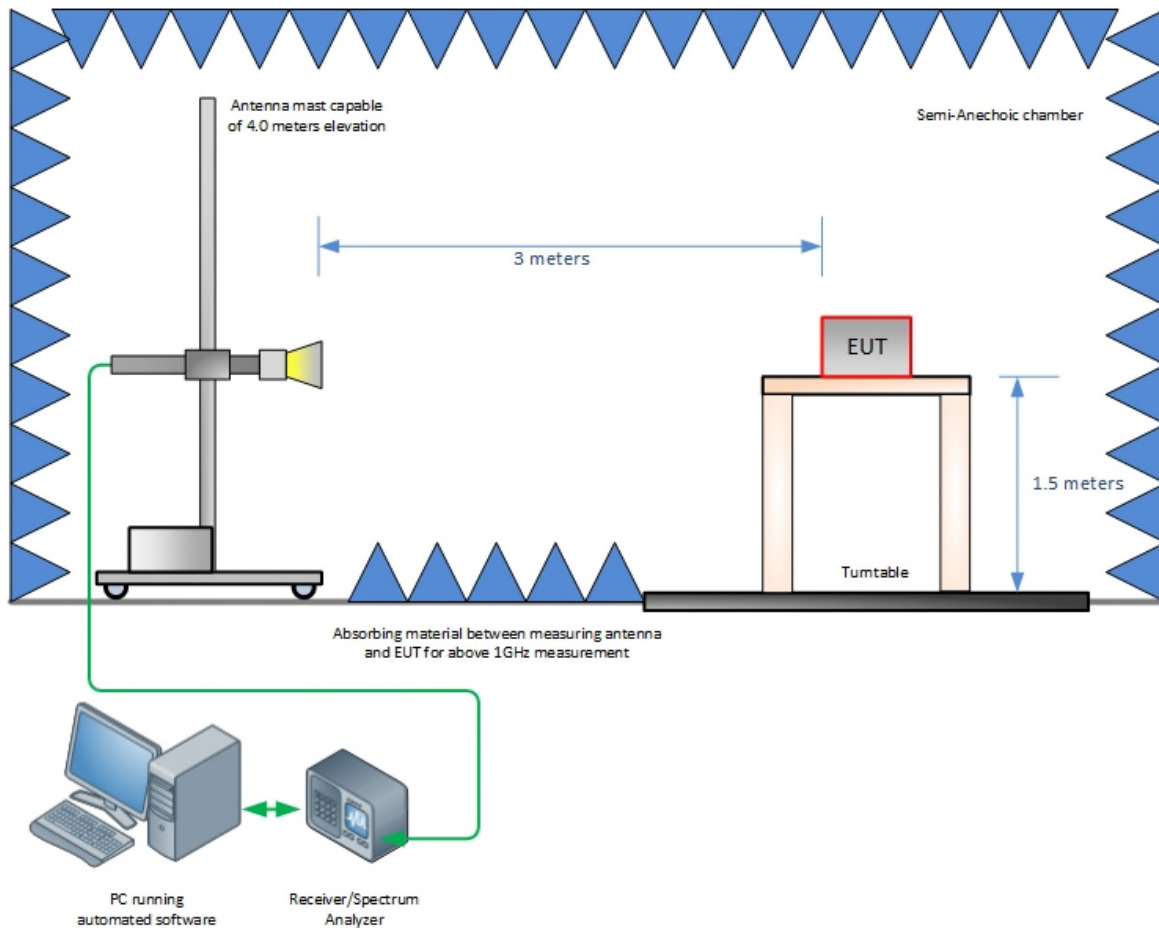

Radiated Emission Test Setup (Above 1GHz)



SECTION 6

ACCREDITATION, DISCLAIMERS AND COPYRIGHT



6.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT

TÜV SÜD America Inc.'s reports apply only to the specific sample tested under stated test conditions. It is the manufacturer's responsibility to assure the continued compliance of production units of this model. TÜV SÜD America, Inc. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD America, Inc.'s issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and TÜV SÜD America, Inc., extracts from the test report shall not be reproduced, except in full without TÜV SÜD America, Inc.'s written approval.

This report must not be used to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the federal government.



A2LA Cert. No. 2955.13

