

2.7 FIELD STRENGTH OF SPURIOUS RADIATION

2.7.1 Specification Reference

FCC 47 CFR Part 2, Clause 2.1053
 FCC 47 CFR Part 90, Clause 90.219(e)
 FCC 47 CFR Part 90, Clause 90.543(e)(1)(3)(f)
 RSS-140 issue 1, Clause 4.4
 KDB935210 D05, Clause 4.9

2.7.2 Standard Applicable

FCC 47 CFR Part 90, Clause 90.219(e):
 (3) Spurious emissions from a signal booter must not exceed -13 dBm within any 100 kHz measurement bandwidth.

FCC 47 CFR Part 90, Clause 90.543:

(e) For operations in the 758–768 MHz and the 788–798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On all frequencies between 769–775 MHz and 799–805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations.

(3) On any frequency between 775–788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log (P)$ dB.

(f) For operations in the 758–775 MHz and 788–805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

RSS-140:

4.4 Transmitter unwanted emissions limits

The power of any unwanted emission outside the bands 758-768 MHz and 788-798 MHz shall be attenuated below the transmitter output power P in dBW as follows, where p is the transmitter output power in watts:

a. For any frequency between 769-775 MHz and 799-806 MHz:

- i $76 + 10 \log (p)$, dB in a 6.25 kHz band for fixed and base station equipment
- ii $65 + 10 \log (p)$, dB in a 6.25 kHz band for mobile and portable/hand-held equipment

b For any frequency between 775-788 MHz, above 806 MHz, and below 758 MHz: $43 + 10 \log (p)$, dB in a bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency bands 758-768 MHz and 788-798 MHz, a resolution bandwidth of 30 kHz may be employed.

In addition, the equivalent isotropically radiated power (e.i.r.p.) of all emissions, including harmonics in the band 1559-1610 MHz, shall not exceed -70 dBW/MHz for wideband emissions, and -80 dBW/kHz for discrete emissions of less than 700 Hz bandwidth.

2.7.3 Equipment Under Test and Modification State

Serial No: NU: 976036000256 and CU: 977036000055 / Test Configuration C and D



2.7.4 Date of Test/Initial of test personnel who performed the test

October 09, 2020 / XYZ

2.7.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.7.6 Environmental Conditions/ Test Location

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility

| | |
|---------------------|---------|
| Ambient Temperature | 23.8°C |
| Relative Humidity | 41.4% |
| ATM Pressure | 98.7kPa |


2.7.7 Additional Observations

- This is a radiated test using the Direct Radiated Field Strength method of C63.26 2015.
- This is cabinet spurious emissions testing. Main antenna port was terminated during the test. Fundamental frequency measurement will be ignored for this test.
- Only the worst case configuration presented in this test report.
- Measurement was done using EMC32 automated software. Reported level is the actual level with all the correction factors factored in. Correction Factor column is for informational purposes only.

2.7.8 Test Results

Compliant. See attached plots.


2.7.9 Test Results Below 1GHz (LTE Band 14 Downlink Worst Case Configuration) - 10MHz Bandwidth Middle Channel

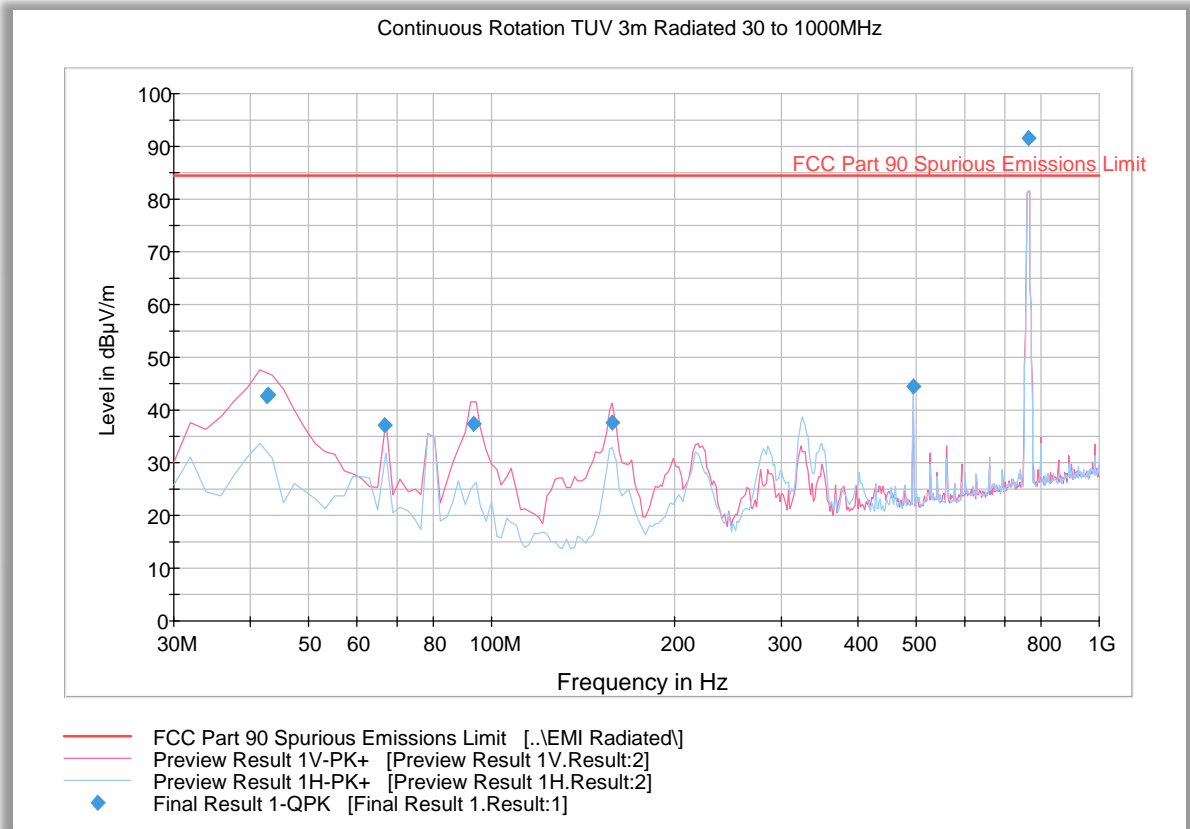

Quasi Peak Data

| Frequency (MHz) | QuasiPeak (dB μ V/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dB μ V/m) |
|-----------------|--------------------------|-----------------|-----------------|-------------|--------------|---------------|------------|---------------------|----------------------|
| 42.647214 | 42.5 | 1000.0 | 120.000 | 100.0 | V | 148.0 | -14.5 | 41.9 | 84.4 |
| 42.783327 | 42.8 | 1000.0 | 120.000 | 100.0 | V | 159.0 | -14.5 | 41.6 | 84.4 |
| 66.533868 | 37.2 | 1000.0 | 120.000 | 138.0 | V | 71.0 | -18.1 | 47.2 | 84.4 |
| 93.308297 | 37.3 | 1000.0 | 120.000 | 100.0 | V | 227.0 | -14.6 | 47.1 | 84.4 |
| 157.776593 | 37.5 | 1000.0 | 120.000 | 100.0 | V | 54.0 | -13.3 | 46.9 | 84.4 |
| 494.989178 | 44.4 | 1000.0 | 120.000 | 134.0 | H | 334.0 | -2.6 | 40.0 | 84.4 |
| 763.253467 | 91.5 | 1000.0 | 120.000 | 250.0 | H | 136.0 | 1.9 | Fundamental Carrier | |

2.7.10 Test Results Above 1GHz (LTE Band 14 Downlink Worst Case Configuration) - 10MHz Bandwidth Middle Channel

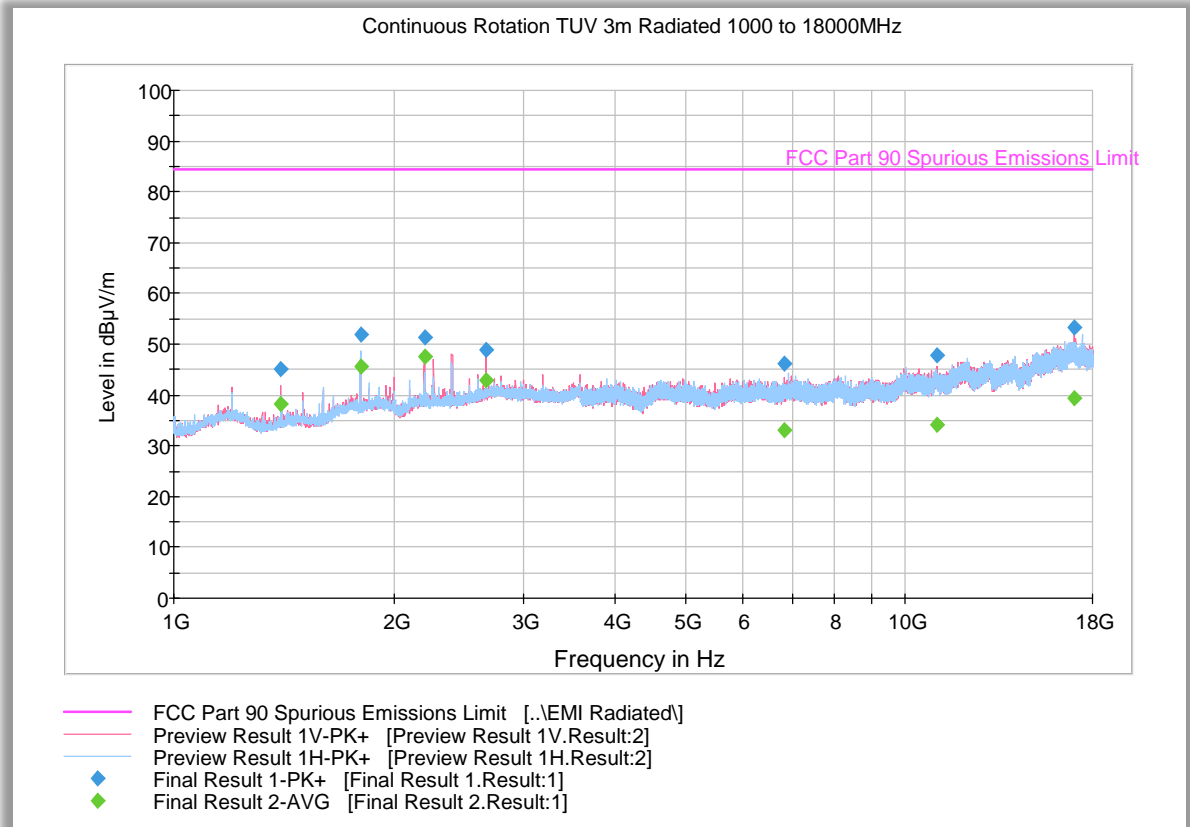


Peak Data

| Frequency (MHz) | MaxPeak (dBµV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBµV/m) |
|-----------------|------------------|-----------------|-----------------|-------------|--------------|---------------|------------|-------------|----------------|
| 1399.866667 | 45.2 | 1000.0 | 1000.000 | 221.4 | V | 169.0 | -5.7 | 39.2 | 84.4 |
| 1799.933333 | 51.8 | 1000.0 | 1000.000 | 190.5 | H | 139.0 | -3.6 | 32.6 | 84.4 |
| 2200.000000 | 51.3 | 1000.0 | 1000.000 | 220.4 | V | 26.0 | -1.1 | 33.1 | 84.4 |
| 2666.766667 | 49.0 | 1000.0 | 1000.000 | 103.7 | V | 349.0 | 0.4 | 35.4 | 84.4 |
| 6821.733333 | 46.2 | 1000.0 | 1000.000 | 352.7 | V | 248.0 | 7.2 | 38.2 | 84.4 |
| 11025.30000 | 47.9 | 1000.0 | 1000.000 | 234.4 | V | 125.0 | 11.3 | 36.5 | 84.4 |
| 16976.00000 | 53.1 | 1000.0 | 1000.000 | 143.7 | V | 301.0 | 18.4 | 31.3 | 84.4 |

Average Data

| Frequency (MHz) | Average (dBµV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBµV/m) |
|-----------------|------------------|-----------------|-----------------|-------------|--------------|---------------|------------|-------------|----------------|
| 1399.866667 | 38.1 | 1000.0 | 1000.000 | 221.4 | V | 169.0 | -5.7 | 46.3 | 84.4 |
| 1799.933333 | 45.5 | 1000.0 | 1000.000 | 190.5 | H | 139.0 | -3.6 | 38.9 | 84.4 |
| 2200.000000 | 47.6 | 1000.0 | 1000.000 | 220.4 | V | 26.0 | -1.1 | 36.8 | 84.4 |
| 2666.766667 | 43.0 | 1000.0 | 1000.000 | 103.7 | V | 349.0 | 0.4 | 41.4 | 84.4 |
| 6821.733333 | 33.0 | 1000.0 | 1000.000 | 352.7 | V | 248.0 | 7.2 | 51.4 | 84.4 |
| 11025.30000 | 34.3 | 1000.0 | 1000.000 | 234.4 | V | 125.0 | 11.3 | 50.1 | 84.4 |
| 16976.00000 | 39.5 | 1000.0 | 1000.000 | 143.7 | V | 301.0 | 18.4 | 44.9 | 84.4 |


2.7.11 Test Results Below 1GHz (LTE Band 14 Uplink Worst Case Configuration) - 5MHz Bandwidth Top Channel

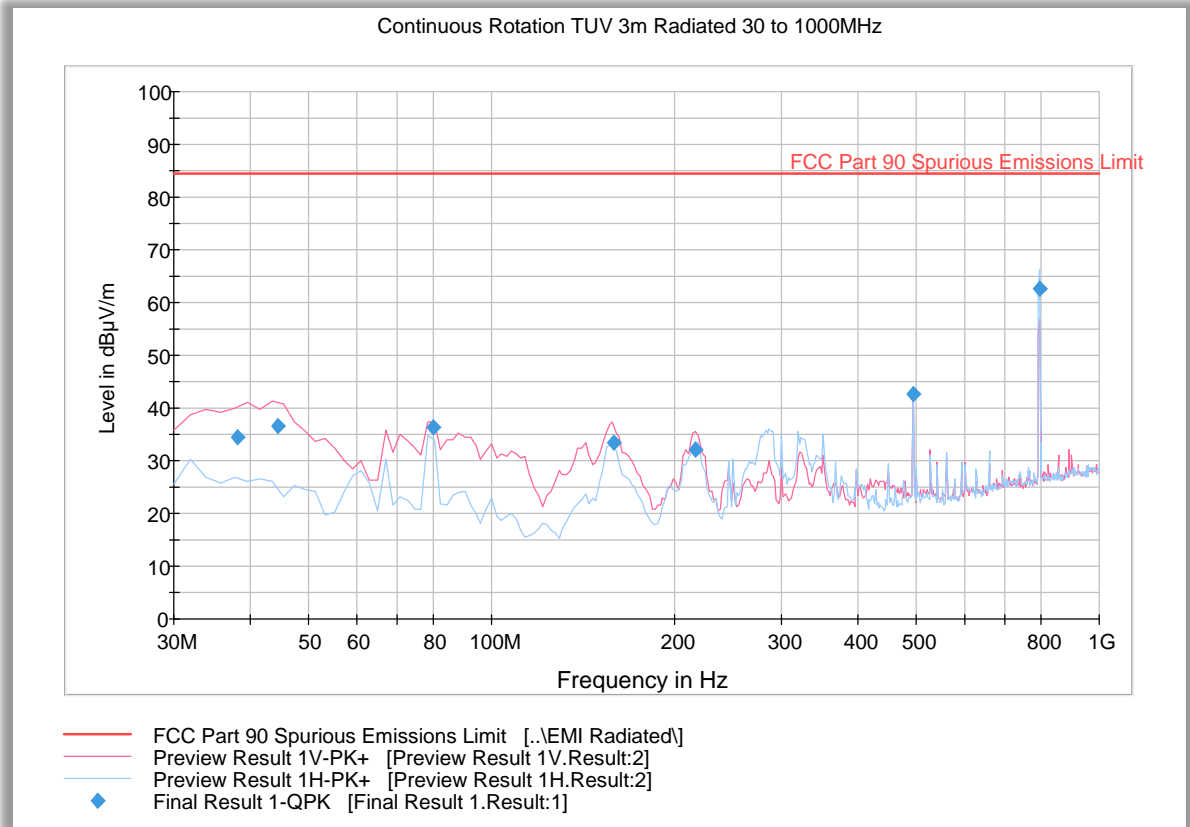

Quasi Peak Data

| Frequency (MHz) | QuasiPeak (dBµV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBµV/m) |
|-----------------|--------------------|-----------------|-----------------|-------------|--------------|---------------|------------|---------------------|----------------|
| 38.159439 | 34.6 | 1000.0 | 120.000 | 106.0 | V | 170.0 | -13.7 | 49.8 | 84.4 |
| 44.527214 | 36.5 | 1000.0 | 120.000 | 100.0 | V | 240.0 | -14.8 | 47.9 | 84.4 |
| 79.997194 | 36.3 | 1000.0 | 120.000 | 105.0 | V | 332.0 | -17.6 | 48.1 | 84.4 |
| 158.976593 | 33.4 | 1000.0 | 120.000 | 115.0 | V | 287.0 | -13.2 | 51.0 | 84.4 |
| 216.533226 | 32.0 | 1000.0 | 120.000 | 110.0 | V | 311.0 | -11.4 | 52.4 | 84.4 |
| 494.989178 | 42.8 | 1000.0 | 120.000 | 109.0 | V | 322.0 | -2.6 | 41.6 | 84.4 |
| 796.171784 | 62.5 | 1000.0 | 120.000 | 100.0 | H | 305.0 | 2.9 | Fundamental Carrier | 84.4 |

2.7.12 Test Results Above 1GHz (LTE Band 14 Uplink Worst Case Configuration) - 5MHz Bandwidth Low Channel

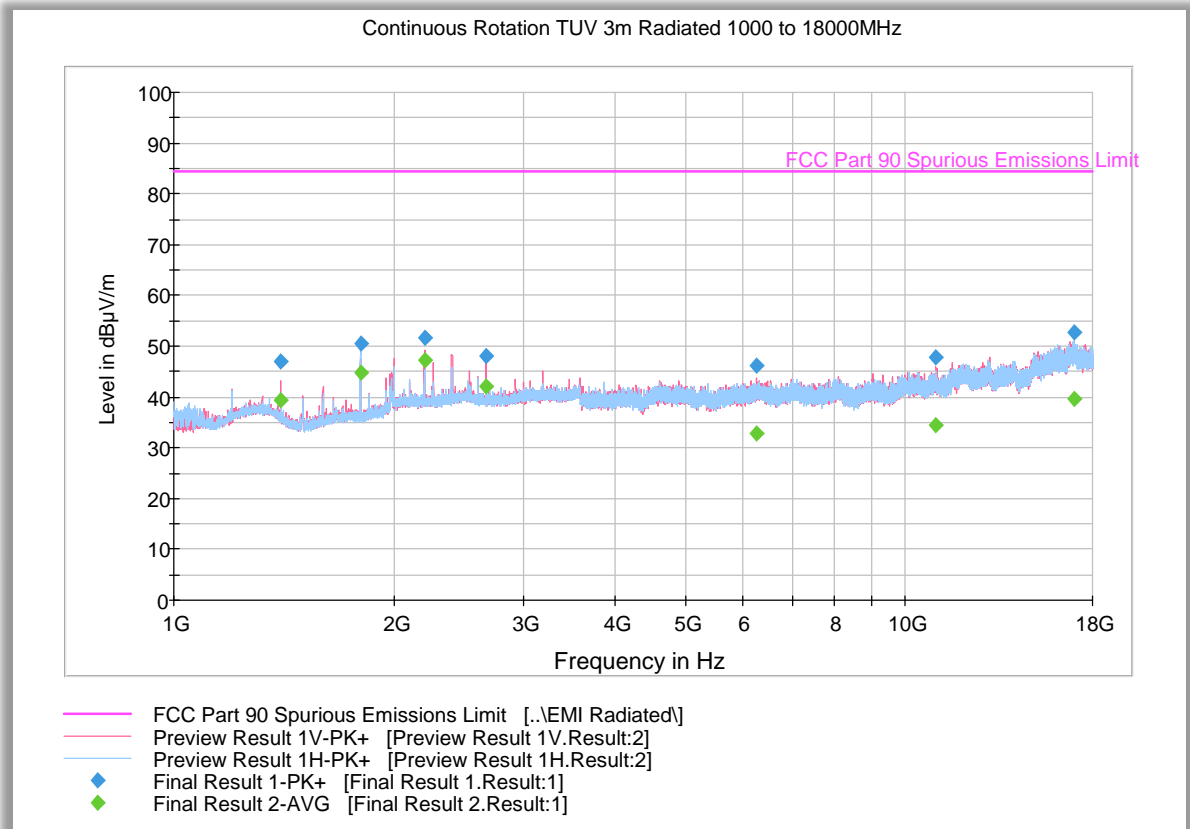


Peak Data

| Frequency (MHz) | MaxPeak (dBµV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBµV/m) |
|-----------------|------------------|-----------------|-----------------|-------------|--------------|---------------|------------|-------------|----------------|
| 1399.900000 | 47.0 | 1000.0 | 1000.000 | 220.4 | V | 154.0 | -5.7 | 37.4 | 84.4 |
| 1799.966667 | 50.5 | 1000.0 | 1000.000 | 207.5 | H | 169.0 | -3.6 | 33.9 | 84.4 |
| 2200.000000 | 51.7 | 1000.0 | 1000.000 | 212.4 | V | 25.0 | -1.1 | 32.7 | 84.4 |
| 2666.766667 | 48.1 | 1000.0 | 1000.000 | 103.7 | V | -14.0 | 0.4 | 36.3 | 84.4 |
| 6256.833333 | 46.1 | 1000.0 | 1000.000 | 306.2 | V | 251.0 | 6.7 | 38.3 | 84.4 |
| 11003.16666 | 47.8 | 1000.0 | 1000.000 | 103.7 | V | 158.0 | 11.3 | 36.6 | 84.4 |
| 17004.00000 | 52.9 | 1000.0 | 1000.000 | 182.6 | H | 357.0 | 18.4 | 31.5 | 84.4 |

Average Data

| Frequency (MHz) | Average (dBµV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBµV/m) |
|-----------------|------------------|-----------------|-----------------|-------------|--------------|---------------|------------|-------------|----------------|
| 1399.900000 | 39.3 | 1000.0 | 1000.000 | 220.4 | V | 154.0 | -5.7 | 45.1 | 84.4 |
| 1799.966667 | 44.8 | 1000.0 | 1000.000 | 207.5 | H | 169.0 | -3.6 | 39.6 | 84.4 |
| 2200.000000 | 47.3 | 1000.0 | 1000.000 | 212.4 | V | 25.0 | -1.1 | 37.1 | 84.4 |
| 2666.766667 | 42.1 | 1000.0 | 1000.000 | 103.7 | V | -14.0 | 0.4 | 42.3 | 84.4 |
| 6256.833333 | 32.8 | 1000.0 | 1000.000 | 306.2 | V | 251.0 | 6.7 | 51.6 | 84.4 |
| 11003.16666 | 34.3 | 1000.0 | 1000.000 | 103.7 | V | 158.0 | 11.3 | 50.1 | 84.4 |
| 17004.00000 | 39.7 | 1000.0 | 1000.000 | 182.6 | H | 357.0 | 18.4 | 44.7 | 84.4 |

2.7.13 Test Results Above 1GHz (LTE Band 14 Uplink Worst Case Configuration) - 5MHz Bandwidth Middle Channel

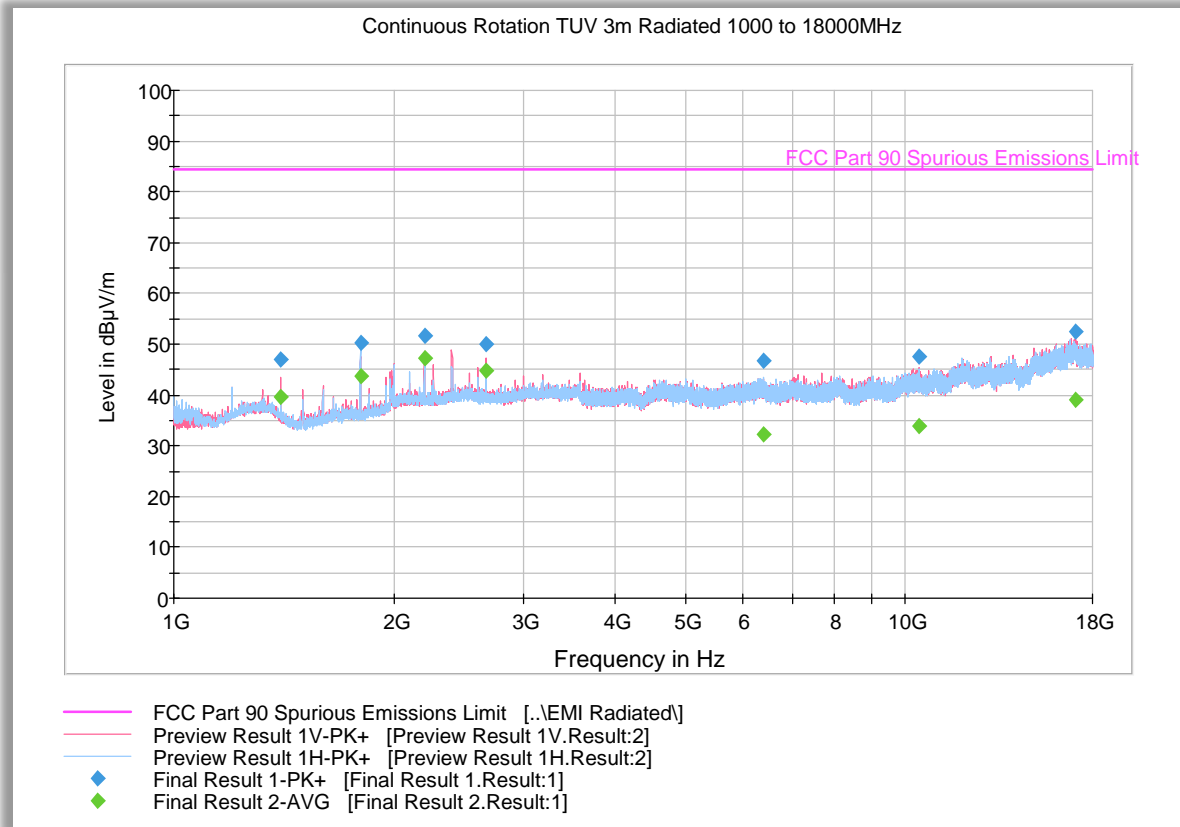


Peak Data

| Frequency (MHz) | MaxPeak (dBµV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBµV/m) |
|-----------------|------------------|-----------------|-----------------|-------------|--------------|---------------|------------|-------------|----------------|
| 1399.900000 | 47.0 | 1000.0 | 1000.000 | 217.4 | V | 153.0 | -5.7 | 37.4 | 84.4 |
| 1800.166667 | 50.3 | 1000.0 | 1000.000 | 217.4 | H | 165.0 | -3.6 | 34.1 | 84.4 |
| 2199.833333 | 51.6 | 1000.0 | 1000.000 | 212.4 | V | 172.0 | -1.1 | 32.8 | 84.4 |
| 2666.766667 | 49.9 | 1000.0 | 1000.000 | 103.7 | V | -8.0 | 0.4 | 34.5 | 84.4 |
| 6402.966667 | 46.6 | 1000.0 | 1000.000 | 112.7 | H | 38.0 | 6.8 | 37.8 | 84.4 |
| 10438.766666 | 47.6 | 1000.0 | 1000.000 | 135.7 | V | 28.0 | 10.5 | 36.8 | 84.4 |
| 17090.900000 | 52.3 | 1000.0 | 1000.000 | 161.6 | V | 193.0 | 18.4 | 32.1 | 84.4 |

Average Data

| Frequency (MHz) | Average (dBµV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBµV/m) |
|-----------------|------------------|-----------------|-----------------|-------------|--------------|---------------|------------|-------------|----------------|
| 1399.900000 | 39.5 | 1000.0 | 1000.000 | 217.4 | V | 153.0 | -5.7 | 44.9 | 84.4 |
| 1800.166667 | 43.7 | 1000.0 | 1000.000 | 217.4 | H | 165.0 | -3.6 | 40.7 | 84.4 |
| 2199.833333 | 47.2 | 1000.0 | 1000.000 | 212.4 | V | 172.0 | -1.1 | 37.2 | 84.4 |
| 2666.766667 | 44.9 | 1000.0 | 1000.000 | 103.7 | V | -8.0 | 0.4 | 39.5 | 84.4 |
| 6402.966667 | 32.3 | 1000.0 | 1000.000 | 112.7 | H | 38.0 | 6.8 | 52.1 | 84.4 |
| 10438.766666 | 33.9 | 1000.0 | 1000.000 | 135.7 | V | 28.0 | 10.5 | 50.5 | 84.4 |
| 17090.900000 | 39.2 | 1000.0 | 1000.000 | 161.6 | V | 193.0 | 18.4 | 45.3 | 84.4 |

2.7.14 Test Results Above 1GHz (LTE Band 14 Uplink Worst Case Configuration) - 5MHz Bandwidth High Channel

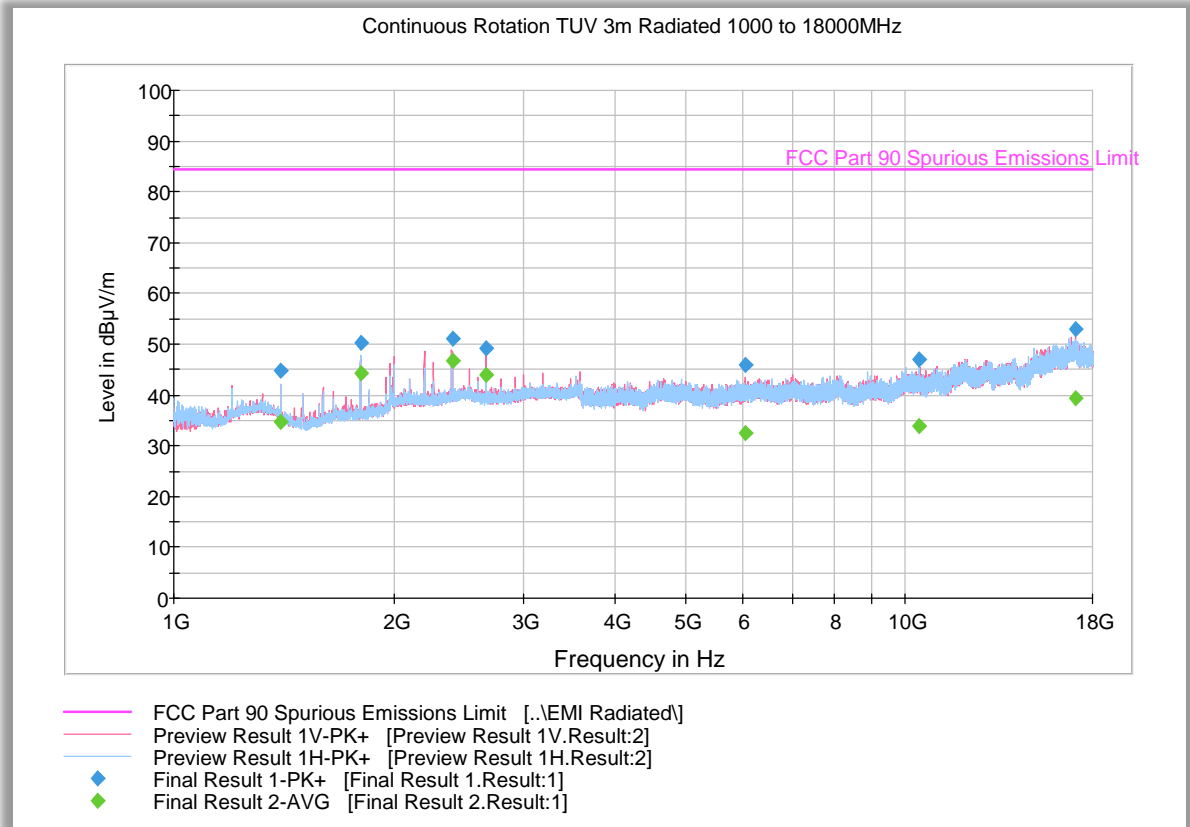

Peak Data

| Frequency (MHz) | MaxPeak (dBµV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBµV/m) |
|-----------------|------------------|-----------------|-----------------|-------------|--------------|---------------|------------|-------------|----------------|
| 1399.700000 | 44.8 | 1000.0 | 1000.000 | 102.7 | H | 159.0 | -5.7 | 39.6 | 84.4 |
| 1799.766667 | 50.2 | 1000.0 | 1000.000 | 209.4 | H | 170.0 | -3.6 | 34.2 | 84.4 |
| 2399.866667 | 51.0 | 1000.0 | 1000.000 | 116.7 | V | 132.0 | -0.3 | 33.4 | 84.4 |
| 2666.766667 | 49.3 | 1000.0 | 1000.000 | 103.7 | V | -12.0 | 0.4 | 35.1 | 84.4 |
| 6046.533333 | 45.8 | 1000.0 | 1000.000 | 221.4 | V | 97.0 | 6.5 | 38.6 | 84.4 |
| 10427.03333 | 46.9 | 1000.0 | 1000.000 | 151.2 | H | -8.0 | 10.5 | 37.5 | 84.4 |
| 17095.63333 | 53.1 | 1000.0 | 1000.000 | 352.7 | V | 310.0 | 18.4 | 31.3 | 84.4 |

Average Data

| Frequency (MHz) | Average (dBµV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBµV/m) |
|-----------------|------------------|-----------------|-----------------|-------------|--------------|---------------|------------|-------------|----------------|
| 1399.700000 | 34.7 | 1000.0 | 1000.000 | 102.7 | H | 159.0 | -5.7 | 49.7 | 84.4 |
| 1799.766667 | 44.4 | 1000.0 | 1000.000 | 209.4 | H | 170.0 | -3.6 | 40.0 | 84.4 |
| 2399.866667 | 46.7 | 1000.0 | 1000.000 | 116.7 | V | 132.0 | -0.3 | 37.7 | 84.4 |
| 2666.766667 | 43.9 | 1000.0 | 1000.000 | 103.7 | V | -12.0 | 0.4 | 40.5 | 84.4 |
| 6046.533333 | 32.6 | 1000.0 | 1000.000 | 221.4 | V | 97.0 | 6.5 | 51.8 | 84.4 |
| 10427.03333 | 33.8 | 1000.0 | 1000.000 | 151.2 | H | -8.0 | 10.5 | 50.6 | 84.4 |
| 17095.63333 | 39.3 | 1000.0 | 1000.000 | 352.7 | V | 310.0 | 18.4 | 45.1 | 84.4 |

2.8 FREQUENCY STABILITY

2.8.1 Specification Reference

FCC 47 CFR Part 2, Clause 2.1055
 FCC 47 CFR Part 90, Clause 90.213
 RSS-140 issue 1, Clause 4.2
 RSS-131 issue 3, Clause 5.2.4
 KDB935210 D05, Clause 4.8

2.8.2 Standard Applicable

FCC 47 CFR Part 2, Clause 2.1055:

(a) The frequency stability shall be measured with variation of ambient temperature as follows:
 (1) From -30° to + 50° centigrade for all equipment except that specified in paragraphs (a) (2) and (3) of this section.

FCC 47 CFR Part 90, Clause 90.213:

(a) Unless noted elsewhere, transmitters used in the services governed by this part must have a minimum frequency stability as specified in the following table:

MINIMUM FREQUENCY STABILITY

[Parts per million (ppm)]

| Frequency range (MHz) | Fixed and base stations | Mobile stations | |
|--------------------------------|-------------------------|---------------------------|------------------------------|
| | | Over 2 watts output power | 2 watts or less output power |
| Below 25 | ^{1 2 3} 100 | 100 | 200 |
| 25-50 | 20 | 20 | 50 |
| 72-76 | 5 | | 50 |
| 150-174 | ^{5 11} 5 | ⁶ 5 | ^{4 6} 50 |
| 216-220 | 1.0 | | 1.0 |
| 220-222 ¹² | 0.1 | 1.5 | 1.5 |
| 421-512 | ^{7 11 14} 2.5 | ⁸ 5 | ⁸ 5 |
| 806-809 | ¹⁴ 1.0 | 1.5 | 1.5 |
| 809-824 | ¹⁴ 1.5 | 2.5 | 2.5 |
| 851-854 | 1.0 | 1.5 | 1.5 |
| 854-869 | 1.5 | 2.5 | 2.5 |
| 896-901 | ¹⁴ 0.1 | 1.5 | 1.5 |
| 902-928 | 2.5 | 2.5 | 2.5 |
| 902-928 ¹³ | 2.5 | 2.5 | 2.5 |
| 929-930 | 1.5 | | |
| 935-940 | 0.1 | 1.5 | 1.5 |
| 1427-1435 | ⁹ 300 | 300 | 300 |
| Above 2450 ¹⁰ | | | |

RSS-140, Clause 4.2:

The frequency stability shall be sufficient to ensure that the occupied bandwidth stays within the operating frequency block when tested to the temperature and supply voltage variations specified in RSS-Gen.

2.8.3 Equipment Under Test and Modification State

Serial No: NU: 976036000256 and CU: 977036000055 / Test Configuration A and B



2.8.4 Date of Test/Initial of test personnel who performed the test

October 07, 2020 / XYZ

2.8.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.8.6 Environmental Conditions/ Test Location

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility

| | |
|---------------------|---------|
| Ambient Temperature | 23.6°C |
| Relative Humidity | 44.7% |
| ATM Pressure | 99.0kPa |

2.8.7 Additional Observations

- This is a conducted test.
- EUT Downlink transmits on two internal antennas and uplink transmits on two external antennas simultaneously in the same frequency range, i.e. TX MIMO mode. However, there is no much difference between two antenna ports and the measurement was performed on one antenna port as representative configuration.
- The EUT was operated at 120.0VAC nominal voltage and was placed in the temperature chamber for the series of evaluations performed.
- Test was performed on 5 MHz Bandwidth Mid channel as the representative configuration. Input Type "Tones" was selected and the EUT was injected a CW signal from a Signal Generator and maximum frequency error was monitored using the spectrum analyzer.
- The Temperature was reduced to -30°C and allowed to sit for 1 hour to allow the equipment and chamber temperature to stabilize. The measurements on both downlink and uplink were then performed. The temperature was then increased by 10°C steps and allowed to settle before taking the next set of measurements. The EUT was tested over the temperature -30°C to +50°C.
- Voltage variation was also performed at 85% and 115% of the nominal voltage.

2.8.8 Test Results Summary


| LTE B14 Downlink – 5 MHz BW Middle Channel | | | | |
|--|------------------|----------------------|-----------------------|-------------|
| Voltage (VDC) | Temperature (°C) | Frequency Error (Hz) | Frequency Error (ppm) | Limit (ppm) |
| 120 | -30 | 0 | 0 | - |
| | -20 | 0 | 0 | - |
| | -10 | 0 | 0 | - |
| | 0 | 0 | 0 | - |
| | +10 | 0 | 0 | - |
| | +20 | 0 | 0 | - |
| | +30 | 0 | 0 | - |
| | +40 | 0 | 0 | - |
| | +50 | 0 | 0 | - |
| 102 | +20 | 0 | 0 | - |
| 138 | | 0 | 0 | - |

The frequency stability of the EUT is sufficient to keep it within the authorised frequency ranges at any temperature interval and voltage variations across the measured range.


| LTE B14 Uplink – 5 MHz BW Middle Channel | | | | |
|--|------------------|----------------------|-----------------------|-------------|
| Voltage (VDC) | Temperature (°C) | Frequency Error (Hz) | Frequency Error (ppm) | Limit (ppm) |
| 120 | -30 | 0 | 0 | - |
| | -20 | 0 | 0 | - |
| | -10 | 0 | 0 | - |
| | 0 | 0 | 0 | - |
| | +10 | 0 | 0 | - |
| | +20 | 0 | 0 | - |
| | +30 | 0 | 0 | - |
| | +40 | 0 | 0 | - |
| | +50 | 0 | 0 | - |
| 102 | +20 | 0 | 0 | - |
| 138 | | 0 | 0 | - |

The frequency stability of the EUT is sufficient to keep it within the authorised frequency ranges at any temperature interval and voltage variations across the measured range.

2.8.9 Sample Test Plots

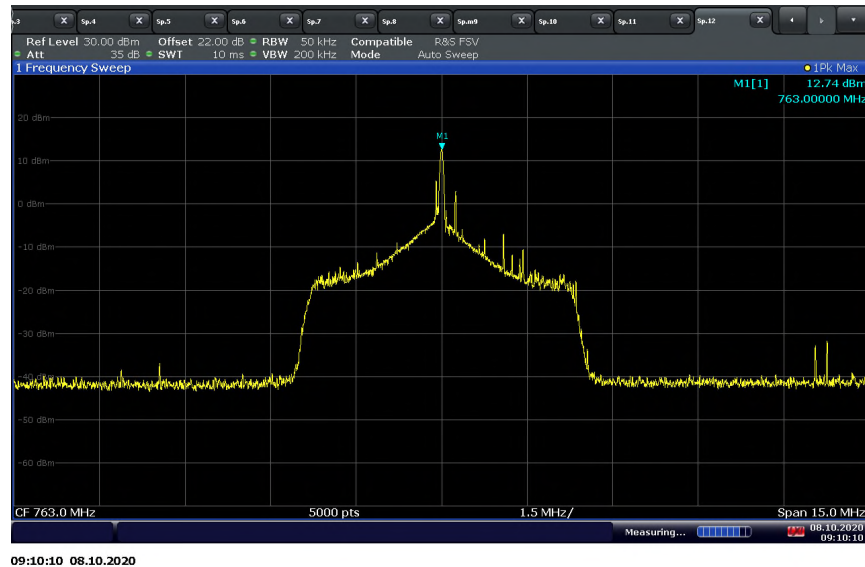

LTE Band 14 Downlink 5MHz Bandwidth Middle Channel 120VAC @ 20°C

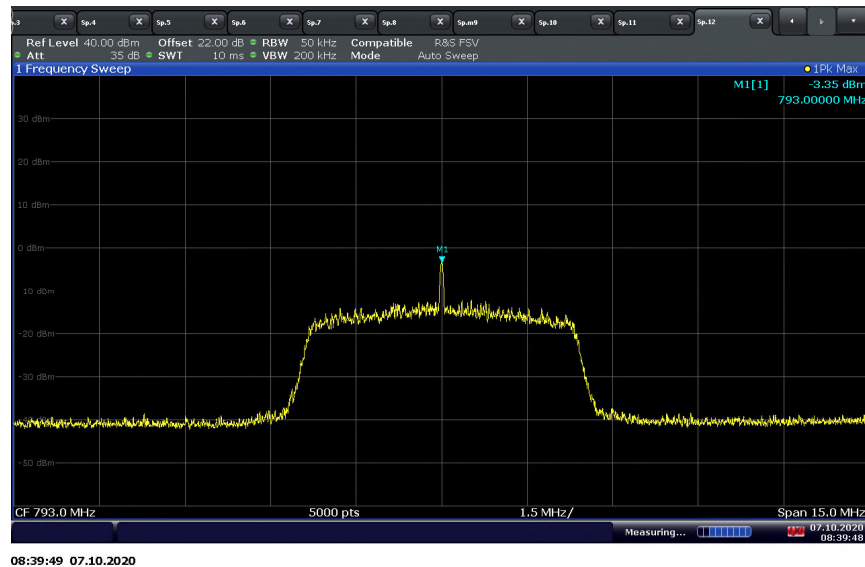

LTE Band 14 Uplink 5MHz Bandwidth Middle Channel 120VAC @ 20°C

2.9 POWER LINE CONDUCTED EMISSIONS

2.9.1 Specification Reference

RSS-Gen, Clause 8.8

2.9.2 Standard Applicable

A radio apparatus that is designed to be connected to the public utility (AC) power line shall ensure that the radio frequency voltage, which is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz-30 MHz, shall not exceed the limits in table below.

Unless the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in table below. The more stringent limit applies at the frequency range boundaries.

| Frequency of emission (MHz) | Conducted limit (dB μ V) | |
|-----------------------------|------------------------------|-----------|
| | Quasi-peak | Average |
| 0.15–0.5 | 66 to 56* | 56 to 46* |
| 0.5–5 | 56 | 46 |
| 5–30 | 60 | 50 |

**Decreases with the logarithm of the frequency.*

2.9.3 Equipment Under Test and Modification State

Serial No: NU: 976036000256 and CU: 977036000055 / Test Configuration E

2.9.4 Date of Test/Initial of test personnel who performed the test

October 12, 2020 / XYZ

2.9.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.9.6 Environmental Conditions/ Test Location

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility

| | |
|---------------------|----------|
| Ambient Temperature | 23.2 °C |
| Relative Humidity | 48.7 % |
| ATM Pressure | 98.7 kPa |


2.9.7 Additional Observations

- The EUT was verified using AC adapter supplied by the manufacturer.
- EUT verified using input voltage of 120VAC 60Hz.
- There are no significant variations in test results between different operating modes. Only the one worst operation mode is presented.
- Measurement was done using EMC32 automated software. Reported level is the actual level with all the correction factors factored in. Correction Factor column is for informational purposes only. See Section 2.9.8 for sample computation.

2.9.8 Sample Computation (Conducted Emission – Quasi Peak)

| | | | |
|--|--------------------------------|------|------|
| Measuring equipment raw measurement (dbμV) @ 150kHz | | | 5.5 |
| Correction Factor (dB) | Asset# 8607 (20 dB attenuator) | 19.9 | 20.7 |
| | Asset# 1177 (cable) | 0.15 | |
| | Asset# 1176 (cable) | 0.35 | |
| | Asset# 7567 (LISN) | 0.30 | |
| Reported QuasiPeak Final Measurement (dbμV) @ 150kHz | | | 26.2 |

2.9.9 Test Results - Conducted Emissions Line 1 - Hot

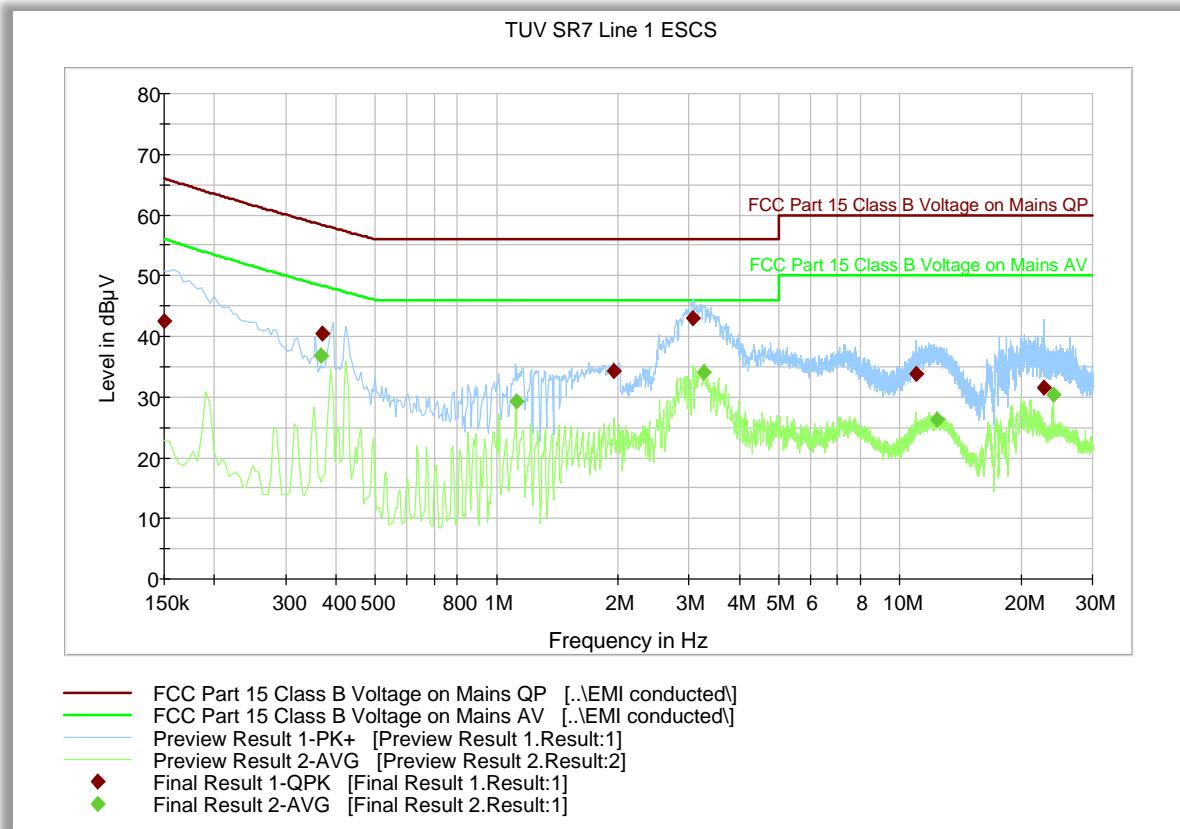


Quasi Peak

| Frequency (MHz) | QuasiPeak (dBµV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin – QPK (dB) | Limit - QPK (dBµV) |
|-----------------|------------------|-----------------|-----------------|--------|------|------------|-------------------|--------------------|
| 0.150000 | 42.4 | 1000.0 | 9.000 | Off | L1 | 20.4 | 23.6 | 66.0 |
| 0.370500 | 40.5 | 1000.0 | 9.000 | Off | L1 | 20.4 | 17.8 | 58.3 |
| 1.954500 | 34.3 | 1000.0 | 9.000 | Off | L1 | 20.4 | 21.7 | 56.0 |
| 3.070500 | 43.1 | 1000.0 | 9.000 | Off | L1 | 20.2 | 12.9 | 56.0 |
| 10.981500 | 33.8 | 1000.0 | 9.000 | Off | L1 | 20.4 | 26.2 | 60.0 |
| 22.794000 | 31.6 | 1000.0 | 9.000 | Off | L1 | 20.7 | 28.4 | 60.0 |

Average

| Frequency (MHz) | Average (dBµV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin – Ave (dB) | Limit - Ave (dBµV) |
|-----------------|----------------|-----------------|-----------------|--------|------|------------|-------------------|--------------------|
| 0.366000 | 36.7 | 1000.0 | 9.000 | Off | L1 | 20.4 | 11.7 | 48.4 |
| 0.366000 | 36.8 | 1000.0 | 9.000 | Off | L1 | 20.4 | 11.6 | 48.4 |
| 1.117500 | 29.3 | 1000.0 | 9.000 | Off | L1 | 20.4 | 16.7 | 46.0 |
| 3.264000 | 34.0 | 1000.0 | 9.000 | Off | L1 | 20.3 | 12.0 | 46.0 |
| 12.354000 | 26.4 | 1000.0 | 9.000 | Off | L1 | 20.4 | 23.6 | 50.0 |
| 24.000000 | 30.3 | 1000.0 | 9.000 | Off | L1 | 20.6 | 19.7 | 50.0 |

2.9.10 FCC Conducted Emissions Line 2 – Neutral

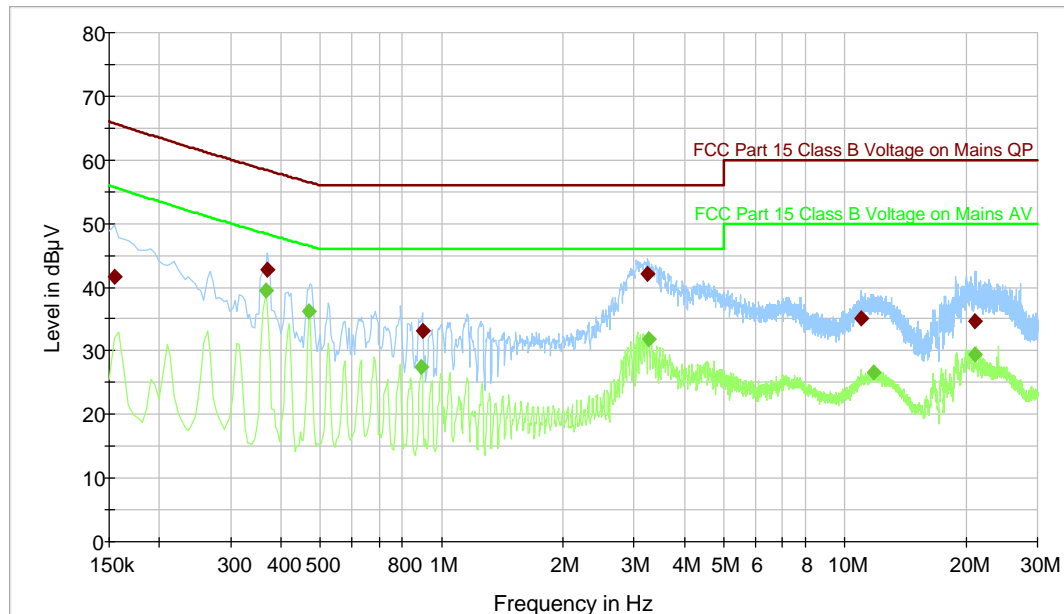

- FCC Part 15 Class B Voltage on Mains QP [..\EMI conducted\]
- FCC Part 15 Class B Voltage on Mains AV [..\EMI conducted\]
- Preview Result 1-PK+ [Preview Result 1.Result:1]
- Preview Result 2-AVG [Preview Result 2.Result:2]
- ◆ Final Result 1-QPK [Final Result 1.Result:1]
- ◆ Final Result 2-AVG [Final Result 2.Result:1]

Quasi Peak

| Frequency (MHz) | QuasiPeak (dBµV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin – QPK (dB) | Limit - QPK (dBµV) |
|-----------------|------------------|-----------------|-----------------|--------|------|------------|-------------------|--------------------|
| 0.154500 | 41.7 | 1000.0 | 9.000 | Off | N | 20.3 | 24.0 | 65.7 |
| 0.370500 | 42.7 | 1000.0 | 9.000 | Off | N | 20.4 | 15.6 | 58.3 |
| 0.897000 | 33.0 | 1000.0 | 9.000 | Off | N | 20.4 | 23.0 | 56.0 |
| 3.241500 | 42.0 | 1000.0 | 9.000 | Off | N | 20.3 | 14.0 | 56.0 |
| 10.959000 | 35.2 | 1000.0 | 9.000 | Off | N | 20.4 | 24.8 | 60.0 |
| 20.953500 | 34.7 | 1000.0 | 9.000 | Off | N | 20.4 | 25.3 | 60.0 |

Average

| Frequency (MHz) | Average (dBµV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin – Ave (dB) | Limit - Ave (dBµV) |
|-----------------|----------------|-----------------|-----------------|--------|------|------------|-------------------|--------------------|
| 0.366000 | 39.4 | 1000.0 | 9.000 | Off | N | 20.4 | 9.0 | 48.4 |
| 0.469500 | 36.1 | 1000.0 | 9.000 | Off | N | 20.3 | 10.4 | 46.5 |
| 0.892500 | 27.6 | 1000.0 | 9.000 | Off | N | 20.4 | 18.4 | 46.0 |
| 3.264000 | 31.8 | 1000.0 | 9.000 | Off | N | 20.3 | 14.2 | 46.0 |
| 11.787000 | 26.6 | 1000.0 | 9.000 | Off | N | 20.3 | 23.4 | 50.0 |
| 21.066000 | 29.4 | 1000.0 | 9.000 | Off | N | 20.4 | 20.6 | 50.0 |



2.10 AGC THRESHOLD LEVEL

2.10.1 Specification Reference

KDB 935210 D05, Clause 4.2

2.10.2 Standard Applicable

AGC Threshold Level is tested according to KDB 935210 D05, Clause 4.2:

The AGC threshold shall be determined by applying the procedure of 4.2 (of the current KDB), but with the signal generator configured to produce a test signal defined in Table 1, a CW input signal or a digitally modulated signal, consistent with the discussion about signal type in 4.1.

Devices intended for use in 700 MHz Public Safety Broadband spectrum shall be tested using representative band-limited AWGN signal (99% OBW of 4.1 MHz) or the applicable signal type (e.g., LTE)

2.10.3 Equipment Under Test and Modification State

Serial No: NU: 976036000256 and CU: 977036000055 / Test Configuration A and B

2.10.4 Date of Test/Initial of test personnel who performed the test

September 27 and 28, 2020 / XYZ

2.10.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.10.6 Environmental Conditions/ Test Location

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility

| | |
|---------------------|----------------|
| Ambient Temperature | 21.8 - 22.3 °C |
| Relative Humidity | 49.8 - 51.6 % |
| ATM Pressure | 98.7 kPa |

2.10.7 Additional Observations

- This is a conducted test.
- EUT Downlink transmits on two internal antennas and uplink transmits on two external antennas simultaneously in the same frequency range, i.e. TX MIMO mode. However, there is no much difference between two antenna ports and the measurement was performed on one antenna port as representative configuration.
- LTE 5 MHz bandwidth Signal was used as the applicable intended operating signal type.
- When testing output power of the EUT using a power meter was used according to method 4.5.4 of this KDB, and a spectrum analyser was used according to method 3.5.3 which is for broadband signal power testing instead of 4.5.3 which is for narrowband signal power testing with setting as below when testing input power of the EUT:
 - RBW = 1% to 5% of OBW
 - VBW \geq 3 x RBW
 - RMS Detector
 - Trace average at least 100 traces
 - Span is 2 x to 3 x the OBW
- The AGC threshold level was recorded when increasing the input level until a 1 dB increase in the input signal power no longer causes a 1 dB increase in the output signal power.
- Both downlink and uplink are tested.

2.10.8 Test Results

| AGC Threshold Level | | | | | | |
|---------------------|-----------------|---------|-----------------|---------------|------|---------------------------|
| Mode | Bandwidth (MHz) | Channel | Frequency (MHz) | Average Power | | AGC Threshold Level (dBm) |
| | | | | (dBm) | (W) | |
| Downlink | 10 | 5330 | 763.0 | 10.42 | 0.01 | -83.54 |
| Uplink | 10 | 23330 | 793.0 | 21.96 | 0.16 | -78.83 |



2.11 OUT-OF-BAND REJECTION

2.11.1 Specification Reference

RSS-131 issue 3, Clause 5.2.1
KDB 935210 D05, Clause 4.3

2.11.2 Standard Applicable

RSS-131, Clause 5.2.1:

The gain-versus-frequency response and the 20 dB bandwidth of the zone enhancer shall be reported. The zone enhancer shall reject amplification of other signals outside the passband of the zone enhancer.

Out-of-Band Rejection is tested according to KDB 935210 D05, Clause 4.3.

2.11.3 Equipment Under Test and Modification State

Serial No: NU: 976036000256 and CU: 977036000055 / Test Configuration A and B

2.11.4 Date of Test/Initial of test personnel who performed the test

October 06, 2020 / XYZ

2.11.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.11.6 Environmental Conditions/ Test Location

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility


| | |
|---------------------|----------|
| Ambient Temperature | 23.8 °C |
| Relative Humidity | 31.4 % |
| ATM Pressure | 99.0 kPa |

2.11.7 Additional Observations


- This is a conducted test.
- EUT Downlink transmits on two internal antennas and uplink transmits on two external antennas simultaneously in the same frequency range, i.e. TX MIMO mode. However, there is no much difference between two antenna ports and the measurement was performed on one antenna port as representative configuration.
- LTE 5 MHz bandwidth Signal was used as the applicable intended operating signal type.
- The path loss was measured and entered as an offset.
- A swept CW signal whose frequency range is $\pm 250\%$ of the manufacturer's specified pass band is configured for the testing.
- The internal gain control of the EUT is set to the maximum gain. The input signal type is set to tones (CW).
- The CW is 3 dB below the ACG threshold (determined according to section 3.2 and 4.2 of the current KDB), and doesn't activate the AGC threshold throughout the test.
- Dwell time is 10 ms.
- Frequency Step is 50 kHz.
- RBW is between 1% and 5% of the manufacturer's rated pass band.
- VBW is 3 x RBW.
- Detector is peak and trace is max hold.
- The peak amplitude frequency f_0 is determined and two additional -20 dB markers are determined using the marker-delta method).
- The 20dB Bandwidth plot is recorded as the out-of-band rejection frequency response.
- Both downlink and uplink are tested.

2.11.8 Test Results

| LTE Band 14 | | | | | | |
|-------------|-----------------|---------|-----------------|---------------|----------|----------------|
| Mode | Bandwidth (MHz) | Channel | Frequency (MHz) | -20 dBc Point | | 20 dB BW (MHz) |
| | | | | T1 (MHz) | T2 (MHz) | |
| Downlink | 5 | 5330 | 763.0 | 760.57 | 765.49 | 4.92 |
| Uplink | 5 | 23330 | 793.0 | 790.498 | 795.514 | 5.02 |

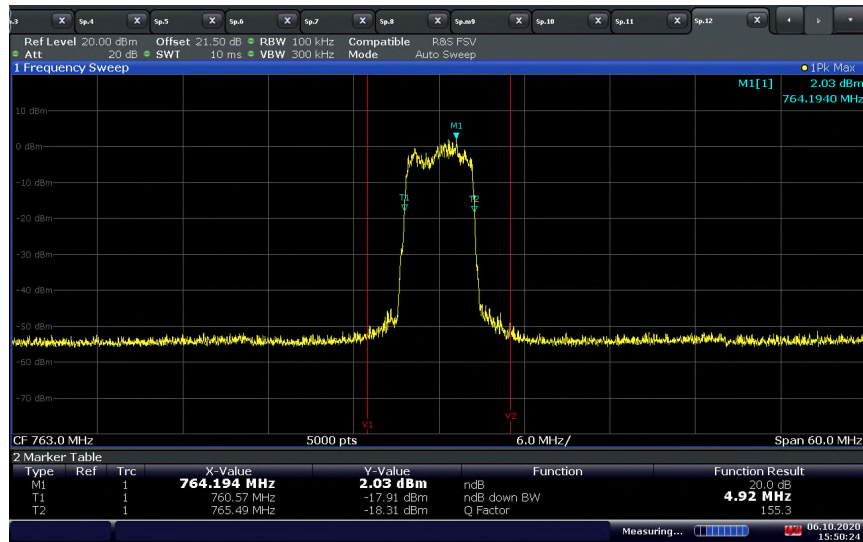LTE Band 14 Downlink (5 MHz BW) Middle Channel / Out-of-Band Rejection

15:50:25 06.10.2020

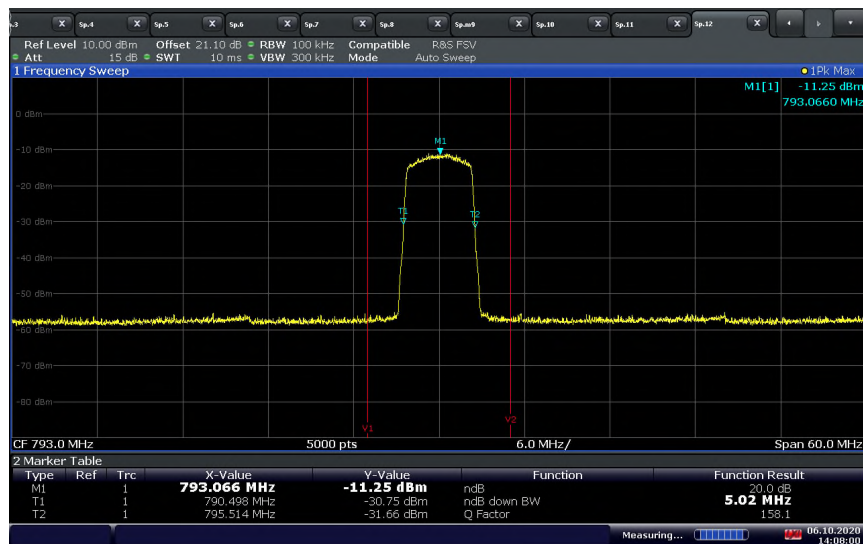LTE Band 14 Uplink (5 MHz BW) M Channel / Out-of-Band Rejection

14:08:01 06.10.2020

2.12 INPUT-VERSUS-OUTPUT SIGNAL COMPARISON

2.12.1 Specification Reference

FCC 47 CFR Part 90, Clause 90.219 (e)(4)(ii)
RSS-131 issue 3, Clause 5.2.2
KDB 935210 D05, Clause 4.4

2.12.2 Standard Applicable

FCC 47 CFR Part 90, Clause 90.219 (e)(4):
(ii) There is no change in the occupied bandwidth of the retransmitted signals.

RSS-131, Clause 5.2.2:
The spectral growth of the 26 dB bandwidth of the output signal shall be less than 5% of the input signal spectrum.

Input-versus-Output Signal Comparison is tested according to KDB 935210 D05, Clause 4.4.

2.12.3 Equipment Under Test and Modification State

Serial No: NU: 976036000256 and CU: 977036000055 / Test Configuration A and B

2.12.4 Date of Test/Initial of test personnel who performed the test

September 29 and 30, 2020 / XYZ

2.12.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.12.6 Environmental Conditions/ Test Location

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility

| | |
|---------------------|-----------------|
| Ambient Temperature | 23.0 °C |
| Relative Humidity | 39.1 - 57.6 % |
| ATM Pressure | 98.8 - 98.9 kPa |

2.12.7 Additional Observations

- This is a conducted test.
- EUT Downlink transmits on two internal antennas and uplink transmits on two external antennas simultaneously in the same frequency range, i.e. TX MIMO mode. However, there is no much difference between two antenna ports and the measurement was performed on one antenna port as representative configuration.
- The path loss was measured and entered as an offset.
- The signal generator is configured to transmit LTE 5 MHz Bandwidth signal as applicable intended operating signal type.
- The signal amplitude is just below the ACG threshold (determined according to section 4.2 of the current KDB), and not more than 0.5 dB below.

- Span is between 2 times to 5 times the emission bandwidth (EBW) or alternatively, the OBW.
- RBW is 1% to 5% of the anticipated OBW, VBW is $> 3 \times$ RBW.
- Set the reference level of spectrum analyser to accommodate the maximum input amplitude level.
- The noise floor of the spectrum analyser is at least 36 dB below the reference level.
- Detector is positive peak and trace is max hold.
- The peak amplitude frequency f_0 is determined and the 99% occupied bandwidth was measured with the OBW function of spectrum analyser.
- Repeat the testing with the input signal connected directly to the spectrum analyser.
- Compare the spectral plot of the input signal to the output signal.
- Repeat the testing with input signal amplitude set to 3 dB above AGC threshold.
- Both downlink and uplink are tested.

2.12.8 Test Results

Compliant. There is no spectral growth of OBW and 26 dB bandwidth that is more than 5% of the input signal spectrum.

| LTE Band 14 Downlink | | | | | | | |
|----------------------|-----------------|---------|-----------------|---------------|--------|-----------------|--------|
| Signal Level | Bandwidth (MHz) | Channel | Frequency (MHz) | 99% OBW (MHz) | | -26 dB BW (MHz) | |
| | | | | Output | Input* | Output | Input* |
| AGC Threshold Level | 5 | 5330 | 763.0 | 4.44 | 4.47 | 4.87 | 4.95 |
| AGC + 3 dB Level | | | | 4.43 | 4.47 | 4.82 | 4.95 |

* Since the AGC Threshold level and AGC + 3 dB level for downlink are as low as -80 dBm, which is about the noise floor, the input levels are adjusted in order to get the right input 99% OBW and -26 dB BW when testing.

| LTE Band 14 Uplink | | | | | | | |
|---------------------|-----------------|---------|-----------------|---------------|--------|-----------------|--------|
| Signal Level | Bandwidth (MHz) | Channel | Frequency (MHz) | 99% OBW (MHz) | | -26 dB BW (MHz) | |
| | | | | Output | Input* | Output | Input* |
| AGC Threshold Level | 5 | 23330 | 793.0 | 4.41 | 4.47 | 4.72 | 4.93 |
| AGC + 3 dB Level | | | | 4.41 | 4.47 | 4.72 | 4.93 |

* Since the AGC Threshold level and AGC + 3 dB level for Uplink are as low as -70 dBm, which is close to the noise floor, the input levels are adjusted in order to get the right input 99% OBW and -26 dB BW when testing.

LTE Band 14 Downlink (5 MHz BW) Mid Channel / 99% OBW at Output port with Input signal at AGC Threshold Level

10:47:20 29.09.2020

LTE Band 14 Downlink (5 MHz BW) Mid Channel / 99% OBW at Input port (Adjusted Level)

11:54:50 30.09.2020

LTE Band 14 Downlink (5 MHz BW) Mid Channel / 26 dB BW at Output port with Input signal at AGC Threshold Level

10:48:08 29.09.2020

LTE Band 14 Downlink (5 MHz BW) Mid Channel / 26 dB BW at Input port (Adjusted Level)

12:44:37 30.09.2020

LTE Band 14 Downlink (5 MHz BW) Mid Channel / 99% OBW at Output port with Input signal at AGC + 3 dB Level



10:49:45 29.09.2020

LTE Band 14 Downlink (5 MHz BW) Mid Channel / 99% OBW at Input port (Adjusted Level)



11:54:50 30.09.2020

LTE Band 14 Downlink (5 MHz BW) Mid Channel / 26 dB BW at Output port with Input signal at AGC + 3 dB Level



10:50:47 29.09.2020

LTE Band 14 Downlink (5 MHz BW) Mid Channel / 26 dB BW at Input port (Adjusted Level)



12:44:37 30.09.2020

LTE Band 14 Uplink (5 MHz BW) Mid Channel / 99% OBW at Output port with Input signal at AGC Threshold Level


09:48:04 29.09.2020

LTE Band 14 Uplink (5 MHz BW) Mid Channel / 99% OBW at Input port (Adjusted Level)

12:47:10 30.09.2020

LTE Band 14 Uplink (5 MHz BW) Mid Channel / 26 dB BW at Output port with Input signal at AGC Threshold Level


10:06:33 29.09.2020

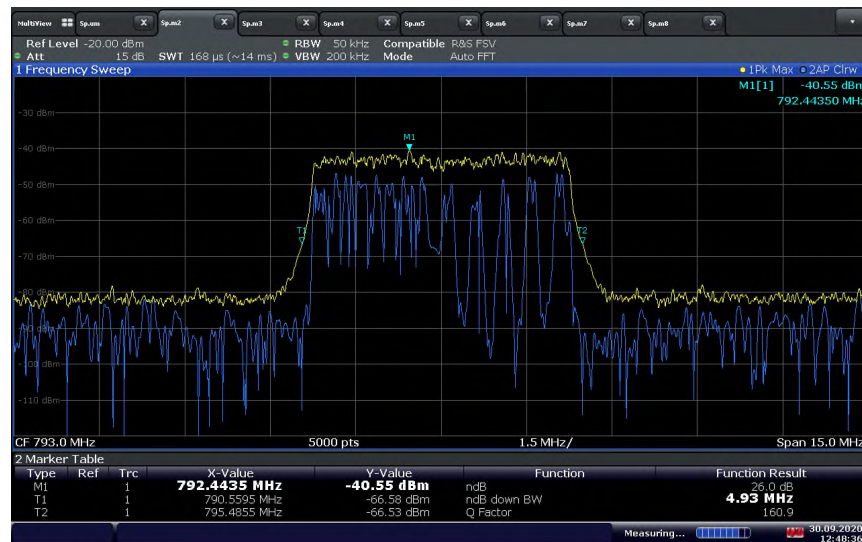LTE Band 14 Uplink (5 MHz BW) Mid Channel / 26 dB BW at Input port (Adjusted Level)

12:48:36 30.09.2020

LTE Band 14 Uplink (5 MHz BW) Mid Channel / 99% OBW at Output port with Input signal at AGC + 3 dB Level


10:13:07 29.09.2020

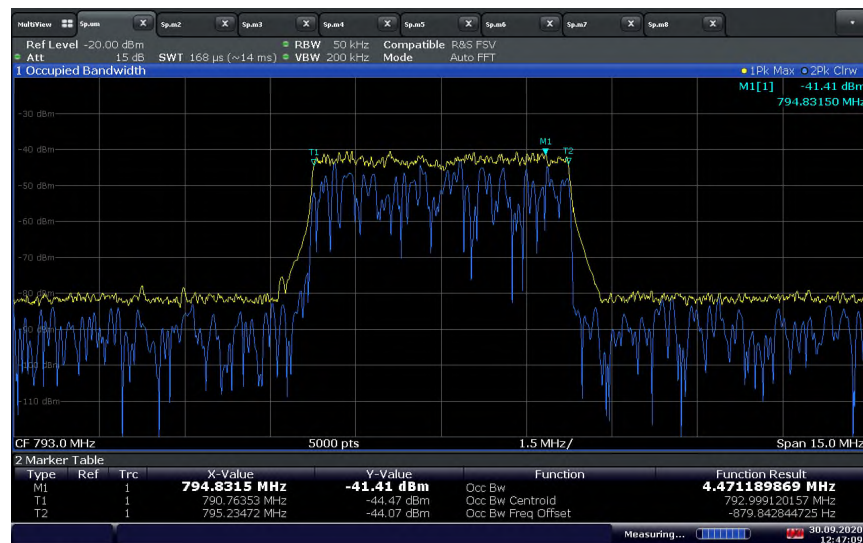LTE Band 14 Uplink (5 MHz BW) Mid Channel / 99% OBW at Input port (Adjusted Level)

12:47:10 30.09.2020

LTE Band 14 Uplink (5 MHz BW) Mid Channel / 26 dB BW at Output port with Input signal at AGC + 3 dB Level

10:14:07 29.09.2020

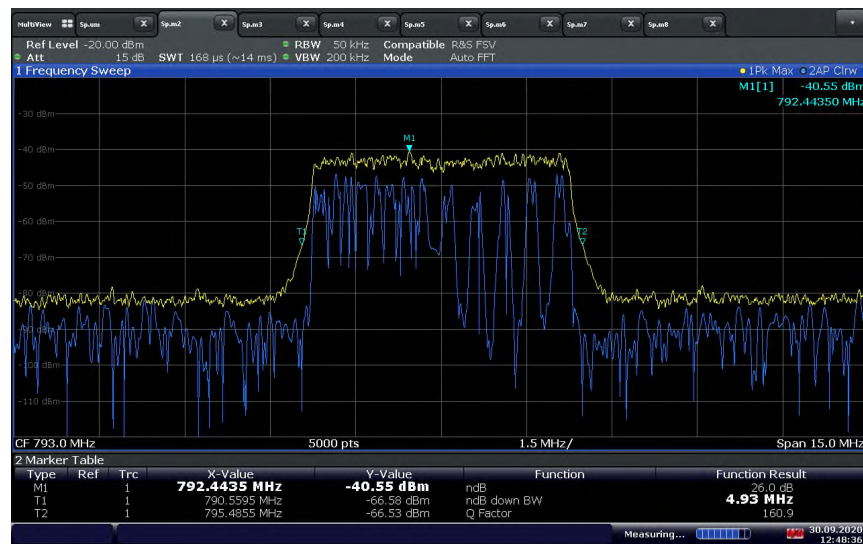LTE Band 14 Uplink (5 MHz BW) Mid Channel / 26 dB BW at Input port (Adjusted Level)

12:48:36 30.09.2020

2.13 EMISSION MASK AND ADJACENT CHANNEL POWER

2.13.1 Specification Reference

FCC 47 CFR Part 90, Clause 90.219 (e)(4)(iii)
FCC 47 CFR Part 90, Clause 90.210
KDB 935210 D05, Clause 4.4

2.13.2 Standard Applicable

FCC Part 90.219 (e)(4):

(iii) The retransmitted signals continue to meet the unwanted emissions limits of § 90.210 applicable to the corresponding received signals (assuming that these received signals meet the applicable unwanted emissions limits by a reasonable margin).

FCC Part 90.210:

APPLICABLE EMISSION MASKS

| Frequency band (MHz) | Mask for equipment with audio low pass filter | Mask for equipment without audio low pass filter |
|--------------------------------|---|--|
| Below 25 ¹ | A or B | A or C |
| 25–50 | B | C |
| 72–76 | B | C |
| 150–174 ² | B, D, or E | C, D or E |
| 150 paging only | B | C |
| 220–222 | F | F |
| 421–512 ^{2,5} | B, D, or E | C, D, or E |
| 450 paging only | B | G |
| 806–809/851–854 ⁶ | B | H |
| 809–824/854–869 ^{3,5} | B | G |
| 896–901/935–940 | I | J |
| 902–928 | K | K |
| 929–930 | B | G |
| 4940–4990 MHz | L or M | L or M |
| 5850–5925 ⁴ | | |
| All other bands | B | C |

¹ Equipment using single sideband J3E emission must meet the requirements of Emission Mask A. Equipment using other emissions must meet the requirements of Emission Mask B or C, as applicable.

² Equipment designed to operate with a 25 kHz channel bandwidth must meet the requirements of Emission Mask B or C, as applicable. Equipment designed to operate with a 12.5 kHz channel bandwidth must meet the requirements of Emission Mask D, and equipment designed to operate with a 6.25 kHz channel bandwidth must meet the requirements of Emission Mask E.

³ Equipment used in this licensed to EA or non-EA systems shall comply with the emission mask provisions of § 90.691 of this chapter.

⁴ DSRCS Roadside Units equipment in the 5850–5925 MHz band is governed under subpart M of this part.

⁵ Equipment may alternatively meet the Adjacent Channel Power limits of § 90.221.

⁶ Transmitters utilizing analog emissions that are equipped with an audio low-pass filter must meet Emission Mask B. All transmitters utilizing digital emissions and those transmitters using analog emissions without an audio low-pass filter must meet Emission Mask H.

(c) *Emission Mask C.* For transmitters that are not equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

- 1) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5 kHz, but not more than 10 kHz: at least $83 \log(f_d/5)$ dB;
- 2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 10 kHz, but not more than 250 percent of the authorized bandwidth: At least $29 \log(f_d^2/11)$ dB or 50 dB, which ever is the lesser attenuation;
- 3) On any frequency removed from the center of the authorized bandwidth by more than 250 percent of the authorized bandwidth: At least $43 + 10 \log(P)$ dB.



2.13.3 Equipment Under Test and Modification State

Serial No: NU: 976036000256 and CU: 977036000055 / Test Configuration A and B

2.13.4 Justification

According to FCC Part 90.219 (e)(4)(iii), the retransmitted signals continue to meet the unwanted emissions limits of § 90.210 applicable to the corresponding received signals (assuming that these received signals meet the applicable unwanted emissions limits by a reasonable margin). As a equipment without audio low pass filter, Emission Mask C applies.

However, the EUT is an equipment without audio low pass filter and mask C applies. The received signal is wideband LTE Band14 signal, and it does not meet the unwanted Emission Mask C limits of § 90.210 which is for narrow band. Therefore, emission mask is not applicable to the retransmitted output signals.

2.14 INPUT AND OUTPUT POWER AND AMPLIFIER/BOOSTER GAIN

2.14.1 Specification Reference

FCC 47 CFR Part 90, Clause 90.219(e)(1)
RSS-131 issue 3, Clause 5.2.3
KDB 935210 D05, Clause 4.5

2.14.2 Standard Applicable

FCC 47 CFR Part 90, Clause 90.219(e):
(1) The output power capability of a signal booster must be designed for deployments providing a radiated power not exceeding 5 Watts ERP for each retransmitted channel.

RSS-131, Clause 5.2.3:
The zone enhancer gain shall not exceed the nominal gain by more than 1.0 dB.

2.14.3 Equipment Under Test and Modification State

Serial No: NU: 976036000256 and CU: 977036000055 / Test Configuration A and B

2.14.4 Date of Test/Initial of test personnel who performed the test

October 12, 2020 / XYZ

2.14.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.14.6 Environmental Conditions/ Test Location

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility

| | |
|---------------------|----------|
| Ambient Temperature | 23.2 °C |
| Relative Humidity | 48.7 % |
| ATM Pressure | 98.7 kPa |

2.14.7 Additional Observations

- This is a conducted test.
- EUT Downlink transmits on two internal antennas and uplink transmits on two external antennas simultaneously in the same frequency range, i.e. TX MIMO mode. However, there is no much difference between two antenna ports and the measurement was performed on one antenna port as representative configuration.
- The path loss was measured and entered as an offset.
- The internal gain control of the EUT is adjusted to the maximum gain (100 dB).
- The input power levels (uplink and downlink) are set to maximum input ratings, and confirm the device is not capable of operating in saturation (non-linear mode) during the test.

- The signal generator was configured to LTE 5 MHz signal as the typical signal type.
- A power meter or was used to measure the output power and a spectrum analyzer was used to measure the input power according to KDB 935210 D05 clause 3.5.3 which is for broadband signal power testing instead of 4.5.3 which is for narrowband signal power testing.
- Both downlink and uplink are tested.

2.14.8 Test Results

Compliant. The booster gain does not exceed the nominal gain (100 dB) by more than 1.0 dB.

| LTE Band 14 Input and Output Power and Gain | | | | | | |
|---|-----------------|---------|-----------------|---------------------------|--------------------|-------------------|
| Mode | Bandwidth (MHz) | Channel | Frequency (MHz) | AGC Threshold Input (dBm) | Output Power (dBm) | Booster Gain (dB) |
| Downlink | 5 | 5330 | 763.0 | -88.25 | 10.82 | 99.07 |
| Uplink | 5 | 23330 | 793.0 | -78.83 | 21.96 | 100.79 |

| LTE Band 14 Input and Output Power and Gain | | | | | | |
|---|-----------------|---------|-----------------|---------------------------------|--------------------|-------------------|
| Mode | Bandwidth (MHz) | Channel | Frequency (MHz) | AGC Threshold + 3dB Input (dBm) | Output Power (dBm) | Booster Gain (dB) |
| Downlink | 5 | 5330 | 763.0 | -86.08 | 10.93 | 97.01 |
| Uplink | 5 | 23330 | 793.0 | -75.96 | 21.96 | 97.92 |

| Limit | |
|-------------|------------------|
| Band | System Gain (dB) |
| LTE Band 14 | 100 |



2.15 NOISE FIGURE

2.15.1 Specification Reference

FCC 47 CFR Part 90, Clause 90.219 (e)(2)
KDB 935210 D05, Clause 4.6

2.15.2 Standard Applicable

FCC Part 90.219 (e)(2):
The noise figure of a signal booster must not exceed 9 dB in either direction.

2.15.3 Equipment Under Test and Modification State

Serial No: NU: 976036000256 and CU: 977036000055 / Test Configuration A and B

2.15.4 Date of Test/Initial of test personnel who performed the test

October 12, 2020 / XYZ

2.15.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.15.6 Environmental Conditions/ Test Location

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility

| | |
|---------------------|----------|
| Ambient Temperature | 23.2 °C |
| Relative Humidity | 48.7 % |
| ATM Pressure | 98.7 kPa |

2.15.7 Additional Observations

- This is a conducted test.
- EUT Downlink transmits on two internal antennas and uplink transmits on two external antennas simultaneously in the same frequency range, i.e. TX MIMO mode. However, there is no much difference between two antenna ports and the measurement was performed on one antenna port as representative configuration.
- The path loss was measured and entered as an offset.
- 5 MHz Bandwidth LTE was tested as representative configuration. The Downlink and Uplink Gains are measured with a LTE signal injected to the device under test.
- The input of the EUT is terminated when measuring the noise output.
- The spectrum analyser was set to 100 trace average in RMS mode.
- RBW is 1 MHz, VBW is > 3 x RBW.
- Channel power was recorded.

- The noise figure was calculated using the following formula:

$$\text{Noise Figure (NF)} = N - \text{Gain} + 174 \text{ dB} - 10\lg_{10}(B)$$

- N = Noise Power Output in dBm/MHz
- Gain = Gain of the device under test
- B = Resolution Bandwidth of spectrum analyzer in Hz
- 174 = Thermal noise for 1 Hz RBW at room temperature

- Both Downlink and Uplink are tested.


2.15.8 Test Results

| LTE Band 14 Booster Gain | | | | | |
|--------------------------|-----------------|-----------------|-------------------|------------------------|-----------|
| Mode | Bandwidth (MHz) | Frequency (MHz) | Input Power (dBm) | Output Power (dBm/MHz) | Gain (dB) |
| Downlink | 5 | 763.0 | -88.25 | 10.82 | 99.07 |
| Uplink | 5 | 793.0 | -78.83 | 21.96 | 100.79 |


| LTE Band 14 Noise Figure | | | | | | | |
|--------------------------|-----------------|-----------------|-----------|------------------------|-------------------|-------------------|------------|
| Mode | Bandwidth (MHz) | Frequency (MHz) | RBW (MHz) | Noise Output (dBm/MHz) | Booster Gain (dB) | Noise Figure (dB) | Limit (dB) |
| Downlink | 5 | 763.0 | 1 | -6.53 | 99.07 | 8.58 | 9 |
| Uplink | 5 | 793.0 | 1 | -7.67 | 100.80 | 5.53 | 9 |

$$\begin{aligned} \text{Downlink Noise Figure} &= N - \text{Gain} + 174 \text{ dB} - 10\lg_{10}(B) \\ &= -6.35 - 99.07 + 174 \text{ dB} - 10\lg_{10}(B) \\ &= 8.58 \text{ dB} \end{aligned}$$

$$\begin{aligned} \text{Uplink Noise Figure} &= N - \text{Gain} + 174 \text{ dB} - 10\lg_{10}(B) \\ &= -7.67 - 100.79 + 174 \text{ dB} - 10\lg_{10}(B) \\ &= 5.54 \text{ dB} \end{aligned}$$

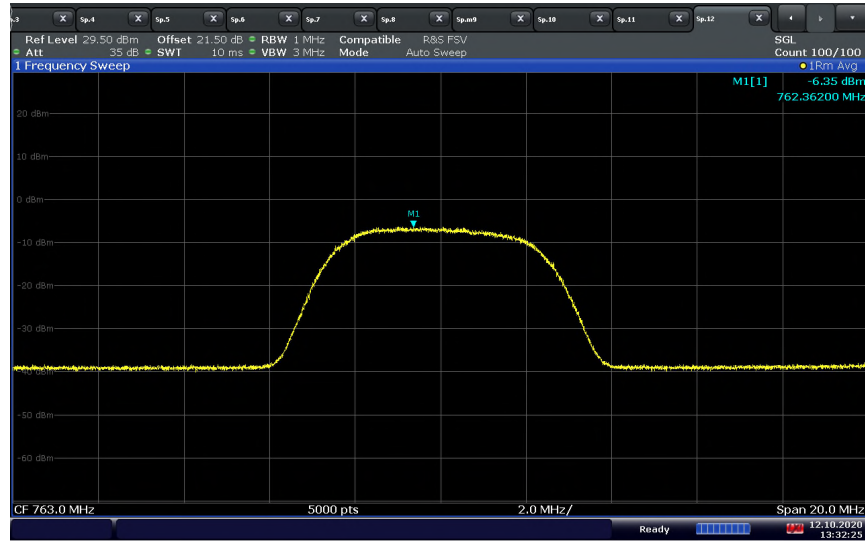LTE Band 14 Downlink (5 MHz BW) Middle Channel / Noise Output

13:32:26 12.10.2020

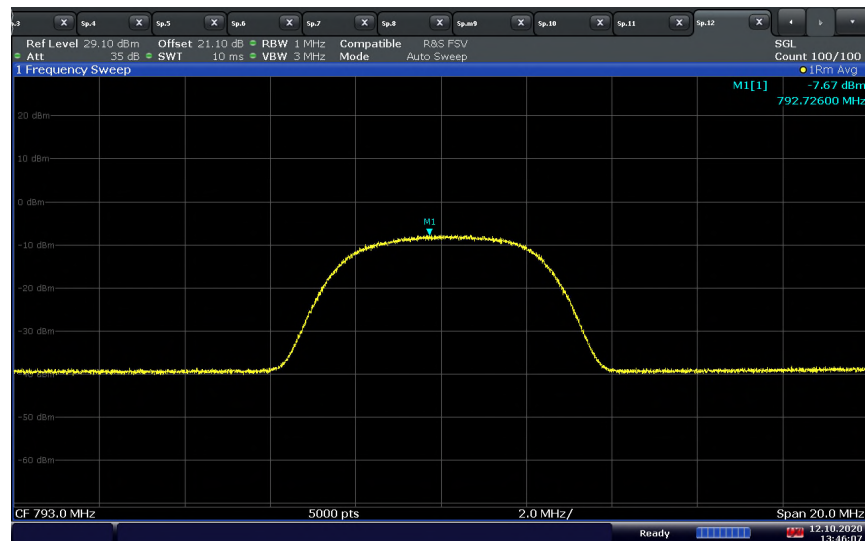LTE Band 14 Uplink (5 MHz BW) Middle Channel / Noise Output

13:46:07 12.10.2020



2.16 OUT-OF-BAND/OUT-OF-BLOCK (INTERMODULATION) AND SPURIOUS EMISSIONS

2.16.1 Specification Reference

FCC 47 CFR Part 2, Clause 2.1051
FCC 47 CFR Part 90, Clause 90.219(e)(3)
RSS-140 issue 1, Clause 4.4
KDB 935210 D05, Clause 4.7

2.16.2 Standard Applicable

FCC 47 CFR Part 90.219(e):
(3) Spurious emission from a signal booster must not exceed -13 dBm within any 100kHz measurement bandwidth.

RSS-140, Clause 4.4 Transmitter unwanted emissions limits:

The power of any unwanted emission outside the bands 758-768 MHz and 788-798 MHz shall be attenuated below the transmitter output power P in dBW as follows, where p is the transmitter output power in watts:

- a. For any frequency between 769-775 MHz and 799-806 MHz:
 - i $76 + 10 \log(p)$, dB in a 6.25 kHz band for fixed and base station equipment
 - ii $65 + 10 \log(p)$, dB in a 6.25 kHz band for mobile and portable/hand-held equipment

- b For any frequency between 775-788 MHz, above 806 MHz, and below 758 MHz: $43 + 10 \log(p)$, dB in a bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency bands 758-768 MHz and 788-798 MHz, a resolution bandwidth of 30 kHz may be employed.

In addition, the equivalent isotropically radiated power (e.i.r.p.) of all emissions, including harmonics in the band 1559-1610 MHz, shall not exceed -70 dBW/MHz for wideband emissions, and -80 dBW/kHz for discrete emissions of less than 700 Hz bandwidth.

For LTE Band 41, out-of-Band/Out-of-Block and spurious emissions is tested according to KDB 935210 D05, Clause 3.6.

2.16.3 Equipment Under Test and Modification State

Serial No: NU: 976036000256 and CU: 977036000055 / Test Configuration A and B

2.16.4 Date of Test/Initial of test personnel who performed the test

October 02, 2020 / XYZ

2.16.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.



2.16.6 Environmental Conditions/ Test Location

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility


| | |
|---------------------|---------|
| Ambient Temperature | 23.5°C |
| Relative Humidity | 30.7% |
| ATM Pressure | 98.7kPa |

2.16.7 Additional Observations


- This is a conducted test.
- The path loss or the transducer factor (TDF) from the external attenuators and cables was measured and entered as an offset.
- EUT Downlink transmits on two internal antennas and uplink transmits on two external antennas simultaneously in the same frequency range, i.e. TX MIMO mode. However, there is no much difference between two antenna ports and the measurement was performed on one antenna port as representative configuration. The limit was adjusted with a correction of -3 dB [10Log(2)] by using Measure and Add 10Log(N) dB technique according to FCC KDB 662911 D01 Multiple Transmitter Output accounting for simultaneous transmission from two internal or external antenna ports.
- The signal generator is configured for LTE signal and 5 MHz Bandwidth was tested as representative configuration.
- For spurious emissions, the spectrum analyser was set to peak detector and trace is max hold.
- RBW is 100 kHz, VBW is > 3 x RBW.
- Both Downlink and Uplink are tested.
- Intermodulation-product spurious emission measurements are not required for single-channel boosters that can't accommodate two simultaneous signals within the pass band.

2.16.8 Test Results

LTE Band 14 Downlink (5 MHz BW) Middle Channel / Spurious Emissions

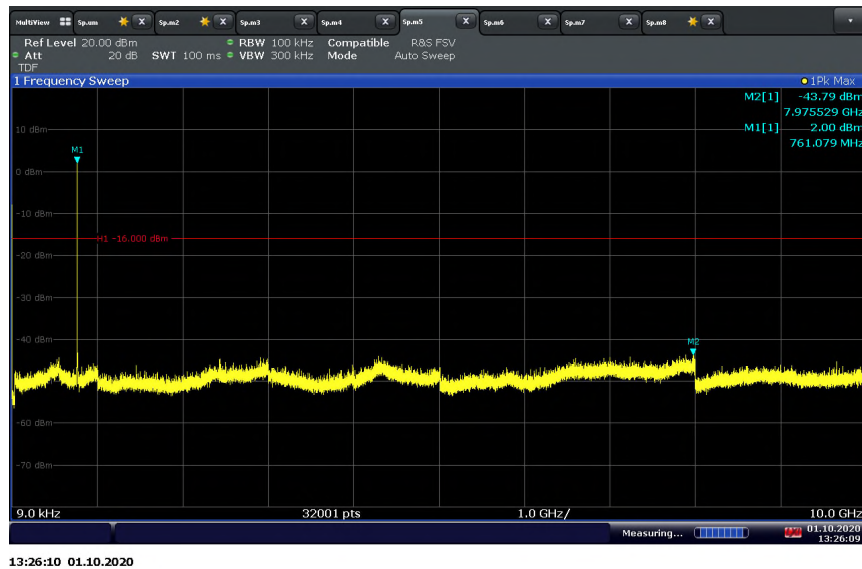

LTE Band 14 Uplink (5 MHz BW) Middle Channel / Spurious Emissions

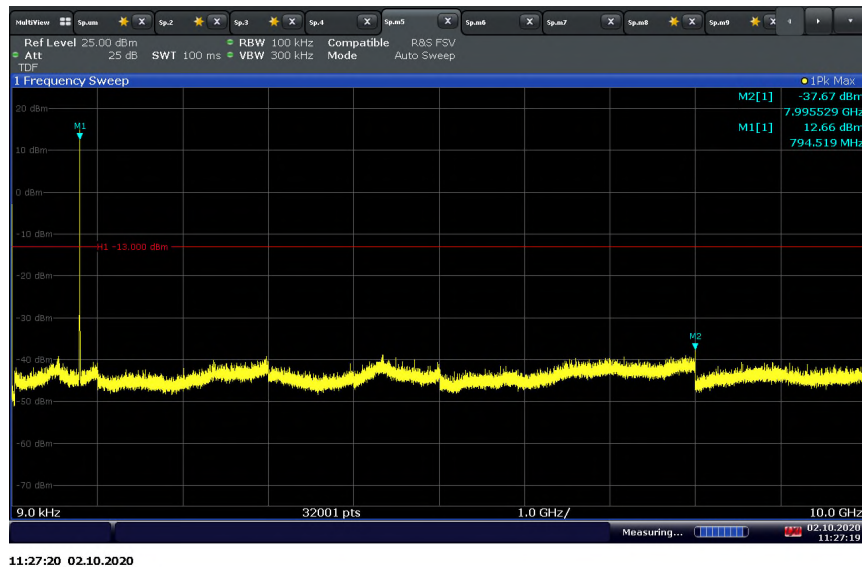

The limit should be adjusted with a correction of -3 dB $[10\log(2)]$
 accounting for MIMO transmission on both external antennas
 Limit = -13 - 3 = -16 dBm



SECTION 4

TEST EQUIPMENT USED

3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

| ID Number (SDGE/SDRB) | Test Equipment | Type | Serial Number | Manufacturer | Cal Date | Cal Due Date |
|---|---|-------------------------|---------------------|---|---------------------------|-----------------|
| Antenna Conducted Port Setup | | | | | | |
| 7662 | P-Series Power Meter | N1911A | MY45100951 | Agilent | 08/18/20 | 08/18/21 |
| 50MHz-18GHz Wideband Power Sensor | N1921A | MY51100054 | Agilent | 50MHz-18GHz Wideband Power Sensor | 09/10/20 | 09/10/21 |
| 7608 | Vector Signal Generator | SMBV100A | 259021 | Rhode & Schwarz | 10/10/19 | 10/10/21 |
| 7582 | Signal/Spectrum Analyzer | FSW26 | 101614 | Rhode & Schwarz | 01/22/20 | 01/22/21 |
| 8825 | 20dB Attenuator | 46-20-34 | BK5773 | Weinschel Corp. | Verified by 7608 and 7582 | |
| Radiated Test Setup | | | | | | |
| 1033 | Bilog Antenna | 3142C | 00044556 | EMCO | 09/05/19 | 09/05/21 |
| 7575 | Double-ridged waveguide horn antenna | 3117 | 00155511 | EMCO | 06/22/20 | 06/22/22 |
| 8628 | Pre-amplifier | QLJ 01182835-JO | 8986002 | QuinStar Technologies Inc. | 02/26/20 | 02/26/21 |
| 1016 | Pre-amplifier | PAM-0202 | 187 | A.H. Systems, Inc. | 02/26/20 | 02/26/21 |
| 1040 | EMI Test Receiver | ESIB40 | 100292 | Rhode & Schwarz | 10/11/19 | 10/11/20* |
| 7620 | EMI Test Receiver | ESU | 100399 | Rhode & Schwarz | 10/18/19 | 10/18/20 |
| 7608 | Vector Signal Generator | SMBV100A | 259021 | Rhode & Schwarz | 10/10/19 | 10/10/21 |
| 7582 | Signal/Spectrum Analyzer | FSW26 | 101614 | Rhode & Schwarz | 01/22/20 | 01/22/21 |
| 1153 | High-frequency cable | SucoFlex 100 SX | N/A | Suhner | Verified by 7608 and 7582 | |
| 8543 | High-frequency cable | Micropore 19057793 | N/A | United Microwave Products | Verified by 7608 and 7582 | |
| AC Conducted Emissions Setup | | | | | | |
| 7620 | EMI Test Receiver | ESU40 | 100399 | Rhode & Schwarz | 10/18/19 | 10/18/20 |
| 7567 | LISN | FCC-LISN-50- 25-2-10 | 120304 | Fisher Custom Comm | 01/27/20 | 01/27/21 |
| 8822 | 20dB Attenuator | 34-20-34 | N/A | MCE / Weinschel | 02/26/20 | 02/26/21 |
| 8824 | 20dB Attenuator | 34-20-34 | N/A | MCE / Weinschel | 02/26/20 | 02/26/21 |
| Miscellaneous | | | | | | |
| 6737 | Multimeter Digital | 87V | 36740294 | Fluke | 08/11/20 | 08/11/21 |
| 7579 | Temperature Chamber | 115 | 151617 | TestQuity | Verified by 11312 | |
| 11312 | Mini Environmental Quality Meter | 850027 | CF099-56010- 340 | Sper Scientific | 05/22/20 | 05/22/21 |
| | Test Software | EMC32 | V8.53 | Rhode & Schwarz | N/A | |

* The equipment was still within calibration when testing.

3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:

3.2.1 CONDUCTED ANTENNA PORT MEASUREMENT

| | Input Quantity (Contribution) X_i | Value | Prob. Dist. | Divisor | $u_i(x)$ | $u_i(x)^2$ |
|-------------------------------|-------------------------------------|---------|-------------|---------|----------|------------|
| 1 | Receiver reading | 0.10 dB | Normal, k=1 | 1.000 | 0.10 | 0.01 |
| 2 | Cable attenuation | 1.00 dB | Normal, k=2 | 2.000 | 0.50 | 0.25 |
| 3 | Received sinewave accuracy | 0.07 dB | Normal, k=2 | 2.000 | 0.04 | 0.00 |
| 4 | Receiver pulse amplitude | 0.00 dB | Rectangular | 1.732 | 0.00 | 0.00 |
| 5 | Receiver pulse repetition rate | 0.00 dB | Rectangular | 1.732 | 0.00 | 0.00 |
| 6 | Noise floor proximity | 0.00 dB | Rectangular | 1.732 | 0.00 | 0.00 |
| 7 | Frequency interpolation | 0.10 dB | Rectangular | 1.732 | 0.06 | 0.00 |
| 8 | Mismatch | 0.07 dB | U-shaped | 1.414 | 0.05 | 0.00 |
| | | | | | | |
| Combined standard uncertainty | | | Normal | 0.52 | dB | |
| Expanded uncertainty | | | Normal, k=2 | 1.03 | dB | |

3.2.2 RADIATED MEASUREMENTS (BELOW 1GHZ)

| | Input Quantity (Contribution) X_i | Value | Prob. Dist. | Divisor | $u_i(x)$ | $u_i(x)^2$ |
|-------------------------------|-------------------------------------|---------|-------------|---------|----------|------------|
| 1 | Receiver reading | 0.10 dB | Normal, k=1 | 1.000 | 0.10 | 0.01 |
| 2 | Attenuation: antenna-receiver | 0.20 dB | Normal, k=2 | 2.000 | 0.10 | 0.01 |
| 3 | Antenna factor AF | 0.75 dB | Normal, k=2 | 2.000 | 0.38 | 0.14 |
| 4 | Receiver sinewave accuracy | 0.45 dB | Normal, k=2 | 2.000 | 0.23 | 0.05 |
| 5 | Receiver pulse amplitude | 1.50 dB | Rectangular | 1.732 | 0.87 | 0.75 |
| 6 | Receiver pulse repetition rate | 1.50 dB | Rectangular | 1.732 | 0.87 | 0.75 |
| 7 | Noise floor proximity | 0.50 dB | Rectangular | 1.732 | 0.29 | 0.08 |
| 8 | Mismatch: antenna-receiver | 0.95 dB | U-shaped | 1.414 | 0.67 | 0.45 |
| 9 | AF frequency interpolation | 0.30 dB | Rectangular | 1.732 | 0.17 | 0.03 |
| 10 | AF height deviations | 0.10 dB | Rectangular | 1.732 | 0.06 | 0.00 |
| 11 | Directivity difference at 3 m | 3.12 dB | Rectangular | 1.732 | 1.80 | 3.24 |
| 12 | Phase center location at 3 m | 1.00 dB | Rectangular | 1.732 | 0.58 | 0.33 |
| 13 | Cross-polarisation | 0.90 dB | Rectangular | 1.732 | 0.52 | 0.27 |
| 14 | Balance | 0.00 dB | Rectangular | 1.732 | 0.00 | 0.00 |
| 15 | Site imperfections | 3.76 dB | Triangular | 2.449 | 1.54 | 2.36 |
| 16 | Separation distance at 3 m | 0.30 dB | Rectangular | 1.732 | 0.17 | 0.03 |
| 17 | Effect of setup table material | 0.77 dB | Rectangular | 1.732 | 0.44 | 0.20 |
| 18 | Table height at 3 m | 0.10 dB | Normal, k=2 | 2.000 | 0.05 | 0.00 |
| 19 | Near-field effects | 0.00 dB | Triangular | 2.449 | 0.00 | 0.00 |
| 20 | Effect of ambient noise on OATS | 0.00 dB | | | | 0.00 |
| | | | | | | |
| Combined standard uncertainty | | | Normal | 2.95 | dB | |
| Expanded uncertainty | | | Normal, k=2 | 5.90 | dB | |

3.2.3 RADIATED EMISSION MEASUREMENTS (ABOVE 1GHZ)

| | Input Quantity (Contribution) X_i | Value | Prob. Dist. | Divisor | $u_i(x)$ | $u_i(x)^2$ |
|-------------------------------|-------------------------------------|---------|-------------|-------------|----------|------------|
| 1 | Receiver reading | 0.10 dB | Normal, k=1 | 1.000 | 0.10 | 0.01 |
| 2 | Attenuation: antenna-receiver | 0.20 dB | Normal, k=2 | 2.000 | 0.10 | 0.01 |
| 3 | Antenna factor AF | 0.75 dB | Normal, k=2 | 2.000 | 0.38 | 0.14 |
| 4 | Receiver sinewave accuracy | 0.45 dB | Normal, k=2 | 2.000 | 0.23 | 0.05 |
| 5 | Receiver pulse amplitude | 1.50 dB | Rectangular | 1.732 | 0.87 | 0.75 |
| 6 | Receiver pulse repetition rate | 1.50 dB | Rectangular | 1.732 | 0.87 | 0.75 |
| 7 | Noise floor proximity | 0.50 dB | Rectangular | 1.732 | 0.29 | 0.08 |
| 8 | Mismatch: antenna-receiver | 0.95 dB | U-shaped | 1.414 | 0.67 | 0.45 |
| 9 | AF frequency interpolation | 0.30 dB | Rectangular | 1.732 | 0.17 | 0.03 |
| 10 | AF height deviations | 0.10 dB | Rectangular | 1.732 | 0.06 | 0.00 |
| 11 | Directivity difference at 3 m | 3.12 dB | Rectangular | 1.732 | 1.80 | 3.24 |
| 12 | Phase center location at 3 m | 1.00 dB | Rectangular | 1.732 | 0.58 | 0.33 |
| 13 | Cross-polarisation | 0.90 dB | Rectangular | 1.732 | 0.52 | 0.27 |
| 14 | Balance | 0.00 dB | Rectangular | 1.732 | 0.00 | 0.00 |
| 15 | Site imperfections | 3.25 dB | Triangular | 2.449 | 1.33 | 1.76 |
| 16 | Separation distance at 3 m | 0.30 dB | Rectangular | 1.732 | 0.17 | 0.03 |
| 17 | Effect of setup table material | 0.77 dB | Rectangular | 1.732 | 0.44 | 0.20 |
| 18 | Table height at 3 m | 0.10 dB | Normal, k=2 | 2.000 | 0.05 | 0.00 |
| 19 | Near-field effects | 0.00 dB | Triangular | 2.449 | 0.00 | 0.00 |
| 20 | Effect of ambient noise on OATS | 0.00 dB | | | | 0.00 |
| | | | | | | |
| Combined standard uncertainty | | | | Normal | 2.85 dB | |
| Expanded uncertainty | | | | Normal, k=2 | 5.70 dB | |

3.2.4 CONDUCTED MEASUREMENTS


| | Input Quantity (Contribution) X_i | Value | Prob. Dist. | Divisor | $u_i(x)$ | $u_i(x)^2$ |
|-------------------------------|-------------------------------------|---------|-------------|-------------|----------|------------|
| 1 | Receiver reading | 0.10 dB | Normal, k=1 | 1.000 | 0.10 | 0.01 |
| 2 | LISN-receiver attenuation | 0.10 dB | Normal, k=2 | 2.000 | 0.05 | 0.00 |
| 3 | LISN voltage division factor | 0.30 dB | Normal, k=2 | 2.000 | 0.15 | 0.02 |
| 4 | Receiver sinewave accuracy | 0.36 dB | Normal, k=2 | 2.000 | 0.18 | 0.03 |
| 5 | Receiver pulse amplitude | 1.50 dB | Rectangular | 1.732 | 0.87 | 0.75 |
| 6 | Receiver pulse repetition rate | 1.50 dB | Rectangular | 1.732 | 0.87 | 0.75 |
| 7 | Noise floor proximity | 0.00 dB | Rectangular | 1.732 | 0.00 | 0.00 |
| 8 | AMN VDF frequency interpolation | 0.10 dB | Rectangular | 1.732 | 0.06 | 0.00 |
| 9 | Mismatch | 0.07 dB | U-shaped | 1.414 | 0.05 | 0.00 |
| 10 | LISN impedance | 2.65 dB | Triangular | 2.449 | 1.08 | 1.17 |
| 11 | Effect of mains disturbance | 0.00 dB | | | 0.00 | 0.00 |
| 12 | Effect of the environment | | | | | |
| | | | | | | |
| Combined standard uncertainty | | | | Normal | 1.66 dB | |
| Expanded uncertainty | | | | Normal, k=2 | 3.31 dB | |




SECTION 5

DIAGRAM OF TEST SETUP


4.1 TEST SETUP DIAGRAM

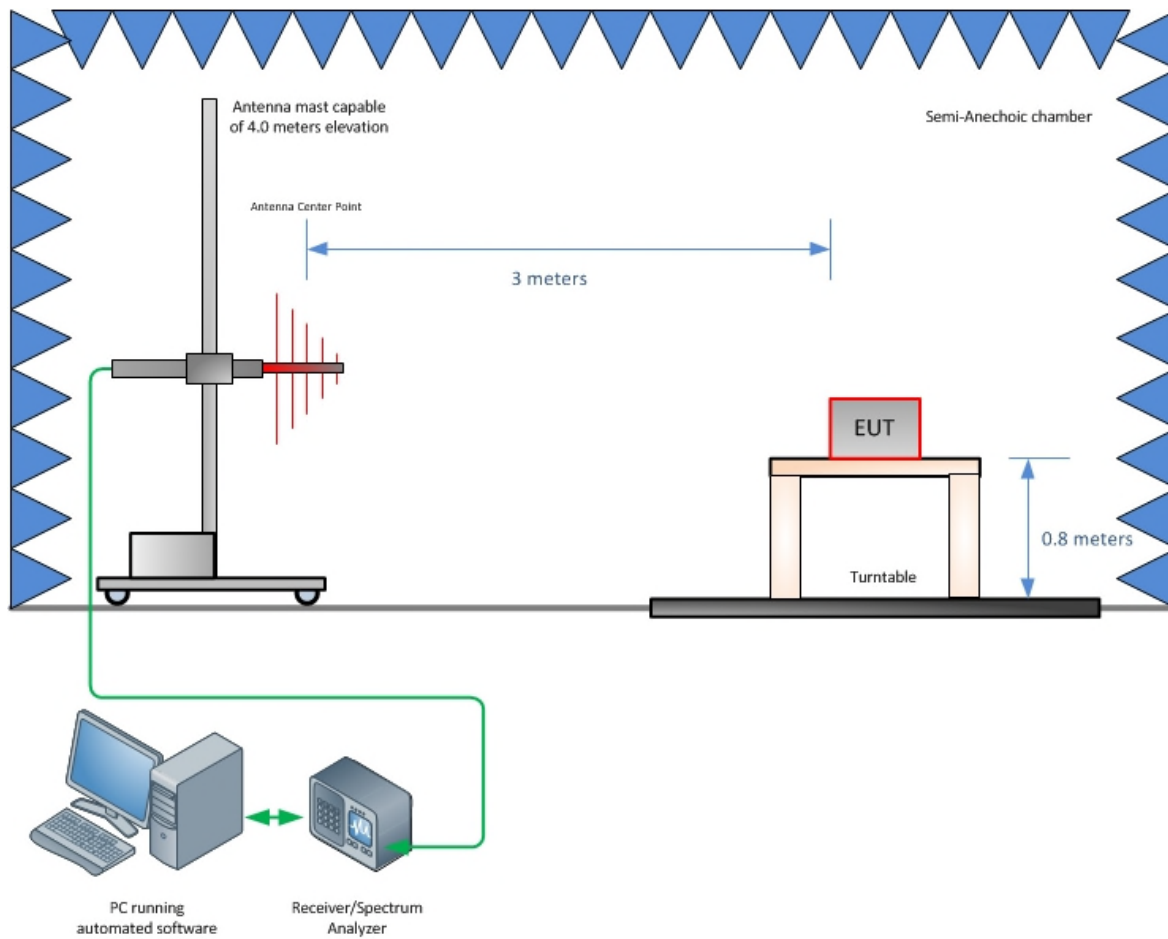


Radiated Emission Test Setup (Below 1GHz)

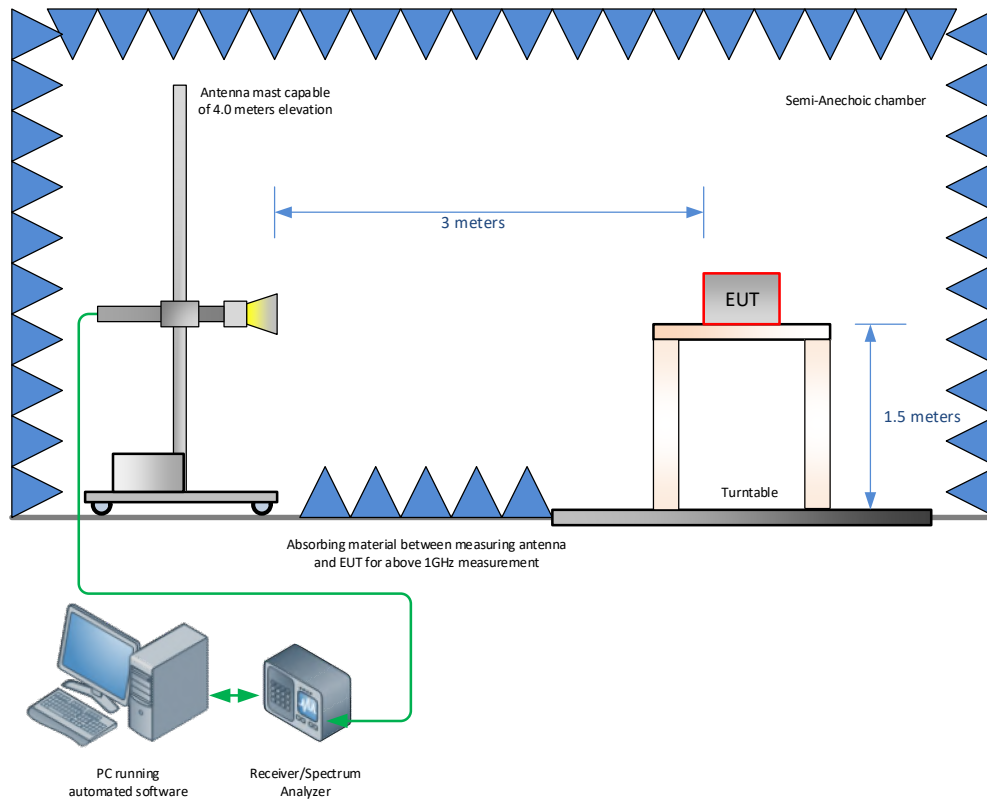

Radiated Emission Test Setup (Above 1GHz)

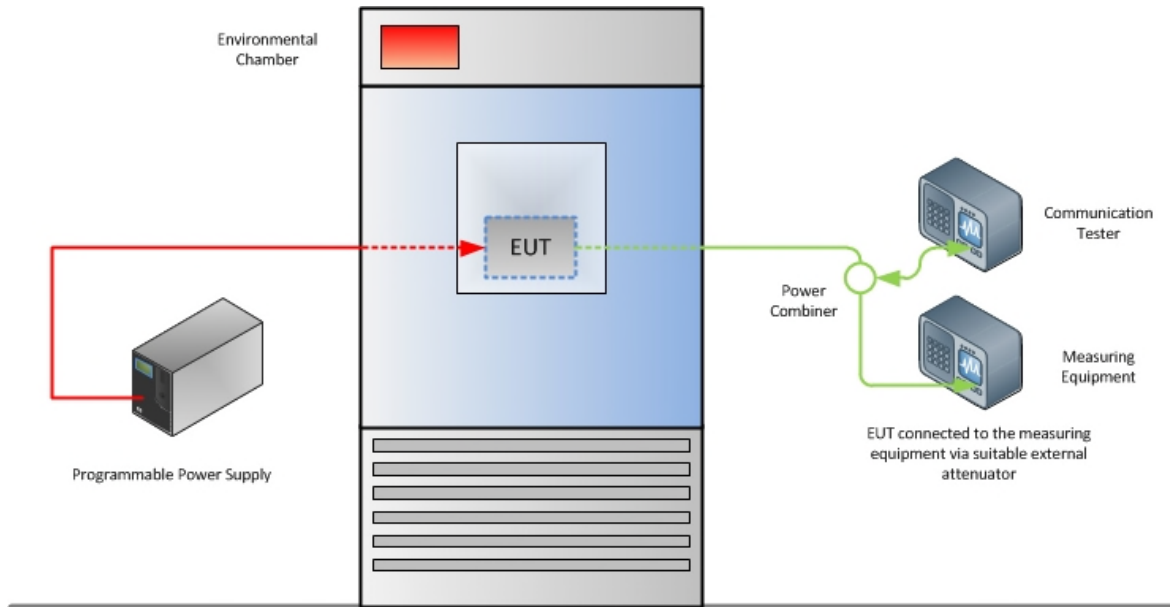

Frequency Stability Test Configuration

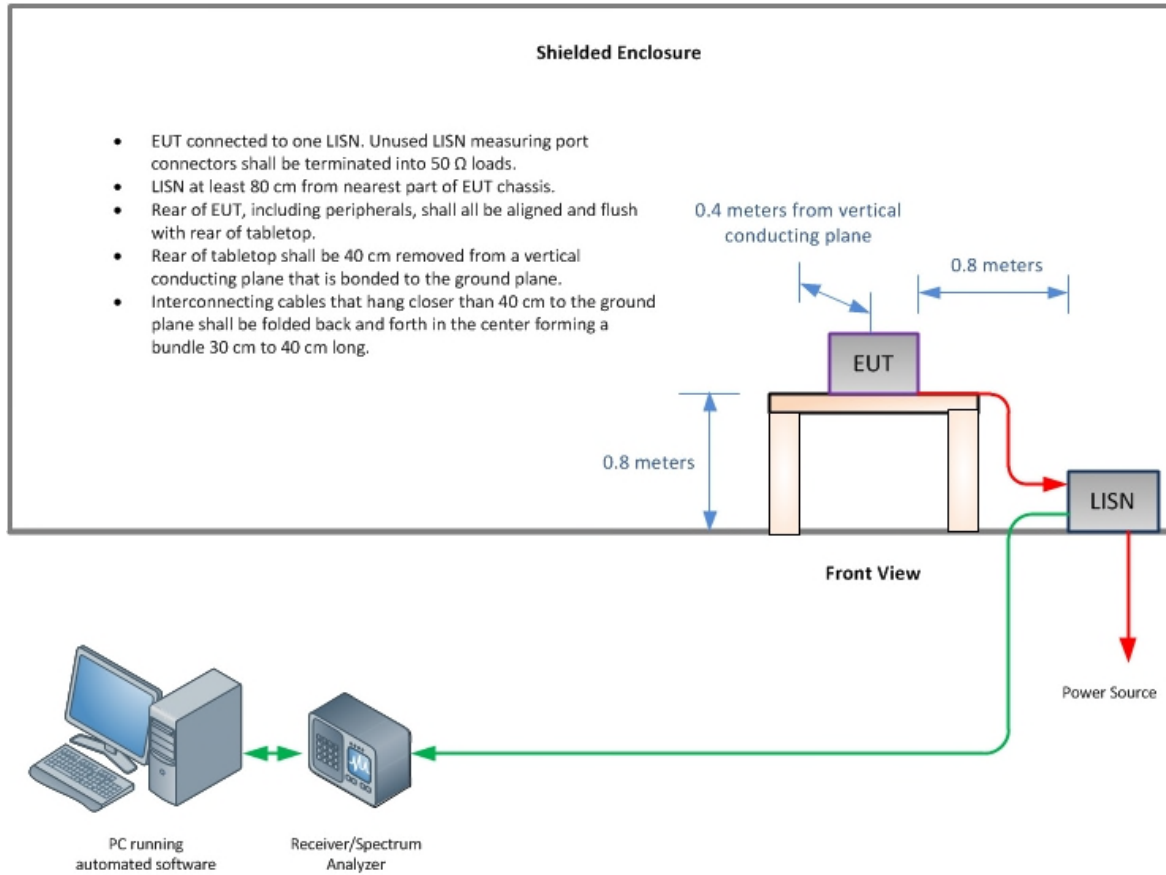

Conducted Emissions Test Configuration (if applicable)



SECTION 6

ACCREDITATION, DISCLAIMERS AND COPYRIGHT



5.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT

TÜV SÜD America Inc.'s reports apply only to the specific sample tested under stated test conditions. It is the manufacturer's responsibility to assure the continued compliance of production units of this model. TÜV SÜD America, Inc. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD America, Inc.'s issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and TÜV SÜD America, Inc., extracts from the test report shall not be reproduced, except in full without TÜV SÜD America, Inc.'s written approval.

This report must not be used to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the federal government.

TÜV SÜD America, Inc. and its professional staff hold government and professional organization certifications for AAMI, ACIL, AEA, ANSI, IEEE, A2LA, NIST and VCCI.

