



America

**Choose certainty.
Add value.**

Report On

Application for Grant of Equipment Authorization of the
Nextivity Inc.

Cel-Fi Quatra Cellphone Signal Repeater

FCC CFR 47 Part 2 and 27
RSS-Gen and RSS-130

Report No. SD72113545-0216D

June 2016

FCC ID: NU: YETQ34-251266NU
CU: YETQ34-251266CU
IC: NU: 9298A-Q34251266NU
CU: 9298A-Q34251266CU
Report No. SD72113545-0216D



REPORT ON Radio Testing of the
Nextivity Inc.
Cellphone Signal Repeater

TEST REPORT NUMBER SD72113545-0216D

PREPARED FOR Nextivity Inc.
12230 World Trade Drive, Suite 250
San Diego, CA 92128

CONTACT PERSON CK Li
Sr. Principal Engineer, Regulatory
(8588) 829-1692
CKLi@NextivityInc.com

PREPARED BY 
Xiaoying Zhang
Name
Authorized Signatory
Title: EMC/Wireless Test Engineer

APPROVED BY 
Juan M. Gonzalez
Name
Authorized Signatory
Title: Commercial Wireless EMC Lab Manager

DATED June 21, 2016

FCC ID: NU: YETQ34-251266NU
 CU: YETQ34-251266CU
 IC: NU: 9298A-Q34251266NU
 CU: 9298A-Q34251266CU
 Report No. SD72113545-0216D



Revision History

| SD72113545-0216D Nextivity Inc. Cel-Fi Quatra Cellphone Signal Repeater | | | | | |
|--|-----------------|--------------|--------|----------------|-----------------|
| DATE | OLD REVISION | NEW REVISION | REASON | PAGES AFFECTED | APPROVED BY |
| 06/21/16 | Initial Release | | | | Juan M Gonzalez |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |



CONTENTS

| Section | Page No |
|----------------|--|
| 1 | REPORT SUMMARY 5 |
| 1.1 | Introduction 6 |
| 1.2 | Brief Summary of Results 7 |
| 1.3 | Product Information 8 |
| 1.4 | EUT Test configuration 11 |
| 1.5 | Deviations from the Standard 15 |
| 1.6 | Modification Record 15 |
| 1.7 | Test Methodology 15 |
| 1.8 | Test Facility Location 15 |
| 1.9 | Test Facility Registration 15 |
| 1.10 | Sample Calculations 17 |
| 2 | TEST DETAILS 18 |
| 2.1 | Transmitter Conducted Output Power 19 |
| 2.2 | Effective Radiated Power 22 |
| 2.3 | Occupied bandwidth 24 |
| 2.4 | Peak-Average Ratio 30 |
| 2.5 | Band Edge 34 |
| 2.6 | Conducted Spurious Emissions 40 |
| 2.7 | Field Strength of Spurious Radiation 44 |
| 2.8 | Frequency Stability 49 |
| 2.9 | Power Line Conducted Emissions 56 |
| 3 | TEST EQUIPMENT USED 60 |
| 3.1 | Test Equipment Used 61 |
| 3.2 | Measurement Uncertainty 63 |
| 4 | DIAGRAM OF TEST SETUP 65 |
| 4.1 | Test Setup Diagram 66 |
| 5 | ACCREDITATION, DISCLAIMERS AND COPYRIGHT 71 |
| 5.1 | Accreditation, Disclaimers and Copyright 72 |

FCC ID: NU: YETQ34-251266NU
CU: YETQ34-251266CU
IC: NU: 9298A-Q34251266NU
CU: 9298A-Q34251266CU
Report No. SD72113545-0216D



SECTION 1

REPORT SUMMARY

Radio Testing of the
Nextivity Inc.
Cel-Fi Quatra Cellphone Signal Repeater



1.1 INTRODUCTION

The information contained in this report is intended to show verification of the Nextivity Inc. Cellphone Signal Repeater to the requirements of the following:

- FCC CFR 47 Part 2 and 27
- RSS-Gen and RSS-130.

| | |
|-------------------------------|--|
| Objective | To perform Radio Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out. |
| Manufacturer | Nextivity Inc. |
| Model Number(s) | Cel-Fi Quatra |
| FCC ID | NU: YETQ34-251266NU CU: YETQ34-251266CU |
| IC Number | NU: 9298A-Q34251266NU CU: 9298A-Q34251266CU |
| Serial Number(s) | 258602000335 (NU) and 25955100346 (CU) |
| Number of Samples Tested | 2 |
| Test Specification/Issue/Date | <ul style="list-style-type: none"> • FCC CFR 47 Part 2 and 27 (October 1, 2015). • RSS-130 – Mobile Broadband Services (MBS) Equipment Operating in the Frequency Bands 698-756 MHz and 777-787 MHz (Issue 1, October 2013). • RSS-Gen - General Requirements and Information for the Certification of Radio Apparatus (Issue 4, November 2014). |
| Start of Test | April 12, 2016 |
| Finish of Test | May 10, 2016 |
| Name of Engineer(s) | Xiaoying Zhang |
| Related Document(s) | <ul style="list-style-type: none"> • ANSI/TIA-603-C-2004 – Land Mobile FM or PM – Communications Equipment – Measurement and Performance Standards. • KDB971168 (D01 Power Meas License Digital Systems v02r02) Measurement Guidance For Certification of Licensed Digital Transmitters • KDB412172 D01 Determining ERP and EIRP v0101 (Guidelines for Determining the Effective Radiated Power (ERP) and Equivalent Isotropically Radiated Power (EIRP) of a RF Transmitting System. • KDB662911 D01 Multiple Transmitter Output v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band • Supporting documents for EUT certification are separate exhibits. |



1.2 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out in accordance with FCC CFR 47 Part 2 and 27 with cross-reference to the corresponding ISSED RSS standard is shown below.

| Section | Spec Clause | | | Test Description | Result |
|---------|-------------|-------------|-------------|--------------------------------------|-----------|
| | FCC Part 2 | FCC Part 27 | RSS-130 | | |
| 2.1 | 2.1046 | - | 4.4 | Transmitter Conducted Output Power | Compliant |
| 2.2 | - | - | 4.4 | Equivalent Isotropic Radiated Power | Compliant |
| | - | 27.50 (c) | - | Equivalent Radiated Power | Compliant |
| 2.3 | 2.1049 | 27.53 (g) | RSS-Gen 6.6 | Occupied Bandwidth | Compliant |
| 2.4 | - | - | 4.4 | Peak-Average Ratio | Compliant |
| 2.5 | 2.1051 | 27.53 (9) | 4.6.1 | Band Edge | Compliant |
| 2.6 | 2.1051 | 27.53 (g) | 4.6 | Conducted Spurious Emissions | Compliant |
| 2.7 | 2.1053 | 27.53 (g) | 4.6 | Field Strength Of Spurious Radiation | Compliant |
| 2.8 | 2.1055 | 27.54 | 4.3 | Frequency Stability | Compliant |
| - | - | - | RSS-Gen 6.0 | Receiver Spurious Emissions | N/A* |
| 2.9 | - | - | RSS-Gen 8.8 | Power Line Conducted Emission | Compliant |

N/A* - Not applicable. EUT has no Stand-Alone receiver port



1.3 PRODUCT INFORMATION

1.3.1 Technical Description

The Equipment Under Test (EUT) was a Nextivity Inc. Cel-Fi Quatra Cellphone Signal Repeater. The EUT is a WCDMA/LTE Signal Booster to improve voice and data cellular performance in large enterprise environments. The EUT consists of two separate units: the Network Unit (NU) and the Coverage Unit (CU). The NU comprises a transmitter and receiver which communicate with the cell tower and the CU. Users place the NU in an area with the strongest signal from the carrier network. The CU is then placed in the centre of the home or office, or in the area where the best signal quality is best needed. The NU and CU are placed at varying distances apart and are communicated via Ethernet cables. Both NU and CU also includes Bluetooth LE connectivity. They are using the same Bluetooth module and antenna. LTE Band 12 function of the EUT was verified in this test report.



1.3.2 EUT General Description

| EUT Description | Cellphone Signal Repeater | | | | | | | | | | |
|---|--|--------------------|---------|-------|---------|---------|---|------|----|----|------|
| Model Name | Cel-Fi Quatra | | | | | | | | | | |
| Model Number(s) | NU: Q34-2/5/12/66NU CU: Q34-2/5/12/66CU | | | | | | | | | | |
| Rated Voltage | NU: 54V DC via external AC/DC adapter CU: 54V DC via POE | | | | | | | | | | |
| Mode Verified | LTE Band 12 | | | | | | | | | | |
| Frequency Bands | NU: 699 - 716MHz CU: 729 - 746MHz | | | | | | | | | | |
| Channel Bandwidth | 5MHz, 10MHz | | | | | | | | | | |
| Rated Power | <table border="1"> <thead> <tr> <th rowspan="2">Bandwidth (MHz)</th> <th colspan="2">Band 12</th> </tr> <tr> <th>DL (dB)</th> <th>UL (dB)</th> </tr> </thead> <tbody> <tr> <td>5</td> <td>10.0</td> <td rowspan="2">20</td> </tr> <tr> <td>10</td> <td>13.0</td> </tr> </tbody> </table> | Bandwidth (MHz) | Band 12 | | DL (dB) | UL (dB) | 5 | 10.0 | 20 | 10 | 13.0 |
| Bandwidth (MHz) | Band 12 | | | | | | | | | | |
| | DL (dB) | UL (dB) | | | | | | | | | |
| 5 | 10.0 | 20 | | | | | | | | | |
| 10 | 13.0 | | | | | | | | | | |
| Capability | WCDMA (Band 2 and 5), LTE (Band 12 and 4) and BT LE | | | | | | | | | | |
| Primary Unit (EUT) | <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering | | | | | | | | | | |
| Manufacturer Declared Temperature Range | 0°C to 40°C | | | | | | | | | | |
| Antenna Type | PCB PIFA | | | | | | | | | | |
| Manufacturer | Nextivity Inc. | | | | | | | | | | |
| Antenna Model | N/A | | | | | | | | | | |
| Maximum Antenna Gain | <table border="1"> <thead> <tr> <th>NU</th> <th>CU</th> </tr> </thead> <tbody> <tr> <td>0 dBi</td> <td>0 dBi</td> </tr> </tbody> </table> | NU | CU | 0 dBi | 0 dBi | | | | | | |
| NU | CU | | | | | | | | | | |
| 0 dBi | 0 dBi | | | | | | | | | | |



1.3.3 Transmit Frequency Table

| Mode | Channel Bandwidth (MHz) | Tx Frequency (MHz) | Emission Designator | ERP (Part 27)* | | EIRP (RSS-130)* | |
|----------------------|-------------------------|--------------------|---------------------|----------------------|--------------------|----------------------|--------------------|
| | | | | Max. Power Avg (dBm) | Max. Power Avg (W) | Max. Power Avg (dBm) | Max. Power Avg (W) |
| LTE Band 12 Downlink | 5 | 731.5 | 4M66F9W | 11.58 | 0.007 | 13.73 | 0.012 |
| | 10 | 741.0 | 8M86F9W | 14.58 | 0.015 | 16.73 | 0.025 |
| LTE Band 12 Uplink | 5 | 701.5 | 4M43F9W | 20.41 | 0.055 | 22.56 | 0.091 |
| | 10 | 711.0 | 8M86F9W | 20.55 | 0.063 | 22.70 | 0.103 |

* The ERP and EIPR are the sum of both Top Antenna and Side Antenna



1.4 EUT TEST CONFIGURATION

1.4.1 Test Configuration Description

| Test Configuration | Description |
|--------------------|---|
| A | Downlink (CU TX). Input signal is applied to B12 antenna port of NU. Output is monitored from B12 Top antenna port of CU. |
| B | Uplink (NU TX). Input signal is applied to B12 antenna port of CU. Output is monitored from B12 Top antenna port of NU. |
| C | Radiated test setup. Downlink (CU TX). Input signal is applied to B12 antenna port of NU. B12 Top antenna port of CU is terminated with a 50Ω load. |
| D | Radiated test setup. Uplink (NU TX). Input signal is applied to B12 antenna port of CU. B12 Top antenna port of NU is terminated with a 50Ω load. |

1.4.2 EUT Exercise Software

Manufacturer provided a configuration software (ConformanceTest.exe) running from a support laptop where both EUT are connected via USB.

1.4.3 Support Equipment and I/O cables


| Manufacturer | Equipment/Cable | Description |
|-----------------|---|---|
| Phihong | AC/DC Adapter (EUT) | M/N: PSA120u-540l6nt-r Rev 02 No. 026, IP: 100-240VAC, 1.6A, 50-60Hz OP: 54VDC, 2.22A |
| Netgear | Network patch Cable (1x NU to CU) | 4.0m, unshielded, Cat5e 24AWG UTP |
| - | Support USB cable | 1.75 meters, shielded Type A to Micro B connector |
| - | Support USB cable | Custom 1.0 meter shielded USB Type A to Type B for the Shielded Test Enclosure |
| Lenovo | Support Laptop | M/N: 2912-3VU, S/N: R9-92MH0 10/11 |
| Lenovo | Support Laptop AC Adapter | M/N: 42T4430 S/N: 11S42T4430Z1ZGWE27AA9X |
| Rhode & Schwarz | Support Wideband Radio Communication Tester | M/N CMW500 S/N 1201.0002K50/103829 |
| Ramsey | Support Shielded Test Enclosure | With custom USB cable |

1.4.4 Worst Case Configuration

Worst-case configuration used in this test report per Transmitter Conducted Output Power (Section 2.1 of this test report). This is for single channel verification, otherwise all three channels (Low, Mid and High) are verified:


| Mode | Bandwidth | Channel No. | Frequency |
|----------------------|-----------|--------------------|-----------|
| LTE Band 12 Downlink | 10MHz | Low Channel 5060 | 734.0MHz |
| LTE Band 12 Uplink | 10MHz | High Channel 23130 | 711.0MHz |

EUT is a mobile device. Final installation position is unknown at the time of verification. For radiated measurements X, Y and Z orientations were verified. No major variation in emissions observed between the three (3) orientations. Verifications performed using "Z" configuration.

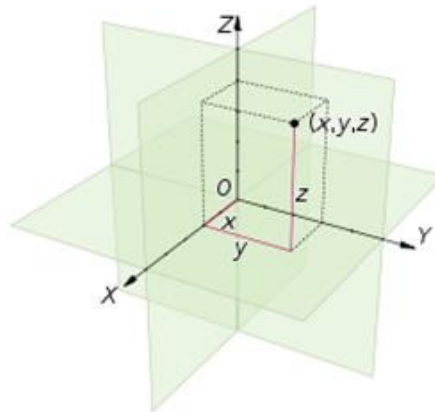


1.4.5 Simplified Test Configuration Diagram


Downlink (CU Tx) Conducted Test

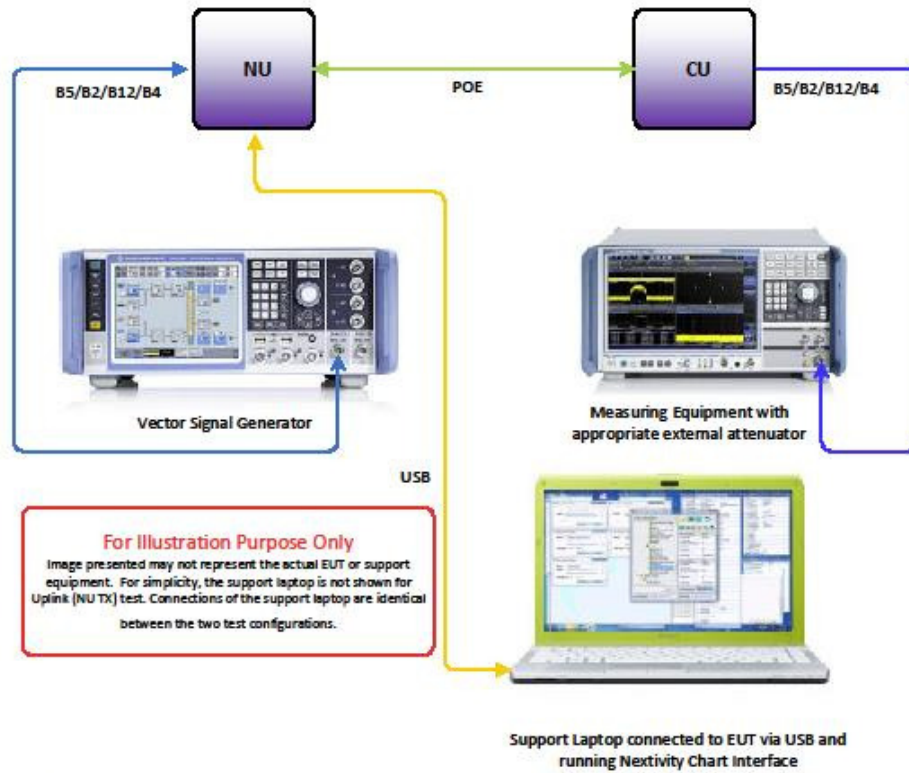


Uplink (NU Tx) Conducted Test

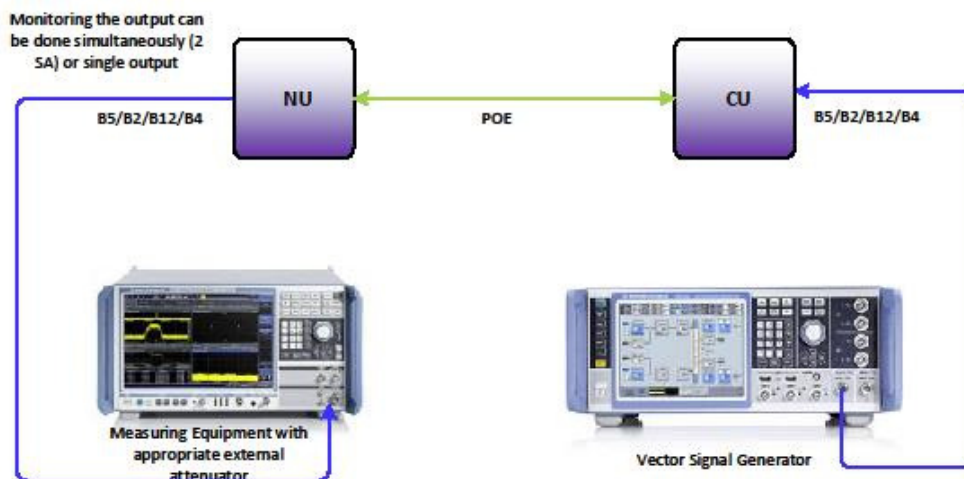

Radiated Testing (Downlink)

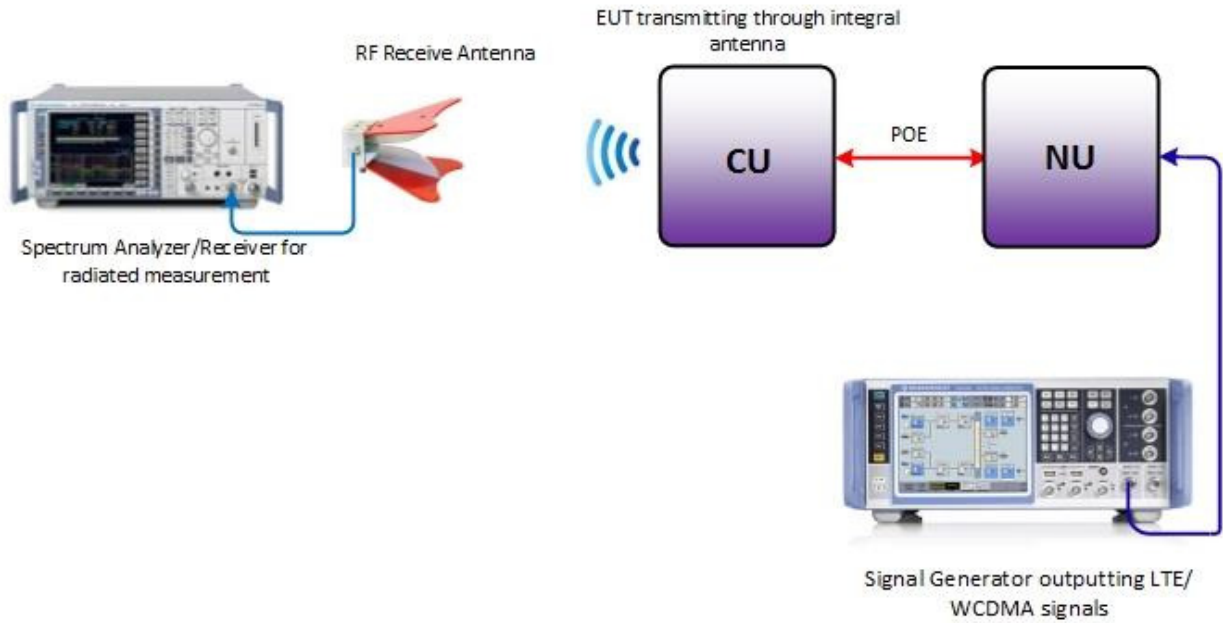

Radiated Testing (Uplink)

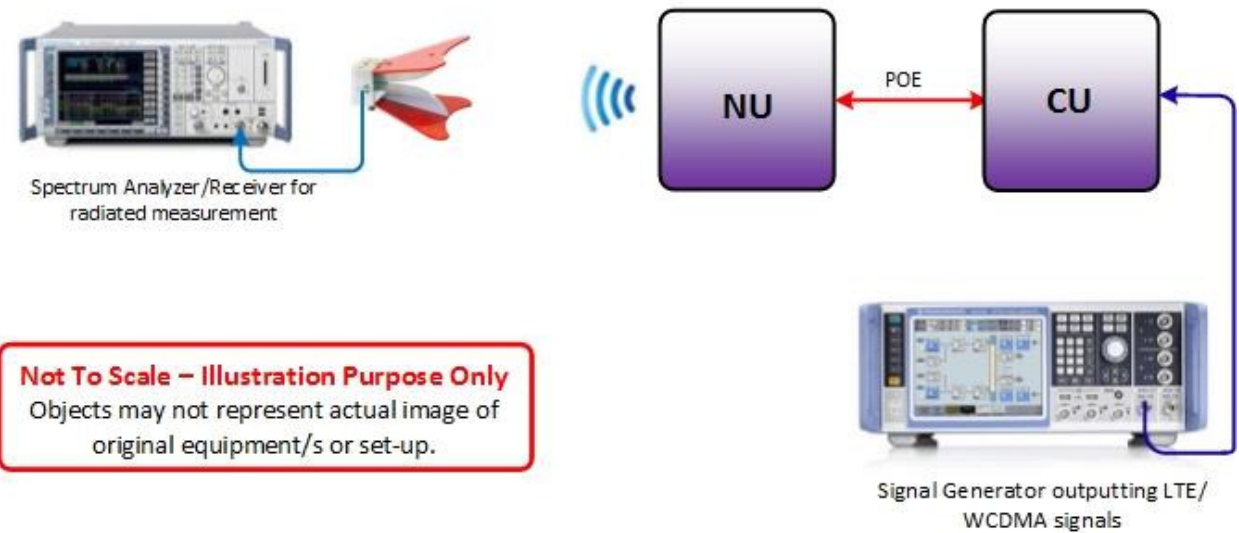

Not To Scale – Illustration Purpose Only
Objects may not represent actual image of original equipment/s or set-up.



1.5 DEVIATIONS FROM THE STANDARD

No deviations from the applicable test standards or test plan were made during testing.

1.6 MODIFICATION RECORD

| Description of Modification | Modification Fitted By | Date Modification Fitted |
|---|------------------------|--------------------------|
| Serial Number: 258602000335 (NU) and 25955100346 (CU) | | |
| N/A | - | - |

The table above details modifications made to the EUT during the test programme. The modifications incorporated during each test (if relevant) are recorded on the appropriate test pages.

1.7 TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.26 2015, American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services For conducted (if applicable) and radiated emissions the equipment under test (EUT) was configured to measure its highest possible emission level. This level was based on the maximized cable configuration from exploratory testing per ANSI C63.26-2015. The test modes were adapted according to the Operating Instructions provided by the manufacturer/client.

1.8 TEST FACILITY LOCATION

1.8.1 TÜV SÜD America Inc. (Mira Mesa)

10040 Mesa Rim Road, San Diego, CA 92121-2912 (32.901268,-117.177681). Phone: 858 678 1400 FAX: 858-546 0364

1.8.2 TÜV SÜD America Inc. (Rancho Bernardo)

Building #8, 16530 Via Esprillo, San Diego, CA 92127-1708 (33.018644,-117.092409). Phone: 858 678 1400 Fax: 858 546 0364.

1.9 TEST FACILITY REGISTRATION

1.9.1 FCC – Registration No.: US1146

TUV SUD America Inc. (San Diego), is an accredited test facility with the site description report on file and has met all the requirements specified in §2.948 of the FCC rules. The acceptance letter from the FCC is maintained in our files and the Registration is US1146.

FCC ID: NU: YETQ34-251266NU
CU: YETQ34-251266CU
IC: NU: 9298A-Q34251266NU
CU: 9298A-Q34251266CU
Report No. SD72113545-0216D



1.9.2 Innovation, Science and Economic Development Canada Registration No.: 3067A

The 10m Semi-anechoic chamber of TÜV SÜD America Inc. (San Diego) has been registered by Certification and Engineering Bureau of Innovation, Science and Economic Development Canada for radio equipment testing with Registration No. 3067A.



1.10 SAMPLE CALCULATIONS

1.10.1 LTE Emission Designator

Emission Designator = 1M30F9W
 F = Frequency Modulation
 9= Composite Digital Info
 W = Combination (Audio/Data)

1.10.2 Spurious Radiated Emission (below 1GHz)

| | | |
|---|----------------------------|-------------|
| Measuring equipment raw measurement (dBµV/m) @ 30 MHz | | 24.4 |
| Correction Factor (dB) | Asset# 1066 (cable) | 0.3 |
| | Asset# 1172 (cable) | 0.3 |
| | Asset# 1016 (preamplifier) | -30.7 |
| | Asset# 1175(cable) | 0.3 |
| | Asset# 1002 (antenna) | 17.2 |
| Reported QuasiPeak Final Measurement (dBµV/m) @ 30MHz | | 11.8 |

1.10.3 Spurious Radiated Emission – Substitution Method

Example = 84dBµV/m @ 1413 MHz (numerical sample only)

The field strength reading of 84dBµV/m @ 1413 MHz (2nd Harmonic of 706.5 MHz) is the maximized measurement when the EUT is on the turntable measured at 3 meters. The gain of the substituted antenna is 7.8dBi while the transmit cable loss is 1.0 dB (cable between signal generator and the substituted antenna). The signal generator level is adjusted until the 84dBµV/m level at the receiving end is replicated (identical test setup, i.e. same antenna, cable/s and preamp). If the adjusted signal generator level is -18dBm, then we have the following for both EIRP and ERP as required:

$$\begin{aligned}
 P_{EIRP} &= -18 \text{ dBm} + 7.8 \text{ dBi} - 1\text{dB} \\
 &= 11.2 \text{ dBm} \\
 P_{ERP} &= P_{EIRP} - 2.15 \text{ dB} \\
 &= 11.2 \text{ dBm} - 2.15 \text{ dB} \\
 &= 9.05 \text{ dBm}
 \end{aligned}$$

FCC ID: NU: YETQ34-251266NU
CU: YETQ34-251266CU
IC: NU: 9298A-Q34251266NU
CU: 9298A-Q34251266CU
Report No. SD72113545-0216D



SECTION 2

TEST DETAILS

Radio Testing of the
Nextivity Inc.
Cel-Fi Quatra Cellphone Signal Repeater



2.1 TRANSMITTER CONDUCTED OUTPUT POWER

2.1.1 Specification Reference

FCC 47 CFR Part 2, Clause 2.1046 (a) and (c)
RSS-130, Clause 4.4

2.1.2 Standard Applicable

FCC 47 CFR Part 2, Clause 2.1046:

(a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in §2.1033(c)(8). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

(c) For measurements conducted pursuant to paragraphs (a) and (b) of this section, all calculations and methods used by the applicant for determining carrier power or peak envelope power, as appropriate, on the basis of measured power in the radio frequency load attached to the transmitter output terminals shall be shown. Under the test conditions specified, no components of the emission spectrum shall exceed the limits specified in the applicable rule parts as necessary for meeting occupied bandwidth or emission limitations.

2.1.3 Equipment Under Test and Modification State

Serial No: 258602000335 (NU) and 25955100346 (CU) / Test Configuration A and B

2.1.4 Date of Test/Initial of test personnel who performed the test

April 12, 14 and May 10, 2016/XYZ

2.1.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.1.6 Environmental Conditions

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility.

| | |
|---------------------|----------------|
| Ambient Temperature | 24.7 – 27.4°C |
| Relative Humidity | 42.2 – 47.7% |
| ATM Pressure | 98.8 – 99.7kPa |



2.1.7 Additional Observations


- This is a conducted test using an average power meter.
- The path loss was measured and entered as a level offset.
- Both Peak and Average measurements presented.
- Since LTE B12 supports MIMO mode, using the Measre-and-Sum approach, the output power of both Top Antenna Port and Side Antenna Port were measured, and the total output power were then summed mathematically in linear power units according to FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

2.1.8 Test Results


| LTE B12 Downlink | | | | | | | | |
|------------------|-------------|-----------------|-----------------|----------------|-----------------|----------------|-----------------|----------------|
| Bandwidth (MHz) | Channel | Frequency (MHz) | Top Antenna | | Side Antenna | | Sum | |
| | | | Avg Power (dBm) | PK Power (dBm) | Avg Power (dBm) | PK Power (dBm) | Avg Power (dBm) | PK Power (dBm) |
| 5 | 5035 | 731.5 | 10.90 | 22.73 | 10.53 | 20.34 | 13.73 | 24.71 |
| | 5095 | 737.5 | 10.68 | 21.43 | 10.37 | 21.26 | 13.54 | 24.36 |
| | 5155 | 743.5 | 10.78 | 20.44 | 10.31 | 21.31 | 13.56 | 23.91 |
| 10 | 5060 | 734.0 | 13.93 | 23.24 | 13.50 | 23.22 | 16.73 | 26.24 |
| | 5095 | 737.5 | 13.80 | 23.13 | 13.36 | 23.12 | 16.60 | 26.14 |
| | 5130 | 741.0 | 13.94 | 23.47 | 13.34 | 22.97 | 16.66 | 26.24 |

| LTE B12 Uplink | | | | | | | | |
|-----------------|--------------|-----------------|-----------------|----------------|-----------------|----------------|-----------------|----------------|
| Bandwidth (MHz) | Channel | Frequency (MHz) | Top Antenna | | Side Antenna | | Sum | |
| | | | Avg Power (dBm) | PK Power (dBm) | Avg Power (dBm) | PK Power (dBm) | Avg Power (dBm) | PK Power (dBm) |
| 5 | 23035 | 701.5 | 19.59 | 29.07 | 19.50 | 31.12 | 22.56 | 33.23 |
| | 23095 | 707.5 | 19.54 | 30.24 | 19.25 | 27.96 | 22.41 | 32.26 |
| | 23155 | 713.5 | 19.10 | 30.93 | 19.24 | 28.91 | 22.18 | 33.05 |
| 10 | 23060 | 704.0 | 19.45 | 29.27 | 19.26 | 28.74 | 22.37 | 32.02 |
| | 23095 | 707.5 | 19.53 | 29.50 | 19.45 | 30.14 | 22.50 | 32.84 |
| | 23130 | 711.0 | 20.13 | 30.69 | 19.20 | 29.00 | 22.70 | 32.94 |

2.1.9 Sample Test Plot

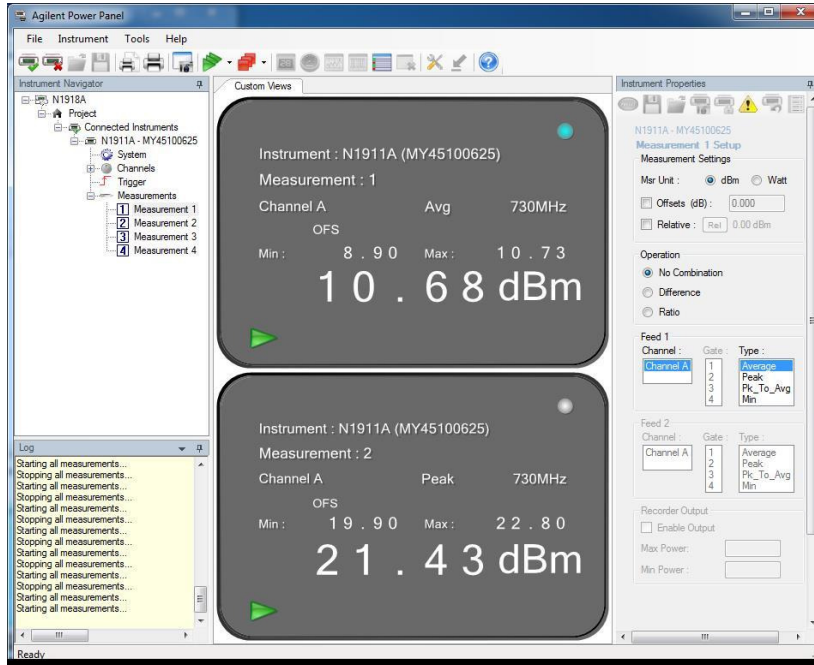

LTE Band 12 DL 5MHz Bandwidth Mid Channel

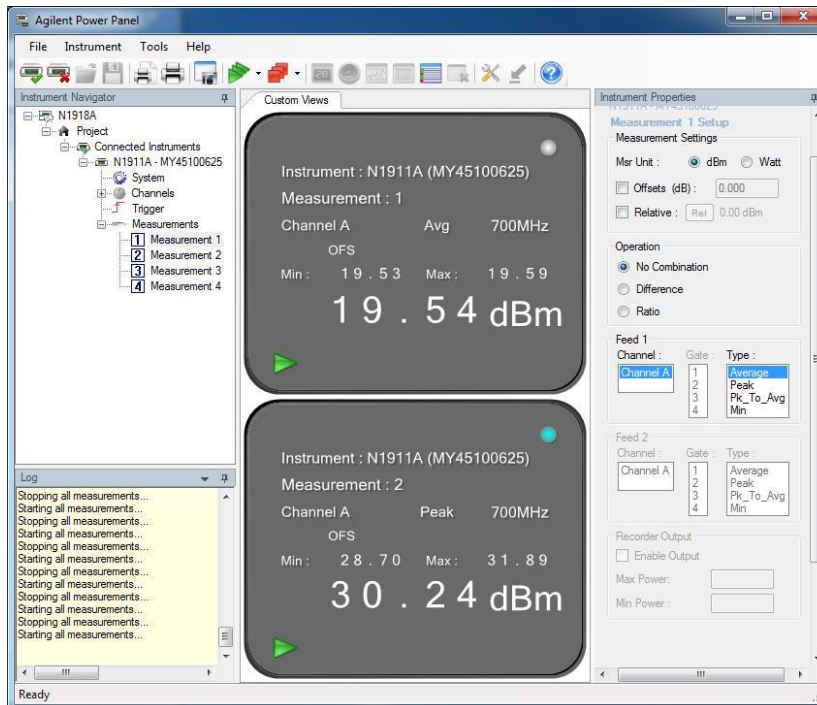

LTE Band 12 UL 5MHz Bandwidth Mid Channel

2.2 EFFECTIVE RADIATED POWER

2.2.1 Specification Reference

FCC 47 CFR Part 27, Clause 27.50 (c)
RSS-130, Clause 4.4

2.2.2 Standard Applicable

FCC 47 CFR Part 27, Clause 27.50 (c):
(9) Control and mobile stations in the 698–746 MHz band are limited to 30 watts ERP.

RSS-130, Clause 4.4:

The e.i.r.p. shall not exceed 50 watts for mobile equipment or for outdoor fixed subscriber equipment, nor shall it exceed 5 watts for portable equipment or for indoor fixed subscriber equipment.

2.2.3 Equipment Under Test and Modification State

Serial No: 258602000335 (NU) and 25955100346 (CU)

2.2.4 Date of Test/Initial of test personnel who performed the test

April 12 and 14, 2016/XYZ

2.2.5 Additional Observations

- ERP was calculated as per Section 1.3.2 of KDB412172 D01 (Determining ERP and EIRP v01).
- Calculation formula in logarithmic terms:

$$\text{ERP} = P_T + G_T - L_c - 2.15\text{dB}$$

Where:

P_T = transmitter conducted output power dBm (Section 2.1 of this test report)

G_T = gain of the transmitting antenna, in dBi (EIRP: the -2.15 in the formula is to convert EIRP to ERP);

L_c = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

2.2.6 Sample Computation

$$\begin{aligned}\text{ERP} &= P_T + G_T - L_c - 2.15\text{dB} \\ &= 29.87 \text{ (Peak)} + 0.13 \text{ (max. gain)} - 3.84 \text{ (cable loss)} - 2.15 \\ &= 24.01 \text{ dBm}\end{aligned}$$



2.2.7 Test Results

| LTE B12 Downlink | | | | | | | |
|------------------|-----------------|-----------------|--------------|--------------------|-----------|------------|-------------|
| Bandwidth (MHz) | Frequency (MHz) | Avg Power (dBm) | | Antenna Gain (dBi) | Sum | | Limit (dBm) |
| | | Top Antenna | Side Antenna | | ERP (dBm) | EIRP (dBm) | |
| 5 | 731.5 | 10.90 | 10.53 | 0 | 11.58 | 13.73 | 44.77 |
| | 737.5 | 10.68 | 10.37 | 0 | 11.39 | 13.54 | 44.77 |
| | 743.5 | 10.78 | 10.31 | 0 | 11.41 | 13.56 | 44.77 |
| 10 | 734.0 | 13.93 | 13.50 | 0 | 14.58 | 16.73 | 44.77 |
| | 737.5 | 13.80 | 13.36 | 0 | 14.45 | 16.60 | 44.77 |
| | 741.0 | 13.94 | 13.34 | 0 | 14.51 | 16.66 | 44.77 |

| LTE B12 Uplink | | | | | | | |
|-----------------|-----------------|-----------------|--------------|--------------------|-----------|------------|-------------|
| Bandwidth (MHz) | Frequency (MHz) | Avg Power (dBm) | | Antenna Gain (dBi) | Sum | | Limit (dBm) |
| | | Top Antenna | Side Antenna | | ERP (dBm) | EIRP (dBm) | |
| 5 | 701.5 | 19.59 | 19.50 | 0 | 20.41 | 22.56 | 44.77 |
| | 707.5 | 19.54 | 19.25 | 0 | 20.26 | 22.41 | 44.77 |
| | 713.5 | 19.10 | 19.24 | 0 | 20.03 | 22.18 | 44.77 |
| 10 | 704.0 | 19.45 | 19.26 | 0 | 20.22 | 22.37 | 44.77 |
| | 707.5 | 19.53 | 19.45 | 0 | 20.35 | 22.50 | 44.77 |
| | 711.0 | 20.13 | 19.20 | 0 | 20.55 | 22.70 | 44.77 |



2.3 OCCUPIED BANDWIDTH

2.3.1 Specification Reference

FCC 47 CFR Part 2, Clause 2.1049
FCC 47 CFR Part 27, Clause 27.53(h)
RSS-GEN Issue 4, Clause 6.6

2.3.2 Standard Applicable

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

2.3.3 Equipment Under Test and Modification State

Serial No: 258602000335 (NU) and 25955100346 (CU) / Test Configuration A and B

2.3.4 Date of Test/Initial of test personnel who performed the test

April 12 and 14, 2016/XYZ

2.3.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.3.6 Environmental Conditions

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility.

| | |
|---------------------|---------|
| Ambient Temperature | 25.3°C |
| Relative Humidity | 47.7 % |
| ATM Pressure | 99.7kPa |

2.3.7 Additional Observations

- This is a conducted test. Both 26dB bandwidth and 99% bandwidth presented.
- The transducer factor (TDF) used is from the external attenuators and cables used.
- All channels for emission bandwidth verification verified.
- The span is between two and five times the anticipated OBW.
- The RBW is set to 1% of the OBW while the VBW is $\geq 3X$ RBW.
- The detector is peak and the trace mode is max hold.
- All low, middle and high channels were verified. Only test plots for middle channel presented in this test report as the representative configuration.



- The SA built-in emission bandwidth measurement feature is utilized. The power level setting is set to 99% while “x dB” is set to -26.


2.3.8 Test Results

| Downlink | | | | | |
|-------------|-----------------|---------|-----------------|-----------|----------------|
| Band | Bandwidth (MHz) | Channel | Frequency (MHz) | OBW (MHz) | -26dB BW (MHz) |
| LTE Band 12 | 5 | 5035 | 731.5 | 4.63 | 5.12 |
| | | 5095 | 737.5 | 4.63 | 5.12 |
| | | 5155 | 743.5 | 4.66 | 5.15 |
| | 10 | 5060 | 734.0 | 8.86 | 9.44 |
| | | 5095 | 737.5 | 8.86 | 9.38 |
| | | 5130 | 741.0 | 8.86 | 9.38 |

| Uplink | | | | | |
|-------------|-----------------|---------|-----------------|-----------|----------------|
| Band | Bandwidth (MHz) | Channel | Frequency (MHz) | OBW (MHz) | -26dB BW (MHz) |
| LTE Band 12 | 5 | 23035 | 701.5 | 4.40 | 4.78 |
| | | 23095 | 707.5 | 4.43 | 4.78 |
| | | 23155 | 713.5 | 4.43 | 4.78 |
| | 10 | 23060 | 704.0 | 8.80 | 9.32 |
| | | 23095 | 707.5 | 8.80 | 9.38 |
| | | 23130 | 711.0 | 8.86 | 9.32 |




LTE Band 12 Downlink 5MHz Bandwidth Mid Channel 99% OBW

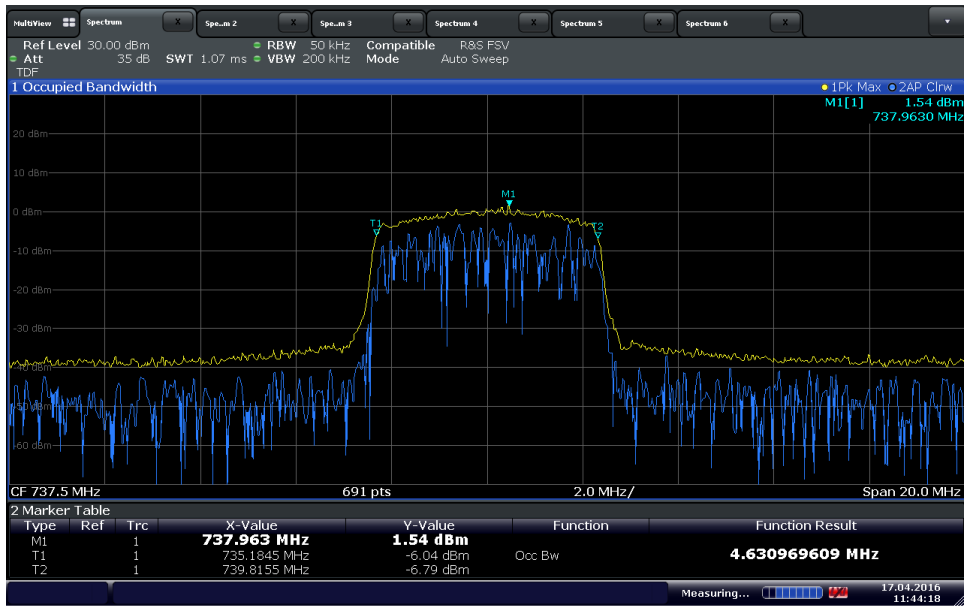

Date: 17.APR.2016 11:44:19


LTE Band 12 Downlink 5MHz Bandwidth Mid Channel -26dB BW

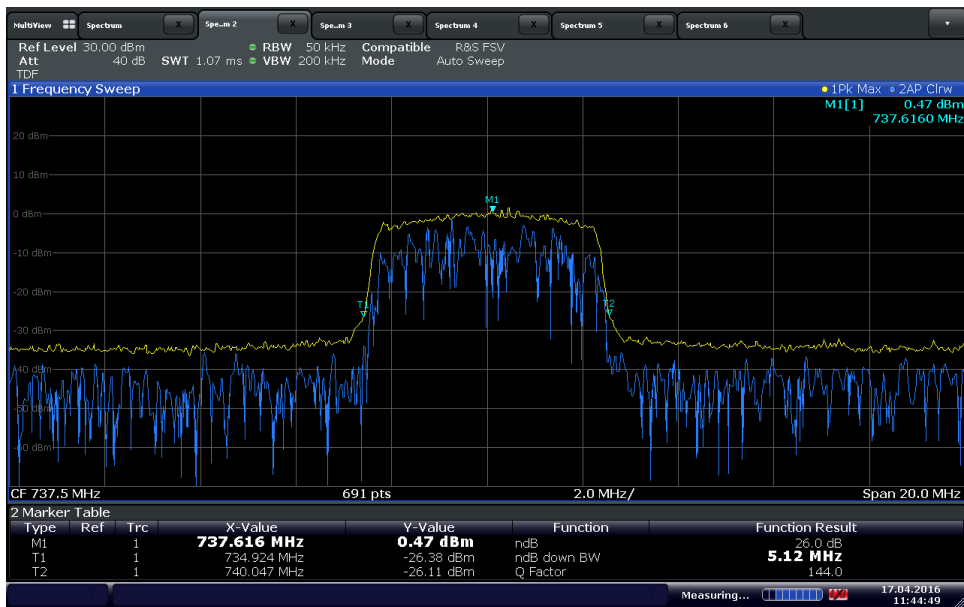

Date: 17.APR.2016 11:44:49




LTE Band 12 Downlink 10MHz Bandwidth Mid Channel 99% OBW

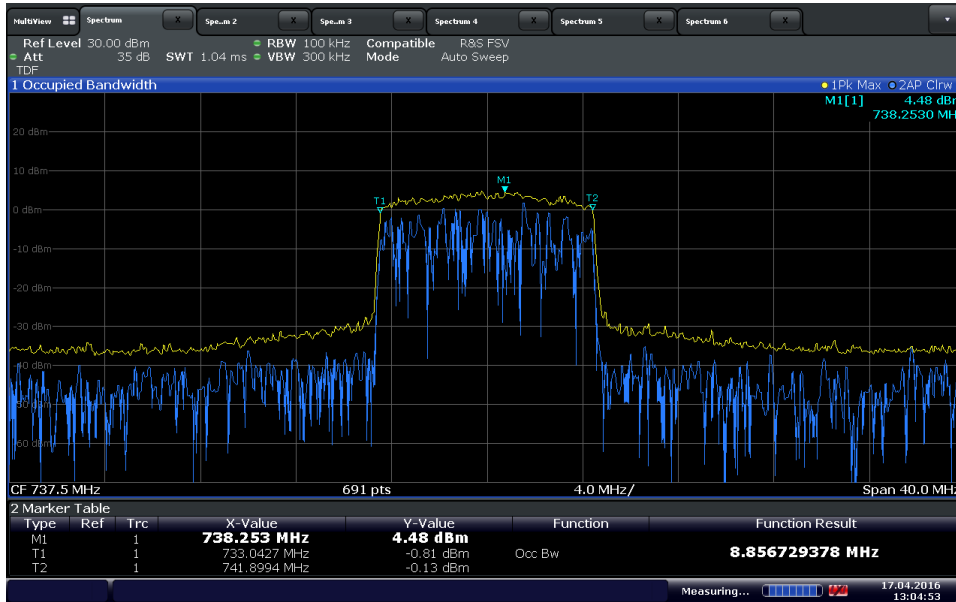


Date: 17 APR 2016 13:04:53

LTE Band 12 Downlink 10MHz Bandwidth Mid Channel -26dB BW

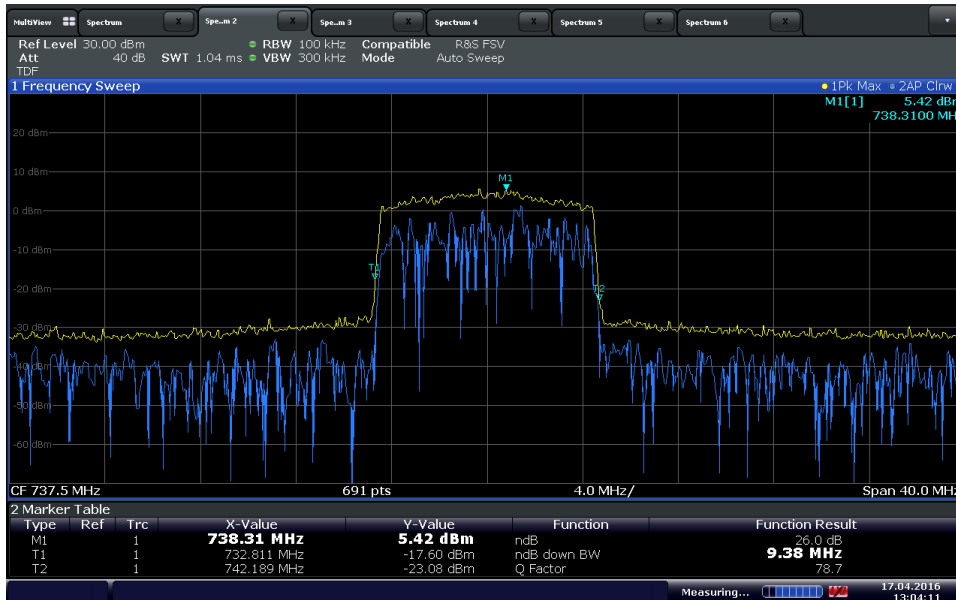


Date: 17 APR 2016 13:04:11


LTE Band 12 Uplink 5MHz Bandwidth Mid Channel 99% OBW

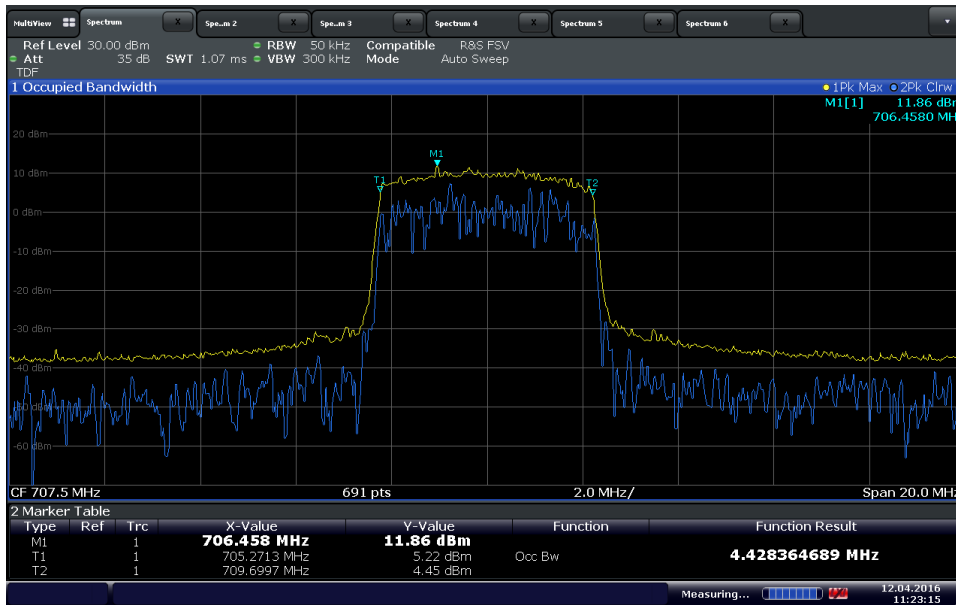

LTE Band 12 Uplink 5MHz Bandwidth Mid Channel -26dB BW

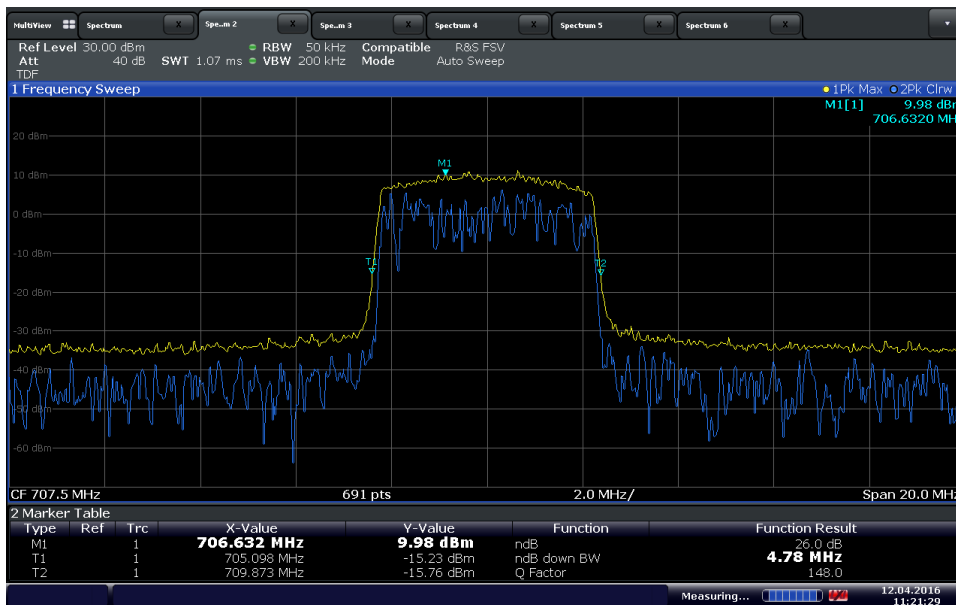


LTE Band 12 Uplink 10MHz Bandwidth Mid Channel 99% OBW

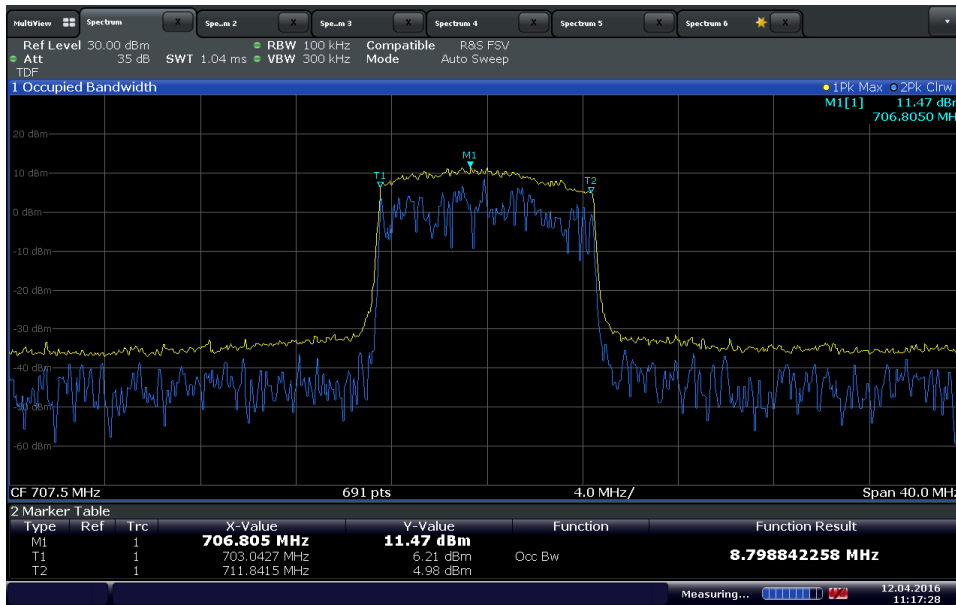

Date: 12.APR.2016 11:17:28

LTE Band 12 Uplink 10MHz Bandwidth Mid Channel -26dB BW

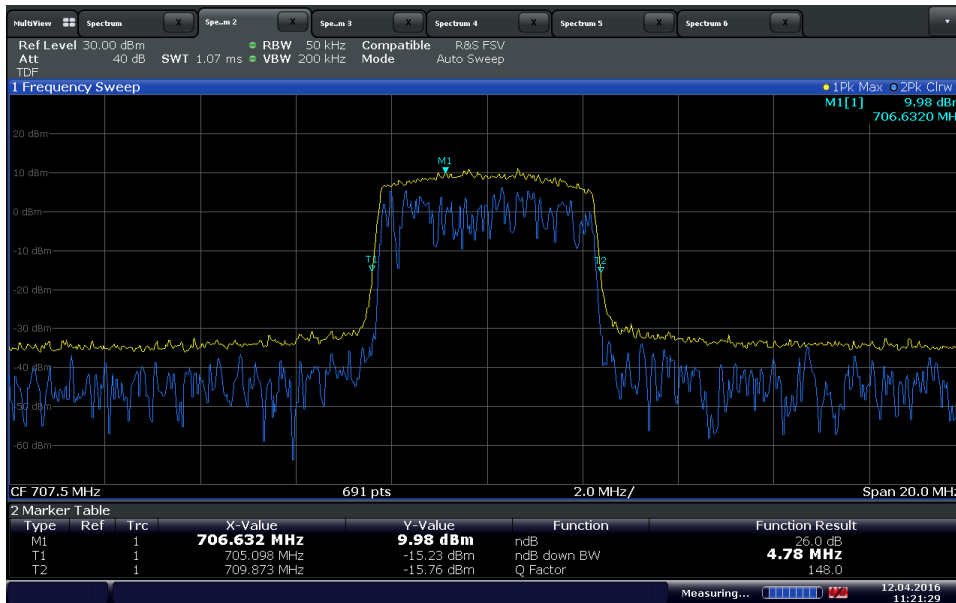

Date: 12.APR.2016 11:21:30

2.4 PEAK-AVERAGE RATIO

2.4.1 Specification Reference

RSS-130, Clause 4.4

2.4.2 Standard Applicable

The peak-to-average power ratio (PAPR) of the transmitter shall not exceed 13 dB for more than 0.1% of the time and shall use a signal corresponding to the highest PAPR during periods of continuous transmission.

2.4.3 Equipment Under Test and Modification State

Serial No: 258602000335 (NU) and 25955100346 (CU) / Test Configuration A and B

2.4.4 Date of Test/Initial of test personnel who performed the test

April 12 and 17, 2016/XYZ

2.4.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.4.6 Environmental Conditions

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility.

| | |
|---------------------|----------------|
| Ambient Temperature | 25.3 - 27.4°C |
| Relative Humidity | 47.7 - 24.8 % |
| ATM Pressure | 99.0 - 99.7kPa |

2.4.7 Additional Observations

- This is a conducted test. Test procedure is per Section 5.7 of KDB971168 (D01 Power Meas License Digital Systems v02r02).
- The transducer factor (TDF) used is from the external attenuators and cables used.
- Measurement was done using the Spectrum Analyzer's Complementary Cumulative Distribution Function (CCDF) measurement profile. The built-in function is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth (crest factor or peak-to-average ratio) The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signals spends at or above the level defines the probability for that particular power level.
- Procedure is per Section 5.7.1 of KDB971168.
- RBW was set to maximum the SA can support.




- The maximum PAPR level associated with a probability of 0.1% was recorded.
- All low, middle and high channels were verified. Only test plots for middle channel presented in this test report as the representative configuration.
- There are no measured PAR levels greater than 13dB. EUT complies.

2.4.8 Test Results

| Downlink | | | | |
|-------------|-----------------|---------|-----------------|----------|
| Band | Bandwidth (MHz) | Channel | Frequency (MHz) | PAR (dB) |
| LTE Band 12 | 5 | 5035 | 731.5 | 11.09 |
| | | 5095 | 737.5 | 10.58 |
| | | 5155 | 743.5 | 10.57 |
| | 10 | 5060 | 734.0 | 9.85 |
| | | 5095 | 737.5 | 9.67 |
| | | 5130 | 741.0 | 9.51 |

| Uplink | | | | |
|-------------|-----------------|---------|-----------------|----------|
| Band | Bandwidth (MHz) | Channel | Frequency (MHz) | PAR (dB) |
| LTE Band 12 | 5 | 23035 | 701.5 | 9.96 |
| | | 23095 | 707.5 | 10.62 |
| | | 23155 | 713.5 | 11.49 |
| | 10 | 23060 | 704.0 | 11.54 |
| | | 23095 | 707.5 | 11.17 |
| | | 23130 | 711.0 | 10.95 |

2.4.9 Sample Test Plot

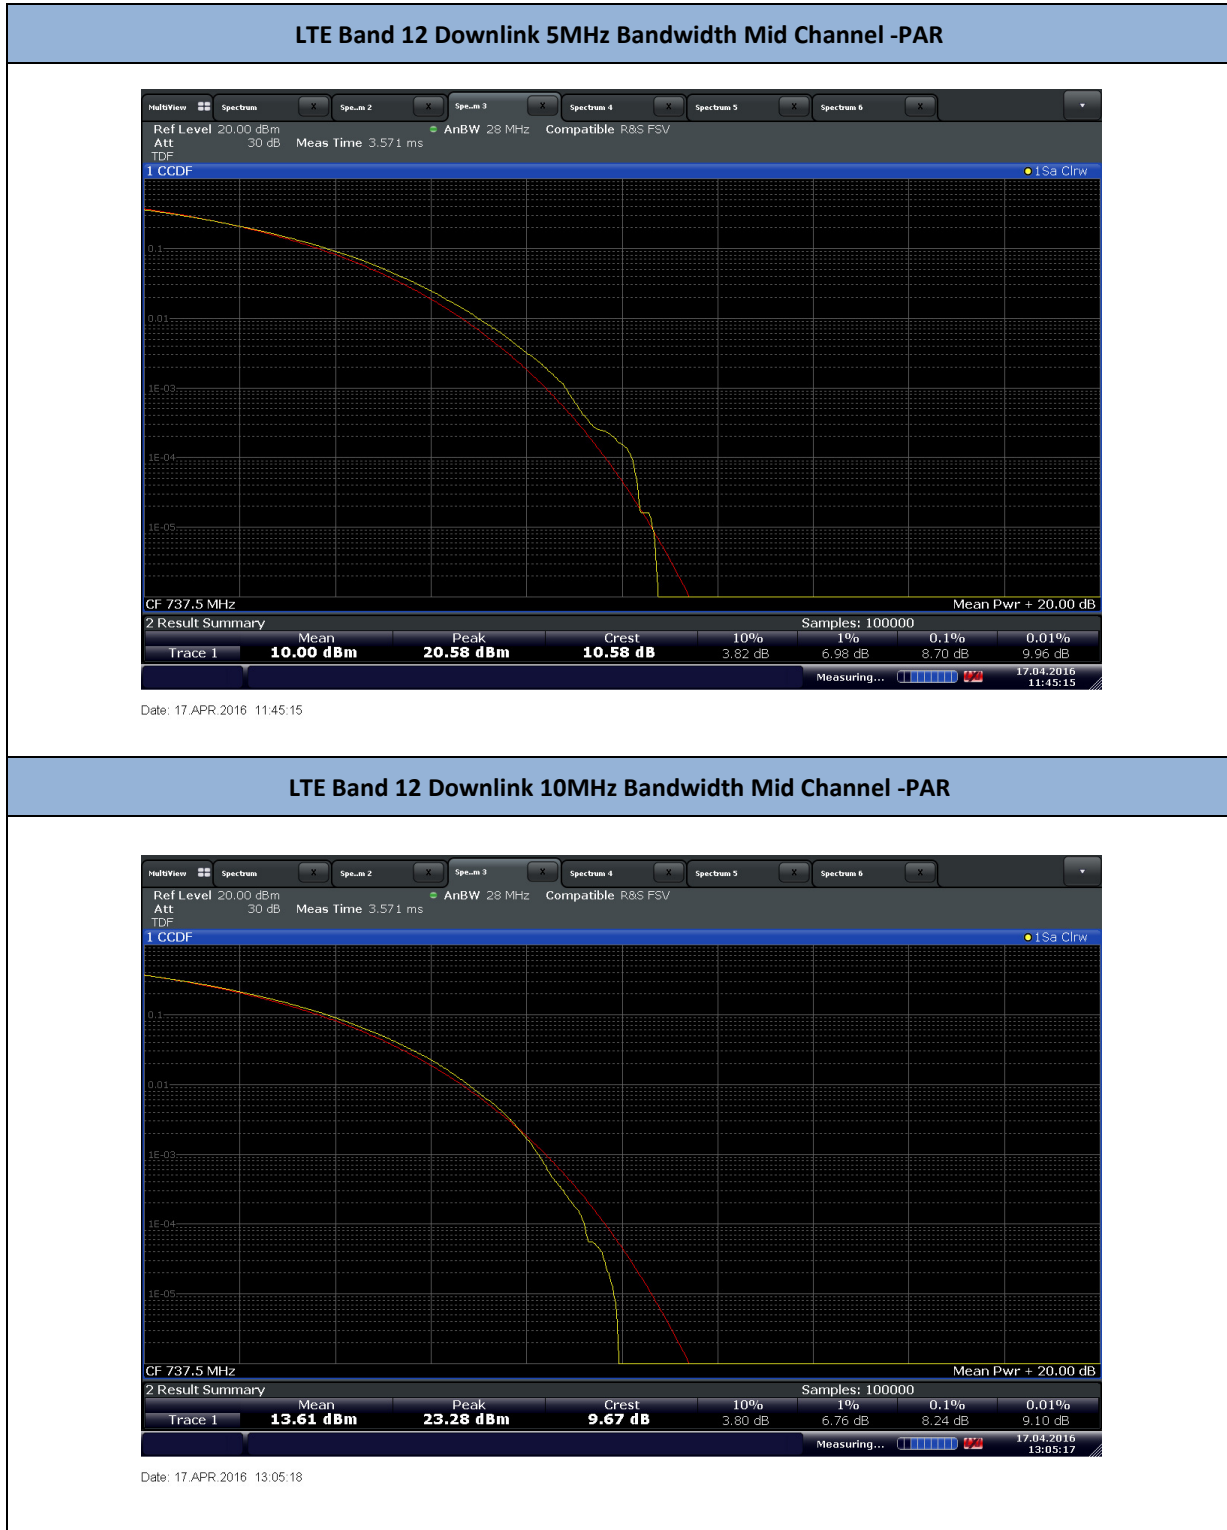



LTE Band 12 Uplink 5MHz Bandwidth Mid Channel -PAR



Date: 12 APR 2016 11:23:44

LTE Band 12 Uplink 10MHz Bandwidth Mid Channel -PAR



Date: 12 APR 2016 11:18:31

2.5 BAND EDGE

2.5.1 Specification Reference

FCC 47 CFR Part 27, Clause 27.53(g)
RSS-130, Clause 4.6.

2.5.2 Standard Applicable

(g) For operations in the 600 MHz band and the 698–746 MHz band, the power of any emission outside a licensee’s frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee’s frequency block, a resolution bandwidth of at least 30 kHz may be employed.

2.5.3 Equipment Under Test and Modification State

Serial No: 258602000335 (NU) and 25955100346 (CU) / Test Configuration A

2.5.4 Date of Test/Initial of test personnel who performed the test

April 12, 14 and 17, 2016/XYZ

2.5.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.5.6 Environmental Conditions/ Test Location

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility

| | |
|---------------------|----------------|
| Ambient Temperature | 24.7 - 27.4°C |
| Relative Humidity | 24.8 - 47.7% |
| ATM Pressure | 98.7 - 99.7kPa |


2.5.7 Additional Observations


- This is a conducted test. Test guidance is per Section 6.0 of KDB971168 (D01 Power Meas License Digital Systems v02r01).
- The path loss was measured and entered as a level offset.
- The center frequency of the spectrum is the band edge frequency.
- Using a span of 2MHz for Band 12, RBW is set to 30 kHz and VBW is set to >3X RBW.



- Since LTE B12 supports MIMO mode, the limit should be adjusted with a correction of -3dB [10log(2)] by using the Measure and Add 10log(N) dB technique according to FCC KDB 62911 D01 Multiple Transmitter Output v02r01 accounting for simultaneous transmission from top antenna and side antenna ports.


2.5.8 Test Results

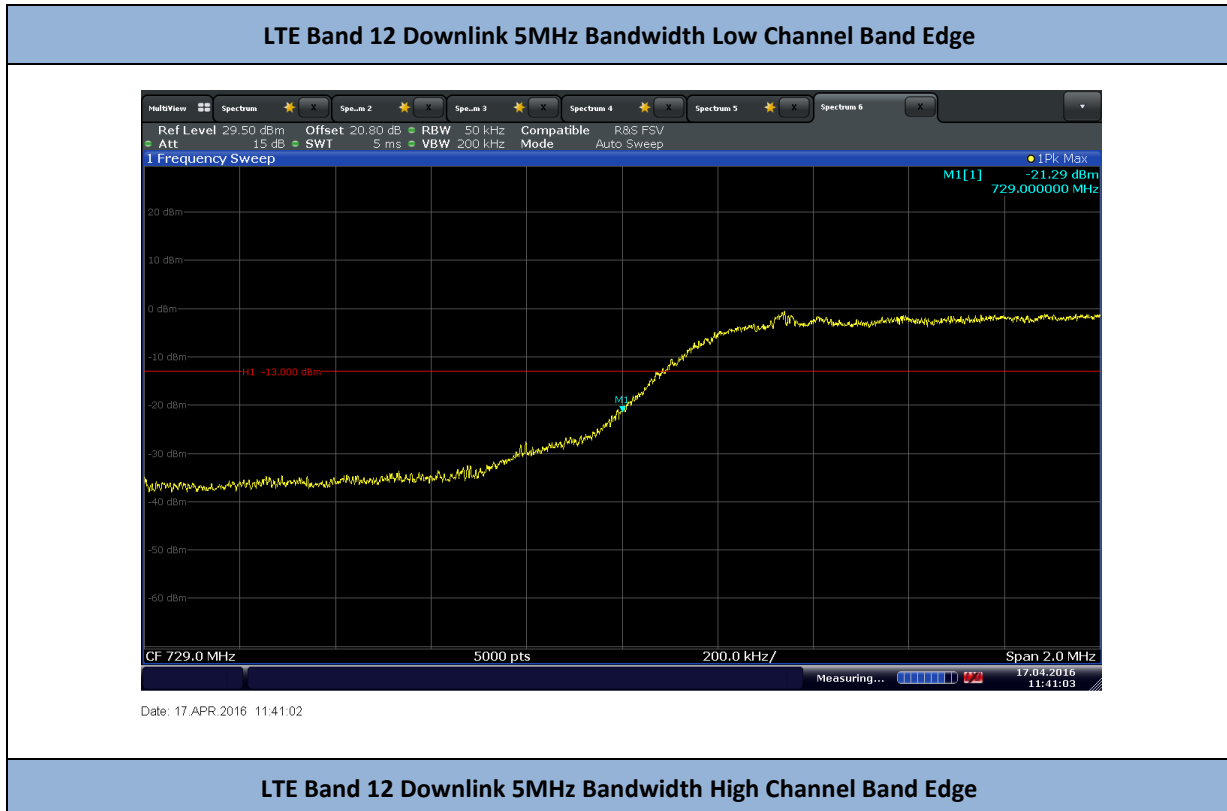

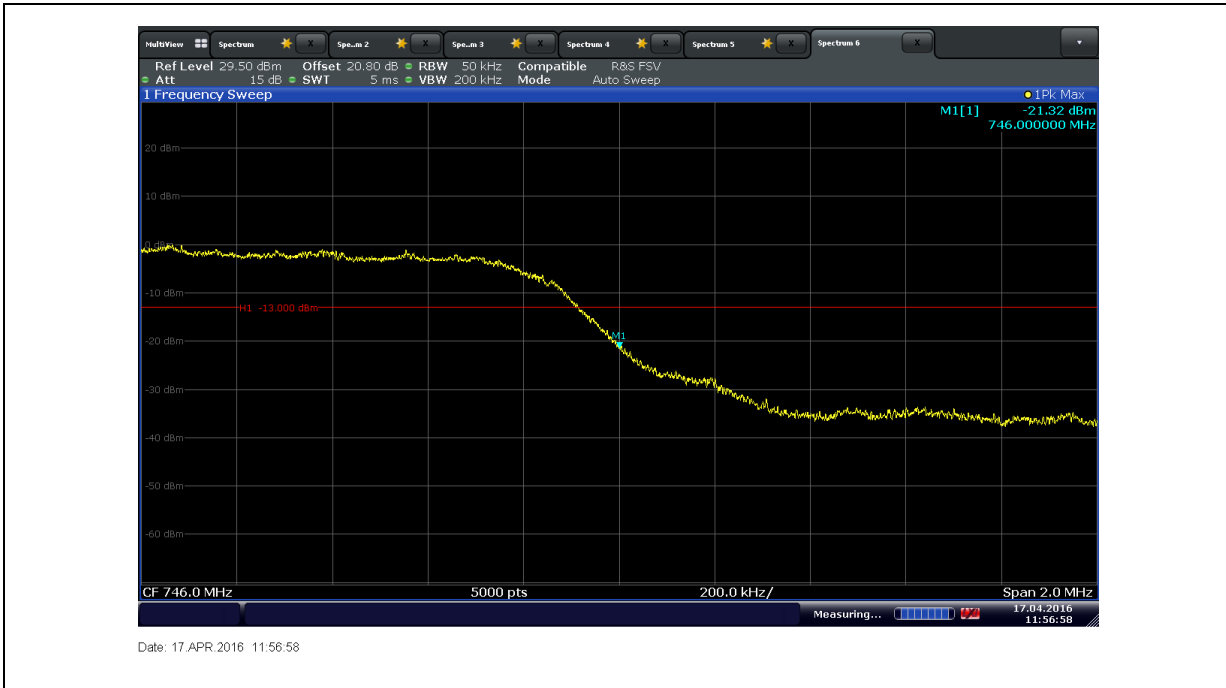




LTE Band 12 Downlink 10MHz Bandwidth Low Channel Band Edge

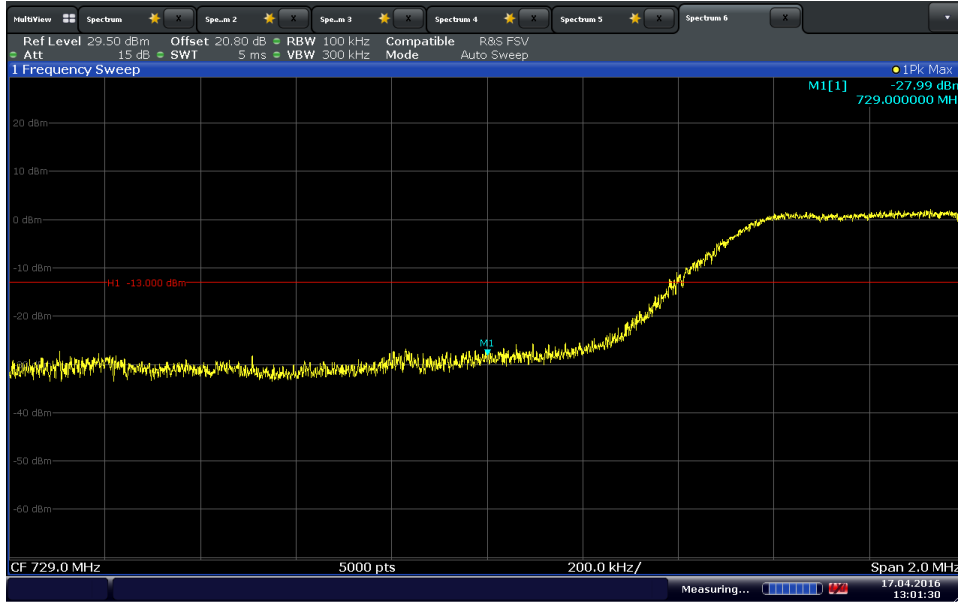

Date: 17 APR 2016 13:01:31

LTE Band 12 Downlink 10MHz Bandwidth High Channel Band Edge

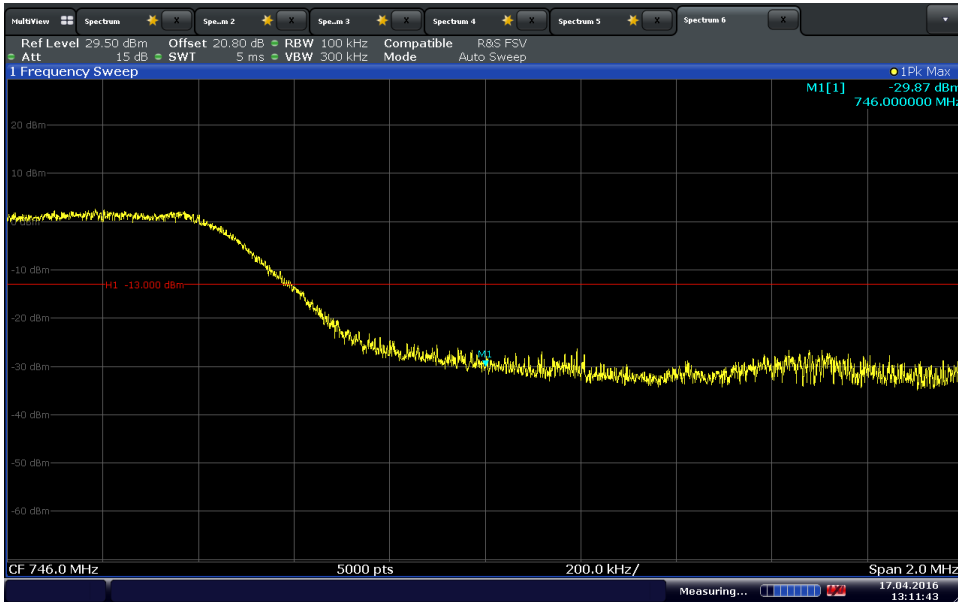

Date: 17 APR 2016 13:11:43



LTE Band 12 Uplink 5MHz Bandwidth Low Channel Band Edge



Date: 12.APR.2016 11:33:44


LTE Band 12 Uplink 5MHz Bandwidth High Channel Band Edge




Date: 12.APR.2016 11:32:09



LTE Band 12 Uplink 10MHz Bandwidth Low Channel Band Edge

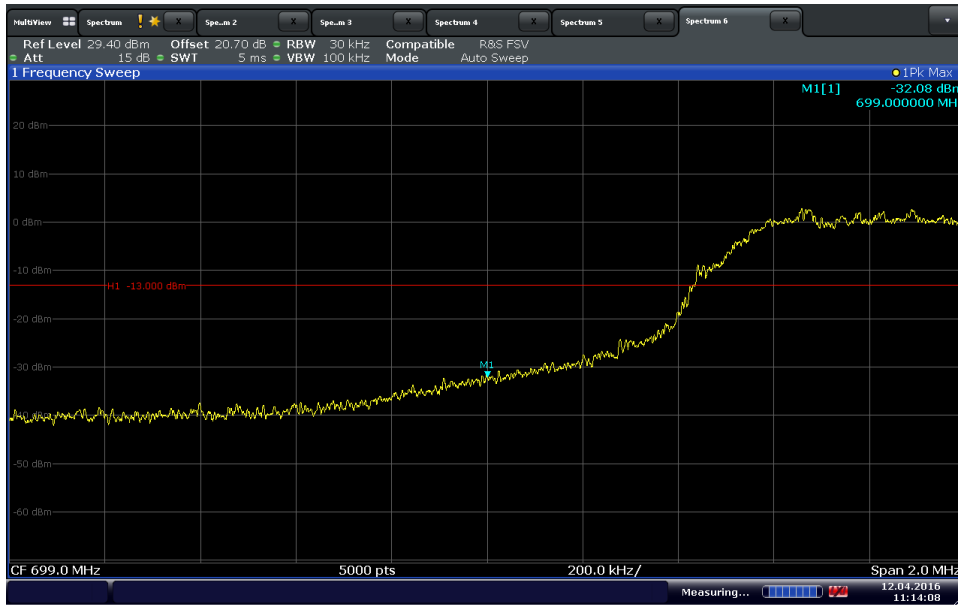

LTE Band 12 Uplink 10MHz Bandwidth High Channel Band Edge

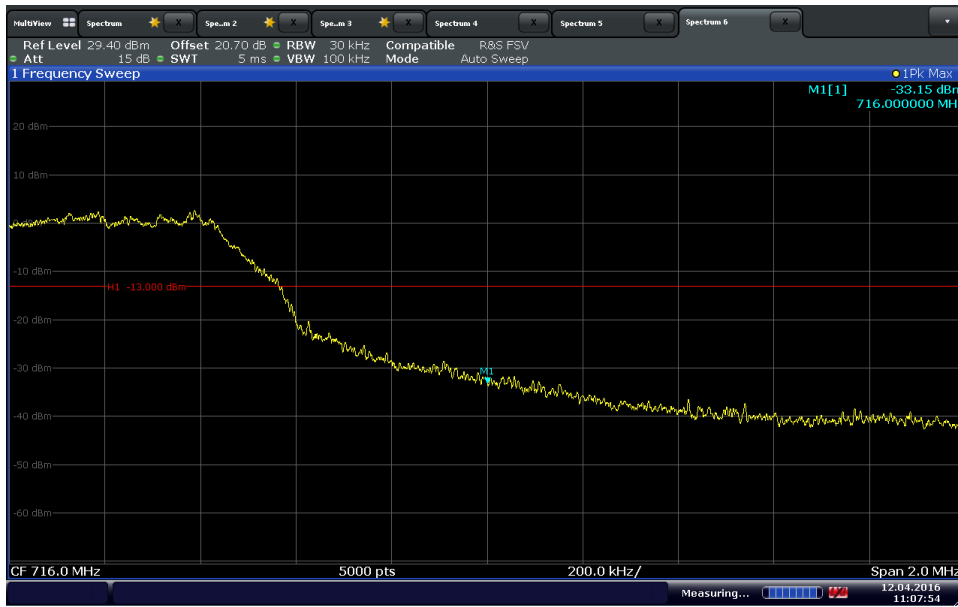



2.6 CONDUCTED SPURIOUS EMISSIONS

2.6.1 Specification Reference

FCC 47 CFR Part 2, Clause 2.1051
FCC 47 CFR Part 27, Clause 27.53(g)
RSS-130, Clause 4.6

2.6.2 Standard Applicable

(g) For operations in the 600 MHz band and the 698–746 MHz band, the power of any emission outside a licensee’s frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee’s frequency block, a resolution bandwidth of at least 30 kHz may be employed.

2.6.3 Equipment Under Test and Modification State

Serial No: 258602000335 (NU) and 25955100346 (CU) / Test Configuration A and B

2.6.4 Date of Test/Initial of test personnel who performed the test

April 12, 14 and 17, 2016/XYZ

2.6.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.6.6 Environmental Conditions/ Test Location


Test performed at TÜV SÜD America Inc. Rancho Bernardo facility

| | |
|---------------------|----------------|
| Ambient Temperature | 24.7 - 27.4°C |
| Relative Humidity | 24.8 - 47.7% |
| ATM Pressure | 98.7 - 99.7kPa |


2.6.7 Additional Observations

- This is a conducted test.
- The transducer factor (TDF) used is from the external attenuators and cables used.
- The spectrum was searched from 9 kHz to 20GHz (requirement is up to the 10th harmonic ($\leq 8\text{GHz}$)).
- All low, middle and high channels were verified. Only test plots for middle channel presented in this test report as the representative configuration.
- Since LTE B12 supports MIMO mode, the limit should be adjusted with a correction of -3dB $[10\log(2)]$ by using the Measure and Add $10\log(N)$ dB technique according to FCC KDB 62911 D01 Multiple Transmitter Output v02r01 accounting for simultaneous transmission from top antenna and side antenna ports.

2.6.8 Test Results

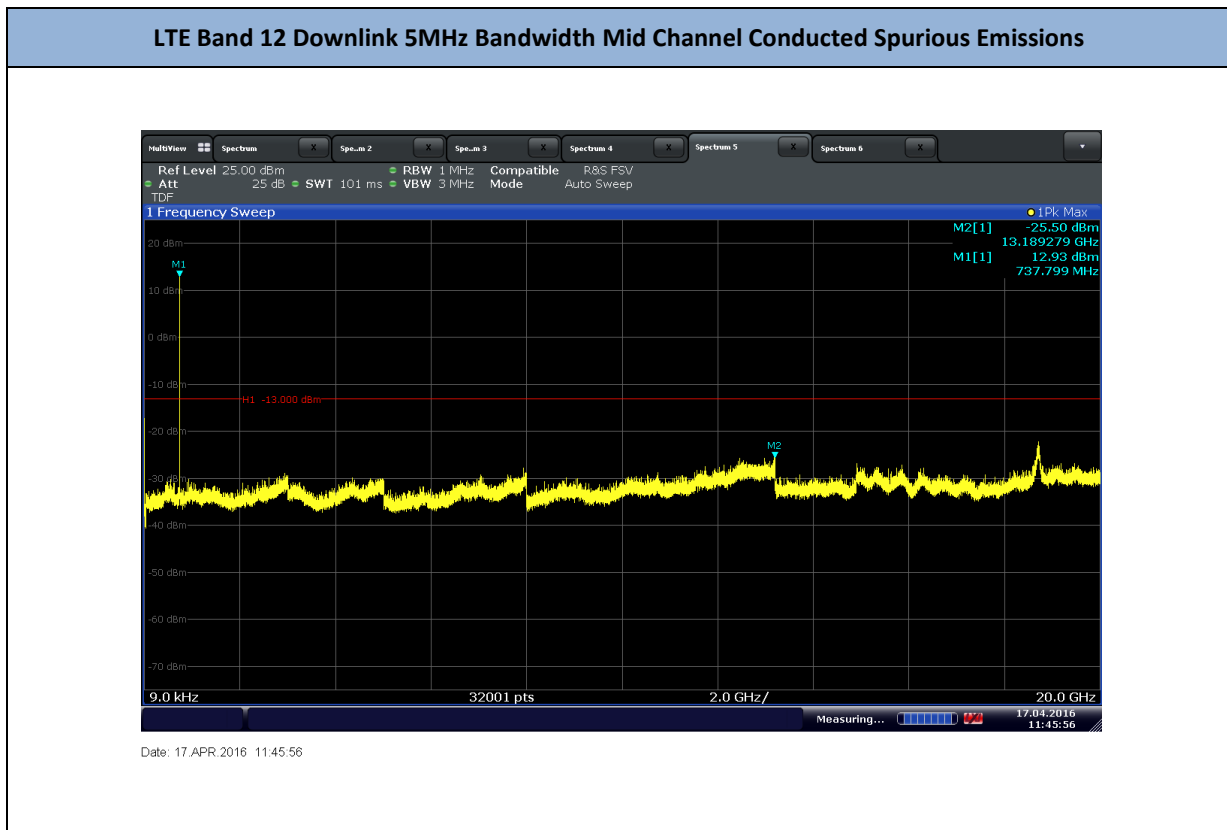


LTE Band 12 Downlink 10MHz Bandwidth Mid Channel Conducted Spurious Emissions

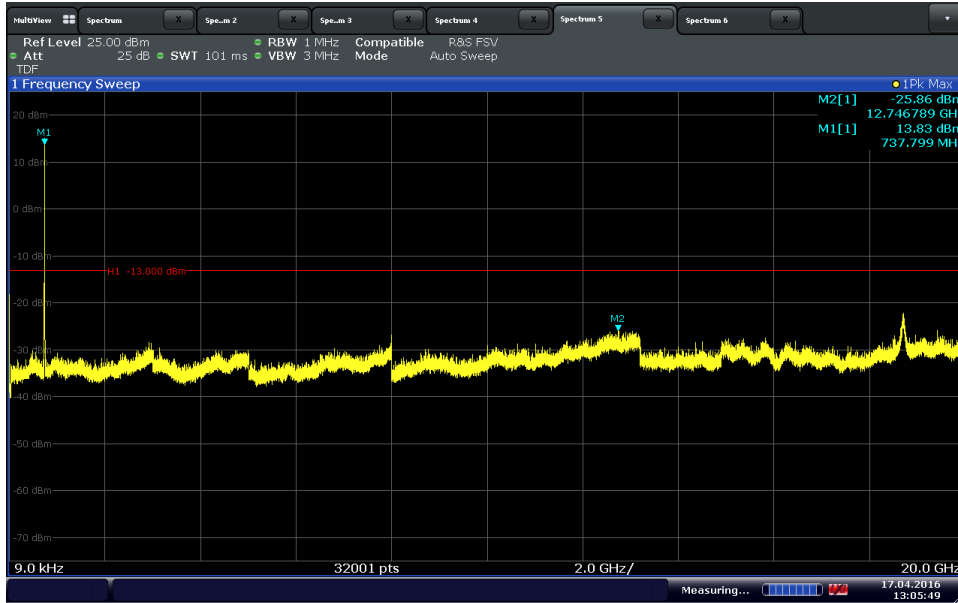


Date: 17.APR.2016 13:05:49

LTE Band 12 Uplink 5MHz Bandwidth Mid Channel Conducted Spurious Emissions

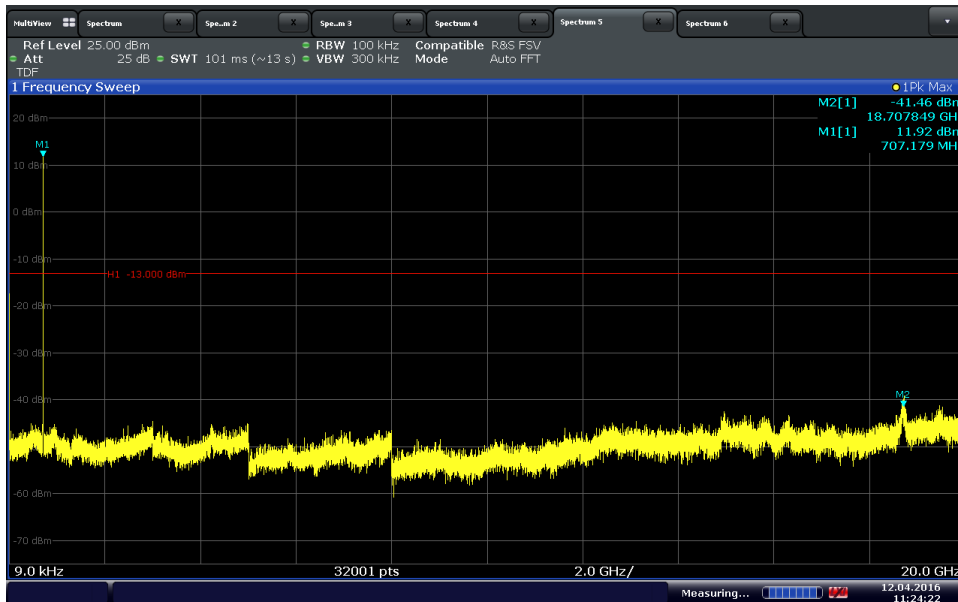

Date: 12.APR.2016 11:24:22

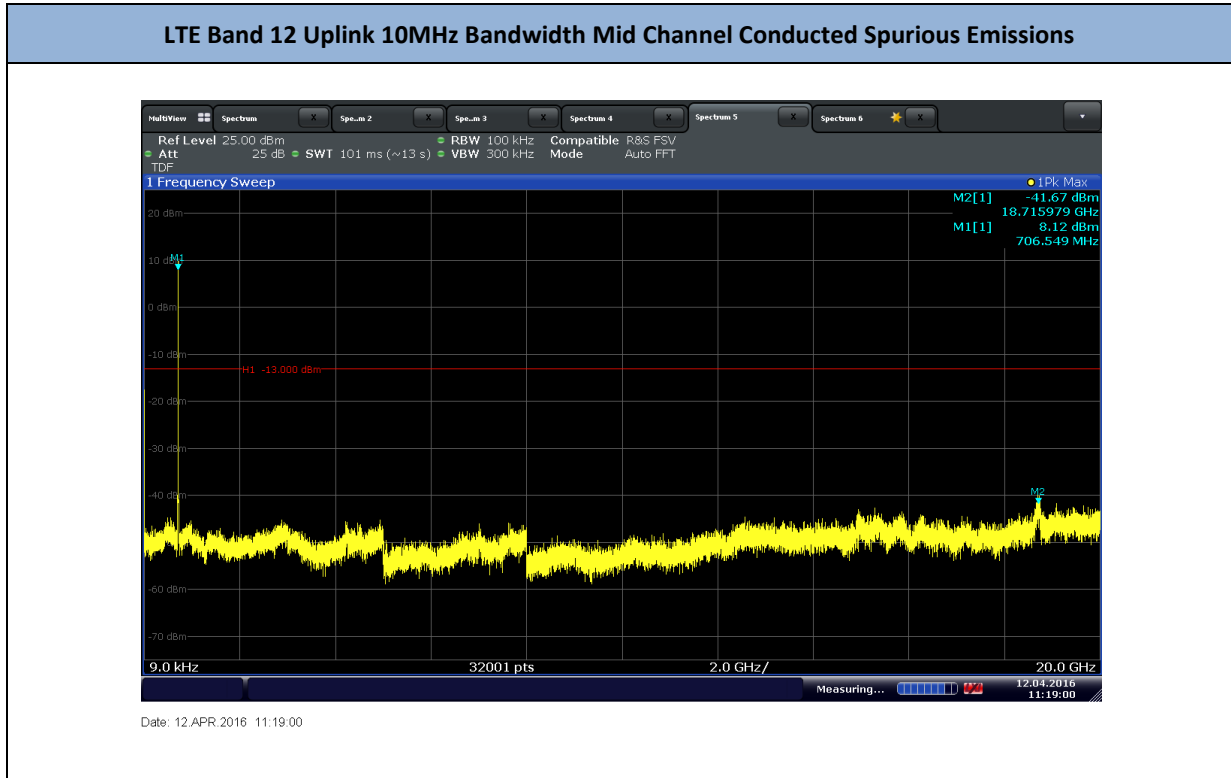

2.7 FIELD STRENGTH OF SPURIOUS RADIATION

2.7.1 Specification Reference

FCC 47 CFR Part 2, Clause 2.1053
FCC 47 CFR Part 27, Clause 27.53(g)
RSS-130, Clause 4.6

2.7.2 Standard Applicable

Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

2.7.3 Equipment Under Test and Modification State

Serial No: 258602000335 (NU) and 25955100346 (CU) / Test Configuration C and D

2.7.4 Date of Test/Initial of test personnel who performed the test

April 18 and 19, 2016/XYZ

2.7.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.7.6 Environmental Conditions

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility.

| | |
|---------------------|----------------|
| Ambient Temperature | 22.3 - 27.1°C |
| Relative Humidity | 23.8 - 32.5% |
| ATM Pressure | 99.3 - 99.6kPa |

2.7.7 Additional Observations


- This is a radiated test using substitution method as per Unwanted Emissions: Radiated Spurious method of measurement of ANSI/TIA/EIA-603-C 2004, August 17, 2004.
- Only the worst case configuration presented in this test report.
- Measurement was done using EMC32 V8.53 automated software. Reported level is the actual level with all the correction factors factored in. Correction Factor column is for informational purposes only.

2.7.8 Test Results

See attached plots.



2.7.9 Test Results Below 1GHz (Downlink Worst Case Configuration) - 10MHz Bandwidth High Channel

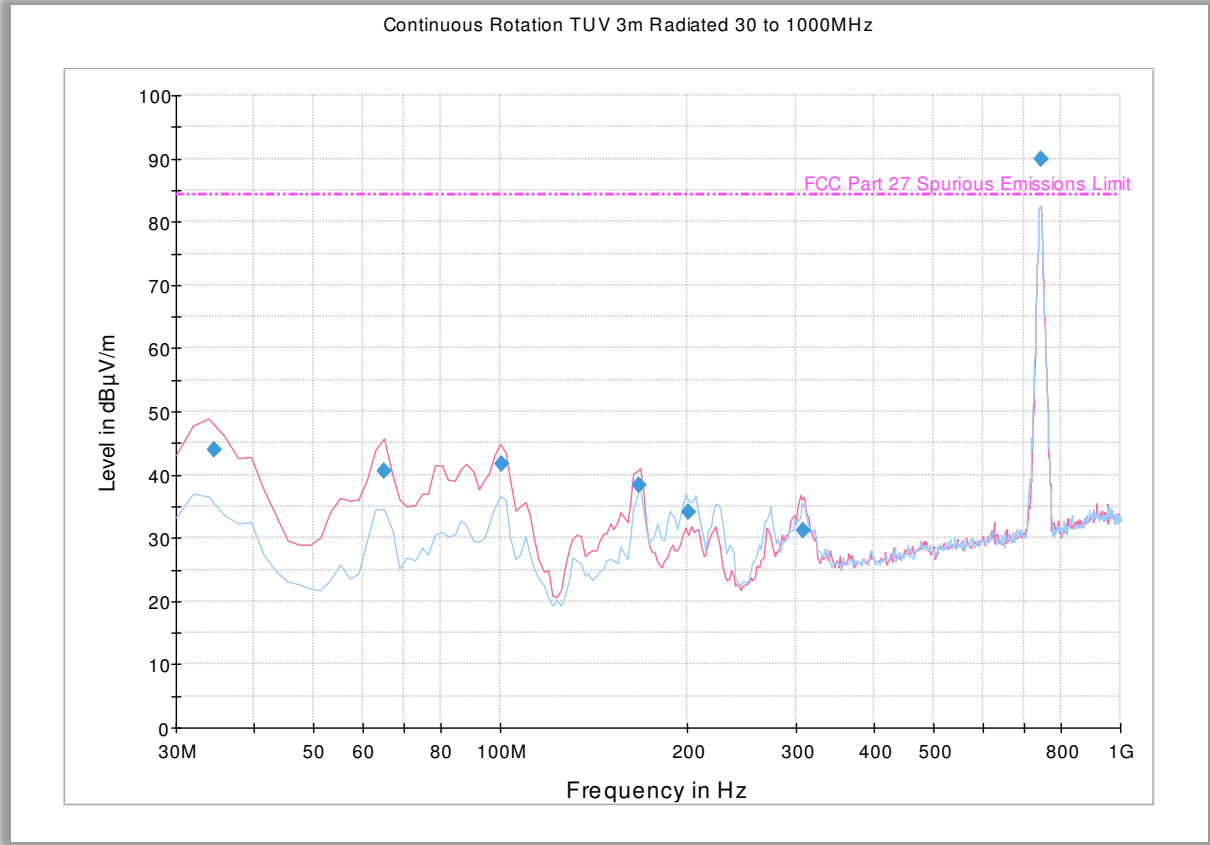


Quasi Peak Data

| Frequency (MHz) | QuasiPeak (dBµV/m) | Meas. Time (ms) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBµV/m) |
|-----------------|--------------------|-----------------|-------------|--------------|---------------|------------|-------------|----------------|
| 33.887776 | 46.7 | 1000.0 | 100.0 | V | 305.0 | -7.9 | 37.7 | 84.4 |
| 64.989980 | 42.9 | 1000.0 | 100.0 | V | 157.0 | -16.6 | 41.5 | 84.4 |
| 99.979960 | 38.6 | 1000.0 | 100.0 | V | 134.0 | -14.2 | 45.8 | 84.4 |
| 168.016032 | 33.9 | 1000.0 | 100.0 | V | 243.0 | -13.0 | 50.5 | 84.4 |
| 199.118236 | 32.5 | 1000.0 | 200.0 | H | 134.0 | -11.5 | 51.9 | 84.4 |
| 306.032064 | 32.3 | 1000.0 | 100.0 | H | 0.0 | -6.7 | 52.1 | 84.4 |
| 745.350701 | 82.5 | 1000.0 | 200.0 | V | 0.0 | 3.2 | Fundamental | |



2.7.10 Test Results Above 1GHz (Downlink Worst Case Configuration) - 10MHz Bandwidth High Channel

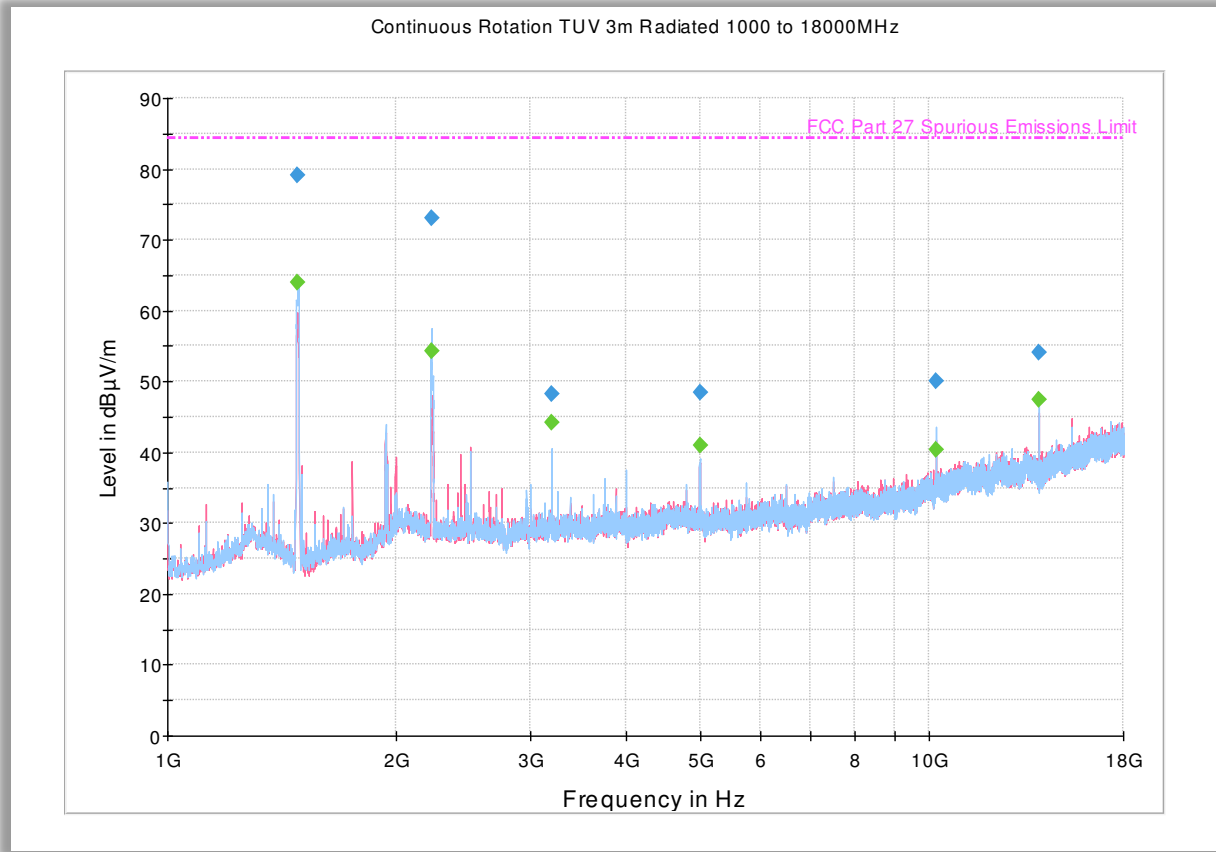


Peak Data

| Frequency (MHz) | MaxPeak (dBµV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBµV/m) |
|-----------------|------------------|-----------------|-----------------|-------------|--------------|---------------|------------|-------------|----------------|
| 1481.633333 | 79.0 | 1000.0 | 1000.000 | 102.7 | H | 178.0 | -5.8 | 5.4 | 84.4 |
| 2221.566667 | 73.0 | 1000.0 | 1000.000 | 103.7 | H | 180.0 | -1.7 | 11.4 | 84.4 |
| 3200.200000 | 48.3 | 1000.0 | 1000.000 | 131.7 | H | 75.0 | 0.8 | 36.1 | 84.4 |
| 4999.900000 | 48.4 | 1000.0 | 1000.000 | 202.3 | H | 355.0 | 3.3 | 36.0 | 84.4 |
| 10200.033333 | 50.1 | 1000.0 | 1000.000 | 259.3 | H | 202.0 | 11.1 | 34.3 | 84.4 |
| 13922.800000 | 54.1 | 1000.0 | 1000.000 | 200.5 | H | 196.0 | 14.8 | 30.3 | 84.4 |

Average Data

| Frequency (MHz) | Average (dBµV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBµV/m) |
|-----------------|------------------|-----------------|-----------------|-------------|--------------|---------------|------------|-------------|----------------|
| 1481.633333 | 64.0 | 1000.0 | 1000.000 | 102.7 | H | 178.0 | -5.8 | 20.4 | 84.4 |
| 2221.566667 | 54.2 | 1000.0 | 1000.000 | 103.7 | H | 180.0 | -1.7 | 30.2 | 84.4 |
| 3200.200000 | 44.2 | 1000.0 | 1000.000 | 131.7 | H | 75.0 | 0.8 | 40.2 | 84.4 |
| 4999.900000 | 40.9 | 1000.0 | 1000.000 | 202.3 | H | 355.0 | 3.3 | 43.5 | 84.4 |
| 10200.033333 | 40.3 | 1000.0 | 1000.000 | 259.3 | H | 202.0 | 11.1 | 44.1 | 84.4 |
| 13922.800000 | 47.5 | 1000.0 | 1000.000 | 200.5 | H | 196.0 | 14.8 | 36.9 | 84.4 |

2.7.11 Test Results Below 1GHz (Uplink Worst Case Configuration) - 10MHz Bandwidth High Channel

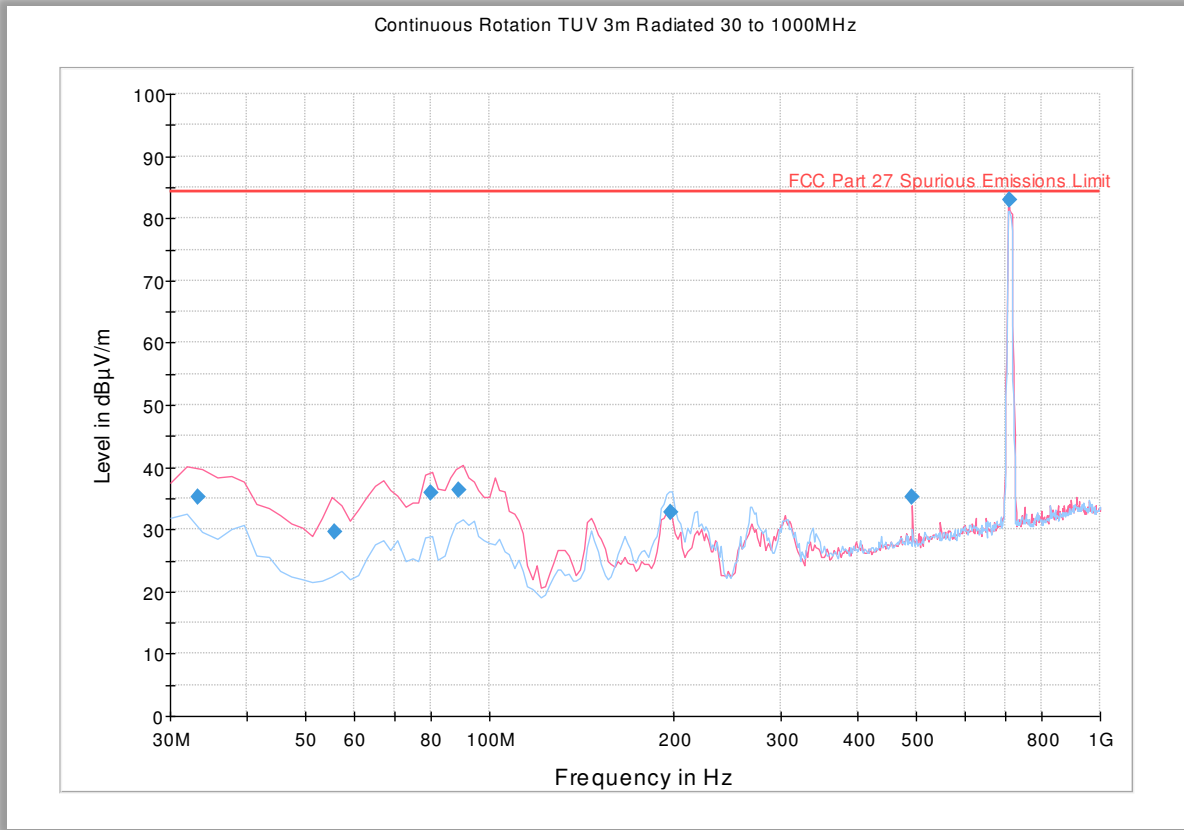


Quasi Peak Data

| Frequency (MHz) | QuasiPeak (dBµV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBµV/m) |
|-----------------|--------------------|-----------------|-----------------|-------------|--------------|---------------|------------|-------------|----------------|
| 33.343888 | 35.3 | 1000.0 | 120.000 | 100.0 | V | 7.0 | -7.6 | 49.1 | 84.4 |
| 55.790541 | 29.6 | 1000.0 | 120.000 | 100.0 | V | 0.0 | -15.5 | 54.8 | 84.4 |
| 80.021082 | 35.9 | 1000.0 | 120.000 | 120.0 | V | 224.0 | -16.6 | 48.5 | 84.4 |
| 89.060521 | 36.3 | 1000.0 | 120.000 | 100.0 | V | 163.0 | -15.5 | 48.1 | 84.4 |
| 198.334349 | 32.7 | 1000.0 | 120.000 | 195.0 | H | 153.0 | -11.4 | 51.7 | 84.4 |
| 491.525291 | 35.2 | 1000.0 | 120.000 | 109.0 | V | -13.0 | -1.8 | 49.2 | 84.4 |
| 710.720721 | 82.9 | 1000.0 | 120.000 | 117.0 | V | 302.0 | 3.2 | Fundamental | |



2.7.12 Test Results Above 1GHz (Uplink Worst Case Configuration) - 10MHz Bandwidth High Channel

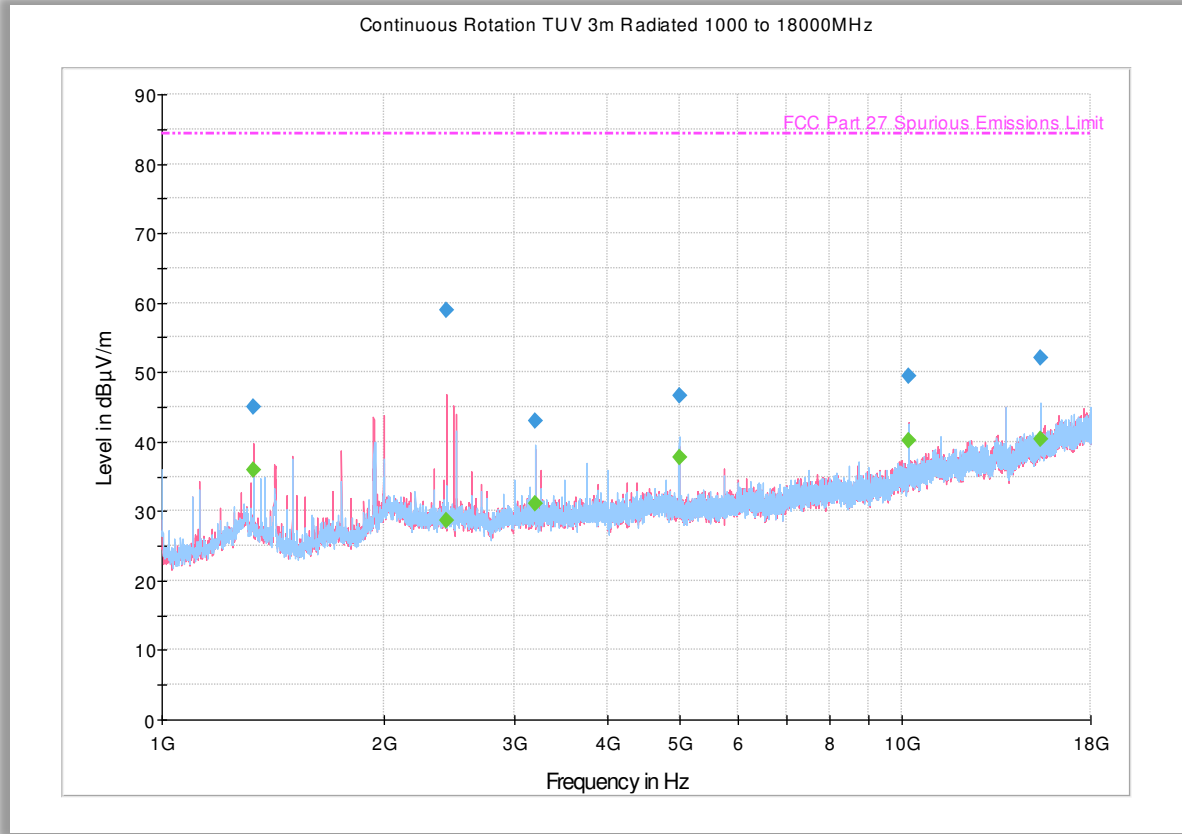

Peak Data

| Frequency (MHz) | MaxPeak (dBµV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBµV/m) |
|-----------------|------------------|-----------------|-----------------|-------------|--------------|---------------|------------|-------------|----------------|
| 1331.700000 | 45.1 | 1000.0 | 1000.000 | 258.3 | V | 164.0 | -5.2 | 39.3 | 84.4 |
| 2426.133333 | 58.9 | 1000.0 | 1000.000 | 156.6 | V | 212.0 | -1.0 | 25.5 | 84.4 |
| 3199.600000 | 43.0 | 1000.0 | 1000.000 | 249.3 | H | 100.0 | 0.8 | 41.4 | 84.4 |
| 4999.900000 | 46.6 | 1000.0 | 1000.000 | 102.7 | H | 33.0 | 3.3 | 37.8 | 84.4 |
| 10200.033333 | 49.5 | 1000.0 | 1000.000 | 130.7 | V | 185.0 | 11.1 | 34.9 | 84.4 |
| 15374.600000 | 52.0 | 1000.0 | 1000.000 | 301.6 | H | 172.0 | 17.3 | 32.4 | 84.4 |

Average Data

| Frequency (MHz) | Average (dBµV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBµV/m) |
|-----------------|------------------|-----------------|-----------------|-------------|--------------|---------------|------------|-------------|----------------|
| 1331.700000 | 35.9 | 1000.0 | 1000.000 | 258.3 | V | 164.0 | -5.2 | 48.5 | 84.4 |
| 2426.133333 | 28.6 | 1000.0 | 1000.000 | 156.6 | V | 212.0 | -1.0 | 55.8 | 84.4 |
| 3199.600000 | 31.2 | 1000.0 | 1000.000 | 249.3 | H | 100.0 | 0.8 | 53.2 | 84.4 |
| 4999.900000 | 37.8 | 1000.0 | 1000.000 | 102.7 | H | 33.0 | 3.3 | 46.6 | 84.4 |
| 10200.033333 | 40.1 | 1000.0 | 1000.000 | 130.7 | V | 185.0 | 11.1 | 44.3 | 84.4 |
| 15374.600000 | 40.3 | 1000.0 | 1000.000 | 301.6 | H | 172.0 | 17.3 | 44.1 | 84.4 |



2.8 FREQUENCY STABILITY

2.8.1 Specification Reference

FCC 47 CFR Part 2, Clause 2.1055
FCC 47 CFR Part 27, Clause 27.54
RSS-130, Clause 4.3

2.8.2 Standard Applicable

FCC 47 CFR Part 27, Clause 27.54:

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

RSS-130, Clause 4.3:

The transmitter frequency stability limit shall be determined as follows:

- (a) The frequency offset shall be measured according to the procedure described in RSS-Gen and recorded;
- (b) Using a resolution bandwidth of 1% of the occupied bandwidth, a reference point at the unwanted emission level which complies with the attenuation of $43 + 10 \log_{10} p$ (watts) on the emission mask of the lowest and highest channel shall be selected, and the frequency at these points shall be recorded as f_L and f_H respectively.

The applicant shall ensure frequency stability by showing that f_L minus the frequency offset and f_H plus the frequency offset shall be within the frequency range in which the equipment is designed to operate.

2.8.3 Equipment Under Test and Modification State

Serial No: 258602000335 (NU) and 25955100346 (CU) / Test Configuration A and B

2.8.4 Date of Test/Initial of test personnel who performed the test

April 21 and 22, 2016/XYZ

2.8.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.8.6 Environmental Conditions

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility.

| | |
|---------------------|----------------|
| Ambient Temperature | 28.4 - 28.6°C |
| Relative Humidity | 23.0 - 34.7% |
| ATM Pressure | 98.8 - 99.0kPa |

2.8.7 Additional Observations

- This is a conducted test.
- The EUT was operated at 120.0VAC nominal voltage and was placed in the temperature chamber for the series of evaluations performed.
- Input Type "Tones" was selected and the EUT was injected a CW signal from a Signal Generator and maximum frequency error was monitored using the spectrum analyzer.
- The Temperature was reduced to -30°C and allowed to sit for 1 hour to allow the equipment and chamber temperature to stabilize. The measurements on both downlink and uplink were then performed. The temperature was then increased by 10°C steps and allowed to settle before taking the next set of measurements.
- Voltage variation was also performed at 85% and 115% of the nominal voltage.
- Middle Channel was tested as the representative configuration for Frequency Deviation.
- 5MHz BW was used for frequency range testing.



2.8.8 Test Results Summary

| LTE B12 Downlink | | |
|------------------|------------------|------------------------------|
| Voltage(VAC) | Temperature (°C) | Frequency Deviation (Hz/ppm) |
| 120 | -30 | 0 / 0 |
| | -20 | 0 / 0 |
| | -10 | 0 / 0 |
| | 0 | 0 / 0 |
| | +10 | 0 / 0 |
| | +20 | 0 / 0 |
| | +30 | 0 / 0 |
| | +40 | 0 / 0 |
| | +50 | 0 / 0 |

| LTE B12 Downlink | | |
|------------------|--------------|------------------------------|
| Temperature(°C) | Voltage(VAC) | Frequency Deviation (Hz/ppm) |
| 20 | 102 | 0 / 0 |
| | 138 | 0 / 0 |

| LTE B12 Downlink Frequency Range | | | |
|----------------------------------|----------------------|----------------------|-------------|
| Channel @5MHz BW | F _L (MHz) | F _H (MHz) | Limit (MHz) |
| Low Channel | 729.184 | - | >729 |
| High Channel | - | 745.809 | <746 |




| LTE B12 Uplink | | |
|----------------|------------------|------------------------------|
| Voltage(VAC) | Temperature (°C) | Frequency Deviation (Hz/ppm) |
| 120 | -30 | 0 / 0 |
| | -20 | 0 / 0 |
| | -10 | 0 / 0 |
| | 0 | 0 / 0 |
| | +10 | 0 / 0 |
| | +20 | 0 / 0 |
| | +30 | 0 / 0 |
| | +40 | 0 / 0 |
| | +50 | 0 / 0 |

| LTE B12 Uplink | | |
|-----------------|--------------|------------------------------|
| Temperature(°C) | Voltage(VAC) | Frequency Deviation (Hz/ppm) |
| 20 | 102 | 0 / 0 |
| | 138 | 0 / 0 |


| LTE B12 Uplink Frequency Range | | | |
|--------------------------------|----------------------|----------------------|-------------|
| Channel @5MHz BW | F _L (MHz) | F _H (MHz) | Limit (MHz) |
| Low Channel | 699.114 | - | >699 |
| High Channel | - | 715.87 | <716 |

2.8.9 Sample Test Plots

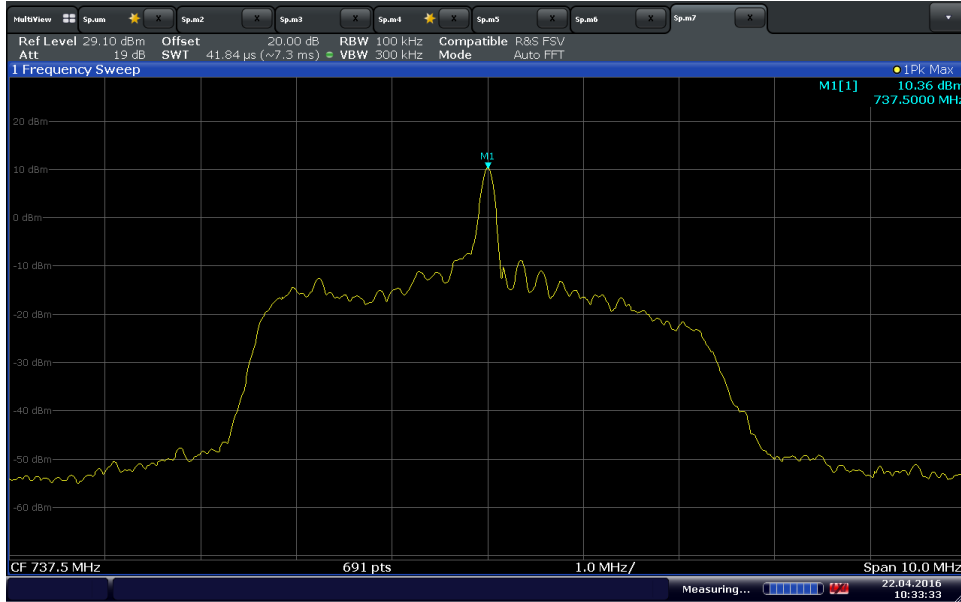


Date: 22.APR.2016 10:33:33

Downlink Mid Channel 120VAC @ 20°C

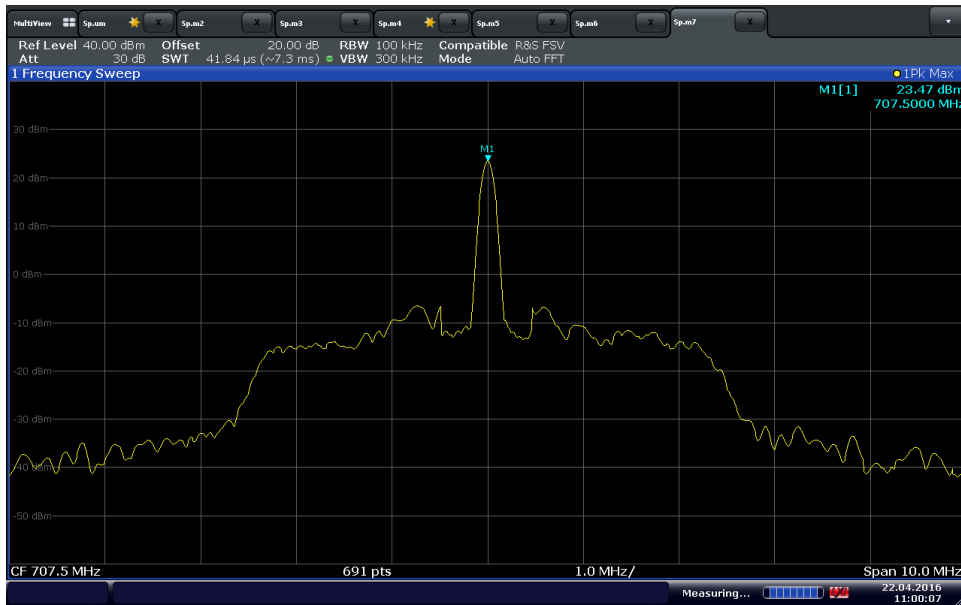


Date: 22.APR.2016 11:00:07

Uplink Mid Channel 120VAC @ 20°C

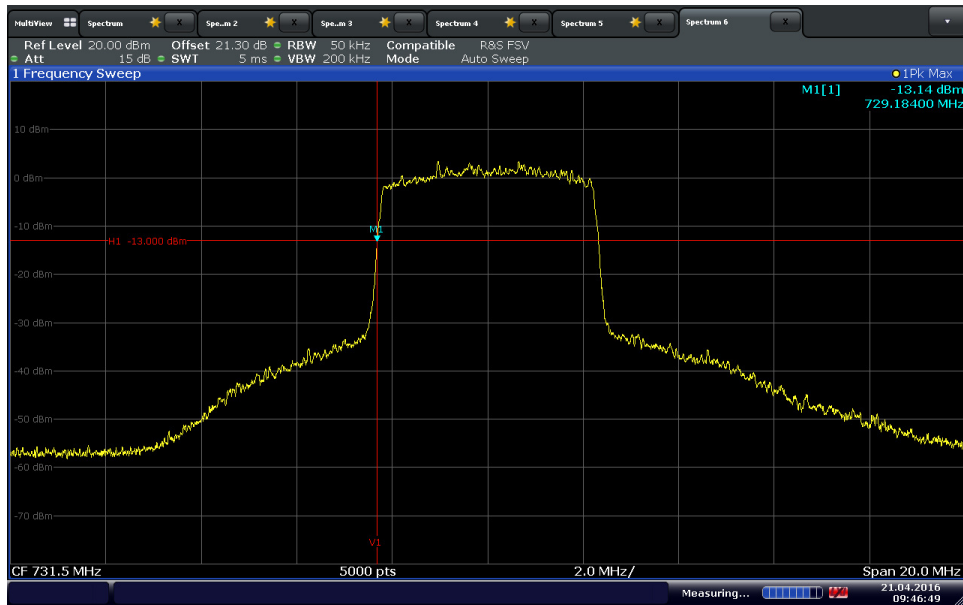


Date: 21 APR 2016 09:46:49

LTE B12 Downlink Low Channel @ 20°C Nominal Voltage

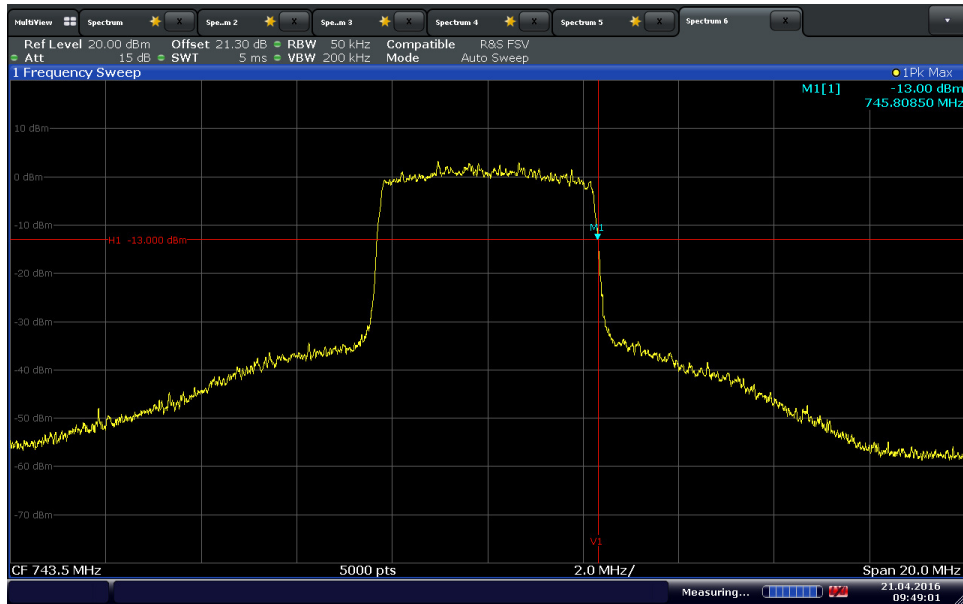


Date: 21 APR 2016 09:49:01

LTE B12 Downlink High Channel @ 20°C Nominal Voltage

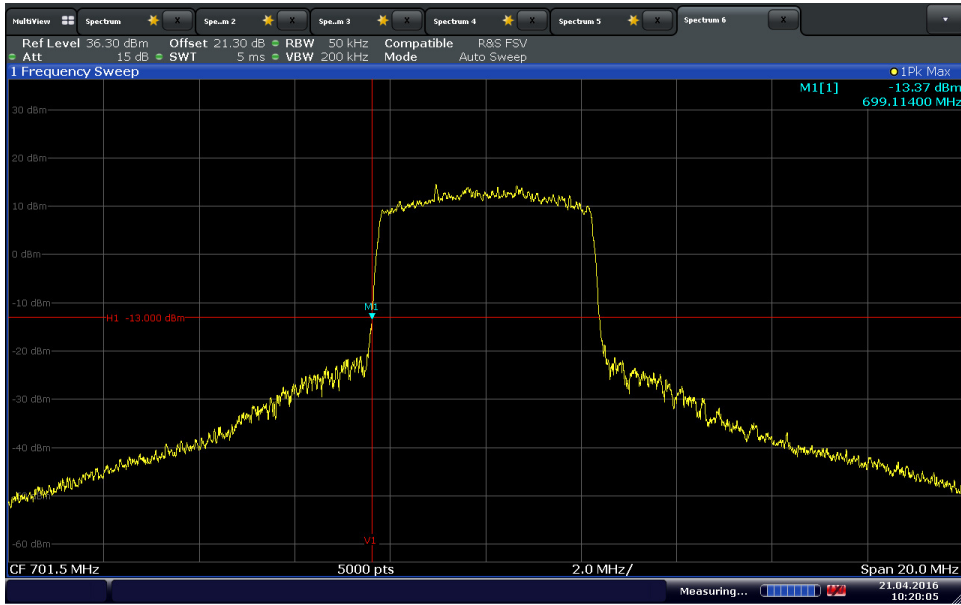

Date: 21 APR 2016 10:20:05

LTE B12 Uplink Low Channel @ 20°C Nominal Voltage

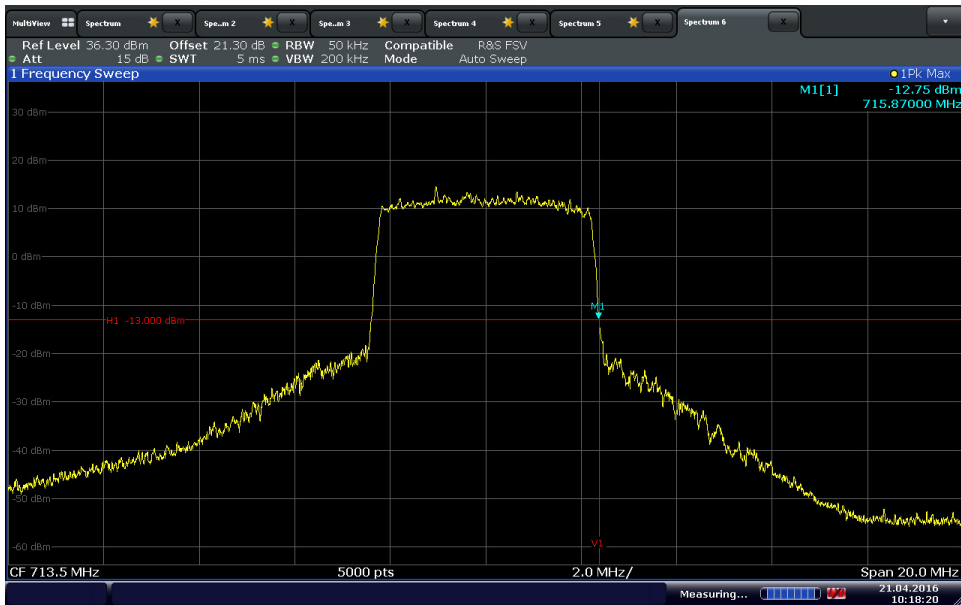

Date: 21 APR 2016 10:18:20

LTE B12 Uplink High Channel @ 20°C Nominal Voltage



2.9 POWER LINE CONDUCTED EMISSIONS

2.9.1 Specification Reference

RSS-Gen 8.8

2.9.2 Standard Applicable

A radio apparatus that is designed to be connected to the public utility (AC) power line shall ensure that the radio frequency voltage, which is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz-30 MHz, shall not exceed the limits in table below.

Unless the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in table below. The more stringent limit applies at the frequency range boundaries.

| Frequency of emission (MHz) | Conducted limit (dBµV) | |
|-----------------------------|------------------------|-----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

**Decreases with the logarithm of the frequency.*

2.9.3 Equipment Under Test and Modification State

Serial No: 258602000335 (NU) and 25955100346 (CU) / Test Configuration D

2.9.4 Date of Test/Initial of test personnel who performed the test

April 17, 2016/XYZ

2.9.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.9.6 Environmental Conditions

Ambient Temperature 27.4°C
 Relative Humidity 24.8%
 ATM Pressure 99.0kPa




2.9.7 Additional Observations

- The EUT was verified using AC adapter supplied by the manufacturer..
- EUT (NU) verified using input voltage of 120VAC 60Hz.
- There are no significant variations in test results between each operating modes. Only the normal operation mode observed is presented.
- Measurement was done using EMC32 automated software. Reported level is the actual level with all the correction factors factored in. Correction Factor column is for informational purposes only. See Section 2.2.8 for sample computation.

2.9.8 Sample Computation (Conducted Emission – Quasi Peak)

| | | |
|--|--------------------------------|-------------|
| Measuring equipment raw measurement (db μ V) @ 150kHz | | 5.5 |
| Correction Factor (dB) | Asset# 8607 (20 dB attenuator) | 19.9 |
| | Asset# 1177 (cable) | 0.15 |
| | Asset# 1176 (cable) | 0.35 |
| | Asset# 7567 (LISN) | 0.30 |
| Reported QuasiPeak Final Measurement (dbμV) @ 150kHz | | 26.2 |

2.9.9 Test Results - Conducted Emissions Line 1 – Hot (NU)

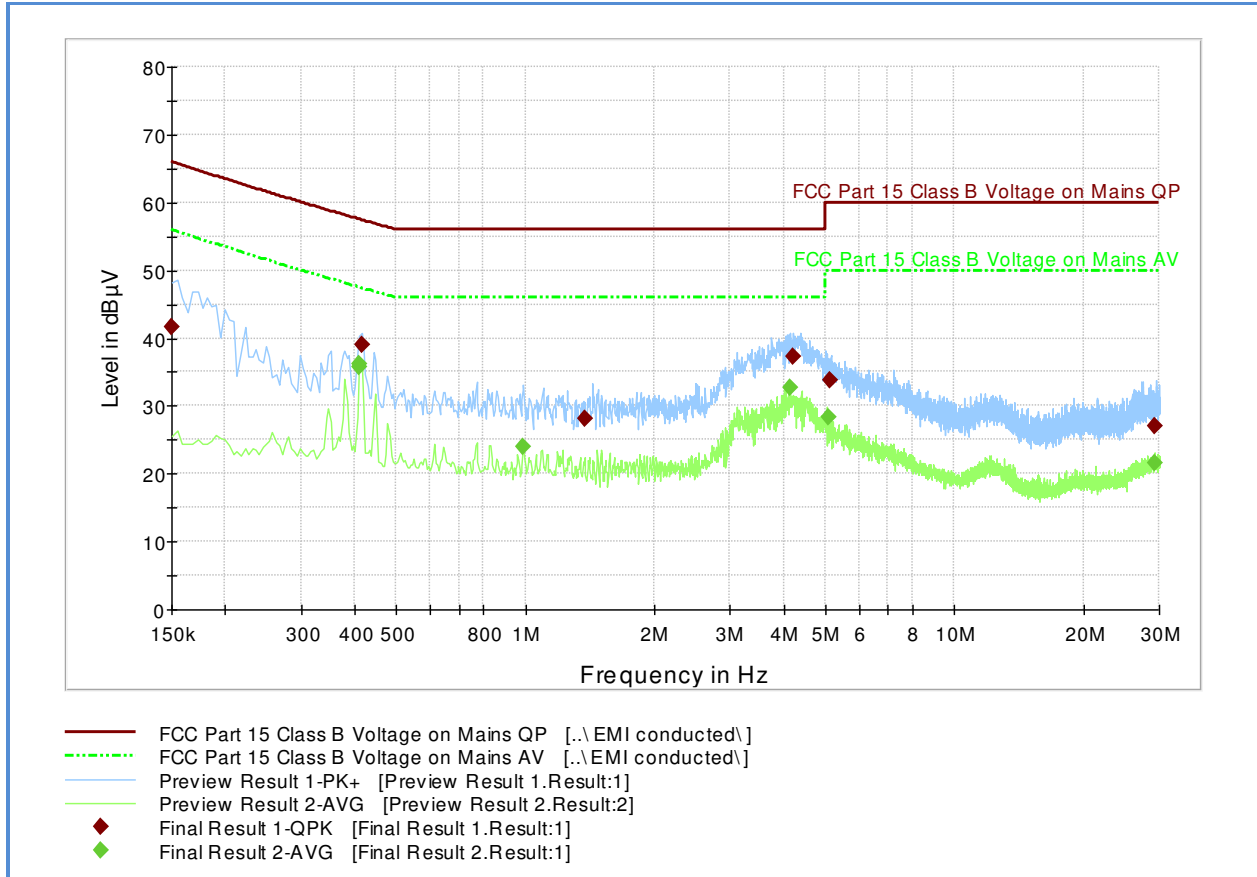


Quasi Peak

| Frequency (MHz) | QuasiPeak (dBµV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin - QPK (dB) | Limit - QPK (dBµV) |
|-----------------|------------------|-----------------|-----------------|--------|------|------------|-------------------|--------------------|
| 0.150000 | 41.7 | 1000.0 | 9.000 | Off | L1 | 20.2 | 24.3 | 66.0 |
| 0.415500 | 39.0 | 1000.0 | 9.000 | Off | L1 | 20.0 | 18.4 | 57.4 |
| 1.378500 | 28.1 | 1000.0 | 9.000 | Off | L1 | 20.0 | 27.9 | 56.0 |
| 4.204500 | 37.2 | 1000.0 | 9.000 | Off | L1 | 20.1 | 18.8 | 56.0 |
| 5.122500 | 33.7 | 1000.0 | 9.000 | Off | L1 | 20.1 | 26.3 | 60.0 |
| 29.391000 | 27.0 | 1000.0 | 9.000 | Off | L1 | 20.5 | 33.0 | 60.0 |

Average

| Frequency (MHz) | Average (dBµV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin - Ave (dB) | Limit - Ave (dBµV) |
|-----------------|----------------|-----------------|-----------------|--------|------|------------|-------------------|--------------------|
| 0.411000 | 35.8 | 1000.0 | 9.000 | Off | L1 | 20.0 | 11.7 | 47.5 |
| 0.411000 | 36.3 | 1000.0 | 9.000 | Off | L1 | 20.0 | 11.2 | 47.5 |
| 0.991500 | 24.0 | 1000.0 | 9.000 | Off | L1 | 20.0 | 22.0 | 46.0 |
| 4.137000 | 32.7 | 1000.0 | 9.000 | Off | L1 | 20.1 | 13.3 | 46.0 |
| 5.082000 | 28.3 | 1000.0 | 9.000 | Off | L1 | 20.1 | 21.7 | 50.0 |
| 29.359500 | 21.6 | 1000.0 | 9.000 | Off | L1 | 20.5 | 28.4 | 50.0 |

2.9.10 FCC Conducted Emissions Line 2 – Neutral (NU)

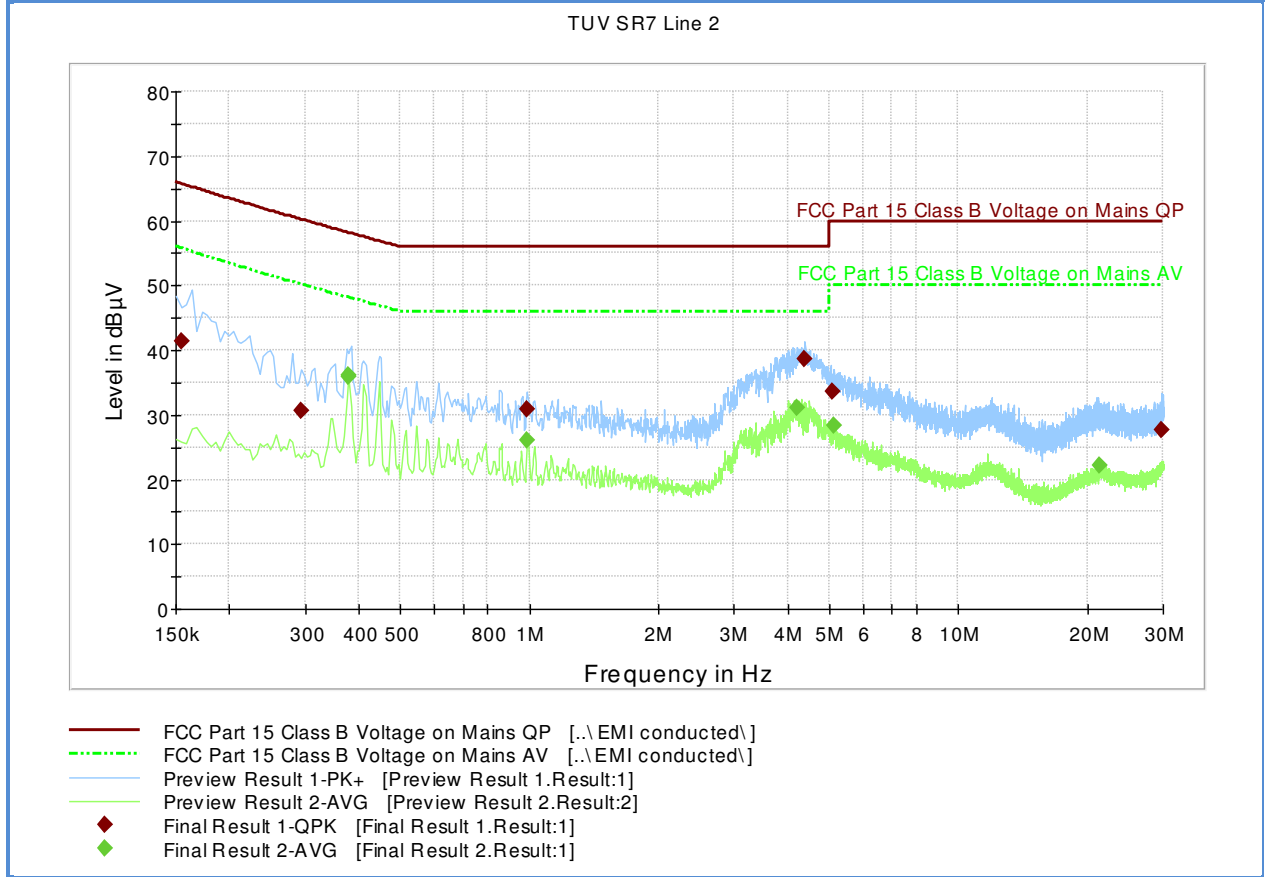

Quasi Peak

| Frequency (MHz) | QuasiPeak (dBµV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin - QPK (dB) | Limit - QPK (dBµV) |
|-----------------|------------------|-----------------|-----------------|--------|------|------------|-------------------|--------------------|
| 0.154500 | 41.5 | 1000.0 | 9.000 | Off | N | 20.2 | 24.2 | 65.7 |
| 0.294000 | 30.6 | 1000.0 | 9.000 | Off | N | 20.0 | 29.6 | 60.2 |
| 0.991500 | 30.8 | 1000.0 | 9.000 | Off | N | 20.0 | 25.2 | 56.0 |
| 4.384500 | 38.6 | 1000.0 | 9.000 | Off | N | 20.1 | 17.4 | 56.0 |
| 5.109000 | 33.6 | 1000.0 | 9.000 | Off | N | 20.1 | 26.4 | 60.0 |
| 29.791500 | 27.7 | 1000.0 | 9.000 | Off | N | 20.5 | 32.3 | 60.0 |

Average

| Frequency (MHz) | Average (dBµV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin - Ave (dB) | Limit - Ave (dBµV) |
|-----------------|----------------|-----------------|-----------------|--------|------|------------|-------------------|--------------------|
| 0.379500 | 36.0 | 1000.0 | 9.000 | Off | N | 20.0 | 12.1 | 48.1 |
| 0.379500 | 35.9 | 1000.0 | 9.000 | Off | N | 20.0 | 12.2 | 48.1 |
| 0.991500 | 26.0 | 1000.0 | 9.000 | Off | N | 20.0 | 20.0 | 46.0 |
| 4.204500 | 31.0 | 1000.0 | 9.000 | Off | N | 20.1 | 15.0 | 46.0 |
| 5.118000 | 28.5 | 1000.0 | 9.000 | Off | N | 20.1 | 21.5 | 50.0 |
| 21.336000 | 22.1 | 1000.0 | 9.000 | Off | N | 20.4 | 27.9 | 50.0 |

FCC ID: NU: YETQ34-251266NU
CU: YETQ34-251266CU
IC: NU: 9298A-Q34251266NU
CU: 9298A-Q34251266CU
Report No. SD72113545-0216D



SECTION 3

TEST EQUIPMENT USED



3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

| ID Number (SDGE/SDRB) | Test Equipment | Type | Serial Number | Manufacturer | Cal Date | Cal Due Date |
|------------------------------|--------------------------------------|---------------------|----------------------|----------------------------|---------------------------|--------------|
| Antenna Conducted Port Setup | | | | | | |
| 7569 | P-Series Power Meter | N1911A P- | MY45100625 | Agilent | 06/19/15 | 06/19/16 |
| 7605 | 50MHz-18GHz Wideband Power Sensor | N1921A | MY51100054 | Agilent | 04/19/16 | 04/19/17 |
| 7582 | Signal/Spectrum Analyzer | FSW26 | 101614 | Rhode & Schwarz | 10/05/15 | 10/05/16 |
| 7608 | Vector Signal Generator | SMBV100A | 259021 | Rhode & Schwarz | 07/29/15 | 07/29/16 |
| 7562 | Wideband Radio Communication Tester | CMW 500 | 1201.0002k50 /103829 | Rhode & Schwarz | For sigalling | |
| 8825 | 20dB Attenuator | 46-20-34 | BK5773 | Weinschel Corp. | Verified by 7582 and 7608 | |
| Radiated Emissions | | | | | | |
| 1002 | Bilog Antenna | 3142C | 00058717 | ETS-Lindgren | 11/06/15 | 11/06/17 |
| 1051 | Double-ridged waveguide horn antenna | 3115 | 9408-4329 | EMCO | 03/21/16 | 03/21/17 |
| 8628 | Pre-amplifier | QLJ 01182835-JO | 8986002 | QuinStar Technologies Inc. | 03/20/16 | 03/20/17 |
| 1040 | EMI Test Receiver | ESIB40 | 100292 | Rhode & Schwarz | 09/29/15 | 09/29/16 |
| 1049 | EMI Test Receiver | ESU | 100133 | Rhode & Schwarz | 03/11/16 | 03/11/17 |
| 1016 | Pre-amplifier | PAM-0202 | 187 | PAM | 12/15/15 | 12/15/16 |
| 1153 | High-frequency cable | SucoFlex 100 SX | N/A | Suhner | Verified by 7582 and 7608 | |
| 8543 | High-frequency cable | Micropore 19057793 | N/A | United Microwave Products | 09/03/15 | 09/03/16 |
| 1151 | Pre-amplifier | TS-PR26 | 100026 | Rhode & Schwarz | 05/08/15 | 05/08/16 |
| Conducted Emissions | | | | | | |
| 7620 | EMI Test Receiver | ESU40 | 100399 | Rhode & Schwarz | 09/03/15 | 09/03/16 |
| 7567 | LISN | FCC-LISN-50-25-2-10 | 120304 | Fischer Custom Comm. | 07/14/15 | 07/14/16 |
| 7568 | LISN | FCC-LISN-50-25-2-10 | 120305 | Fischer Custom Comm. | 10/28/15 | 10/28/16 |
| 8822 | 20dB Attenuator | 34-20-34 | N/A | MCE / Weinschel | 02/29/16 | 02/28/17 |
| 8824 | 20dB Attenuator | 34-20-34 | N/A | MCE / Weinschel | 02/29/16 | 02/28/17 |
| 7562 | Wideband Radio Communication Tester | CMW 500 | 1201.0002k50 /103829 | Rhode & Schwarz | For signalling | |

FCC ID: NU: YETQ34-251266NU
 CU: YETQ34-251266CU
 IC: NU: 9298A-Q34251266NU
 CU: 9298A-Q34251266CU
 Report No. SD72113545-0216D



| Miscellaneous | | | | | | |
|---------------|---|---------|------------|-----------------|----------|----------|
| 6792 | Multimeter | 3478A | 2911A70964 | Hewlett Packard | 08/14/15 | 08/14/16 |
| 7560 | Barometer/Temperature /Humidity Transmitter | iBTHX-W | 1240476 | Omega | 10/19/15 | 10/19/16 |
| | Test Software | EMC32 | V8.53 | Rhode & Schwarz | N/A | |

3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:

3.2.1 Conducted Measurements

| Contribution | | Probability Distribution Type | Probability Distribution x_i | Standard Uncertainty $u(x_i)$ | $[u(x_i)]^2$ |
|---------------------------------|----------------------------|-------------------------------|--------------------------------|-------------------------------|--------------|
| 1 | Receiver/Spectrum Analyzer | Rectangular | 0.36 | 0.21 | 0.04 |
| 2 | Cables | Rectangular | 0.50 | 0.29 | 0.08 |
| 3 | LISN | Rectangular | 0.66 | 0.38 | 0.15 |
| 4 | Attenuator | Rectangular | 0.30 | 0.17 | 0.03 |
| 5 | EUT Setup | Rectangular | 1.00 | 0.58 | 0.33 |
| Combined Uncertainty (u_c): | | | | | 0.80 |
| Coverage Factor (k): | | | | | 2 |
| Expanded Uncertainty: | | | | | 1.59 |

3.2.2 Radiated Measurements (Below 1GHz)

| Contribution | | Probability Distribution Type | Probability Distribution x_i | Standard Uncertainty $u(x_i)$ | $[u(x_i)]^2$ |
|---------------------------------|----------------------------|-------------------------------|--------------------------------|-------------------------------|--------------|
| 1 | Receiver/Spectrum Analyzer | Rectangular | 0.45 | 0.26 | 0.07 |
| 2 | Cables | Rectangular | 0.50 | 0.29 | 0.08 |
| 3 | Preamp | Rectangular | 0.50 | 0.29 | 0.08 |
| 4 | Antenna | Rectangular | 0.75 | 0.43 | 0.19 |
| 5 | Site | Rectangular | 2.70 | 1.56 | 2.43 |
| 6 | EUT Setup | Rectangular | 1.00 | 0.58 | 0.33 |
| Combined Uncertainty (u_c): | | | | | 1.78 |
| Coverage Factor (k): | | | | | 2 |
| Expanded Uncertainty: | | | | | 3.57 |

3.2.3 Radiated Emission Measurements (Above 1GHz)

| Contribution | | Probability Distribution Type | Probability Distribution x_i | Standard Uncertainty $u(x_i)$ | $[u(x_i)]^2$ |
|---------------------------------|----------------------------|-------------------------------|--------------------------------|-------------------------------|--------------|
| 1 | Receiver/Spectrum Analyzer | Rectangular | 0.57 | 0.33 | 0.11 |
| 2 | Cables | Rectangular | 0.70 | 0.40 | 0.16 |
| 3 | Preamp | Rectangular | 0.50 | 0.29 | 0.08 |
| 4 | Antenna | Rectangular | 0.37 | 0.21 | 0.05 |
| 5 | Site | Rectangular | 2.70 | 1.56 | 2.43 |
| 6 | EUT Setup | Rectangular | 1.00 | 0.58 | 0.33 |
| Combined Uncertainty (u_c): | | | | | 1.78 |
| Coverage Factor (k): | | | | | 2 |
| Expanded Uncertainty: | | | | | 3.56 |



3.2.4 Conducted Antenna Port Measurement

| Contribution | | Probability Distribution Type | Probability Distribution x_i | Standard Uncertainty $u(x_i)$ | $[u(x_i)]^2$ |
|---------------------------------|----------------------------|-------------------------------|--------------------------------|-------------------------------|--------------|
| 1 | Receiver/Spectrum Analyzer | Rectangular | 0.57 | 0.33 | 0.11 |
| 2 | Cables | Rectangular | 0.50 | 0.29 | 0.08 |
| 3 | EUT Setup | Rectangular | 1.00 | 0.58 | 0.33 |
| Combined Uncertainty (u_c): | | | | | 0.72 |
| Coverage Factor (k): | | | | | 2 |
| Expanded Uncertainty: | | | | | 1.45 |


FCC ID: NU: YETQ34-251266NU
CU: YETQ34-251266CU
IC: NU: 9298A-Q34251266NU
CU: 9298A-Q34251266CU
Report No. SD72113545-0216D




SECTION 4

DIAGRAM OF TEST SETUP


4.1 TEST SETUP DIAGRAM

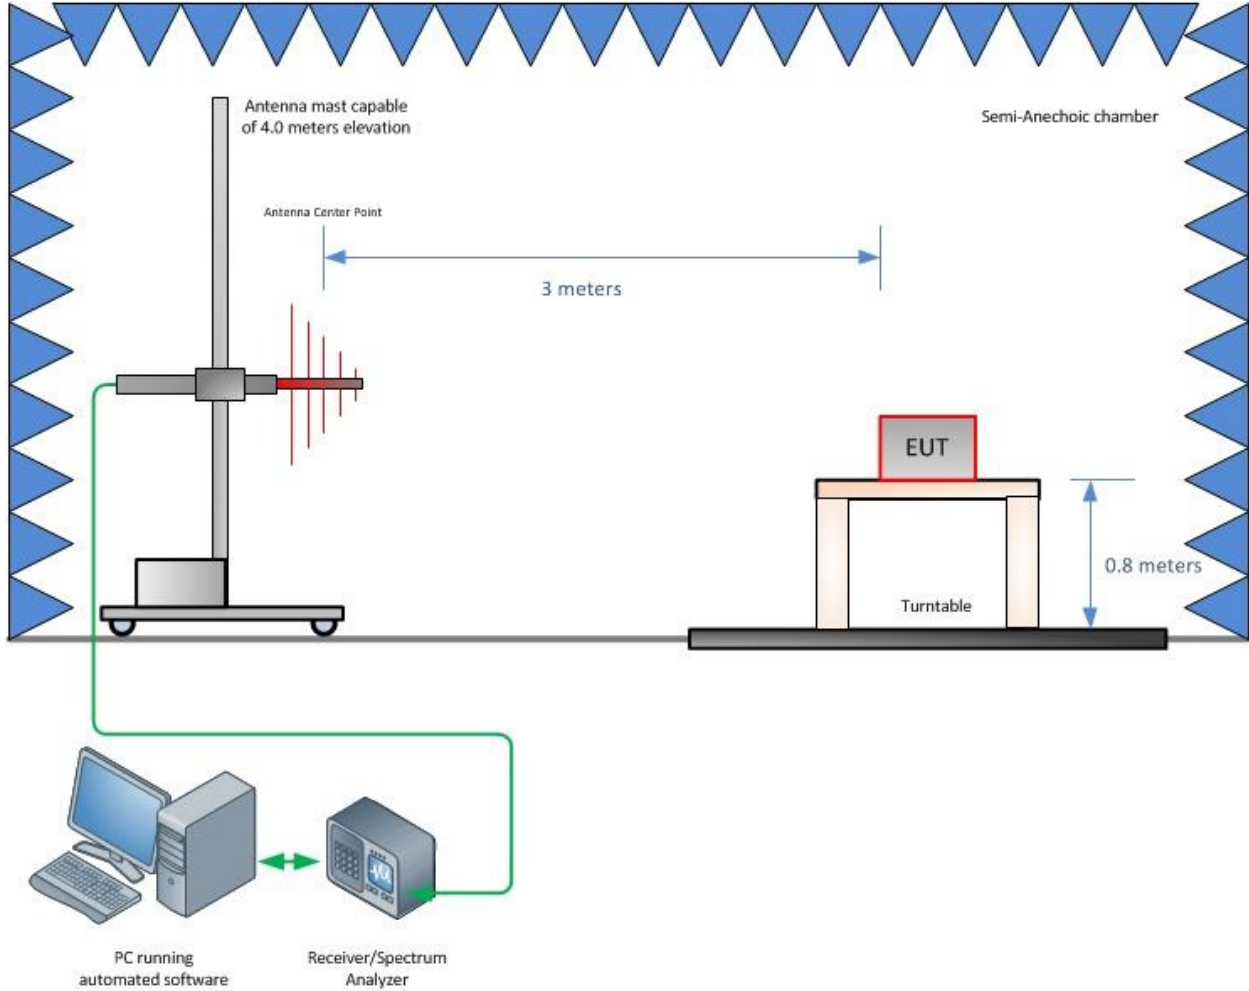


Radiated Emission Test Setup (Below 1GHz)

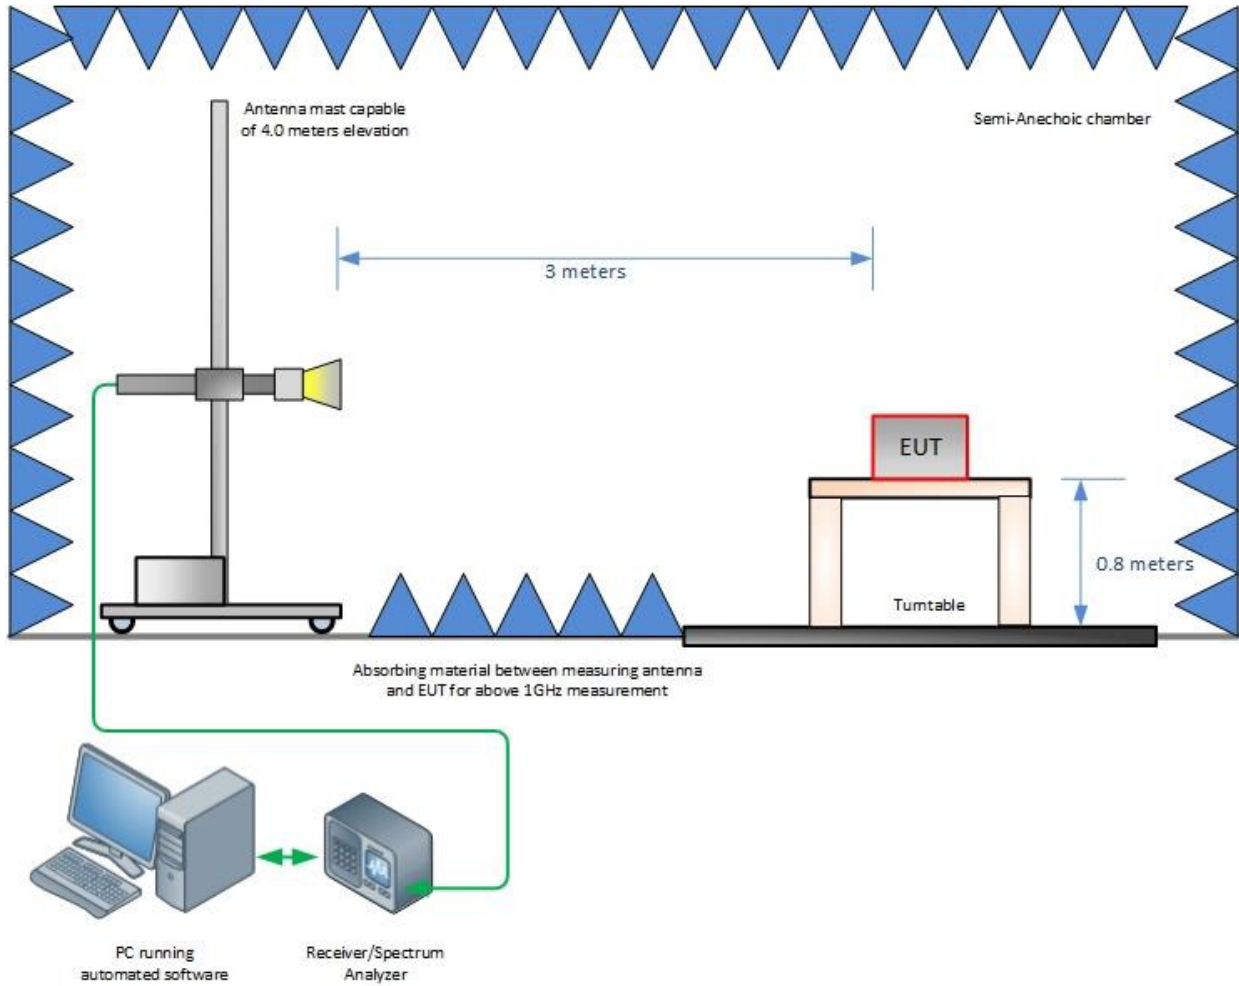


Radiated Emission Test Setup (Above 1GHz)

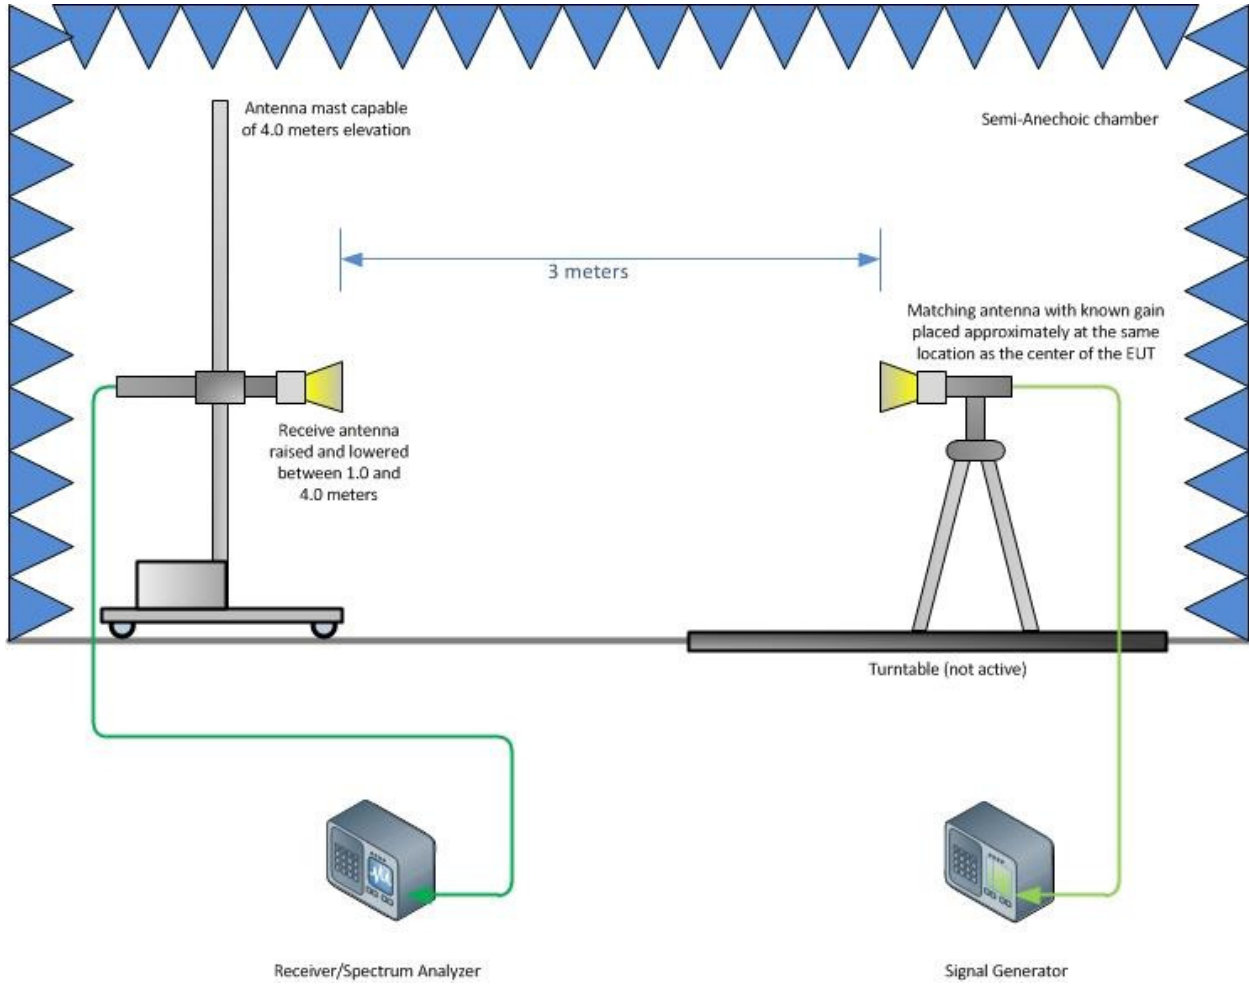

Substitution Test Method (Above 1GHz, if applicable)

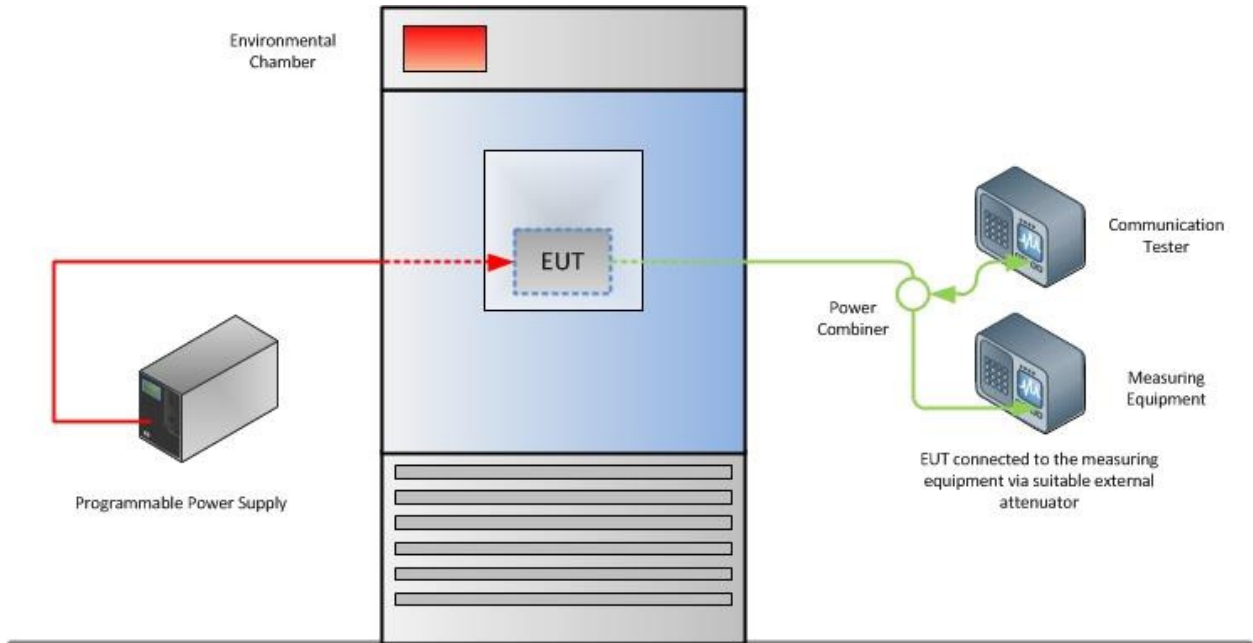

Frequency Stability Test Configuration

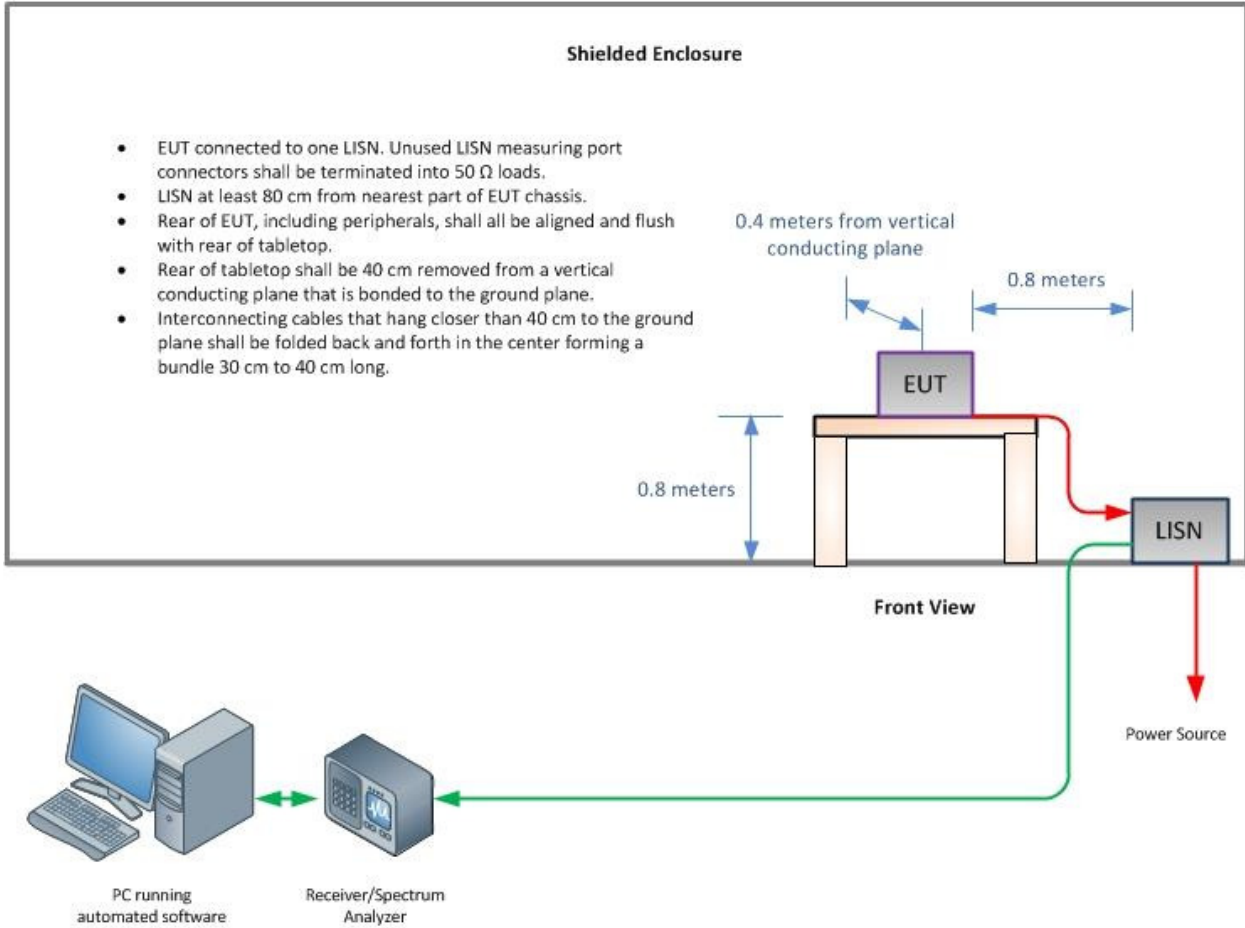

Conducted Emissions Test Configuration (if applicable)

FCC ID: NU: YETQ34-251266NU
CU: YETQ34-251266CU
IC: NU: 9298A-Q34251266NU
CU: 9298A-Q34251266CU
Report No. SD72113545-0216D



SECTION 5

ACCREDITATION, DISCLAIMERS AND COPYRIGHT



5.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT

TÜV SÜD America Inc.'s reports apply only to the specific sample tested under stated test conditions. It is the manufacturer's responsibility to assure the continued compliance of production units of this model. TÜV SÜD America, Inc. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD America, Inc.'s issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and TÜV SÜD America, Inc., extracts from the test report shall not be reproduced, except in full without TÜV SÜD America, Inc.'s written approval.

This report must not be used to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the federal government.

TÜV SÜD America, Inc. and its professional staff hold government and professional organization certifications for AAMI, ACIL, AEA, ANSI, IEEE, A2LA, NIST and VCCI.



A2LA Cert. No. 2955.13

