



FCC RADIO TEST REPORT

Applicant : AOPEN Inc.
Address : 5F., No.15, Ln. 128, Sinhu 1st Rd., Neihu District,
Taipei City 114, Taiwan(R.O.C.)
Equipment : AOPEN Chromebase Mini Commercial
Model No. : WT10M-FRG
Trade Name : AOPEN
FCC ID : YEW-10MFRGCM389

I HEREBY CERTIFY THAT :

The sample was received on Feb. 16, 2017 and the testing was carried out on Mar. 02, 2017 at CerpPASS Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of CerpPASS Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Mark Liao / Assistant Manager

Tested by:

Spree Yei / Engineer

Laboratory Accreditation:

CerpPASS Technology Corporation Test Laboratory





Contents

1. Summary of Test Procedure and Test Results.....	5
1.1 Applicable Standards	5
2. Test Configuration of Equipment under Test.....	6
2.1 Feature of Equipment under Test.....	6
2.2 Carrier Frequency of Channels	7
2.3 Test Mode & Test Software	7
2.4 Description of Test System.....	7
2.5 General Information of Test.....	8
3. Test Equipment and Ancillaries Used for Tests.....	9
4. Antenna Requirements.....	10
4.1 Standard Applicable	10
4.2 Antenna Construction and Directional Gain.....	10
5. Test of AC Power Line Conducted Emission	11
5.1 Test Limit	11
5.2 Test Procedures	11
5.3 Typical Test Setup	12
5.4 Test Result and Data	13
5.5 Test Photographs	15
6. Test of Radiated Spurious Emission.....	16
6.1 Test Limit	16
6.2 Test Procedures.....	16
6.3 Typical Test Setup	17
6.4 Test Result and Data (9kHz ~ 30MHz).....	18
6.5 Test Result and Data (30MHz ~ 1GHz).....	18
6.6 Test Result and Data (1GHz ~ 25GHz).....	20
6.7 Restricted Bands of Operation	32
6.8 Test Photographs (30MHz ~ 1GHz)	33
6.9 Test Photographs (1GHz ~ 25GHz)	34
7. Test of Conducted Spurious Emission	35
7.1 Test Limit	35
7.2 Test Procedure	35
7.3 Test Setup Layout	35
7.4 Test Result and Data	35
8. 20dB Bandwidth Measurement Data.....	43
8.1 Test Limit	43
8.2 Test Procedures	43
8.3 Test Setup Layout	43
8.4 Test Result and Data	43
9. Frequencies Separation	46
9.1 Test Limit	46
9.2 Test Procedures	46
9.3 Test Setup Layout	46



9.4 Test Result and Data 46

10. Dwell Time on each channel 49

10.1 Test Limit 49

10.2 Test Procedures 49

10.3 Test Setup Layout 49

10.4 Test Result and Data 49

11. Number of Hopping Channels 52

11.1 Test Limit 52

11.2 Test Procedures 52

11.3 Test Setup Layout 52

11.4 Test Result and Data 52

12. Maximum Peak Output Power 54

12.1 Test Limit 54

12.2 Test Procedures 54

12.3 Test Setup Layout 54

12.4 Test Result and Data 55



1. Summary of Test Procedure and Test Results

1.1 Applicable Standards

ANSI C63.4:2014

ANSI C63.10:2013

FCC Rules and Regulations Part 15 Subpart C §15.247

FCC Rule	Description of Test	Result
15.203	. Antenna Requirement	Pass
15.207	. AC Power Line Conducted Emission	Pass
15.209 15.205	. Radiated Spurious Emission	Pass
15.247(d)	. Conducted Spurious Emission	Pass
15.247(a)(1)	. Channel Carrier Frequencies Separation	Pass
15.247(a)(1)	. 20dB Bandwidth	Pass
15.247(a)(1)	. Dwell Time	Pass
15.247(b)	. Number of Hopping Channels	Pass
15.247(b)	. Peak Output Power Measurement Data	Pass

This EUT has been also tested and compiled with the requirement of FCC Part 15, Subpart B, recorded in a separate test report.



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Frequency Range	802.11b/g/n: 2412-2462 MHz 802.11a: 5150-5850 MHz Bluetooth: 2402-2480 MHz BLE: 2402-2480 MHz
Modulation Type	OFDM, DSSS, FHSS, GFSK, $\pi/4$ -DQPSK, 8DPSK
Data Rate	WLAN: 802.11b: 1, 2, 5.5, 11Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS15, HT20/40 802.11a: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11ac: MCS0 – MCS9, VHT 20/40/80) Bluetooth: Bluetooth 2.1+EDR data rates of 1,2, and 3Mbps
Antenna Type	PCB Antenna
Antenna Gain	802.11b/g/n: Antenna A: 0.59dBi Antenna B: 1.85dBi 802.11a: Antenna A Band1: 2.10dBi Antenna A Band2: 2.10dBi Antenna A Band3: 2.10dBi Antenna A Band4: 2.10dBi Antenna B Band1: 0.87dBi Antenna B Band2: 0.87dBi Antenna B Band3: 0.87dBi Antenna B Band4: 0.87dBi Bluetooth: 1.85dBi BLE: 1.85dBi



2.2 Carrier Frequency of Channels

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
*00	2402	20	2422	40	2442	60	2462
01	2403	21	2423	41	2443	61	2463
02	2404	22	2424	42	2444	62	2464
03	2405	23	2425	43	2445	63	2465
04	2406	24	2426	44	2446	64	2466
05	2407	25	2427	45	2447	65	2467
06	2408	26	2428	46	2448	66	2468
07	2409	27	2429	47	2449	67	2469
08	2410	28	2430	48	2450	68	2470
09	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	*78	2480
19	2421	*39	2441	59	2461	---	---

Note: Channels remarked * are selected to perform test.

2.3 Test Mode & Test Software

- During testing, the interface cables and equipment positions were varied according to ANSI C63.4
- The complete test system included EUT for RF test.
- An executive program, "Dut labtool V2.0.0.44" under Chrome was executed to transmit and receive data via Bluetooth.
- The following test modes were performed for the test:
 - Test Mode 1. GFSK (1Mbps)
 - Test Mode 2. $\pi/4$ -DQPSK (2Mbps)
 - Test Mode 3. 8DPSK (3Mbps)For conduction test, caused "Test Mode 3" generated the worst case, it was reported as the final data.
For radiated test (below 1GHz), caused "Test Mode 3" generated the worst case, it was reported as the final data.
For radiated test (above 1GHz), caused "Test Mode 1, 3" generated the worst case, they were reported as the final data

2.4 Description of Test System

The EUT was tested alone. No support devices is needed for testing.



2.5 General Information of Test

Test Site	Cerpass Technology Corporation Test Laboratory Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel:+886-3-3226-888 Fax:+886-3-3226-881 Address: No.68-1, Shihbachongsi, Shihding Township, New Taipei City 223, Taiwan, R.O.C. Tel: +886-2-2663-8582	
	FCC	TW1079, TW1061, 390316, 228391, 641184
	IC	4934E-1, 4934E-2
	VCCI	T-2205 for Telecommunication Test C-4663 for Conducted emission test R-3428, R-4218 for Radiated emission test G-812, G-813 for radiated disturbance above 1GHz
Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 25,000MHz	
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.	

2.6 Measurement Uncertainty

Measurement Item	Measurement Frequency	Polarization	Uncertainty
Conducted Emission	9 kHz ~ 30 MHz	Line / Neutral	±2.9076 dB
Radiated Emission	9 kHz ~ 25,000 MHz	Vertical / Horizontal	±0.948 dB
Spurious Emission (Conducted)	-	-	±4.011 dB
Maximum Peak and Average Output Power	-	-	±0.322 dB
Power Spectral Density	-	-	±0.322 dB
Bandwidth	-	-	74.224Hz



3. Test Equipment and Ancillaries Used for Tests

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
EMI Receiver	R&S	ESCI3	100443	2016/03/28	2017/03/27
LISN	Schwarzbeck	NSLK 8127	8127-740	2016/08/30	2017/08/29
LISN	Schwarzbeck	NSLK 8127	8127-516	2016/09/06	2017/09/05
Pulse Limiter	R&S	ESH3-Z2	101934	2017/02/14	2018/02/13
Bilog Antenna	Schwarzbeck	VULB9168	369	2016/03/22	2017/03/21
Active Loop Antenna	EMCO	6507	40855	2016/05/11	2017/05/10
Horn Antenna	EMCO	3115	31601	2016/09/05	2017/09/04
Horn Antenna	EMCO	3116	31970	2016/03/18	2017/03/17
EXA Signal Analyzer	KEYSIGHT	N9010A	MY54200207	2016/03/16	2017/03/15
Preamplifier	EM	EM330	660	2016/03/16	2017/03/15
Preamplifier	EMC INSTRUMENTS	EMC051845SE	980333	2016/09/13	2017/09/12
Preamplifier	Agilent	8449B	3008A01954	2017/02/09	2018/02/08
Preamplifier	MITEQ	AMF-7D-00101 00-30-10P	1860212	2016/03/16	2017/03/15
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2016/11/04	2017/11/03
MXG MW Analog Signal Generator	KEYSIGHT	N5183A	MY50142931	2016/03/18	2017/03/17
Spectrum Analyzer	R&S	FSP40	100219	2016/09/01	2017/08/31
Bluetooth Tester	R&S	CBT	101133	2016/03/18	2017/03/17
Attenuator	KEYSIGHT	8491B	MY39250703	2016/03/07	2017/03/06
Rotary Attenuator	Agilent	8494B	MY42154466	2016/03/08	2017/03/07
Rotary Attenuator	Agilent	8495B	MY42146680	2016/03/08	2017/03/07
Temp & Humi chamber	T-MACHINE	TMJ-9712	T-12-040111	2016/09/05	2017/09/04
Series Power Meter	Anritsu	ML2495A	1224005	2016/03/03	2017/03/02
Power Sensor	Anritsu	MA2411B	1207295	2016/03/03	2017/03/02
Cable	HUBER SUHNER	SUCOFLEX 102	28422/2	2016/03/15	2017/03/14
Cable	HUBER SUHNER	SUCOFLEX 102	28418/2	2016/03/16	2017/03/15
Cable	HUBER SUHNER	SUCOFLEX 102	28417/2	2016/03/04	2017/03/03
Software	Farad	Ez-EMC	ver.ct3a1	N/A	N/A
Software	AUDIX	E3	V8.2014-8-6	N/A	N/A
Software	Keysight	N7607B Signal Studio	v2.0.0.1	N/A	N/A
Software	Keysight	Inservice MonitorUtility	N/A	N/A	N/A



4. Antenna Requirements

4.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.2 Antenna Construction and Directional Gain

Antenna Type	Antenna Gain
PCB Antenna	1.85 dBi



5. Test of AC Power Line Conducted Emission

5.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz, according to the methods defined in ANSI C63.4-2014. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

5.2 Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connecting to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.




5.3 Typical Test Setup

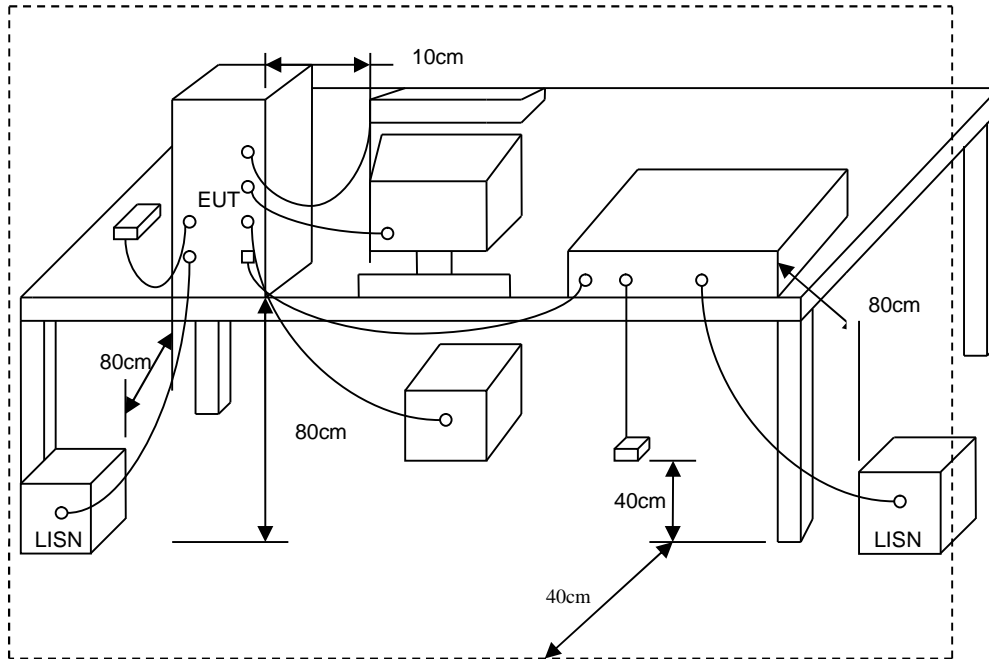



5.4 Test Result and Data

Power	: AC 120V	Pol/Phase	: LINE
Test Mode	: Mode 3	Temperature	: 22 °C
Test date	: Feb. 21, 2017	Humidity	: 52 %

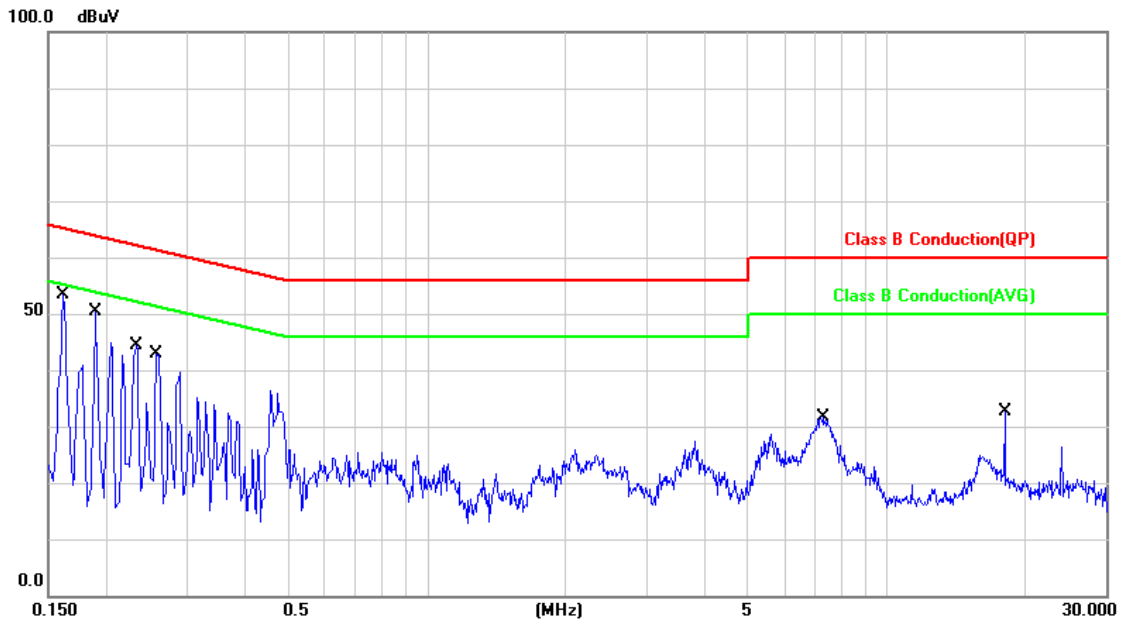


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV)	Limit (dBUV)	Margin (dB)	Detector	P/F
1	0.1620	9.98	43.72	53.70	65.36	-11.66	QP	P
2	0.1620	9.98	25.60	35.58	55.36	-19.78	AVG	P
3	0.1900	9.97	39.28	49.25	64.03	-14.78	QP	P
4	0.1900	9.97	21.14	31.11	54.03	-22.92	AVG	P
5	0.2340	9.97	29.28	39.25	62.30	-23.05	QP	P
6	0.2340	9.97	8.09	18.06	52.30	-34.24	AVG	P
7	0.2580	9.97	30.75	40.72	61.49	-20.77	QP	P
8	0.2580	9.97	13.40	23.37	51.49	-28.12	AVG	P
9	7.2740	10.21	17.67	27.88	60.00	-32.12	QP	P
10	7.2740	10.21	13.09	23.30	50.00	-26.70	AVG	P
11	18.0580	10.45	21.47	31.92	60.00	-28.08	QP	P
12	18.0580	10.45	20.23	30.68	50.00	-19.32	AVG	P

Note: Level = Reading + Factor
Margin = Level – Limit
Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss



Power	: AC 120V	Pol/Phase	: NEUTRAL
Test Mode	: Mode 3	Temperature	: 22 °C
Test date	: Feb. 21, 2017	Humidity	: 52 %

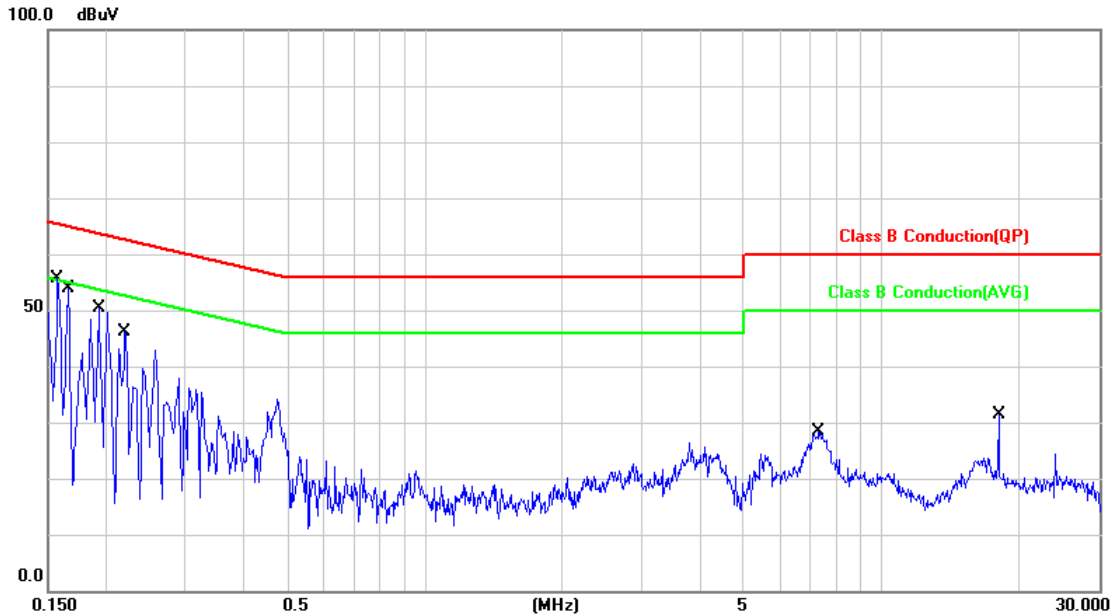

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1580	9.98	43.90	53.88	65.56	-11.68	QP	P
2	0.1580	9.98	26.76	36.74	55.56	-18.82	AVG	P
3	0.1660	9.98	40.53	50.51	65.15	-14.64	QP	P
4	0.1660	9.98	20.58	30.56	55.15	-24.59	AVG	P
5	0.1940	9.98	38.61	48.59	63.86	-15.27	QP	P
6	0.1940	9.98	21.11	31.09	53.86	-22.77	AVG	P
7	0.2220	9.97	34.84	44.81	62.74	-17.93	QP	P
8	0.2220	9.97	16.96	26.93	52.74	-25.81	AVG	P
9	7.2980	10.24	14.14	24.38	60.00	-35.62	QP	P
10	7.2980	10.24	9.18	19.42	50.00	-30.58	AVG	P
11	18.0580	10.54	19.98	30.52	60.00	-29.48	QP	P
12	18.0580	10.54	18.74	29.28	50.00	-20.72	AVG	P

Note: Level = Reading + Factor
Margin = Level – Limit
Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss



6. Test of Radiated Spurious Emission

6.1 Test Limit

Radiated emissions from 30 MHz to 25 GHz were measured according to the methods defines in ANSI C63.4-2014. The EUT was placed, 0.8 meter above the ground plane, as shown in section 5.6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance Meters	Radiated (μ V / M)	Radiated (dB μ V / M)
30-88	3	100	40.0
88-216	3	150	43.5
216-960	3	200	46.0
Above 960	3	500	54.0

For unintentional device, according to CISPR PUB.22, for Class B digital devices, the general requirement of field strength of radiated emissions from intentional radiators at a distance of 10 meters shall not exceed the above table.

Frequency (MHz)	Distance Meters	Radiated (dB μ V / M)
30-230	10	30
230-1000	10	37


6.2 Test Procedures

- The EUT was placed on a rotatable table top 0.8 meter above ground.
- The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- The table was rotated 360 degrees to determine the position of the highest radiation.
- The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.




6.3 Typical Test Setup


Below 30MHz test setup

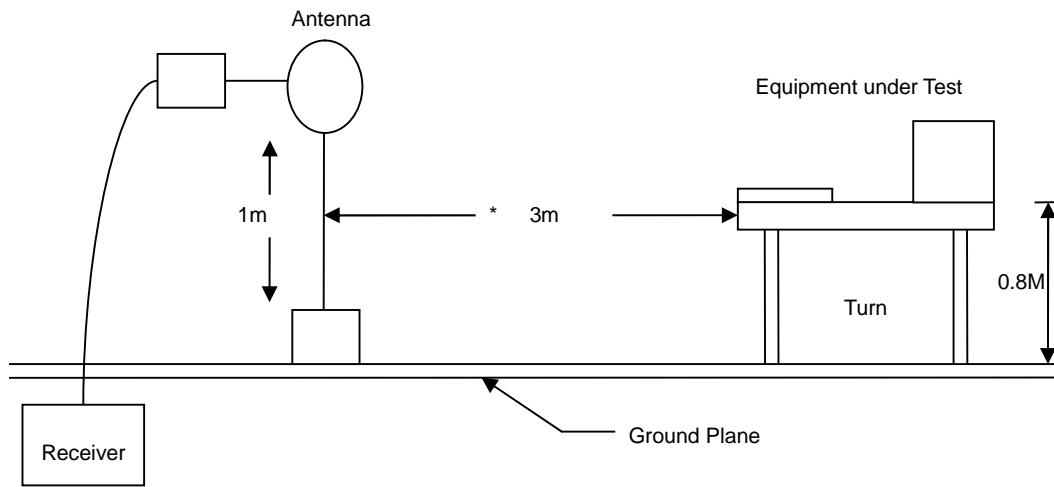

30MHz- 1GHz Test Setup

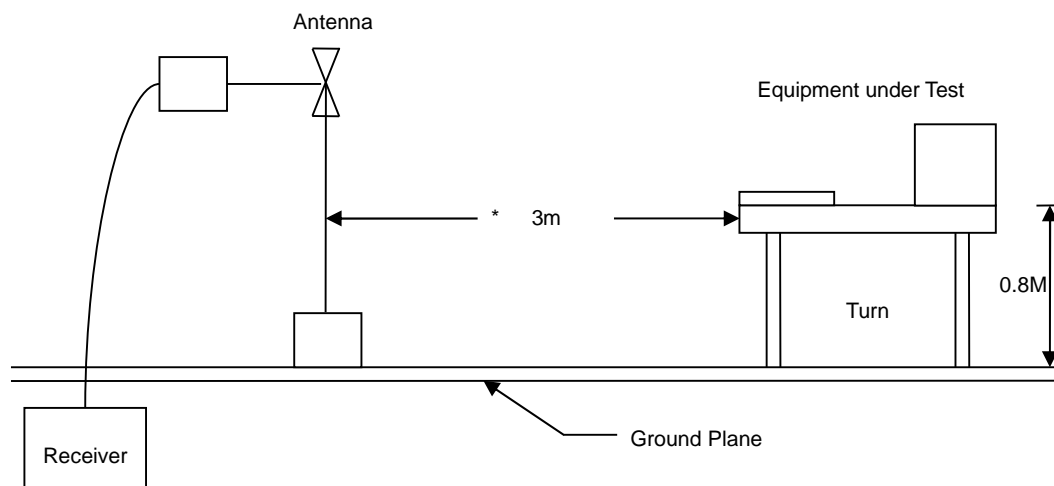

Above 1GHz Test Setup

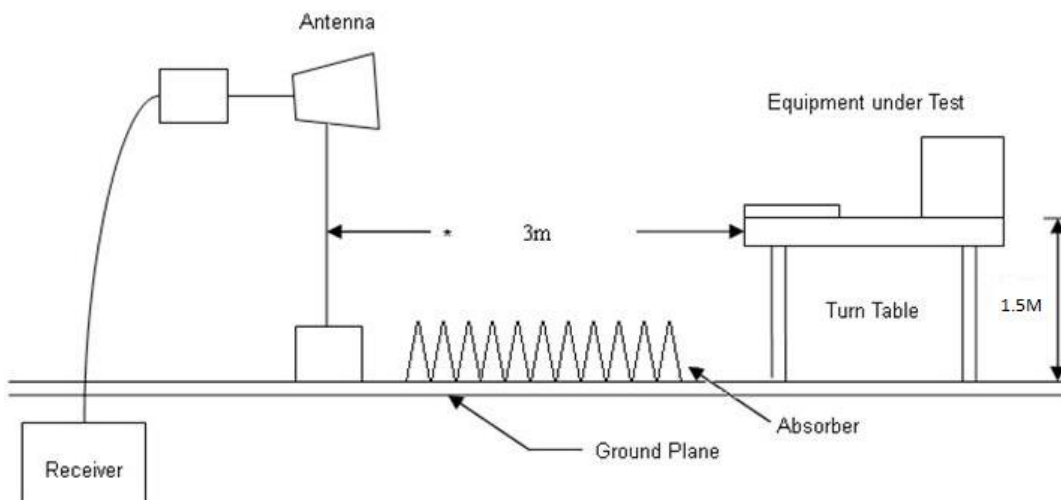




6.4 Test Result and Data (9kHz ~ 30MHz)

The 9kHz-30MHz spurious emission is under limit 20dB more.

6.5 Test Result and Data (30MHz ~ 1GHz)

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 3	Temperature	: 24 °C
Test Date	: Feb. 16, 2017	Humidity	: 63 %

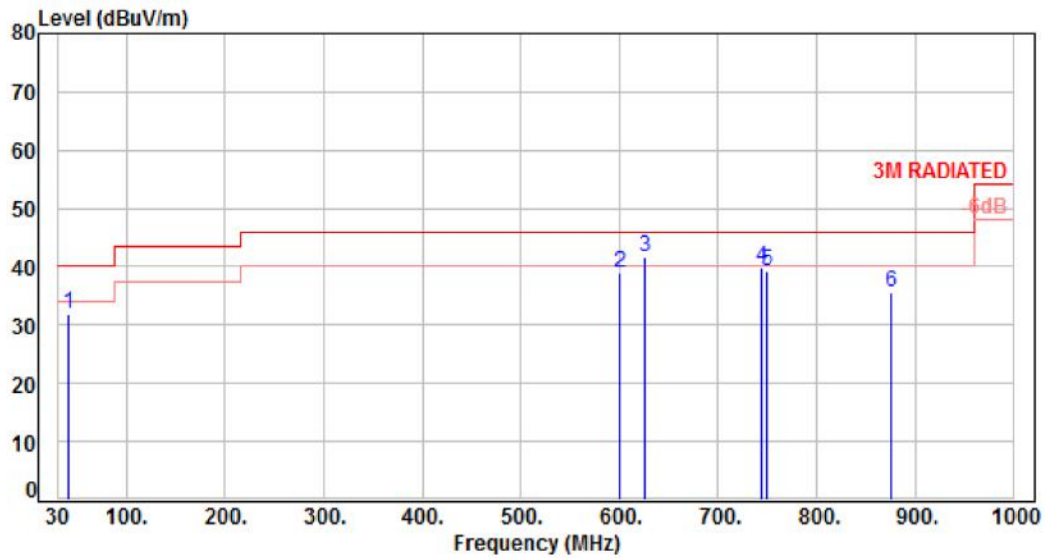


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	41.64	-10.01	41.81	31.80	40.00	-8.20	Peak	100	0	P
2	600.36	-1.98	40.95	38.97	46.00	-7.03	Peak	100	0	P
3	625.58	-1.70	43.38	41.68	46.00	-4.32	Peak	100	0	P
4	743.92	0.27	39.67	39.94	46.00	-6.06	Peak	100	0	P
5	749.74	0.38	38.93	39.31	46.00	-6.69	Peak	100	0	P
6	875.84	1.87	33.78	35.65	46.00	-10.35	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3	Temperature	: 24 °C
Test Date	: Feb. 16, 2017	Humidity	: 63 %

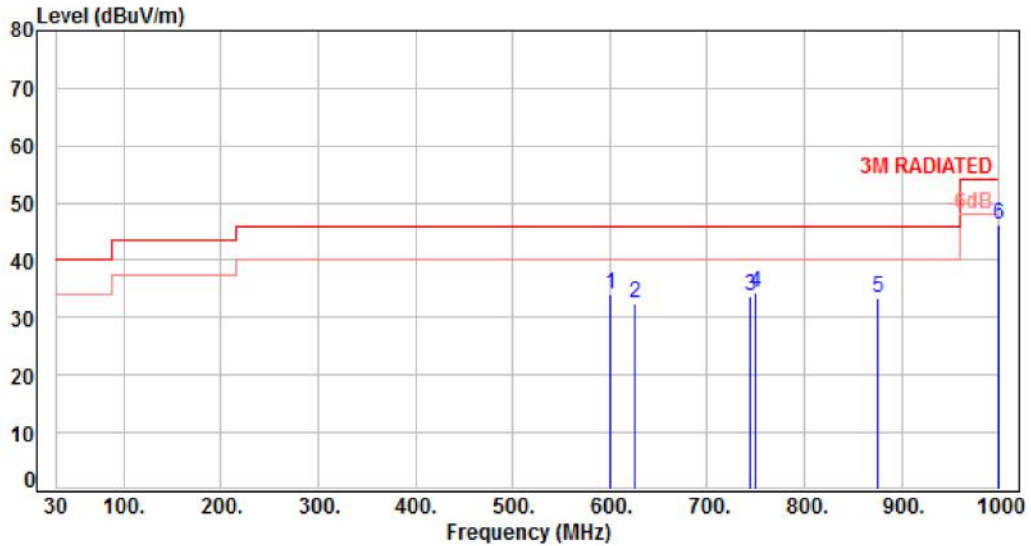


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	600.36	-1.98	35.97	33.99	46.00	-12.01	Peak	100	0	P
2	625.58	-1.70	34.13	32.43	46.00	-13.57	Peak	100	0	P
3	743.92	0.27	33.39	33.66	46.00	-12.34	Peak	100	0	P
4	749.74	0.38	34.02	34.40	46.00	-11.60	Peak	100	0	P
5	875.84	1.87	31.47	33.34	46.00	-12.66	Peak	100	0	P
6	1000.00	3.44	42.92	46.36	54.00	-7.64	Peak	100	0	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



6.6 Test Result and Data (1GHz ~ 25GHz)

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH00	Temperature	: 24 °C
Test Date	: Feb. 21, 2017	Humidity	: 63 %

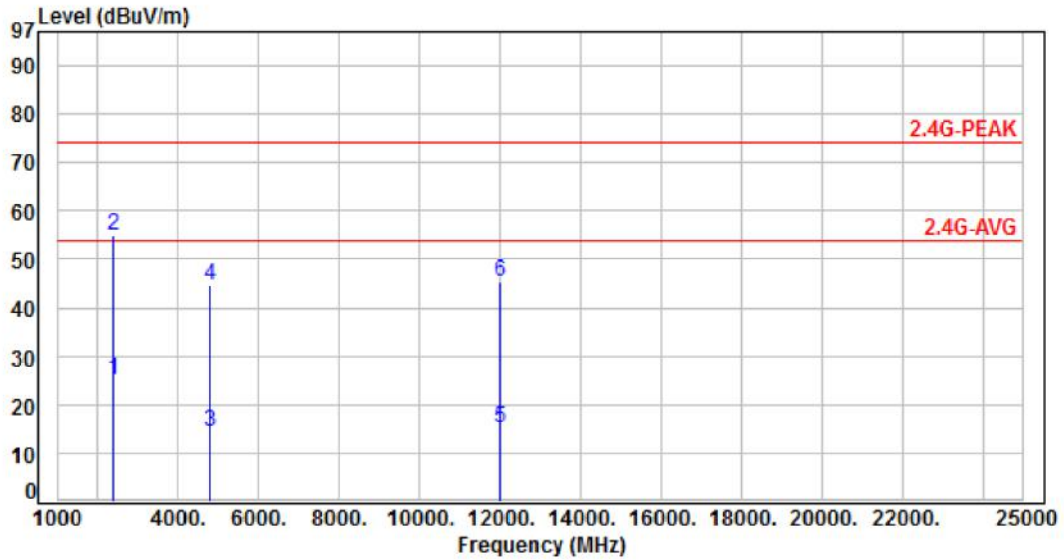


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-15.75	40.69	24.94	54.00	-29.06	Average	339	244	P
2	2390.00	-15.75	70.79	55.04	74.00	-18.96	Peak	339	244	P
3	4804.00	-7.65	22.04	14.39	54.00	-39.61	Average	126	173	P
4	4804.00	-7.65	52.14	44.49	74.00	-29.51	Peak	126	173	P
5	12010.00	2.25	13.00	15.25	54.00	-38.75	Average	149	192	P
6	12010.00	2.25	43.10	45.35	74.00	-28.65	Peak	149	192	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH00	Temperature	: 24 °C
Test Date	: Feb. 21, 2017	Humidity	: 63 %

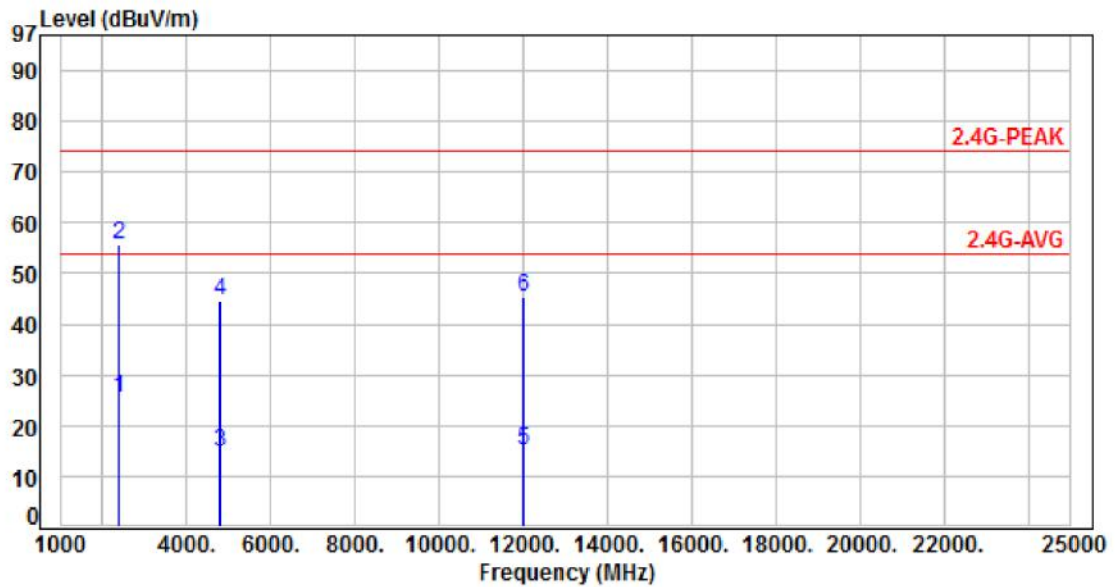


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-15.75	41.22	25.47	54.00	-28.53	Average	117	215	P
2	2390.00	-15.75	71.32	55.57	74.00	-18.43	Peak	117	215	P
3	4804.00	-7.65	22.22	14.57	54.00	-39.43	Average	113	156	P
4	4804.00	-7.65	52.32	44.67	74.00	-29.33	Peak	113	156	P
5	12010.00	2.25	13.05	15.30	54.00	-38.70	Average	100	147	P
6	12010.00	2.25	43.15	45.40	74.00	-28.60	Peak	100	147	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH39	Temperature	: 24 °C
Test Date	: Feb. 21, 2017	Humidity	: 63 %

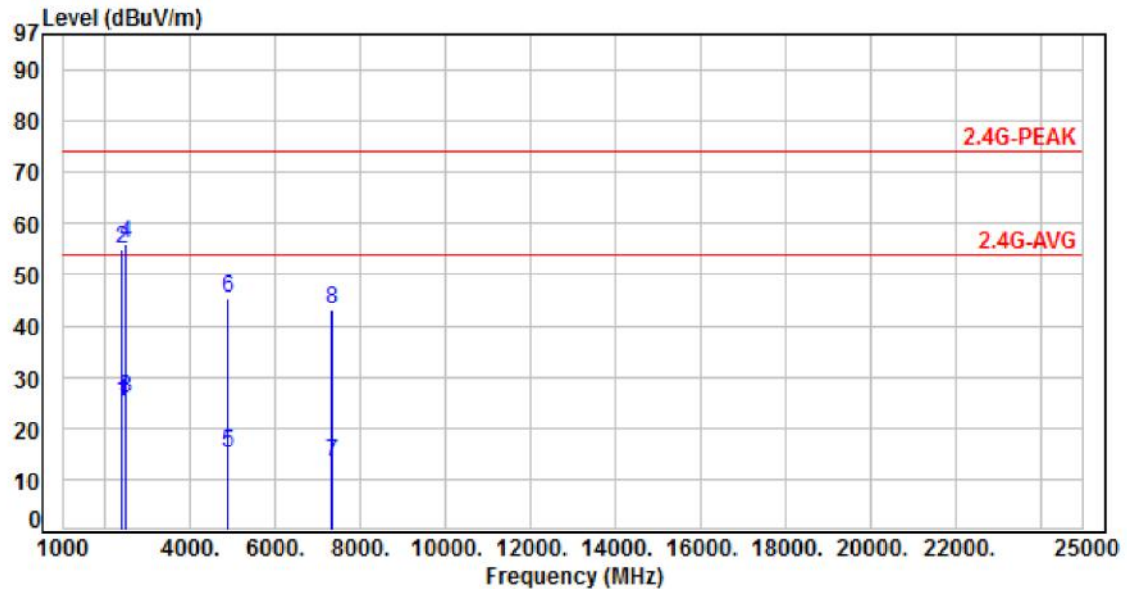


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-15.75	40.78	25.03	54.00	-28.97	Average	127	322	P
2	2390.00	-15.75	70.88	55.13	74.00	-18.87	Peak	127	322	P
3	2483.50	-15.48	41.32	25.84	54.00	-28.16	Average	127	322	P
4	2483.50	-15.48	71.42	55.94	74.00	-18.06	Peak	127	322	P
5	4882.00	-7.35	22.62	15.27	54.00	-38.73	Average	141	255	P
6	4882.00	-7.35	52.72	45.37	74.00	-28.63	Peak	141	255	P
7	7323.00	-3.48	16.67	13.19	54.00	-40.81	Average	137	97	P
8	7323.00	-3.48	46.77	43.29	74.00	-30.71	Peak	137	97	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH39	Temperature	: 24 °C
Test Date	: Feb. 21, 2017	Humidity	: 63 %

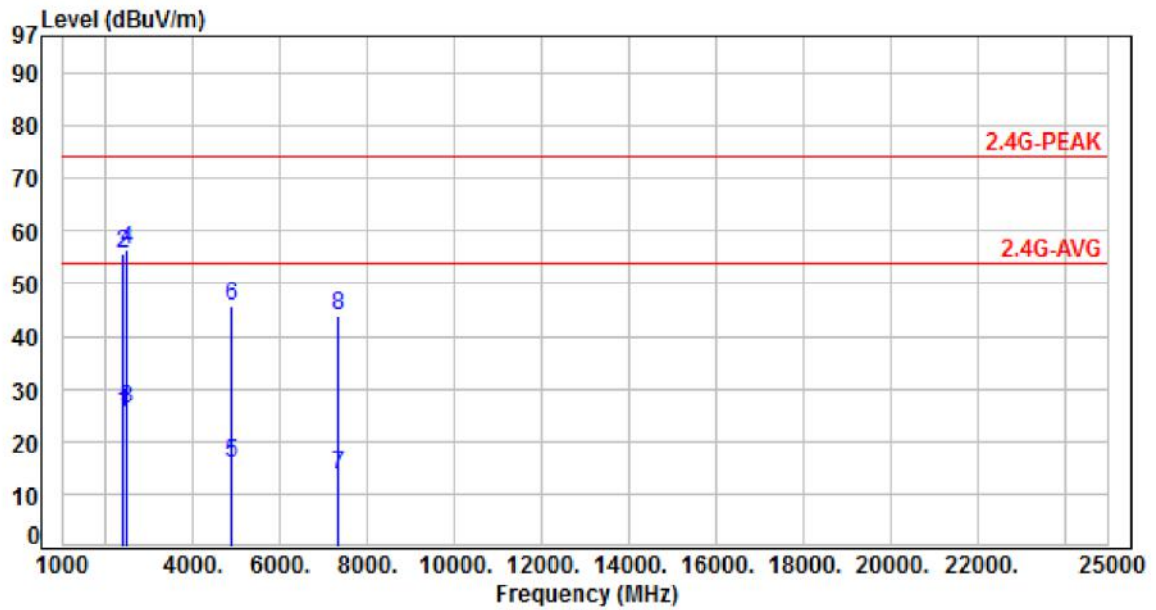


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-15.75	41.31	25.56	54.00	-28.44	Average	115	212	P
2	2390.00	-15.75	71.41	55.66	74.00	-18.34	Peak	115	212	P
3	2483.50	-15.48	41.71	26.23	54.00	-27.77	Average	115	212	P
4	2483.50	-15.48	71.81	56.33	74.00	-17.67	Peak	115	212	P
5	4882.00	-7.35	23.15	15.80	54.00	-38.20	Average	103	156	P
6	4882.00	-7.35	53.25	45.90	74.00	-28.10	Peak	103	156	P
7	7323.00	-3.48	17.21	13.73	54.00	-40.27	Average	112	163	P
8	7323.00	-3.48	47.31	43.83	74.00	-30.17	Peak	112	163	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH78	Temperature	: 24 °C
Test Date	: Feb. 21, 2017	Humidity	: 63 %

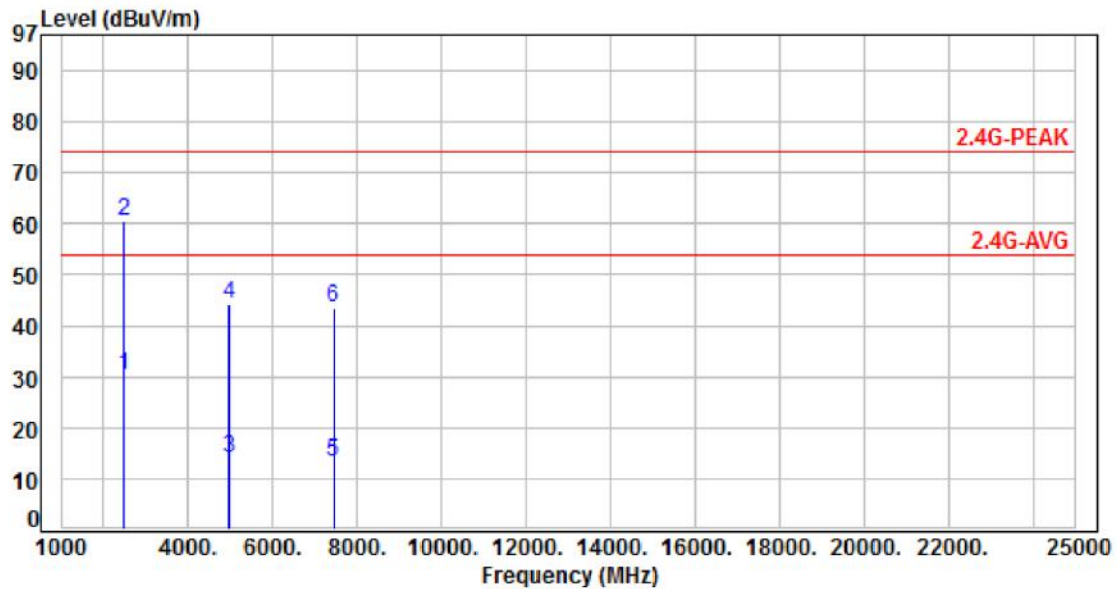


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-15.48	45.79	30.31	54.00	-23.69	Average	119	253	P
2	2483.50	-15.48	75.89	60.41	74.00	-13.59	Peak	119	253	P
3	4960.00	-7.04	21.23	14.19	54.00	-39.81	Average	122	170	P
4	4960.00	-7.04	51.33	44.29	74.00	-29.71	Peak	122	170	P
5	7440.00	-3.30	16.62	13.32	54.00	-40.68	Average	144	155	P
6	7440.00	-3.30	46.72	43.42	74.00	-30.58	Peak	144	155	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH78	Temperature	: 24 °C
Test Date	: Feb. 21, 2017	Humidity	: 63 %

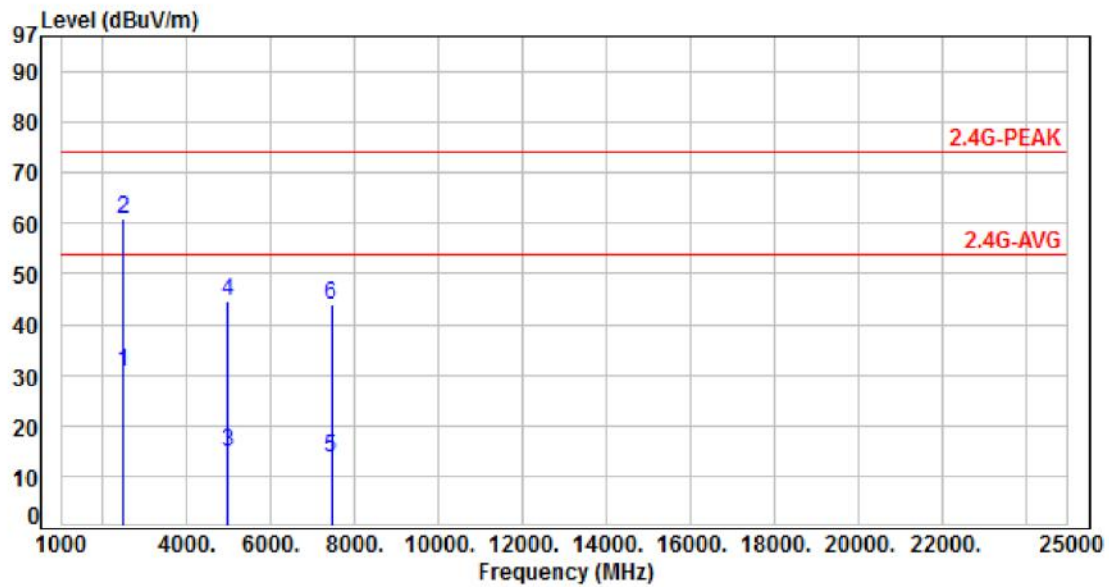


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-15.48	46.20	30.72	54.00	-23.28	Average	103	214	P
2	2483.50	-15.48	76.30	60.82	74.00	-13.18	Peak	103	214	P
3	4960.00	-7.04	21.73	14.69	54.00	-39.31	Average	106	155	P
4	4960.00	-7.04	51.83	44.79	74.00	-29.21	Peak	106	155	P
5	7440.00	-3.30	17.08	13.78	54.00	-40.22	Average	112	163	P
6	7440.00	-3.30	47.18	43.88	74.00	-30.12	Peak	112	163	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 3, CH00	Temperature	: 24 °C
Test Date	: Feb. 21, 2017	Humidity	: 63 %

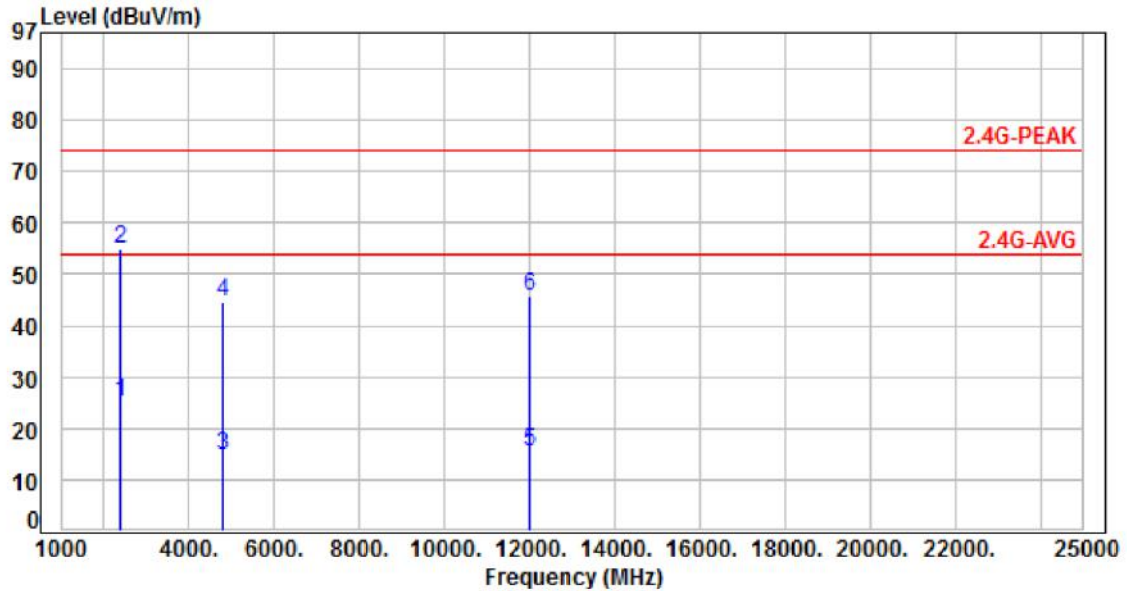


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-15.75	40.73	24.98	54.00	-29.02	Average	340	247	P
2	2390.00	-15.75	70.83	55.08	74.00	-18.92	Peak	340	247	P
3	4804.00	-7.65	22.26	14.61	54.00	-39.39	Average	128	173	P
4	4804.00	-7.65	52.36	44.71	74.00	-29.29	Peak	128	173	P
5	12010.00	2.25	13.27	15.52	54.00	-38.48	Average	148	191	P
6	12010.00	2.25	43.37	45.62	74.00	-28.38	Peak	148	191	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3, CH00	Temperature	: 24 °C
Test Date	: Feb. 21, 2017	Humidity	: 63 %

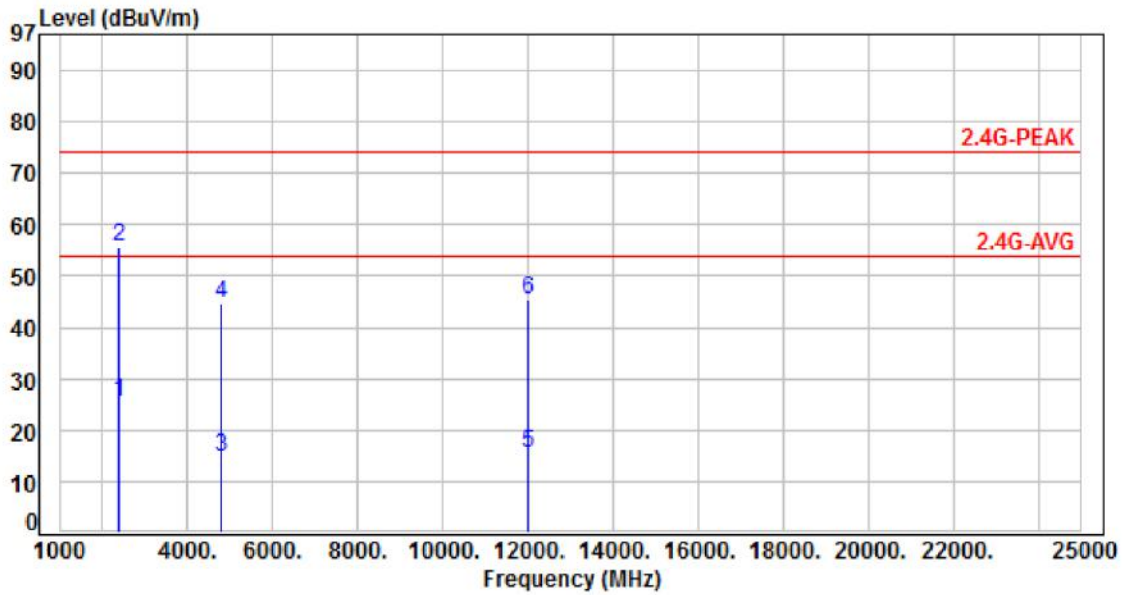


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-15.75	41.38	25.63	54.00	-28.37	Average	118	214	P
2	2390.00	-15.75	71.48	55.73	74.00	-18.27	Peak	118	214	P
3	4804.00	-7.65	22.36	14.71	54.00	-39.29	Average	112	157	P
4	4804.00	-7.65	52.46	44.81	74.00	-29.19	Peak	112	157	P
5	12010.00	2.25	13.17	15.42	54.00	-38.58	Average	103	148	P
6	12010.00	2.25	43.27	45.52	74.00	-28.48	Peak	103	148	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 3, CH39	Temperature	: 24 °C
Test Date	: Feb. 21, 2017	Humidity	: 63 %

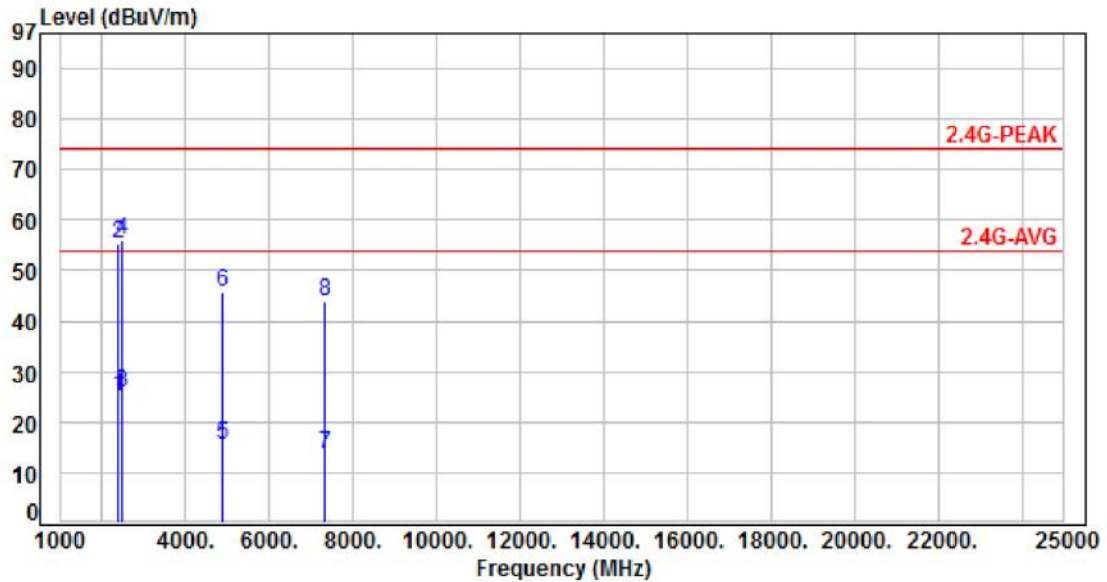


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-15.75	40.89	25.14	54.00	-28.86	Average	124	271	P
2	2390.00	-15.75	70.99	55.24	74.00	-18.76	Peak	124	271	P
3	2483.50	-15.48	41.40	25.92	54.00	-28.08	Average	124	271	P
4	2483.50	-15.48	71.50	56.02	74.00	-17.98	Peak	124	271	P
5	4882.00	-7.35	22.97	15.62	54.00	-38.38	Average	112	88	P
6	4882.00	-7.35	53.07	45.72	74.00	-28.28	Peak	112	88	P
7	7323.00	-3.48	17.21	13.73	54.00	-40.27	Average	130	199	P
8	7323.00	-3.48	47.31	43.83	74.00	-30.17	Peak	130	199	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3, CH39	Temperature	: 24 °C
Test Date	: Feb. 21, 2017	Humidity	: 63 %

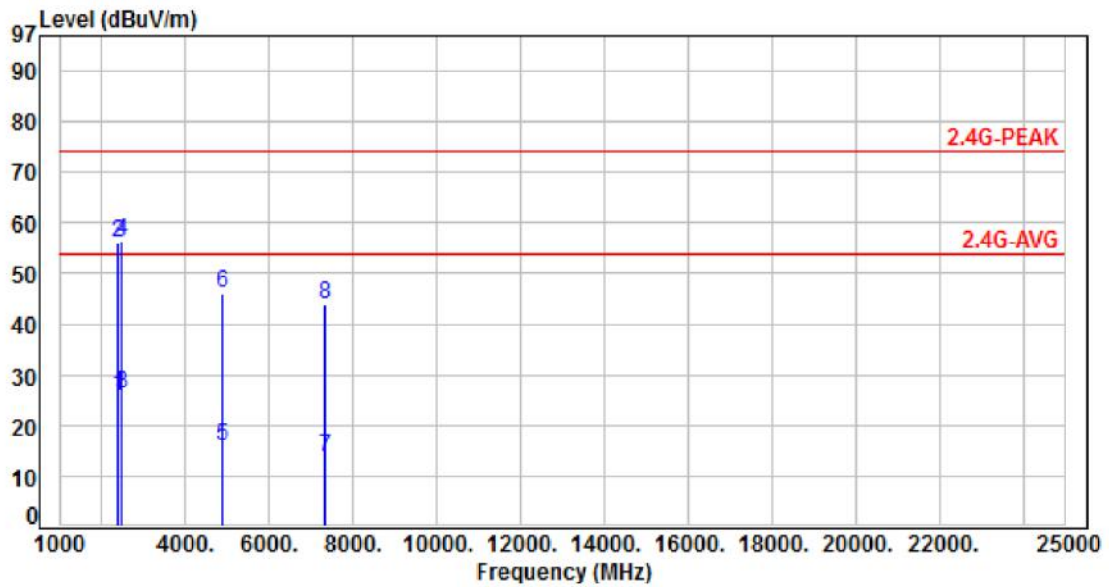


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-15.75	41.53	25.78	54.00	-28.22	Average	116	214	P
2	2390.00	-15.75	71.63	55.88	74.00	-18.12	Peak	116	214	P
3	2483.50	-15.48	41.75	26.27	54.00	-27.73	Average	116	214	P
4	2483.50	-15.48	71.85	56.37	74.00	-17.63	Peak	116	214	P
5	4882.00	-7.35	23.27	15.92	54.00	-38.08	Average	105	155	P
6	4882.00	-7.35	53.37	46.02	74.00	-27.98	Peak	105	155	P
7	7323.00	-3.48	17.29	13.81	54.00	-40.19	Average	110	162	P
8	7323.00	-3.48	47.39	43.91	74.00	-30.09	Peak	110	162	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 3, CH78	Temperature	: 24 °C
Test Date	: Feb. 21, 2017	Humidity	: 63 %

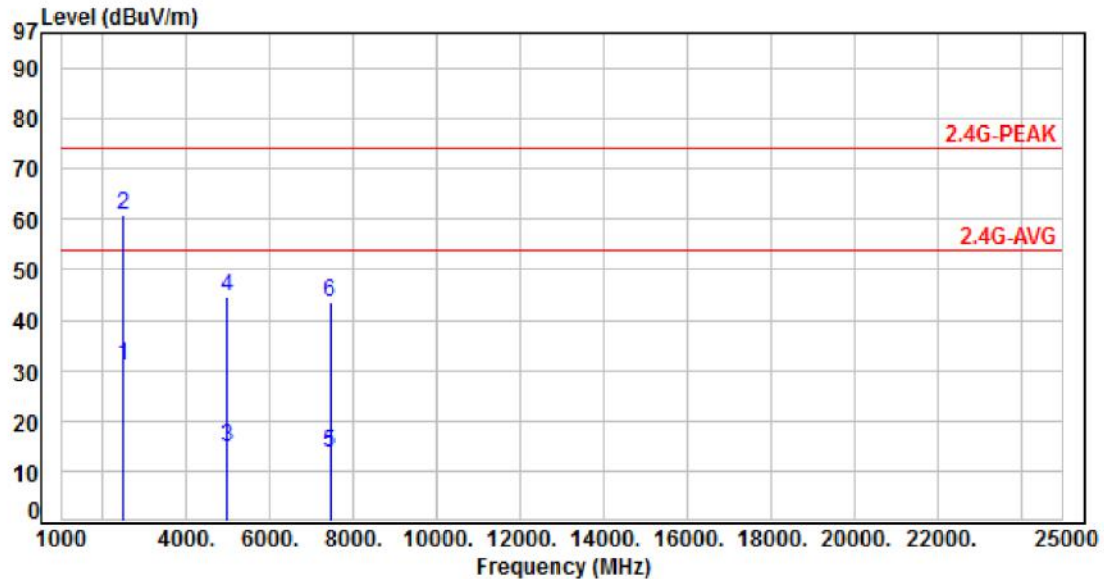


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-15.48	46.30	30.82	54.00	-23.18	Average	118	184	P
2	2483.50	-15.48	76.40	60.92	74.00	-13.08	Peak	118	184	P
3	4960.00	-7.04	21.66	14.62	54.00	-39.38	Average	151	29	P
4	4960.00	-7.04	51.76	44.72	74.00	-29.28	Peak	151	29	P
5	7440.00	-3.30	16.89	13.59	54.00	-40.41	Average	142	332	P
6	7440.00	-3.30	46.99	43.69	74.00	-30.31	Peak	142	332	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3, CH78	Temperature	: 24 °C
Test Date	: Feb. 21, 2017	Humidity	: 63 %

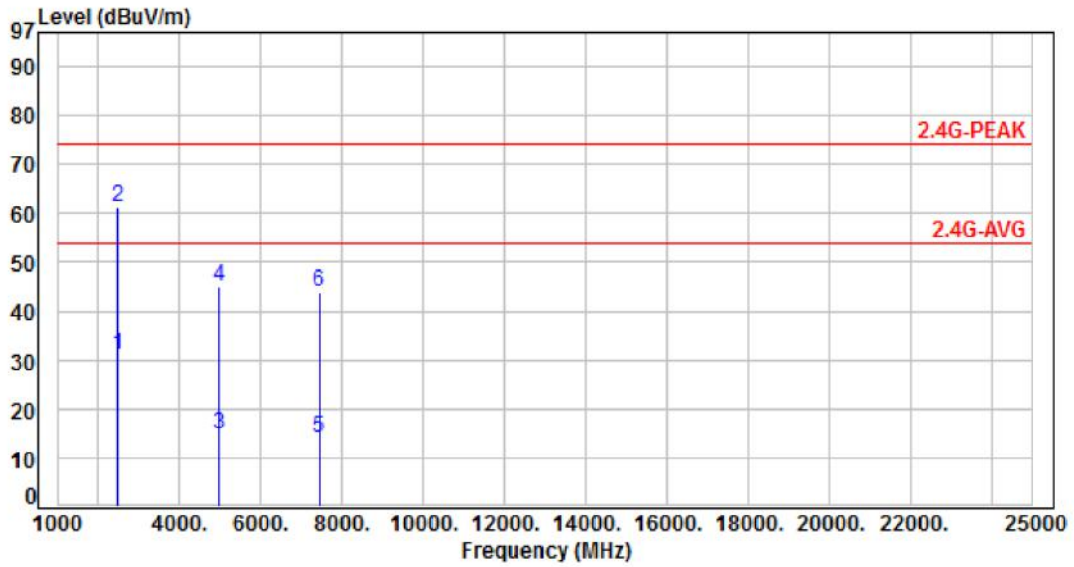

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-15.48	46.45	30.97	54.00	-23.03	Average	106	216	P
2	2483.50	-15.48	76.55	61.07	74.00	-12.93	Peak	106	216	P
3	4960.00	-7.04	21.85	14.81	54.00	-39.19	Average	108	155	P
4	4960.00	-7.04	51.95	44.91	74.00	-29.09	Peak	108	155	P
5	7440.00	-3.30	17.21	13.91	54.00	-40.09	Average	112	159	P
6	7440.00	-3.30	47.31	44.01	74.00	-29.99	Peak	112	159	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



6.7 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



7. Test of Conducted Spurious Emission


7.1 Test Limit

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

7.2 Test Procedure

- a. The transmitter output was connected to the spectrum analyzer via a low lose cable.
- b. Set both RBW and VBW of spectrum analyzer to 100 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- c. The band edges was measured and recorded.

7.3 Test Setup Layout




7.4 Test Result and Data

Test Result	: PASS	Temperature	: 21°C
Test Date	: Mar. 02, 2017	Humidity	: 58%






Note: Test plots refer to the following pages.



Modulation Type: GFSK, CH00

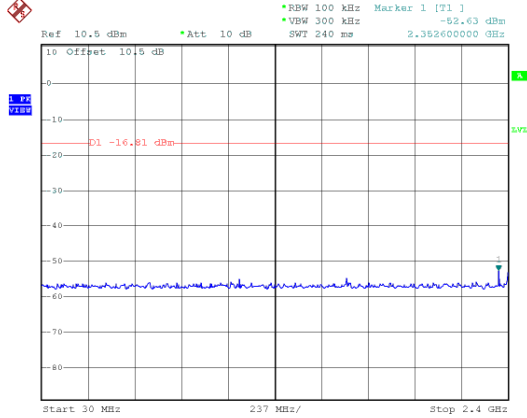


Modulation Type: GFSK, CH39

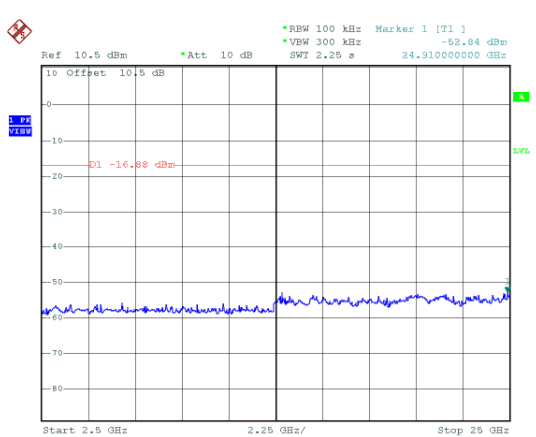
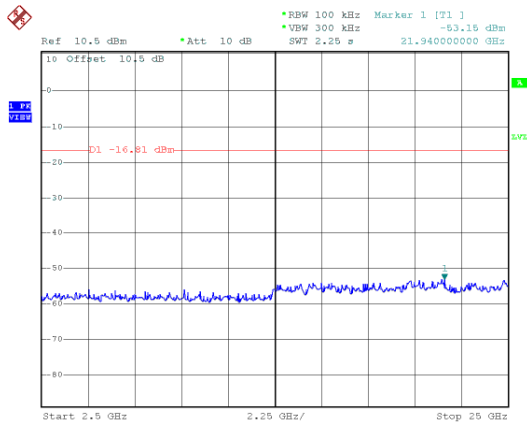
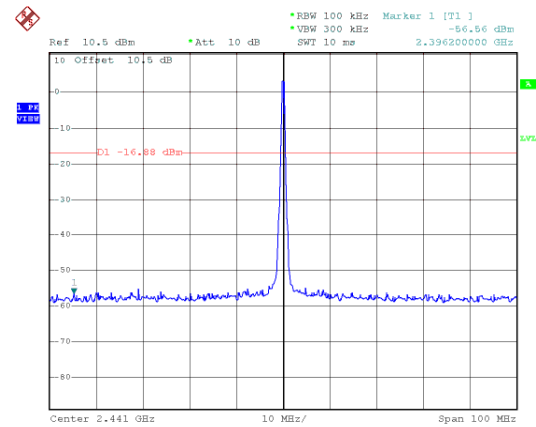
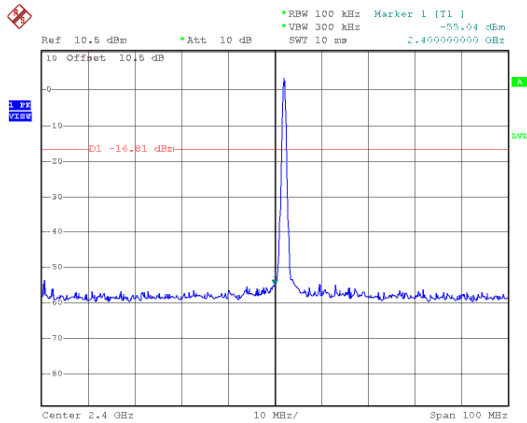
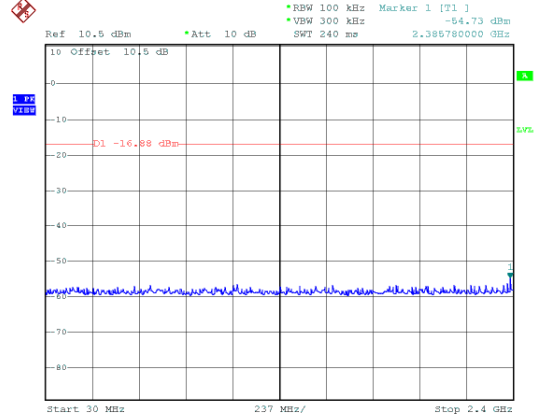




Modulation Type: GFSK, CH78

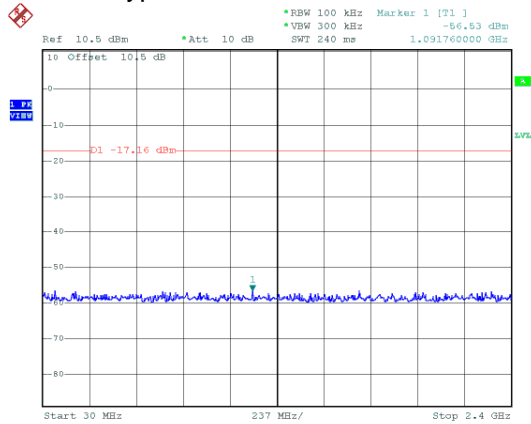







Modulation Type: $\pi/4$ -DQPSK, CH00

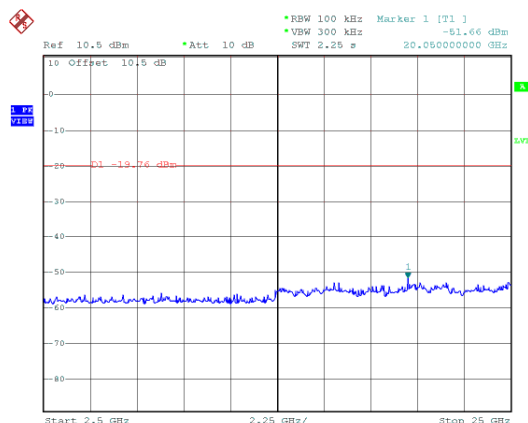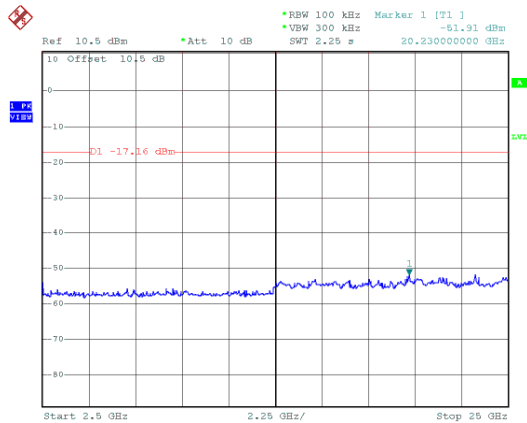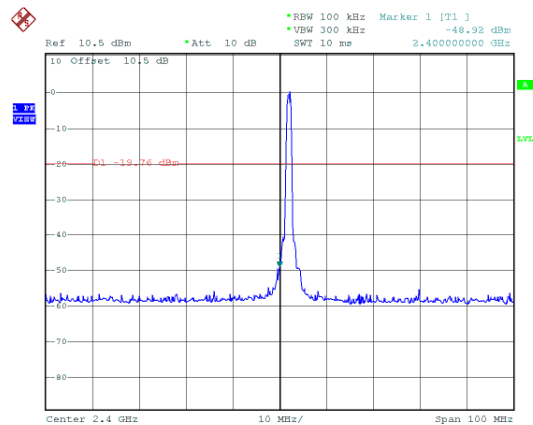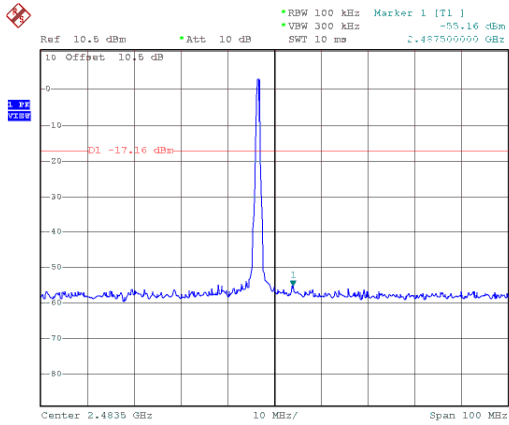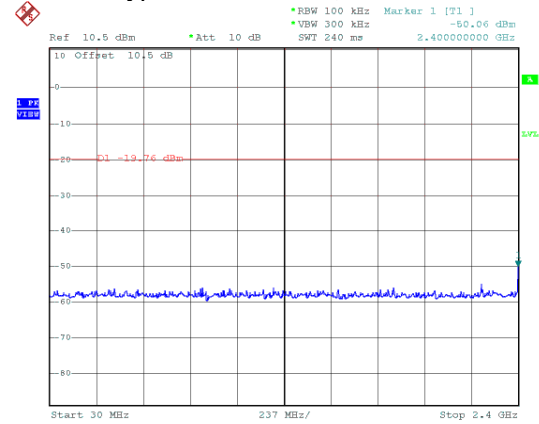



Modulation Type: $\pi/4$ -DQPSK, CH39







Modulation Type: $\pi/4$ -DQPSK, CH78

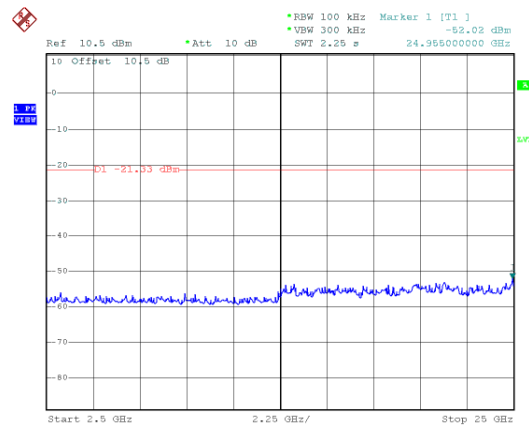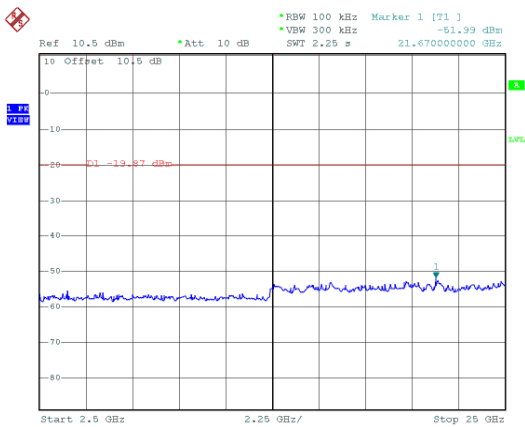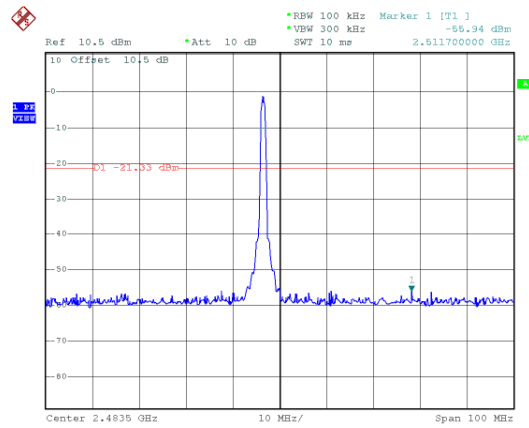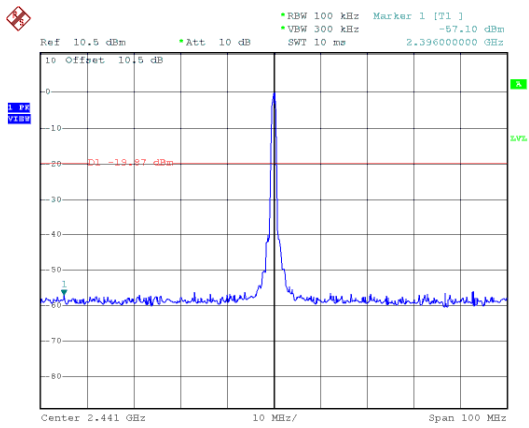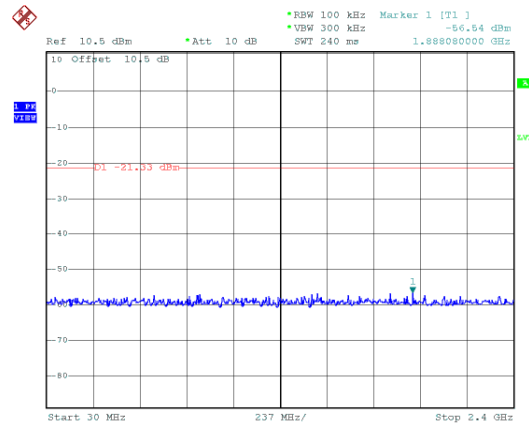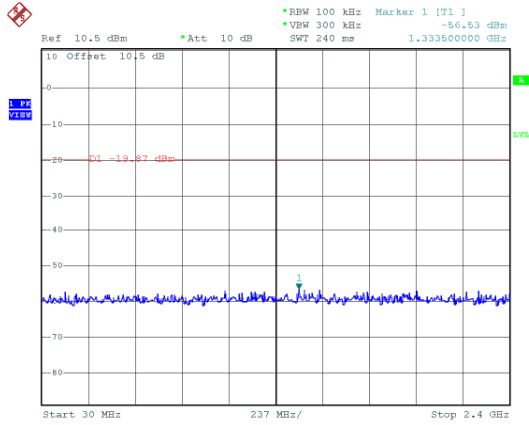






Modulation Type: 8DPSK, CH00

Modulation Type: 8DPSK, CH39

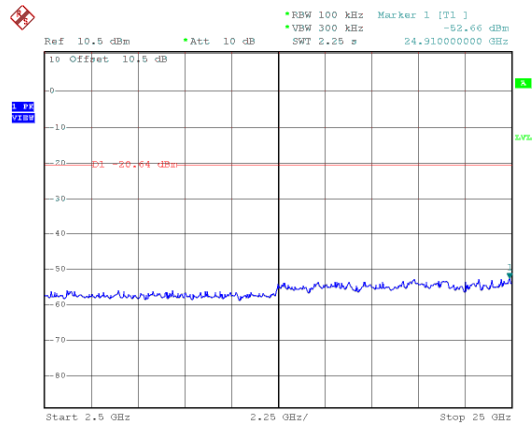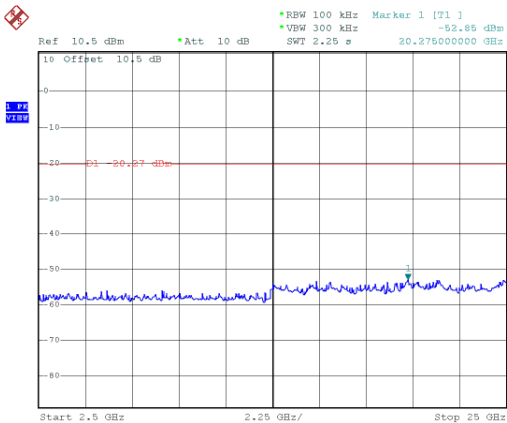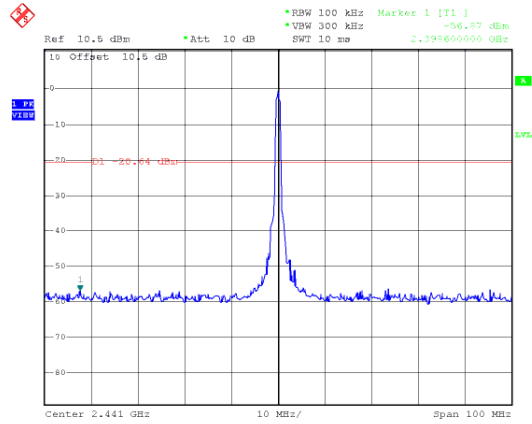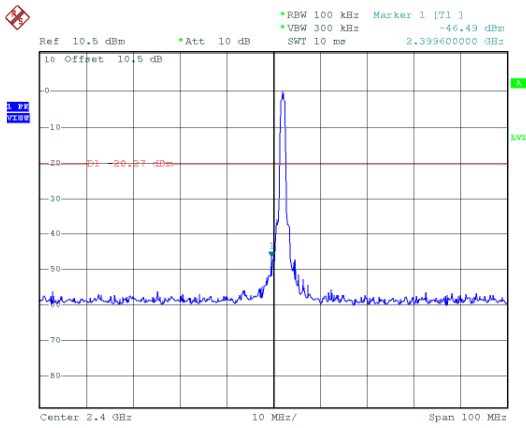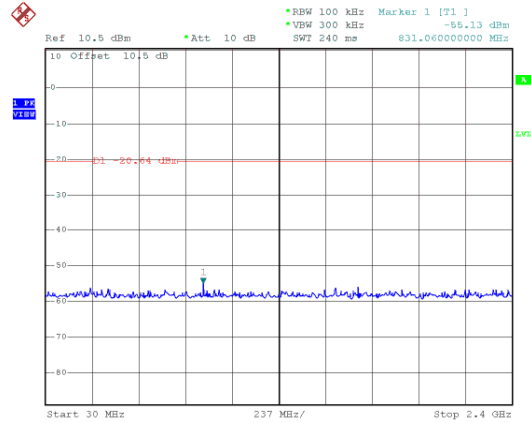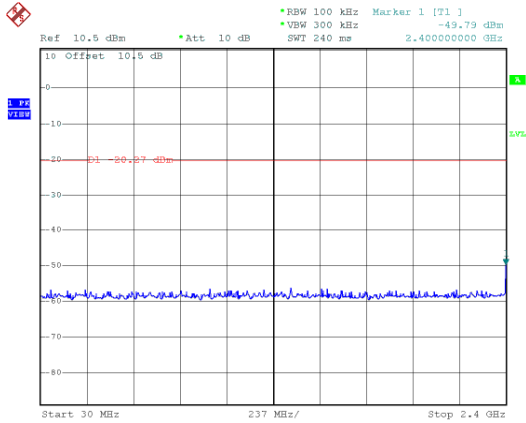




Modulation Type: 8DPSK, CH78



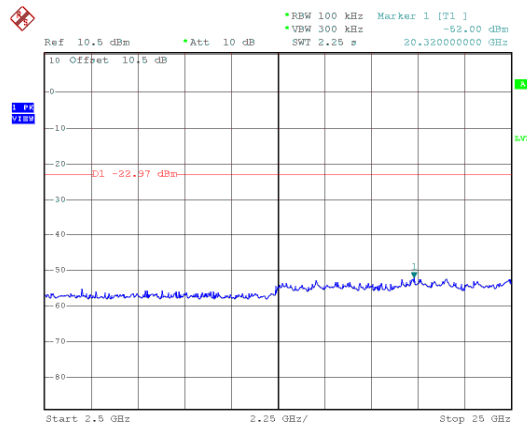
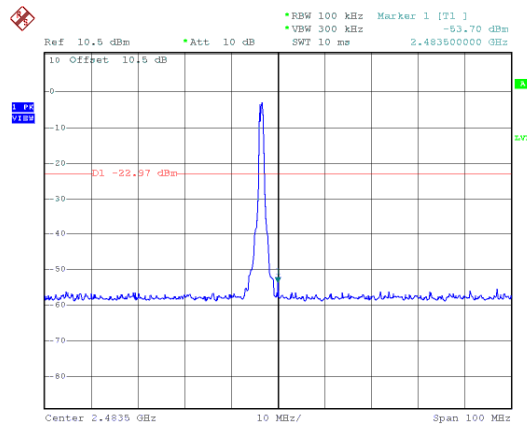
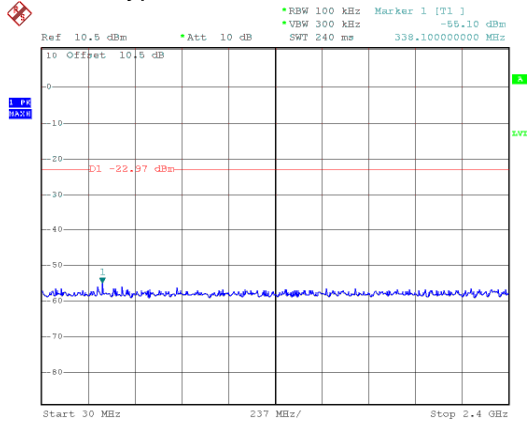




Hopping Mode:
Modulation Type: GFSK



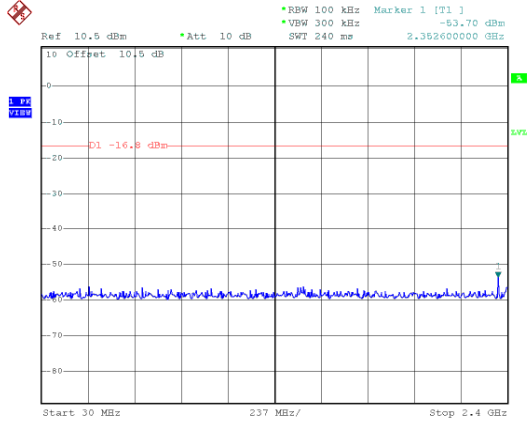


Modulation Type: $\pi/4$ -DQPSK

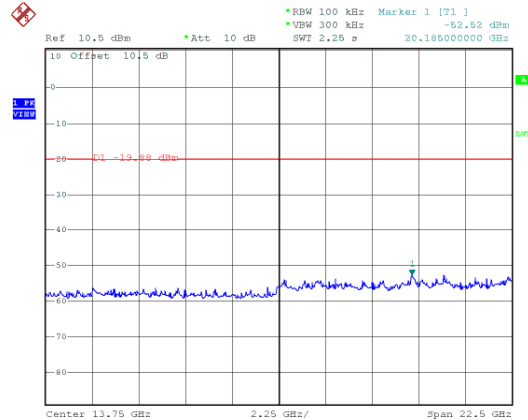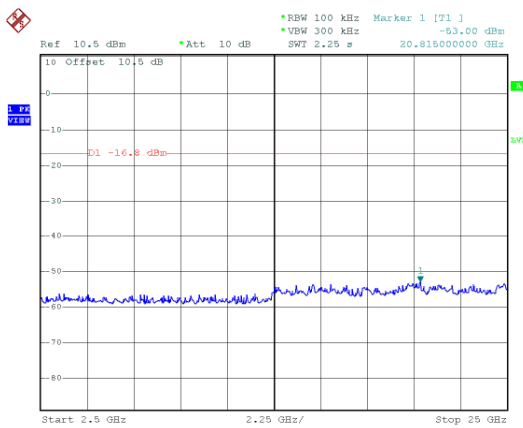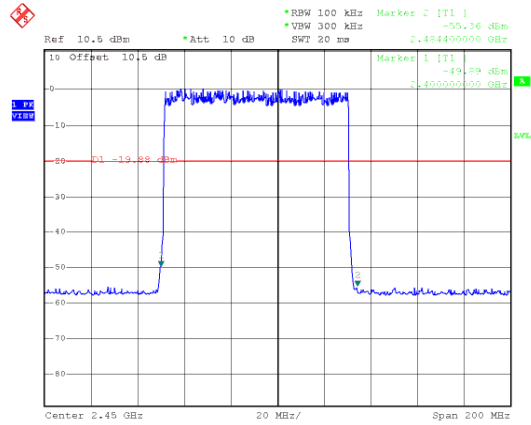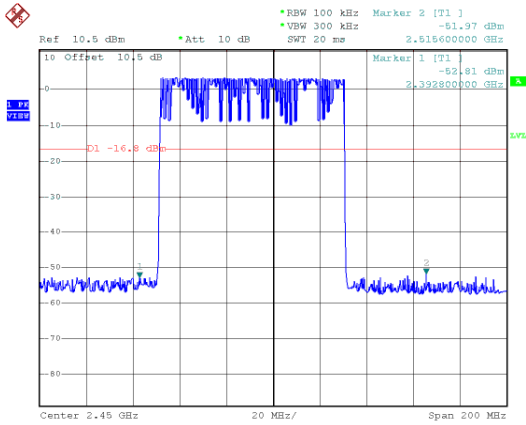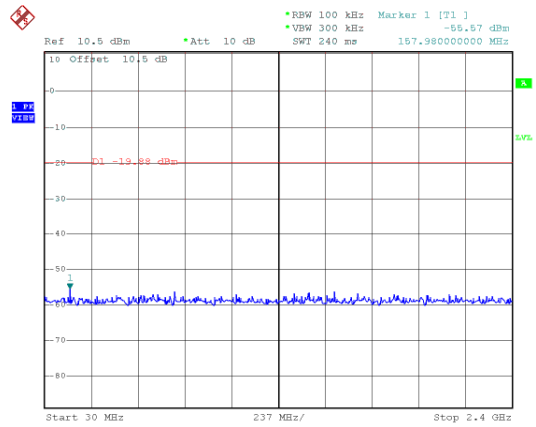




Modulation Type: 8DPSK

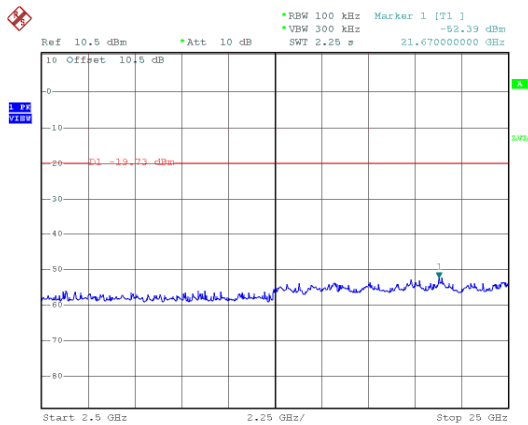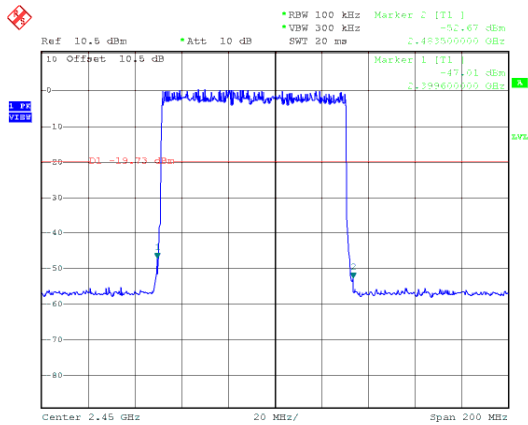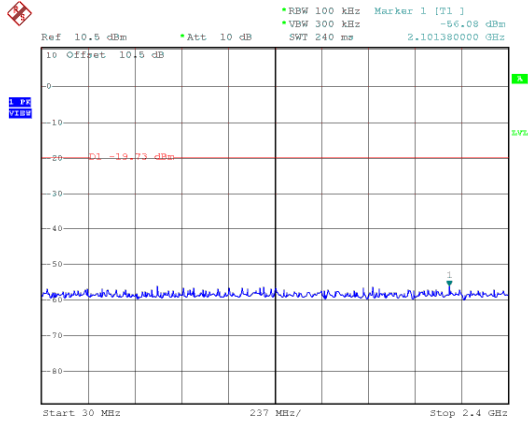





Modulation Type: GFSK
CH00

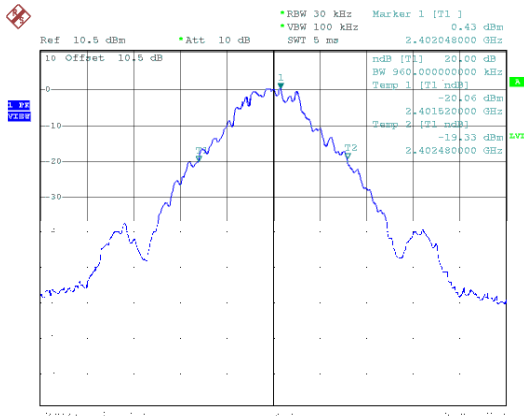


Modulation Type: $\pi/4$ -DQPSK
CH00

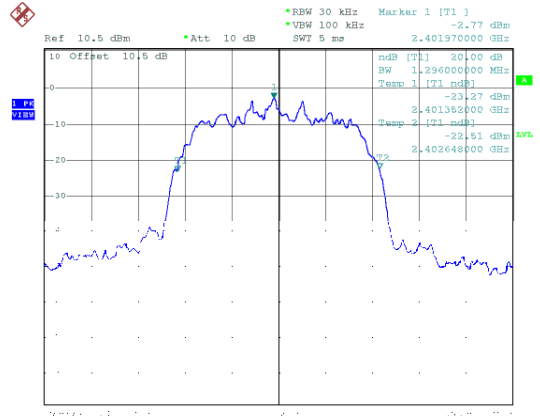


CH39

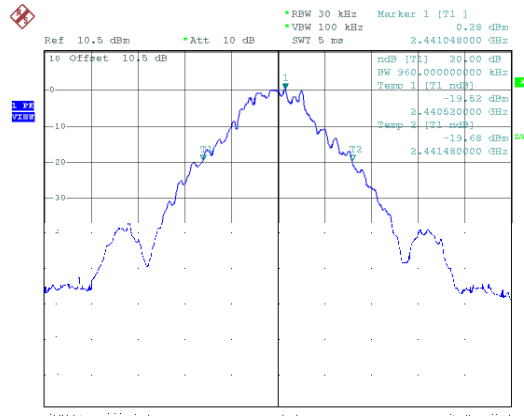


CH39

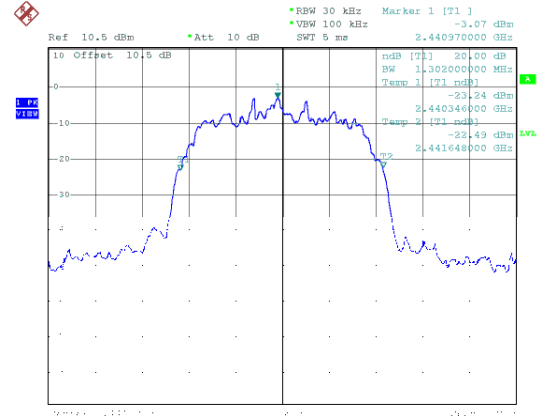

CH78

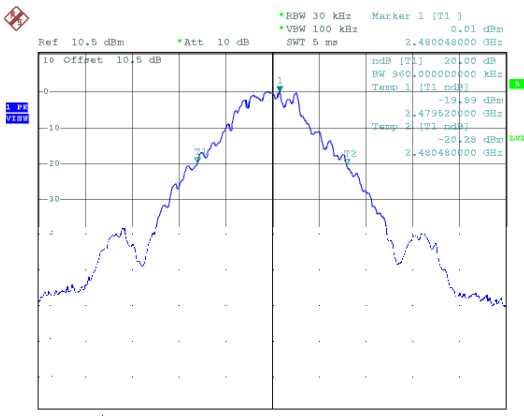


CH78

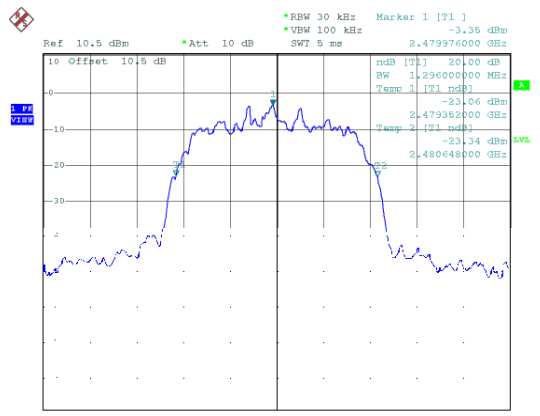





Modulation Type: 8DSPK
CH00

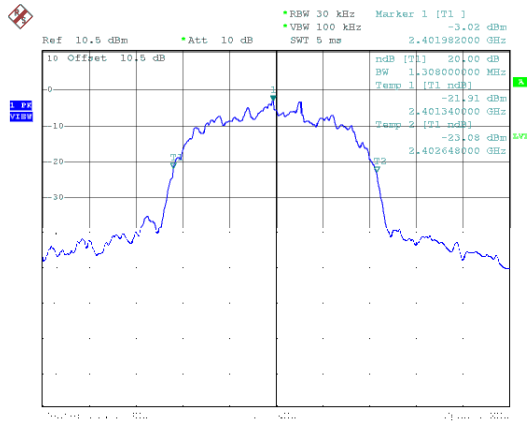

CH39

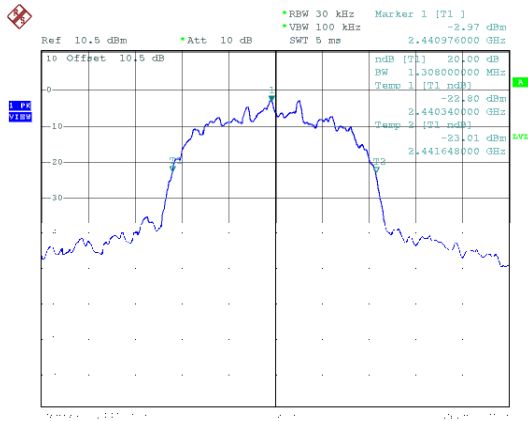

CH78

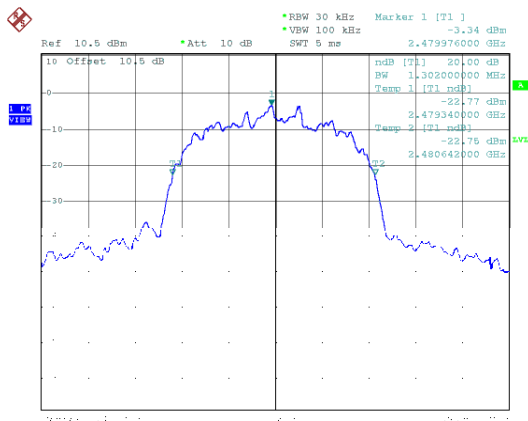



9. Frequencies Separation


9.1 Test Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

9.2 Test Procedures

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set RBW of spectrum analyzer to 30 KHz and VBW to 100 KHz.
- c. By using the MaxHold function record the separation of two adjacent channels.
- d. Measure the frequency difference of these two adjacent channels.

9.3 Test Setup Layout




9.4 Test Result and Data

Test Result : PASS Temperature : 21°C
 Test Date : Mar. 02, 2017 Humidity : 58%


Modulation Type	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)
GFSK	00	2402	1.00	0.64
	39	2441	1.01	0.64
	78	2480	1.00	0.64
$\pi/4$ -DQPSK	00	2402	1.00	0.864
	39	2441	1.00	0.868
	78	2480	1.00	0.864
8DPSK	00	2402	1.00	0.872
	39	2441	1.01	0.872
	78	2480	1.00	0.868




Modulation Type: GFSK
CH00

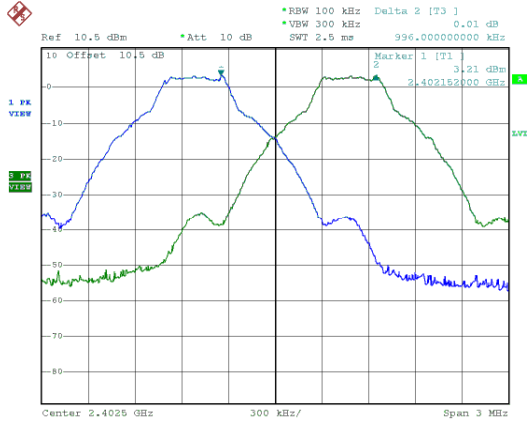


Modulation Type: $\pi/4$ -DQPSK
CH00

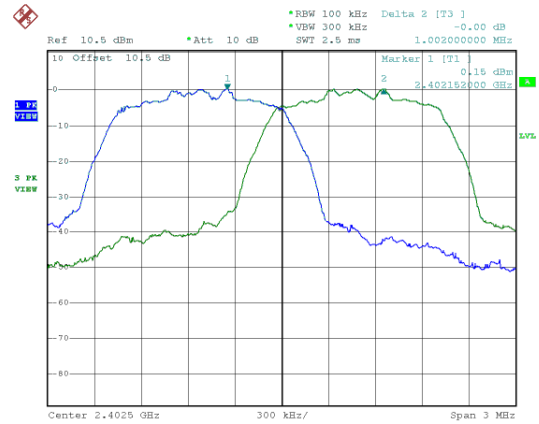


CH39

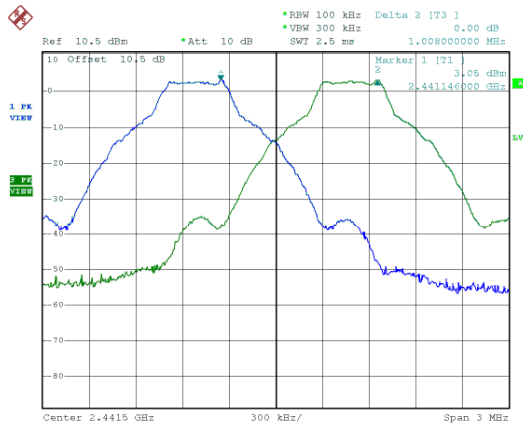


CH39

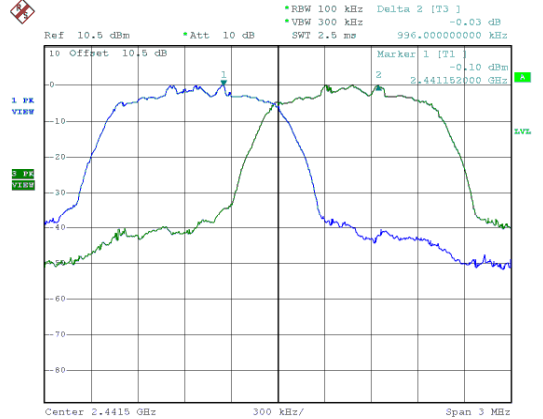

CH78

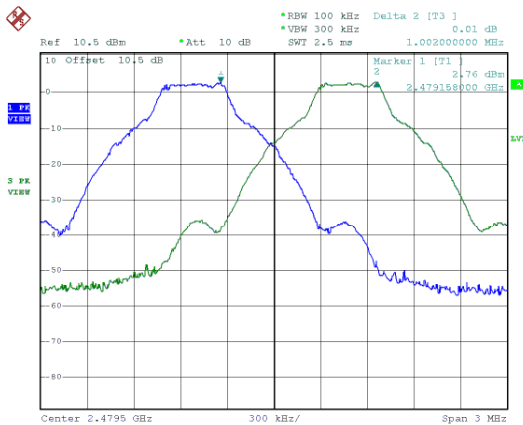


CH78

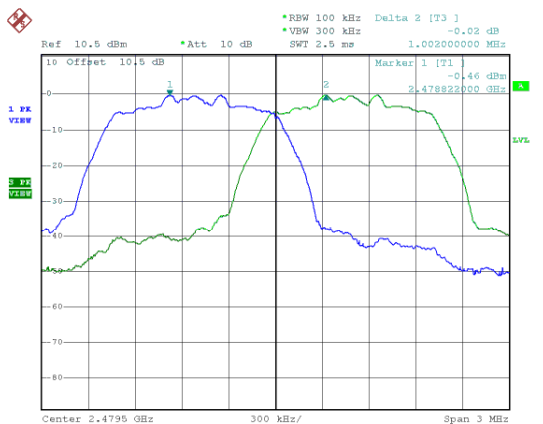





Modulation Type: 8DSPK
CH00

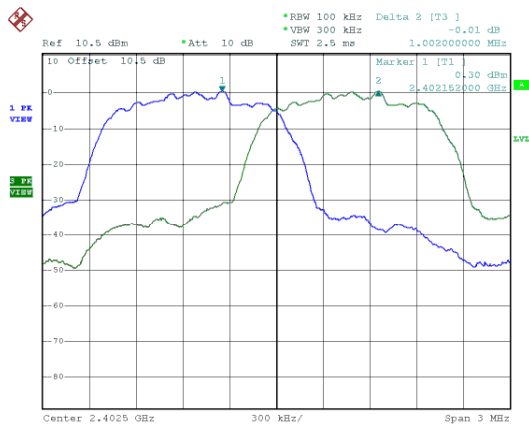

CH39

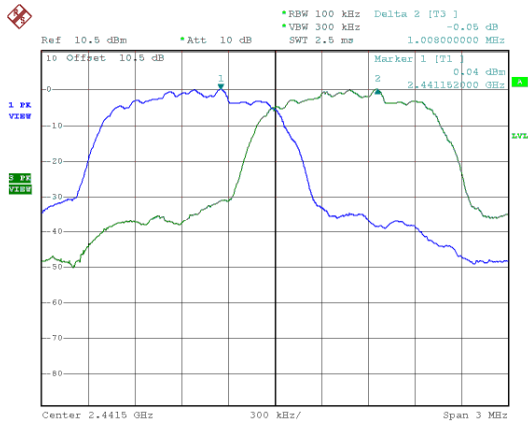

CH78

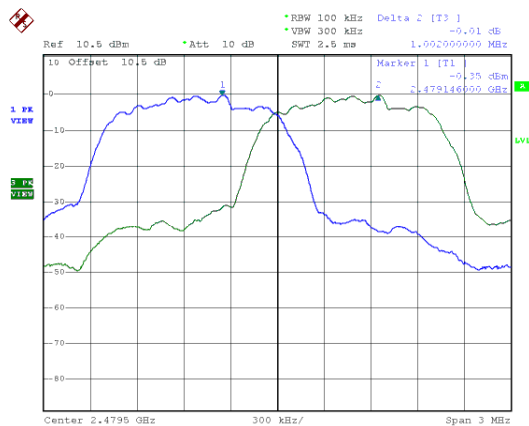



10. Dwell Time on each channel


10.1 Test Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

10.2 Test Procedures

1. The transmitter output was connected to the spectrum analyzer.
2. Adjust the center frequency to measure frequency, then set zero span mode.
2. Set RBW of spectrum analyzer to 1 MHz and VBW to 1 MHz.
4. Measure the time duration of one transmission on the measured frequency.

10.3 Test Setup Layout




10.4 Test Result and Data

Test Result : PASS Temperature : 21°C
 Test Date : Mar. 02, 2017 Humidity : 58%
 Test Period = 0.4 (second/ channel) x 79 Channel = 31.6 sec


Modulation Type	Frequency (MHz)	Length of transmission time (ms)	Number of transmission in a 31.6 (79 Hopping*0.4)	Dwell Time (ms)	Limit (ms)
GFSK (DH1)	2402	0.420	320.10	134.44	400
GFSK (DH3)	2402	1.680	159.90	268.63	400
GFSK (DH5)	2402	2.940	106.81	314.02	400
$\pi/4$ -DQPSK (DH1)	2402	0.420	320.10	134.44	400
$\pi/4$ -DQPSK (DH3)	2402	1.690	159.90	270.23	400
$\pi/4$ -DQPSK (DH5)	2402	2.940	106.81	314.02	400
8DPSK (DH1)	2402	0.420	320.10	134.44	400
8DPSK (DH3)	2402	1.690	159.90	270.23	400
8DPSK (DH5)	2402	2.940	106.81	314.02	400




Modulation Type: 8DSPK (DH1)

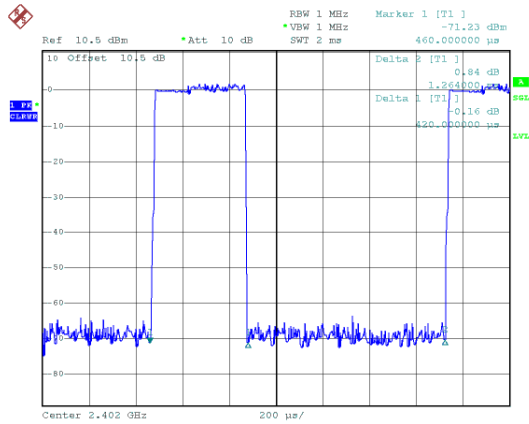

Modulation Type: 8DSPK (DH3)

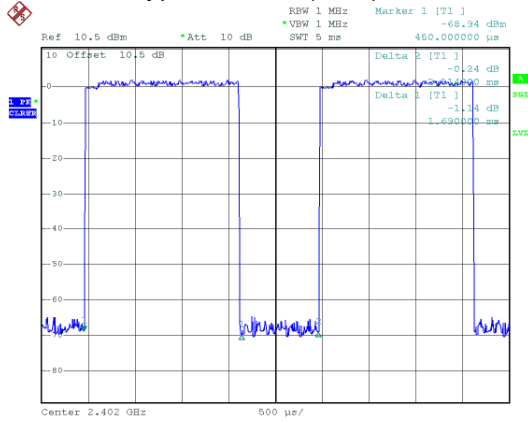

Modulation Type: 8DSPK (DH5)

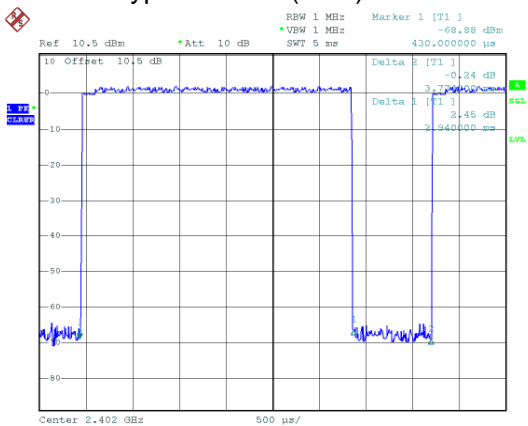



11. Number of Hopping Channels


11.1 Test Limit

Frequency hopping systems in the 2400 ~ 2483.5 MHz band shall use at least 15 channels.

11.2 Test Procedures

- a. The transmitter output was connected to the spectrum analyzer.
- b. 2. Set RBW of spectrum analyzer to 100 KHz and VBW to 100 KHz.
- c. 3. Set the MaxHold function, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been record.

11.3 Test Setup Layout




11.4 Test Result and Data

Test Result : PASS Temperature : 21°C
Test Date : Mar. 02, 2017 Humidity : 58%


Modulation Type	Hopping Channels
GFSK	79
$\pi/4$ -DQPSK	79
8DPSK	79




Modulation Type: GFSK

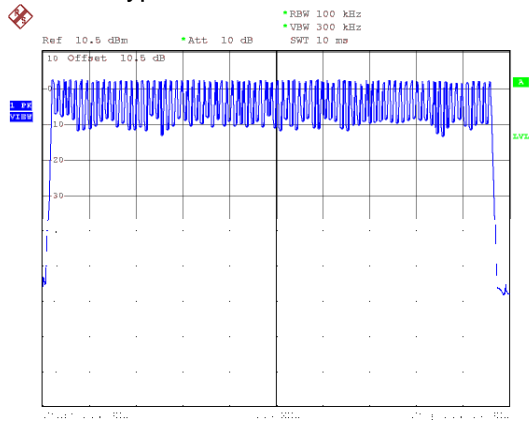

Modulation Type: $\pi/4$ -DQPSK

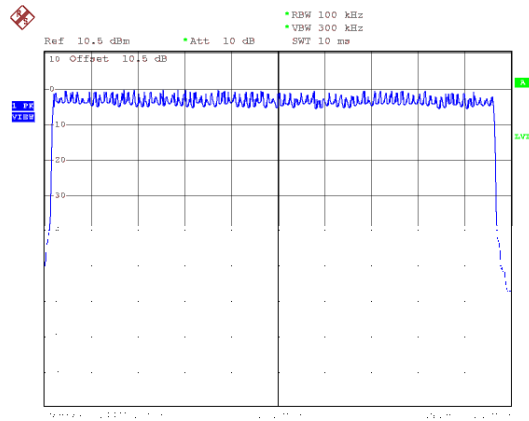

Modulation Type: 8DPSK

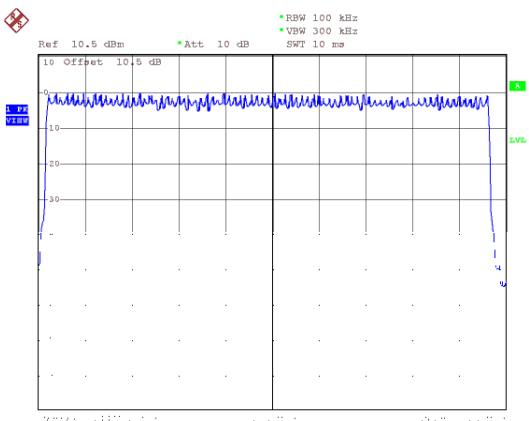



12. Maximum Peak Output Power


12.1 Test Limit

The Maximum Peak Output Power Measurement is 30dBm.

12.2 Test Procedures

The antenna port(RF output)of the EUT was connected to the input(RF input)of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

12.3 Test Setup Layout





12.4 Test Result and Data

Temperature : 21 °C Humidity : 58 %
Test Date : Mar. 02. 2017

Modulation Type	Channel	Frequency (MHz)	Peak Output Power (dBm)	Peak Output Power (mW)
GFSK	00	2402	4.23	2.649
	39	2441	4.18	2.618
	78	2480	3.94	2.477
$\pi/4$ -DQPSK	00	2402	7.18	5.224
	39	2441	7.33	5.408
	78	2480	6.43	4.395
8DPSK	00	2402	7.49	5.610
	39	2441	7.51	5.636
	78	2480	7.23	5.284

Modulation Type	Channel	Frequency (MHz)	Average Output Power (dBm)	Average Output Power (mW)
GFSK	00	2402	4.08	2.559
	39	2441	4.02	2.523
	78	2480	3.57	2.275
$\pi/4$ -DQPSK	00	2402	4.75	2.985
	39	2441	4.28	2.679
	78	2480	3.96	2.489
8DPSK	00	2402	4.87	3.069
	39	2441	4.66	2.924
	78	2480	3.99	2.506