




Prüfbericht-Nr.: <i>Test Report No.:</i>	50157076 001	Auftrags-Nr.: <i>Order No.:</i>	144187653	Seite 1 von 17 <i>Page 1 of 17</i>	
Kunden-Referenz-Nr.: <i>Client Reference No.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	19.06.2018		
Auftraggeber: <i>Client:</i>	Stadlbauer Marketing + Vertrieb GmbH Rennbahn Allee 1, 5412 Puch Salzburg, Austria				
Prüfgegenstand: <i>Test item:</i>	Short Range Device - Radio Control Toy Transmitter (2.4GHz)				
Bezeichnung / Typ-Nr.: <i>Identification / Type No.:</i>	370410380				
Auftrags-Inhalt: <i>Order content:</i>	FCC Test				
Prüfgrundlage: <i>Test specification:</i>	FCC Part 15 Subpart C RSS-210 Issue9 ANSI C63.10-2013				
Wareneingangsdatum: <i>Date of receipt:</i>	13.06.2018				
Prüfmuster-Nr.: <i>Test sample No.:</i>	A000758208-001				
Prüfzeitraum: <i>Testing period:</i>	25.06.2018 - 14.09.2018				
Ort der Prüfung: <i>Place of testing:</i>	TÜV Rheinland Hong Kong Ltd. Hong Kong Productivity Council				
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland Hong Kong Ltd.				
Prüfergebnis*: <i>Test result*:</i>	Pass				
geprüft von / tested by:	kontrolliert von / reviewed by:				
					
04.11.2018	Mika Chan / Project Manager	04.11.2018	Sharon Li / Unit Senior Manager		
Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>	Unterschrift <i>Signature</i>
Sonstiges / Other:	FCC ID: YFA370410380 IC: 12260A-370410380				
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>	Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>				
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	4 = ausreichend N/A = nicht anwendbar	5 = mangelhaft N/T = nicht getestet
Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory F(ail) = failed a.m. test specification(s)	4 = sufficient N/A = not applicable	5 = poor N/T = not tested
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>					

Table of Content

	Page
Cover Page	1
Table of Content	2
Product information	4
Manufacturers declarations	4
Product function and intended use.....	4
Submitted documents.....	4
Independent Operation Modes	4
Related Submittal(s) Grants	4
Remark	4
Test Set-up and Operation Mode	5
Principle of Configuration Selection	5
Test Operation and Test Software.....	5
Special Accessories and Auxiliary Equipment.....	5
Countermeasures to achieve EMC Compliance.....	5
Test Methodology	6
Radiated Emission	6
Field Strength Calculation.....	6
Test Setup Diagram	7
Test Facility	9
Test Laboratory Information	9
List of Test and Measurement Instruments	10
Measurement Uncertainty	11
Results FCC Part 15 – Subpart C / RSS-210 Issue 9	12
FCC 15.203 – Antenna Requirement 1.....	Pass..... 12
FCC 15.204 – Antenna Requirement 2.....	Pass..... 12
RSS-Gen 6.3 – External Control.....	Pass..... 12
RSS-Gen 8.3 – Antenna Requirement	Pass..... 12
Subclause 15.215 (c) – 20 dB Bandwidth.....	Pass..... 13
RSS-Gen 6.6 – Occupied Bandwidth.....	Pass..... 13
Subclause 15.249 (a) / RSS-210 B.10 (a) – Field Strength of Fundamental and Harmonics	Pass 14

Subclause 15.249 (d), 15.205 / RSS-210 B.10 (b) – Out Of Band Radiated Emission . Pass..... 16

Appendix 1 – Test protocols 5 pages

Appendix 2 – Test setup 2 pages

Appendix 3 – EUT External Photos 4 pages

Appendix 4 – EUT Internal Photos 4 pages

Appendix 5 – RF exposure information..... 2 pages

Product information

Manufacturers declarations

	Transmitter
Operating frequency range	2442 - 2458MHz
Type of modulation	GFSK
Number of channels	17
Type of antenna	Wire Antenna
Power level	fix
Connection to public utility power line	No
Nominal voltage	V _{nor} : 3.0 V

Product function and intended use

The equipment under test (EUT) is a radio control toy transmitter operating at 2.4GHz. It is powered by battery only.

FCC ID: YFA370410380/ IC: 12260A-370410380

Models	Product description
370410380	Short Range Device - Radio Control Toy Transmitter (2.4GHz)

Submitted documents

Circuit Diagram
Block Diagram
Technical Description
User manual
Label

Independent Operation Modes

The basic operation modes are:

- Transmitting mode.
- Normal operation mode

For further information refer to User Manual

Related Submittal(s) Grants

This is a single application for certification of the transmitter.

Remark

The test results in this test report are only relevant to the tested sample and does not involve any assessment in the production.

This report is issue for client reference only, not for certification.

Test Set-up and Operation Mode

Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

Test Operation and Test Software

Test operation should refer to test methodology.

- During test, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power was selected according to the instruction given by the manufacturer. The setting of the RF output power expected by the customer shall be fixed on the firmware of the final end product.

Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

- None

Countermeasures to achieve EMC Compliance

- None

Test Methodology

Radiated Emission

The radiated emission measurements of the transmitter part were performed according to the procedures in ANSI C63.10-2013.

For measurement below 1GHz - the equipment under test (EUT) was placed at the middle of the 80 cm height turntable. For measurement above 1GHz - the EUT was placed at the middle of the 1.5 m height turntable and RF absorbing material was placed on ground plane between turntable and measuring antenna. During the testing, the EUT was operated standalone and arranged for maximum emissions. The EUT was tested in three orthogonal planes.

The investigation is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Repeat the measurement steps until the maximum emissions were obtained.

All radiated tests were performed at an antenna to EUT with 3 meters distance, unless stated otherwise in particular parts of this test report.

Field Strength Calculation

The field strength at 3 m was established by adding the meter reading of the spectrum analyzer to the factors associated with antenna correction factor, cable loss, preamplifiers and filter attenuation.

The equation is expressed as follow:


$$FS = R + AF + CF + FA - PA$$

Where FS = Field Strength in dBuV/m at 3 meters.
R = Reading of Spectrum Analyzer in dBuV.
AF = Antenna Factor in dB.
CF = Cable Attenuation Factor in dB.
FA = Filter Attenuation Factor in dB.
PA = Preamplifier Factor in dB.

FA and PA are only be used for the measuring frequency above 1 GHz.

Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

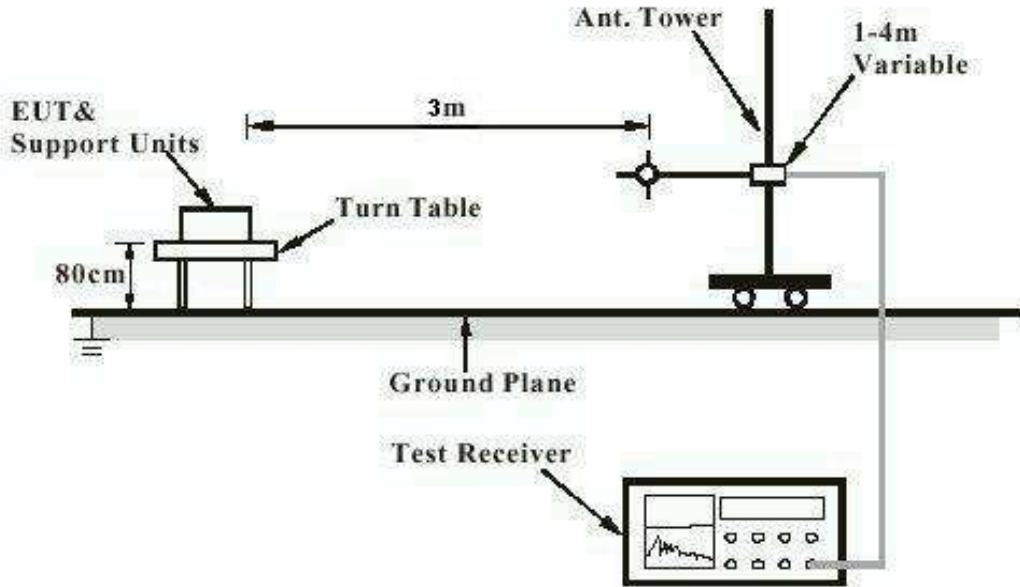

Note: Measurements above 1 GHz are done with a table height of 1.5m. In addition, there is RF absorbing material on the floor of the test site for above 1GHz measurement.

Diagram of Measurement Equipment Configuration for Mains Conduction Measurement (if applicable)


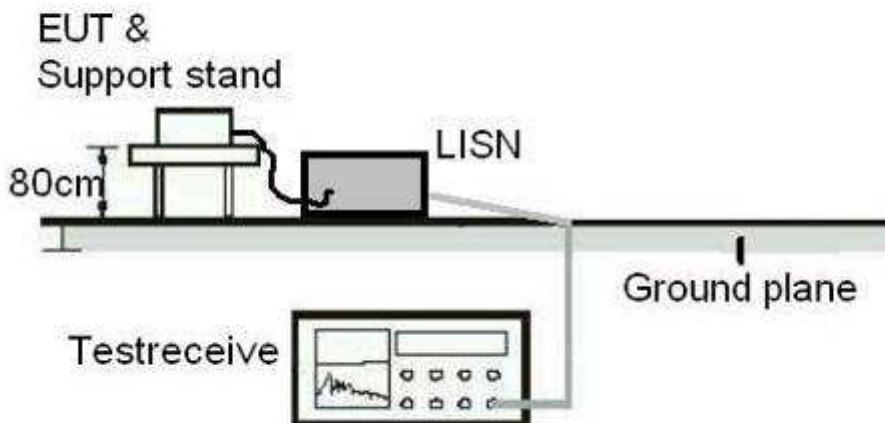


Diagram of Equipment Configuration for Antenna-port Conducted Measurement (if applicable)

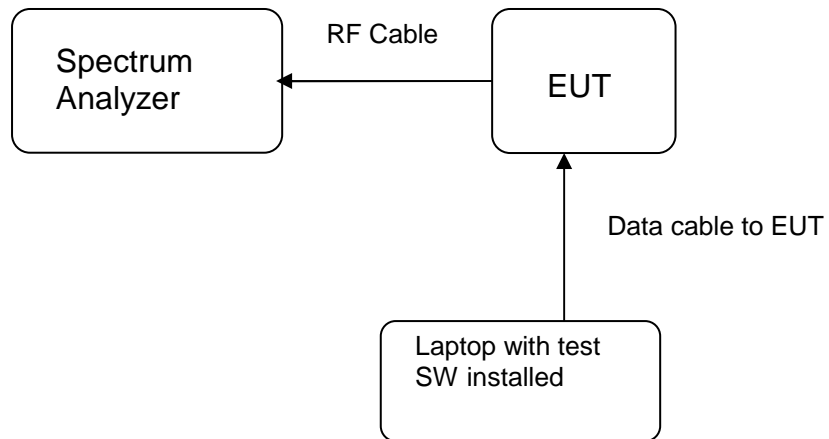

Test Facility

Test Laboratory Information

TÜV Rheinland Hong Kong Ltd.

Address: 3-4, 11/F., Fou Wah Industrial Building, 10-16 Pun Shan Street, Tsuen Wan, N.T., Hong Kong

Tel.: +852 2192 1000

Fax: +852 2192 1001

Email service-gc@tuv.com

Web: www.tuv.com

The test facility is recognized or accredited by the following organizations:

FCC

Type : Accredited Test Firm
Designation Number : HK0013
Test Firm Registration Number : 371735
Scope : Intentional Radiators

Industry Canada

The 10m Semi-anechoic chamber used by TÜV Rheinland Hong Kong Ltd at Hong Kong Productivity Council has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

Test Site Registration Number : 4780A-1

List of Test and Measurement Instruments

Radiated Emission

Equipment	Manufacturer	Type	Cal. Date	Due Date
Semi-anechoic Chamber	Frankonia	Nil	23-Apr-18	23-Apr-19
Test Receiver	R & S	ESU40	12-Jun-18	12-Jun-19
Bi-conical Antenna	R & S	HK116	21-Mar-18	21-Mar-20
Log Periodic Antenna	R & S	HL223	22-Mar-18	22-Mar-20
Cable with I-Joint Conector	Huber+Suhner	CNM-NMCMILX800-473	11-Dec-17	11-Dec-19
Active Loop Antenna	EMCO	6502	30-Oct-17	30-Oct-18
Semi-anechoic Chamber (SiteVSWR)	Frankonia	Nil	17-May-18	17-May-19
Double-Ridged Waveguide Horn	EMCO	3116	17-Jun-17	17-Jun-19
Double-Ridged Waveguide Horn	EMCO	3117	22-Jun-17	22-Jun-19
Cable with I-Joint Conector	Huber+Suhner	CNM-NMCMILX800-473	11-Dec-17	11-Dec-19
Microwave amplifier 0.5-26.5GHz, 25dB gain	HP	83017A	18-Jul-17	18-Jul-19
Preamplifier 18GHz to 40GHz with cable (EMC656)	A.H. Systems, Inc.	PAM-1840VH	29-Jan-18	29-Jan-19
High Pass Filter (cutoff freq. =1000MHz)	Trilithic	23042	30-Oct-17	30-Oct-19
High Frequency Cable	Pasternack	PE3VNA4001-3M	29-Jan-18	29-Jan-19
Horn Antenna	EMCO	3115	28-Mar-18	28-Mar-20

Radio Test

Equipment	Manufacturer	Type	Cal. Date	Due Date
Spectrum Analyzer	R & S	FSP30	03-May-18	02-May-19

Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions measurements is ± 4.81 dB (9kHz to 30MHz) and ± 4.62 dB (30MHz to 200MHz) and ± 5.67 dB (200MHz to 1000MHz) and is ± 5.07 dB (1GHz to 8.2GHz) and ± 4.58 dB (8.2GHz to 12.4GHz) and ± 4.78 dB (12.4GHz to 18GHz)

The estimated combined standard uncertainty for antenna conducted emission is ± 2.1 dB

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of $k=2$, which for the level of confidence is approximately 95%.

Results FCC Part 15 – Subpart C / RSS-210 Issue 9

FCC 15.203 – Antenna Requirement 1		Pass
FCC Requirement:	No antenna other than that furnished by the responsible party shall be used with the device	
Results:	a) Antenna type:	Fixed Integral antenna
	b) Manufacturer and model no:	N/A
	c) Peak Gain:	0dBi
Verdict:	Pass	
FCC 15.204 – Antenna Requirement 2		Pass
FCC Requirement:	An intentional radiator may be operated only with the antenna with which it is authorized. If an antenna is marketed with the intentional radiator, it shall be of a type which is authorized with the intentional radiator.	
Results:	Only one integral antenna can be used.	
Verdict:	N/A	
RSS-Gen 6.3 – External Control		Pass
IC Requirement:	The device shall not have any external controls accessible to the user that enable it to be adjusted, selected or programmed to operate in violation of the limits prescribed in the applicable RSS.	
Results:	The device does not have any transmitter external controls accessible to the user that can be adjusted and operated in violation of the limits of this standard.	
Verdict:	Pass	
RSS-Gen 8.3 – Antenna Requirement		Pass
IC Requirement:	When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device’s antenna shall be stated, based on measurement or on data from the antenna manufacturer.	
Results:	a) Antenna type:	Fixed Integral wire antenna
	b) Manufacturer	N/A
	c) model no	N/A
	d) Gain with reference to an isotropic radiator:	0 dBi
Verdict:	Pass	

Subclause 15.215 (c) – 20 dB Bandwidth				Pass
Test Specification : ANSI C63.10 – 2013 Test date : 02.07.2018 Mode of operation : Tx mode Port of testing : Temporary antenna port Supply voltage : 3VDC Temperature : 23°C Humidity : 50%				
Requirement: The intentional radiators must be designed to ensure that the 20dB bandwidth of the emission, is contained within the frequency band designated in the rule section under which the equipment is operated.				
Results: Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types. For test protocols refer to Appendix 1.				
Frequency (MHz)	20 dB left (MHz)	Limit (MHz)	20 dB right (MHz)	Limit (MHz)
2442	2438.640	> 2400	2446.200	< 2483.5
2451	2448.800	> 2400	2454.160	< 2483.5
2458	2456.040	> 2400	2460.440	< 2483.5

RSS-Gen 6.6 – Occupied Bandwidth				Pass
FCC/ IC Requirement : N/A				
Test Specification : RSS-Gen Test date : 03.07.2018 Mode of operation : Tx mode Port of testing : Temporary antenna port Supply voltage : 3VDC Temperature : 23°C Humidity : 50%				
Results: Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types. For test protocols refer to Appendix 1.				
Frequency (MHz)	Left (MHz)	Right (MHz)	99% bandwidth (MHz)	
2442	2439.000	2445.840	6.840	
2451	2448.320	2454.360	6.040	
2458	2456.000	2460.440	4.440	

Subclause 15.249 (a) / RSS-210 B.10 (a) – Field Strength of Fundamental and HarmonicsPass		
Test Specification : ANSI C63.10 – 2013		
Test date : 14.09.2018		
Mode of operation : Tx mode		
Port of testing : Enclosure		
Frequency range : 9kHz – 25GHz		
Supply voltage : 3VDC		
Temperature : 23°C		
Humidity : 50%		
Requirement: The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following limit.		
Results: PASS.		
Fundamental Frequency 2442MHz Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2441.967	88.2	114.0 / PK
2441.967	56.6	94.0 / AV
Fundamental Frequency 2442MHz Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2441.951	96.7	114.0 / PK
2441.951	67.7	94.0 / AV
Harmonics 2442MHz Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
4883.935	56.5	74.0 / PK
4883.935	41.6	54.0 / AV
Harmonics 2442MHz Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
4883.903	69.7	74.0 / PK
4883.903	52.8	54.0 / AV
7325.855	59.5	74.0 / PK
7325.855	45.4	54.0 / AV
Fundamental Frequency 2451MHz Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2450.983	87.7	114.0 / PK
2450.983	70.7	94.0 / AV
Fundamental Frequency 2451MHz Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2450.974	96.1	114.0 / PK
2450.974	79.0	94.0 / AV

Harmonics 2451MHz		Vertical Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
4901.951	57.8	74.0 / PK	
4901.951	42.7	54.0 / AV	
7353.032	60.0	74.0 / PK	
7353.032	45.7	54.0 / AV	
Harmonics 2451MHz		Horizontal Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
4901.948	69.3	74.0 / PK	
4901.948	52.5	54.0 / AV	
7352.923	60.3	74.0 / PK	
7352.923	45.3	54.0 / AV	
Fundamental Frequency 2458MHz		Vertical Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
2457.823	87.1	114.0 / PK	
2457.823	70.1	94.0 / AV	
Fundamental Frequency 2458MHz		Horizontal Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
2457.983	96.1	114.0 / PK	
2457.983	79.0	94.0 / AV	
Harmonics 2458MHz		Vertical Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
4916.160	59.4	74.0 / PK	
4916.160	43.4	54.0 / AV	
7374.000	58.2	74.0 / PK	
7374.000	45.4	54.0 / AV	
Harmonics 2458MHz		Horizontal Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
4916.000	69.7	74.0 / PK	
4916.000	52.7	54.0 / AV	
7373.919	60.6	74.0 / PK	
7373.919	45.7	54.0 / AV	

Subclause 15.249 (d), 15.205 / RSS-210 B.10 (b) – Out Of Band Radiated Emission		Pass
Test Specification : ANSI C63.10 – 2013 Test date : 14.09.2018 Mode of operation : Tx mode Port of testing : Enclosure Frequency range : 9kHz – 25GHz Supply voltage : 3VDC Temperature : 23°C Humidity : 50%		
Requirement: Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.		
Results: All three transmit frequency modes comply with the field strength limit of section 15.209. There is no spurious found below 30MHz.		
Tx frequency 2442MHz		Vertical Polarization
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2400.000	51.50	74.0 / PK
2400.000	32.20	54.0 / AV
Tx frequency 2442MHz		Horizontal Polarization
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2400.000	61.60	74.0 / PK
2400.000	32.30	54.0 / AV
Tx frequency 2451MHz		Vertical Polarization
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
No peak found	---	74.0 / PK
No peak found	---	54.0 / AV
Tx frequency 2451MHz		Horizontal Polarization
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
No peak found	---	74.0 / PK
No peak found	---	54.0 / AV

Tx frequency 2458MHz		Vertical Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
2483.500	45.40	74.0 / PK	
2483.500	32.40	54.0 / AV	
Tx frequency 2458MHz		Horizontal Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
2483.500	45.40	74.0 / PK	
2483.500	32.80	54.0 / AV	