


Prüfbericht-Nr.: <i>Test Report No.:</i>	60373711 001	Auftrags-Nr.: <i>Order No.:</i>	158208359	Seite 1 von 15 <i>Page 1 of 15</i>	
Kunden-Referenz-Nr.: <i>Client Reference No.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	28.04.2020		
Auftraggeber: <i>Client:</i>	Stadlbauer Marketing + Vertrieb G.m.b.H Rennbahn Allee 1, 5412 Puch Salzburg, Austria				
Prüfgegenstand: <i>Test item:</i>	Short Range Device - Toy Car Remote Control (2.4GHz)				
Bezeichnung / Typ-Nr.: <i>Identification / Type No.:</i>	370410508/410508; 370410509/410509				
Auftrags-Inhalt: <i>Order content:</i>	FCC and ISCED Certification				
Prüfgrundlage: <i>Test specification:</i>	FCC Part 15 Subpart C, ANSI C63.10-2013 RSS-210 Issue 10, RSS-Gen Issue 5				
Wareneingangsdatum: <i>Date of receipt:</i>	18.05.2020				
Prüfmuster-Nr.: <i>Test sample No.:</i>	A002829194-001				
Prüfzeitraum: <i>Testing period:</i>	03.06.2020 – 18.06.2020				
Ort der Prüfung: <i>Place of testing:</i>	Hong Kong				
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland Hong Kong Ltd.				
Prüfergebnis*: <i>Test result*:</i>	Pass				
geprüft von / tested by:		kontrolliert von / reviewed by:			
 26.06.2020 Benny Lau / Senior Project Manager		 26.06.2020 Sharon Li / Unit Senior Manager			
Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>	Unterschrift <i>Signature</i>
Sonstiges / Other:		FCC ID: YFA370410508 IC: 12260A-370410508			
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>			
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested					
<p>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</p> <p><i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i></p>					

Table of Content

	Page
Cover Page	1
Table of Content	2
Product information	4
Manufacturers declarations	4
Product function and intended use.....	4
Submitted documents.....	4
Independent Operation Modes	4
Related Submittal(s) Grants.....	4
Remark	4
Test Set-up and Operation Mode	5
Principle of Configuration Selection	5
Test Operation and Test Software.....	5
Special Accessories and Auxiliary Equipment	5
Countermeasures to achieve EMC Compliance	5
Test Methodology	6
Radiated Emission	6
Field Strength Calculation.....	6
Test Setup Diagram	7
Test Facility	8
Test Laboratory Information	8
List of Test and Measurement Instruments	9
Measurement Uncertainty	10
Results FCC Part 15 – Subpart C / RSS-210 Issue 10	11
FCC 15.203 – Antenna Requirement 1	Pass..... 11
FCC 15.204 – Antenna Requirement 2	Pass..... 11
RSS-Gen 6.3 – External Control.....	Pass..... 11
RSS-Gen 8.3 – Antenna Requirement	Pass..... 11
FCC 15.207/ RSS-Gen 8.8 – Conducted Emission on AC Mains	N/A..... 11
Subclause 15.215 (c) – 20 dB Bandwidth	Pass..... 12
RSS-Gen 6.6 – Occupied Bandwidth.....	Pass..... 12
Subclause 15.249(a)/RSS-210 B.10(a) – Field Strength of Fundamental and Harmonics	Pass..... 13

Subclause 15.249(d),15.205/RSS-210 B.10(b) – Out Of Band Radiated Emission..... Pass..... 15

Appendix 1 – Test protocols 5 pages

Appendix 2 – Test setup 2 pages

Appendix 3 – EUT External Photos 2 pages

Appendix 4 – EUT Internal Photos 3 pages

Appendix 5 – RF exposure information..... 2 pages

Product information

Manufacturers declarations

	Transmitter
Operating frequency range	2446 - 2474MHz
Type of modulation	GFSK
Number of channels	17
Type of antenna	Wire Antenna
Power level	fix
Connection to public utility power line	No
Nominal voltage	3.0 VDC

Product function and intended use

The equipment under test (EUT) is a radio control toy transmitter operating at 2.4GHz. It is powered by battery only.

The manufacturer declares that the models listed below are all identical in schematics, PCB layout, and electronic components used except model number.

FCC ID: YFA370410508/ IC: 12260A-370410508

Models	Product description
370410508/410508; 370410509/410509	Short Range Device - Toy Car Remote Control (2.4GHz)

Submitted documents

Circuit Diagram
 Block Diagram
 Technical Description
 User manual
 Label

Independent Operation Modes

The basic operation modes are:

- Transmitting mode.-

For further information refer to User Manual

Related Submittal(s) Grants

This is a single application for certification of the transmitter.

Remark

The test results in this test report are only relevant to the tested sample and does not involve any assessment in the production.

Test Set-up and Operation Mode

Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

Test Operation and Test Software

Test operation should refer to test methodology.

- Test mode samples with maximum RF output power and duty cycle and capable to transmit continuously at the lowest, middle and highest frequency channels is provided by the applicant for the testing.

Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

- None

Countermeasures to achieve EMC Compliance

- None

Test Methodology

Radiated Emission

The radiated emission measurements of the transmitter part were performed according to the procedures in ANSI C63.10-2013.

For measurement below 1GHz - the equipment under test (EUT) was placed at the middle of the 80 cm height turntable. For measurement above 1GHz - the EUT was placed at the middle of the 1.5 m height turntable and RF absorbing material was placed on ground plane between turntable and measuring antenna. During the testing, the EUT was operated standalone and arranged for maximum emissions. The EUT was tested in three orthogonal planes.

The investigation is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Repeat the measurement steps until the maximum emissions were obtained.

All radiated tests were performed at an antenna to EUT with 3 meters distance, unless stated otherwise in particular parts of this test report.

Field Strength Calculation

The field strength at 3 m was established by adding the meter reading of the spectrum analyzer to the factors associated with antenna correction factor, cable loss, preamplifiers and filter attenuation.

The equation is expressed as follow:


$$FS = R + AF + CF + FA - PA$$

Where FS = Field Strength in dBuV/m at 3 meters.
R = Reading of Spectrum Analyzer in dBuV.
AF = Antenna Factor in dB.
CF = Cable Attenuation Factor in dB.
FA = Filter Attenuation Factor in dB.
PA = Preamplifier Factor in dB.

FA and PA are only be used for the measuring frequency above 1 GHz.


Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

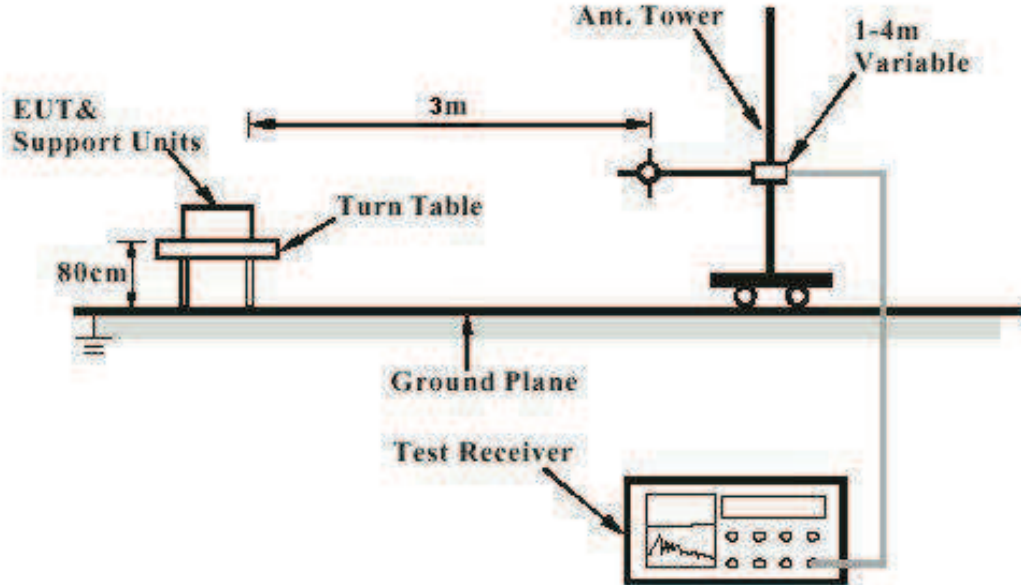

Note: Measurements above 1 GHz are done with a table height of 1.5m. In addition, there is RF absorbing material on the floor of the test site for above 1GHz measurement.

Diagram of Measurement Equipment Configuration for Mains Conduction Measurement (if applicable)

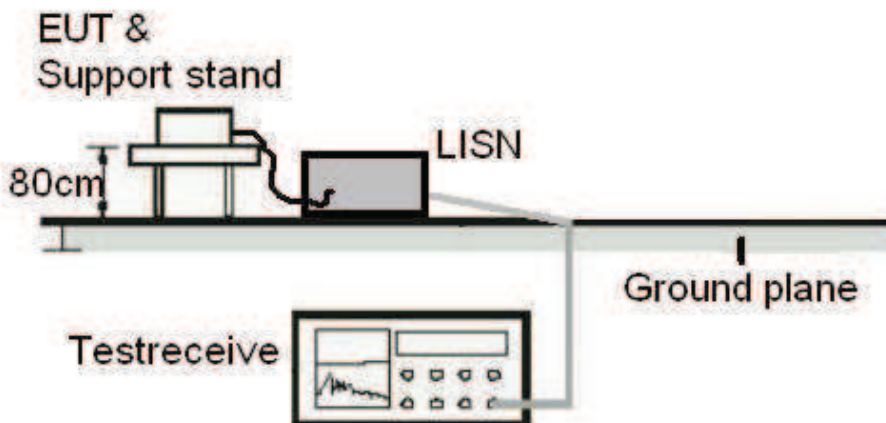

Test Facility

Test Laboratory Information

TÜV Rheinland Hong Kong Ltd.

Address: 3-4, 11/F., Fou Wah Industrial Building, 10-16 Pun Shan Street, Tsuen Wan, N.T., Hong Kong

Tel.: +852 2192 1000

Fax: +852 2192 1001

Email service-gc@tuv.com

Web: www.tuv.com

The test facility is recognized or accredited by the following organizations:

FCC

Type	: Accredited Test Firm
Designation Number	: HK0013
Test Firm Registration Number	: 371735
Scope	: Intentional Radiators

Industry Canada

Type	: Accredited Test Firm
CAB identifier	: HK0013
ISED number	: 26152
Scope	: RSS-Gen, RSS-210, RSS-247

List of Test and Measurement Instruments

Radiated Emission

Equipment	Manufacturer	Type	Cal. Date	Due Date
Semi-anechoic Chamber	Frankonia	Nil	20-Mar-20	20-Mar-21
Test Receiver	R & S	ESU26	21-Jun-19	21-Jun-20
Bi-conical Antenna	R & S	HK116	7-Mar-19	7-Mar-21
Log Periodic Antenna	R & S	HL223	6-Mar-19	6-Mar-21
Coaxial cable	Huber+Suhner	CNM-NMCMILX800-473	4-Oct-18	4-Oct-20
Standard Gain Horn	ETS-Lindgren	3160-07	4-Sep-18	4-Sep-20
Standard Gain Horn	ETS-Lindgren	3160-08	26-Sep-18	26-Sep-20
Standard Gain Horn	ETS-Lindgren	3160-10	3-Oct-18	3-Oct-20
Double-Ridged Waveguide Horn	EMCO	3116	5-Oct-18	5-Oct-20
Double-Ridged Waveguide Horn	EMCO	3117	30-Aug-18	30-Aug-20
Test Receiver	R & S	ESU26	21-Jun-19	21-Jun-20
Coaxial cable	Huber+Suhner	CNM-NMCMILX800-473	4-Oct-18	4-Oct-20
Microwave Preamplifier	COM-POWER Corporation	PAM-118A	25-Jun-19	25-Jun-20
Preamplifier 18GHz to 40GHz with cable	A.H. Systems, Inc.	PAM-1840VH	30-Jan-20	30-Jan-21
High Pass Filter	Trilithic	23042	30-Oct-19	30-Oct-21
High Frequency Cable	Pasternack	PE3VNA4001-3M	29-Jan-19	29-Jan-21

Radio Test

Equipment	Manufacturer	Type	Cal. Date	Due Date
Spectrum Analyzer	R & S	FSP30	26-Jun-2019	26-Jun-2020

Measurement Uncertainty

The estimated combined standard uncertainty for power-line conducted emissions measurements is ± 2.42 dB.

The estimated combined standard uncertainty for radiated emissions measurements is ± 4.81 dB (9kHz to 30MHz) and ± 4.62 dB (30MHz to 200MHz) and ± 5.67 dB (200MHz to 1000MHz) and is ± 5.07 dB (1GHz to 8.2GHz) and ± 4.58 dB (8.2GHz to 12.4GHz) and ± 4.78 dB (12.4GHz to 18GHz)

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of $k=2$, which for the level of confidence is approximately 95%.

Results FCC Part 15 – Subpart C / RSS-210 Issue 10

FCC 15.203 – Antenna Requirement 1	Pass								
<p>FCC Requirement: No antenna other than that furnished by the responsible party shall be used with the device</p> <p>Results:</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%;">a) Antenna type:</td> <td>Fixed Integral wire antenna</td> </tr> <tr> <td>b) Manufacturer and model no:</td> <td>N/A</td> </tr> <tr> <td>c) Peak Gain:</td> <td>0 dBi</td> </tr> </table> <p>Verdict: Pass</p>		a) Antenna type:	Fixed Integral wire antenna	b) Manufacturer and model no:	N/A	c) Peak Gain:	0 dBi		
a) Antenna type:	Fixed Integral wire antenna								
b) Manufacturer and model no:	N/A								
c) Peak Gain:	0 dBi								
FCC 15.204 – Antenna Requirement 2	Pass								
<p>FCC Requirement: An intentional radiator may be operated only with the antenna with which it is authorized. If an antenna is marketed with the intentional radiator, it shall be of a type which is authorized with the intentional radiator.</p> <p>Results: Only one integral antenna can be used.</p> <p>Verdict: N/A</p>									
RSS-Gen 6.3 – External Control	Pass								
<p>IC Requirement: The device shall not have any external controls accessible to the user that enable it to be adjusted, selected or programmed to operate in violation of the limits prescribed in the applicable RSS.</p> <p>Results: The device does not have any transmitter external controls accessible to the user that can be adjusted and operated in violation of the limits of this standard.</p> <p>Verdict: Pass</p>									
RSS-Gen 8.3 – Antenna Requirement	Pass								
<p>IC Requirement: When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer.</p> <p>Results:</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%;">a) Antenna type:</td> <td>Fixed Integral wire antenna</td> </tr> <tr> <td>b) Manufacturer</td> <td>N/A</td> </tr> <tr> <td>c) model no</td> <td>N/A</td> </tr> <tr> <td>d) Gain with reference to an isotropic radiator:</td> <td>0 dBi</td> </tr> </table> <p>Verdict: Pass</p>		a) Antenna type:	Fixed Integral wire antenna	b) Manufacturer	N/A	c) model no	N/A	d) Gain with reference to an isotropic radiator:	0 dBi
a) Antenna type:	Fixed Integral wire antenna								
b) Manufacturer	N/A								
c) model no	N/A								
d) Gain with reference to an isotropic radiator:	0 dBi								
FCC 15.207/ RSS-Gen 8.8 – Conducted Emission on AC Mains	N/A								
There is no AC power input or output ports on the EUT.									

Subclause 15.215 (c) – 20 dB Bandwidth				Pass
Test Specification : ANSI C63.10 – 2013 Test date : 18.06.2020 Mode of operation : Tx mode Port of testing : Antenna port Supply voltage : 3.0 VDC Temperature : 25°C Humidity : 55%				
Requirement: The intentional radiators must be designed to ensure that the 20dB bandwidth of the emission, is contained within the frequency band designated in the rule section under which the equipment is operated.				
Results: Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types. For test protocols refer to Appendix 1.				
Frequency (MHz)	20 dB left (MHz)	Limit (MHz)	20 dB right (MHz)	Limit (MHz)
2446	2445.330	> 2400	2446.170	< 2483.5
2458	2457.630	> 2400	2458.180	< 2483.5
2474	2473.380	> 2400	2474.460	< 2483.5

RSS-Gen 6.6 – Occupied Bandwidth				Pass
FCC/ IC Requirement : N/A				
Test Specification : RSS-Gen Test date : 18.06.2020 Mode of operation : Tx mode Port of testing : Antenna port Supply voltage : 3.0 VDC Temperature : 25°C Humidity : 55%				
Results: Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types. For test protocols refer to Appendix 1.				
Frequency (MHz)	Left (MHz)	Right (MHz)	99% bandwidth (MHz)	
2446	2445.020	2446.140	1.120	
2458	2457.470	2458.170	0.700	
2474	2473.410	2474.470	1.060	

Subclause 15.249(a)/RSS-210 B.10(a) – Field Strength of Fundamental and Harmonics Pass		
Test Specification : ANSI C63.10 – 2013 Test date : 08.06.2020 Mode of operation : Tx mode Port of testing : Enclosure Frequency range : 9kHz – 25GHz Supply voltage : 3.0 VDC Temperature : 23°C Humidity : 50%		
Requirement: The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following limit.		
Results: PASS.		
Fundamental Frequency 2446MHz Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2446.014	74.8	114.0 / PK
2446.014	62.1	94.0 / AV
Fundamental Frequency 2446MHz Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2446.028	82.9	114.0 / PK
2446.028	70.2	94.0 / AV
Harmonics 2446MHz Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
4892.000	52.1	74.0 / PK
4892.000	32.1	54.0 / AV
7338.048	48.2	74.0 / PK
7338.048	34.0	54.0 / AV
Harmonics 2446MHz Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
4892.032	53.2	74.0 / PK
4892.032	33.5	54.0 / AV
7338.048	50.4	74.0 / PK
7338.048	36.2	54.0 / AV
Fundamental Frequency 2458MHz Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2458.016	74.3	114.0 / PK
2458.016	61.6	94.0 / AV
Fundamental Frequency 2458MHz Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2458.019	83.3	114.0 / PK
2458.019	70.7	94.0 / AV

Harmonics 2458MHz		Vertical Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
4916.032	49.2	74.0 / PK	
4916.032	32.5	54.0 / AV	
7374.048	48.7	74.0 / PK	
7374.048	34.7	54.0 / AV	
Harmonics 2458MHz		Horizontal Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
4916.038	51.6	74.0 / PK	
4916.038	34.6	54.0 / AV	
7374.041	51.8	74.0 / PK	
7374.041	37.6	54.0 / AV	
Fundamental Frequency 2474MHz		Vertical Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
2474.006	74.6	114.0 / PK	
2474.006	61.9	94.0 / AV	
Fundamental Frequency 2474MHz		Horizontal Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
2474.012	83.4	114.0 / PK	
2474.012	70.7	94.0 / AV	
Harmonics 2474MHz		Vertical Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
4948.032	48.5	74.0 / PK	
4948.032	34.6	54.0 / AV	
7422.048	49.0	74.0 / PK	
7422.048	34.6	54.0 / AV	
Harmonics 2474MHz		Horizontal Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
4948.032	48.1	74.0 / PK	
4948.032	33.0	54.0 / AV	
7422.032	53.4	74.0 / PK	
7422.032	39.0	54.0 / AV	


Subclause 15.249(d),15.205/RSS-210 B.10(b) – Out Of Band Radiated Emission		Pass
Test Specification : ANSI C63.10 – 2013 Test date : 08.06.2020 Mode of operation : Tx mode Port of testing : Enclosure Frequency range : 9kHz – 25GHz Supply voltage : 3.0 VDC Temperature : 23°C Humidity : 50%		
Requirement: Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.		
Results: All three transmit frequency modes comply with the field strength limit of section 15.209. There is no spurious found below 30MHz.		
Tx frequency 2446MHz Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2400.000	34.8	74.0 / PK
2400.000	21.6	54.0 / AV
Tx frequency 2446MHz Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2400.000	36.8	74.0 / PK
2400.000	21.5	54.0 / AV
Tx frequency 2458MHz Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
No peak found	---	74.0 / PK
No peak found	---	54.0 / AV
Tx frequency 2458MHz Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
No peak found	---	74.0 / PK
No peak found	---	54.0 / AV
Tx frequency 2474MHz Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2483.500	40.8	74.0 / PK
2483.500	21.9	54.0 / AV
Tx frequency 2474MHz Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2483.500	47.8	74.0 / PK
2483.500	22.1	54.0 / AV

Appendix 1

Test Results


20dB Bandwidth

Tx frequency: 2446MHz

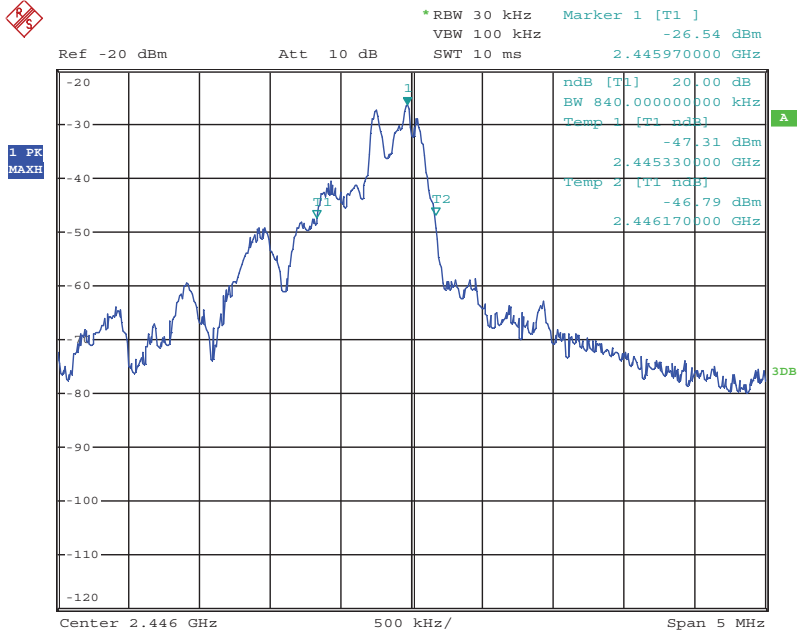


Date: 18.JUN.2020 01:05:11

Tx frequency: 2458MHz

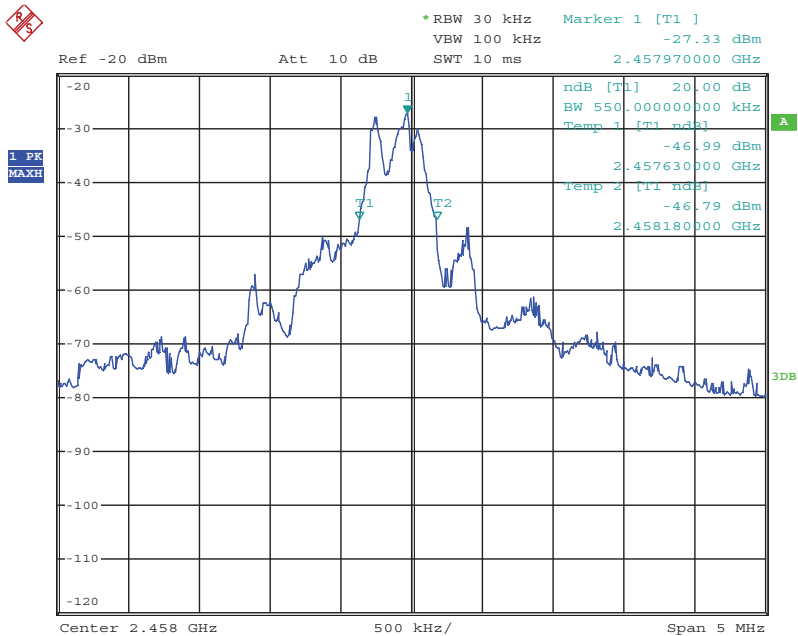

Date: 18.JUN.2020 01:05:59


Tx frequency: 2474MHz

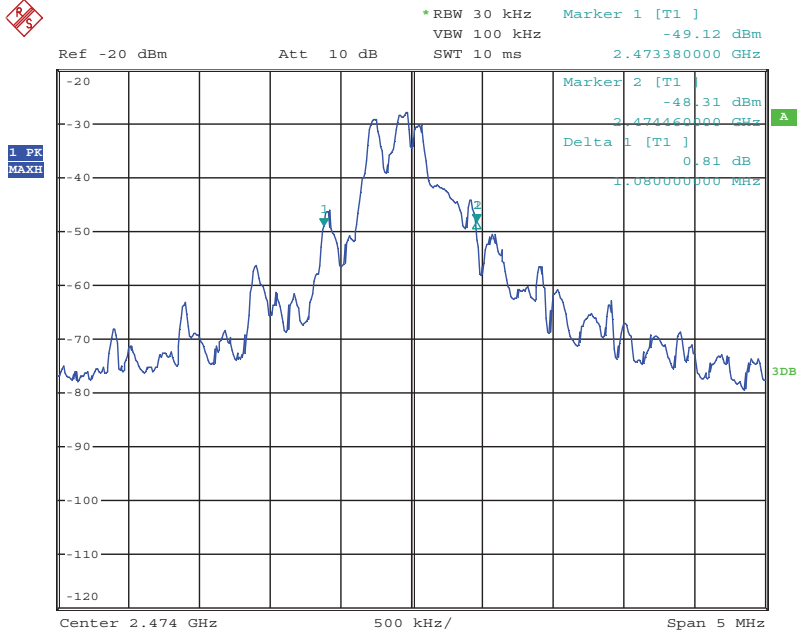

Date: 18.JUN.2020 01:10:48


99% Bandwidth

Tx frequency: 2446MHz

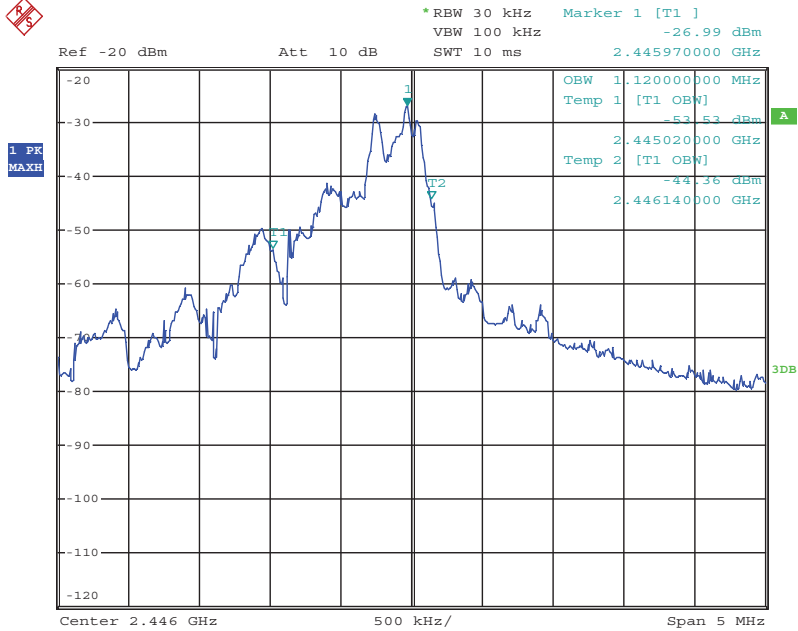


Date: 18.JUN.2020 01:03:45

Tx frequency: 2458MHz

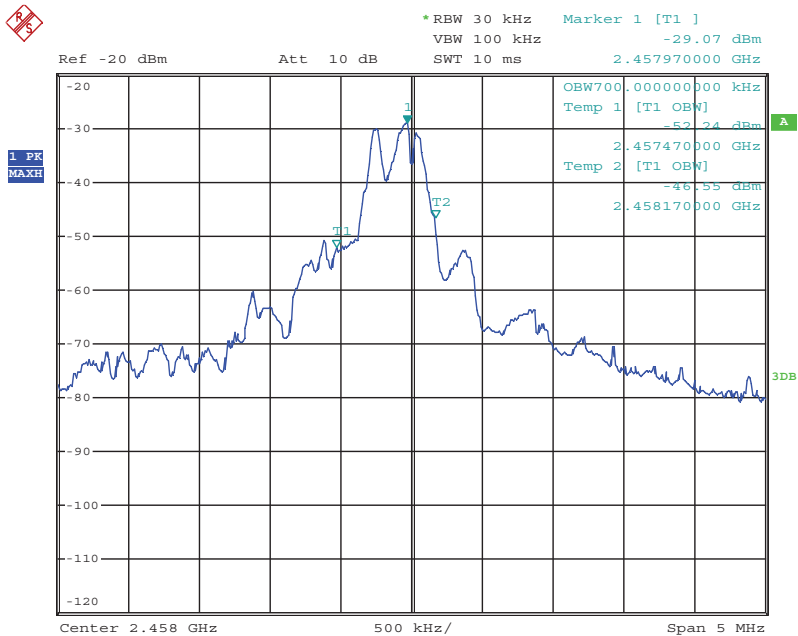

Date: 18.JUN.2020 01:07:27

Tx frequency: 2474MHz

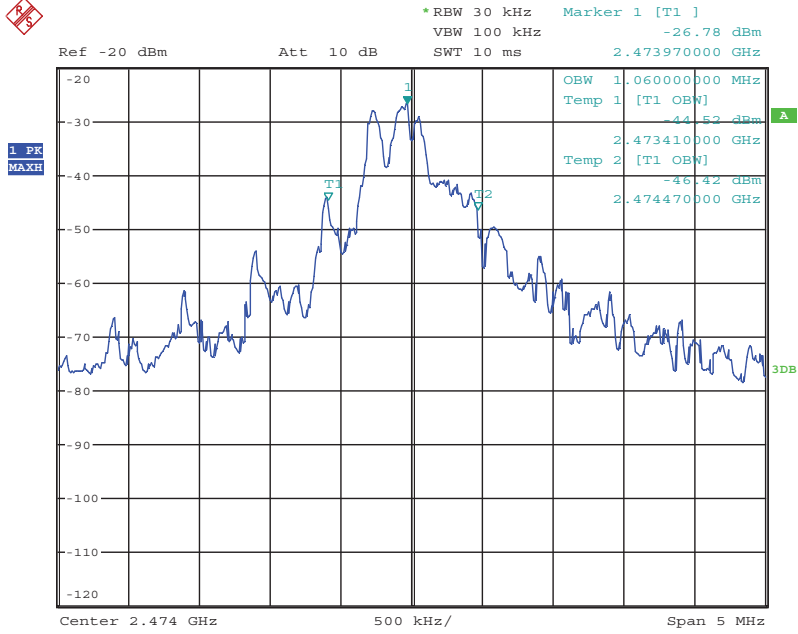

Date: 18.JUN.2020 01:08:58