



EMI - TEST REPORT

- FCC Part 15.225, RSS 210-

Type / Model Name : DIS-1024

Product Description : Displayunit with integrated RFID reader

Applicant : Riedel Communications GmbH & Co. KG

Address : Uellendahler Strasse 353

42109 Wuppertal

GERMANY

Manufacturer : Riedel Communications GmbH & Co. KG

Address : Uellendahler Strasse 353

42109 Wuppertal

GERMANY

Test Result according to the standards listed in clause 1 test standards:	POSITIVE
--	-----------------

Test Report No. : T46575-00-01JP	13. January 2021 <hr style="border: 0; border-top: 1px solid black;"/> Date of issue
--	---



Deutsche
 Akkreditierungsstelle
 D-PL-12030-01-01
 D-PL-12030-01-02

Contents

1	<u>TEST STANDARDS</u>	3
2	<u>EQUIPMENT UNDER TEST</u>	4
2.1	Information provided by the Client	4
2.2	Sampling	4
2.3	Photo documentation of the EUT	4
2.4	Short description of the equipment under test (EUT)	4
2.5	Power supply system utilised	4
3	<u>SUMMARY</u>	5
3.1	TEST RESULTS	5
3.2	FINAL ASSESSMENT	5
4	<u>TEST ENVIRONMENT</u>	6
4.1	Address of the test laboratory	6
4.2	Environmental conditions	6
4.3	Statement of the measurement uncertainty	6
4.4	Conformity Decision Rule	7
4.5	Measurement Protocol for FCC	7
5	<u>TEST CONDITIONS AND RESULTS</u>	9
5.1	Conducted emissions	9
5.2	Field strength of the fundamental wave	12
5.3	Spurious emissions	13
5.4	Frequency tolerance	15
5.5	Bandwidth	16
5.6	Transmitter spectrum mask	18
6	<u>USED TEST EQUIPMENT AND ACCESSORIES</u>	20

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

1 TEST STANDARDS

The tests were performed according to following standards:

FCC Rules and Regulations Part 15, Subpart A - General (October, 2020)

FCC Rules and Regulations Part 15, Subpart C - Intentional Radiators (October, 2020)

Part 15, Subpart C, Section 15.207

Part 15, Subpart C, Section 15.209

Part 15, Subpart C, Section 15.225

Conducted limits

Radiated emission limits, general requirements

Operation within the band 13.110 - 14.010 MHz

RSS-Gen Issue 5, March 2019

General Requirements and Information for the Certification of Radiocommunication Equipment

RSS-210 Issue 10, December 2019

Low Power Licence – Exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment

ANSI C63.10: 2013

Testing Unlicensed Wireless Devices

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

2 EQUIPMENT UNDER TEST

2.1 Information provided by the Client

Please note, we do not take any responsibility for information provided by the client or his representative which may have an influence on the validity of the test results.

2.2 Sampling

The customer is responsible for the choice of sample. Sample configuration, start-up and operation is carried out by the customer or according to his/her instructions.

2.3 Photo documentation of the EUT

See attachment B to this report for external pictures of the EUT and attachment C to this report for internal pictures of the EUT.

2.4 Short description of the equipment under test (EUT)

The EUT is a Display unit for the Artist-1024 System. The DIS-1024 includes a RFID reader for user authorisation.

Number of tested samples: 1
Serial number: none

EUT operation mode:

The equipment under test was operated during the measurement under the following conditions:

- continuous TAG reading mode (13.56MHz)

EUT configuration:

The following peripheral devices and interface cables were connected during the measurements:

- Power supply* _____ Model : 12V Battery _____
- TAG _____ Model : Unknown, supplied by client _____

*if other power supply was used this is stated under the specific test clause

2.5 Power supply system utilised

Power supply voltage : 12V DC

3 SUMMARY

3.1 TEST RESULTS

FCC Rule Part	RSS Rule Part	Description	Result
15.207	RSS Gen, 8.8	AC power line conducted emissions	passed
15.225	RSS-210, B.6	Field strength of fundamental	passed
15.209	RSS Gen, 8.9	Spurious emissions	passed
15.225	RSS-210, B.6	Frequency tolerance	passed
15.215	RSS-Gen, 6.7	Occupied bandwidth	passed
15.225	RSS-210, B.6	Transmitter spectrum mask	passed

3.2 FINAL ASSESSMENT

The equipment under test fulfills the EMI requirements cited in clause 1 test standards.

Date of receipt of test sample : acc. to storage records

Testing commenced on : 22 September 2020

Testing concluded on : 28 September 2020

Checked by:

Tested by:

Klaus Gegenfurtner
Teamleader Radio

Jürgen Pessinger
Radio Team

4 TEST ENVIRONMENT

4.1 Address of the test laboratory

**CSA Group Bayern GmbH
Ohmstrasse 1-4
94342 STRASSKIRCHEN
GERMANY**

4.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 86-106 kPa

4.3 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. It is noted that the expanded measurement uncertainty corresponds to the measurement results from the standard measurement uncertainty multiplied by the coverage factor $k = 2$. The true value is located in the corresponding interval with a probability of 95 % The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16-4-2 / 2011 + A1 / 2014 „Uncertainties, statistics and limit modelling – Uncertainty in EMC measurements“ and is documented in the quality system acc. to DIN EN ISO/IEC 17025. For all measurements shown in this report, the measurement uncertainty of the test laboratory, CSA Group Bayern GmbH, is below the measurement uncertainty as defined by CISPR. Therefore, no special measures must be taken into consideration with regard to the limits according to CISPR. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
AC Conducted Spurious Emissions	0.15 MHz to 30 MHz	95%	± 3.29 dB
20 dB Bandwidth	Center frequency of EuT	95%	$\pm 2.5 \times 10^{-7}$
99% Occupied Bandwidth	Center frequency of EuT	95%	$\pm 2.5 \times 10^{-7}$
Radiated Spurious Emissions	9 kHz to 30 MHz	95%	± 3.53 dB
Radiated Spurious Emissions	30 MHz to 1000 MHz	95%	± 3.71 dB
Radiated Spurious Emissions	1000 MHz to 10000 MHz	95%	± 2.34 dB
Peak conducted output power	902 MHz to 928 MHz	95%	± 0.35 dB
Conducted Spurious Emissions	9 kHz to 10000 MHz	95%	± 2.15 dB

4.4 Conformity Decision Rule

The conformity decision rule is based on the ILAC G8 published at the time of reporting.

4.5 Measurement Protocol for FCC

4.5.1 GENERAL INFORMATION

CSA Group Bayern GmbH is recognized as wireless testing laboratory under the CAB identifier:

FCC: DE 0011
ISED: DE0009

4.5.2 General Standard information

The test methods used comply with ANSI C63.10 - "Testing Unlicensed Wireless Devices".


4.5.2.1 Justification

The equipment under test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions.

4.5.3 Details of test procedures

4.5.3.1 Conducted emission

Test setup according ANSI C63.10

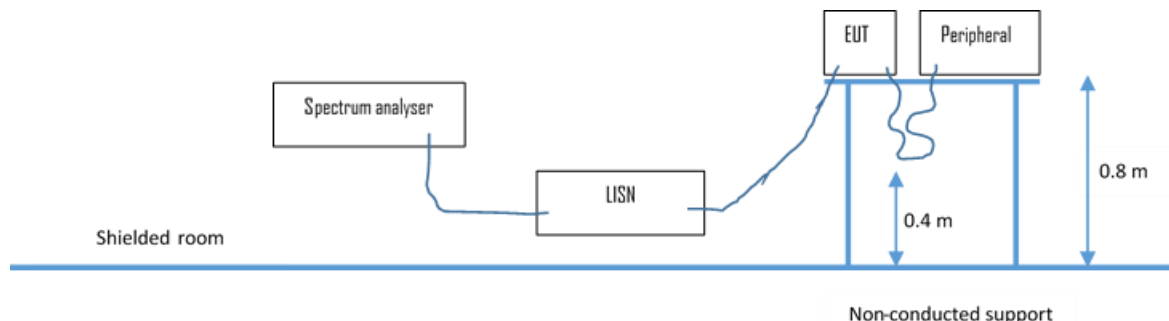

The final level, expressed in dB μ V, is arrived at by taking the reading directly from the Spectrum analyser. This level is compared to the limit.

To convert between dB μ V and μ V, the following conversions apply:

$$\text{dB}\mu\text{V} = 20(\log \mu\text{V})$$


$$\mu\text{V} = \text{Inverse log}(\text{dB}\mu\text{V}/20)$$

Conducted emissions on the 50 Hz and/or 60 Hz power interface of the EUT are measured in the frequency range of 150 kHz to 30 MHz. The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasi-peak detection and a Line Impedance Stabilization Network (LISN) with 50 Ω / 50 μ H (CISPR 16) characteristics. The receiver is protected by means of an impedance matched pulse limiter connected directly to the RF input. Table top equipment is placed on a non-conducting table 80 centimetres above the floor and is positioned 40 centimetres from the vertical ground plane (wall) of the screen room. If the minimum limit margin appears to be less than 20 dB with a peak mode measurement, the emission is re-measured using a tuned receiver with quasi-peak and average detection and recorded on the data sheets.

4.5.3.2 Radiated emission

4.5.3.2.1 OATS1 test site (9 kHz - 30 MHz):


Test setup according ANSI C63.10

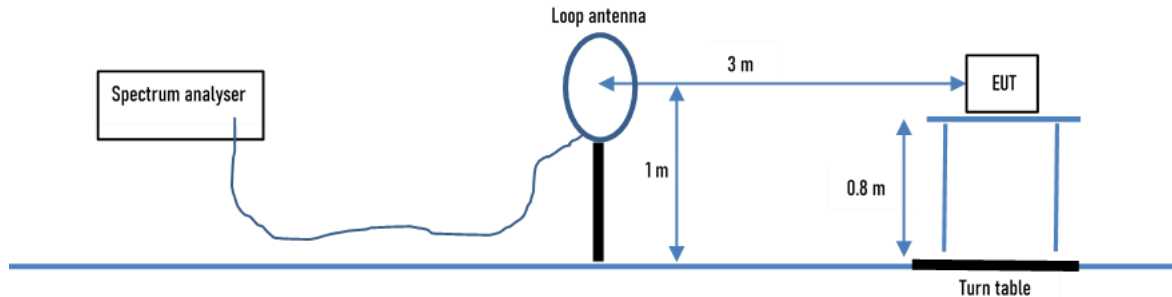

Emissions from the EUT are measured in the frequency range of 9 MHz to 30 MHz using a tuned receiver and a calibrated loop antenna. Table top equipment is placed on a 1.0 X 1.5 m non-conducting table 80 centimetres above the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screened room located outside the test area. The antenna is positioned 3, 10 or 30 metres horizontally from the EUT and is repeated vertically. To locate maximum emissions from the test sample the antenna is varied along the site axis and the EUT is rotated 360 degrees.

4.5.3.2.2 OATS1 test site (30 MHz - 1 GHz):

Test setup according ANSI C63.10.

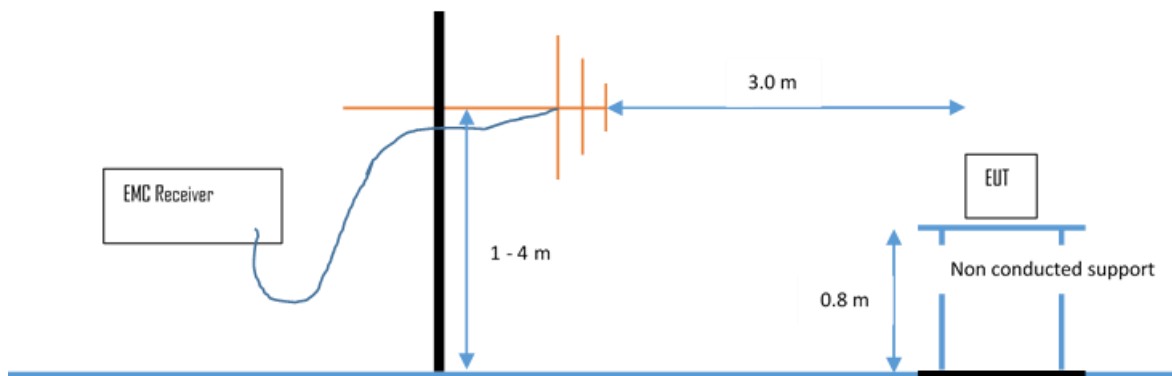

Spurious emissions from the EUT are measured in the frequency range of 30 MHz to 1000 MHz using a tuned receiver and appropriate broadband linearly polarised antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection. Table top equipment is placed on a 1.0 X 1.5 m non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screened room located outside the test area. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 metres and the EUT is rotated 360 degrees. The final level in dB μ V/m is calculated by taking the reading from the EMI receiver (Level dB μ V) and adding the correction factors and cable loss factor (dB). The FCC limit is subtracted from this result in order to provide the limit margin listed in the measurement protocol.

The resolution bandwidth setting:

30 MHz – 1000 MHz: RBW: 120 kHz

Example:

Frequency (MHz)	Level (dB μ V)	+	Factor (dB)	=	Level (dB μ V/m)	-	Limit (dB μ V/m)	=	Delta (dB)
719.0	75.0	+	32.6	=	107.6	-	110.0	=	-2.4

5 TEST CONDITIONS AND RESULTS

5.1 Conducted emissions

For test instruments and accessories used, see section 6 Part A 4.

5.1.1 Description of the test location

Test location: Shielded Room S2

5.1.2 Photo documentation of the test set-up

See attachment A to this report

5.1.3 Applicable standard

FCC Part 15, Section 15.207 and RSS-Gen clause 8.8

5.1.4 Test result

Frequency range: 0.15 MHz - 30 MHz

Min. limit margin 14.37 dB at 13.56 MHz

Limit according to FCC Part 15, Section 15.207 and RSS-Gen clause 8.8

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency

The requirements are **FULFILLED**.


Remarks: For detailed test result please refer to following test protocols
The test was performed on AC input (120V/60Hz) of power supply EA-PS 3032-10B with
CSA ID 01-05/50-11-010.

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

5.1.5 Test protocol

Test point: L1
 Operation mode: continuous TAG reading mode (13.56MHz)
 Remarks: none

Result: Passed

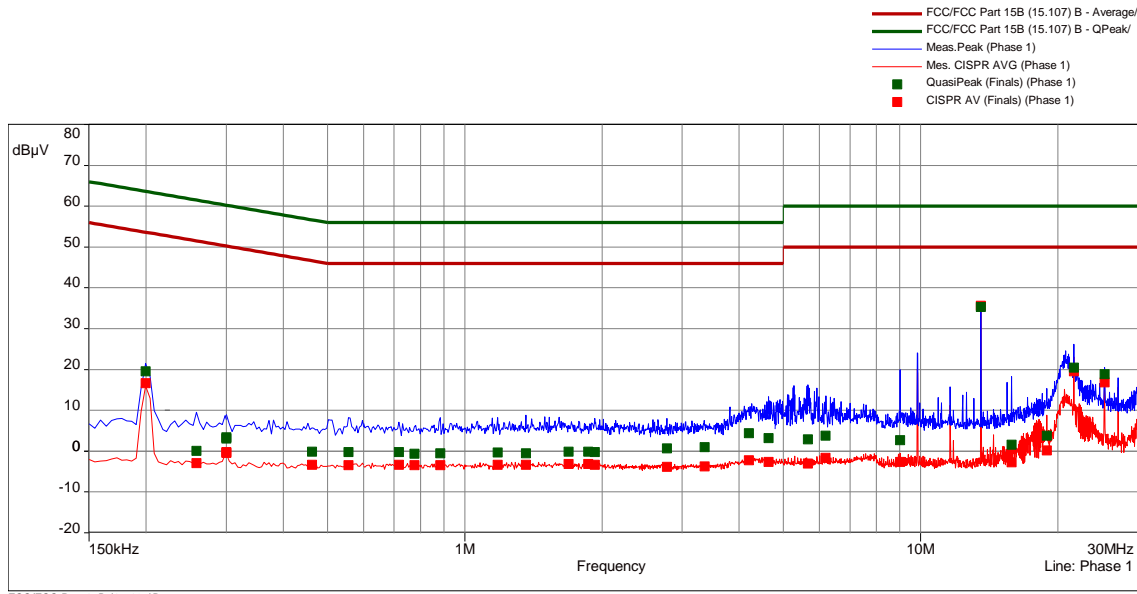


FCC/FCC Part 15B (15.107)B

freq MHz	QP dB(µV)	margin dB	limit dB	AV dB(µV)	margin dB	limit dB	line	corr dB
0.1995	19.55	-44.08	63.63	16.70	-36.93	53.63	Phase 1	10.11
0.258	0.08	-61.42	61.50	-2.91	-54.41	51.50	Phase 1	10.12
0.3	3.39	-56.85	60.24	-0.21	-50.45	50.24	Phase 1	10.14
0.3	3.13	-57.11	60.24	-0.44	-50.68	50.24	Phase 1	10.14
0.462	-0.11	-56.77	56.66	-3.29	-49.95	46.66	Phase 1	10.16
0.5565	-0.26	-56.26	56.00	-3.38	-49.38	46.00	Phase 1	10.16
0.717	-0.23	-56.23	56.00	-3.36	-49.36	46.00	Phase 1	10.19
0.7755	-0.63	-56.63	56.00	-3.46	-49.46	46.00	Phase 1	10.19
0.8835	-0.46	-56.46	56.00	-3.45	-49.45	46.00	Phase 1	10.20
1.1805	-0.27	-56.27	56.00	-3.31	-49.31	46.00	Phase 1	10.23
1.362	-0.49	-56.49	56.00	-3.37	-49.37	46.00	Phase 1	10.25
1.6905	-0.07	-56.07	56.00	-3.15	-49.15	46.00	Phase 1	10.27
1.866	-0.08	-56.08	56.00	-3.17	-49.17	46.00	Phase 1	10.27
1.929	-0.23	-56.23	56.00	-3.32	-49.32	46.00	Phase 1	10.27
2.7735	0.70	-55.30	56.00	-3.80	-49.80	46.00	Phase 1	10.34
3.3585	1.02	-54.98	56.00	-3.74	-49.74	46.00	Phase 1	10.35
4.2045	4.43	-51.57	56.00	-2.23	-48.23	46.00	Phase 1	10.41
4.641	3.24	-52.76	56.00	-2.66	-48.66	46.00	Phase 1	10.43
5.655	2.95	-57.05	60.00	-3.05	-53.05	50.00	Phase 1	10.50
6.1815	3.76	-56.24	60.00	-1.63	-51.63	50.00	Phase 1	10.54
9.012	2.68	-57.32	60.00	-2.59	-52.59	50.00	Phase 1	10.70
13.56	35.28	-24.72	60.00	35.63	-14.37	50.00	Phase 1	11.07
15.837	1.59	-58.41	60.00	-2.67	-52.67	50.00	Phase 1	11.24
18.915	3.76	-56.24	60.00	0.14	-49.86	50.00	Phase 1	11.41
21.6795	20.51	-39.49	60.00	19.60	-30.40	50.00	Phase 1	11.54
25.293	18.89	-41.11	60.00	16.89	-33.11	50.00	Phase 1	11.68

Test point N
 Operation mode: continuous TAG reading mode (13.56MHz)
 Remarks: none

Result: Passed

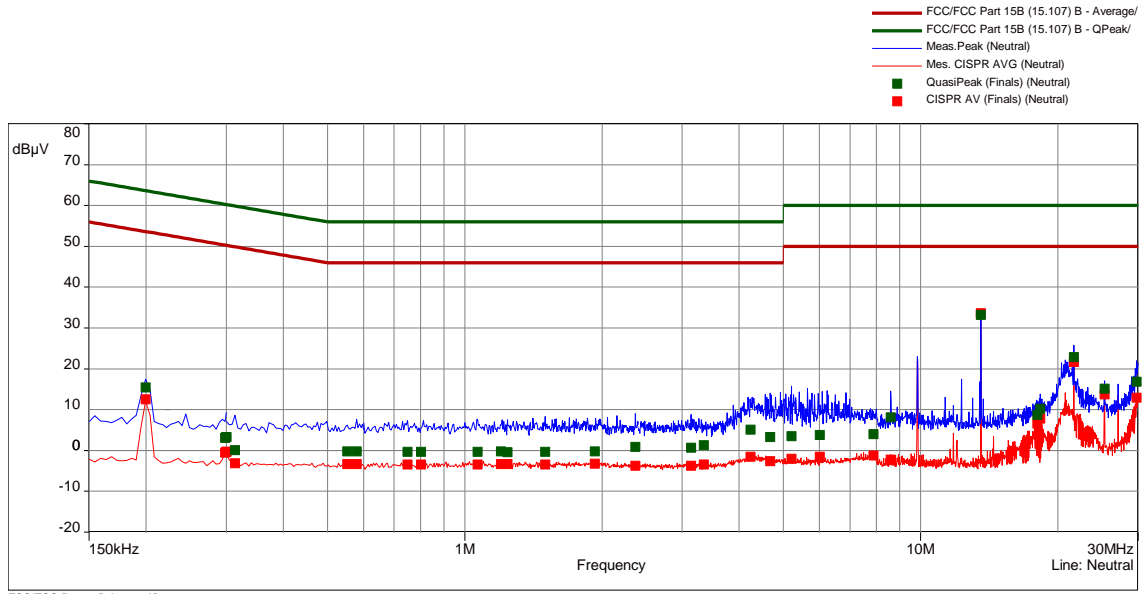

FCC/CC Part 15B (15.107)B

freq MHz	QP dB(µV)	margin dB	limit dB	AV dB(µV)	margin dB	limit dB	line	corr dB
0.1995	15.46	-48.18	63.63	12.53	-41.10	53.63	Neutral	10.13
0.2985	3.13	-57.15	60.28	-0.51	-50.79	50.28	Neutral	10.14
0.3	3.29	-56.95	60.24	-0.28	-50.52	50.24	Neutral	10.14
0.3	3.34	-56.90	60.24	-0.27	-50.51	50.24	Neutral	10.14
0.3135	0.10	-59.78	59.88	-3.08	-52.96	49.88	Neutral	10.14
0.552	-0.18	-56.18	56.00	-3.33	-49.33	46.00	Neutral	10.16
0.579	-0.26	-56.26	56.00	-3.35	-49.35	46.00	Neutral	10.17
0.7485	-0.31	-56.31	56.00	-3.46	-49.46	46.00	Neutral	10.19
0.8025	-0.31	-56.31	56.00	-3.40	-49.40	46.00	Neutral	10.19
1.068	-0.29	-56.29	56.00	-3.40	-49.40	46.00	Neutral	10.21
1.2	-0.19	-56.19	56.00	-3.34	-49.34	46.00	Neutral	10.23
1.2405	-0.42	-56.42	56.00	-3.34	-49.34	46.00	Neutral	10.24
1.5015	-0.32	-56.32	56.00	-3.40	-49.40	46.00	Neutral	10.26
1.929	-0.23	-56.23	56.00	-3.25	-49.25	46.00	Neutral	10.27
2.3655	0.91	-55.09	56.00	-3.76	-49.76	46.00	Neutral	10.31
3.138	0.70	-55.30	56.00	-3.70	-49.70	46.00	Neutral	10.35
3.345	1.31	-54.69	56.00	-3.39	-49.39	46.00	Neutral	10.35
4.2315	5.10	-50.90	56.00	-1.47	-47.47	46.00	Neutral	10.40
4.6725	3.35	-52.65	56.00	-2.61	-48.61	46.00	Neutral	10.42
5.205	3.52	-56.48	60.00	-2.03	-52.03	50.00	Neutral	10.44
6.0105	3.84	-56.16	60.00	-1.56	-51.56	50.00	Neutral	10.50
7.8735	4.05	-55.95	60.00	-1.23	-51.23	50.00	Neutral	10.60
8.6025	8.14	-51.86	60.00	-2.19	-52.19	50.00	Neutral	10.63
13.56	33.25	-26.75	60.00	33.60	-16.40	50.00	Neutral	10.92
18.0375	8.72	-51.28	60.00	6.58	-43.42	50.00	Neutral	11.17
18.2895	10.26	-49.74	60.00	7.81	-42.19	50.00	Neutral	11.18
21.6795	22.83	-37.17	60.00	21.69	-28.31	50.00	Neutral	11.26
25.293	15.12	-44.88	60.00	13.79	-36.21	50.00	Neutral	11.24
29.775	16.82	-43.18	60.00	12.96	-37.04	50.00	Neutral	11.09

5.2 Field strength of the fundamental wave

For test instruments and accessories used see section 6 Part CPR 1.

5.2.1 Description of the test location

Test location: OATS1
 Test distance: 3 metres

5.2.2 Photo documentation of the test set-up

See attachment A to this report

5.2.3 Applicable standard

FCC Part 15, Section 15.225(a) and RSS-210 clause B.6(a)

5.2.4 Test result

- a) Result at a measurement distance of 3m

Frequency (MHz)	QP Level (dB μ V)	Ant. factor (dB 1/m)*	Field strength dB(μ V/m)
13.56	39.8	20.5	60.3

*including cable attenuation

- b) Result extrapolated to a distance of 30 m

Frequency (MHz)	Field strength dB(μ V/m) @3m	Extrapolation factor (dB)	Field strength dB(μ V/m) @30m	Limit dB(μ V/m)	Delta (dB)
13.56	60.3	-40	20.3	84.0	-63.7

Limit according to FCC Part 15, Section 15.225(a): and RSS-210 clause B.6(a)

Frequency (MHz)	Field strength of fundamental wave		Measurement distance (metres)
	(μ V/m)	dB(μ V/m)	
13.553 - 13.567	15848	84.0	30

The requirements are **FULFILLED**.

Remarks: none

5.3 Spurious emissions

For test instruments and accessories used see section 6 Part SER 1, SER 2.

5.3.1 Description of the test location

Test location: OATS1
 Test distance: 3 metres

5.3.2 Photo documentation of the test set-up

See attachment A to this report

5.3.3 Applicable standard

FCC Part 15, Section 15.209 and RSS-Gen clause 8.9

The resolution bandwidth during the measurement is as follows:

9 kHz – 150 kHz: RBW: 200 Hz
 150 kHz – 30 MHz: RBW: 9 kHz
 30 MHz – 1000 MHz: RBW: 120 kHz

5.3.4 Test result <30MHz

FCC

f (MHz)	Level QP@3m (dBµV)	Ant. factor (dB/m)	Field strength QP@3m dB(µV/m)	Distance corr. 3m to 30m (dB)	Corrected level QP@30m dB(µV/m)	Limit QP@30m dB(µV/m)	Delta (dB)
27.12	3.4	20.5	23.9	-40	-16.1	29.5	-45.6

ISED

f (MHz)	Level QP@3m (dBµA)	Ant. factor (dB/m)	Field strength QP@3m dB(µA/m)	Distance corr. 3m to 30m (dB)	Corrected level QP@30m dB(µA/m)	Limit QP@30m dB(µA/m)	Delta (dB)
27.12	-48.1	20.5	-27.6	-40	-67.6	-22.0	-45.6

5.3.5 Test result 30 MHz < f < 1 GHz

Frequency (MHz)	Reading Vert. (dBµV)	Reading Hor. (dBµV)	Correct. Vert. (dB)	Correct. Hor. (dB)	Level Vert. (dBµV/m)	Level Hor. (dBµV/m)	Limit (dBµV/m)	Dlimit (dB)
40,68	13,6	12,5	13,2	14,1	26,8	26,6	40,0	-13,2
54,24	10,4	6,8	13,5	14,6	23,9	21,4	40,0	-16,1
67,80	11,7	5,3	12,3	13,0	24,0	18,3	40,0	-16,0
81,36	7,5	4,2	10,6	10,7	18,1	14,9	40,0	-21,9
121,59	3,6	4,8	13,8	13,3	17,4	18,1	43,5	-25,4
157,69	-1,7	6,1	16,0	15,4	14,3	21,5	43,5	-22,0
542,40	13,4	17,8	22,8	23,1	36,2	40,9	46,0	-5,1
596,64	17,8	12,3	24,1	24,5	41,9	36,8	46,0	-4,1
610,20	7,3	14,7	24,3	24,7	31,6	39,4	46,0	-6,6
664,45	10,0	7,2	25,0	25,5	35,0	32,7	46,0	-11,0

Note: The correction factor includes cable loss and antenna factor.

Limit according to FCC Part 15 Subpart 15.209(a)

Frequency (MHz)	Field strength of spurious emissions		Measurement distance (metres)
	(μ V/m)	dB(μ V/m)	
0.009 - 0.490	2400/F(kHz)	--	300
0.490 - 1.705	24000/F (kHz)	--	30
1.705 - 30.0	30	29.5	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

Limit according to RSS-Gen clause 8.9

Frequency (MHz)	Field strength of spurious emissions		Measurement distance (metres)
	(μ A/m)	dB(μ A/m)	
0.009 - 0.490	6.37/F(kHz)	--	300
0.490 - 1.705	63.7/F (kHz)	--	30
1.705 - 30.0	0.08	-22	30
Frequency (MHz)	Field strength of spurious emissions		Measurement distance (metres)
30 - 88	(μ V/m)	dB(μ V/m)	
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

The requirements are **FULFILLED**.

Remarks: Measurement has been performed up to 1000MHz

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

5.4 Frequency tolerance

For test instruments and accessories used see section 6 Part FE.

5.4.1 Description of the test location

Test location: AREA4 (Climatic Chamber)

5.4.2 Photo documentation of the test set-up

See attachment A to this report

5.4.3 Applicable standard

According to FCC Part 15, Section 15.225(e) and RSS-210 clause B.6

5.4.4 Test result

Test conditions		Test result	Tolerance	Limit
		Frequency (MHz)	(kHz)	(kHz)
$T_{min} (-20)^{\circ}\text{C}$	$V_{nom} (12.0\text{ V})$	13,56007	0,07	± 1.356
$T (-10)^{\circ}\text{C}$	$V_{nom} (12.0\text{ V})$	13,56011	0,11	± 1.356
$T (0)^{\circ}\text{C}$	$V_{nom} (12.0\text{ V})$	13,56012	0,12	± 1.356
$T (10)^{\circ}\text{C}$	$V_{nom} (12.0\text{ V})$	13,56012	0,12	± 1.356
$T_{nom} (20)^{\circ}\text{C}$	$V_{min} (10.2\text{ V})$	13,56011	0,11	± 1.356
	$V_{nom} (12.0\text{ V})$	13,56010	0,10	± 1.356
	$V_{max} (13.8\text{ V})$	13,56012	0,12	± 1.356
$T (30)^{\circ}\text{C}$	$V_{nom} (12.0\text{ V})$	13,56008	0,08	± 1.356
$T (40)^{\circ}\text{C}$	$V_{nom} (12.0\text{ V})$	13,56006	0,06	± 1.356
$T_{max} (50)^{\circ}\text{C}$	$V_{nom} (12.0\text{ V})$	13,56005	0,05	± 1.356
Measurement uncertainty		$\pm 10\text{ Hz}$		

Limit Calculation:

Carrier frequency: $f_c = 13.56\text{ MHz}$

Max. tolerance: $\pm 0.01\%$ of 13.56 MHz = $\pm 1.356\text{ kHz}$

Limit according to FCC Part 15, Section 15.225(e) and RSS-210 clause B.6:

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency.

The requirements are **FULFILLED**.

Remarks: Adjustable power supply 6543A (CSA ID 02-02/50-05-157) used for this test.

5.5 Bandwidth

For test instruments and accessories used see section 6 Part **MB**.

5.5.1 Description of the test location

Test location: Shielded Room S6

5.5.2 Photo documentation of the test set-up

See attachment A to this report

5.5.3 Applicable standard

According to FCC Part 15, Section 15.215(c) and RSS-Gen 6.7

5.5.4 Test result

Measured Bandwidth	result (kHz)	Limit (kHz)
20dB	1.26	--
99%	3.14	--


The requirements are **FULFILLED**.

Remarks: For detailed test result please refer to following test protocol.


The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

5.5.5 Test protocol

20 dB bandwidth

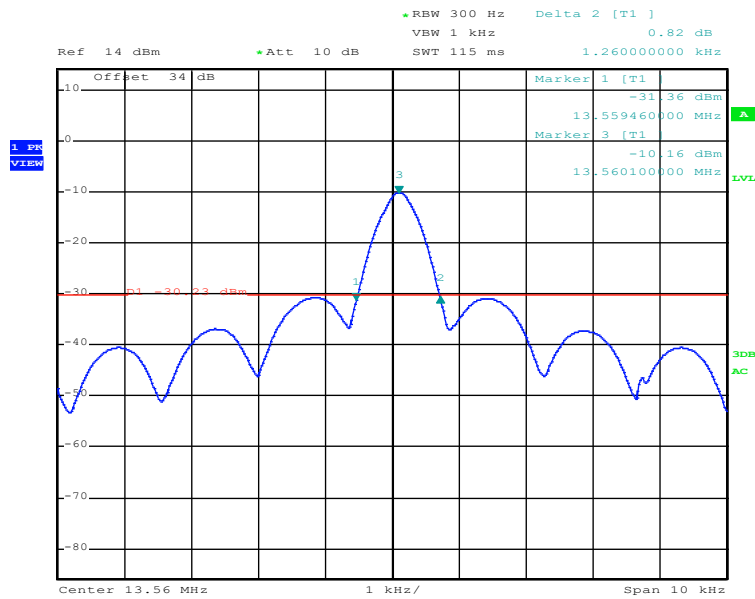

99% Bandwidth

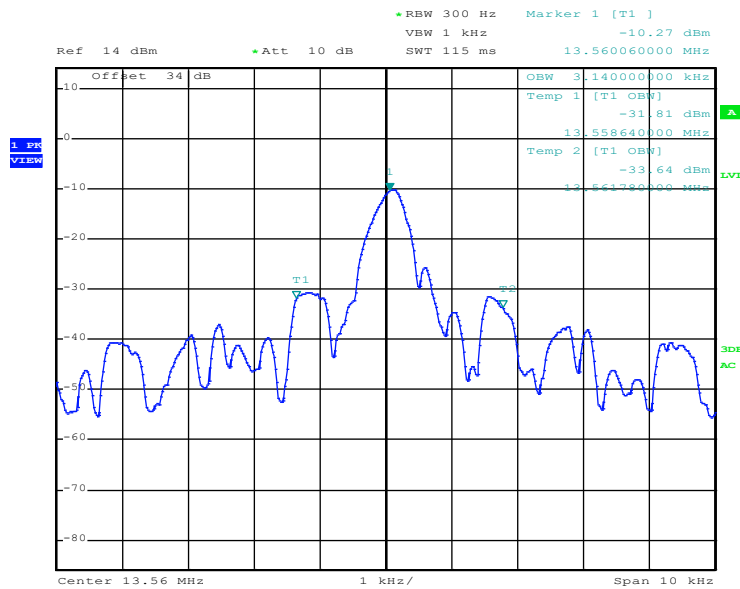

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

5.6 Transmitter spectrum mask

For test instruments and accessories used see section 6 Part MB.

5.6.1 Description of the test location

Test location: AREA4

5.6.2 Photo documentation of the test set-up

See attachment A to this report


5.6.3 Applicable standard

According to FCC Part 15, Section 15.225 (a-d) and RSS-210 clause B.6 (a-d)

5.6.4 Description of Measurement

measurement was performed radiated.

5.6.5 Test result

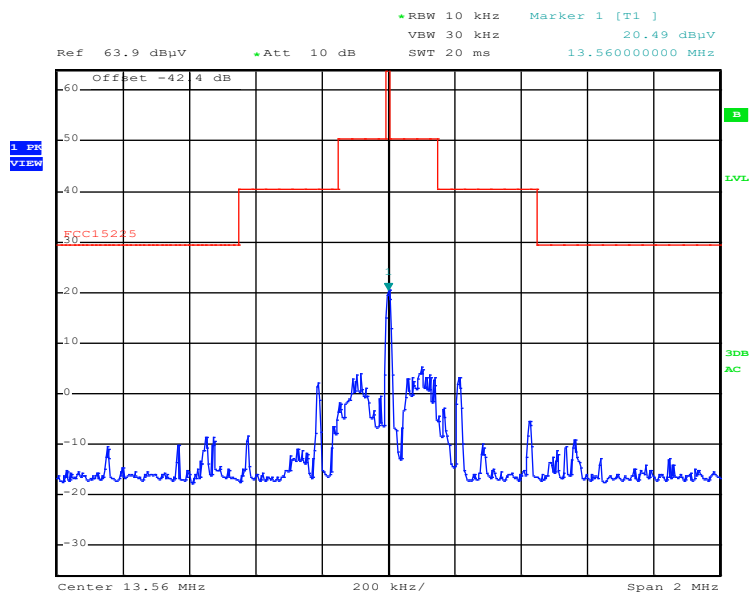

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

Limits according to FCC Part 15, Section 15.225(a-d) and RSS-210 clause B.6 (a-d)

Frequency band (MHz)	Emission level limit at 30 m ($\mu\text{V/m}$)	Emission level limit at 30 m ($\text{dB}\mu\text{V/m}$)
13.110 – 13.410	106	40.5
13.410 - 13.553	334	50.5
13.553 - 13.567	15.848	84.0
13.567 – 13.710	334	50.5
13.710 – 14.010	106	40.5
outside of 13.110 – 14.010	30	29.5

The requirements are **FULFILLED**.

Remarks: none

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

6 USED TEST EQUIPMENT AND ACCESSORIES

All test instruments used are calibrated and verified regularly. The calibration history is available on request.

Test ID	Model Type	Equipment No.	Next Calib.	Last Calib.	Next Verif.	Last Verif.
A 4	BAT-EMC 3.19.1.24	01-02/68-13-001				
	ESCI	02-02/03-15-001	24/06/2021	24/06/2020		
	ESH 2 - Z 5	02-02/20-05-004	31/10/2021	31/10/2019	04/11/2020	04/05/2020
	N-4000-BNC	02-02/50-05-138				
	N-1500-N	02-02/50-05-140				
	ESH 3 - Z 2 6430	02-02/50-05-155 02-02/50-13-014	13/11/2022	13/11/2019	12/11/2020	12/05/2020
CPR 1	ESCI	02-02/03-05-005	04/12/2020	04/12/2019		
	HFH 2 - Z 2	02-02/24-15-001	01/04/2021	01/04/2020		
	NW-2000-NB	02-02/50-05-113				
	KK-EF393/U-16N-21N20 m	02-02/50-12-018				
	KK-SD_7/8-2X21N-33,0M	02-02/50-15-028				
FE	ESCI	02-02/03-05-005	04/12/2020	04/12/2019		
	HFRAE 5161 _ 50 kHz-120	02-02/24-11-004				
	METRAHIT WORLD	02-02/32-15-001	16/12/2020	16/12/2019		
	WK-340/40	02-02/45-05-001	15/08/2021	15/08/2020		
	6543A	02-02/50-05-157				
MB	ESCI	02-02/03-05-005	04/12/2020	04/12/2019		
	HFRAE 5161 _ 50 kHz-120	02-02/24-11-004				
	METRAHIT WORLD	02-02/32-15-001	16/12/2020	16/12/2019		
	6543A	02-02/50-05-157				
SER 1	ESCI	02-02/03-05-005	04/12/2020	04/12/2019		
	HFH 2 - Z 2	02-02/24-15-001	01/04/2021	01/04/2020		
	NW-2000-NB	02-02/50-05-113				
	KK-EF393/U-16N-21N20 m	02-02/50-12-018				
	KK-SD_7/8-2X21N-33,0M	02-02/50-15-028				
SER 2	ESVS 30	02-02/03-05-006	15/07/2021	15/07/2020		
	VULB 9168	02-02/24-05-005	19/09/2020	19/07/2019		
	NW-2000-NB	02-02/50-05-113				
	KK-EF393/U-16N-21N20 m	02-02/50-12-018				
	KK-SD_7/8-2X21N-33,0M	02-02/50-15-028				

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

Test ID	Model Type	Kind of Equipment	Manufacturer	Equipment No.
A 4	BAT-EMC 3.19.1.24	Nexio Software	EMCO Elektronik GmbH	01-02/68-13-001
	ESCI	EMI Test Receiver	Rohde & Schwarz München	02-02/03-15-001
	ESH 2 - Z 5	LISN	Rohde & Schwarz München	02-02/20-05-004
	N-4000-BNC	RF Cable	CSA Group Bayern GmbH	02-02/50-05-138
	N-1500-N	RF Cable	CSA Group Bayern GmbH	02-02/50-05-140
	ESH 3 - Z 2	Pulse Limiter	Rohde & Schwarz München	02-02/50-05-155
	6430	Programmable AC Source	Power Control Electronic Gmb	02-02/50-13-014
CPR 1	ESCI	EMI Test Receiver	Rohde & Schwarz München	02-02/03-05-005
	HFH 2 - Z 2	Antenna	Rohde & Schwarz München	02-02/24-15-001
	NW-2000-NB	RF Cable	Huber + Suhner	02-02/50-05-113
	KK-EF393/U-16N-21N20 m	RF Cable 20m	Huber + Suhner	02-02/50-12-018
	KK-SD_7/8-2X21N-33,0M	RF Cable 33 m	Huber + Suhner AG	02-02/50-15-028
FE	ESCI	EMI Test Receiver	Rohde & Schwarz München	02-02/03-05-005
	HFRAE 5161 _ 50 kHz-120	Passive Loop Antenna	Schwarzbeck Mess-Elektronik	02-02/24-11-004
	METRAHIT WORLD	TRMS Multimeter	GOSSSEN-METRAWATT Gmb	02-02/32-15-001
	WK-340/40	Climatic Chamber	Weiss Umwelttechnik GmbH	02-02/45-05-001
	6543A	Power Supply	HP Hewlett-Packard	02-02/50-05-157
MB	ESCI	EMI Test Receiver	Rohde & Schwarz München	02-02/03-05-005
	HFRAE 5161 _ 50 kHz-120	Passive Loop Antenna	Schwarzbeck Mess-Elektronik	02-02/24-11-004
	METRAHIT WORLD	TRMS Multimeter	GOSSSEN-METRAWATT Gmb	02-02/32-15-001
	6543A	Power Supply	HP Hewlett-Packard	02-02/50-05-157
SER 1	ESCI	EMI Test Receiver	Rohde & Schwarz München	02-02/03-05-005
	HFH 2 - Z 2	Antenna	Rohde & Schwarz München	02-02/24-15-001
	NW-2000-NB	RF Cable	Huber + Suhner	02-02/50-05-113
	KK-EF393/U-16N-21N20 m	RF Cable 20m	Huber + Suhner	02-02/50-12-018
	KK-SD_7/8-2X21N-33,0M	RF Cable 33 m	Huber + Suhner AG	02-02/50-15-028
SER 2	ESVS 30	EMI Test Receiver	Rohde & Schwarz München	02-02/03-05-006
	VULB 9168	Trilog Broadband Antenna	Schwarzbeck Mess-Elektronik	02-02/24-05-005
	NW-2000-NB	RF Cable	Huber + Suhner	02-02/50-05-113
	KK-EF393/U-16N-21N20 m	RF Cable 20m	Huber + Suhner	02-02/50-12-018
	KK-SD_7/8-2X21N-33,0M	RF Cable 33 m	Huber + Suhner AG	02-02/50-15-028

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.