

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053  
Fax: +86 (0) 755 2671 0594  
Email: ee.shenzhen@sgs.com

Report No.: SZEM120400181201  
Page: 1 of 29

# FCC REPORT

**Application No.:** SZEM1204001812RF  
**Applicant:** Bensussen Deutsch & Associates, Inc.  
**Product Name:** POWER A PRO EX CONTROLLER FOR PS3  
**Model No.(EUT):** 220038-FR  
**FCC ID:** YFK-22003801FR  
**Standards:** FCC CFR Title 47 Part 15 (2010)  
**Date of Receipt:** 2012-04-18  
**Date of Test:** 2012-04-26 to 2011-05-04  
**Date of Issue:** 2012-05-24

**Test Result:**

**PASS \***

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang  
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



## 2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	FCC CFR Title 47 Part 15C Section 15.203	ANSI C63.10 (2009)	PASS
Field Strength of the Fundamental Signal	FCC CFR Title 47 Part 15C Section 15.249 (a)	ANSI C63.10 (2009)	PASS
Spurious Emissions	FCC CFR Title 47 Part 15C Section 15.249 (a)/15.209	ANSI C63.10 (2009)	PASS
Band edge (Radiated Emission)	FCC CFR Title 47 Part 15C Section 15.249(a)/15.205	ANSI C63.10 (2009)	PASS
20dB Occupied Bandwidth	FCC CFR Title 47 Part 15C Section 15.215 (c)	ANSI C63.10 (2009)	PASS



### 3 Contents

	Page
1 COVER PAGE.....	1
2 TEST SUMMARY .....	2
3 CONTENTS.....	3
4 GENERAL INFORMATION.....	4
4.1 CLIENT INFORMATION .....	4
4.2 GENERAL DESCRIPTION OF EUT.....	4
4.3 TEST ENVIRONMENT AND MODE .....	6
4.4 DESCRIPTION OF SUPPORT UNITS.....	6
4.5 TEST LOCATION.....	6
4.6 TEST FACILITY.....	7
4.7 DEVIATION FROM STANDARDS .....	7
4.8 ABNORMALITIES FROM STANDARD CONDITIONS .....	7
4.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER .....	7
4.10 TEST INSTRUMENTS LIST .....	8
5 TEST RESULTS AND MEASUREMENT DATA.....	9
5.1 ANTENNA REQUIREMENT .....	9
5.2 SPURIOUS EMISSIONS.....	10
5.2.1 Duty Cycle .....	10
5.2.2 Spurious Emissions.....	12
5.3 BAND EDGE (RADIATED EMISSION) .....	21
5.4 20dB BANDWIDTH .....	27-29



## 4 General Information

### 4.1 Client Information

Applicant:	Bensussen Deutsch & Associates, Inc.
Address of Applicant:	15525 Woodinville-Redmond Road NE Woodinville, WA 98072 USA

### 4.2 General Description of EUT

Name:	POWER A PRO EX CONTROLLER FOR PS3
Model No.:	220038-FR
Frequency Range:	2410.0000MHz-2470.0066MHz
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	MSK
Number of Channels:	75 (declared by the client)
Sample Type:	Portable production
Antenna Type:	Integral
Antenna Gain:	2.0dBi
Power Supply:	4.5V DC (1.5V x 3 "AAA" Size Batteries)

Operation Frequency Each of Channel					
Channel	Frequency	Channel	Frequency	Channel	Frequency
1CH	2410.0000MHz	26CH	2430.2725MHz	51CH	2450.5450MHz
2CH	2410.8109MHz	27CH	2431.0834MHz	52CH	2451.3559MHz
3CH	2411.6218MHz	28CH	2431.8943MHz	53CH	2452.1668MHz
4CH	2412.4327MHz	29CH	2432.7052MHz	54CH	2452.9777MHz
5CH	2413.2436MHz	30CH	2433.5161MHz	55CH	2453.7886MHz
6CH	2414.0545MHz	31CH	2434.3270MHz	56CH	2454.5995MHz
7CH	2414.8654MHz	32CH	2435.1379MHz	57CH	2455.4104MHz
8CH	2415.6763MHz	33CH	2435.9488MHz	58CH	2456.2213MHz
9CH	2416.4872MHz	34CH	2436.7597MHz	59CH	2457.0322MHz
10CH	2417.2981MHz	35CH	2437.5706MHz	60CH	2457.8431MHz
11CH	2418.1090MHz	36CH	2438.3815MHz	61CH	2458.6540MHz
12CH	2418.9199MHz	37CH	2439.1924MHz	62CH	2459.4649MHz
13CH	2419.7308MHz	38CH	2440.0033MHz	63CH	2460.2758MHz
14CH	2420.5417MHz	39CH	2440.8142MHz	64CH	2461.0867MHz
15CH	2421.3526MHz	40CH	2441.6251MHz	65CH	2461.8976MHz
16CH	2422.1635MHz	41CH	2442.4360MHz	66CH	2462.7085MHz
17CH	2422.9744MHz	42CH	2443.2469MHz	67CH	2463.5194MHz
18CH	2423.7853MHz	43CH	2444.0578MHz	68CH	2464.3303MHz
19CH	2424.5962MHz	44CH	2444.8687MHz	69CH	2465.1412MHz
20CH	2425.4071MHz	45CH	2445.6796MHz	70CH	2465.9521MHz
21CH	2426.2180MHz	46CH	2446.4905MHz	71CH	2466.7630MHz
22CH	2427.0289MHz	47CH	2447.3014MHz	72CH	2467.5739MHz
23CH	2427.8398MHz	48CH	2448.1123MHz	73CH	2468.3848MHz
24CH	2428.6507MHz	49CH	2448.9232MHz	74CH	2469.1957MHz
25CH	2429.4616MHz	50CH	2449.7341MHz	75CH	2470.0066MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel(CH1)	2410.0000MHz
The middle channel(CH38)	2440.0033MHz
The highest channel(CH75)	2470.0066MHz





### 4.3 Test Environment and Mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	52 % RH
Atmospheric Pressure:	1006 mbar
Test mode:	
Transmitting mode:	Keep the EUT in transmitting mode.

### 4.4 Description of Support Units

The EUT has been tested independently.

### 4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.  
518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



## 4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**  
CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.
- **VCCI**  
The 3m Semi-anechoic chamber, Full-anechoic Chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197, G-416, T-1153 and C-2383 respectively.
- **FCC – Registration No.: 556682**  
SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.
- **Industry Canada (IC)**  
The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1.

## 4.7 Deviation from Standards

None.

## 4.8 Abnormalities from Standard Conditions

None.

## 4.9 Other Information Requested by the Customer

None.



### 4.10 Test Instruments List

RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2012-06-10
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2012-05-26
3	EMI Test software	AUDIX	E3	SEL0050	N/A
4	Coaxial cable	SGS	N/A	SEL0028	2012-05-29
5	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2012-10-29
6	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2012-10-29
7	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2012-10-29
8	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2012-05-26
9	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2012-10-26
11	Band filter	Amindeon	82346	SEL0094	2012-05-26

RF conducted					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	Spectrum Analyzer	Rohde & Schwarz	FSP 30	SEL0154	2012-10-23
2	Coaxial cable	SGS	N/A	SEL0028	2012-05-29


General used equipment					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	Humidity/ Temperature Indicator	Shanghai	ZJ1-2B	SEL0102 to SEL0103	2012-10-27
2	Humidity/ Temperature Indicator	Shanghai	ZJ1-2B	SEL0101	2012-10-27
3	Barometer	ChangChun	DYM3	SEL0088	2012-05-18

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




## 5 Test results and Measurement Data

### 5.1 Antenna Requirement
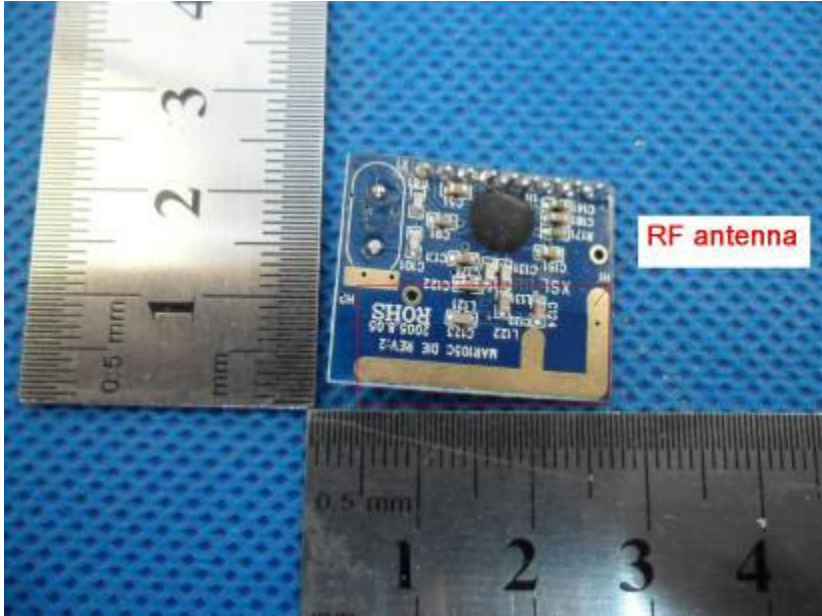
<b>Standard requirement:</b>	FCC Part15 C Section 15.203
<p>15.203 requirement:</p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p>	
<b>EUT Antenna:</b>	
<p>The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2.0dBi.</p>	
	



## 5.2 Spurious Emissions

### 5.2.1 Duty Cycle

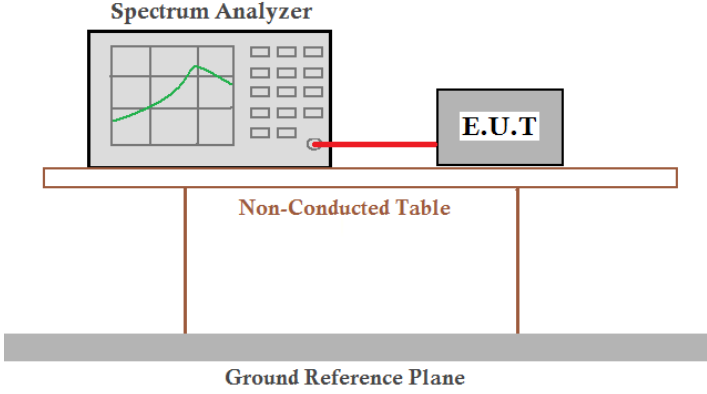Test Requirement:	FCC Part15 C Section 15.35 (c)
Test Method:	ANSI C63.10:2009
Test Setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Instruments Used:	Refer to section 4.10 for details
Limit:	N/A
Test Mode:	Transmitting mode
Test Results:	Pass



Test plot as follows:

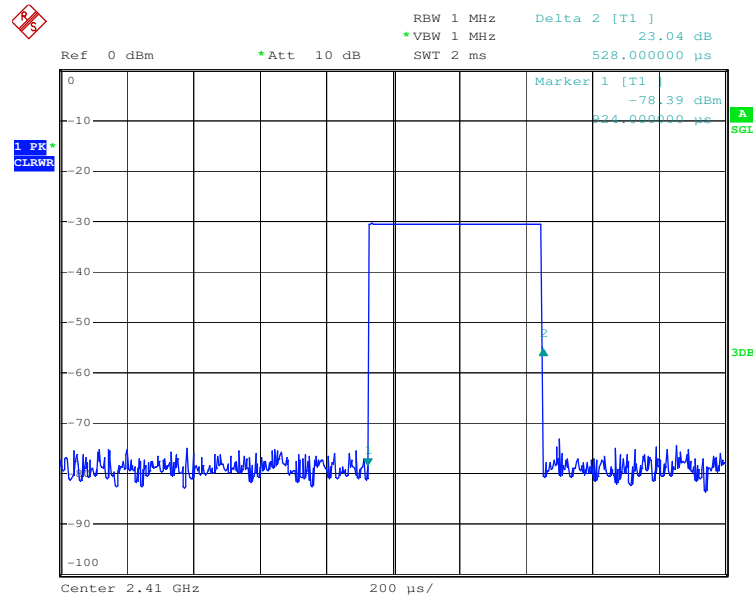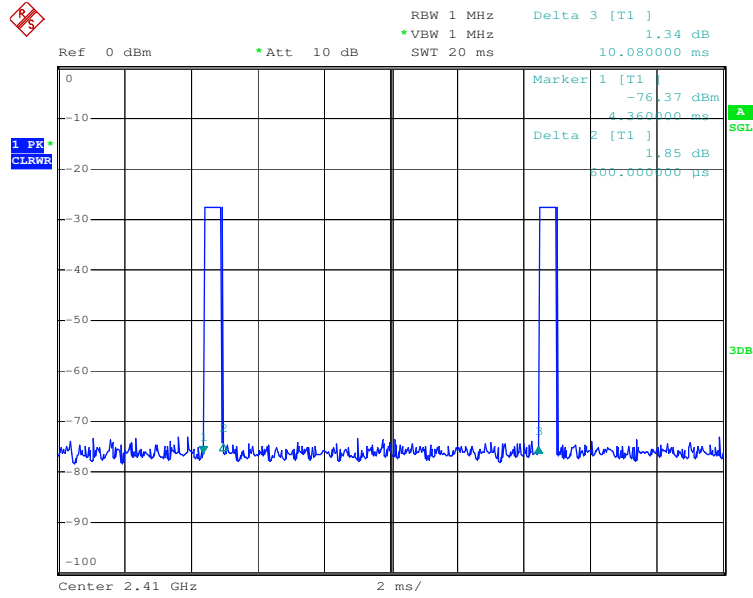

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

**5.2.2 Spurious Emissions**

Test Requirement:	FCC Part15 C Section 15.249 and 15.209																						
Test Method:	ANSI C63.10: 2009																						
Test Frequency Range:	30MHz to 25000MHz																						
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)																						
Receiver Setup:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-1GHz</td> <td>Quasi-peak</td> <td>100kHz</td> <td>300kHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td>Above 1GHz</td> <td>Peak</td> <td>1MHz</td> <td>3MHz</td> <td>Peak Value</td> </tr> </tbody> </table>			Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	100kHz	300kHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value					
Frequency	Detector	RBW	VBW	Remark																			
30MHz-1GHz	Quasi-peak	100kHz	300kHz	Quasi-peak Value																			
Above 1GHz	Peak	1MHz	3MHz	Peak Value																			
Limit: (Field strength of the fundamental signal)	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Limit (dBuV/m @3m)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td rowspan="2">2400MHz-2483.5MHz</td> <td>94.0</td> <td>Average Value</td> </tr> <tr> <td>114.0</td> <td>Peak Value</td> </tr> </tbody> </table>			Frequency	Limit (dBuV/m @3m)	Remark	2400MHz-2483.5MHz	94.0	Average Value	114.0	Peak Value												
Frequency	Limit (dBuV/m @3m)	Remark																					
2400MHz-2483.5MHz	94.0	Average Value																					
	114.0	Peak Value																					
Limit: (Spurious Emissions)	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Limit (dBuV/m @3m)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-88MHz</td> <td>40.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>88MHz-216MHz</td> <td>43.5</td> <td>Quasi-peak Value</td> </tr> <tr> <td>216MHz-960MHz</td> <td>46.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>960MHz-1GHz</td> <td>54.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td rowspan="2">Above 1GHz</td> <td>54.0</td> <td>Average Value</td> </tr> <tr> <td>74.0</td> <td>Peak Value</td> </tr> </tbody> </table>			Frequency	Limit (dBuV/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	54.0	Average Value	74.0	Peak Value
Frequency	Limit (dBuV/m @3m)	Remark																					
30MHz-88MHz	40.0	Quasi-peak Value																					
88MHz-216MHz	43.5	Quasi-peak Value																					
216MHz-960MHz	46.0	Quasi-peak Value																					
960MHz-1GHz	54.0	Quasi-peak Value																					
Above 1GHz	54.0	Average Value																					
	74.0	Peak Value																					
Test Setup:																							

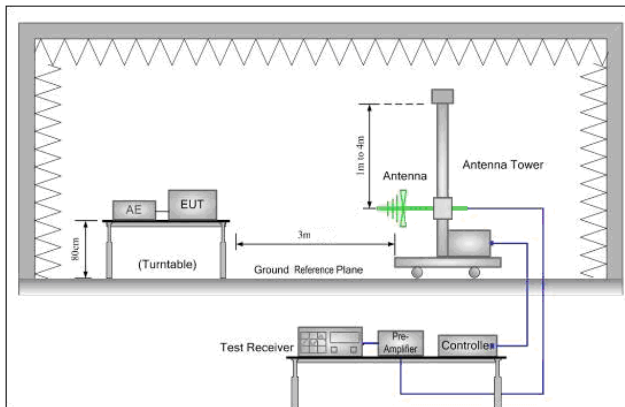


Figure 1. 30MHz to 1GHz

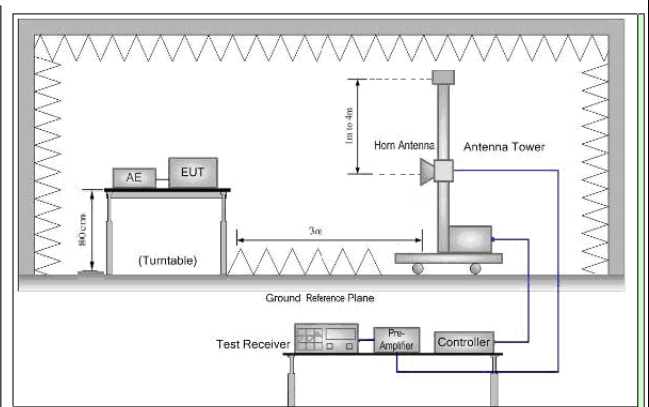


Figure 2. Above 1 GHz



## SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM120400181201

Page : 13 of 29

Test Procedure:	<ol style="list-style-type: none"><li>a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li><li>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li><li>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li><li>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li><li>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li><li>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li><li>g. Test the EUT in the lowest channel, the middle channel, the Highest channel</li><li>h. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case. Only the test worst case mode is recorded in the report.</li><li>i. Repeat above procedures until all frequencies measured was complete.</li></ol>
Instruments Used:	Refer to section 4.10 for details
Test Mode:	Transmitting mode
Test Results:	Pass



## SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM120400181201

Page : 14 of 29

### Measurement Data

#### 5.2.2.1 Field Strength Of The Fundamental Signal

Peak value:

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2410.0000	2.99	32.54	39.86	95.29	90.96	114.00	-23.04	Horizontal
2410.0000	2.99	32.54	39.86	93.17	88.84	114.00	-25.16	Vertical
2440.0033	3.01	32.61	39.89	94.32	90.05	114.00	-23.95	Horizontal
2440.0033	3.01	32.61	39.89	93.28	89.01	114.00	-24.99	Vertical
2470.0066	3.02	32.64	39.91	94.24	89.99	114.00	-24.01	Horizontal
2470.0066	3.02	32.64	39.91	92.77	88.52	114.00	-25.48	Vertical

Average value:

Frequency (MHz)	PDCF	Peak value (dBuV/m)	Average value (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2410.0000	-25.61	90.96	65.35	94.00	-28.65	Horizontal
2410.0000	-25.61	88.84	63.23	94.00	-30.77	Vertical
2440.0033	-25.61	90.05	64.44	94.00	-29.56	Horizontal
2440.0033	-25.61	89.01	63.40	94.00	-30.60	Vertical
2470.0066	-25.61	89.99	64.38	94.00	-29.62	Horizontal
2470.0066	-25.61	88.52	62.91	94.00	-31.09	Vertical

Note:



Peak Level (Final Level)= Reading Level + Antenna Factor + Cable Loss - Preamp Factor

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Average value:	
Calculate Formula:	Average value=Peak value + PDCF
	PDCF=20 log(Duty cycle)=-25.61
	Duty cycle= T on time / T period
Test data:	Ton time =0.528ms
	T period =10.080ms

Test plot as follows:

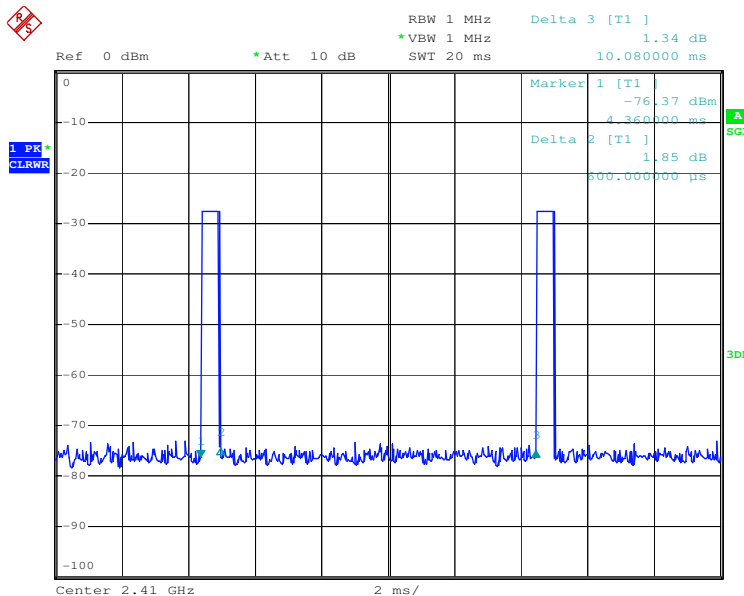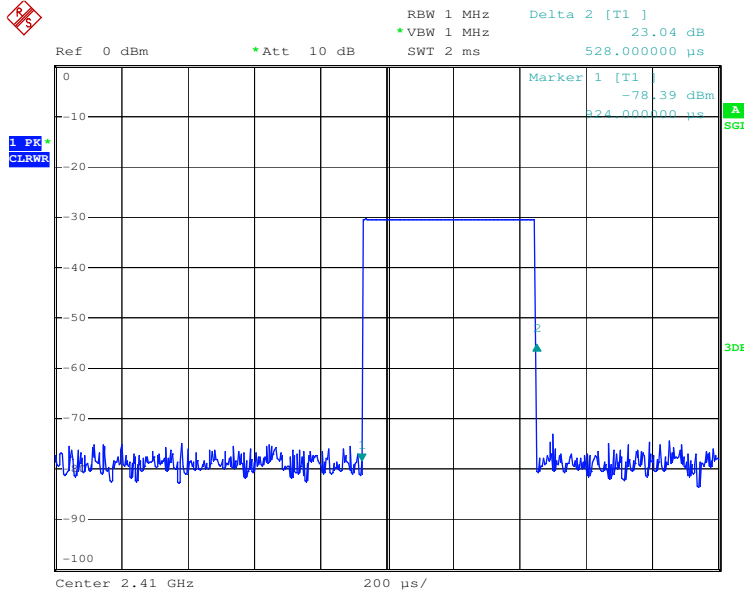

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




5.2.2.2 Spurious Emissions

30MHz~1GHz		
Test mode:	Transmitting	

QP value:

Vertical:

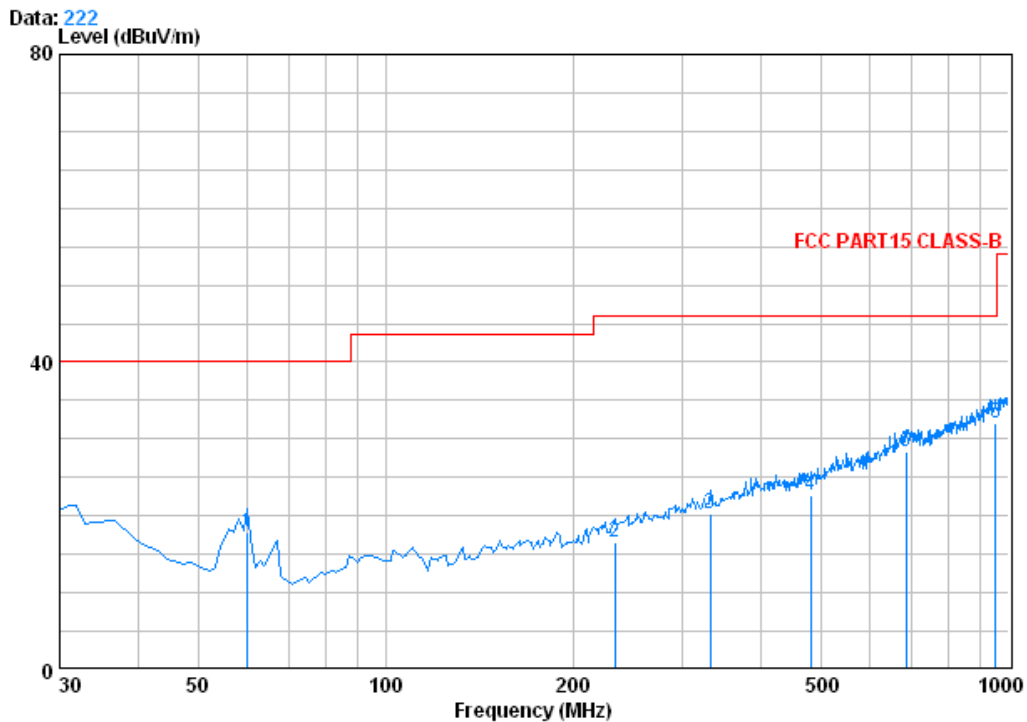

Condition : FCC PART15 CLASS-B 3m 0042673 VERTICAL  
Job No. : 1812RF  
mode : tx se


	Freq MHz	CableAntenna Preamp		Read		Limit Line	Over Limit
		Loss dB	Factor dB/m	Factor dB	Level dBuV		
1	60.070	0.80	7.19	27.27	37.16	17.88	40.00 -22.12
2	233.700	1.59	11.79	26.58	29.87	16.66	46.00 -29.34
3	331.670	2.00	14.98	26.64	29.95	20.29	46.00 -25.71
4	482.020	2.54	17.80	27.62	29.99	22.71	46.00 -23.29
5 @	683.780	2.87	21.48	27.43	31.33	28.25	46.00 -17.75
6 @	952.470	3.65	23.40	26.54	31.62	32.13	46.00 -13.87

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."





Horizontal:

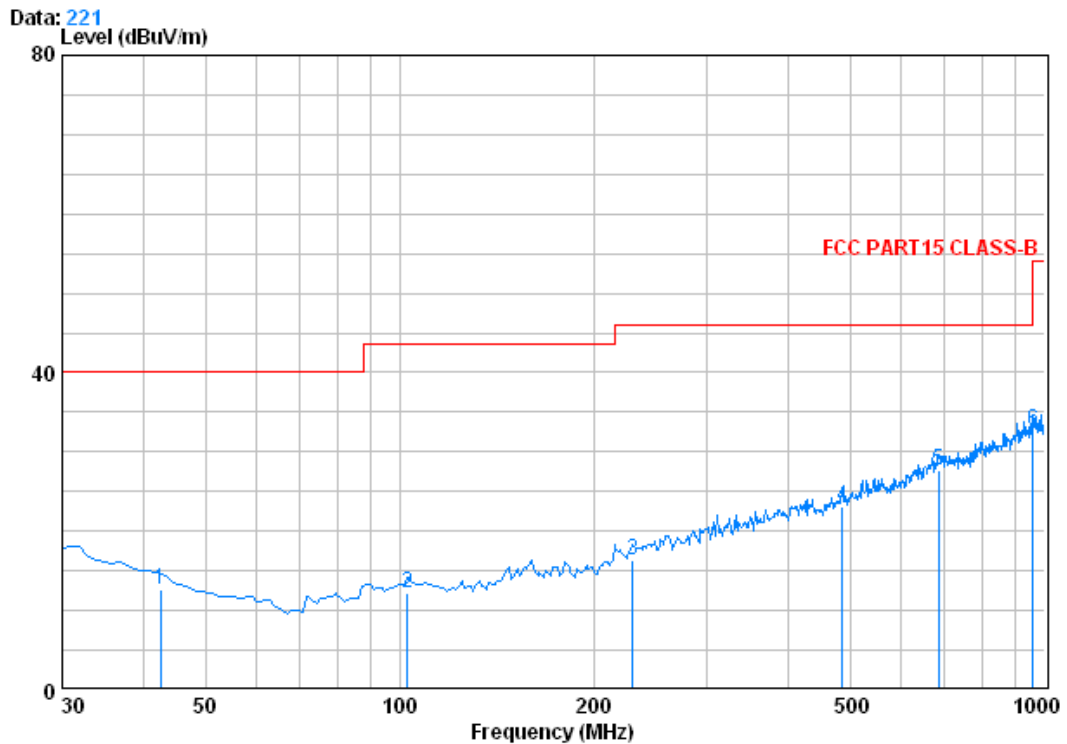

Condition : FCC PART15 CLASS-B 3m 0042673 HORIZONTAL  
Job No. : 1812RF  
mode : tx se

	Freq	Cable Loss	Antenna Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	42.610	0.66	10.84	27.31	28.50	12.69	40.00	-27.31
2	102.750	1.21	8.97	27.18	29.12	12.11	43.50	-31.39
3	229.820	1.57	11.64	26.59	29.67	16.29	46.00	-29.71
4	485.900	2.55	17.80	27.64	30.50	23.22	46.00	-22.79
5 @	684.750	2.87	21.48	27.43	30.77	27.69	46.00	-18.31
6	960.230	3.66	23.60	26.51	31.96	32.72	54.00	-21.28

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



## SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM120400181201

Page : 18 of 29

Above 1GHz									
Test mode:		Transmitting		Test channel:		Lowest		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
1439.090	2.48	28.01	39.33	46.50	37.66	74.00	-36.34	Vertical	
3672.110	3.88	33.41	40.80	48.23	44.72	74.00	-29.28	Vertical	
4821.757	4.70	34.68	41.64	55.07	52.81	74.00	-21.19	Vertical	
6611.326	5.28	36.20	40.40	49.29	50.37	74.00	-23.63	Vertical	
8208.370	6.20	36.08	39.01	47.87	51.14	74.00	-22.86	Vertical	
10587.850	6.12	38.33	37.69	46.06	52.82	74.00	-21.18	Vertical	
1395.796	2.45	27.91	39.31	45.98	37.03	74.00	-36.97	Horizontal	
3241.498	3.52	33.30	40.48	48.30	44.64	74.00	-29.36	Horizontal	
4821.757	4.70	34.68	41.64	54.28	52.02	74.00	-21.98	Horizontal	
5806.408	5.06	35.40	41.09	50.11	49.48	74.00	-24.52	Horizontal	
7624.250	6.23	36.00	39.51	49.29	52.01	74.00	-21.99	Horizontal	
10560.940	6.11	38.32	37.68	46.26	53.01	74.00	-20.99	Horizontal	

Test mode:		Transmitting		Test channel:		Lowest		Remark:	Average
Frequency (MHz)	Peak Level (dBuV/m)	PDCF (dB)	Average Level (dBuV/m)	Average Limit (dBuV/m)	Over Limit (dB)	polarization			
1439.090	37.66	-25.61	12.05	54.00	-41.95	Vertical			
3672.110	44.72	-25.61	19.11	54.00	-34.89	Vertical			
4821.757	52.81	-25.61	27.20	54.00	-26.80	Vertical			
6611.326	50.37	-25.61	24.76	54.00	-29.24	Vertical			
8208.370	51.14	-25.61	25.53	54.00	-28.47	Vertical			
10587.850	52.82	-25.61	27.21	54.00	-26.79	Vertical			
1395.796	37.03	-25.61	11.42	54.00	-42.58	Horizontal			
3241.498	44.64	-25.61	19.03	54.00	-34.97	Horizontal			
4821.757	52.02	-25.61	26.41	54.00	-27.59	Horizontal			
5806.408	49.48	-25.61	23.87	54.00	-30.13	Horizontal			
7624.250	52.01	-25.61	26.40	54.00	-27.60	Horizontal			
10560.940	53.01	-25.61	27.40	54.00	-26.60	Horizontal			

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



## SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM120400181201

Page : 19 of 29

Test mode:		Transmitting		Test channel:		Middle		Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization		
1569.189	2.56	28.59	39.38	45.06	36.83	74.00	-37.17	Vertical		
3933.367	4.11	33.74	40.98	47.59	44.46	74.00	-29.54	Vertical		
4871.103	4.72	34.59	41.68	55.88	53.51	74.00	-20.49	Vertical		
6109.670	5.15	35.84	40.83	48.34	48.50	74.00	-25.50	Vertical		
7394.878	6.00	35.96	39.71	48.17	50.42	74.00	-23.58	Vertical		
9562.854	6.00	37.27	37.83	46.43	51.87	74.00	-22.13	Vertical		
1464.963	2.49	28.04	39.33	46.22	37.42	74.00	-36.58	Horizontal		
3662.775	3.87	33.41	40.79	47.48	43.97	74.00	-30.03	Horizontal		
4883.519	4.72	34.59	41.68	51.20	48.83	74.00	-25.17	Horizontal		
6412.427	5.23	36.18	40.56	49.74	50.59	74.00	-23.41	Horizontal		
8022.456	6.20	36.01	39.16	48.36	51.41	74.00	-22.59	Horizontal		
9960.375	5.98	37.67	37.48	45.93	52.10	74.00	-21.90	Horizontal		

Test mode:		Transmitting		Test channel:		Middle		Remark:		Average
Frequency (MHz)	Peak Level (dBuV/m)	PDCF (dB)	Average Level (dBuV/m)	Average Limit (dBuV/m)	Over Limit (dB)	polarization				
1569.189	36.83	-25.61	11.22	54.00	-42.78	Vertical				
3933.367	44.46	-25.61	18.85	54.00	-35.15	Vertical				
4871.103	53.51	-25.61	27.90	54.00	-26.10	Vertical				
6109.670	48.50	-25.61	22.89	54.00	-31.11	Vertical				
7394.878	50.42	-25.61	24.81	54.00	-29.19	Vertical				
9562.854	51.87	-25.61	26.26	54.00	-27.74	Vertical				
1464.963	37.42	-25.61	11.81	54.00	-42.19	Horizontal				
3662.775	43.97	-25.61	18.36	54.00	-35.64	Horizontal				
4883.519	48.83	-25.61	23.22	54.00	-30.78	Horizontal				
6412.427	50.59	-25.61	24.98	54.00	-29.02	Horizontal				
8022.456	51.41	-25.61	25.80	54.00	-28.20	Horizontal				
9960.375	52.10	-25.61	26.49	54.00	-27.51	Horizontal				

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



## SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM120400181201

Page : 20 of 29

Test mode:		Transmitting		Test channel:		Highest		Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization		
1424.511	2.47	27.98	39.32	45.57	36.70	74.00	-37.30	Vertical		
3700.260	3.91	33.45	40.81	48.98	45.53	74.00	-28.47	Vertical		
4933.497	4.75	34.51	41.72	55.99	53.53	74.00	-20.47	Vertical		
6678.987	5.30	36.13	40.33	48.79	49.89	74.00	-24.11	Vertical		
8725.477	6.17	36.37	38.55	47.53	51.52	74.00	-22.48	Vertical		
11112.520	6.25	38.48	37.91	46.74	53.56	74.00	-20.44	Vertical		
1479.955	2.50	28.07	39.34	46.17	37.40	74.00	-36.60	Horizontal		
3983.750	4.14	33.80	41.02	48.26	45.18	74.00	-28.82	Horizontal		
4933.497	4.75	34.51	41.72	53.98	51.52	74.00	-22.48	Horizontal		
5244.295	4.86	34.65	41.58	52.94	50.87	74.00	-23.13	Horizontal		
7413.726	6.02	35.97	39.69	48.38	50.68	74.00	-23.32	Horizontal		
9834.406	5.98	37.54	37.60	46.14	52.06	74.00	-21.94	Horizontal		

Test mode:		Transmitting		Test channel:		Highest		Remark:		Average
Frequency (MHz)	Peak Level (dBuV/m)	PDCF (dB)	Average Level (dBuV/m)	Average Limit (dBuV/m)	Over Limit (dB)	polarization				
1424.511	36.70	-25.61	11.09	54.00	-42.91	Vertical				
3700.260	45.53	-25.61	19.92	54.00	-34.08	Vertical				
4933.497	53.53	-25.61	27.92	54.00	-26.08	Vertical				
6678.987	49.89	-25.61	24.28	54.00	-29.72	Vertical				
8725.477	51.52	-25.61	25.91	54.00	-28.09	Vertical				
11112.520	53.56	-25.61	27.95	54.00	-26.05	Vertical				
1479.955	37.40	-25.61	11.79	54.00	-42.21	Horizontal				
3983.750	45.18	-25.61	19.57	54.00	-34.43	Horizontal				
4933.497	51.52	-25.61	25.91	54.00	-28.09	Horizontal				
5244.295	50.87	-25.61	25.26	54.00	-28.74	Horizontal				
7413.726	50.68	-25.61	25.07	54.00	-28.93	Horizontal				
9834.406	52.06	-25.61	26.45	54.00	-27.55	Horizontal				

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Pre-amplifier. The basic equation with a sample calculation is as follows:  
 Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Pre-amplifier Factor
- 2) The disturbance above 11GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

### 5.3 Band edge (Radiated Emission)

Test Requirement:	FCC Part15 C Section 15.209 and 15.205		
Test Method:	ANSI C63.10: 2009		
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)		
Limit(band edge):	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.		
	Frequency	Limit (dBuV/m @3m)	Remark
	30MHz-88MHz	40.0	Quasi-peak Value
	88MHz-216MHz	43.5	Quasi-peak Value
	216MHz-960MHz	46.0	Quasi-peak Value
	960MHz-1GHz	54.0	Quasi-peak Value
Above 1GHz	54.0	Average Value	
	74.0	Peak Value	
Test Setup:			

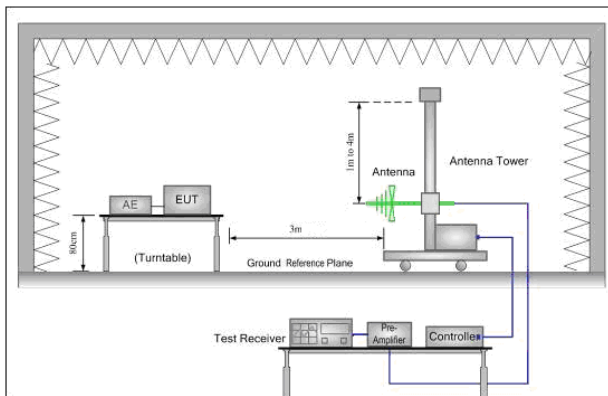


Figure 1. 30MHz to 1GHz

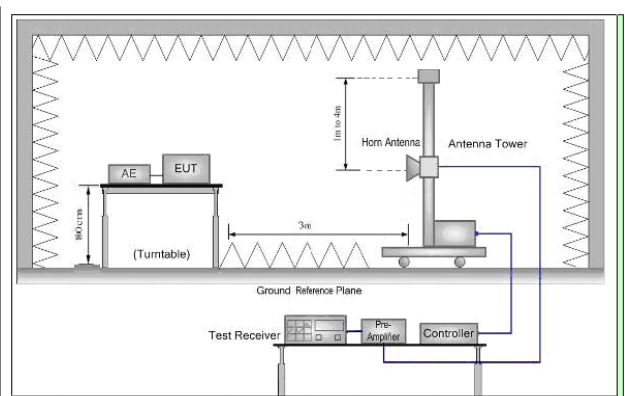


Figure 2. Above 1 GHz



Test Procedure:	<ul style="list-style-type: none"> <li>a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</li> <li>g. Test the EUT in the lowest channel , the Highest channel</li> <li>h. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case. Only the test worst case mode is recorded in the report.</li> <li>i. Repeat above procedures until all frequencies measured was complete.</li> </ul>
Instruments Used:	Refer to section 4.10 for details
Test Mode:	Transmitting mode
Test Results:	Pass

**Measurement Data**


<b>Average value:</b>	
Calculate Formula:	Average value=Peak value + PDCF
	PDCF=20 log(Duty cycle)=-25.61
	Duty cycle= T on time / T period
Test data:	Ton time =0.528ms
	T period =10.080ms

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Band edge (Radiated Emission)					
Test mode:	Transmitting	Test channel:	Lowest	Remark:	Peak

Vertical

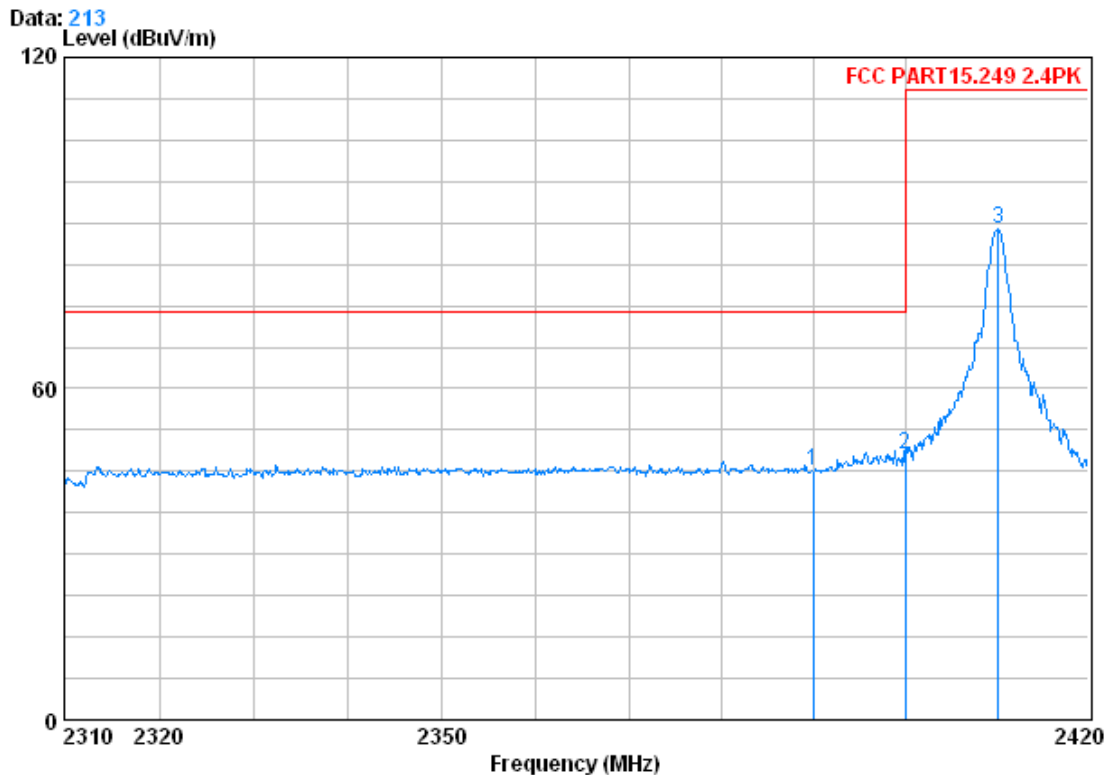


Condition : FCC PART15.249 2.4PK 3m VERTICAL  
 Job No. : 1812RF  
 test mode : low channel 2410  
 : Level=Read level+Cable loss+Antenna Fact

	Freq	Cable Loss	Antenna Factor	Preamp Factor	Read Level	Limit Line	Over Limit	Remark
1	2390.000	2.98	32.51	39.85	49.44	74.00	-28.91	Peak
2	2400.000	2.98	32.51	39.86	52.55	74.00	-25.82	Peak
3 @	2410.100	2.99	32.54	39.86	93.16	114.00	-25.16	Peak

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Horizontal

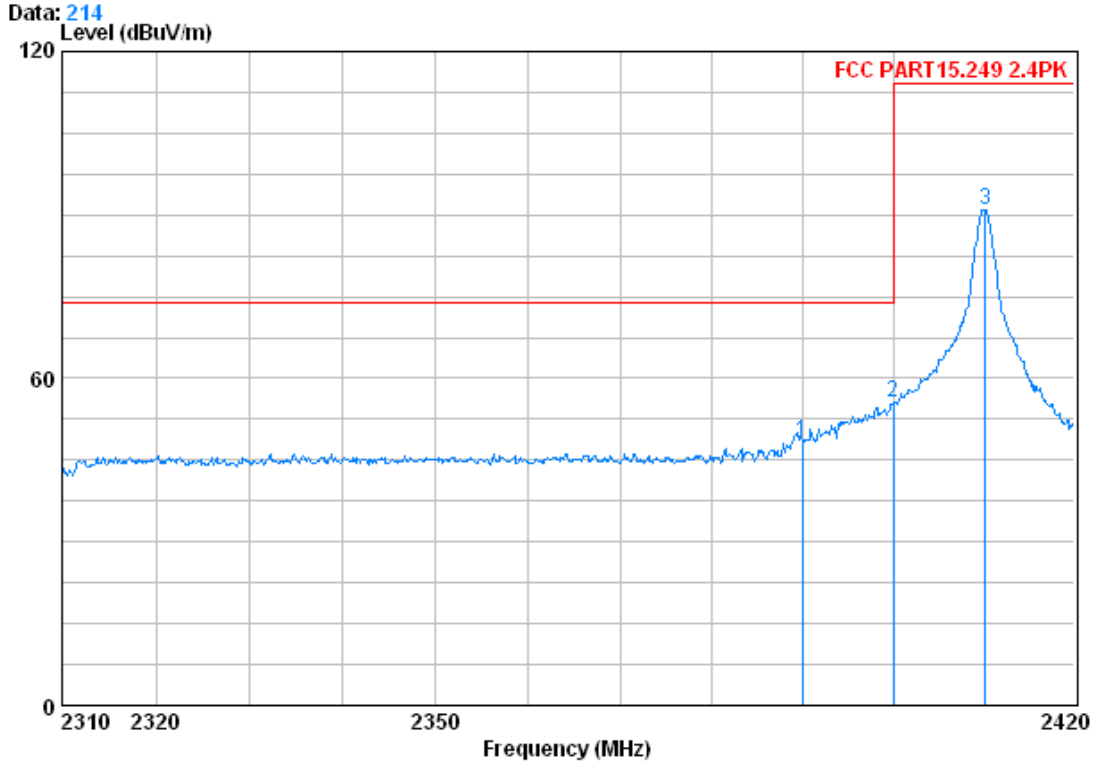

Condition : FCC PART15.249 2.4PK 3m HORIZONTAL  
 Job No. : 1812RF  
 test mode : low channel 2410  
 : Level=Read level+Cable loss+Antenna Fact

	Freq	Cable Loss	Antenna Fact	Preamplifier	Read Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	
1	2390.000	2.98	32.51	39.85	52.73	48.38	74.00	-25.62 Peak
2	2400.000	2.98	32.51	39.86	60.08	55.72	74.00	-18.28 Peak
3	2410.100	2.99	32.54	39.86	95.28	90.96	114.00	-23.04 Peak

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."






# SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM120400181201

Page : 25 of 29

Test mode:	Transmitting	Test channel:	Highest	Remark:	Peak
------------	--------------	---------------	---------	---------	------

Vertical

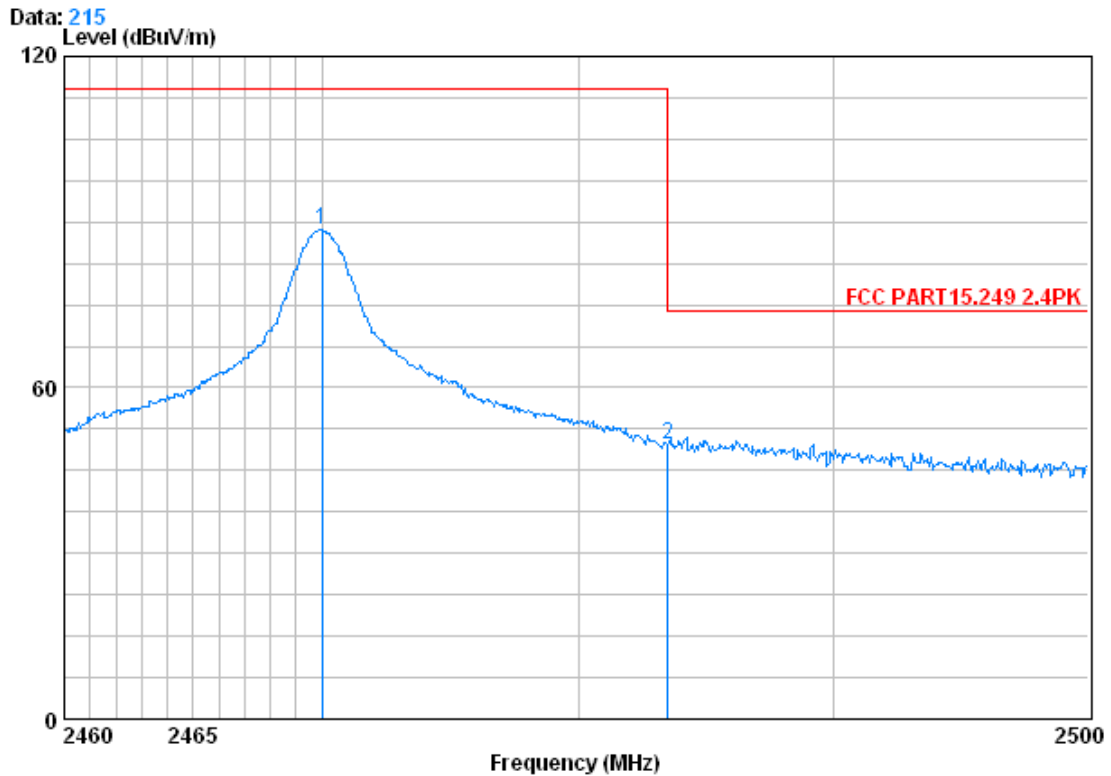

Condition : FCC PART15.249 2.4PK 3m VERTICAL  
 Job No. : 1812RF  
 test mode : high channel 2470  
 : Level=Read level+Cable loss+Antenna Fact


	Freq	Cable Loss	Antenna Factor	Preamp Factor	Read Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	
1	2470.000	3.02	32.64	39.91	92.77	114.00	-25.48	Peak
2	2483.500	3.03	32.67	39.92	53.88	74.00	-24.34	Peak



"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Horizontal

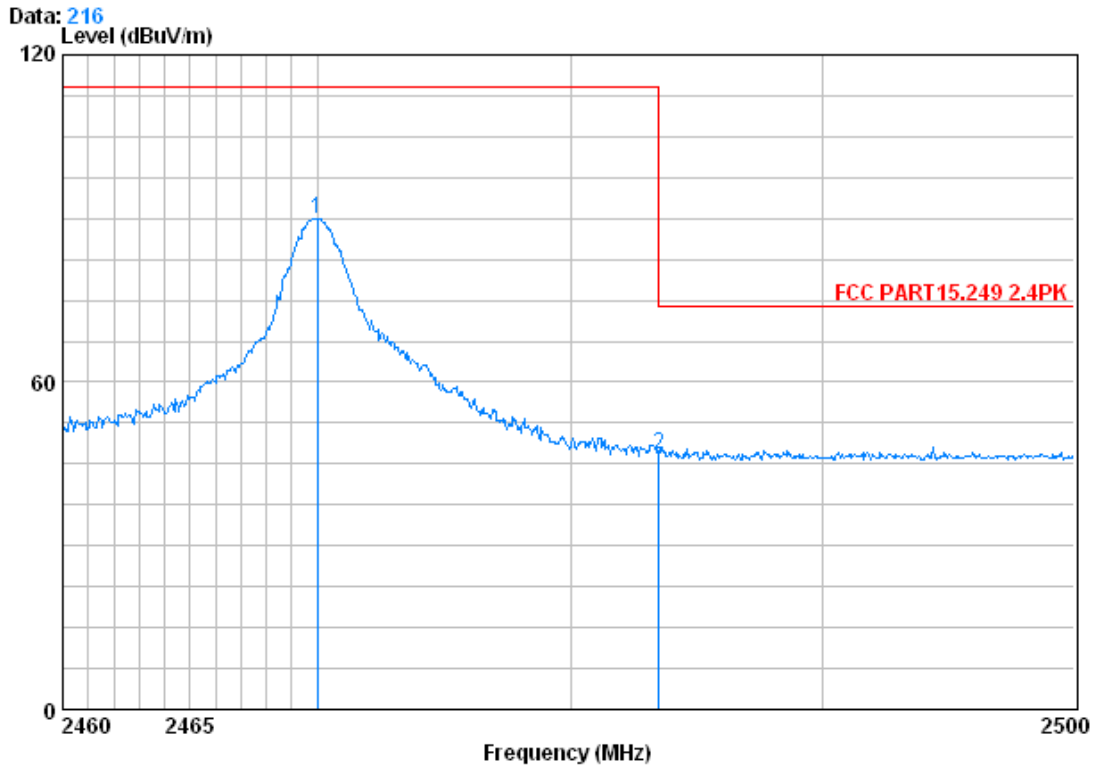

Condition : FCC PART15.249 2.4PK 3m HORIZONTAL  
 Job No. : 1812RF  
 test mode : high channel 2470  
 : Level=Read level+Cable loss+Antenna Fact

	Freq	Cable Loss	Antenna Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2470.000	3.02	32.64	39.91	94.24	89.99	114.00	-24.01	Peak
2	2483.500	3.03	32.67	39.92	50.91	46.69	74.00	-27.31	Peak

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Pre-amplifier. The basic equation with a sample calculation is as follows:


$$\text{Final Test Level} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Pre-amplifier Factor}$$

For band-edge radiated emissions (pulse signal) , Average value=Peak value + PDCF

PDCF < Average limte-Peak limit = -20dB,and the peak value complies with the peak limit, so deems to the Average value complies with the average limit.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

### 5.4 20dB Bandwidth

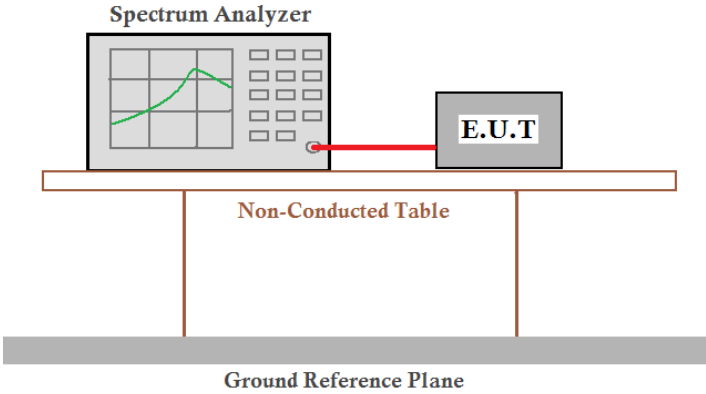Test Requirement:	FCC Part15 C Section 15.215
Test Method:	ANSI C63.10:2009
Test Setup:	
Instruments Used:	Refer to section 4.7 for details
Test mode:	Transmitting mode
Limit:	N/A
Test Results:	Pass


### Measurement Data

Test channel	20dB bandwidth (MHz)	Results
Lowest	0.784	Pass
Middle	0.760	Pass
Highest	0.752	Pass




Test plot as follows:

Test channel:	Lowest
---------------	--------

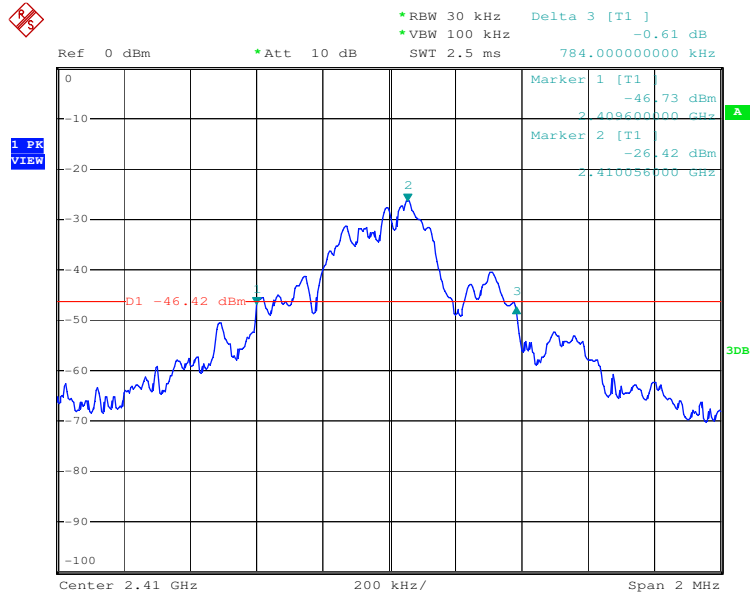


Test channel:	Middle
---------------	--------

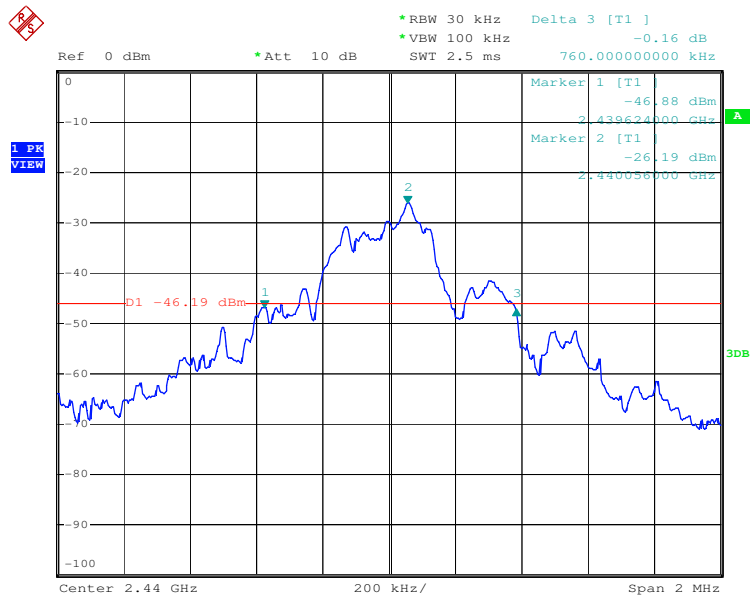

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Test channel: Highest

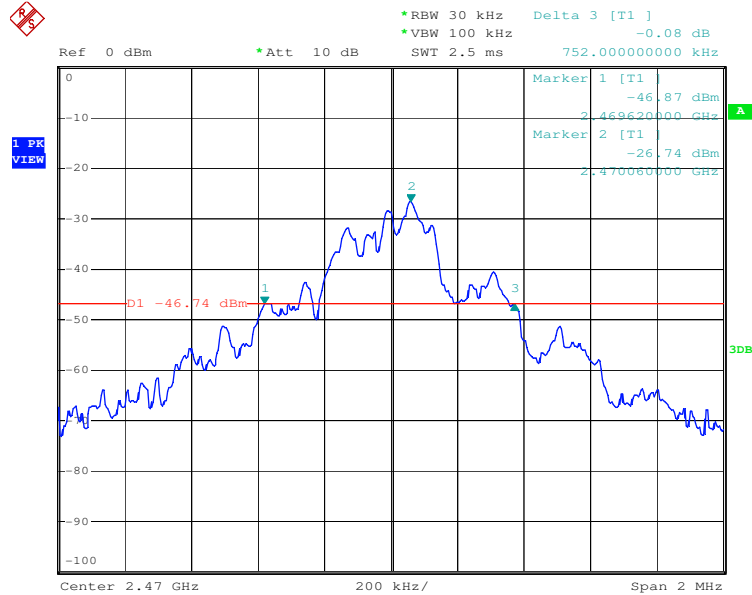

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."