



<b>EMC TEST REPORT</b> <b>FCC 47 CFR Part 15B</b> <b>Industry Canada ICES-003</b> <b>Electromagnetic compatibility - Unintentional radiators</b>	
<b>Report Reference No.</b> .....	G0M-1604-5541-EF0115B-V01
<b>Testing Laboratory</b> .....	Eurofins Product Service GmbH
Address .....	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation .....	<div style="text-align: center;">   </div> <p>A2LA Accredited Testing Laboratory, Certificate No.: 1983.01            FCC Filed Test Laboratory, Reg.-No.: 96970            IC OATS Filing assigned code: 3470A</p>
<b>Applicant's name</b> .....	Phoenix Contact GmbH & Co.KG
Address .....	Flachsmarktstrasse 8 32825 Blomberg Germany
<b>Test specification:</b>	
Standard.....	47 CFR Part 15 Subpart B ICES-003, Issue 6:2016 ANSI C63.4:2014
<b>Equipment under test (EUT):</b>	
Product description	Programming and Maintenance Interface with Bluetooth
Model No.	IFS-BT-PROG-ADAPTER
Additional Models	None
Hardware version	02
Firmware / Software version	V1.0
Contains	FCC-ID: QDS-BRCM1078                      IC: 4324A-BRCM1078
<b>Test result</b>	<b>Passed</b>

**Possible test case verdicts:**


- not applicable to test object .....: N/A
- test object does meet the requirement.....: P (Pass)
- test object does not meet the requirement.....: F (Fail)


**Testing:**

Date of receipt of test item .....: 2016-06-17

Date (s) of performance of tests .....: 2016-06-27 - 2016-06-28

Compiled by .....: Matthias Laurisch

Tested by (+ signature).....: Andreas Pflug 

Approved by (+ signature) .....: Jens Marquardt   
Deputy Head of Lab

Date of issue .....: 2016-08-04

Total number of pages .....: 30

**General remarks:**

**The test results presented in this report relate only to the object tested.**

**The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.**

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

**Additional comments:**

---

---

## Version History

Version	Issue Date	Remarks	Revised by
V01		Initial Release	

---


**REPORT INDEX**

<b>1</b>	<b>EQUIPMENT (TEST ITEM) DESCRIPTION</b>	<b>5</b>
1.1	Photos – Equipment external	6
1.2	Photos – Equipment internal	9
1.3	Photos – Test setup	10
1.4	Supporting Equipment Used During Testing	11
1.5	Input / Output Ports	11
1.6	Operating Modes and Configurations	12
1.7	Test Equipment Used During Testing	13
1.8	Sample emission level calculation	14
<b>2</b>	<b>RESULT SUMMARY</b>	<b>15</b>
<b>3</b>	<b>TEST CONDITIONS AND RESULTS</b>	<b>16</b>
3.1	Test Conditions and Results – Radiated emissions	16
3.2	Test Conditions and Results – AC power line conducted emissions	27

## 1 Equipment (Test item) Description

<b>Description</b>	Programming and Maintenance Interface with Bluetooth	
<b>Model</b>	IFS-BT-PROG-ADAPTER	
<b>Additional Models</b>	None	
<b>Serial number</b>	None	
<b>Hardware version</b>	02	
<b>Software / Firmware version</b>	V1.0	
<b>Contains FCC-ID</b>	QDS-BRCM1078	
<b>Contains IC</b>	4324A-BRCM1078	
<b>Power supply</b>	3.3 VDC / 25mW	
<b>AC/DC-Adaptor</b>	Model : APS2250H Manufacturer : Ansmann Input : 100-240VAC / 50-60Hz Output : 24VDC / 1.0A	
<b>Radio module</b>	Type	BT Module
	Model	BCM20732S
	Manufacturer	Broadcom Corporation
	HW Version	see FCC approval
	SW Version	see FCC approval
	SVN	
	FCC-ID	QDS-BRCM1078
	IC	4324A-BRCM1078
	IMEI	
<b>Manufacturer</b>	Phoenix Contact GmbH & Co.KG Flachsmarktstrasse 8 32825 Blomberg Germany	
<b>Highest emission frequency</b>	2480 MHz	
<b>Device classification</b>	Class B	
<b>Equipment type</b>	Tabletop	
<b>Number of tested samples</b>	1	

1.1 Photos – Equipment external

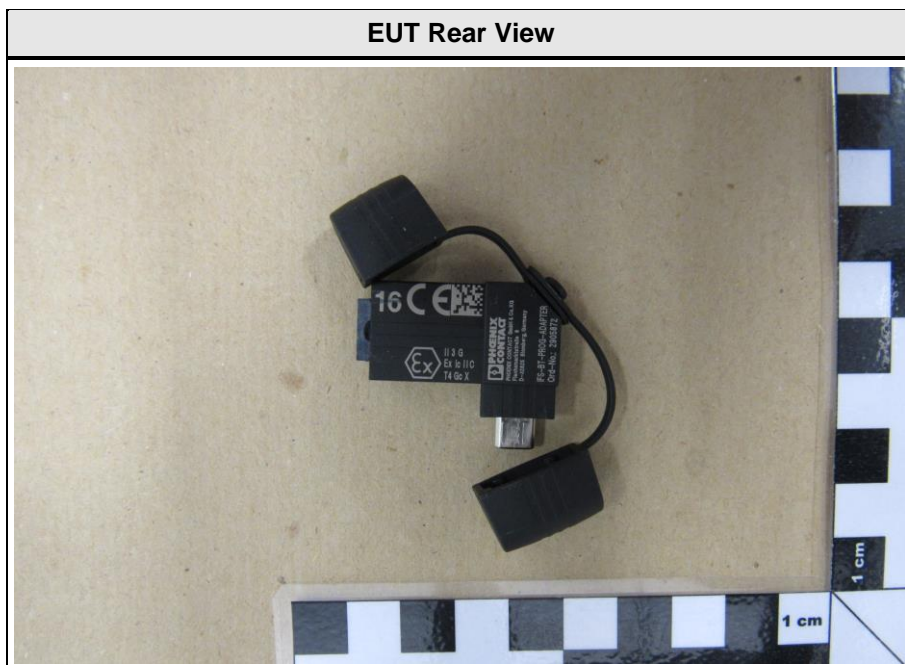




EUT Label





EUT Right View




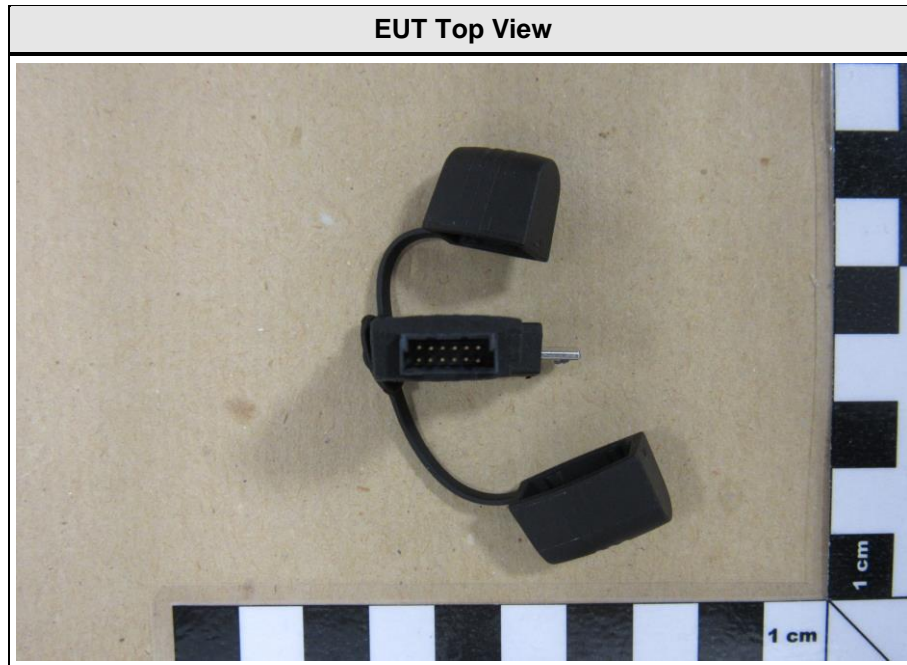




1.2 Photos – Equipment internal

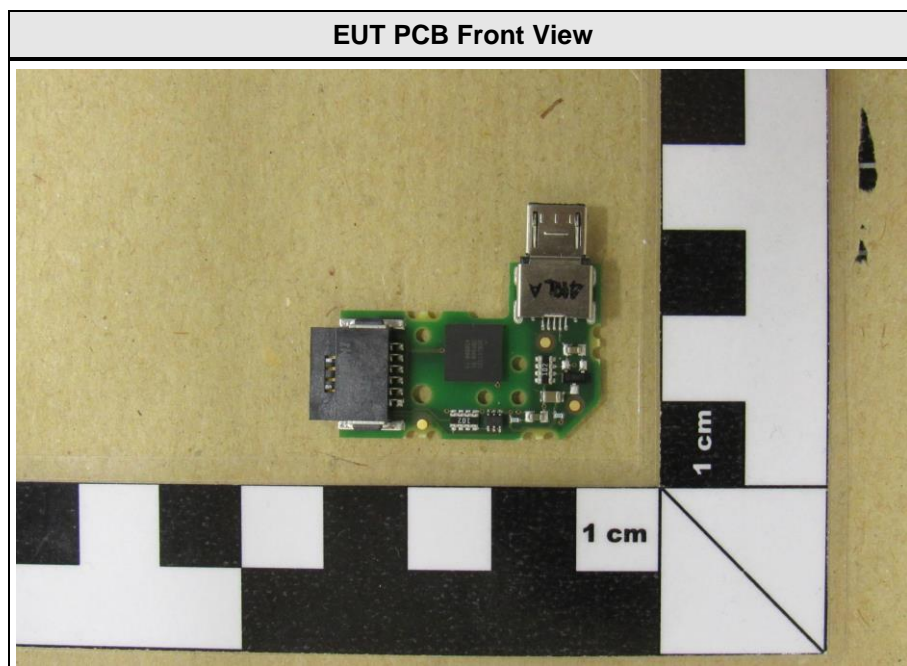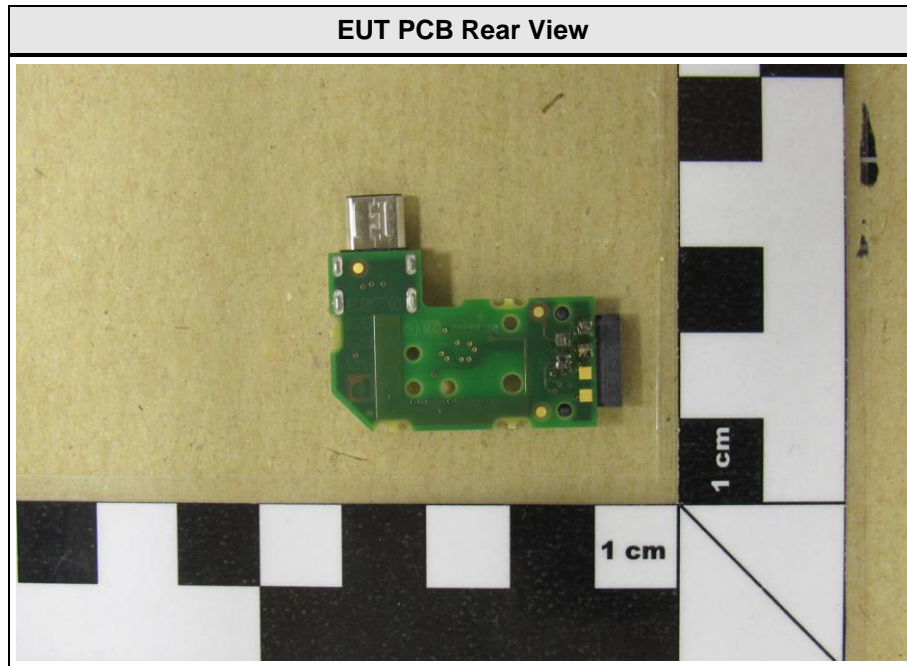

1.3 Photos – Test setup

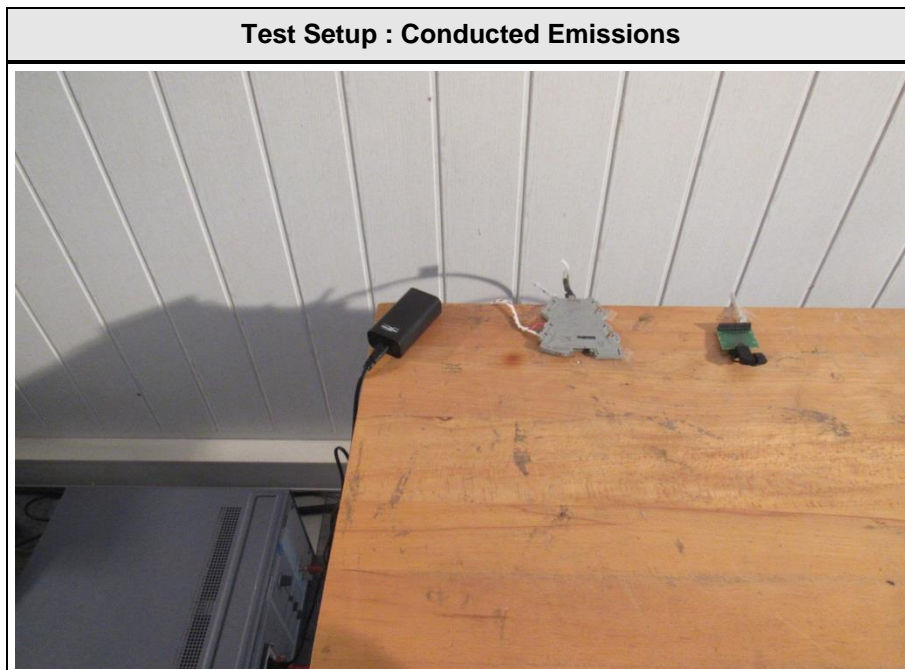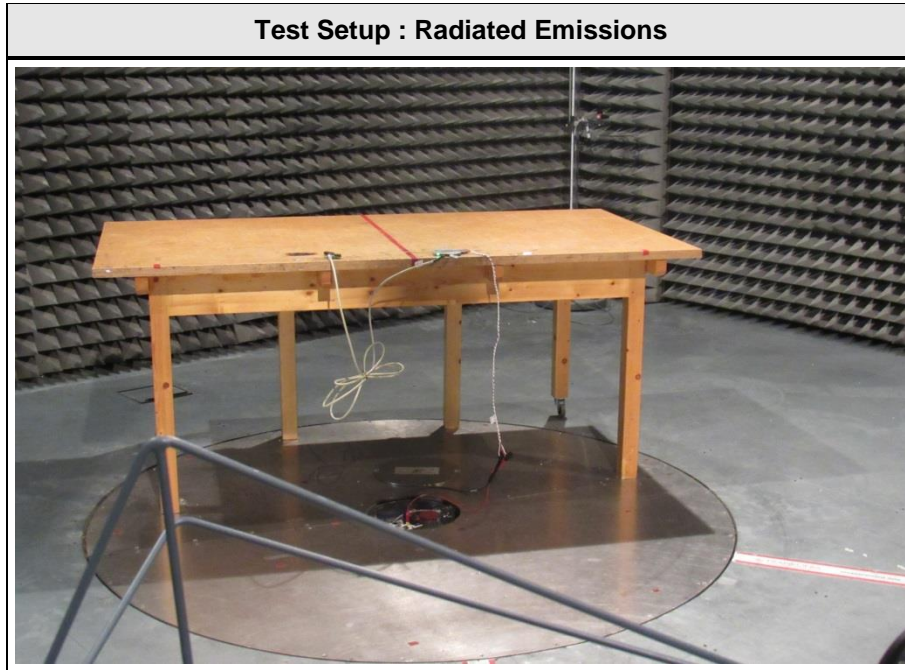

#### 1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments (e.g. serial no.)
AE	Support Unit	Phoenix Testlab	N/A	
AE	USB BT Adapter	bluegiga	BLED112	
AE	Laptop	Dell	Latitude	
None				
<p><b>*Note:</b> Use the following abbreviations:</p> <p>AE : Auxiliary/Associated Equipment, or</p> <p>SIM : Simulator (Not Subjected to Test)</p> <p>CABL : Connecting cables</p>				

#### 1.5 Input / Output Ports

Port #	Name	Type*	Max. Cable Length	Cable Shielded	Comments (e.g. Cat. of Cable)
1	USB	DC	>3m	yes	
2	SPI	I/O	N/A	no	
<p><b>*Note:</b> Use the following abbreviations:</p> <p>AC : AC power port</p> <p>DC : DC power port</p> <p>N/E : Non electrical</p> <p>I/O : Signal input or output port</p> <p>TP : Telecommunication port</p>					

## 1.6 Operating Modes and Configurations

Mode #	Description
1	Cont. receiving and sending

Configuration #	EUT Configuration
1	Fully equipped

**1.7 Test Equipment Used During Testing**

<b>Measurement Software</b>			
Description	Manufacturer	Name	Version
EMC Test Software	Dare Instruments	Radimation	2014.1.15

<b>Radiated emissions – 3m Chamber</b>					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Biconical Antenna	R&S	HK 116	EF00012	2016-05	2019-05
LPD-Antenne	R&S	HL 223	EF00187	2016-05	2019-05
Horn antenna	Schwarzbeck	BBHA 9120D	EF00018	2013-09	2016-09
EMI Test Receiver	R&S	ESU26	EF00887	2016-01	2017-01

<b>Conducted emissions</b>					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
AMN	R&S	ESH2-Z5	EF00182	2014-11	2016-11
AMN	R&S	ESH3-Z5	EF00036	2014-12	2016-12
AMN	Schwarzbeck	NSLK 8128	EF00975	2015-12	2016-12
EMI Test Receiver	R&S	ESR7	EF00943	2015-09	2016-09
EMI Test Receiver	Keysight	N9038A-526	EF01070	2015-08	2016-08
Cable	-	RG58/U	-	System Cal.	System Cal.

## 1.8 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dB $\mu$ V. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dB $\mu$ V/m). The FCC limits are given in units of  $\mu$ V/m. The following formula is used to convert the units of  $\mu$ V/m to dB $\mu$ V/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 * \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

$$\begin{array}{rclcl} \text{Reading} & + & \text{AF} & = & \text{Net Reading} & : & \text{Net reading - FCC limit} & = & \text{Margin} \\ 21.5 \text{ dB}\mu\text{V} & + & 26 \text{ dB} & = & 47.5 \text{ dB}\mu\text{V/m} & : & 47.5 \text{ dB}\mu\text{V/m} - 57.0 \text{ dB}\mu\text{V/m} & = & -9.5 \text{ dB} \end{array}$$



## 2 Result Summary

FCC 47 CFR Part 15B, Industry Canada ICES-003				
Product Specific Standard	Requirement – Test	Reference Method	Result	Remarks
47 CFR 15.109 ICES-003 Item 6.2	Radiated emissions	ANSI C 63.4	PASS	
47 CFR 15.107 ICES-003 Item 6.1	AC power line conducted emissions	ANSI C63.4	PASS	
<b>Remarks:</b>				

### 3 Test Conditions and Results

#### 3.1 Test Conditions and Results – Radiated emissions

Radiated emissions acc. FCC 47 CFR 15.109 / ICES-003		Verdict: PASS				
Laboratory Parameters:	Required prior to the test	During the test				
Ambient Temperature	15 to 35 °C	24 °C				
Relative Humidity	30 to 60 %	37 %				
Test according referenced standards	Reference Method					
	ANSI C63.4					
Sample is tested with respect to the requirements of the equipment class	Equipment class					
	Class B					
Test frequency range determined from highest emission frequency	Highest emission frequency					
	2480 MHz80					
Fully configured sample scanned over the following frequency range	Frequency range					
	30 MHz to 12.48 GHz					
Operating mode	1					
Configuration	1					
Limits and results Class B						
Frequency [MHz]	Quasi-Peak [dBµV/m]	Result	Average [dBµV/m]	Result	Peak [dBµV/m]	Result
30 – 88	40	PASS	-		-	-
88 – 216	43.5	PASS	-		-	-
216 – 960	46	PASS	-		-	-
960 – 1000	54	PASS	-		-	-
> 1000	-	-	54	PASS	74	PASS
Comments:						

**Test Procedure:**

The test site is in accordance with ANSI C63-4:2014 requirements and is listed by FCC.  
The measurement procedure is as follows:

## Exploratory measurement:

- The EUT was placed on a non-conductive table at a height of 0.8m.
- The EUT and support equipment, if needed, were set up to simulate typical usage.
- Cables, of type and length specified by the manufacturer, were connected to at least one port of each type and were terminated by a device or simulating load of actual usage.
- The antenna was placed at a distance of 3 or 10 m.
- The received signal was monitored at the measurement receiver.
  - Cables not bundled were manipulated within the range of likely arrangements to produce the highest emission amplitude
  - To maximize the suspected emissions the EUT is rotated 360 degrees. If the signal exceeds the previous amplitude, go back to the corresponding azimuth and manipulate the cables again for maximizing the emissions if possible.
  - Move the antenna from 1 to 4m to maximize the suspected highest amplitude signal.
- This procedure has to be performed in both antenna polarizations, horizontal and vertical.
- The arrangement of the equipment with the maximum emission level is shown on the setup picture at item 1.3.

## Final measurement:


- The EUT was placed on a 0.8 m non-conductive table at a 3 m distance from the receive antenna. The antenna output was connected to the measurement receiver
- A biconical antenna was used for the frequency range 30 – 200 MHz, a logarithmic periodical antenna was used for the frequency range from 200 – 1000 MHz. Above one 1 GHz a Double Ridged Broadband Horn antenna was used. The antenna was placed on an adjustable height antenna mast
- The EUT and cable arrangement were based on the exploratory measurement results
- Emissions were maximized at each frequency by rotating the EUT and adjusting the receive antenna height and polarization. The maximum values were recorded.
- The test data of the worst-case conditions were recorded and shown on the next pages.

**Spurious emissions under normal conditions according to FCC 15B**

Project number: G0M-1604-5541

Applicant: PHOENIX TESTLAB GmbH  
 EUT Name: USB Bluetooth Low EnergyAdapter  
 Model: IFS-BT-PROG-ADAPTER  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Handrik  
 Test Conditions: Tnom: 24°C, Unom: 3,3 VDC  
 Antenna: Rohde & Schwarz HK 116, Vertical  
 Measurement distance: 3m  
 Mode: Normal Mode  
 Test Date: 2016-06-28  
 Note:

Index 3

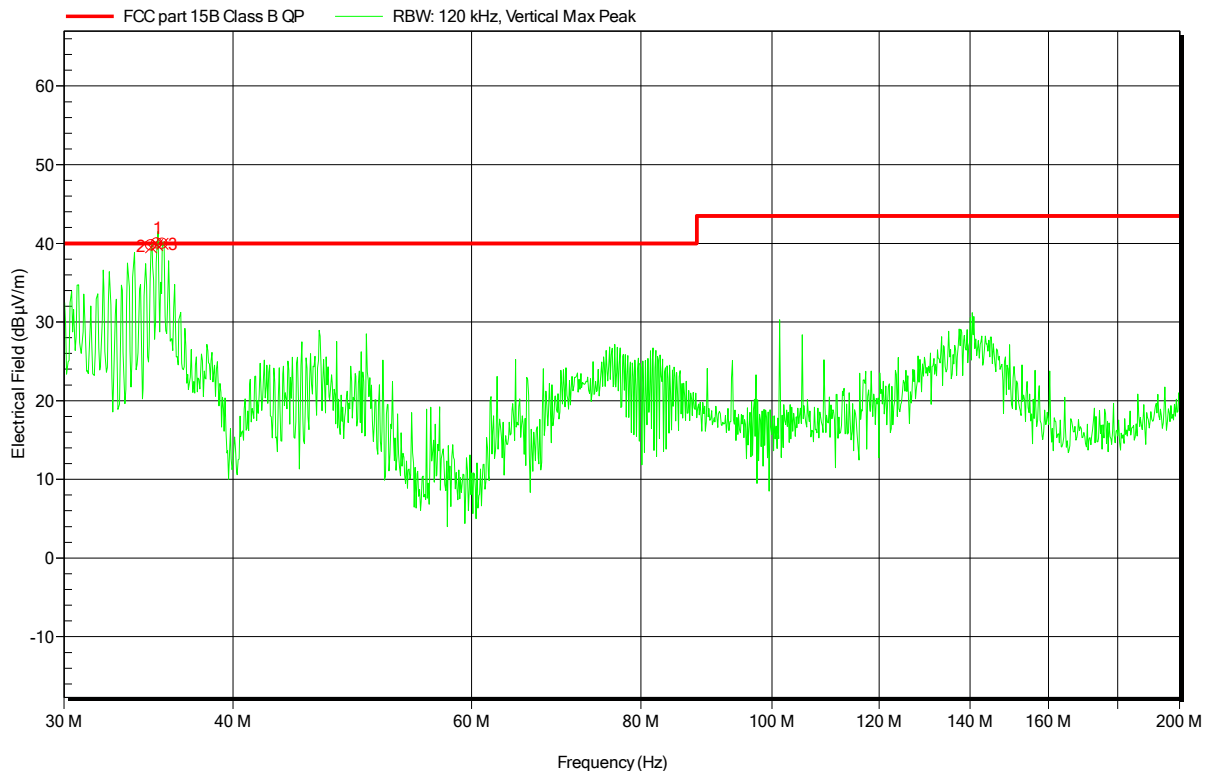


Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height
1	35.148 MHz	39.78 dBµV/m	40 dBµV/m	-0.22 dB	Pass	0 Degree	1 m
2	34.8 MHz	39.5 dBµV/m	40 dBµV/m	-0.5 dB	Pass	0 Degree	1 m
3	35.484 MHz	39.95 dBµV/m	40 dBµV/m	-0.05 dB	Pass	0 Degree	1 m

**Spurious emissions under normal conditions according to FCC 15B**

Project number: G0M-1604-5541

Applicant:	PHOENIX TESTLAB GmbH
EUT Name:	USB Bluetooth Low EnergyAdapter
Model:	IFS-BT-PROG-ADAPTER
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Handrik
Test Conditions:	Tnom: 24°C, Unom: 3,3 VDC
Antenna:	Rohde & Schwarz HK 116, Horizontal
Measurement distance:	3m
Mode:	Normal Mode
Test Date:	2016-06-28
Note:	

Index 4

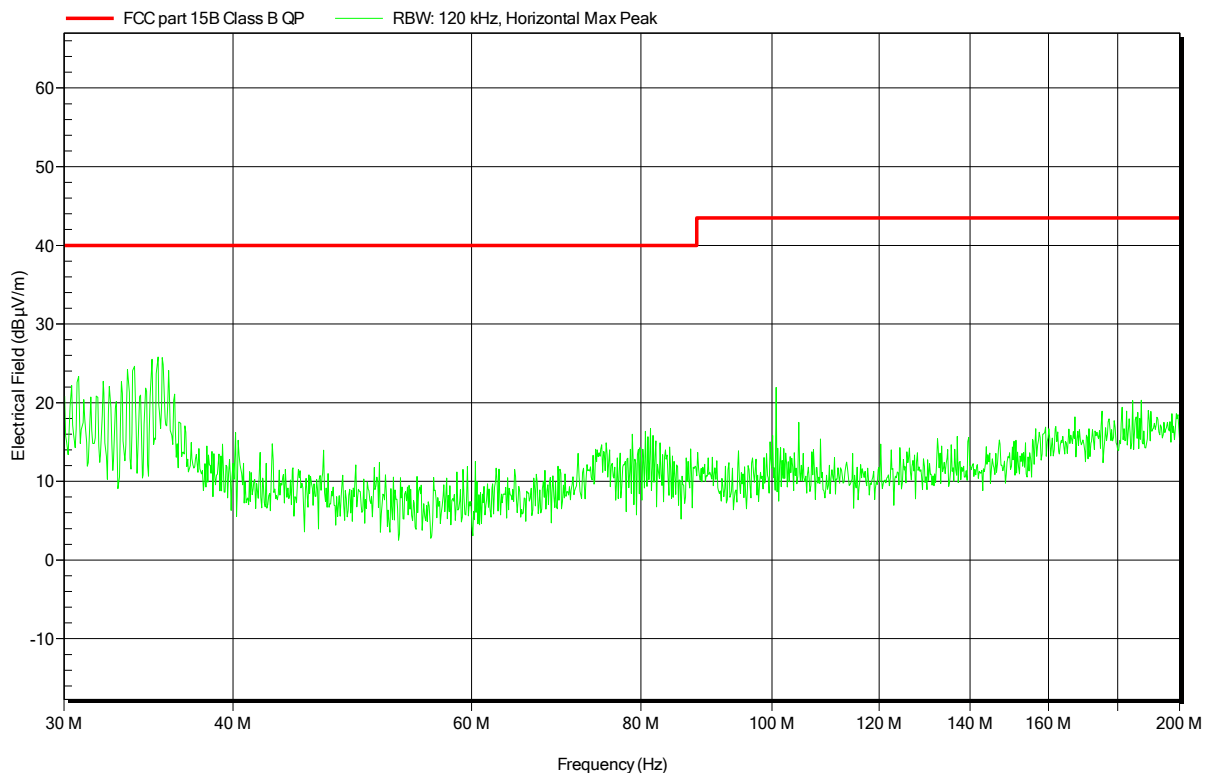


**Spurious emissions under normal conditions according to FCC 15B**

Project number: G0M-1604-5541

Applicant:	PHOENIX TESTLAB GmbH
EUT Name:	USB Bluetooth Low EnergyAdapter
Model:	IFS-BT-PROG-ADAPTER
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Handrik
Test Conditions:	Tnom: 24°C, Unom: 3,3 VDC
Antenna:	Rohde & Schwarz HL 223, Vertical
Measurement distance:	3m
Mode:	Normal Mode
Test Date:	2016-06-28
Note:	

Index 5

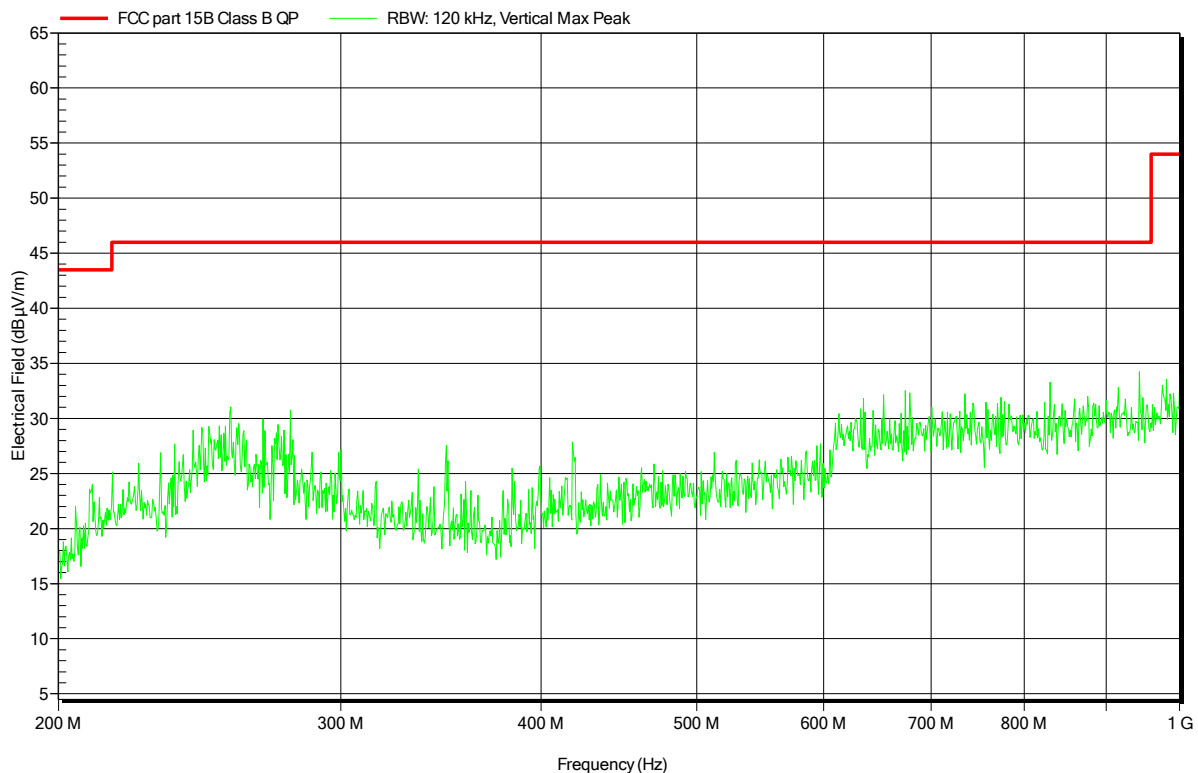




**Spurious emissions under normal conditions according to FCC 15B**

Project number: G0M-1604-5541

Applicant:	PHOENIX TESTLAB GmbH
EUT Name:	USB Bluetooth Low EnergyAdapter
Model:	IFS-BT-PROG-ADAPTER
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Handrik
Test Conditions:	Tnom: 24°C, Unom: 3,3 VDC
Antenna:	Rohde & Schwarz HL 223, Horizontal
Measurement distance:	3m
Mode:	Normal Mode
Test Date:	2016-06-28
Note:	

Index 6

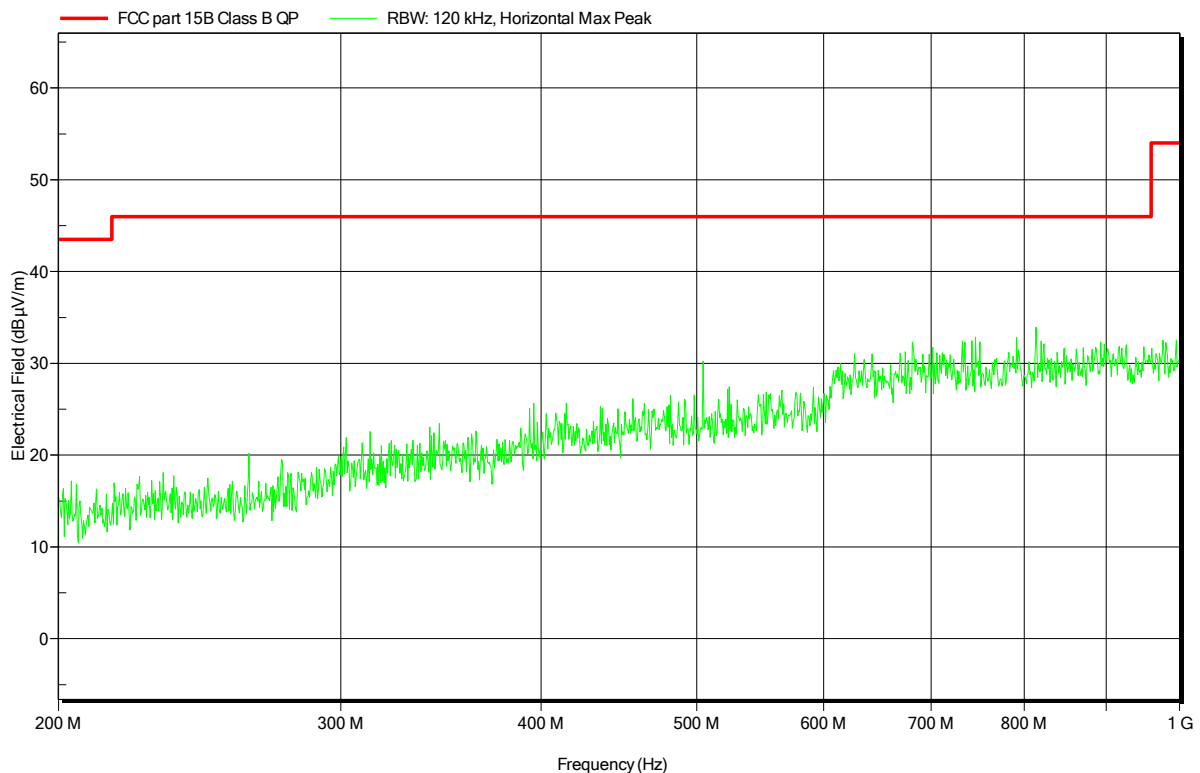


**Spurious emissions under normal conditions according to FCC 15B**

Project number: G0M-1604-5541

Applicant: PHOENIX TESTLAB GmbH  
 EUT Name: USB Bluetooth Low EnergyAdapter  
 Model: IFS-BT-PROG-ADAPTER  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Handrik  
 Test Conditions: Tnom: 24°C, Unom: 3,3 VDC  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 3m  
 Mode: Normal Mode  
 Test Date: 2016-06-28  
 Note:

Index 8

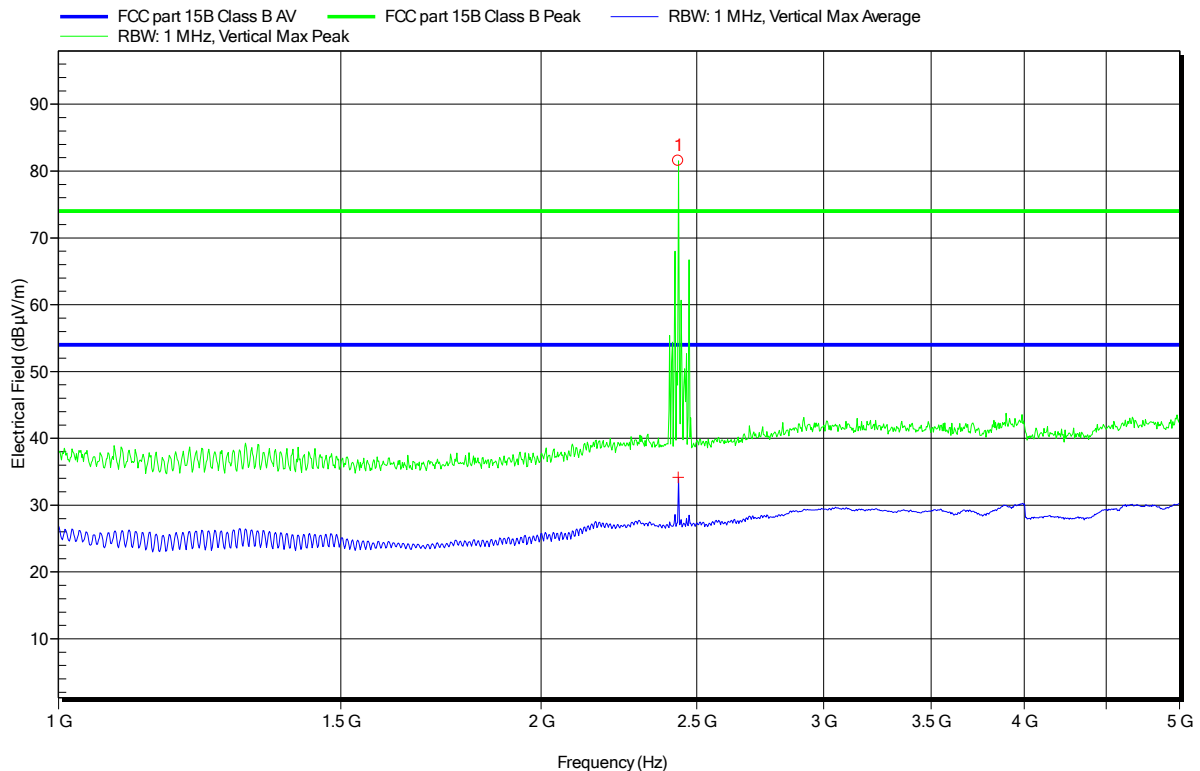


Peak Number	Frequency	BT carrier
1	2.435 GHz	BT carrier

**Spurious emissions under normal conditions according to FCC 15B**

Project number: G0M-1604-5541

Applicant: PHOENIX TESTLAB GmbH  
 EUT Name: USB Bluetooth Low Energy Adapter  
 Model: IFS-BT-PROG-ADAPTER  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Handrik  
 Test Conditions: Tnom: 24°C, Unom: 3,3 VDC  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 3m  
 Mode: Normal Mode  
 Test Date: 2016-06-28  
 Note:

Index 9

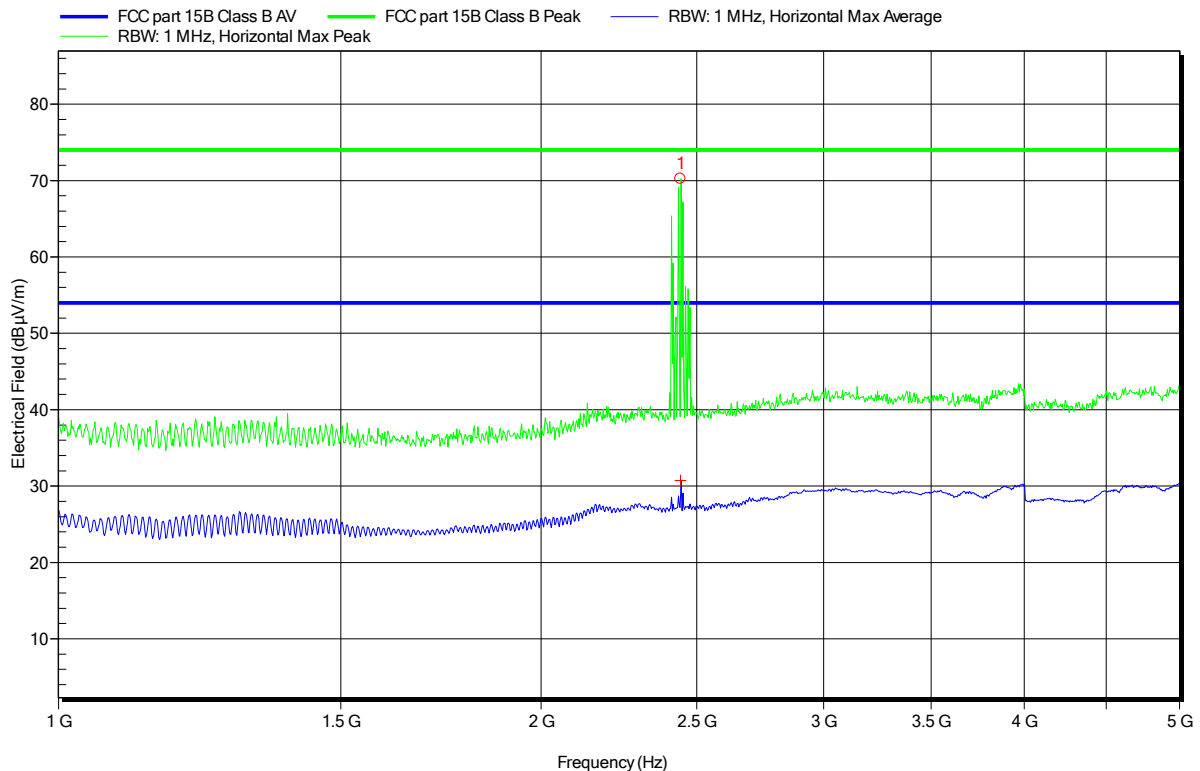

Peak Number	Frequency	BT carrier
1	2.442 GHz	BT carrier




**Spurious emissions under normal conditions according to FCC 15B**

Project number: G0M-1604-5541

Applicant:	PHOENIX TESTLAB GmbH
EUT Name:	USB Bluetooth Low EnergyAdapter
Model:	IFS-BT-PROG-ADAPTER
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Laurisch
Test Conditions:	Tnom: 24°C, Unom: 3,3 VDC
Antenna:	ETS-Lindgren 3117, Horizontal
Measurement distance:	3 m
Mode:	Normal Mode
Test Date:	Mittwoch, 3. August 2016
Note:	

Index 10

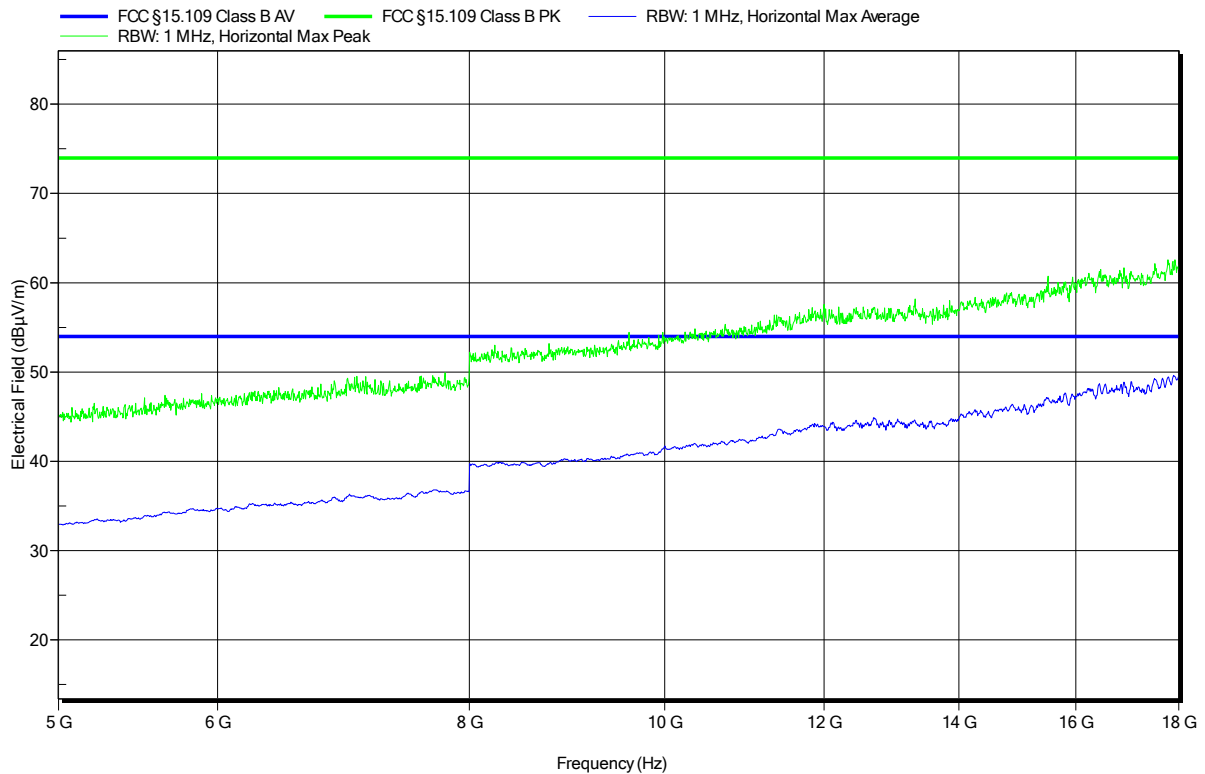


**Spurious emissions under normal conditions according to FCC 15B**

Project number: G0M-1604-5541

Applicant:	PHOENIX TESTLAB GmbH
EUT Name:	USB Bluetooth Low Energy Adapter
Model:	IFS-BT-PROG-ADAPTER
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Laurisch
Test Conditions:	Tnom: 24°C, Unom: 3,3 VDC
Antenna:	ETS-Lindgren 3117, Vertical
Measurement distance:	3 m
Mode:	Normal Mode
Test Date:	Mittwoch, 3. August 2016
Note:	

Index 11

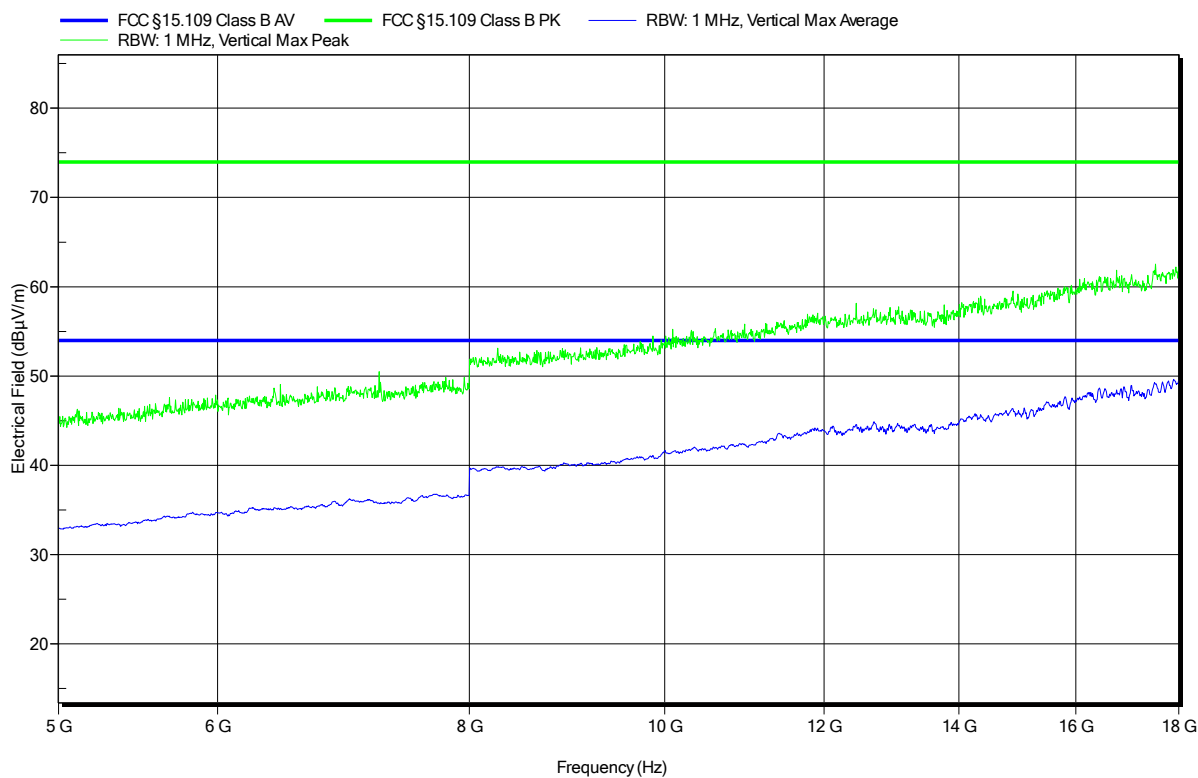



**3.2 Test Conditions and Results – AC power line conducted emissions**

<b>Conducted emissions acc. FCC 47 CFR 15.107 / ICES-003</b>		<b>Verdict: PASS</b>		
Laboratory Parameters:		Required prior to the test		During the test
Ambient Temperature		15 to 35 °C		24 °C
Relative Humidity		30 to 60 %		37 %
Test according referenced standards		Reference Method		
		ANSI C63.4		
Fully configured sample scanned over the following frequency range		Frequency range		
		0.15 MHz to 30 MHz		
Sample is tested with respect to the requirements of the equipment class		Equipment class		
		Class B		
Points of Application		Application Interface		
AC Mains		LISN		
Operating mode		1		
Configuration		1		
<b>Limits and results Class B</b>				
Frequency [MHz]	Quasi-Peak [dB $\mu$ V]	Result	Average [dB $\mu$ V]	Result
0.15 to 5	66 to 56*	PASS	56 to 46*	PASS
0.5 to 5	56	PASS	46	PASS
5 to 30	60	PASS	50	PASS
Comments:				
* Limit decreases linearly with the logarithm of the frequency.				

**Test Procedure:**

The test site is in accordance with ANSI C63-4:2014 requirements and is listed by FCC.  
The measurement procedure is as follows:

## Exploratory measurement:

- The EUT was placed on a non conductive table 0.8 m above the reference ground plane and 0.4 m away from the vertical conducting plane (ANSI C63.4: 2014 item 7.3.1)
- The power cord that is normally supplied or recommended by the manufacturer was connected to the LISN.
- The distance between the outer edge of the EUT and the LISN shall be set to 0.8 m. A longer power cord shall be bundled to this length (bundling shall not exceed 40 cm in length).
- The LISN measurement port was connected to a measurement receiver
- I/O cables were bundled not longer than 0.4 m
- Measurement was performed in the frequency range 0.15 – 30MHz on each current-carrying conductor
- To maximize the emissions the cable positions were manipulated
- The worst configuration of EUT and cables is shown on a test setup picture at item 1.3

**Test Procedure:**

## Final measurement:


- The EUT was placed on a non conductive table 0.8 m above the reference ground plane and 0.4 m away from the vertical conducting plane (ANSI C63.4: 2014 item 7.3.1)
- The power cord that is normally supplied or recommended by the manufacturer was connected to the LISN.
- The distance between the outer edge of the EUT and the LISN shall be set to 0.8 m. A longer power cord shall be bundled to this length (bundling shall not exceed 40 cm in length).
- The LISN measurement port was connected to a measurement receiver
- The EUT and cable arrangement were based on the exploratory measurement results
- The test data of the worst-case conditions were recorded and shown on the next pages.

**EMI voltage test in the ac-mains according to FCC 15B**

Project number: G0M-1604-5541

Applicant: PHOENIX TESTLAB GmbH  
 EUT Name: USB Bluetooth Low EnergyAdapter  
 Model: IFS-BT-PROG-ADAPTER  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Laurisch  
 Test Conditions: Tnom: 24°C, Unom: 120 VAC  
 LISN: ESH2-Z5 N  
 Mode: 1  
 Test Date: 2016-06-27  
 Note:

Index 1

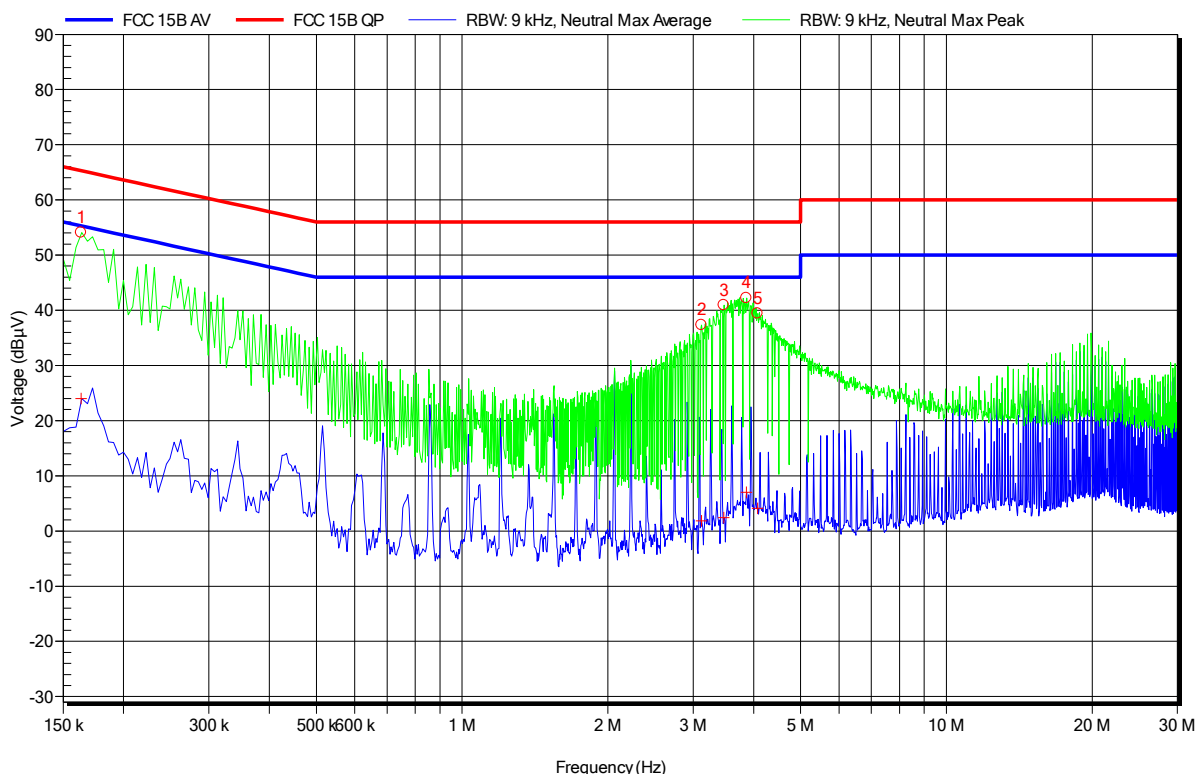

Peak Number	Frequency
1	163.5 kHz
2	3.12 MHz
3	3.471 MHz
4	3.863 MHz
5	4.074 MHz

Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status
1	163.5 kHz	24.01 dBµV	55.28 dBµV	-31.27 dB	Pass
2	3.12 MHz	1.83 dBµV	46 dBµV	-44.17 dB	Pass
3	3.471 MHz	2.4 dBµV	46 dBµV	-43.6 dB	Pass
4	3.863 MHz	7.02 dBµV	46 dBµV	-38.98 dB	Pass
5	4.074 MHz	4.1 dBµV	46 dBµV	-41.9 dB	Pass

Test Report No.: G0M-1604-5541-EF0115B-V01


 Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

**EMI voltage test in the ac-mains according to FCC 15B**

Project number: G0M-1604-5541

Applicant: PHOENIX TESTLAB GmbH  
 EUT Name: USB Bluetooth Low EnergyAdapter  
 Model: IFS-BT-PROG-ADAPTER  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Laurisch  
 Test Conditions: Tnom: 24°C, Unom: 120VAC  
 LISN: ESH2-Z5 L  
 Mode: 1  
 Test Date: 2016-06-27  
 Note:

Index 2

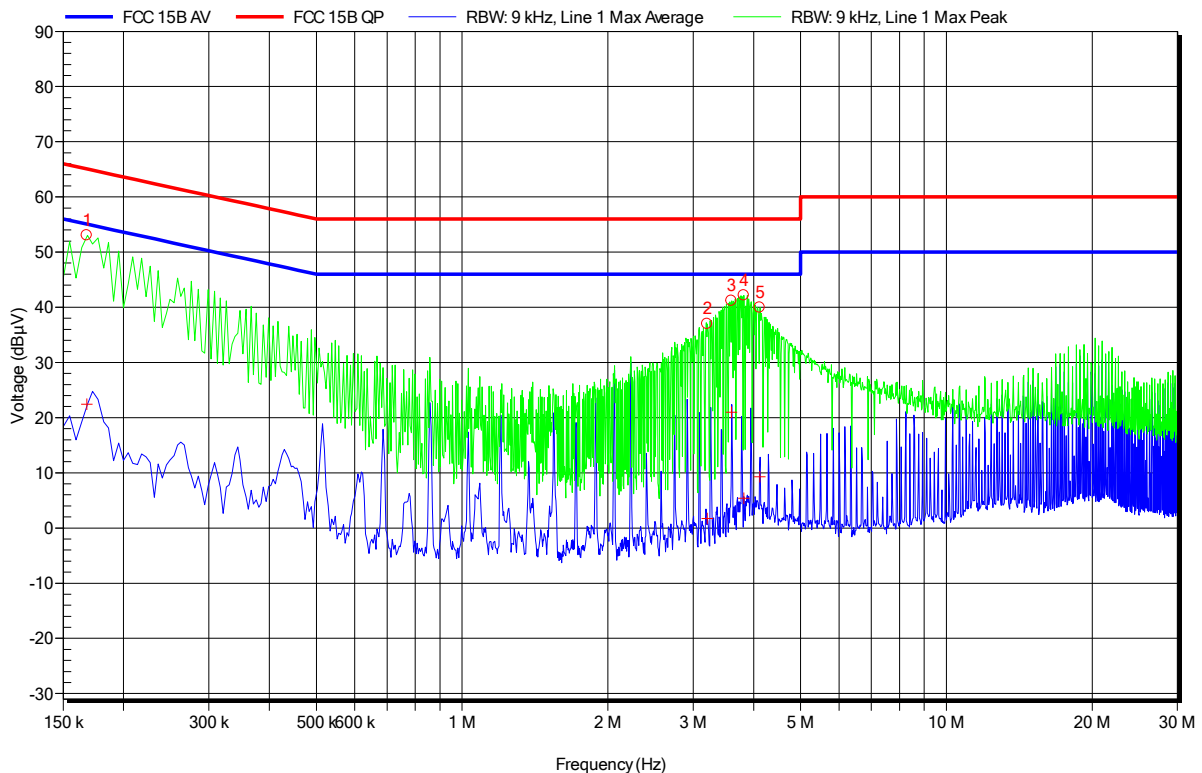

Peak Number	Frequency
1	168 kHz
2	3.206 MHz
3	3.597 MHz
4	3.818 MHz
5	4.119 MHz

Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status
1	168 kHz	22.43 dBµV	55.06 dBµV	-32.62 dB	Pass
2	3.206 MHz	1.74 dBµV	46 dBµV	-44.26 dB	Pass
3	3.597 MHz	20.98 dBµV	46 dBµV	-25.02 dB	Pass
4	3.818 MHz	5.4 dBµV	46 dBµV	-40.6 dB	Pass
5	4.119 MHz	9.31 dBµV	46 dBµV	-36.69 dB	Pass