

Test Report

Report Number:

F220998E3

Equipment under Test (EUT):

NEARFI P 2A R

Applicant:

PHOENIX CONTACT Electronics GmbH

Manufacturer:

PHOENIX CONTACT GmbH & Co.KG



Deutsche
Akkreditierungsstelle
D-PL-17186-01-00

References

- [1] **CFR 47 Rule part 1** Practice and Procedure
- [2] **CFR 47 Rule part 2** Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
- [3] **KDB 447498 D04** Interim General RF Exposure Guidance v01
- [4] **KDB 680106 D01** Wireless Power Transfer v04

Test Result

The requirements of the tests performed as shown in the results (clause 3) were fulfilled by the equipment under test. The complete test results are presented in the following.

“Passed” indicates that the equipment under test conforms with the relevant limits of the testing standard without taking any measurement uncertainty into account. However, the measurement uncertainty is calculated and shown in this test report.

Tested and written
by:

Signature

Reviewed and
approved by:

Signature

This test report is only valid in its original form.

Any reproduction of its contents in extracts without written permission of the accredited test laboratory PHOENIX TESTLAB GmbH is prohibited.

The test results herein refer only to the tested sample. PHOENIX TESTLAB GmbH is not responsible for any generalisations or conclusions drawn from these test results concerning further samples. Any modification of the tested samples is prohibited and leads to the invalidity of this test report. Each page necessarily contains the PHOENIX TESTLAB Logo and the TEST REPORT NUMBER.

| Contents: | Page |
|---|-------------|
| 1 Identification | 4 |
| 1.1 Applicant..... | 4 |
| 1.2 Manufacturer | 4 |
| 1.3 Test Laboratory | 4 |
| 1.4 EUT (Equipment under Test) | 5 |
| 1.5 Technical Data of Equipment | 5 |
| 1.6 Dates | 6 |
| 2 Evaluation method | 7 |
| 2.1 RF exposure test exemptions for single sources | 7 |
| 2.1.1 General Exemption CFR 47 §1.1307(b)(3)(i)(A) | 7 |
| 2.1.2 SAR Based Exemption CFR 47 §1.1307(b)(3)(i)(B)..... | 7 |
| 2.1.3 MPE Based Exemption CFR 47 §1.1307(b)(3)(i)(C) | 7 |
| 2.1.4 Stand alone MPE evaluation limits | 8 |
| 2.2 RF exposure test exemptions for simultaneous transmission sources | 9 |
| 2.2.1 1 mW Test Exemption for simultaneous transmission sources..... | 9 |
| 2.2.2 Simultaneous transmission SAR based and MPE based test exemptions | 9 |
| 2.2.3 Test exemption based on the SAR to Peak Location Separation Ratio | 10 |
| 3 Results of evaluation..... | 11 |
| 3.1 Used evaluation methods..... | 11 |
| 3.2 Evaluation Distance..... | 11 |
| 3.3 Measurement of E field strength from the client..... | 12 |
| 3.4 Measurement of H field strength from the client | 13 |
| 3.5 Measurement of E field strength from the client with source at minimum distance | 14 |
| 3.6 Measurement of H field strength from the client with source at minimum distance | 15 |
| 3.7 Measurement of E field strength from the client with source at maximum distance | 16 |
| 3.8 Measurement of H field strength from the client with source at maximum distance | 17 |
| 4 Conclusion | 18 |
| 5 Test Equipment used for Tests | 18 |
| 6 Measurement uncertainties..... | 18 |
| 7 Report History..... | 18 |

1 Identification

1.1 Applicant

| | |
|--|--|
| Name: | PHOENIX CONTACT Electronics GmbH |
| Address: | Dringenauer Straße 30, 31812 Bad Pyrmont |
| Country: | Germany |
| Name for contact purposes: | Maik STEMME |
| Phone: | +49 5281 946 3381 |
| eMail address: | mstemme@phoenixcontact.com |
| Applicant represented during the test by the following person: | - |

1.2 Manufacturer

| | |
|---|-----------------------------------|
| Name: | PHOENIX CONTACT GmbH & Co.KG |
| Address: | Flachsmarktstr. 8, 32825 Blomberg |
| Country: | Germany |
| Name for contact purposes: | Maik STEMME |
| Phone: | +49 5281 946 3381 |
| eMail address: | mstemme@phoenixcontact.com |
| Manufacturer represented during the test by the following person: | - |

1.3 Test Laboratory

The tests were carried out by: **PHOENIX TESTLAB GmbH**
Königswinkel 10
32825 Blomberg
Germany

Accredited by Deutsche Akkreditierungsstelle GmbH (DAkS) in compliance with DIN EN ISO/IEC 17025 under Reg. No. D-PL-17186-01-06, FCC Test Firm Designation Number DE0004, FCC Test Firm Registration Number 469623.

1.4 EUT (Equipment under Test)

| | |
|-------------------|-------------------------|
| Test object: * | Energy coupler (Remote) |
| Model name: * | NEARFI P 2A R |
| Article number: * | 1234229 |
| Serial number: * | 2036305587 |
| FCC ID: * | YG3P2AR |

* Declared by the applicant

Only one EUT and one ancillary equipment was used for the tests.

Note: PHOENIX TESTLAB GmbH does not take samples. The samples used for tests are provided exclusively by the applicant.

1.5 Technical Data of Equipment

| General: | | | |
|---------------------------------------|--|---------------|---------------|
| PCB identifier: * | 1184502_03 (Data PCB), 30007751 (Interface PCB), 30007726 (Energy PCB) | | |
| Power supply client (EUT): * | DC | | |
| Supply voltage client (EUT): * | $U_{nom} = -$ | $U_{min} = -$ | $U_{max} = -$ |
| Power supply client (EUT): * | DC via WPT from source only | | |
| Temperature range: * | -20 °C to +65 °C | | |
| Distance between source and client: * | 0 mm to 10 mm | | |
| Max. output of the client: * | 24 V _{DC} with 2 A _{DC} (with all distances between source and client) | | |
| Safety distance in operation: * | 30 cm | | |

* Declared by the applicant

| Energy transfer part EUT (client): | |
|------------------------------------|-------------------------|
| Receiver frequency: * | 100 kHz - 148 kHz |
| Number of channels: * | - |
| Type of modulation: * | None, EUT is a receiver |
| Data rate: * | None |
| Duty cycle: * | 100 % |
| Antenna type: * | Internal coil |
| Antenna connector: * | None |

* Declared by the applicant

| Energy communication part EUT (client) | |
|--|-----------------------|
| Transmitter frequency range: * | 8.95 MHz to 11.05 MHz |
| Receiver bandwidth: * | 2.1 MHz |
| Type of modulation: * | OOK |

* Declared by the applicant

| Ports/Connectors | | | |
|------------------|------------------------|----------------------|--------|
| Identification | Connector | | Length |
| Port | NEARFI P 2A R (client) | Ancillary | |
| Power out | 5 pole M12 connector | 4 mm laboratory plug | 3.0 m |

*: Length during the test

| Ancillaries used for testing | | |
|--|--|--------------------------------|
| Ancillary | Description | |
| Laptop PC with measuring software * ² | Fujitsu Lifebook S761 with Narda EHP200-TV Rel. 1.91 | |
| Source * ¹ | Test object: * | Energy and data coupler (Base) |
| | Model name: * | NEARFI P 2A B |
| | Article number: * | 1234226 |
| | Serial number: * | 2036305586 |
| | FCC ID: * | YG3P2AB |
| | Connector: * | 5 pole M12 connector |
| | Length during test: * | 3 m |

*: Declared by the applicant

*¹: Supplied by the applicant

*²: Supplied by the laboratory

1.6 Dates

| | |
|---------------------------------|------------|
| Date of receipt of test sample: | 13.06.2022 |
| Start of test: | 06.12.2023 |
| End of test: | 06.12.2023 |

2 Evaluation method

2.1 RF exposure test exemptions for single sources

2.1.1 General Exemption CFR 47 §1.1307(b)(3)(i)(A)

The available maximum time-averaged power is no more than 1 mW, regardless of separation distance. This exemption may not be used in conjunction with other exemption criteria other than those in [paragraph \(b\)\(3\)\(ii\)\(A\)](#) of this section. Medical implant devices may only use this exemption and that in paragraph (b)(3)(ii)(A);

2.1.2 SAR Based Exemption CFR 47 §1.1307(b)(3)(i)(B)

The available maximum time-averaged power of effective radiated power (ERP), whichever is greater, is less than or equal to the threshold P_{th} (mW) described in the following formula. This method shall only be used at separation distances (cm) from 0.5 cm to 40 cm and at frequencies from 0.3 GHz to 6 GHz inclusive.

For the following separation distances [d] and frequency ranges P_{th} is given by the following formulas

| | 0.5 cm ≤ d ≤ 20cm | 20 cm < d ≤ 40 cm |
|-----------------------|--|---|
| 0.2 GHz ≤ f < 1.5 GHz | $P_{th}(mW) = ERP_{20cm} \left(\frac{d}{20} \right)^x$ $ERP_{20cm} (mW) = 2040f$ $x = -\log_{10} \left(\frac{60}{ERP_{20cm} \sqrt{f}} \right)$ | $P_{th}(mW) = ERP_{20cm}$ $ERP_{20cm} (mW) = 2040f$ |
| 1.5 GHz ≤ f ≤ 6 GHz | $P_{th}(mW) = ERP_{20cm} \left(\frac{d}{20} \right)^x$ $ERP_{20cm} (mW) = 3060$ $x = -\log_{10} \left(\frac{60}{ERP_{20cm} \sqrt{f}} \right)$ | $P_{th}(mW) = ERP_{20cm}$ $ERP_{20cm} (mW) = 3060$ |

2.1.3 MPE Based Exemption CFR 47 §1.1307(b)(3)(i)(C)

By using Table 1 and the minimum separation distance (d in meters) from the body of a nearby person for the frequency (f in MHz) at which the source operates, the ERP (watts) is no more than the calculated value prescribed for that frequency. For the exemption in Table 1 to apply, d must be at least $\lambda/2\pi$, where λ is the free-space operating wavelength in meters. If the ERP of a single RF source is not easily obtained, then the available maximum time-averaged power may be used in lieu of ERP if the physical dimensions of the radiating structure(s) do not exceed the electrical length of $\lambda/4$ or if the antenna gain is less than that of a half-wave dipole (1.64 linear value).

| RF Source frequency [MHz] | Threshold ERP [W] |
|---------------------------|-------------------------------------|
| 0.3 - 1.34 | 1920 d ² |
| 1.34 – 30 | 3450 d ² /f ² |
| 30 – 300 | 3.83 d ² |
| 300 – 1500 | 0.0128 d ² /f |
| 1500 - 100000 | 19.2 d ² |

d: Minimal separation distance from antenna to the user

2.1.4 Stand alone MPE evaluation limits

The human exposure to RF emissions from such devices could be evaluated based on the MPE limits adopted by the FCC for electric and magnetic field strength and / or power density. The limits for General Population / Uncontrolled Exposure are given in the following table from CFR 47 §1.1310(e)1:

| Frequency range [MHz] | Electric field strength (E) [V/m] | Magnetic field strength (H) [A/m] | Power density (S) [mW/cm ²] | Averaging time [min] |
|---|---|---|--|-------------------------|
| (i)Limits for Occupational/Controlled Exposure | | | | |
| 0.3 – 3.0 | 614 | 1.63 | *(100) | ≤6 |
| 3.0 – 30 | 1842/f | 4.89/f | *(900/f ²) | <6 |
| 30 – 300 | 61.4 | 0.163 | 1.0 | <6 |
| 300 – 1,500 | | | f/300 | <6 |
| 1,500 – 100,000 | | | 5 | <6 |
| (ii)Limits for General Population / Uncontrolled Exposure | | | | |
| 0.3 – 1.34 | 614 | 1.63 | *(100) | < 30 |
| 1.34 – 30 | 824/f | 2.19/f | *(180/f ²) | < 30 |
| 30 – 300 | 27.5 | 0.073 | 0.2 | < 30 |
| 300 – 1500 | | | f/1500 | < 30 |
| 1500 – 100,000 | | | 1.0 | < 30 |

Note: f = frequency in MHz; * Plane – wave equivalent power density

The power density is calculated as follows:

$$S = \frac{P \cdot G \cdot D}{4 \cdot \pi \cdot d^2}$$

Where:

P: conducted power

G: Antenna gain (linear)

D: Duty Cycle

d: Minimal separation distance from antenna to the user

2.2 RF exposure test exemptions for simultaneous transmission sources

2.2.1 1 mW Test Exemption for simultaneous transmission sources

As discussed in CFR 47 §1.1307(b)(3)(ii)(A) [1] the 1 mW exemption intended for single transmitters may be also applied to simultaneous transmission conditions, within the same host device, according one of the following criteria:

- a. When the maximum available power each individual transmitting antenna with the same time averaging period is ≤ 1 mW, and the nearest parts of the antenna structures of the simultaneously operating transmitters are separated by at least 2 cm
- b. When the aggregate maximum available power of all transmitting antennas is ≤ 1 mW in the same time-averaging period

This exemption may not be combined with any other exemption.

2.2.2 Simultaneous transmission SAR based and MPE based test exemptions

Although this is not a module integration in the sense of product approval, the procedure for simultaneous transmission specified in KDB 447498 D04 Interim General RF Exposure Guidance v01 [3] in chapter 2.2 was taken into account:

According to the RF exposure KDB 447498 D04 General RF Exposure Guidance v01 [3] in chapter 2.2.2: This case is described in detail in CFR 47 §1.1307(b)(3)(ii)(B) and covers the situations where both SAR-based and MPE-based exemption may be considered for test exemption in fixed, mobile, or portable device exposure conditions. For these cases, a device with multiple RF sources transmitting simultaneously will be considered an RF exempt device if the condition of the following formula is satisfied.

$$\sum_{i=1}^a \frac{P_i}{P_{th,i}} + \sum_{j=1}^b \frac{ERP_j}{ERP_{th,j}} + \sum_{k=1}^c \frac{Evaluated_k}{Exposure Limit_k} \leq 1$$

For these test exemptions to apply, the maximum output power, duty factor, and other applicable parameters used in the standalone ERP determination tests, must be the same, or corresponding to a more conservative choice, than those required for simultaneous transmission.

Simultaneous transmission MPE test exclusion applies when the sum of the MPE ratios for all simultaneously transmitting antennas incorporated in a host device is ≤ 1.0 , according to calculated/estimated, numerically modelled, or measured field strengths or power density. The MPE ratio of each antenna is determined at the minimum test separation distance required by the operating configurations and exposure conditions of the host device, according to the ratio of field strengths or power density to the MPE limit at the test frequency.

2.2.3 Test exemption based on the SAR to Peak Location Separation Ratio

When the ERP-based condition in the previous section does not apply, a test exemption may be still applicable based on the SAR to peak location separation ratio (SPLSR) procedure.

In this case, the simultaneously transmitting antennas in each operating mode and exposure condition combination must be considered one pair at a time to determine the SPLSR that qualifies for the additional test exemption.

This ratio is defined as:

$$SPLSR = (SAR_1 + SAR_2)^{\frac{1.5}{R_i}}$$

Where: SAR_1 and SAR_2 = highest reported SAR or estimated SAR values for the two sources in the pair i , and R_i is their distance in mm.

When $SPLSR \leq 0.0.4$ (rounded to two decimal digits), for all antenna pairs in the configuration, then the device qualifies for 1 g SAR test exemption.

When 10 g SAR applies (e.g. for extremities) the corresponding test exemption condition is $SPLSR \leq 0.10$.

If any antenna pair does not qualify for simultaneous transmission SAR test exemption, then the device must be tested for SAR compliance, according to the enlarged zoom scan and volume scan post-processing procedures in KDB Pub. 865664 D01.

3 Results of evaluation

3.1 Used evaluation methods

| RF Exposure test exemptions for single sources | | | |
|--|---|----------------|---------|
| Used | Method | See sub-clause | Comment |
| <input type="checkbox"/> | General Exemption acc. CFR 47 §1.1307(b)(3)(i)(A) | 2.1.1 | - |
| <input type="checkbox"/> | SAR Based Exemption acc. CFR 47 §1.1307(b)(3)(i)(B) | 2.1.2 | - |
| <input type="checkbox"/> | MPE Based Exemption acc. CFR 47 §1.1307(b)(3)(i)(C) | 2.1.3 | - |
| <input checked="" type="checkbox"/> | MPE Calculation | 2.1.4 | - |

| RF Exposure test exemptions for simultaneous transmission sources | | | |
|---|--|----------------|--------------------------|
| Used | Method | See sub-clause | Comment |
| <input checked="" type="checkbox"/> | Not applicable | | No simultaneous possible |
| <input type="checkbox"/> | 1 mW test Exemption acc. 2.2.1 [3] | 2.2.1 | - |
| <input type="checkbox"/> | SAR Based Exemption acc. 2.2.2 [3] | 2.2.2 | |
| <input type="checkbox"/> | MPE Based Exemption acc. 2.2.2 [3] | 2.2.2 | |
| <input type="checkbox"/> | SAR to Peak location separation ratio acc. 2.2.3 [3] | 2.2.3 | |

3.2 Evaluation Distance

According to the applicant's documentation, the device is a mobile device which is used at least with a separation distance of 30 cm.

3.3 Measurement of E field strength from the client

| | |
|----------------------|-------|
| Ambient temperature: | 22 °C |
| Relative humidity: | 24 % |

| | |
|------------|-------------|
| Date: | 06.12.2023 |
| Tested by: | Thomas KÜHN |


The EUT operates in the frequency range 8.95 MHz to 11.05 MHz.

Before the measurement the environmental fields must be considered, and the field probe has to be zeroed. Because the EUT is installed on movable machine parts the safety distance between the user and the EUT is defined by the applicant with 30 cm. Therefore, the field probe was moved with a distance of 30 cm in all directions around the EUT and peak level of the field strength was observed. At the position of the maximum level the measurement was carried out with an averaging time of 6 minutes. The position of the maximum field strength and the test setup are shown in the photograph below. For this test, the EUT was powered by an external power supply with 24 V_{DC}.

| Parameter | Result | Limit * | Test result |
|-------------------------|------------------------------|----------|-------------|
| Electric field strength | 0.0544 V/m at 30 cm distance | 74.6 V/m | Passed ** |

*: Because the EUT is intended to be used in industrial environments only, the limit for General Population / Uncontrolled Exposure was used.

** : The NEARFI P 2A R generates an electric field strength, which is below the level for MPE of persons in General Population / Uncontrolled Exposure [1].

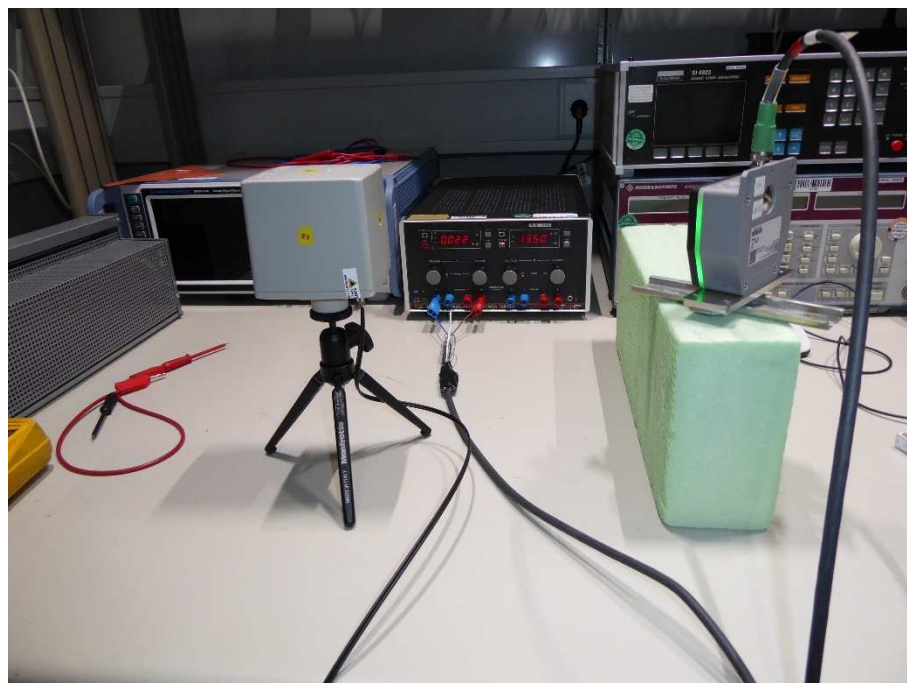

Test equipment (please refer to chapter 5 for details)

1, 3 4

3.4 Measurement of H field strength from the client

| | |
|----------------------|-------|
| Ambient temperature: | 22 °C |
| Relative humidity: | 24 % |

| | |
|------------|-------------|
| Date: | 06.12.2023 |
| Tested by: | Thomas KÜHN |


The EUT operates in the frequency range 8.95 MHz to 11.05 MHz.

Before the measurement the environmental fields must be considered, and the field probe has to be zeroed. Because the EUT is installed on movable machine parts the safety distance between the user and the EUT is defined by the applicant with 30 cm. Therefore, the field probe was moved with a distance of 30 cm in all directions around the EUT and peak level of the field strength was observed. At the position of the maximum level the measurement was carried out with an averaging time of 6 minutes. The position of the maximum field strength and the test setup are shown in the photograph below. For this test, the EUT was powered by an external power supply with 24 V_{DC}.

| Parameter | Result | Limit * | Test result |
|-------------------------|------------------------------|-----------|-------------|
| Electric field strength | 0.0008 A/m at 30 cm distance | 0.198 A/m | Passed ** |

*: Because the EUT is intended to be used in industrial environments only, the limit for General Population / Uncontrolled Exposure was used.

** : The NEARFI P 2A R generates a magnetic field strength, which is below the level for MPE of persons in General Population / Uncontrolled Exposure [1].

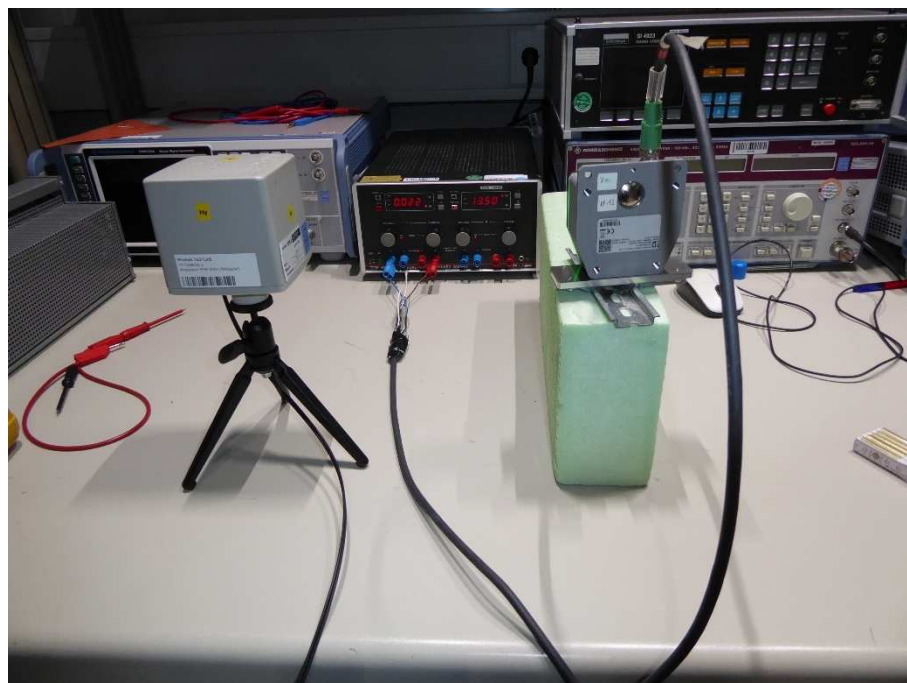

Test equipment (please refer to chapter 5 for details)

1, 3, 4

3.5 Measurement of E field strength from the client with source at minimum distance

| | |
|----------------------|-------|
| Ambient temperature: | 22 °C |
| Relative humidity: | 24 % |

| | |
|------------|-------------|
| Date: | 06.12.2023 |
| Tested by: | Thomas KÜHN |


The EUT operates in the frequency range 8.95 MHz to 11.05 MHz.

Before the measurement the environmental fields must be considered, and the field probe has to be zeroed. Because the EUT is installed on movable machine parts the safety distance between the user and the EUT is defined by the applicant with 30 cm. Therefore, the field probe was moved with a distance of 30 cm in all directions around the EUT and peak level of the field strength was observed. At the position of the maximum level the measurement was carried out with an averaging time of 6 minutes. The position of the maximum field strength and the test setup are shown in the photograph below. The EUT was loaded with the maximum current of 2 A.

| Parameter | Result | Limit * | Test result |
|-------------------------|------------------------------|----------|-------------|
| Electric field strength | 0.0551 V/m at 30 cm distance | 74.6 V/m | Passed ** |

*: Because the EUT is intended to be used in industrial environments only, the limit for General Population / Uncontrolled Exposure was used.

** : The NEARFI P 2A R generates an electric field strength, which is below the level for MPE of persons in General Population / Uncontrolled Exposure [1].

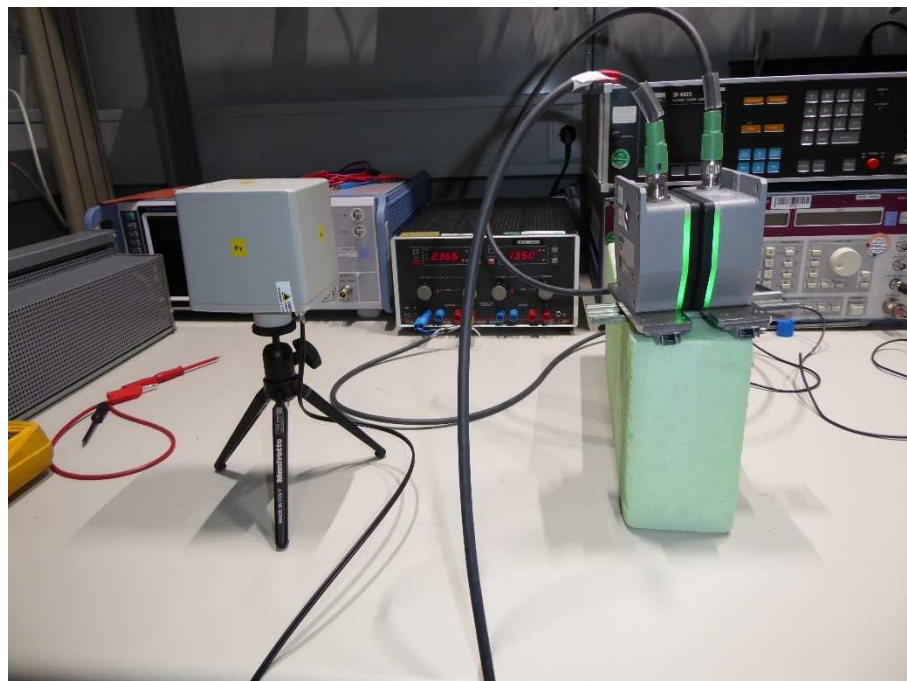

Test equipment (please refer to chapter 5 for details)

1 – 4

3.6 Measurement of H field strength from the client with source at minimum distance

| | |
|----------------------|-------|
| Ambient temperature: | 22 °C |
| Relative humidity: | 24 % |

| | |
|------------|-------------|
| Date: | 06.12.2023 |
| Tested by: | Thomas KÜHN |


The EUT operates in the frequency range 8.95 MHz to 11.05 MHz.

Before the measurement the environmental fields must be considered, and the field probe has to be zeroed. Because the EUT is installed on movable machine parts the safety distance between the user and the EUT is defined by the applicant with 30 cm. Therefore, the field probe was moved with a distance of 30 cm in all directions around the EUT and peak level of the field strength was observed. At the position of the maximum level the measurement was carried out with an averaging time of 6 minutes. The position of the maximum field strength and the test setup are shown in the photograph below. The client was loaded with the maximum current of 2 A.

| Parameter | Result | Limit* | Test result |
|-------------------------|------------------------------|-----------|-------------|
| Electric field strength | 0.0007 A/m at 30 cm distance | 0.198 A/m | Passed ** |

*: Because the EUT is intended to be used in industrial environments only, the limit for General Population / Uncontrolled Exposure was used.

** : The NEARFI P 2A R generates a magnetic field strength, which is below the level for MPE of persons in General Population / Uncontrolled Exposure [1].

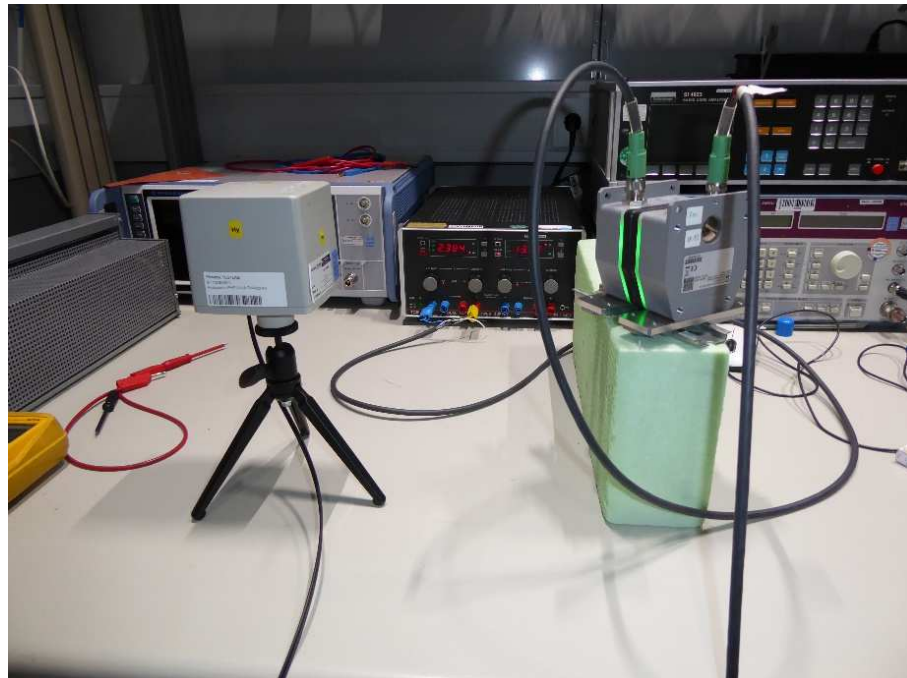

Test equipment (please refer to chapter 5 for details)

1 – 4

3.7 Measurement of E field strength from the client with source at maximum distance

| | |
|----------------------|-------|
| Ambient temperature: | 22 °C |
| Relative humidity: | 24 % |

| | |
|------------|-------------|
| Date: | 06.12.2023 |
| Tested by: | Thomas KÜHN |

The EUT operates in the frequency range 8.95 MHz to 11.05 MHz.

Before the measurement the environmental fields must be considered, and the field probe has to be zeroed. Because the EUT is installed on movable machine parts the safety distance between the user and the EUT is defined by the applicant with 30 cm. Therefore, the field probe was moved with a distance of 30 cm in all directions around the EUT and peak level of the field strength was observed. At the position of the maximum level the measurement was carried out with an averaging time of 6 minutes. The position of the maximum field strength and the test setup are shown in the photograph below. The client was loaded with the maximum current of 2 A.

| Parameter | Result | Limit* | Test result |
|-------------------------|------------------------------|----------|-------------|
| Electric field strength | 0.0558 V/m at 30 cm distance | 74.6 V/m | Passed ** |

*: Because the EUT is intended to be used in industrial environments only, the limit for General Population / Uncontrolled Exposure was used.

** : The NEARFI P 2A R generates an electric field strength, which is below the level for MPE of persons in General Population / Uncontrolled Exposure [1].



Test equipment (please refer to chapter 5 for details)

1 – 4

3.8 Measurement of H field strength from the client with source at maximum distance

| | |
|----------------------|-------|
| Ambient temperature: | 22 °C |
| Relative humidity: | 24 % |

| | |
|------------|-------------|
| Date: | 06.12.2023 |
| Tested by: | Thomas KÜHN |


The EUT operates in the frequency range 8.95 MHz to 11.05 MHz.

Before the measurement the environmental fields must be considered, and the field probe has to be zeroed. Because the EUT is installed on movable machine parts the safety distance between the user and the EUT is defined by the applicant with 30 cm. Therefore, the field probe was moved with a distance of 30 cm in all directions around the EUT and peak level of the field strength was observed. At the position of the maximum level the measurement was carried out with an averaging time of 6 minutes. The position of the maximum field strength and the test setup are shown in the photograph below. The client was loaded with the maximum current of 2 A.

| Parameter | Result | Limit * | Test result |
|------------------------------|------------------------------|-----------|-------------|
| Electric field strength Base | 0.0008 A/m at 30 cm distance | 0.189 A/m | Passed ** |

*: Because the EUT is intended to be used in industrial environments only, the limit for General Population / Uncontrolled Exposure was used.

** : The NEARFI P 2A R generates a magnetic field strength, which is below the level for MPE of persons in General Population / Uncontrolled Exposure [1].

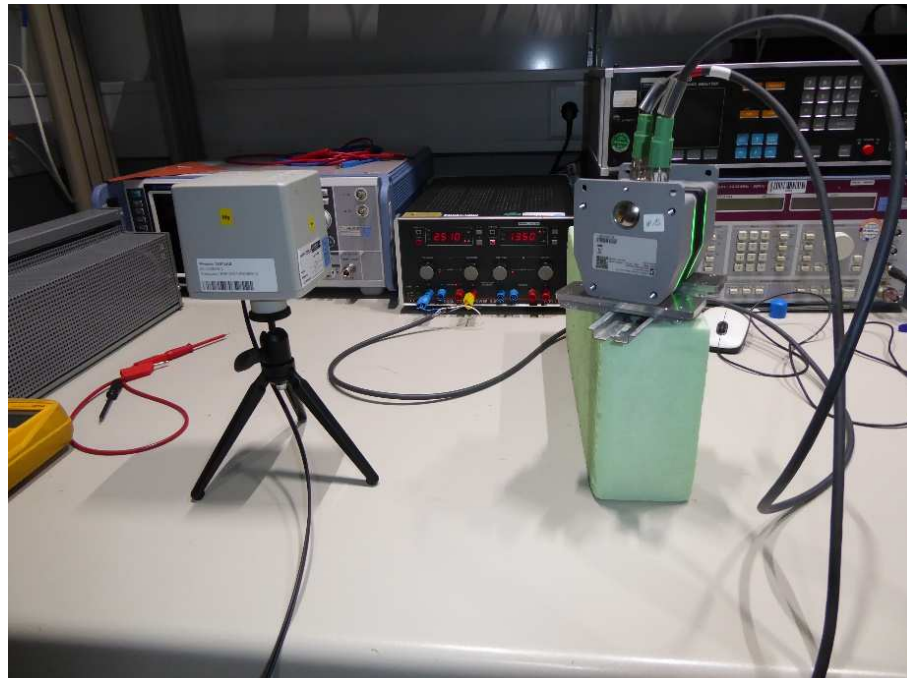

Test equipment (please refer to chapter 5 for details)

1 – 4

4 Conclusion

The NEARFI P 2A R complies in all operational modes to the limits for General Population / Uncontrolled Exposure given in CFR 47 §1.1310(e)1 in a separation distance of 30 cm.

5 Test Equipment used for Tests

| No. | Test equipment | Type | Manufacturer | Serial No. | PM. No. | Cal. Date | Cal. Due |
|-----|------------------------------------|---------------|-----------------|------------|---------|---------------------------|----------|
| 1 | Isotropical E- and H-fieldanalyser | EHP-200A | Narda | 170WX80314 | 482643 | 31.08.2023 | 08.2025 |
| 2 | Resistor | SZZL600x65-27 | Frizlen | 36324 | 482420 | Calibration not necessary | |
| 3 | Power supply | TOE8752-32 | Toellner | 31569 | 480009 | Calibration not necessary | |
| 4 | Multimeter | 971A | Hewlett Packard | JP39009358 | 480721 | 07.09.2023 | 09.2024 |

6 Measurement uncertainties

| Measurement method | Standard used for calculating measurement uncertainty | Expanded measurement uncertainty (95 %) U_{lab} |
|--|---|---|
| Measurements of electric and magnetic fields | DIN EN 50413, Ch. C2 DIN EN 62233, Ch. 5.6 | 20.6 % (H-F) 24.8 % (E-F) |

7 Report History

| Report Number | Date | Comment |
|---------------|------------|---------------------|
| F220998E3 | 01.08.2024 | Initial Test Report |
| - | - | - |
| - | - | - |