



FCC Radio Test Report

FCC ID: YG4AT2010

This report concerns (check one) : Original Grant Class I Change

Issued Date : Jan. 13, 2011

Project No. : R1012005

Equipment : ActionTracker

Model Name : AT2; AT2 BCBSMA

Applicant : Aware, Inc.

Address : 614 Massachusetts Ave Cambridge, MA 02139

Tested by: Neutron Engineering Inc. EMC Laboratory

Date of Receipt: Dec. 14, 2010

Date of Test: Dec. 14, 2010 ~ Jan. 11, 2011

Testing Engineer

: Gary Chou
(Gary Chou)

Technical Manager

: Jeff Yang
(Jeff Yang)

Authorized Signatory

: Andy Chiu
(Andy Chiu)

Neutron Engineering Inc.

B1, No. 37, Lane 365, YangGuang St.
NeiHu District 114, Taipei, Taiwan.

TEL: +886-2-2657-3299

FAX: +886-2-2657-3331





Declaration

Neutron represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

Neutron's reports apply only to the specific samples tested under conditions. It is manufacturer's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

Neutron's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron**'s authorized written approval.

Neutron's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.



Table of Contents	Page
1 . CERTIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	10
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
3.4 DESCRIPTION OF SUPPORT UNITS	12
4 . EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION	13
4.1.2 MEASUREMENT INSTRUMENTS LIST	13
4.1.3 TEST PROCEDURE	14
4.1.4 DEVIATION FROM TEST STANDARD	14
4.1.5 TEST SETUP	14
4.1.6 EUT OPERATING CONDITIONS	14
4.1.7 TEST RESULTS	15
4.2 RADIATED EMISSION MEASUREMENT	17
4.2.1 RADIATED EMISSION LIMITS	17
4.2.2 MEASUREMENT INSTRUMENTS LIST	18
4.2.3 TEST PROCEDURE	18
4.2.4 DEVIATION FROM TEST STANDARD	18
4.2.5 TEST SETUP	19
4.2.6 EUT OPERATING CONDITIONS	19
4.2.7 TEST RESULTS-BETWEEN 30MHZ - 1000MHZ	20
4.2.8 TEST RESULTS-ABOVE 1000MHZ	22
5 . BANDWITH TEST	34
5.1 APPLIED PROCEDURES / LIMIT	34
5.1.1 MEASUREMENT INSTRUMENTS LIST	34
5.1.2 TEST PROCEDURE	34
5.1.3 DEVIATION FROM STANDARD	34
5.1.4 TEST SETUP	34
5.1.5 EUT OPERATION CONDITIONS	34
5.1.6 TEST RESULTS	35



Table of Contents	Page
6 . PEAK OUTPUT POWER TEST	37
6.1 APPLIED PROCEDURES / LIMIT	37
6.1.1 MEASUREMENT INSTRUMENTS LIST	37
6.1.2 TEST PROCEDURE	37
6.1.3 DEVIATION FROM STANDARD	37
6.1.4 TEST SETUP	37
6.1.5 EUT OPERATION CONDITIONS	37
6.1.6 TEST RESULTS	38
7 . ANTENNA CONDUCTED SPURIOUS EMISSION	39
7.1 APPLIED PROCEDURES / LIMIT	39
7.1.1 MEASUREMENT INSTRUMENTS LIST	39
7.1.2 TEST PROCEDURE	39
7.1.3 DEVIATION FROM STANDARD	39
7.1.4 TEST SETUP	39
7.1.5 EUT OPERATION CONDITIONS	39
7.1.6 TEST RESULTS	40
8 . POWER SPECTRAL DENSITY TEST	44
8.1 APPLIED PROCEDURES / LIMIT	44
8.1.1 MEASUREMENT INSTRUMENTS LIST	44
8.1.2 TEST PROCEDURE	44
8.1.3 DEVIATION FROM STANDARD	44
8.1.4 TEST SETUP	44
8.1.5 EUT OPERATION CONDITIONS	44
8.1.6 TEST RESULTS	45
9 . RF EXPOSURE TEST	47
9.1 APPLIED PROCEDURES / LIMIT	47
9.1.1 MEASUREMENT INSTRUMENTS LIST	47
9.1.2 MPE CALCULATION METHOD	47
10 . EUT TEST PHOTO	48



1. CERTIFICATION

Equipment: ActionTracker

Brand Name: AWARE

Model Name: AT2; AT2 BCBSMA

Applicant: Aware, Inc.

Date of Test: Dec. 14, 2010 ~ Jan. 11, 2011

Standards: FCC Part15, Subpart C / ANCI C63.4 : 2003

The above equipment has been tested and found compliance with the requirement of the relative standards by Neutron Engineering Inc. EMC Laboratory.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FCCP-1-R1012005) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of NVLAP and TAF according to the ISO-17025 quality assessment standard and technical standard(s).



2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15, Subpart C			
Standard Section	Test Item	Judgment	Remark
FCC			
15.207	Conducted Emission	PASS	
15.247 (c)	Antenna conducted Spurious Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Peak Output Power	PASS	
15.247 (c)	Radiated Spurious Emission	PASS	
15.247 (d)	Power Spectral Density	PASS	
15.203	Antenna Requirement	PASS	
1.1307 1.1310 2.1091 2.1093	RF Exposure Compliance	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

C02: (VCCI RN: C-3477; FCC RN: 614388; FCC DN: TW1054)
1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

CB08: (VCCI RN: G-91; FCC RN: 614388; FCC DN: TW1054;
IC Assigned Code: 4428C-1)
1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U, (dB)	NOTE
C02	ANSI	150 kHz ~ 30 MHz	2.59	

B. Radiated Measurement :

Test Site	Item	Measurement Frequency Range		Uncertainty	NOTE
		Horizontal Polarization	Vertical Polarization		
CB08	Radiated Emission at 3m	30 - 200MHz		3.35 dB	
		200 - 1000MHz		3.11 dB	
		1 - 18GHz		3.97 dB	
		18 - 40GHz		4.01 dB	
	Radiated Emission at 3m	30 - 200MHz		3.22 dB	
		200 - 1000MHz		3.24 dB	
		1 - 18GHz		4.05 dB	
		18 - 40GHz		4.04 dB	

Our calculated Measurement Instrumentation Uncertainty is shown in the tables above. These are our U_{lab} values in CISPR 16-4-2 terminology.

Since Table 1 of CISPR 16-4-2 has values of measurement instrumentation uncertainty, called U_{CISPR} , as follows:

Conducted Disturbance (mains port) – 150 kHz – 30 MHz : 3.6 dB

Radiated Disturbance (electric field strength on an open area test site or alternative test site) – 30 MHz – 1000 MHz : 5.2 dB

It can be seen that our U_{lab} values are smaller than U_{CISPR} .



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	ActionTracker																
Brand Name	AWARE																
Model Name	AT2; AT2 BCBSMA																
OEM Brand/Model Name	N/A																
Model Difference	Model AT2 BCBSMA is identical to model AT2 except the model designation. Model AT2 was used for final testing and collecting test data included in this report.																
Product Description	<p>The EUT is an ActionTracker.</p> <table border="1"><tr><td>Operation Frequency:</td><td>2405-2475 MHz</td></tr><tr><td>Modulation Type:</td><td>DSSS/O-QPSK</td></tr><tr><td>Bit Rate of Transmitter:</td><td>250kb/s</td></tr><tr><td>Channel Bandwidth</td><td>5 MHz</td></tr><tr><td>Number Of Channel:</td><td>Please see Note 2.</td></tr><tr><td>Antenna Designation:</td><td>Please see Note 3.</td></tr><tr><td>Antenna Gain(Peak):</td><td>Please see Note 3.</td></tr><tr><td>Output Power(Max):</td><td>1.83 dBm</td></tr></table> <p>Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.</p>	Operation Frequency:	2405-2475 MHz	Modulation Type:	DSSS/O-QPSK	Bit Rate of Transmitter:	250kb/s	Channel Bandwidth	5 MHz	Number Of Channel:	Please see Note 2.	Antenna Designation:	Please see Note 3.	Antenna Gain(Peak):	Please see Note 3.	Output Power(Max):	1.83 dBm
Operation Frequency:	2405-2475 MHz																
Modulation Type:	DSSS/O-QPSK																
Bit Rate of Transmitter:	250kb/s																
Channel Bandwidth	5 MHz																
Number Of Channel:	Please see Note 2.																
Antenna Designation:	Please see Note 3.																
Antenna Gain(Peak):	Please see Note 3.																
Output Power(Max):	1.83 dBm																
Power Source	Supplied from PC USB port or Battery.																
Power Rating	USB: DC 5V Battery: DC 3.7V																
Connecting I/O Port(s)	Please refer to the User's Manual																
Products Covered	1 * Li-Po Battery: KAYO Li-Po302030 120mAh 3.7V																

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2.

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2405	06	2430	11	2455
02	2410	07	2435	12	2460
03	2415	08	2440	13	2465
04	2420	09	2445	14	2470
05	2425	10	2450	15	2475

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	Johanson	2450AT43A100	Internal chip antenna	NA	2.00



3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Test Mode	Description
Mode 1	2405MHz
Mode 2	2440MHz
Mode 3	2475MHz


For Final Conducted Test	
Final Test Mode	Description
Mode 2	2440MHz

For Final Radiated Test (30 -1000MHz)	
Final Test Mode	Description
Mode 2	2440MHz

For Final Radiated Test (Above 1000MHz)	
Final Test Mode	Description
Mode 1	2405MHz
Mode 2	2440MHz
Mode 3	2475MHz



3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

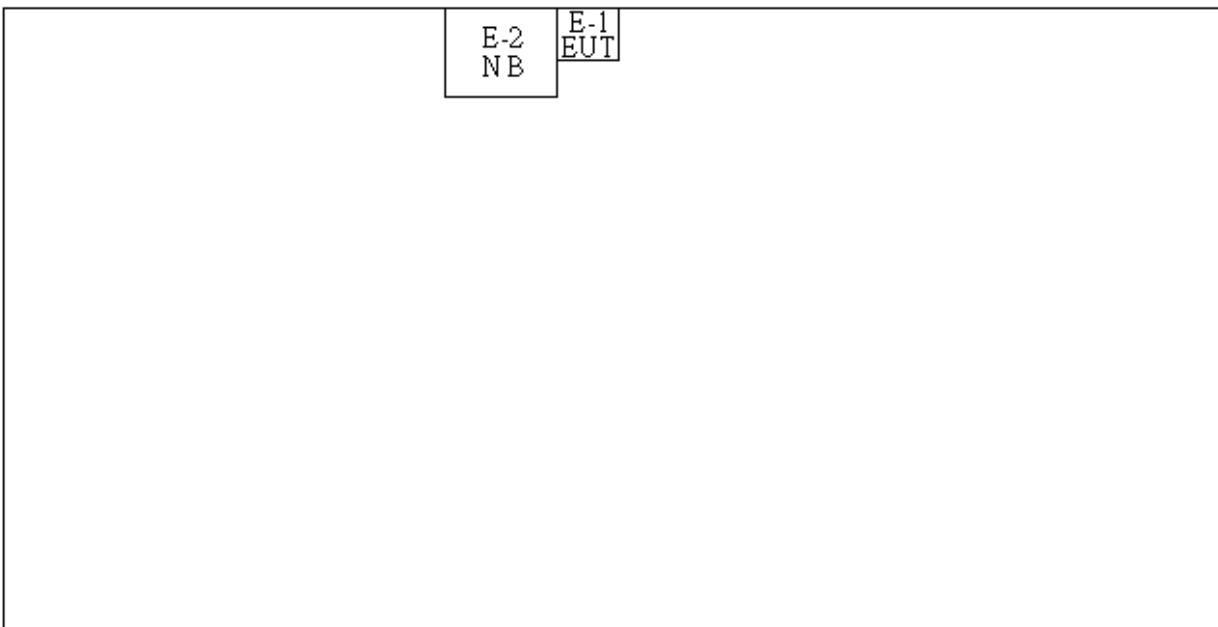

**3.4 DESCRIPTION OF SUPPORT UNITS**

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
E-1	ActionTracker	AWARE	AT2	YG4AT2010	N/A	EUT
E-2	Notebook PC	DELL	D620	DOC	7T390 A03	

Item	Shielded Type	Ferrite Core	Length	Note
N/A	-	-	-	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

4.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	101050	Jun. 07, 2011
2	Test Cable	TIMES	CFD300-NL	130	Jun. 17, 2011
3	EMI Test Receiver	R&S	ESCI	100080	Mar. 10, 2011

Remark: " N/A" denotes No Model Name , Serial No. or No Calibration specified.




4.1.3 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

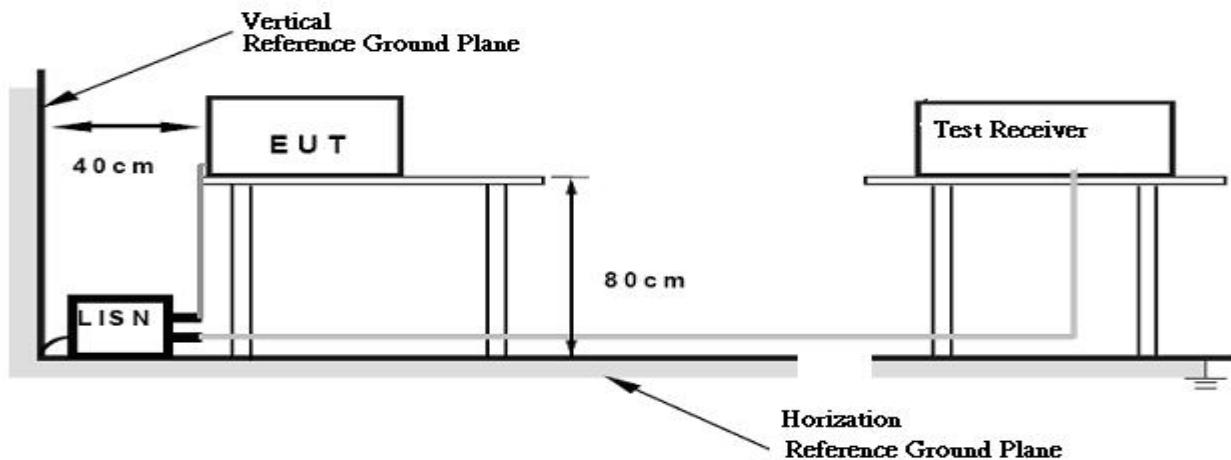

4.1.6 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


**4.1.7 TEST RESULTS**

EUT :	ActionTracker	Model Name :	AT2
Temperature :	24 °C	Relative Humidity :	34%
Test Voltage :	AC 120V/60Hz (System)		
Test Mode :	2440MHz		

Freq. (MHz)	Terminal L/N	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV)		Limit(dBuV)		Margin (dB)	Note
		QP-Mode	AV-Mode		QP-Mode	AV-Mode	QP-Mode	AV-Mode		
0.2034	Line	30.50	*	9.69	40.19	*	63.47	53.47	-23.28	(QP)
0.3407	Line	31.25	*	9.69	40.94	*	59.19	49.19	-18.25	(QP)
0.6688	Line	29.54	*	9.72	39.26	*	56.00	46.00	-16.74	(QP)
0.7813	Line	27.79	*	9.75	37.54	*	56.00	46.00	-18.46	(QP)
1.2424	Line	27.18	*	9.77	36.95	*	56.00	46.00	-19.05	(QP)
17.7500	Line	34.44	*	9.88	44.32	*	60.00	50.00	-15.68	(QP)

Remark

- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz; SPA setting in RBW=10KHz, VBW =10KHz, Swp. Time = 0.2 sec./MHz. Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=10KHz, VBW=10KHz, Swp. Time =0.2 sec./MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “*” marked in AVG Mode column of Interference Voltage Measured.
- (3) Measuring frequency range from 150KHz to 30MHz.

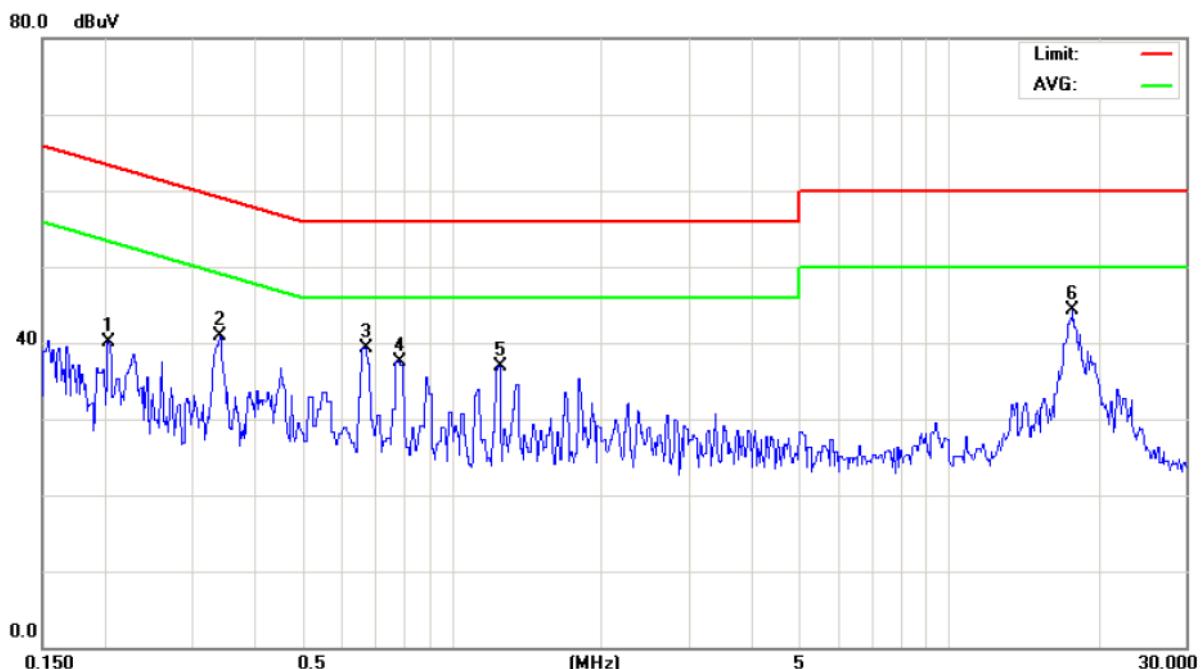




EUT :	ActionTracker	Model Name :	AT2
Temperature :	24 °C	Relative Humidity :	34%
Test Voltage :	AC 120V/60Hz (System)		
Test Mode :	2440MHz		

Freq. (MHz)	Terminal L/N	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV)		Limit(dBuV)		Margin (dB)	Note
		QP-Mode	AV-Mode		QP-Mode	AV-Mode	QP-Mode	AV-Mode		
0.2235	Neutral	27.75	*	9.68	37.43	*	62.69	52.69	-25.26	(QP)
0.3364	Neutral	28.31	*	9.68	37.99	*	59.29	49.29	-21.30	(QP)
0.6688	Neutral	26.69	*	9.71	36.40	*	56.00	46.00	-19.60	(QP)
1.2313	Neutral	26.67	*	9.76	36.43	*	56.00	46.00	-19.57	(QP)
17.5625	Neutral	36.73	*	9.92	46.65	*	60.00	50.00	-13.35	(QP)
27.3125	Neutral	25.97	*	9.95	35.92	*	60.00	50.00	-24.08	(QP)

Remark

- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz; SPA setting in RBW=10KHz, VBW =10KHz, Swp. Time = 0.2 sec./MHz. Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=10KHz, VBW=10KHz, Swp. Time =0.2 sec./MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a " * " marked in AVG Mode column of Interference Voltage Measured.
- (3) Measuring frequency range from 150KHz to 30MHz.

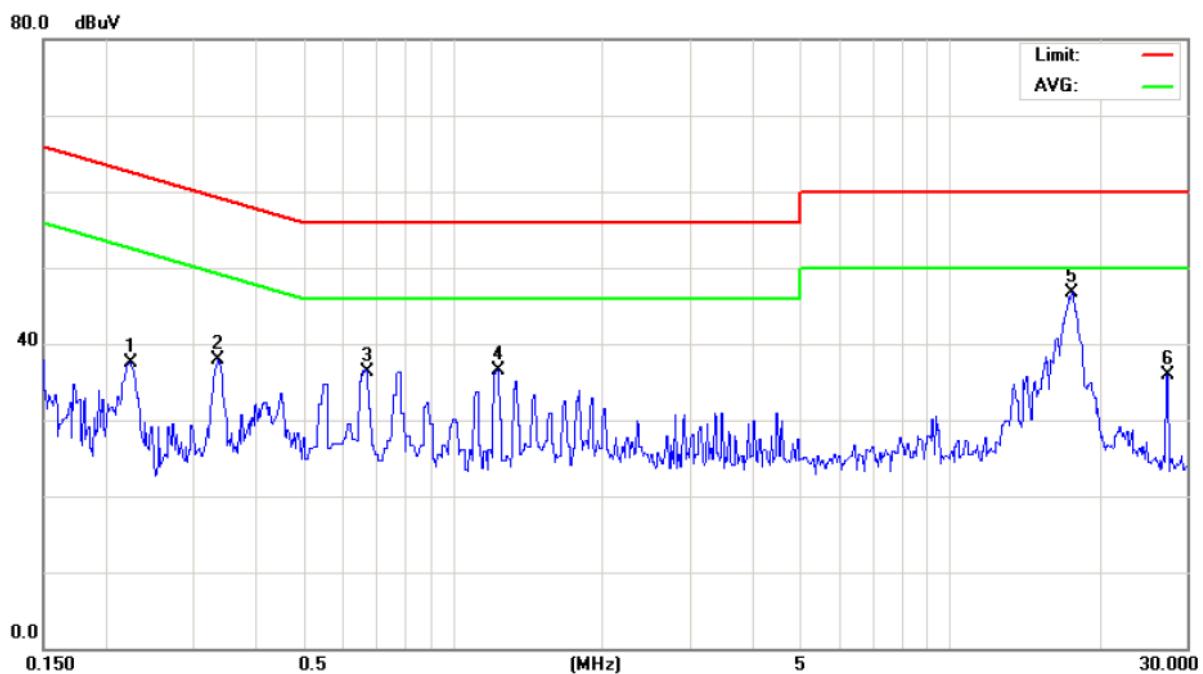

**4.2 RADIATED EMISSION MEASUREMENT****4.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)**

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80	60	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15B.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

**4.2.2 MEASUREMENT INSTRUMENTS LIST**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Aug. 31, 2011
2	Horn Antenna	Schwarzbeck	BBHA 9120	D-325	Dec. 08, 2011
3	Microwave Pre_amplifier	Agilent	8449B	3008A01714	Apr. 20, 2011
4	Microflex Cable	N/A	N/A	1m	May. 19, 2011
5	Microflex Cable	AISI	S104-SMAP-1	10m	Aug. 22, 2011
6	Microflex Cable	N/A	N/A	3m	Aug. 22, 2011
7	Test Cable	N/A	LMR-400	966_12m	Jun. 17, 2011
8	Test Cable	N/A	LMR-400	966_3m	Jun. 17, 2011
9	Pre-Amplifier	EMC	EMC-330	980001	Jun. 03, 2011
10	Log-Bicon Antenna	Schwarzbeck	VULB9168-352	9168-352	Jun. 17, 2011

Remark: " N/A" denotes No Model Name / Serial No. and No Calibration specified.

4.2.3 TEST PROCEDURE

- a. The measuring distance of at 10 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m or 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- g. The testing follows the guidelines in ANSI C63.4-2003 and FCC Public Notice DA 00-705 Measurement Guidelines. In case the emission is fail due to the used RBW / VBW is too wide, marker-delta method of FCC Public Notice DA 00-705 will be followed.


4.2.4 DEVIATION FROM TEST STANDARD

No deviation




4.2.5 TEST SETUP

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

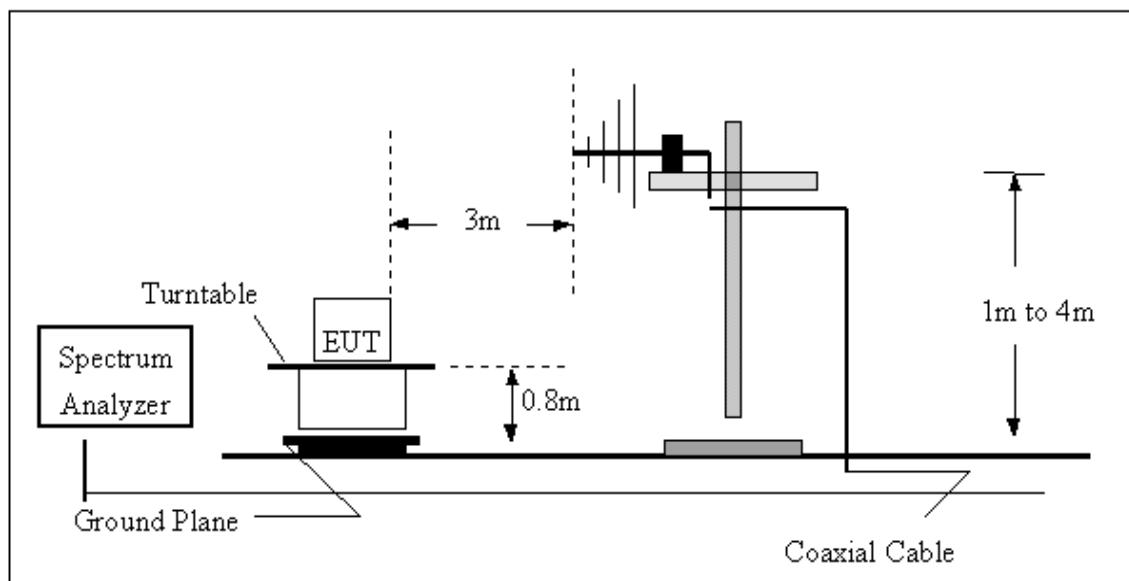

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

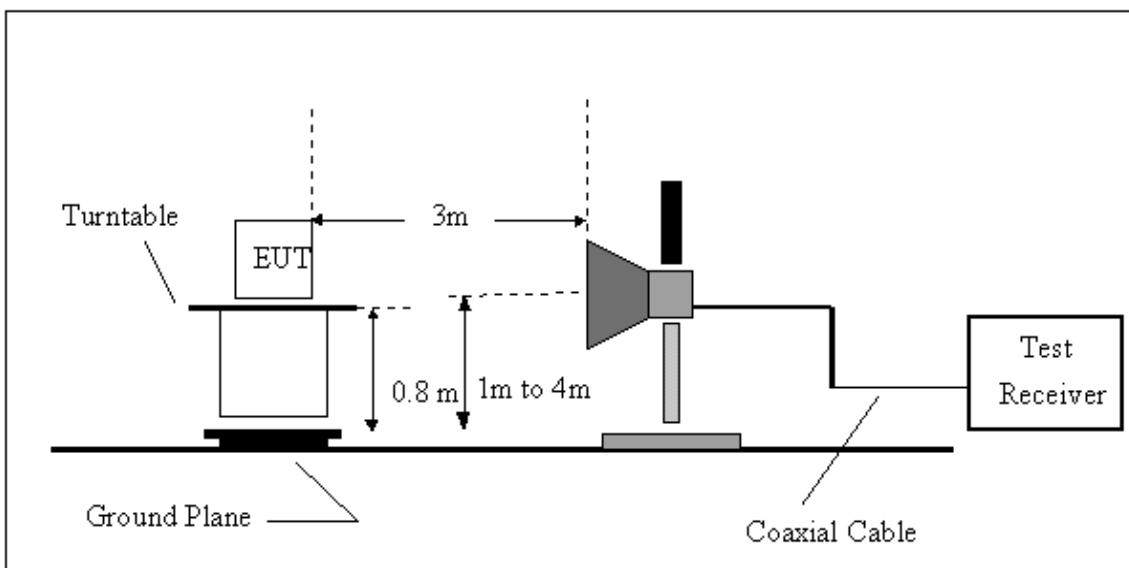

4.2.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.


**4.2.7 TEST RESULTS-BETWEEN 30MHZ - 1000MHZ**

EUT :	ActionTracker	Model Name :	AT2
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60HZ (SYSTEM)		
Test Mode :	2440MHz		

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
33.88	V	47.03	-17.24	29.79	40.00	- 10.21	
336.52	V	46.70	-14.88	31.82	46.00	- 14.18	
431.58	V	44.38	-12.40	31.98	46.00	- 14.02	
528.58	V	44.40	-10.44	33.96	46.00	- 12.04	
567.38	V	44.27	-9.55	34.72	46.00	- 11.28	
666.32	V	41.77	-7.89	33.88	46.00	- 12.12	

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency . "F" denotes fundamental frequency; " H" denotes spurious frequency. "E" denotes band edge frequency.
- (4) Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Peak detector mode or QP detector mode of the emission .
- (5) Data of measurement within this frequency range shown " - " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

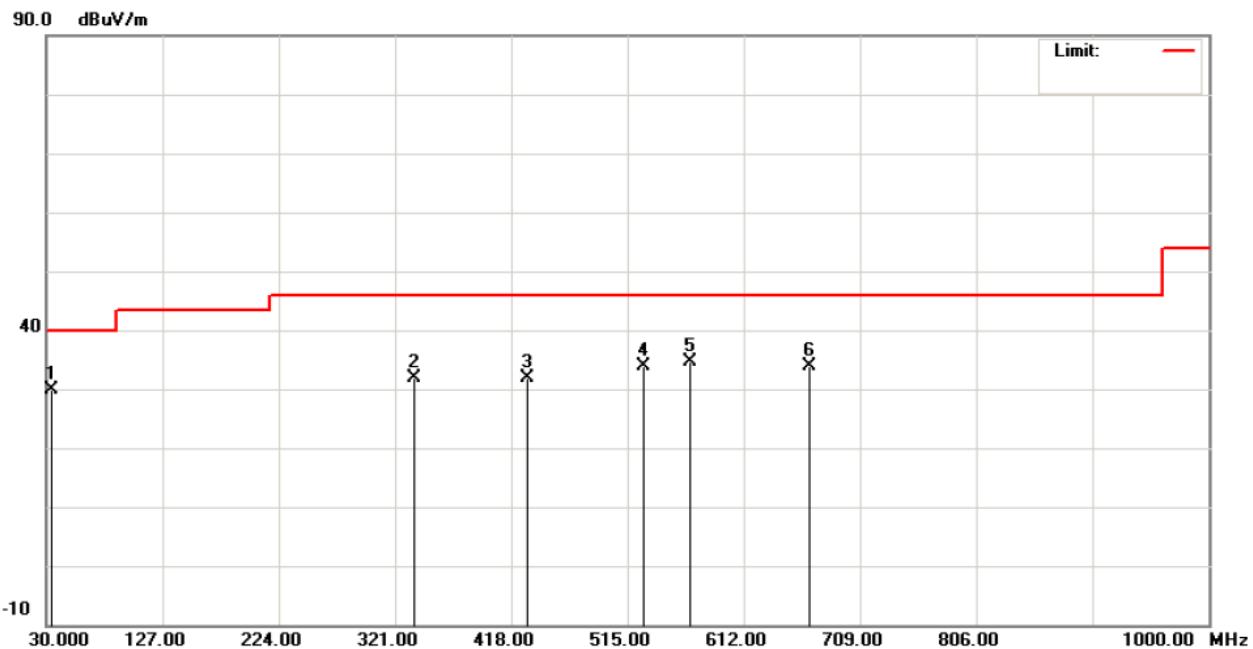




EUT :	ActionTracker	Model Name :	AT2
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60HZ (SYSTEM)		
Test Mode :	2440MHz		

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
220.12	H	54.44	-19.20	35.24	46.00	- 10.76	
299.66	H	49.27	-15.82	33.45	46.00	- 12.55	
336.52	H	52.22	-14.88	37.34	46.00	- 8.66	
365.62	H	53.81	-14.14	39.67	46.00	- 6.33	
528.58	H	48.13	-10.44	37.69	46.00	- 8.31	
565.44	H	48.31	-9.60	38.71	46.00	- 7.29	

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ “F” denotes fundamental frequency; “ H” denotes spurious frequency. “E” denotes band edge frequency.
- (4) Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Peak detector mode or QP detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

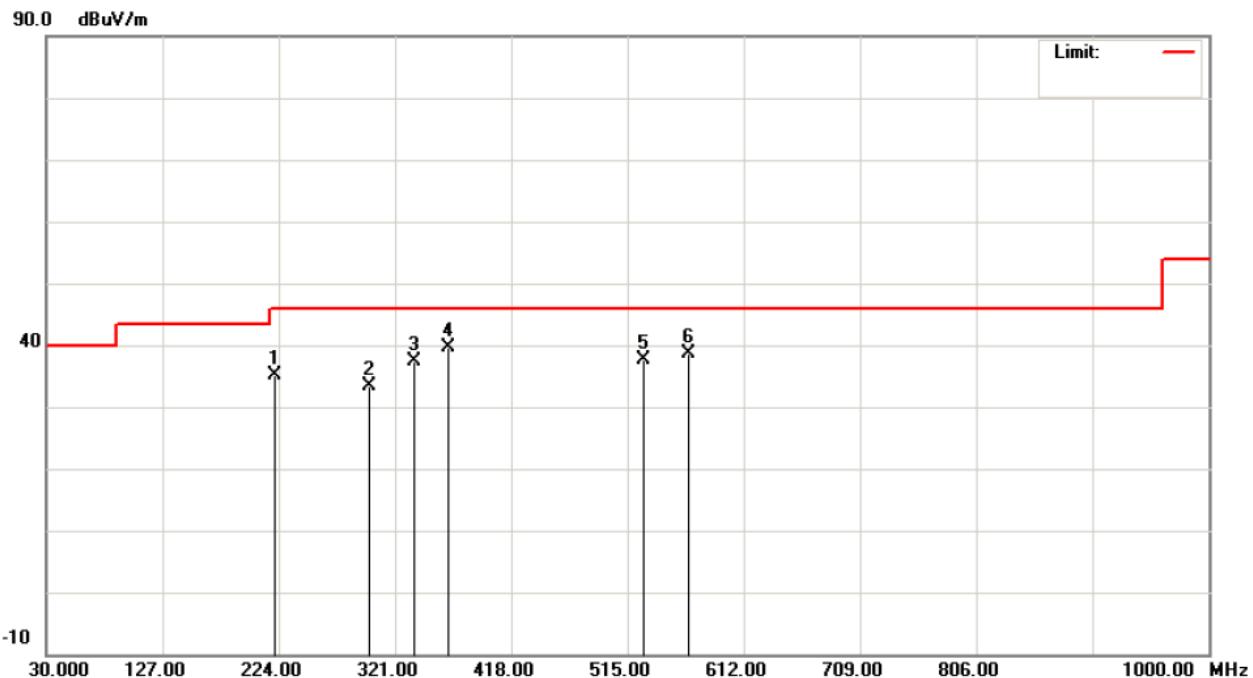



EUT :	ActionTracker	Model Name :	AT2
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60HZ (SYSTEM)		
Test Mode :	2405MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2390.00	V	21.11	11.29	31.26	52.37	42.55	74.00	54.00	X/E
2405.00	V	54.80	52.61	31.33	86.13	83.94			X/F
4810.84	V	45.26	34.35	2.86	48.12	37.21	74.00	54.00	X/H
7214.88	V	40.29	30.57	8.61	48.90	39.18	74.00	54.00	X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency . "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

2405MHz (Above 1000 MHz, Vertical)

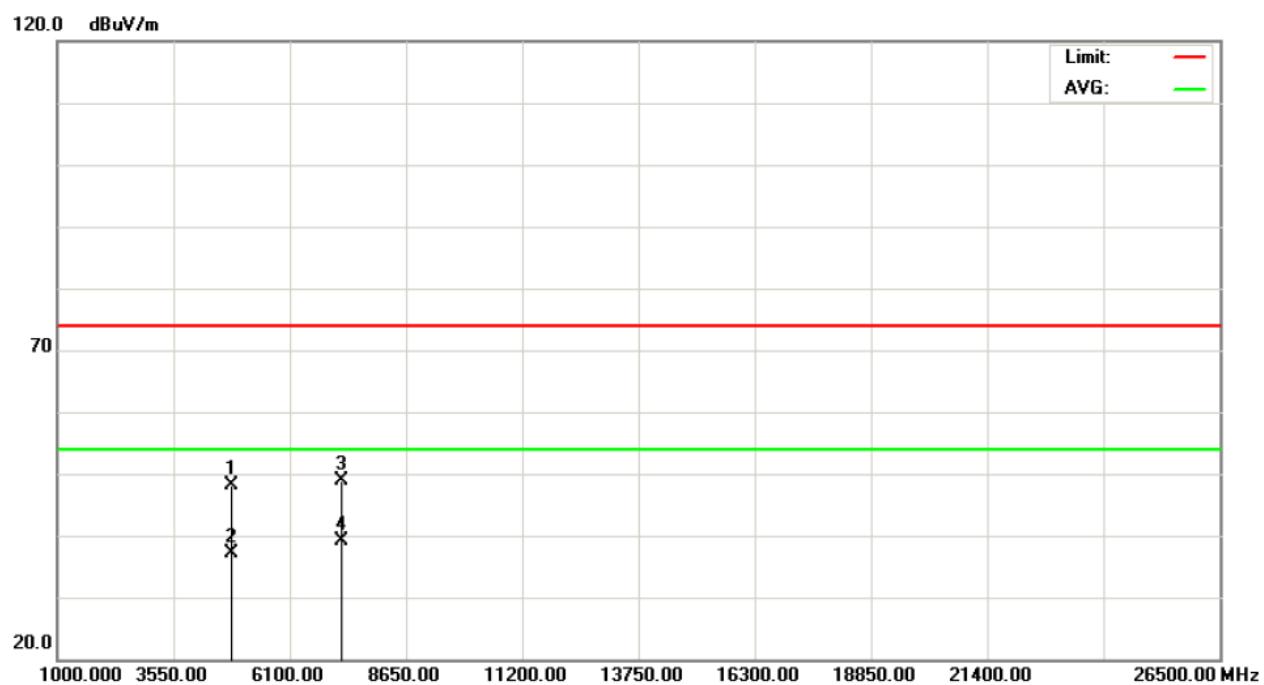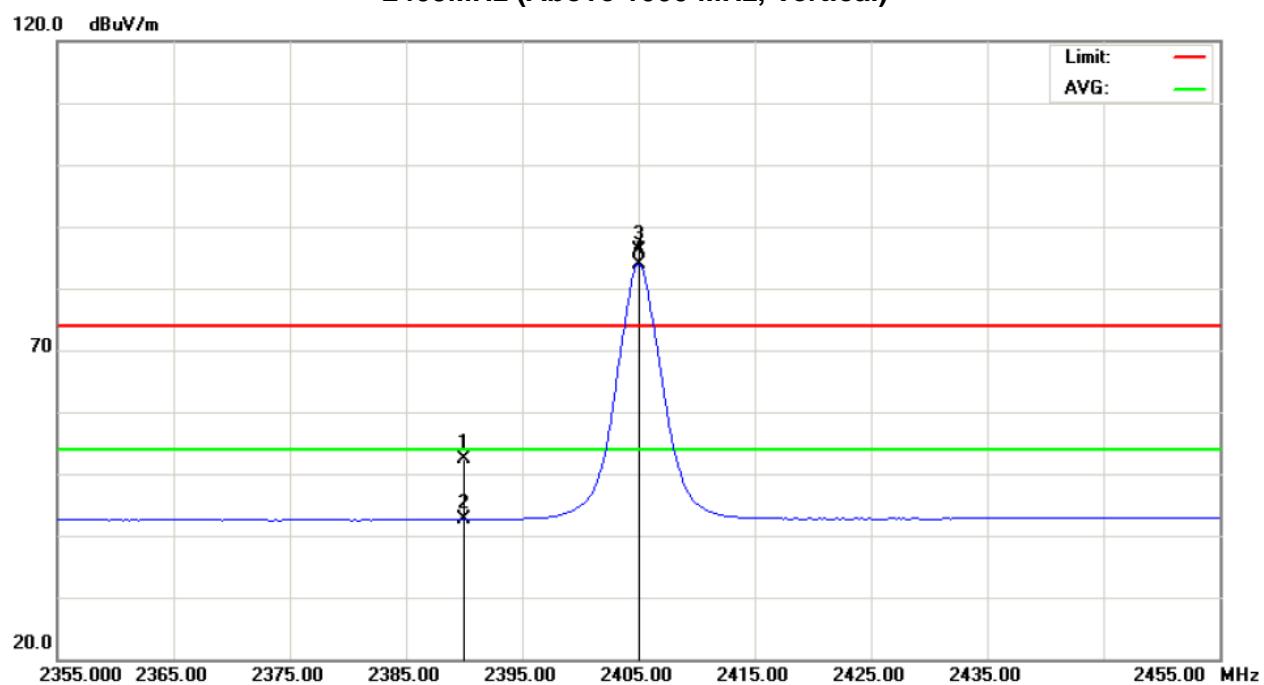



EUT :	ActionTracker	Model Name :	AT2
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60HZ (SYSTEM)		
Test Mode :	2405MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2390.00	H	20.64	11.31	31.26	51.90	42.57	74.00	54.00	X/E
2405.00	H	56.26	54.45	31.33	87.59	85.78			X/F
4810.90	H	44.08	31.29	2.86	46.94	34.15	74.00	54.00	X/H
7215.28	H	40.61	30.52	8.61	49.22	39.13	74.00	54.00	X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency . "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

2405MHz (Above 1000 MHz, Horizontal)

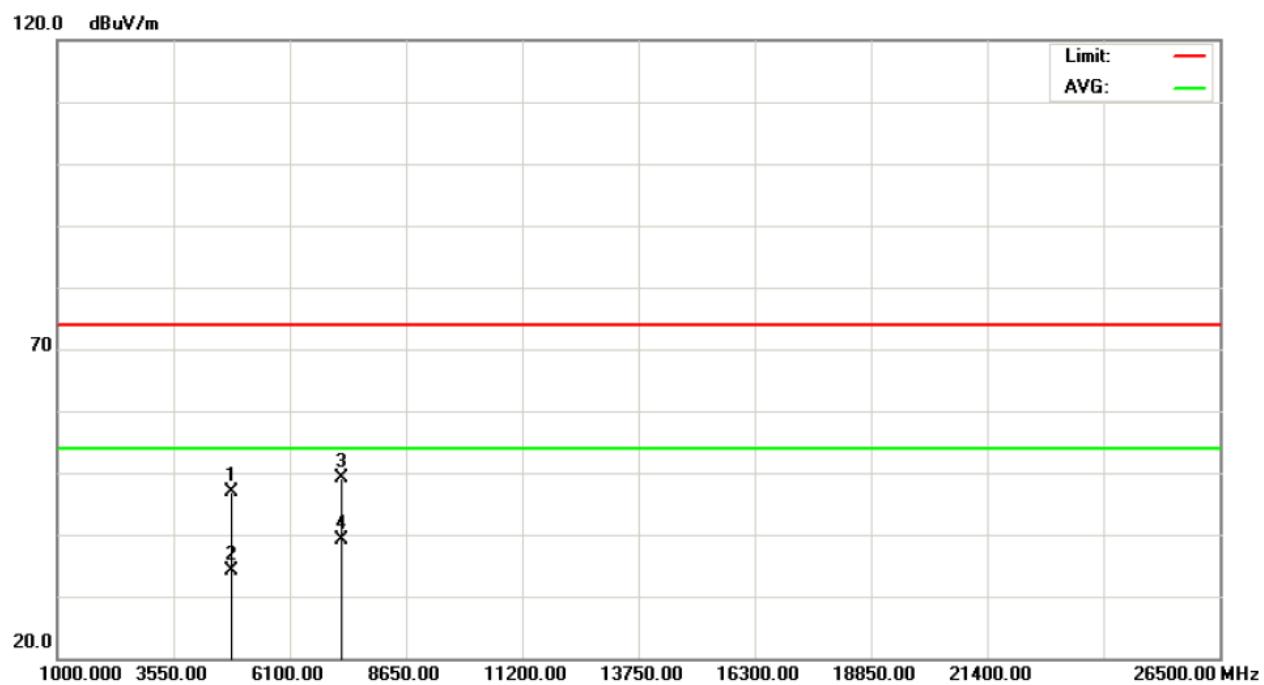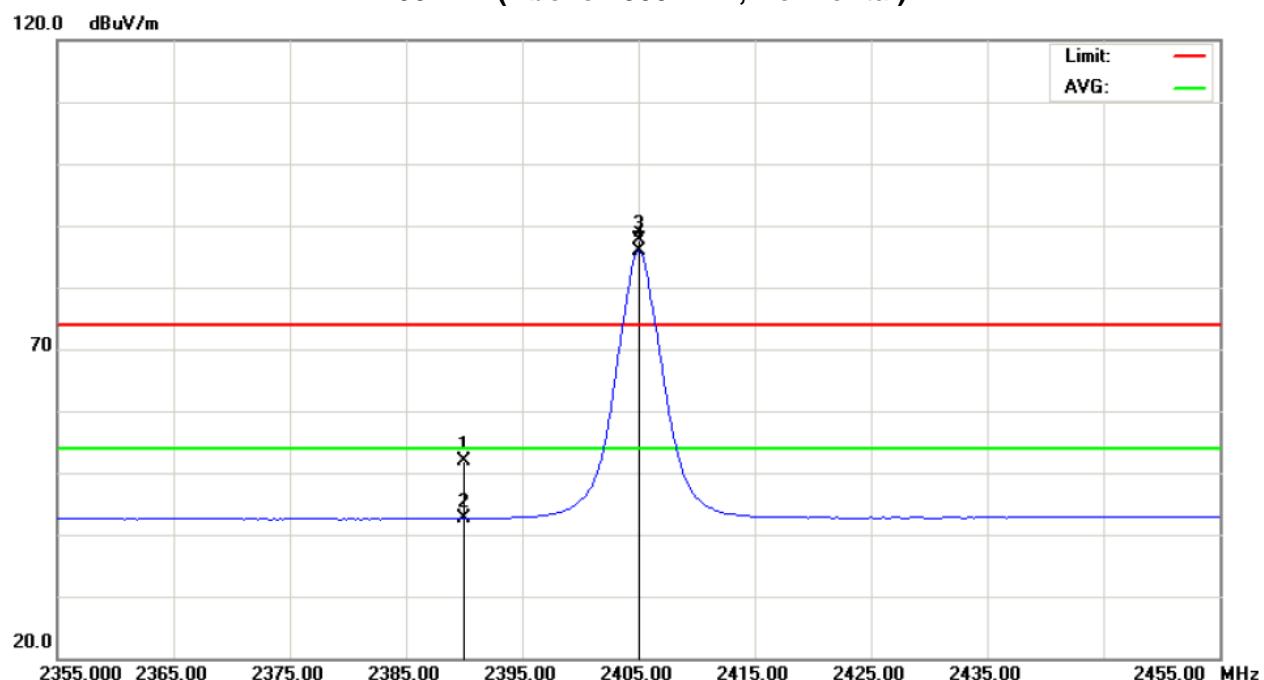



EUT :	ActionTracker	Model Name :	AT2
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60HZ (SYSTEM)		
Test Mode :	2440MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2440.00	V	54.40	52.84	31.48	85.88	84.32			X/F
4880.00	V	47.24	36.24	2.71	49.95	38.95	74.00	54.00	X/H
7320.00	V	40.24	31.28	8.23	48.47	39.51	74.00	54.00	X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

2440MHz (Above 1000 MHz, Vertical)

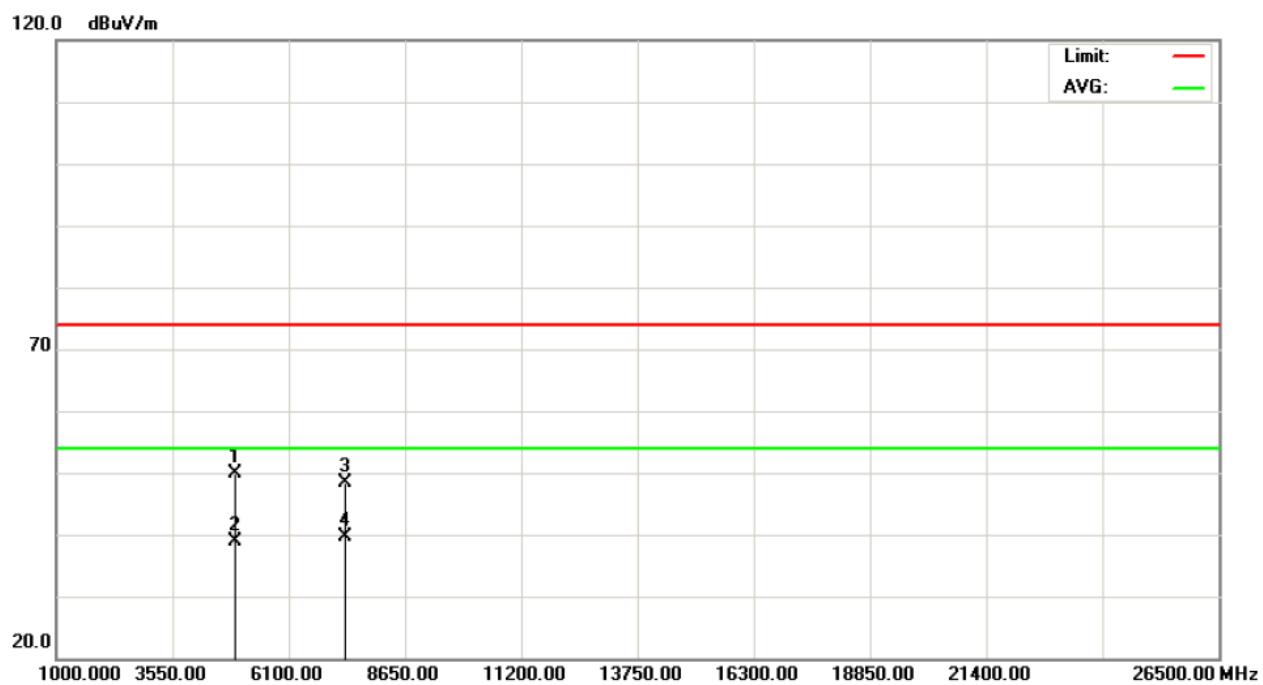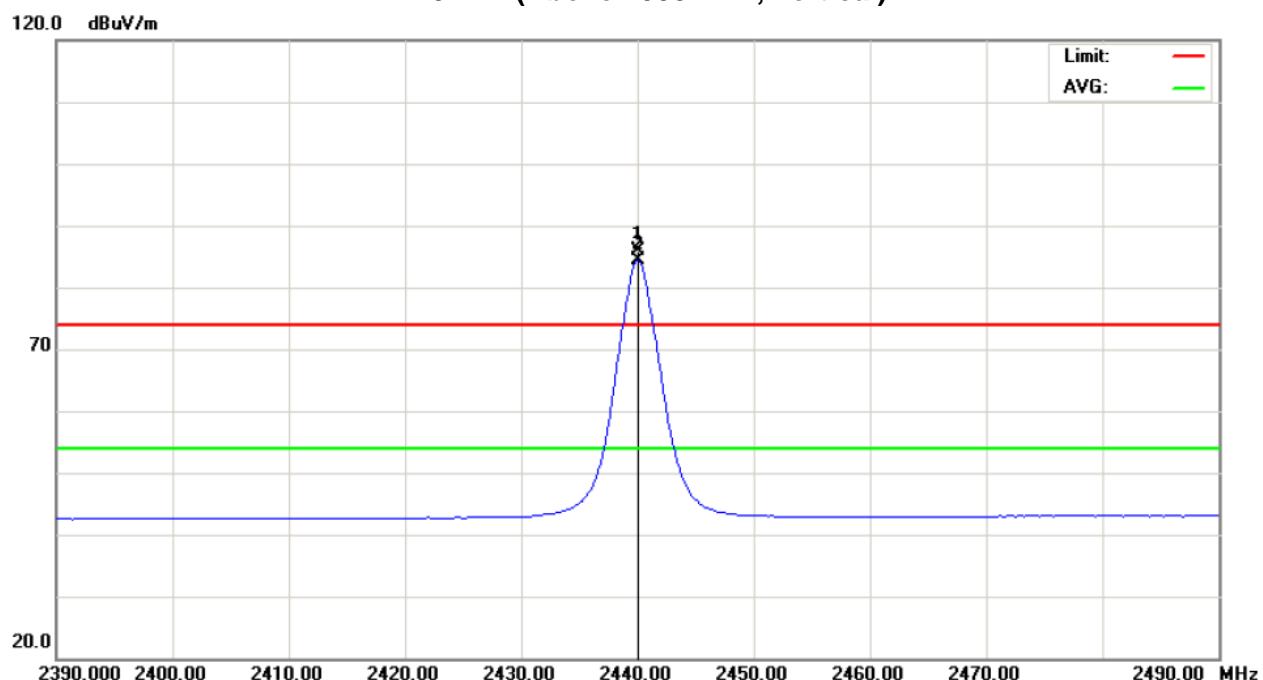



EUT :	ActionTracker	Model Name :	AT2
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60HZ (SYSTEM)		
Test Mode :	2440MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2440.00	H	57.18	55.59	31.48	88.66	87.07			X/F
4880.00	H	45.38	34.13	2.71	48.09	36.84	74.00	54.00	X/H
7320.00	H	4.00	31.28	8.23	12.23	39.51	74.00	54.00	X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency . "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

2440MHz (Above 1000 MHz, Horizontal)

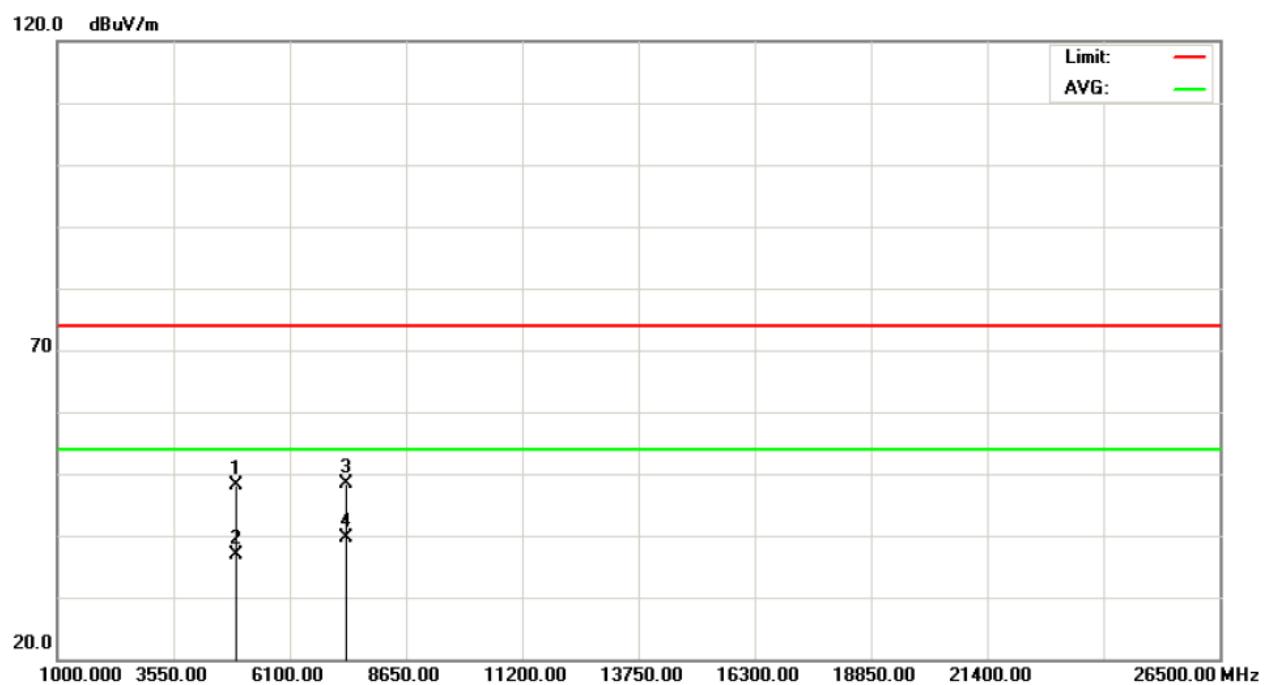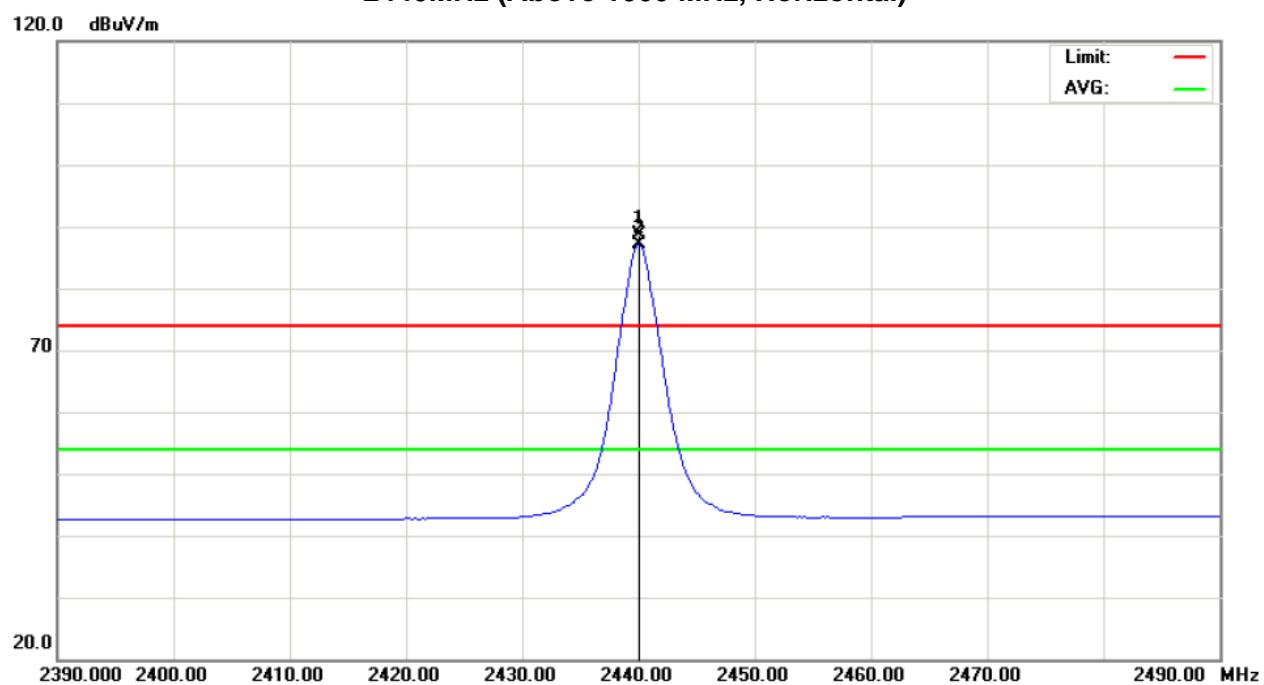



EUT :	ActionTracker	Model Name :	AT2
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60HZ (SYSTEM)		
Test Mode :	2475MHz		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2475.00	V	58.76	56.49	31.64	90.40	88.13			X/F
2483.50	V	22.00	12.31	31.68	53.68	43.99	74.00	54.00	X/E
4950.86	V	47.63	37.09	3.21	50.84	40.30	74.00	54.00	X/H
7425.20	V	42.37	30.75	8.93	51.30	39.68	74.00	54.00	X/H



Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission.
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X

2475MH (Above 1000 MHz, Vertical)

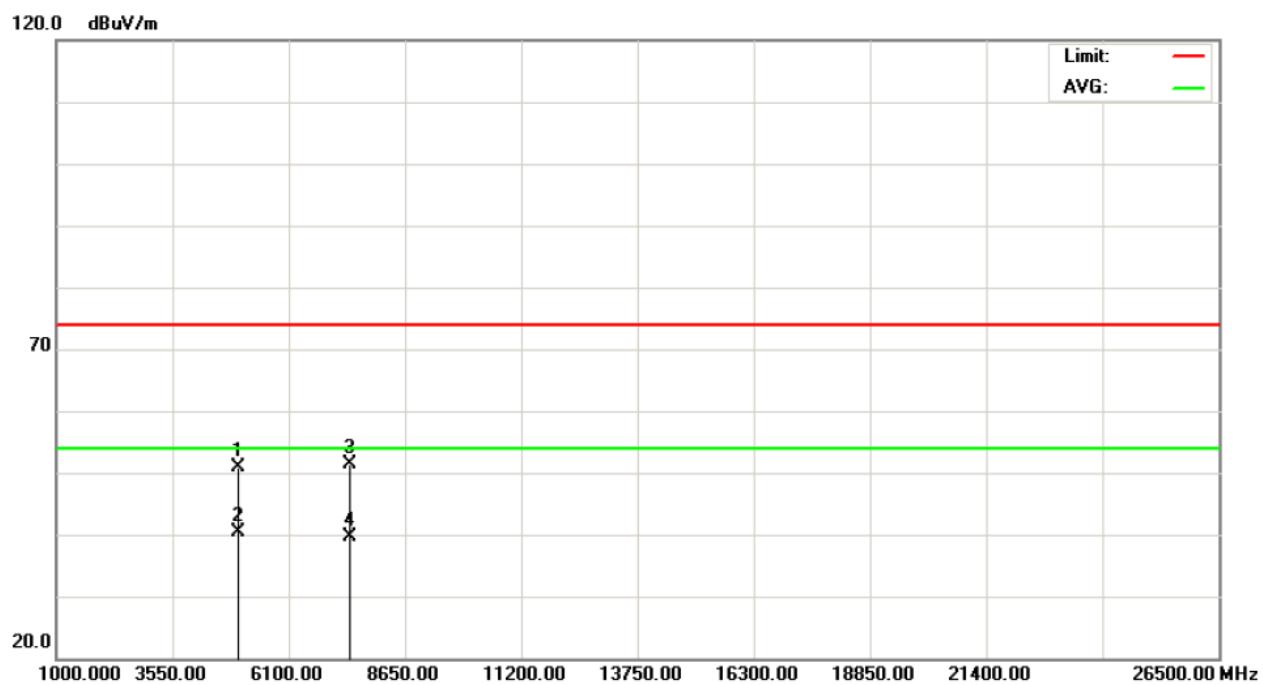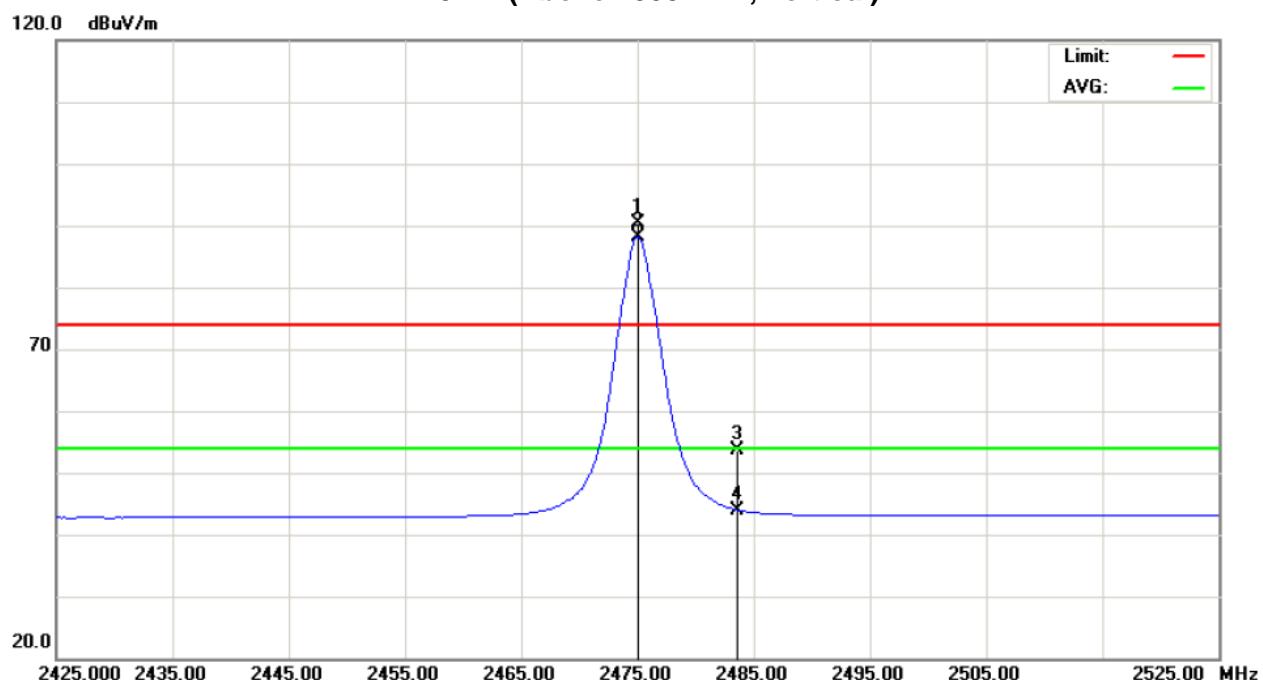



EUT :	ActionTracker	Model Name :	AT2
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60HZ (SYSTEM)		
Test Mode :	2475MHz		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2475.00	H	58.95	56.63	31.64	90.59	88.27			X/F
2483.50	H	22.61	12.33	31.68	54.29	44.01	74.00	54.00	X/E
4950.86	H	44.52	33.62	3.21	47.73	36.83	74.00	54.00	X/H
7424.88	H	41.57	30.77	8.93	50.50	39.70	74.00	54.00	X/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency . "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
2475MHz (Above 1000 MHz, Horizontal)

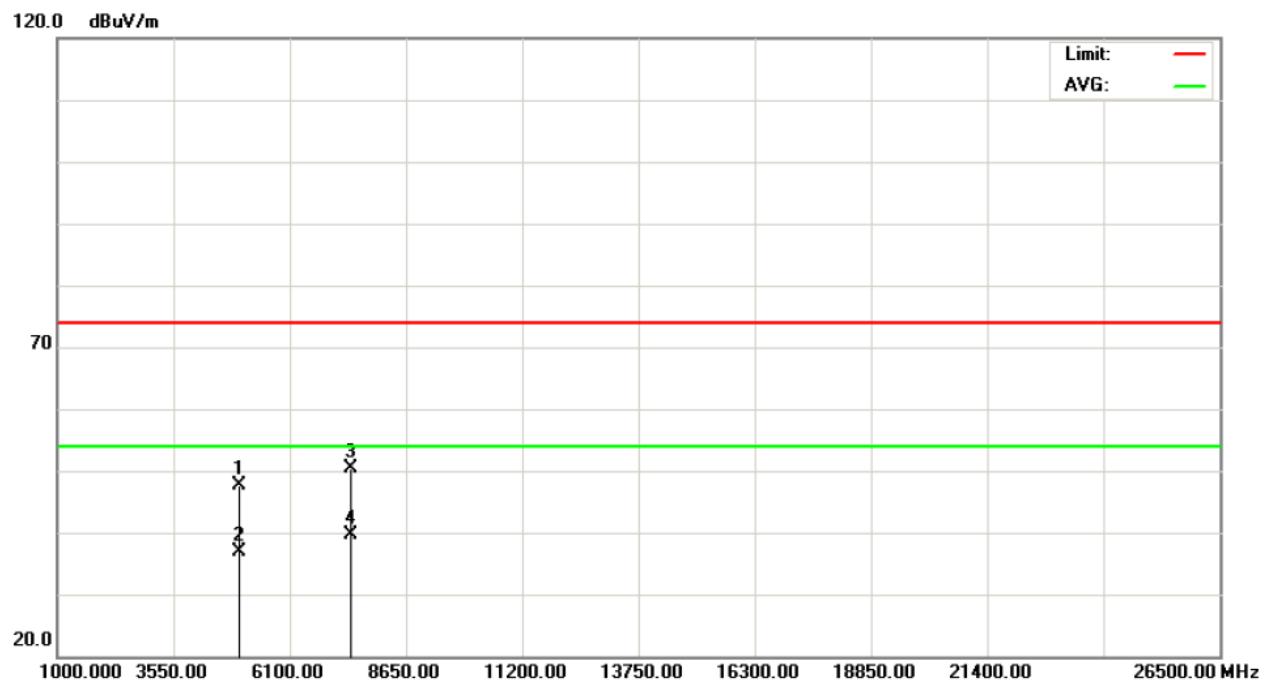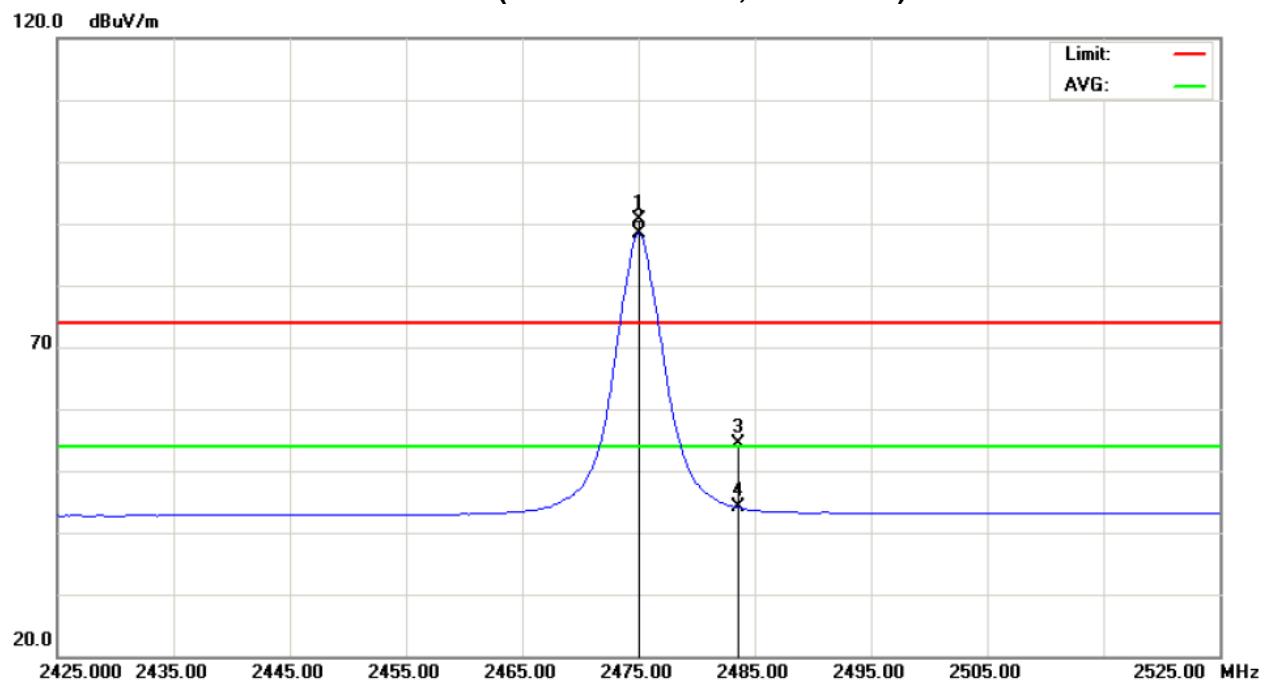



5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart C			
Test Item	Limit	Frequency Range (MHz)	Result
Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

5.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Aug. 31, 2011

Remark: " N/A" denotes No Model Name , Serial No. or No Calibration specified.

5.1.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

5.1.3 DEVIATION FROM STANDARD

No deviation.

5.1.4 TEST SETUP



5.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.
Chip antenna measurement result.




5.1.6 TEST RESULTS

EUT :	ActionTracker	Model Name :	AT2
Temperature :	24 °C	Relative Humidity :	51%
Test Voltage :	AC 120V/60HZ (SYSTEM)		
Test Mode :	2405MHz/2440MHz/2475MHz		


Frequency (MHz)	Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	LIMIT (MHz)	Test Result
2405MHz	1.56	2.33	>=500KHz	Compliant
2440MHz	1.60	2.38	>=500KHz	Compliant
2475MHz	1.58	2.44	>=500KHz	Compliant

2405MHz

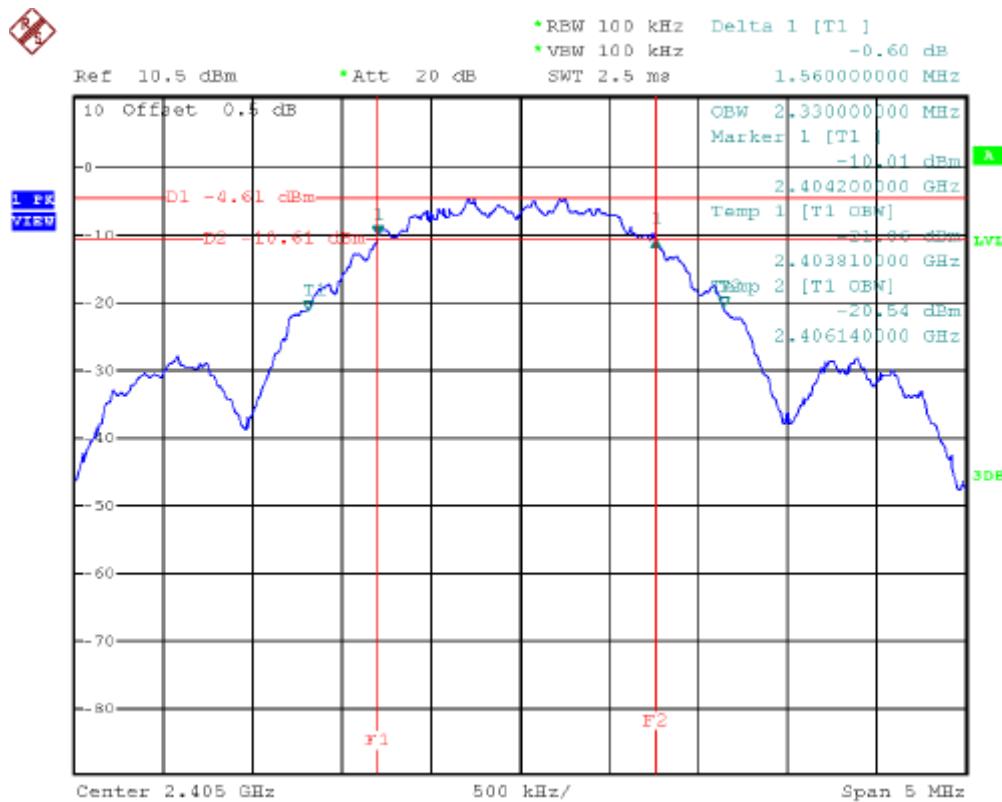




2440MHz

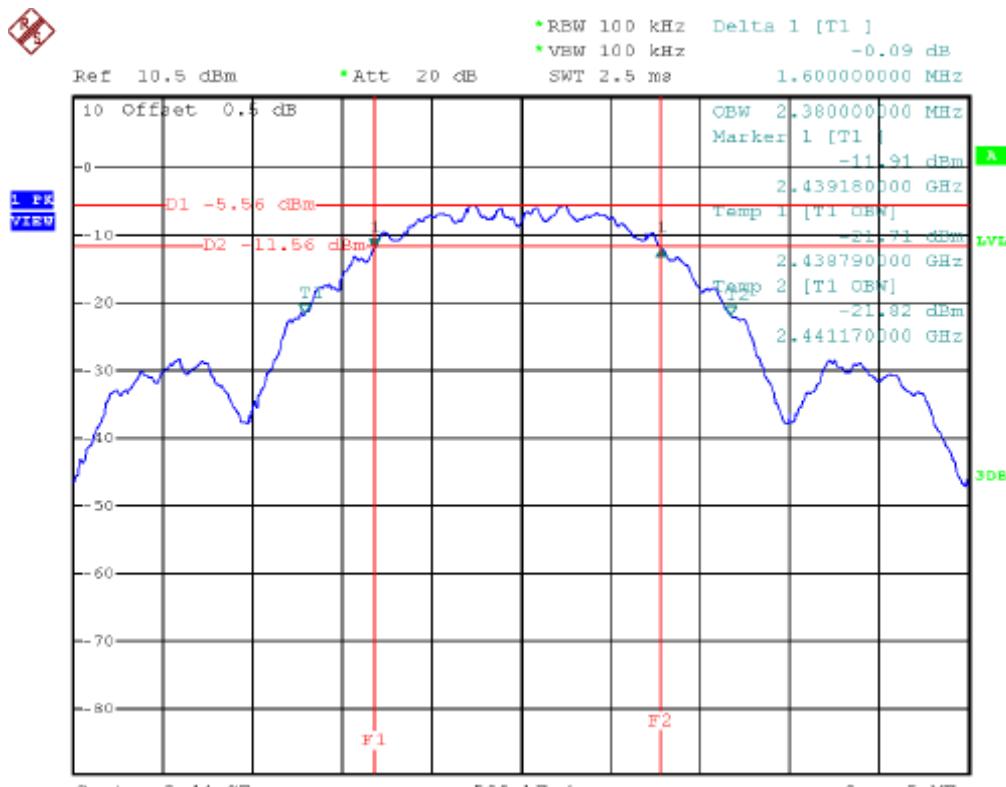

2475MHz

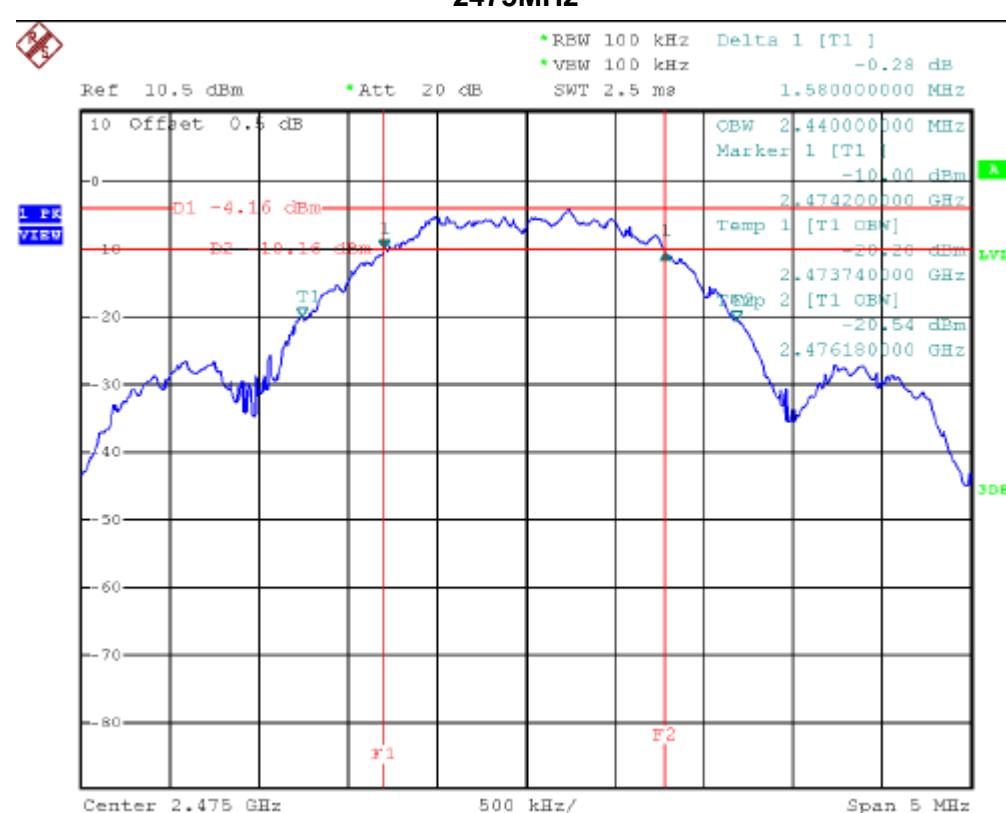



6. PEAK OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart C			
Test Item	Limit	Frequency Range (MHz)	Result
Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

6.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Power Meter	Anritsu	ML2487A	6K00004714	Feb. 10, 2011
2	Power Meter Sensor	Anritsu	MA2491A	34138	Feb. 10, 2011

Remark: " N/A" denotes No Model Name , Serial No. or No Calibration specified.

6.1.2 TEST PROCEDURE

- The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,

6.1.3 DEVIATION FROM STANDARD

No deviation.

6.1.4 TEST SETUP



6.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.
Chip antenna measurement result.



6.1.6 TEST RESULTS

EUT :	ActionTracker	Model Name :	AT2
Temperature :	24 °C	Relative Humidity :	51%
Test Voltage :	AC 120V/60HZ (SYSTEM)		
Test Mode :	2405MHz/2440MHz/2475MHz		

Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	LIMIT (W)	Test Result
2405MHz	1.82	30	1	Compliant
2440MHz	1.21	30	1	Compliant
2475MHz	1.83	30	1	Compliant



7. ANTENNA CONDUCTED SPURIOUS EMISSION

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart C			
Test Item	Limit	Frequency Range (MHz)	Result
Antenna conducted Spurious Emission	20dB less than the peak value of fundamental frequency	30-25000	PASS

7.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Aug. 31, 2011

Remark: " N/A" denotes No Model Name , Serial No. or No Calibration specified.

7.1.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

7.1.3 DEVIATION FROM STANDARD

No deviation.

7.1.4 TEST SETUP



7.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.2.6 Unless otherwise a special operating condition is specified in the follows during the testing.
Chip antenna measurement result.


**7.1.6 TEST RESULTS**

EUT :	ActionTracker	Model Name :	AT2
Temperature :	24 °C	Relative Humidity :	51%
Test Voltage :	AC 120V/60HZ (SYSTEM)		
Test Mode :	2405MHz, 2475MHz		


Channel of Worst Data: 2405MHz, 2475MHz			
The max. radio frequency power in any 100kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
2390.0	-57.36	2485.3	-52.74
Result			
In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest lever of the desired power.			



2405MHz

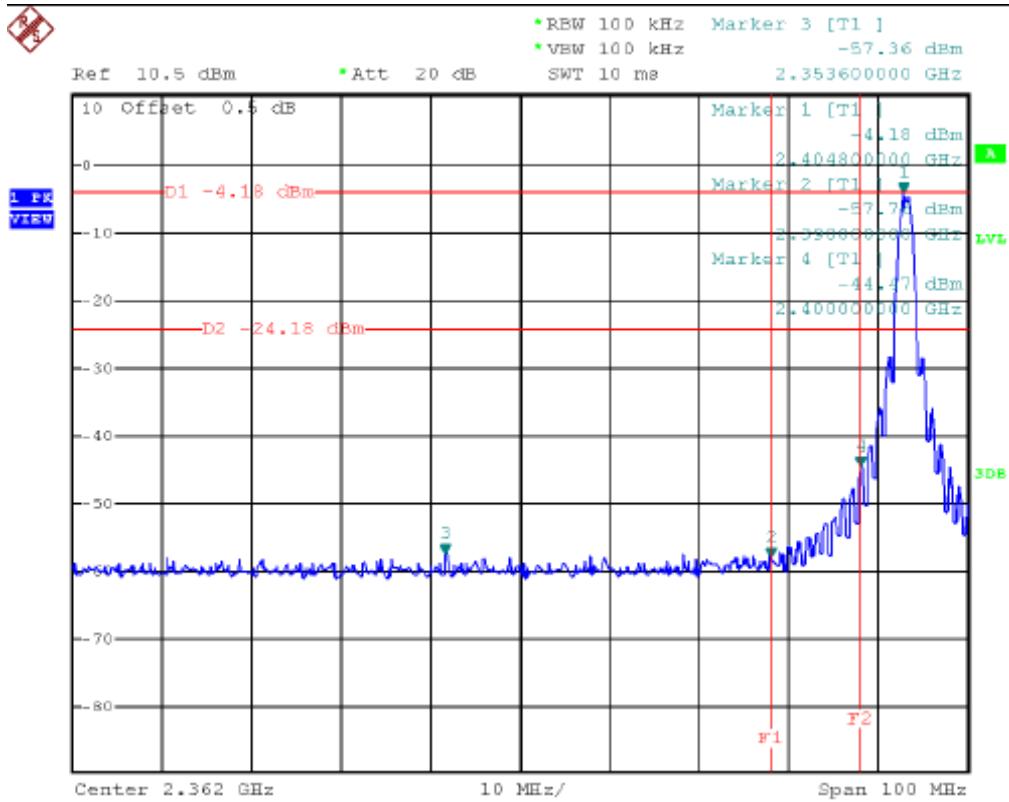


2475MHz

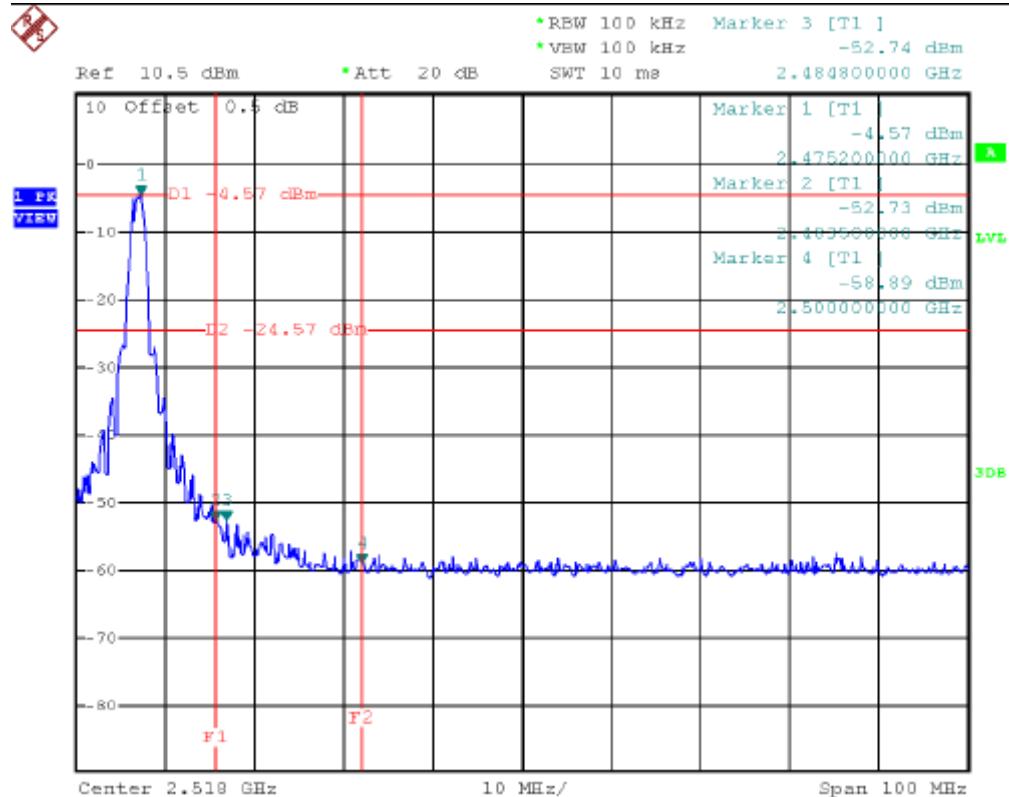




2405MHz

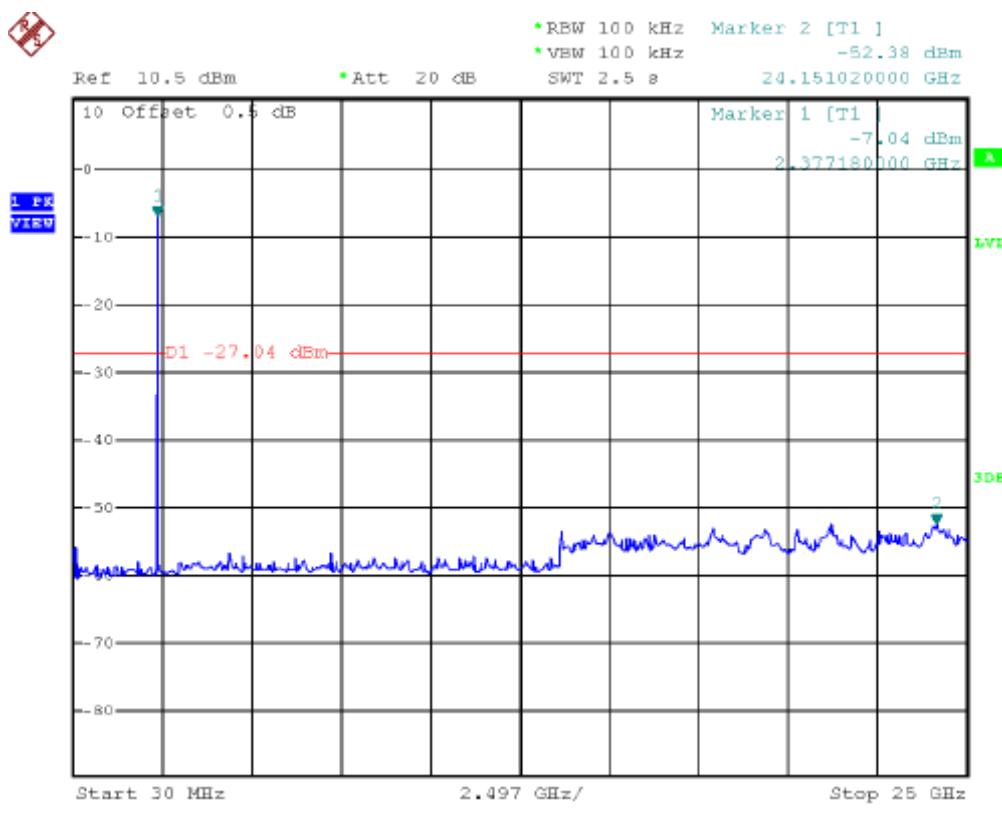


2440MHz

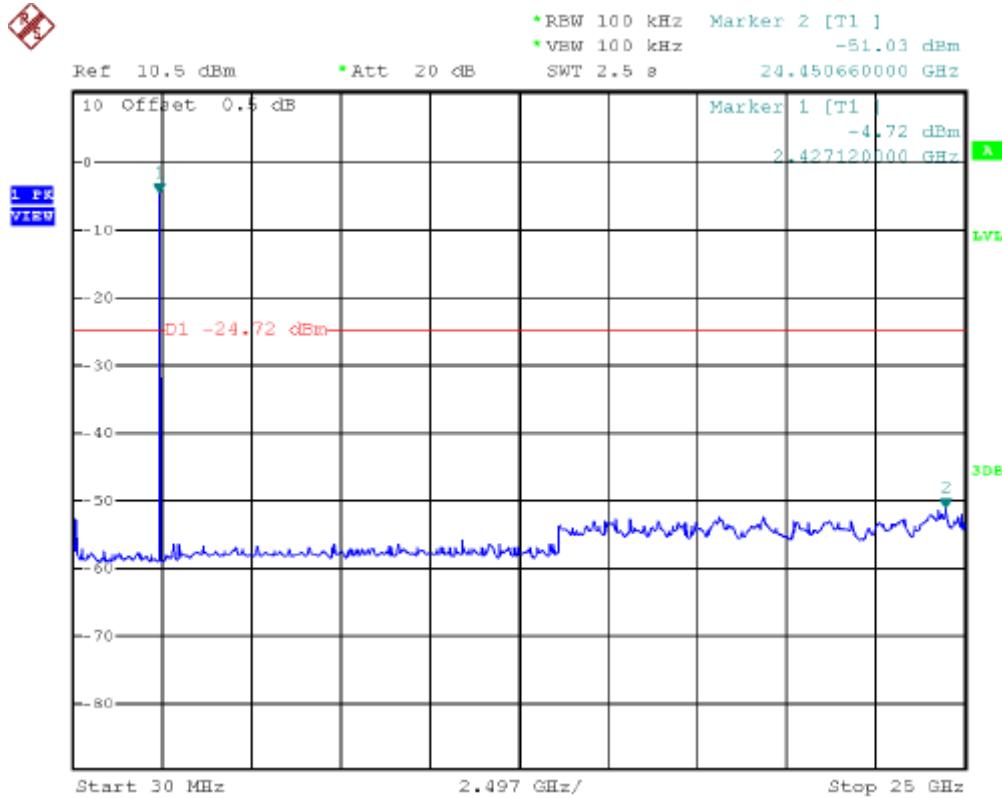



2475MHz

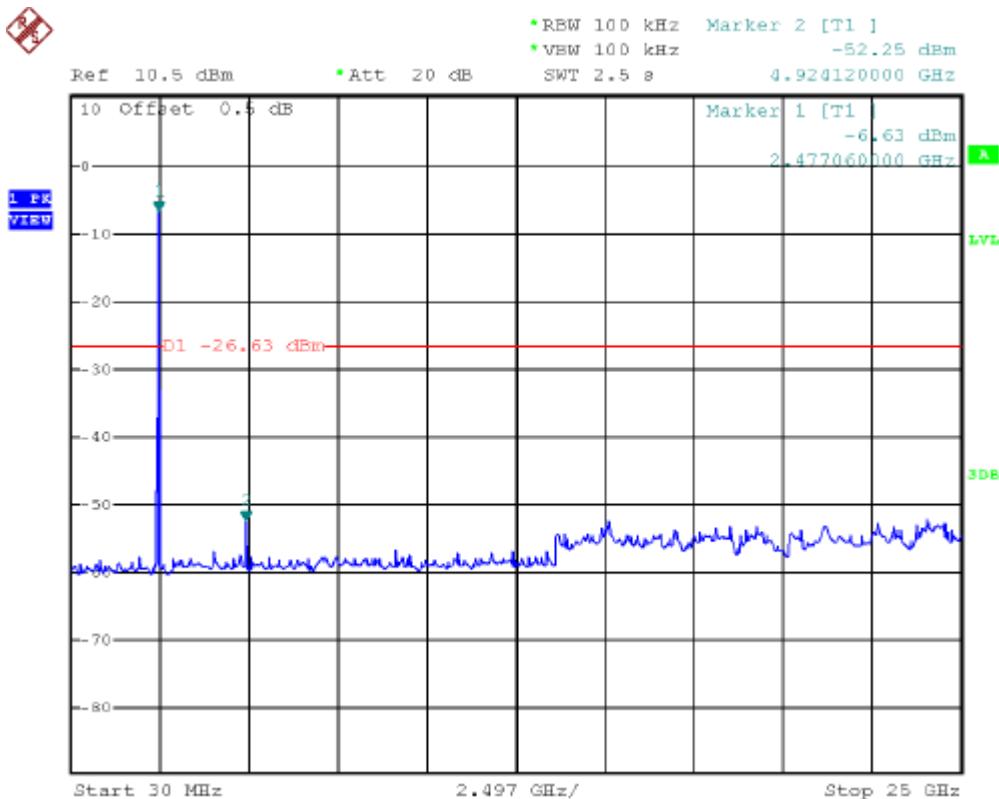



8. POWER SPECTRAL DENSITY TEST

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart C			
Test Item	Limit	Frequency Range (MHz)	Result
Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

8.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Aug. 31, 2011

Remark: " N/A" denotes No Model Name, Serial No. or No Calibration specified.

8.1.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW=3KHz, VBW=30KHz, Sweep time = 500s.

8.1.3 DEVIATION FROM STANDARD

No deviation.

8.1.4 TEST SETUP



8.1.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.
Chip antenna measurement result.



8.1.6 TEST RESULTS


EUT :	ActionTracker	Model Name :	AT2
Temperature :	24 °C	Relative Humidity :	51%
Test Voltage :	AC 120V/60HZ (SYSTEM)		
Test Mode :	TX 2405MHz/2440MHz/2475MHz		

Frequency (MHz)	Power Density (dBm)	LIMIT (dBm)	Test Result
2405MHz	-16.29	8	Compliant
2440MHz	-17.09	8	Compliant
2475MHz	-13.25	8	Compliant

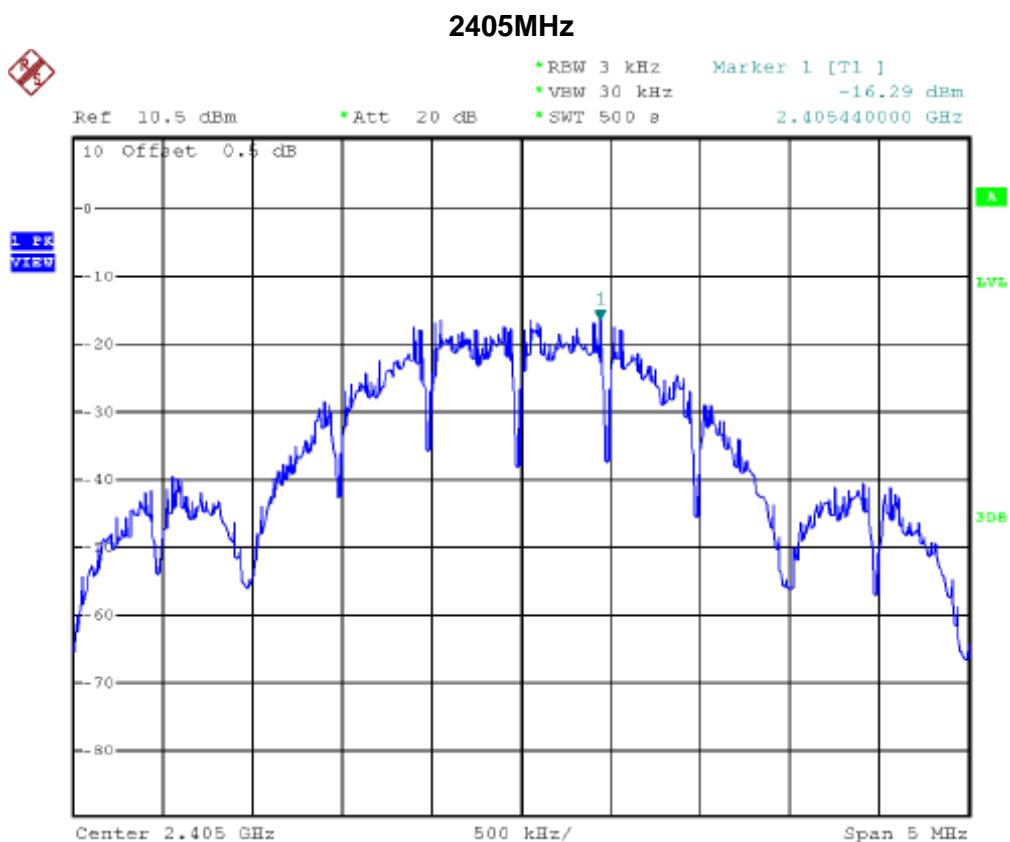




2440MHz

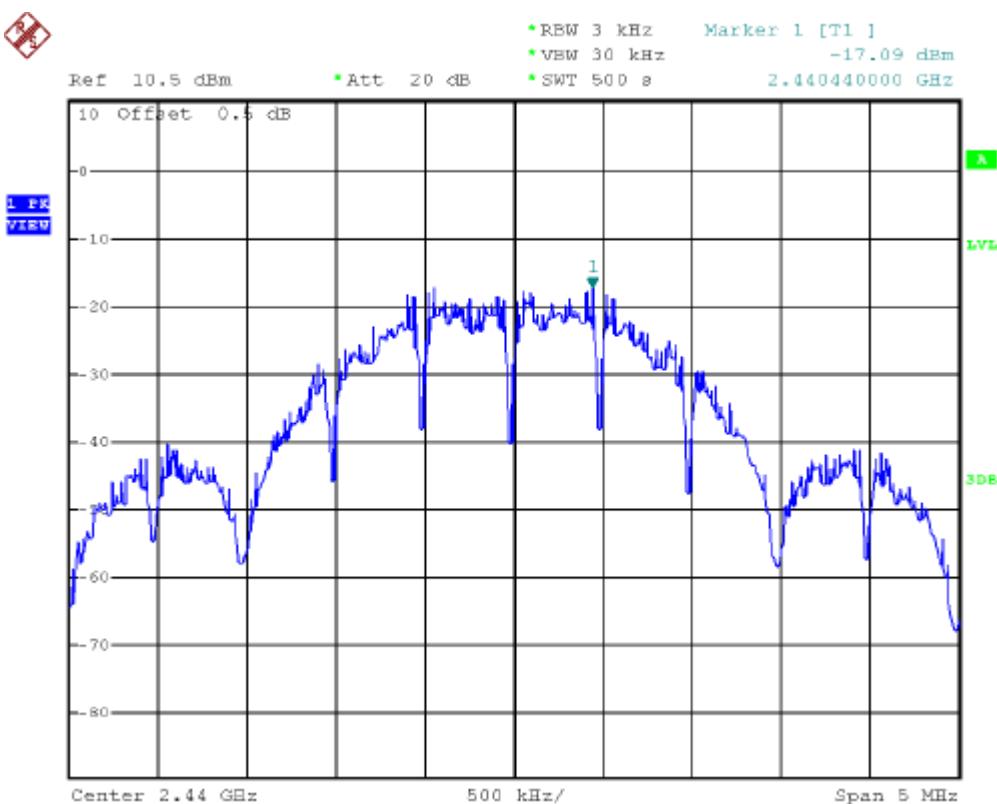

2441MHz

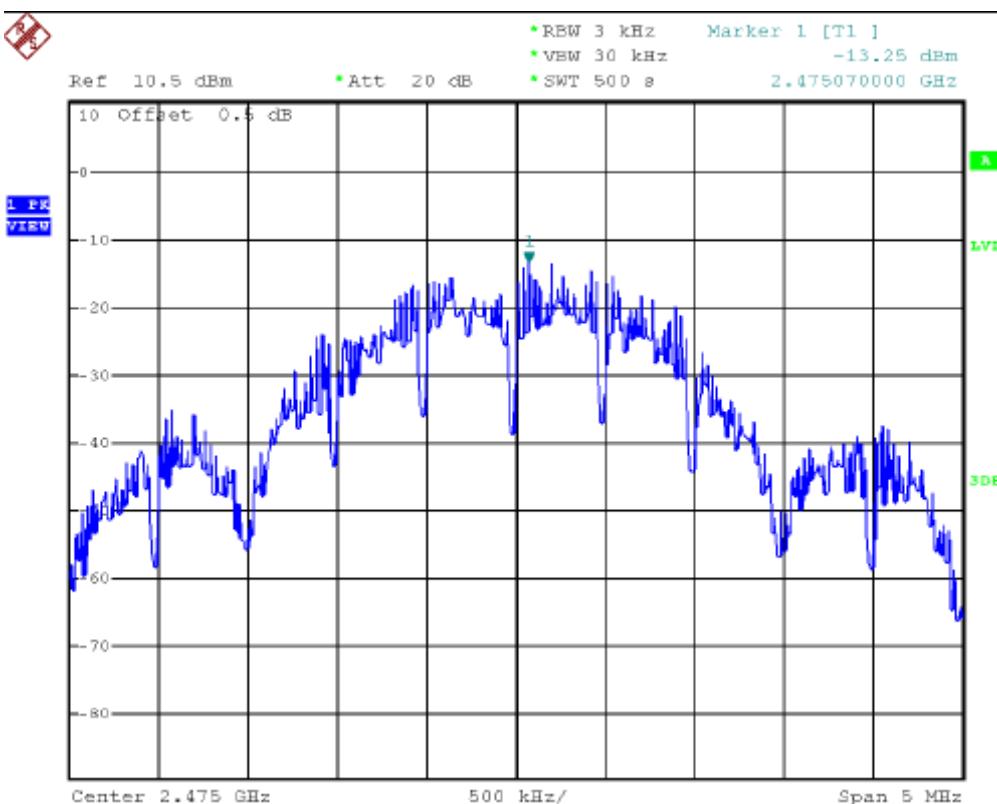



9. RF EXPOSURE TEST

9.1 APPLIED PROCEDURES / LIMIT

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure.

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

9.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Power Meter	Anritsu	ML2487A	6K00004714	Feb. 10, 2011
2	Power Meter Sensor	Anritsu	MA2491A	34138	Feb. 10, 2011

Remark: " N/A" denotes No Model Name , Serial No. or No Calibration specified.

9.1.2 MPE CALCULATION METHOD

The power is too low, so no RF calculations are needed.