


Test Report of FCC CFR 47 Part 15 Subpart C and Industry Canada RSS-210 Issue 8

On Behalf of

Kobian Canada INC

FCC ID: YH5-9DTB7
Product Description: MID
Model No.: HS-9DTB7
Supplementary Model: MID9308CM, MID9308HCM, MID9308CE, MID9308HCE
MY9308P, , MY93**P, MY93**G, MY93**E, MY93**S,
MW93**P, MW93**G, MW93**E, MW93**S, MID93**CM,
MID93**CE, MID93**HCM, MID93**HCE (** Can be 01-99)
Brand Name: HENA, Hipstreet
Prepared for: Kobian Canada INC
5-560 Denison St., Markham, Ontario, L3R 2M8, Canada
Prepared by: Shenzhen Bontek Compliance Testing Laboratory Co., Ltd.
1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East
Road, Nanshan, Shenzhen, China
Tel: 86-755-86337020
Fax: 86-755-86337028
Report No.: BCT13HR268E-1
Issue Date: September 10, 2013
Test Date: August 15-September 8, 2013

Tested by:


Lion Cai

Reviewed by:


Kevin Chi

Approved by:



Kendy Wang

TABLE OF CONTENTS

1. GENERAL INFORMATION..... 4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)..... 4
1.2 TEST STANDARDS 5
1.3 TEST FACILITY 5

2. SYSTEM TEST CONFIGURATION 6
2.1 EUT CONFIGURATION 6
2.2 EUT EXERCISE 6
2.3 GENERAL TEST PROCEDURES 6
2.4 MEASUREMENT UNCERTAINTY 6
2.5 LIST OF MEASURING EQUIPMENTS USED 7

3. SUMMARY OF TEST RESULTS..... 8

4. TEST OF AC POWER LINE CONDUCTED EMISSION 9
4.1 APPLICABLE STANDARD..... 9
4.2 TEST SETUP DIAGRAM 9
4.3 TEST RESULT 9

5. TEST OF MAXIMUM PEAK OUTPUT POWER 12
5.1 APPLICABLE STANDARD..... 12
5.2 EUT SETUP 12
5.3 TEST EQUIPMENT LIST AND DETAILS 12
5.4 TEST PROCEDURE 12
5.5 TEST RESULT 12

6. TEST OF PEAK POWER SPECTRAL DENSITY 20
6.1 APPLICABLE STANDARD..... 20
6.2 EUT SETUP 20
6.3 TEST EQUIPMENT LIST AND DETAILS 20
6.4 TEST PROCEDURE 20
6.5 TEST RESULT 20

7. TEST OF 6DB BANDWIDTH..... 30
7.1 APPLICABLE STANDARD..... 30
7.2 EUT SETUP 30
7.3 TEST EQUIPMENT LIST AND DETAILS 30
7.4 TEST PROCEDURE 30
7.5 TEST RESULT 30

8. TEST OF CONDUCTED SPURIOUS EMISSION..... 41
8.1 APPLICABLE STANDARD..... 41
8.2 EUT SETUP 41
8.3 TEST EQUIPMENT LIST AND DETAILS 41
8.4 TEST PROCEDURE 41
8.5 TEST RESULT 41

9. TEST OF RADIATED SPURIOUS EMISSION 48
9.1 RADIATED SPURIOUS EMISSION 48
9.1.1 LIMITS 48
9.1.2 EUT SETUP..... 49
9.1.3 TEST PROCEDURE 50
9.1.4 TEST RESULT 50

10. TEST OF BAND EDGES EMISSION..... 64
10.1 APPLICABLE STANDARD..... 64
10.2 EUT SETUP 64
10.3 TEST EQUIPMENT LIST AND DETAILS 64
10.4 TEST PROCEDURE 64
10.5 TEST RESULT 65

11. ANTENNA REQUIREMENT 71

11.1 STANDARD APPLICABLE..... 71
11.2 ANTENNA CONNECTED CONSTRUCTION 71

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant:	Kobian Canada INC
Address of Applicant:	5-560 Denison St., Markham, Ontario, L3R 2M8, Canada
Manufacturer:	Hena Digital Technology (Shenzhen) Co., Ltd.
Address of Manufacturer:	3F, South Tower, Jiuzhou Electric Building, Southern No, 12Rd, High-tech Industrial Park, Nanshan District, Shenzhen, China

General Description of E.U.T

Items	Description
EUT Description:	MID
Trade Name:	HENA, Hipstreet
Model No.:	HS-9DTB7
Supplementary Model:	MID9308CM, MID9308HCM, MID9308CE, MID9308HCE MY9308P, , MY93**P, MY93**G, MY93**E, MY93**S, MW93**P, MW93**G, MW93**E, MW93**S, MID93**CM, MID93**CE, MID93**HCM, MID93**HCE (** Can be 01-99)
Frequency Band:	IEEE 802.11b/g, IEEE 802.11n HT20 (ISM Band) : 2412MHz~2462MHz, IEEE 802.11n HT40 (ISM Band) : 2422MHz~2452MHz
Channel Spacing:	IEEE 802.11b/g, 802.11n HT20/HT40: 5MHz
Number of Channels:	IEEE 802.11b/g, 802.11n HT20:11 Channels IEEE 802.11n HT40 :7 Channels
Transmit Data Rate:	maximum of 150Mbps
Type of Modulation:	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20/40: OFDM (64QAM, 16QAM, QPSK, BPSK)
Antenna Type:	Built-in Antenna
Antenna Gain:	0.8 dBi
Power Supply:	Input: 5VDC 2.0A from AC/DC adapter
Adapter Information:	Model:K15S050200U Input: AC 100-240V 50/60Hz 0.5A ; Output: 5VDC 2.0A

Remark: * The test data gathered are from the production sample provided by the manufacturer.
* Supplementary models have the same circuit, but with different appearance

1.2 Test Standards

The tests were performed based on the Electromagnetic Interference (EMI) tests performed on the EUT. Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 - 2003 and clause 4 of RSS-GEN Issue 2. Radiated testing was performed at an antenna to EUT distance 3 meters.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.207, 15.209 and 15.247 rules and the FCC publication KDB558074 of Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247) and RSS-GEN Issue 2 and RSS-210 Issue 8.

1.3 Test Facility

All measurement required was performed at laboratory of Shenzhen Bontek Compliance Testing Laboratory Co., Ltd. at 1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East Road, Nanshan, Shenzhen, China.

The test facility is recognized, certified, or accredited by the following organizations:

FCC – Registration No.: 338263

Shenzhen Bontek Compliance Testing Laboratory Co., Ltd., EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 338263, March, 2011.

IC Registration No.: 7631A

The 3m alternate test site of Shenzhen Bontek Compliance Testing Laboratory Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 7631A on January 2011.

The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

CNAS - Registration No.: L3923

Shenzhen Bontek Compliance Testing Laboratory Co., Ltd. to ISO/IEC 17025:25 General Requirements for the Competence of Testing and Calibration Laboratories(CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.The acceptance letter from the CNAS is maintained in our files: Registration: L3923, March, 2012.

TUV - Registration No.: UA 50242657-0001

Shenzhen Bontek Compliance Testing Laboratory Co.,Ltd. An assessment of the laboratory was conducted according to the"Procedures and Conditions for EMC Test Laboratories"with reference to EN ISO/IEC 17025 by a TUV Rheinland auditor. Audit Report NO.17010783-003

2. SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The calibrated antennas used to sample the radiated field strength are mounted on a non-conductive, motorized antenna mast 3 or 10 meters from the leading edge of the turntable.

Support equipments or special accessories in test configuration:

AUX Description:	Manufacturer	Model No.	Certificate	CABLE
Host Computer	Dell	78MD82X	CE, FCC	1.5m Unshielded Power Cord
Monitor	Dell	E178Pc	CE, FCC	1.5m Unshielded Power Cord 1.8m shielded data Cable with core
Keyboard	Dell	L100	CE, FCC	1.8m shielded data Cable with core
Mouse	Dell	OCJ339	CE, FCC	1.8m shielded data Cable with core
Printer	EPSON	P330A	CE, FCC	1.2m Unshielded Power Cord 1.5m shielded data Cable

2.3 General Test Procedures

Conducted Emissions:The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 7.1 of ANSI C63.4-2003 and Clause 4 of RSS-GEN Issue 2. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak detector mode.

Radiated Emissions: The EUT is a placed on as turntable, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4-2003 and Clause 4 of RSS-GEN Issue 2.

2.4 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Power Line Conducted Emission	+/- 2.3 dB
Radiated Emission	+/- 3.4 dB

Uncertainty figures are valid to a confidence level of 95%.

2.5 List of Measuring Equipments Used

Test equipments list of Shenzhen Bontek Compliance Testing Laboratory Co., Ltd.

No.	Instrument no.	Equipment	Manufacturer	Model No.	S/N	Last Calculator	Due Calculator
1	BCT-EMC001	EMI Test Receiver	R&S	ESCI	100687	2013-4-16	2014-4-17
2	BCT-EMC002	EMI Test Receiver	R&S	ESPI	100097	2012-11-1	2013-10-31
3	BCT-EMC003	Amplifier	HP	8447D	1937A02492	2013-4-19	2014-4-18
4	BCT-EMC004	Single Power Conductor Module	R&S	NNBM 8124	242	2013-4-19	2014-4-18
5	BCT-EMC005	Single Power Conductor Module	R&S	NNBM 8124	243	2013-4-19	2014-4-18
6	BCT-EMC006	Power Clamp	SCHWARZBECK	MDS-21	3812	2012-11-5	2013-11-4
7	BCT-EMC007	Positioning Controller	C&C	CC-C-1F	MF7802113	N/A	N/A
8	BCT-EMC008	Electrostatic Discharge Simulator	TESEQ	NSG437	125	2012-11-2	2013-11-1
9	BCT-EMC009	Fast Transient Burst Generator	SCHAFFNER	MODULA6150	34572	2013-4-16	2014-4-17
10	BCT-EMC010	Fast Transient Noise Simulator	Noiseken	FNS-105AX	10501	2012-6-26	2013-6-25
11	BCT-EMC011	Color TV Pattern Generator	PHILIPS	PM5418	TM209947	N/A	N/A
12	BCT-EMC012	Power Frequency Magnetic Field Generator	EVERFINE	EMS61000-8K	608002	2013-4-16	2014-4-17
14	BCT-EMC014	Capacitive Coupling Clamp	TESEQ	CDN8014	25096	2013-4-16	2014-4-17
15	BCT-EMC015	High Field Biconical Antenna	ELECTRO-METRICS	EM-6913	166	2012-11-28	2013-11-27
16	BCT-EMC016	Log Periodic Antenna	ELECTRO-METRICS	EM-6950	811	2012-11-28	2013-11-27
17	BCT-EMC017	Remote Active Vertical Antenna	ELECTRO-METRICS	EM-6892	304	2012-11-28	2013-11-27
18	BCT-EMC018	TRILOG Broadband Test-Antenna	SCHWARZBECK	VULB9163	9163-324	2012-5-19	2014-5-18
19	BCT-EMC019	Horn Antenna	SCHWARZBECK	BBHA9120A	0499	2012-11-28	2013-11-27
20	BCT-EMC020	Teo Line Single Phase Module	SCHWARZBECK	NSLK8128	8128247	2012-11-1	2013-10-31
21	BCT-EMC021	Triple-Loop Antenna	EVERFINE	LLA-2	711002	2012-11-15	2013-11-14
22	BCT-EMC022	Electric bridge	Jhai	JK2812C	803024	N/A	N/A
23	BCT-EMC026	RF POWER AMPLIFIER	FRANKONIA	FLL-75	1020A1109	2013-4-17	2014-4-16
24	BCT-EMC027	CDN	FRANKONIA	CDN M2+M3	A3027019	2013-4-17	2014-4-16
25	BCT-EMC029	6DB Attenuator	FRANKONIA	N/A	1001698	2013-4-17	2014-4-16

26	BCT-EMC030	EM Injection clamp	FCC	F-203I-23mm	091536	2013-4-16	2014-4-17
27	BCT-EMC031	9kHz-2.4GHz signal generator 2024	MARCONI	10S/6625-99-457-8730	112260/042	2013-4-16	2014-4-17
28	BCT-EMC032	10dB attenuator	ELECTRO-METRICS	EM-7600	836	2013-4-16	2014-4-17
29	BCT-EMC033	ISN	TESEQ	ISN-T800	30301	2012-11-15	2013-11-14
30	BCT-EMC034	10KV surge generator	SANKI	SKS-0510M	048110003E321	2012-11-01	2013-10-31
31	BCT-EMC035	HRMONICS&FLICKRE ANALYSER	VOLTECH	PM6000	200006700433	2012-11-20	2013-11-19
32	BCT-EMC036	Spectrum Analyzer	R&S	FSP	100397	2012-11-1	2013-10-31
33	BCT-EMC037	Broadband preamplifier	SCHWARZBECK	BBV9718	9718-182	2013-4-19	2014-4-18

3. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.207 & IC RSS-GEN Clause 7.2.2	AC Power Line Conducted Emission	Pass
FCC §15.247(b) & IC RSS-210 A8.4	Maximum Peak Output Power	Pass
FCC §15.247(e) & IC RSS-210 A8.2 (b)	Power Spectral Density	Pass
FCC §15.247(a) & IC RSS-210 A8.2 (a)	6dB Bandwidth	Pass
FCC §15.247 (d) & IC RSS-210 A8.5	Conducted Spurious Emission	Pass
FCC §15.205 and §15.209 & IC RSS-210 Clause 2.6 (Transmitter) & IC RSS-GEN Clause 6 (Receiver)	Radiated Spurious Emission	Pass
FCC §15.203/15.247(b)/(c) & IC RSS-GEN Clause 7.1.4	Antenna Requirement	Pass

4. TEST OF AC POWER LINE CONDUCTED EMISSION


4.1 Applicable Standard

Refer to FCC §15.207 and IC RSS-GEN Clause 7.2.2..

For a Low-power Radio-frequency Device is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency Range (MHz)	Limits (dBuV)	
	Quasi-Peak	Average
0.150~0.500	66~56	56~46
0.500~5.000	56	46
5.000~30.00	60	50

4.2 Test Setup Diagram

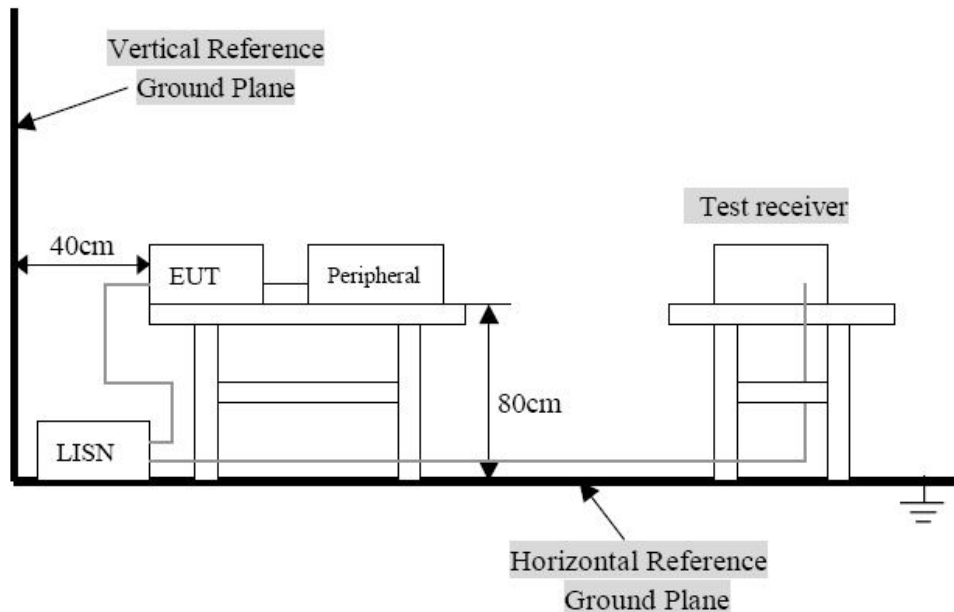

Remark: The EUT was connected to a 120 VAC/ 60Hz power source.


4.3 Test Result

Temperature (°C) : 23~25	EUT: MID
Humidity (%RH) : 45~58	M/N: HS-9DTB7
Barometric Pressure (mbar) : 950~1000	Operation Condition: Charging with Tx Mode

Conducted Emission:

EUT: MID
M/N: HS-9DTB7
Operating Condition: Charging with Tx Mode
Test Site: Shielded Room
Operator: Yang
Test Specification: AC 120V/60Hz for adapter
Comment: L Line

SCAN TABLE: "Voltage (150K-30M) FIN"
Short Description: 150K-30M Voltage

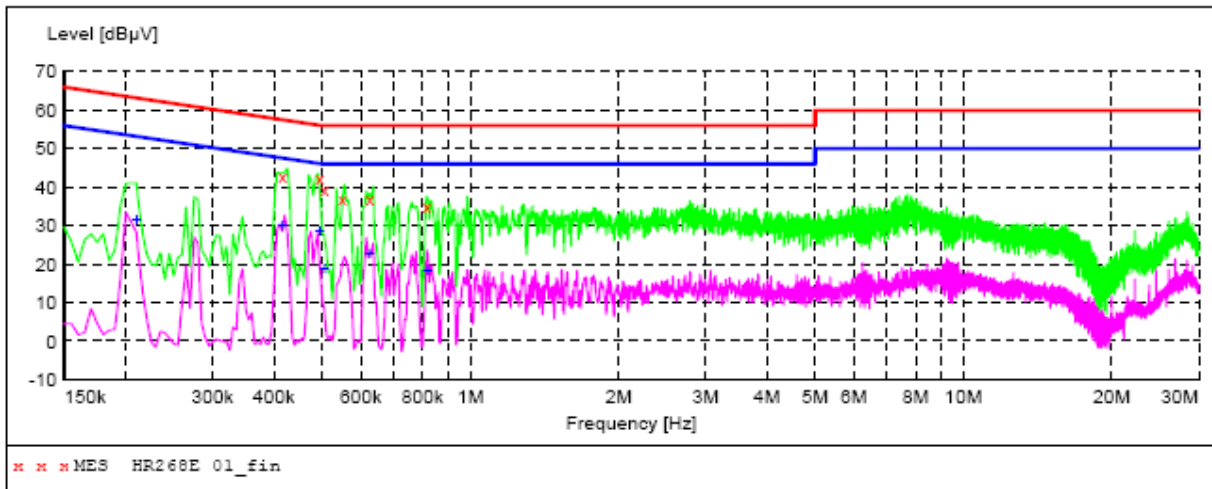

MEASUREMENT RESULT: "HR268E 01_fin"

8/12/2013 13:49

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.415000	43.00	10.7	58	14.5	QP	L	---
0.495000	42.20	10.5	56	13.9	QP	L	---
0.505000	39.40	10.5	56	16.6	QP	L	---
0.550000	37.00	10.5	56	19.0	QP	L	---
0.625000	36.90	10.4	56	19.1	QP	L	---
0.815000	35.00	10.4	56	21.0	QP	L	---

MEASUREMENT RESULT: "HR268E 01_fin2"


8/12/2013 13:49

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.210000	31.70	11.3	53	21.5	AV	L	---
0.415000	30.20	10.7	48	17.3	AV	L	---
0.495000	28.60	10.5	46	17.5	AV	L	---
0.505000	19.00	10.5	46	27.0	AV	L	---
0.625000	22.80	10.4	46	23.2	AV	L	---
0.820000	18.50	10.4	46	27.5	AV	L	---

Conducted Emission:

EUT: MID
M/N: HS-9DTB7
Operating Condition: Charging with Tx Mode
Test Site: Shielded Room
Operator: Yang
Test Specification: AC 120V/60Hz for adapter
Comment: N Line

SCAN TABLE: "Voltage (150K-30M) FIN"
Short Description: 150K-30M Voltage

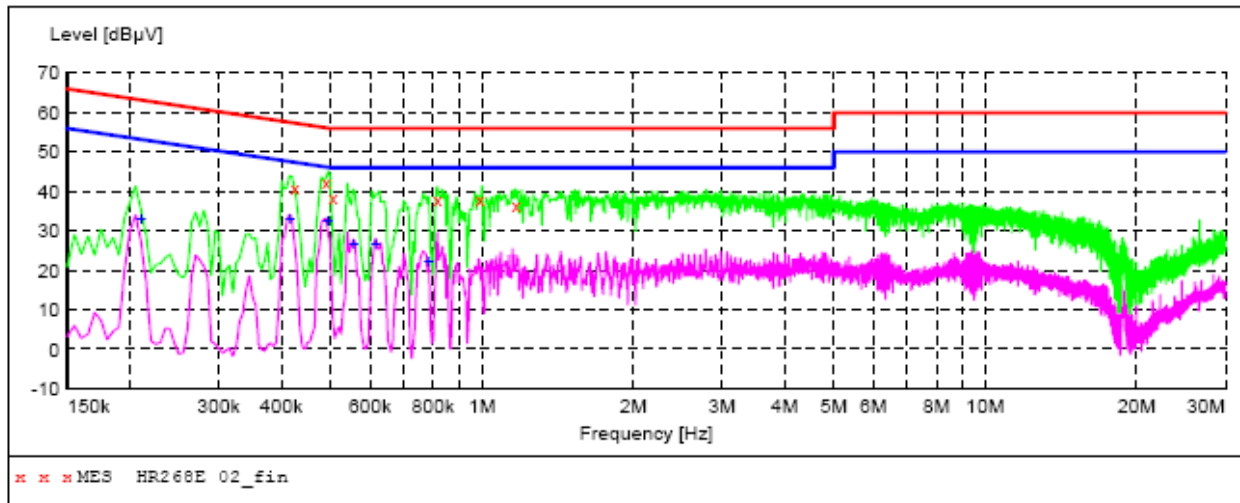

MEASUREMENT RESULT: "HR268E 02_fin"

8/12/2013 13:53

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.425000	41.00	10.6	57	16.3	QP	N	---
0.490000	42.30	10.5	56	13.9	QP	N	---
0.505000	38.60	10.5	56	17.4	QP	N	---
0.815000	37.90	10.4	56	18.1	QP	N	---
0.990000	38.00	10.5	56	18.0	QP	N	---
1.170000	36.40	10.4	56	19.6	QP	N	---

MEASUREMENT RESULT: "HR268E 02_fin2"

8/12/2013 13:53


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.210000	33.30	11.3	53	19.9	AV	N	---
0.415000	33.30	10.7	48	14.2	AV	N	---
0.495000	32.50	10.5	46	13.6	AV	N	---
0.555000	26.60	10.5	46	19.4	AV	N	---
0.615000	26.60	10.4	46	19.4	AV	N	---
0.785000	22.40	10.4	46	23.6	AV	N	---

5. Test of Maximum Peak Output Power

5.1 Applicable Standard

Refer to FCC §15.247 (b) & IC RSS-210 A8.4

5.2 EUT Setup

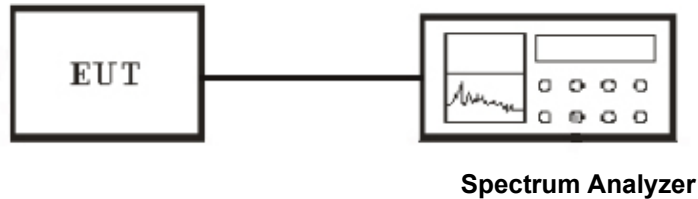

5.3 Test Equipment List and Details

See section 2.5.

5.4 Test Procedure

This procedure should only be used when the maximum available RBW of the spectrum/signal analyzer is less than the DTS bandwidth. The transmitter output was connected to a spectrum analyzer and the parameter was set as below:

1. Set the RBW = maximum available (at least 1 MHz).
2. Set the VBW = 3 x RBW or maximum available setting (must be \geq RBW).
3. Set the span to fully encompass the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the spectrum analyzer's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some analyzers, this may require a manual override to ensure use of peak detector). If the spectrum analyzer does not have a band power function, sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS channel bandwidth.

5.5 Test Result

Temperature (°C) : 22~23	EUT: MID
Humidity (%RH) : 50~54	M/N: HS-9DTB7
Barometric Pressure (mbar) : 950~1000	Operation Condition: Tx Mode

IEEE 802.11b mode

Channel	Channel Frequency (MHz)	20dB Bandwidth (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2412	16.44	9.32	30	PASS
Middle	2437	16.88	9.72	30	PASS
High	2462	16.88	9.74	30	PASS

NOTE : 1. At final test to get the worst-case emission at 1Mbps.

IEEE 802.11g mode

Channel	Channel Frequency (MHz)	20dB Bandwidth (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2412	17.56	8.28	30	PASS
Middle	2437	17.56	8.04	30	PASS
High	2462	17.60	8.11	30	PASS

NOTE : 1. At final test to get the worst-case emission at 6Mbps.

IEEE 802.11n HT20mode

Channel	Channel Frequency (MHz)	20dB Bandwidth (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2412	18.88	7.12	30	PASS
Middle	2437	18.84	7.01	30	PASS
High	2462	18.88	7.10	30	PASS


NOTE : 1. At final test to get the worst-case emission at 13Mbps.

IEEE 802.11n HT40 mode


Channel	Channel Frequency (MHz)	40dB Bandwidth (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2422	37.12	6.02	30	PASS
Middle	2437	37.12	6.08	30	PASS
High	2452	37.12	6.15	30	PASS

NOTE : 1. At final test to get the worst-case emission at 13Mbps.


MAXIMUM PEAK OUTPUT POWER (802.11b MODE CH Low)

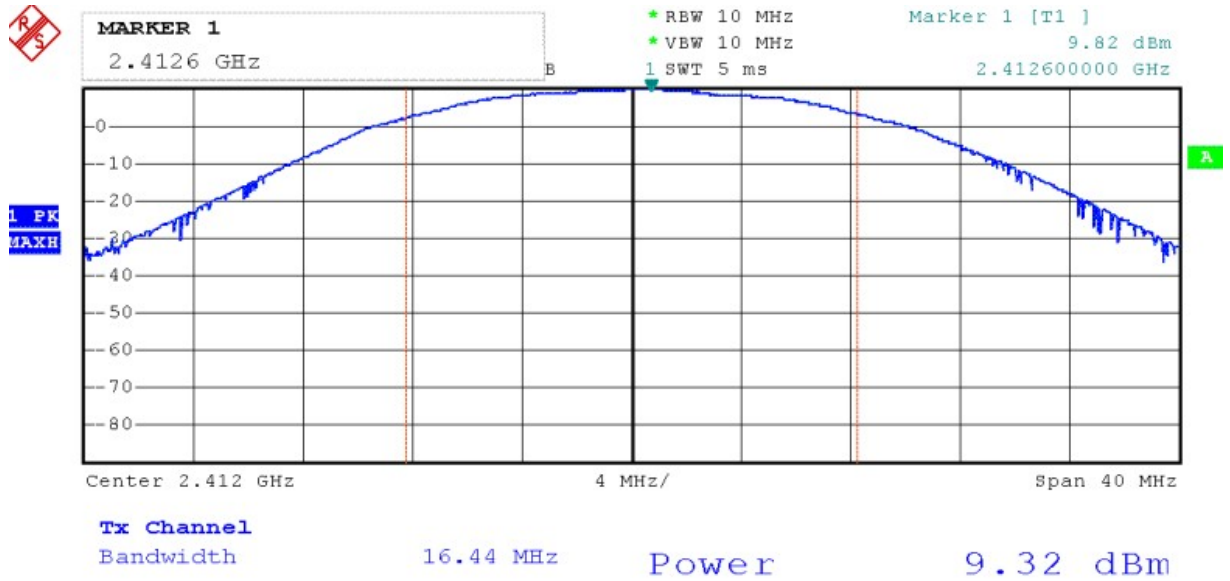


MAXIMUM PEAK OUTPUT POWER (802.11b MODE CH Mid)

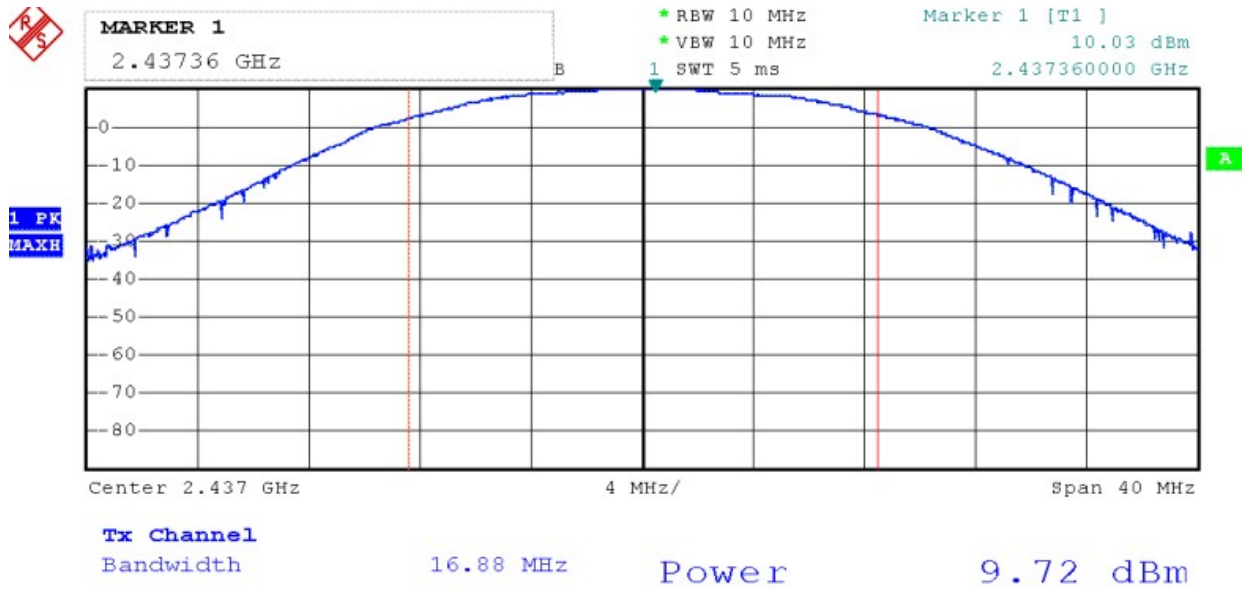


MAXIMUM PEAK OUTPUT POWER (802.11b MODE CH High)

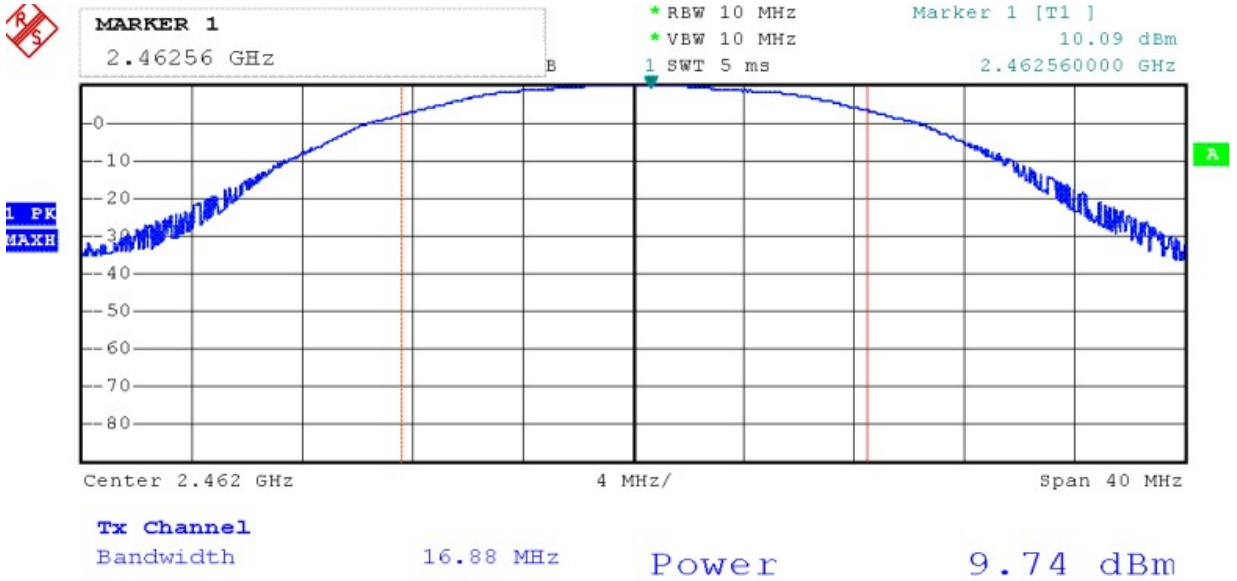


MAXIMUM PEAK OUTPUT POWER (802.11g MODE CH Low)

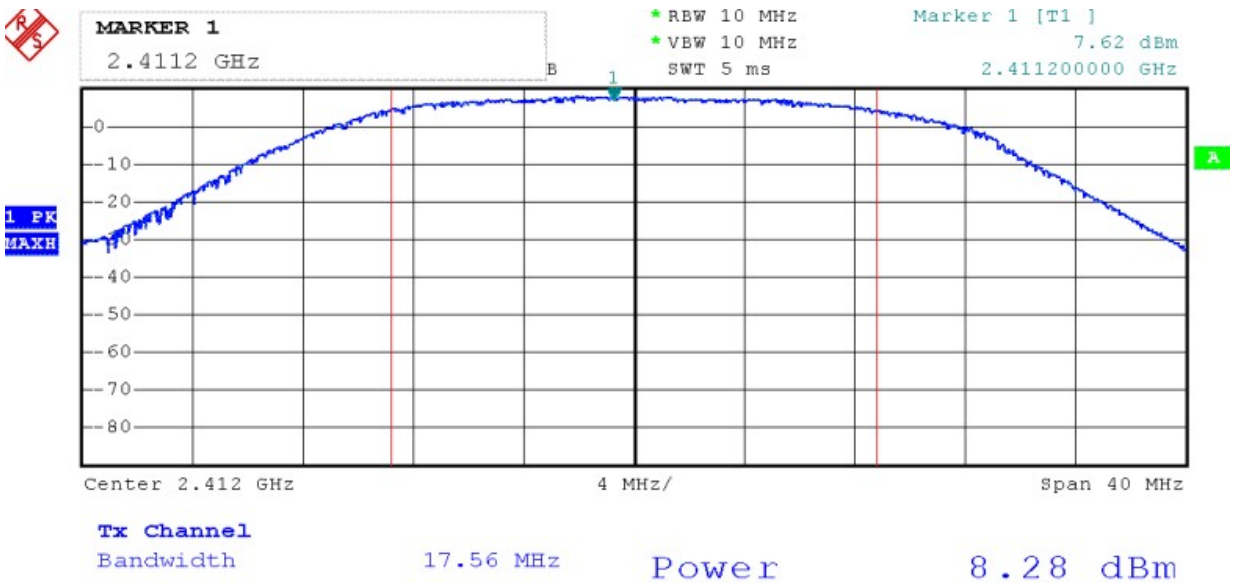


MAXIMUM PEAK OUTPUT POWER (802.11g MODE CH Mid)

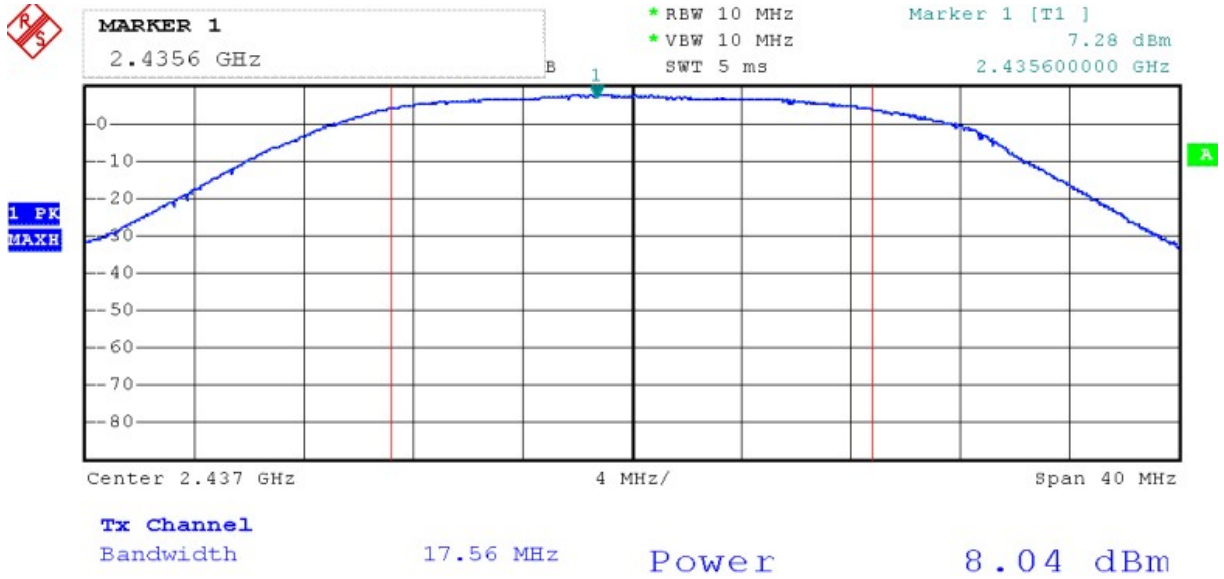


MAXIMUM PEAK OUTPUT POWER (802.11g MODE CH High)

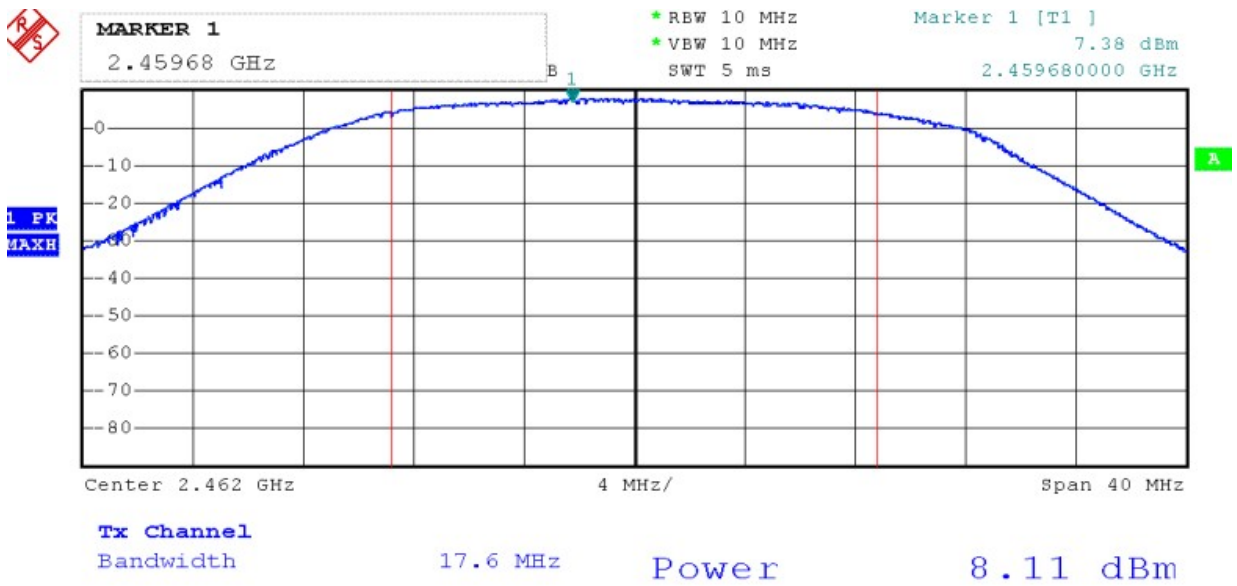


MAXIMUM PEAK OUTPUT POWER (802.11nHT20 MODE CH Low)

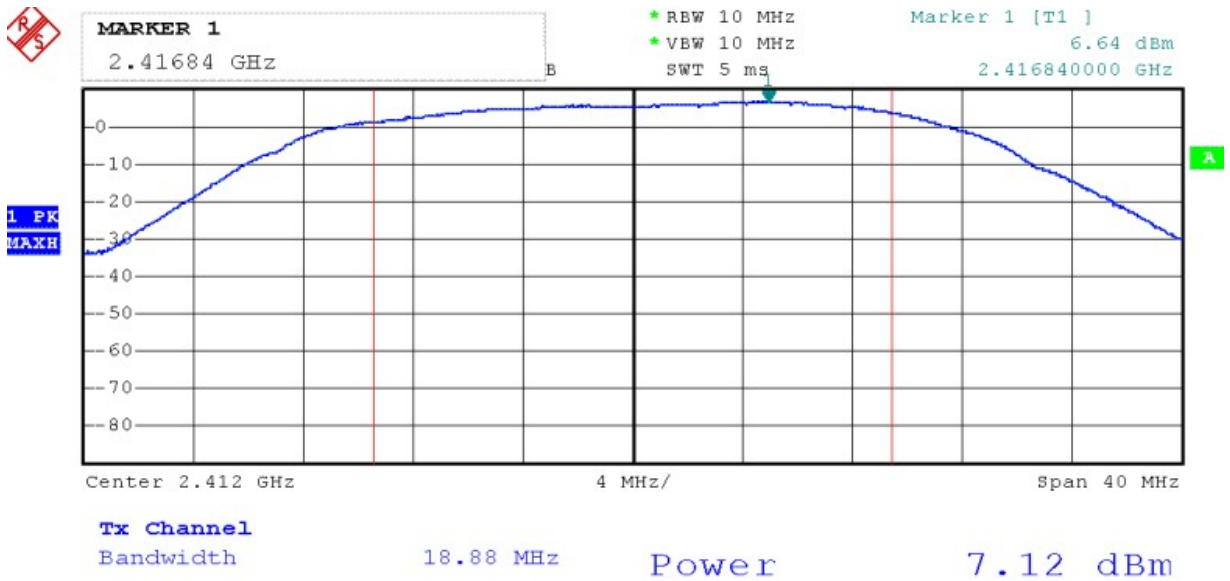


MAXIMUM PEAK OUTPUT POWER (802.11nHT20 MODE CH Mid)

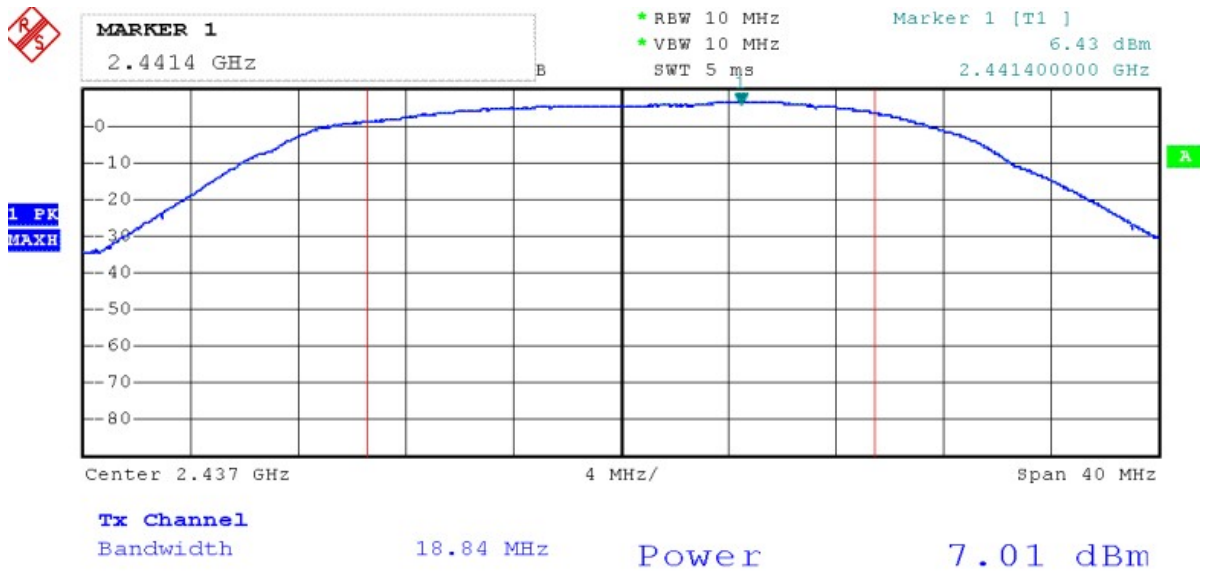

MAXIMUM PEAK OUTPUT POWER (802.11nHT20 MODE CH High)

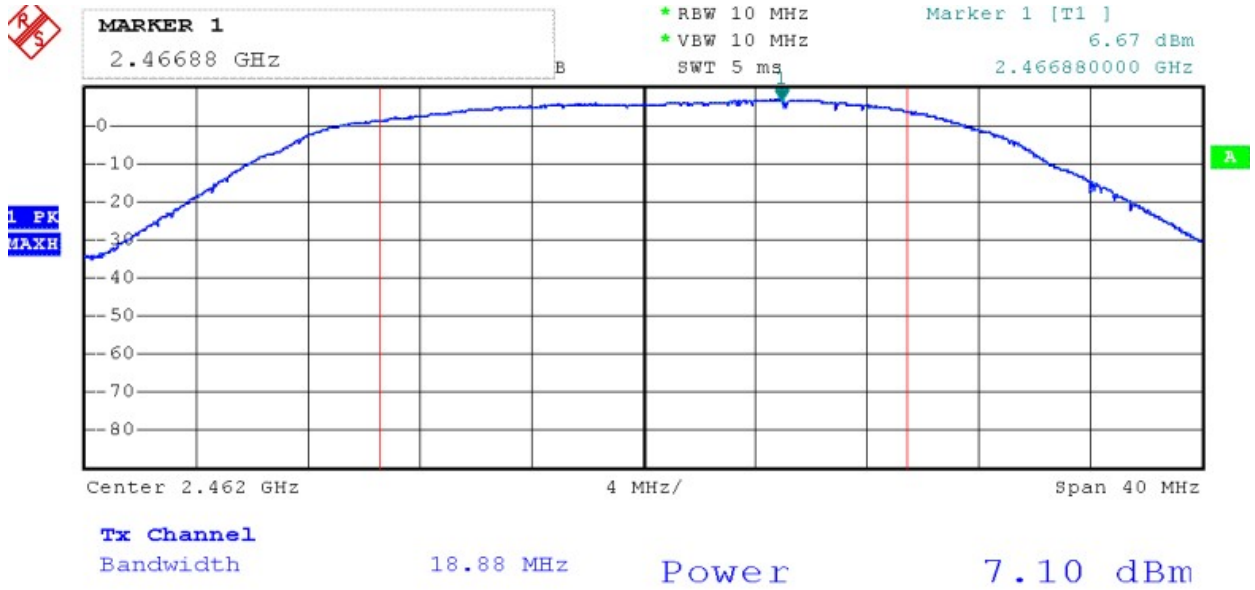

MAXIMUM PEAK OUTPUT POWER (802.11nHT40 MODE CH Low)

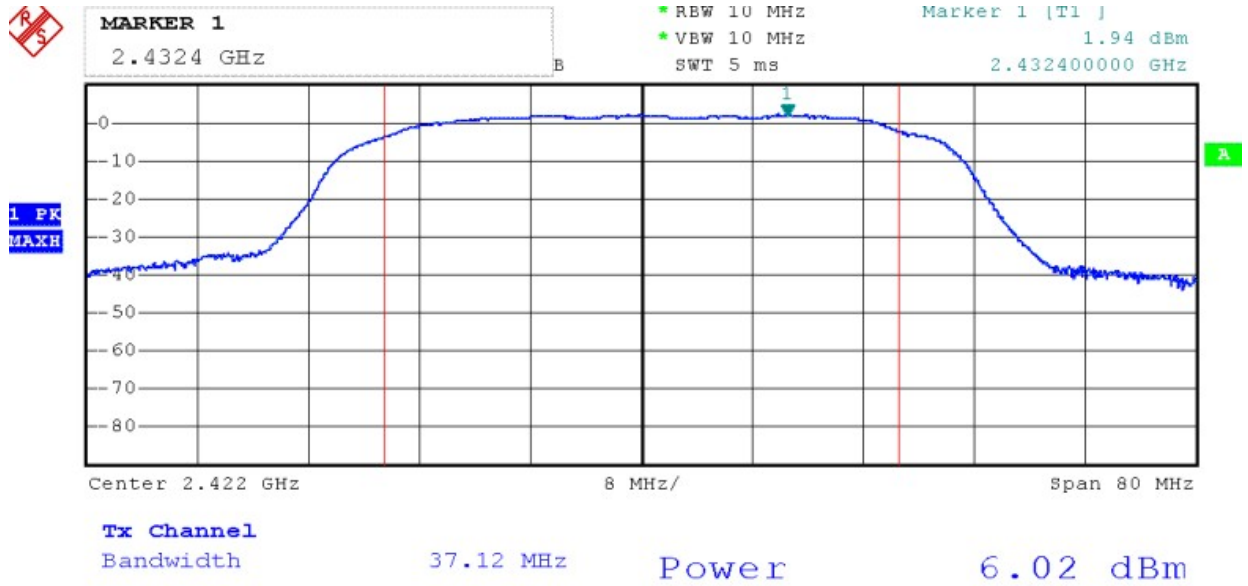


6. Test of Peak Power Spectral Density

6.1 Applicable Standard

Refer to FCC §15.247 (e) and IC RSS-210 A8.2 (b)..

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

6.2 EUT Setup

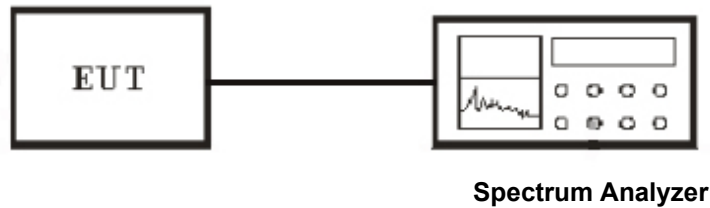

6.3 Test Equipment List and Details

See section 2.5.

6.4 Test Procedure

The transmitter output was connected to the spectrum analyzer and the parameter was set as below:

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW \geq 3 kHz.
4. Set the VBW \geq 3 x RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.5 Test Result

Temperature (°C) : 22~23	EUT: MID
Humidity (%RH) : 50~54	M/N: HS-9DTB7
Barometric Pressure (mbar) : 950~1000	Operation Condition: Tx Mode

IEEE 802.11b mode

Channel	Channel Frequency (MHz)	RF Power Level in 100KHz RBW (dBm)	Correct Factor 100KHz to 3KHz (dB)	Final RF Power Level in 3KHz RBW (dBm)	Maximum Limit (dBm)	Pass / Fail
Low	2412	-3.40	-15.22	-18.62	8	PASS
Middle	2437	-3.39	-15.22	-18.61	8	PASS
High	2462	-1.32	-15.22	-16.54	8	PASS

NOTE : 1. At final test to get the worst-case emission at 1Mbps.

IEEE 802.11 g mode

Channel	Channel Frequency (MHz)	RF Power Level in 100KHz RBW (dBm)	Correct Factor 100KHz to 3KHz (dB)	Final RF Power Level in 3KHz RBW (dBm)	Maximum Limit (dBm)	Pass / Fail
Low	2412	-10.51	-15.22	-25.73	8	PASS
Middle	2437	-10.95	-15.22	-26.17	8	PASS
High	2462	-9.80	-15.22	-25.02	8	PASS

NOTE : 1. At final test to get the worst-case emission at 6Mbps.

IEEE 802.11nHT20 mode

Channel	Channel Frequency (MHz)	RF Power Level in 100KHz RBW (dBm)	Correct Factor 100KHz to 3KHz (dB)	Final RF Power Level in 3KHz RBW (dBm)	Maximum Limit (dBm)	Pass / Fail
Low	2412	-12.46	-15.22	-27.68	8	PASS
Middle	2437	-12.05	-15.22	-27.27	8	PASS
High	2462	-11.79	-15.22	-27.01	8	PASS


NOTE : 1. At final test to get the worst-case emission at 13Mbps.

IEEE 802.11nHT40 mode


Channel	Channel Frequency (MHz)	RF Power Level in 100KHz RBW (dBm)	Correct Factor 100KHz to 3KHz (dB)	Final RF Power Level in 3KHz RBW (dBm)	Maximum Limit (dBm)	Pass / Fail
Low	2412	-15.30	-15.22	-30.52	8	PASS
Middle	2437	-14.60	-15.22	-29.82	8	PASS
High	2462	-14.41	-15.22	-29.63	8	PASS

NOTE : 1. At final test to get the worst-case emission at 13Mbps.


POWER SPECTRAL DENSITY (802.11b MODE CH Low)

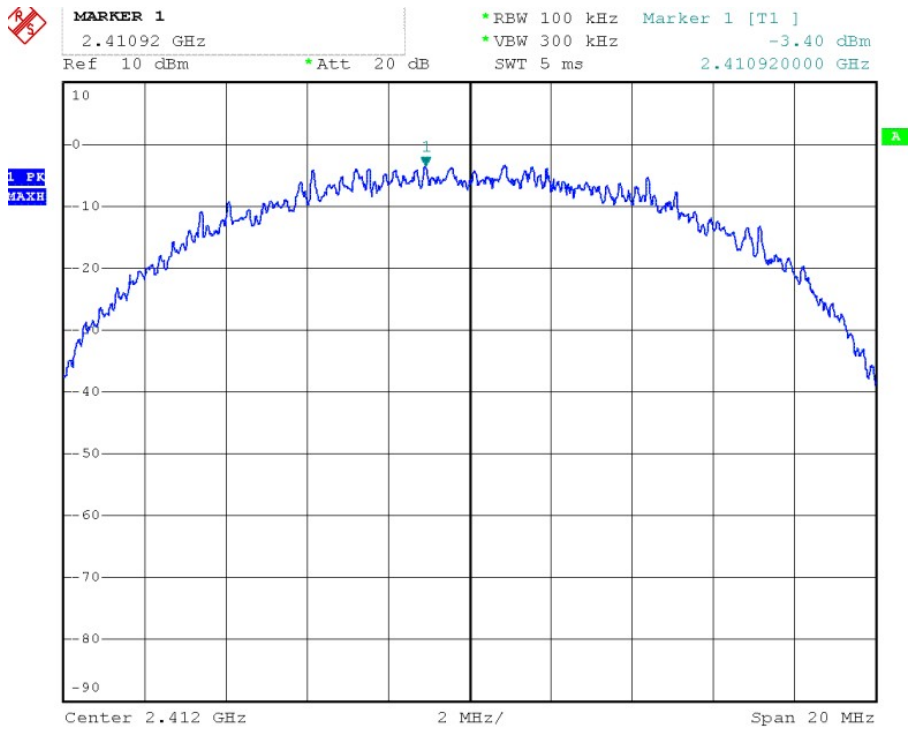


POWER SPECTRAL DENSITY (802.11b MODE CH Mid)

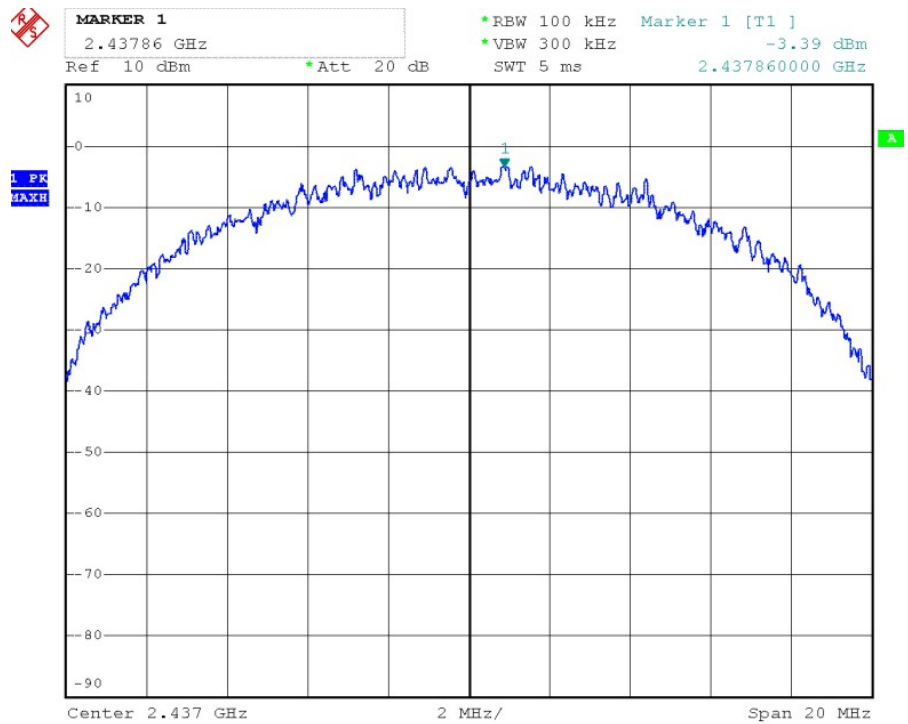


POWER SPECTRAL DENSITY (802.11g MODE CH Low)

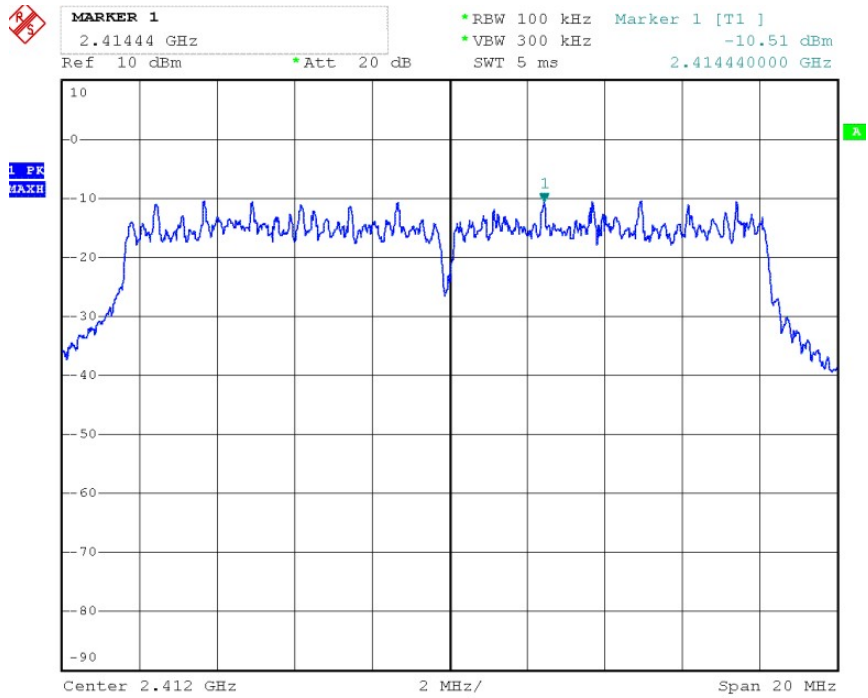


POWER SPECTRAL DENSITY (802.11g MODE CH Mid)

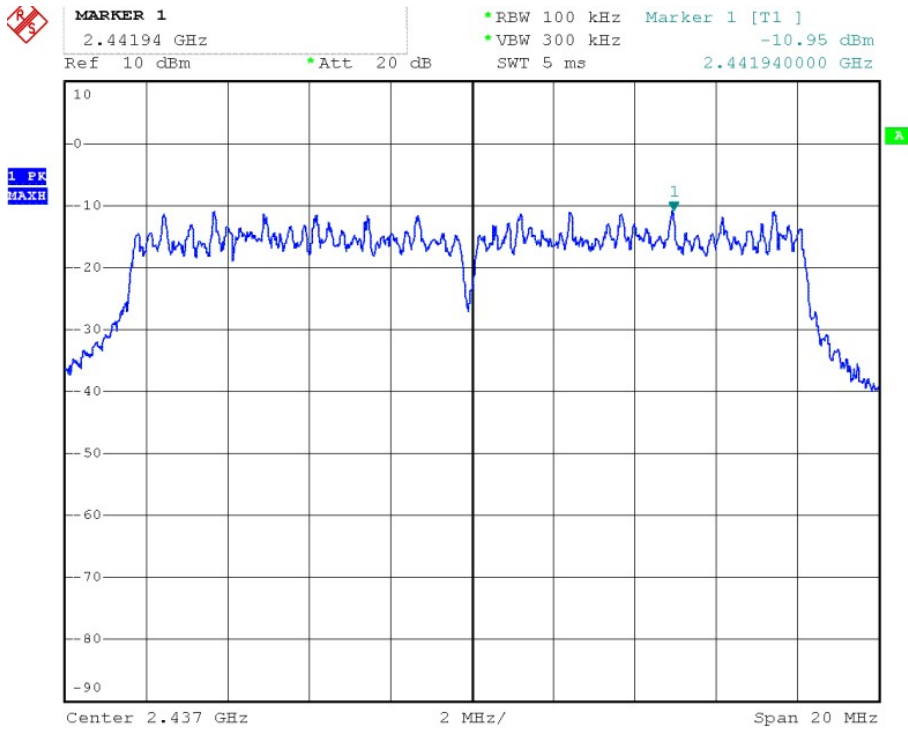


POWER SPECTRAL DENSITY (802.11g MODE CH High)

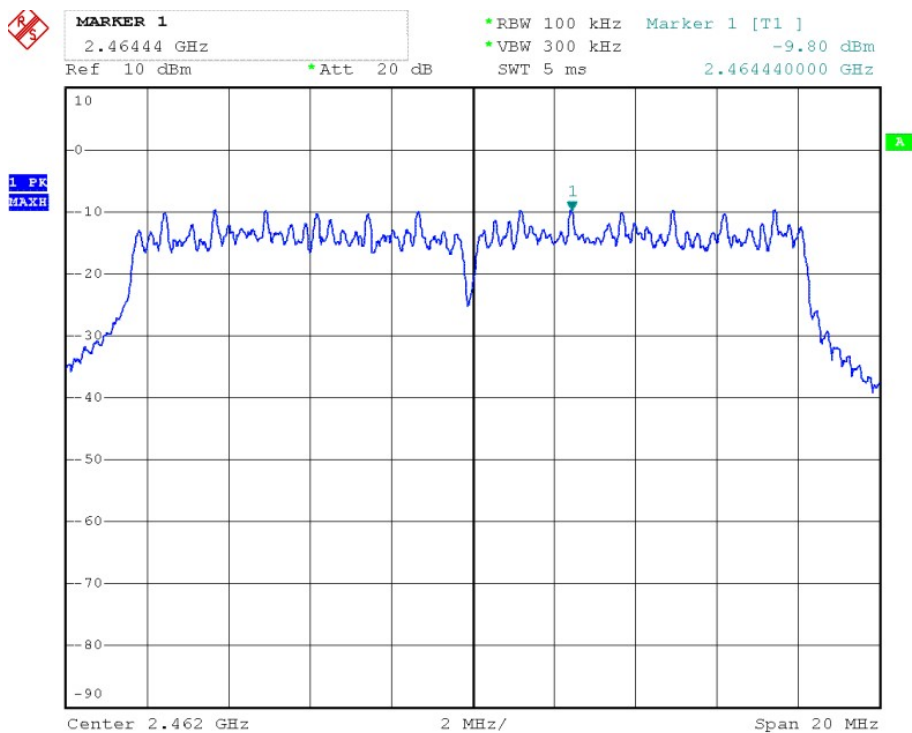


POWER SPECTRAL DENSITY (802.11nHT20 MODE CH Low)

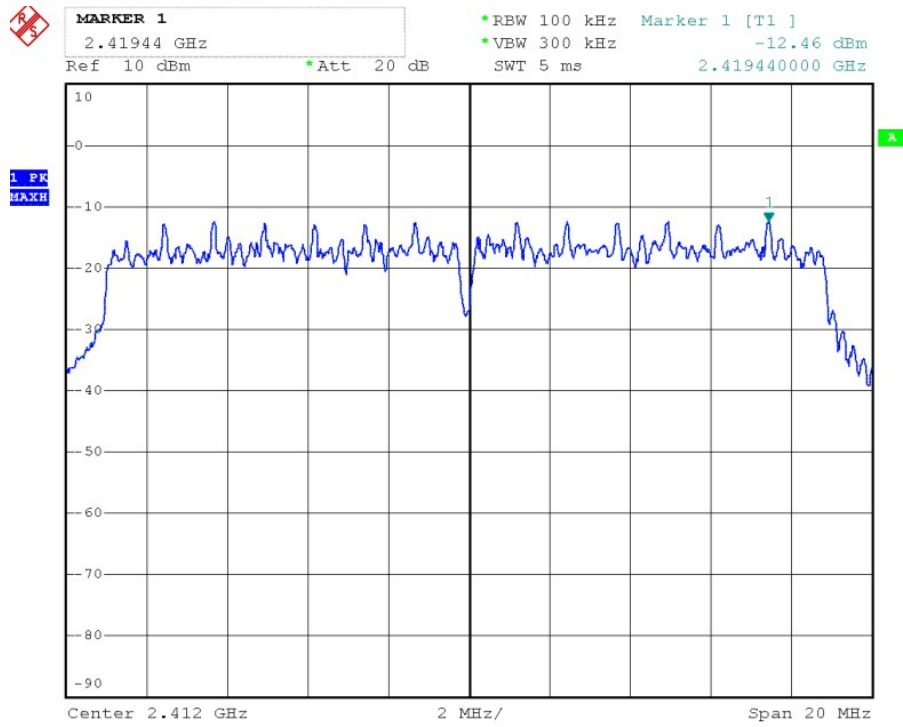


POWER SPECTRAL DENSITY (802.11nHT20 MODE CH Mid)

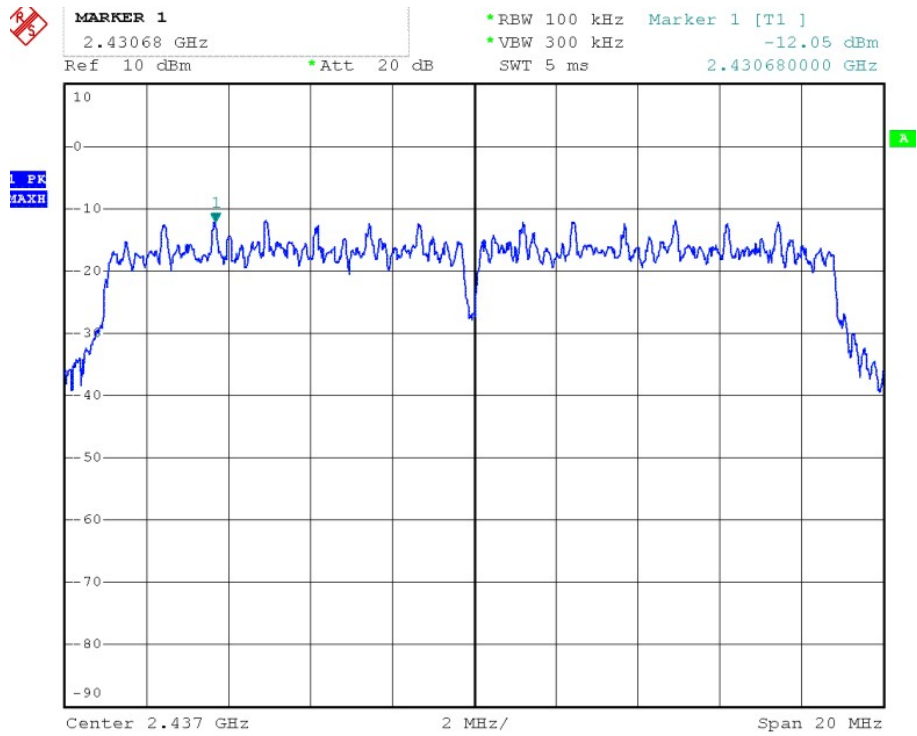


POWER SPECTRAL DENSITY (802.11nHT20 MODE CH High)

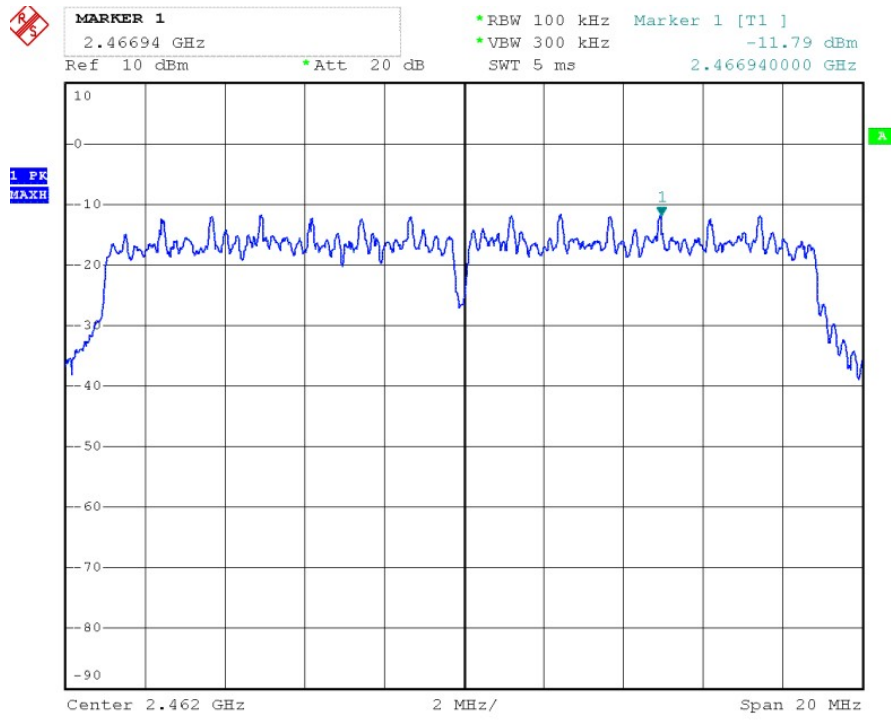


POWER SPECTRAL DENSITY (802.11nHT40 MODE CH Low)

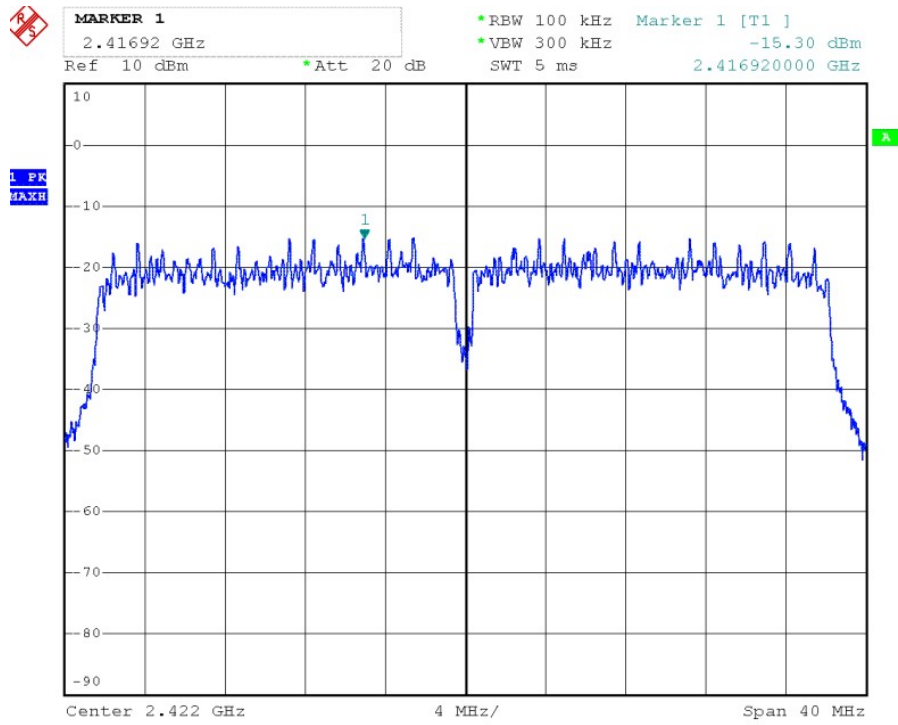

POWER SPECTRAL DENSITY (802.11nHT40 MODE CH Mid)

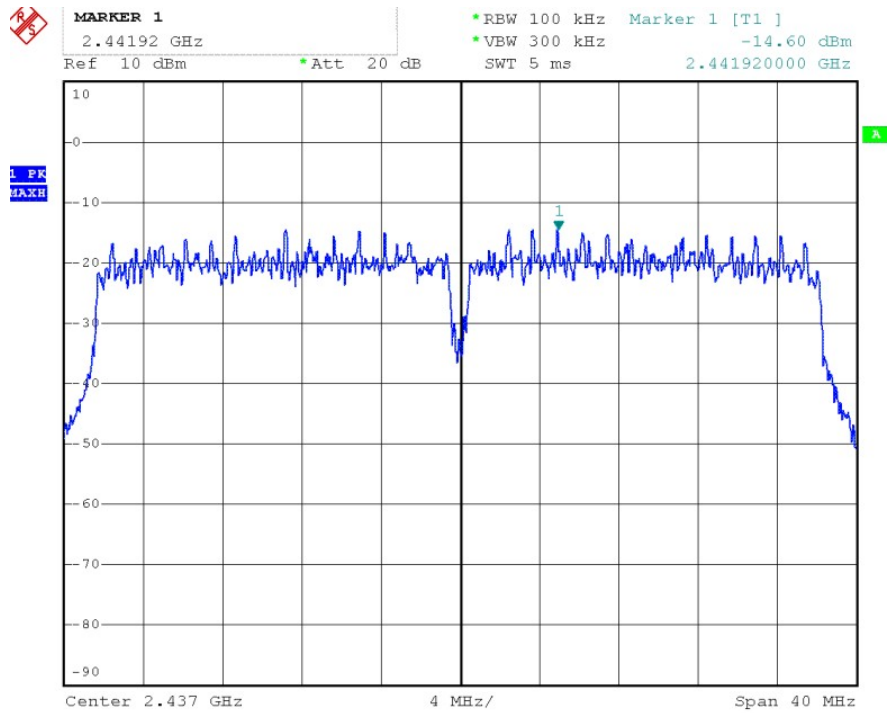

POWER SPECTRAL DENSITY (802.11nHT40 MODE CH High)

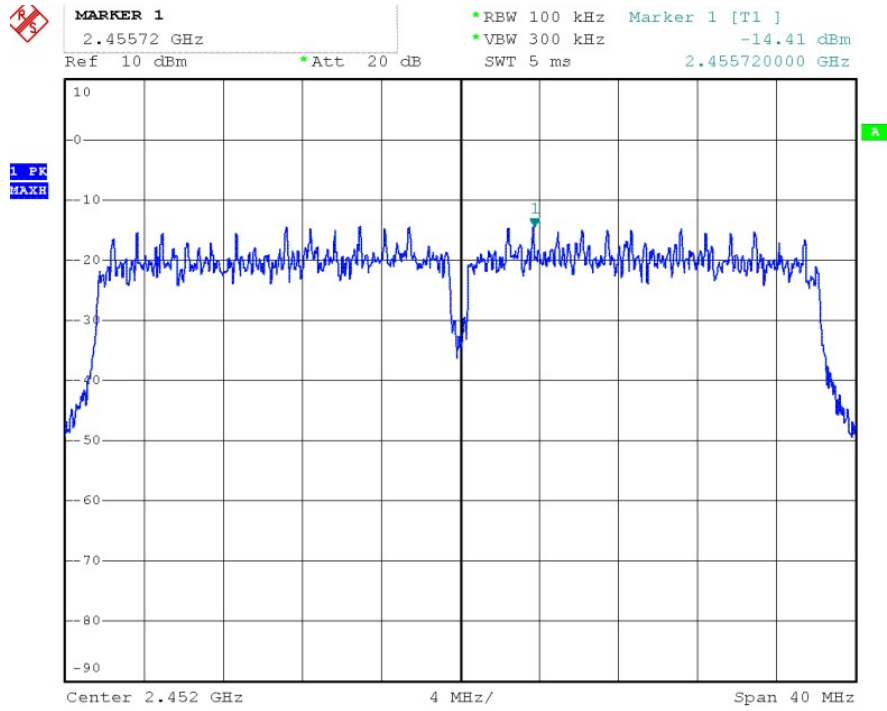


7. Test of 6dB Bandwidth

7.1 Applicable Standard

Refer to FCC §15.247 (a) (2) and IC RSS-210 A8.2 (a).

The minimum 6 dB bandwidth shall be at least 500 kHz.

7.2 EUT Setup

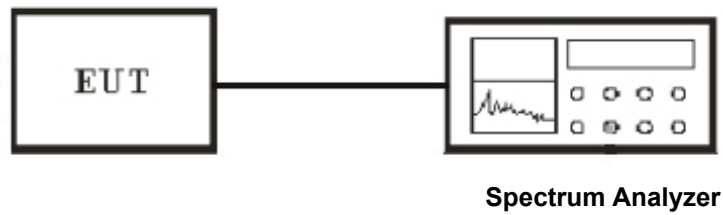

7.3 Test Equipment List and Details

See section 2.5.

7.4 Test Procedure

The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB. The transmitter output was connected to a spectrum analyzer and the parameter was set as below:

1. Set resolution bandwidth (RBW) = 1-5% or DTS BW, not to exceed 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.5 Test Result

Temperature (°C) : 22~23	EUT: MID
Humidity (%RH) : 50~54	M/N: HS-9DTB7
Barometric Pressure (mbar) : 950~1000	Operation Condition: Tx Mode

IEEE 802.11b mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Occupied Bandwidth (MHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	9.44	14.84	500	PASS
Middle	2437	9.36	14.76	500	PASS
High	2462	9.48	14.92	500	PASS

NOTE : 1. At final test to get the worst-case emission at 1Mbps.

IEEE 802.11g mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Occupied Bandwidth (MHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	16.60	16.48	500	PASS
Middle	2437	16.52	16.48	500	PASS
High	2462	16.56	16.48	500	PASS

NOTE : 1. At final test to get the worst-case emission at 6Mbps.

IEEE 802.11n HT20 mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Occupied Bandwidth (MHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	17.76	17.68	500	PASS
Middle	2437	17.72	17.68	500	PASS
High	2462	17.76	17.68	500	PASS


NOTE : 1. At final test to get the worst-case emission at 13Mbps.

IEEE 802.11 n HT40mode


Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Occupied Bandwidth (MHz)	Minimum Limit (kHz)	Pass / Fail
Low	2422	35.52	35.84	500	PASS
Middle	2437	35.44	35.92	500	PASS
High	2452	35.52	35.68	500	PASS

NOTE : 1. At final test to get the worst-case emission at 13Mbps.


6dB BANDWIDTH (802.11b MODE CH Low)

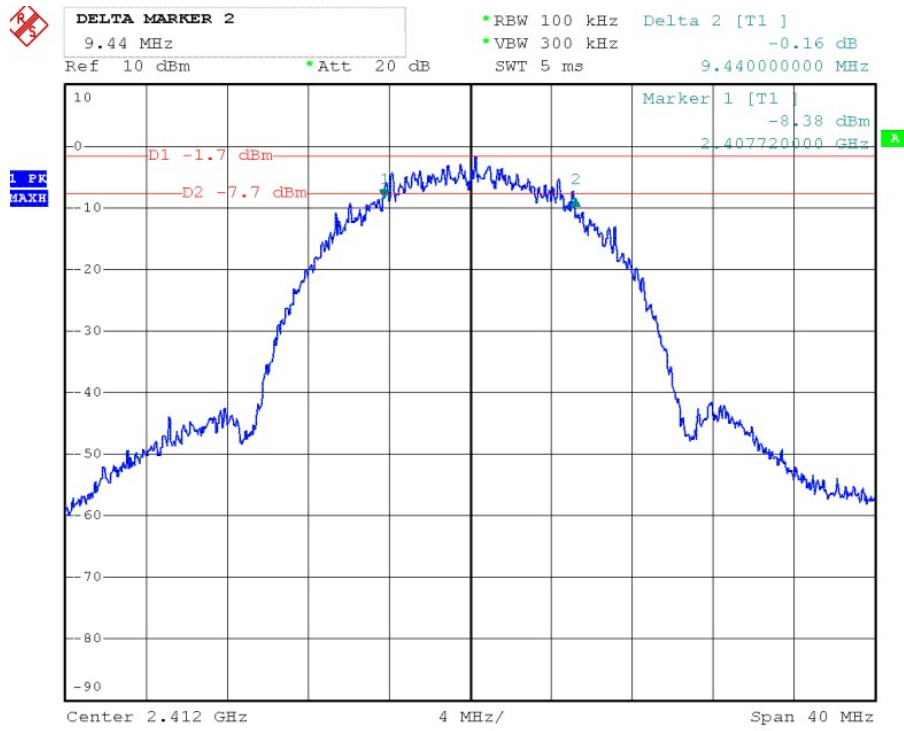


6dB BANDWIDTH (802.11b MODE CH Mid)

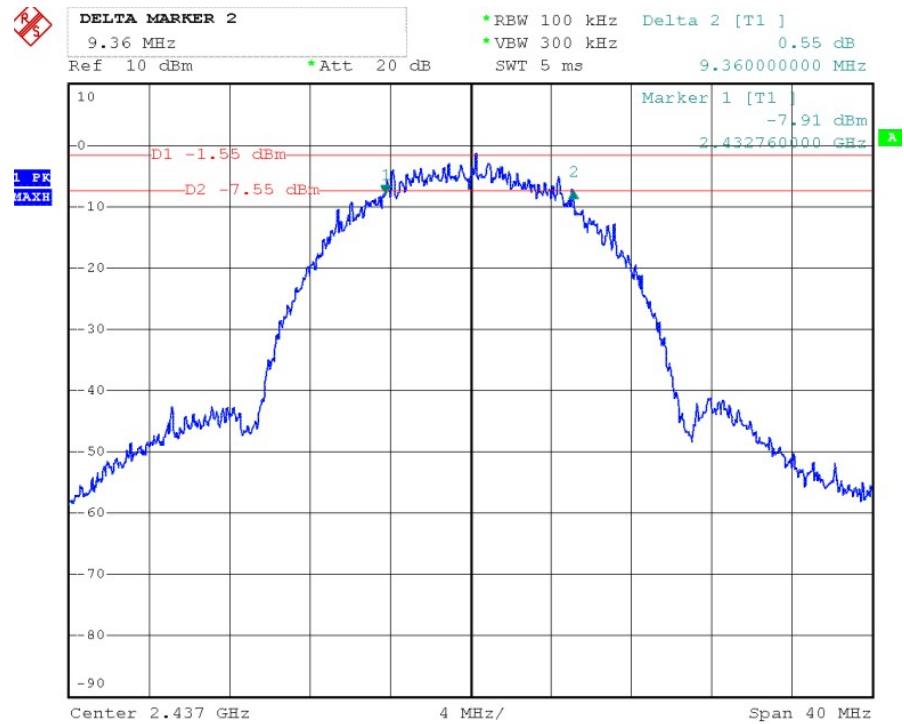


6dB BANDWIDTH (802.11b MODE CH High)

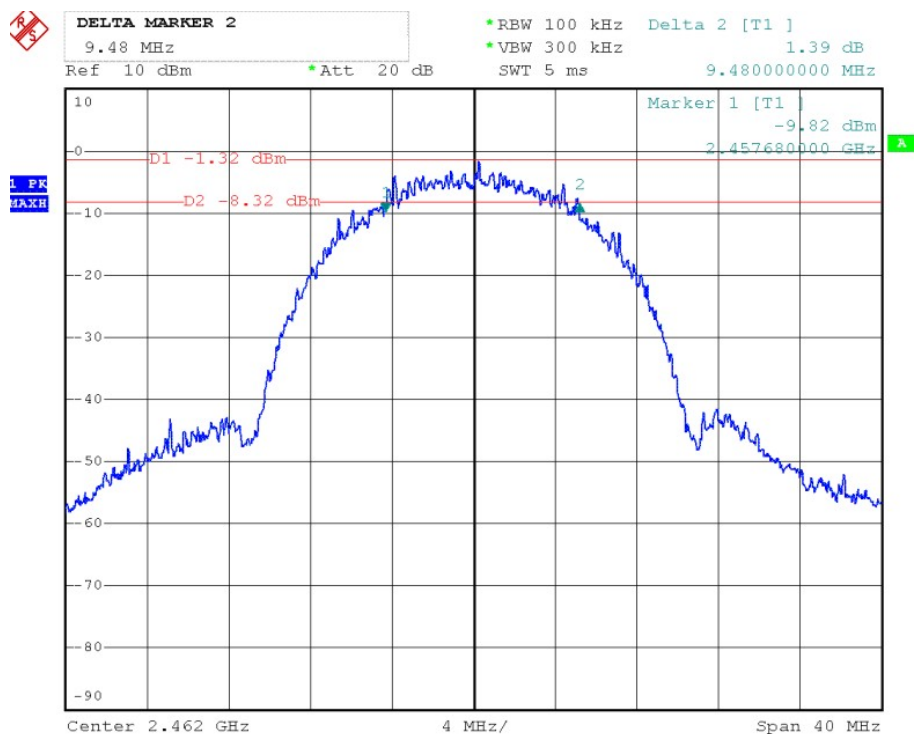


6dB BANDWIDTH (802.11g MODE CH Low)

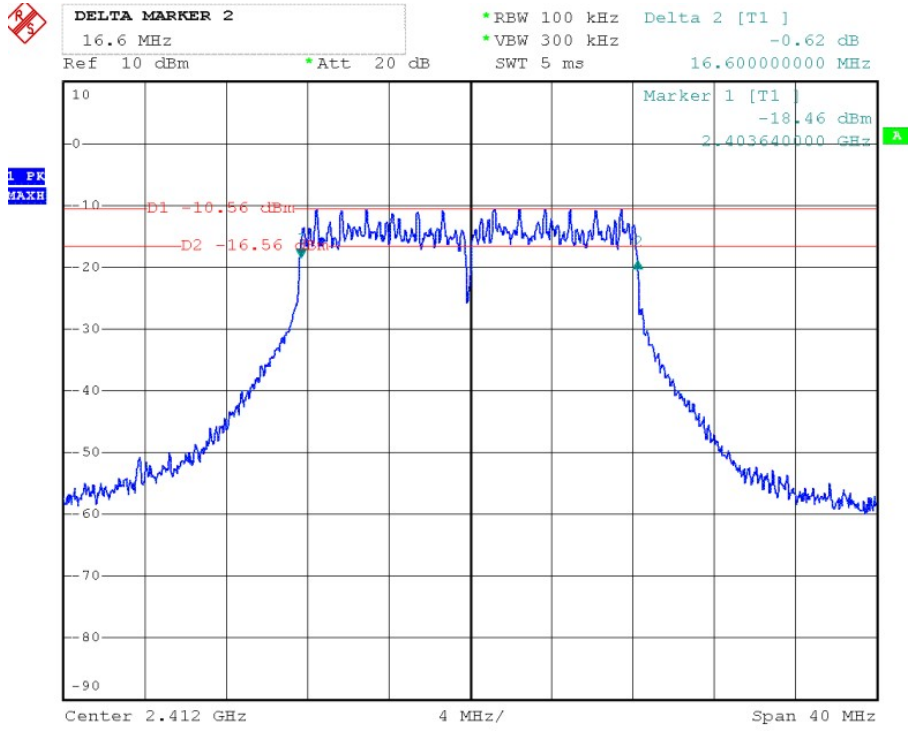


6dB BANDWIDTH (802.11g MODE CH Mid)

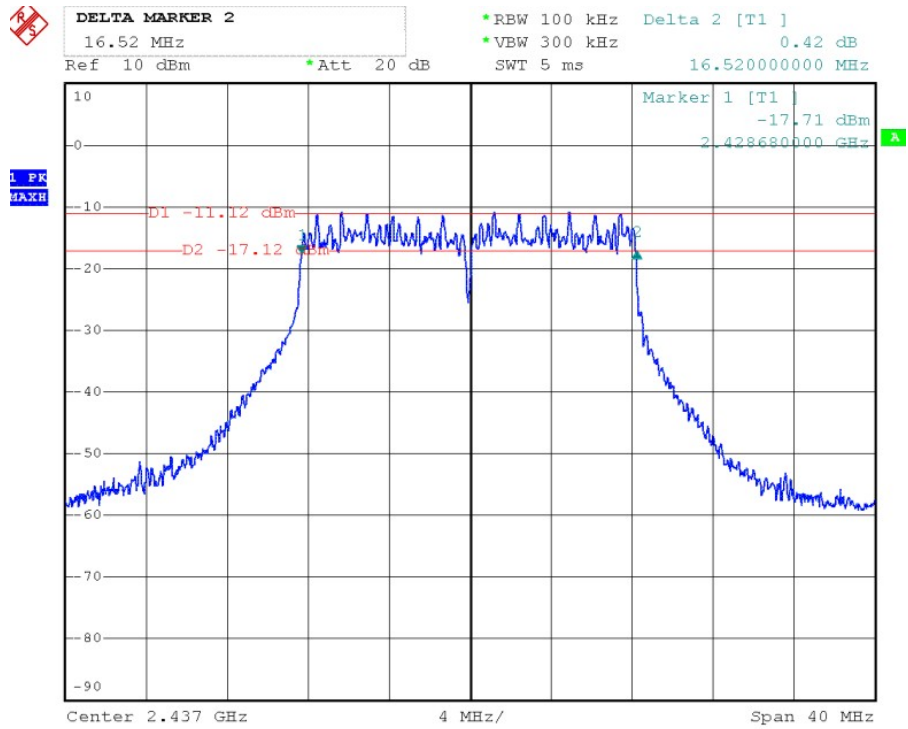


6dB BANDWIDTH (802.11g MODE CH High)

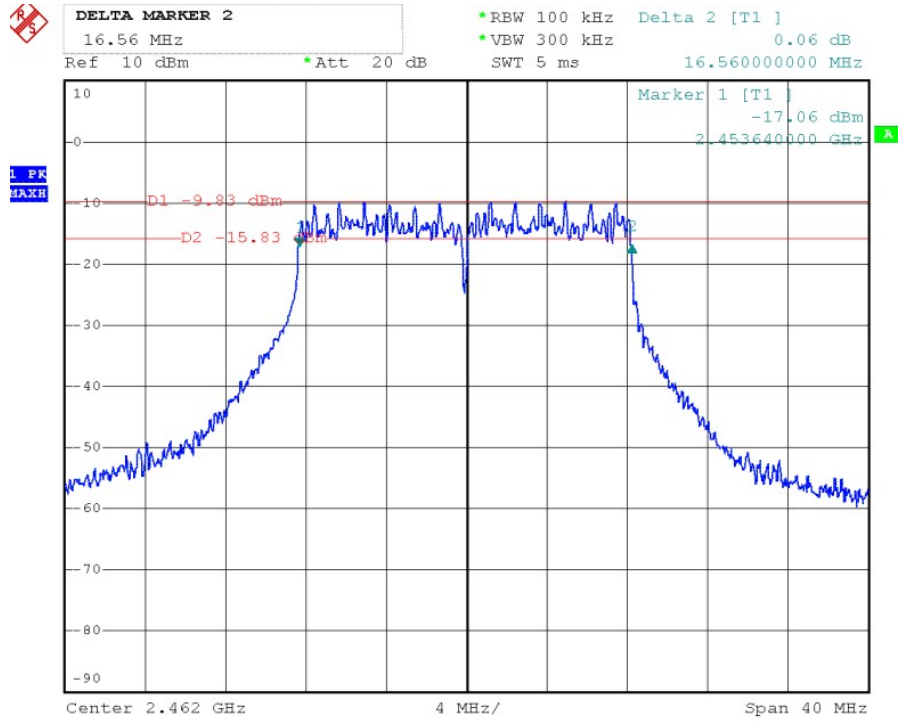


6dB BANDWIDTH (802.11n HT20 MODE CH Low)

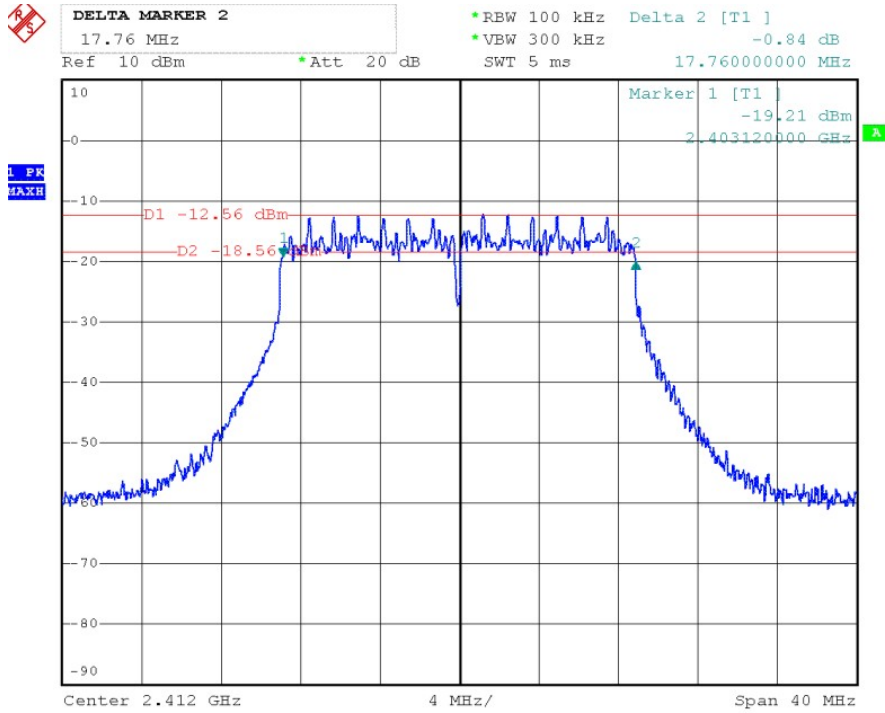


6dB BANDWIDTH (802.11n HT20 MODE CH Mid)

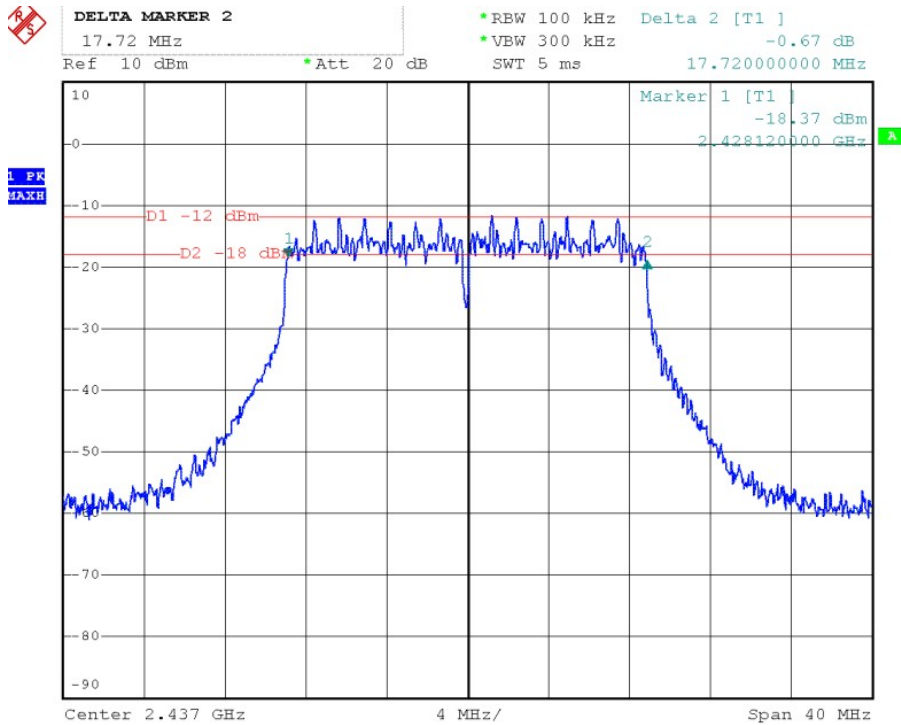


6dB BANDWIDTH (802.11n HT20 MODE CH High)

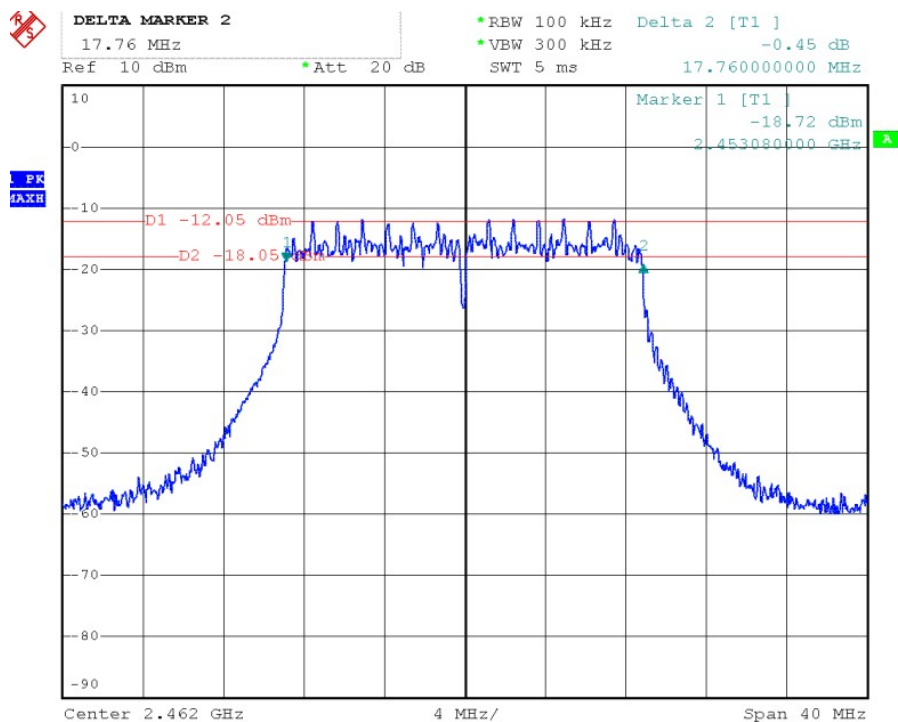


6dB BANDWIDTH (802.11n HT40 MODE CH Low)

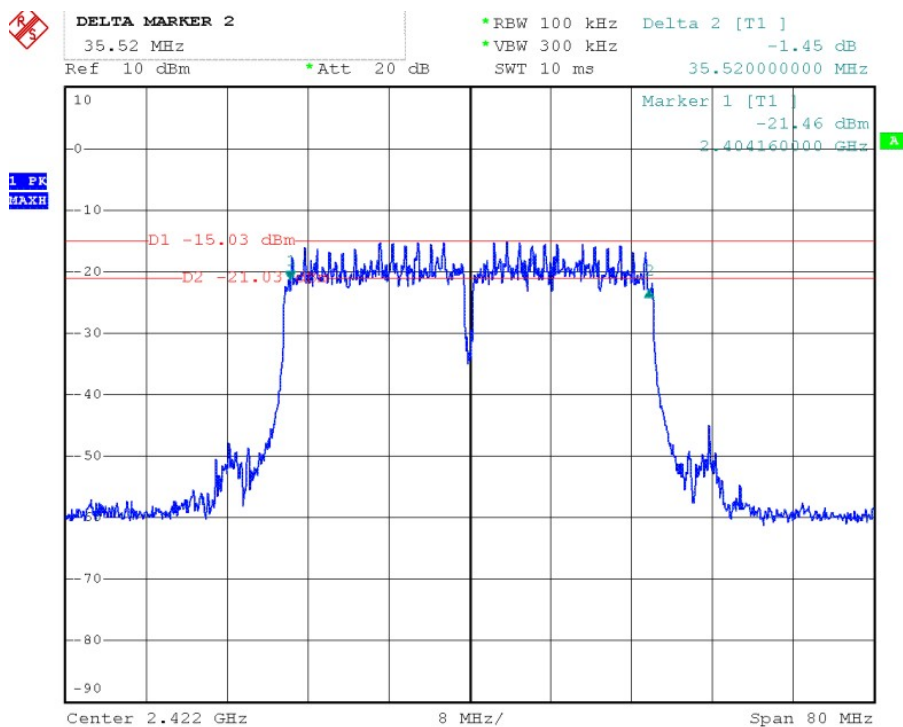

6dB BANDWIDTH (802.11n HT40 MODE CH Mid)

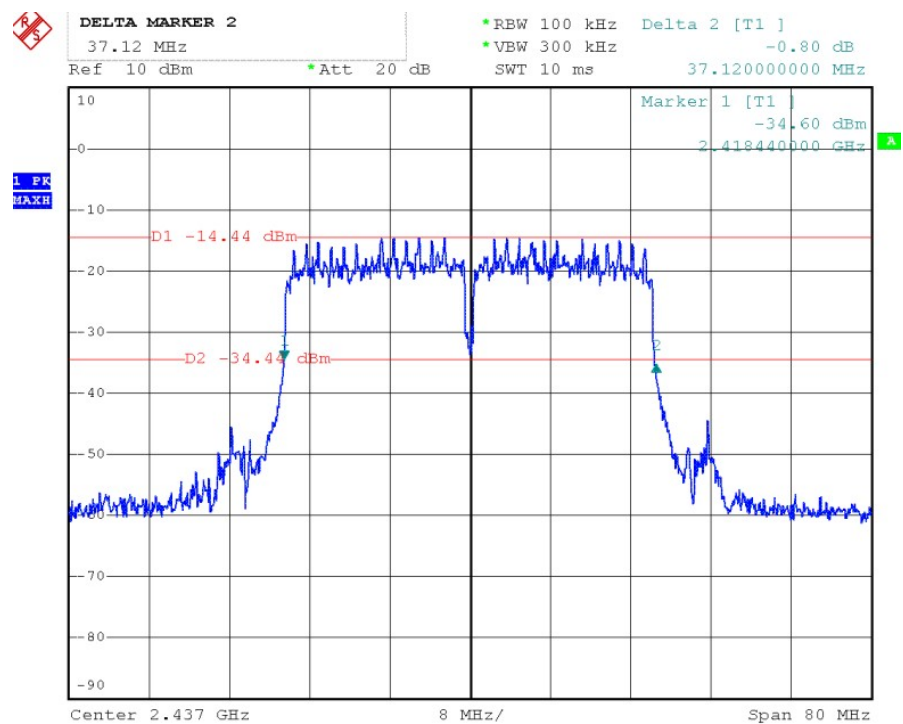

6dB BANDWIDTH (802.11n HT40 MODE CH High)

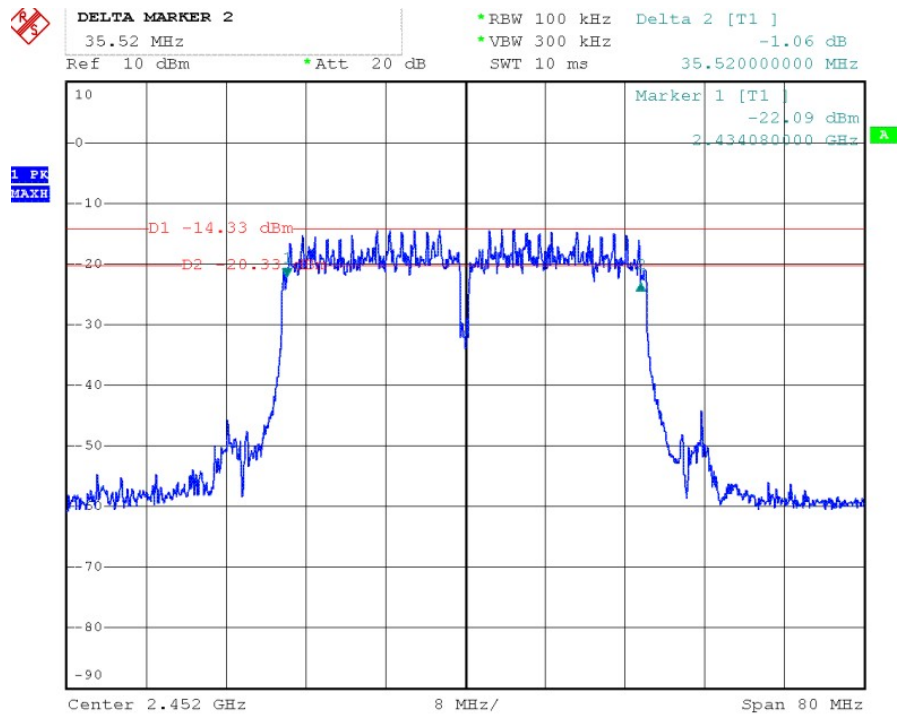


8. Test of Conducted Spurious Emission

8.1 Applicable Standard

Refer to FCC §15.247 (d) and IC RSS-210 A8.5.

Output power was measured based on the use of RMS averaging over a time interval, therefore the required attenuation is 30 dB.

8.2 EUT Setup

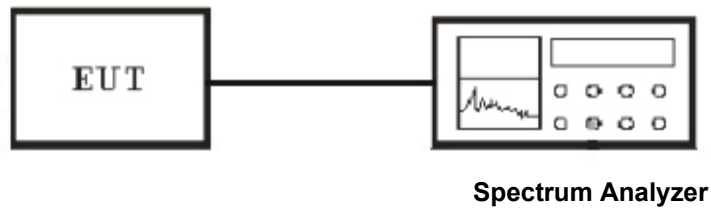

8.3 Test Equipment List and Details

See section 2.5.

8.4 Test Procedure

The transmitter output was connected to a spectrum analyzer. The spectrum from 30 MHz to 26.5 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band. The parameter of the spectrum analyzer was set as below:


1. Set start frequency to DTS channel edge frequency.
2. Set stop frequency so as to encompass the spectrum to be examined.
3. Set RBW = 100 kHz.
4. Set VBW \geq 300 kHz.
5. Detector = peak.
6. Trace Mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
9. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.

8.5 Test Result


Temperature (°C) : 22~23	EUT: MID
Humidity (%RH) : 50~54	M/N: HS-9DTB7
Barometric Pressure (mbar) : 950~1000	Operation Condition: TX Mode

IEEE 802.11b mode


CH Low

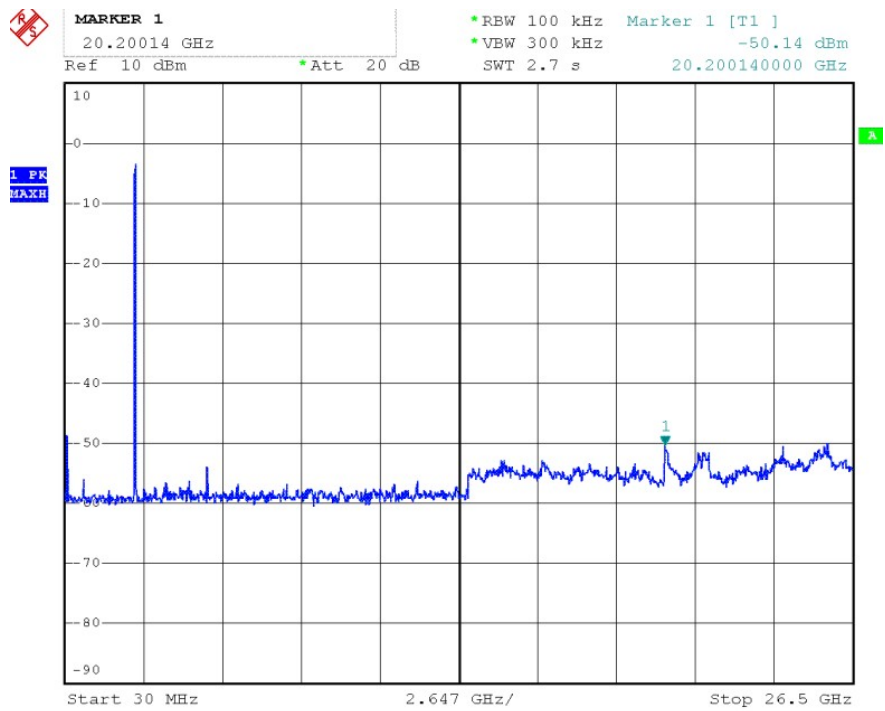


CH Mid

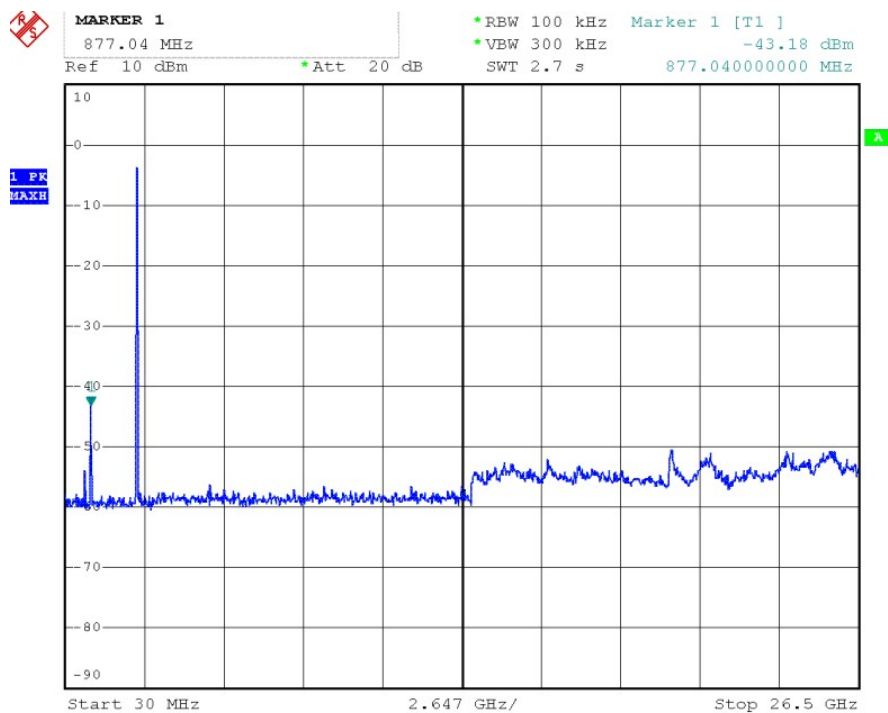


CH High

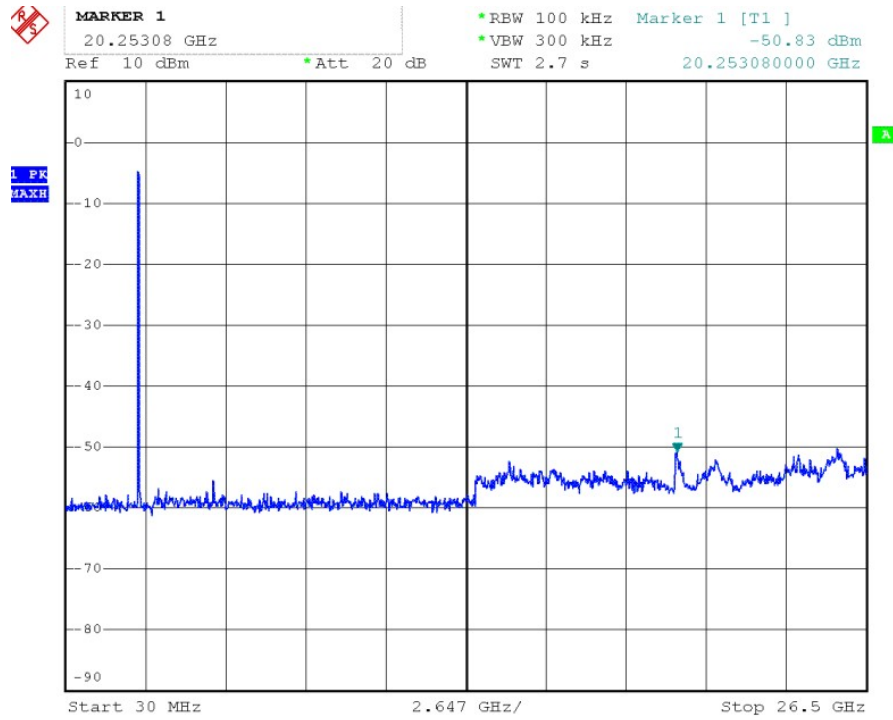


IEEE 802.11g mode CH Low

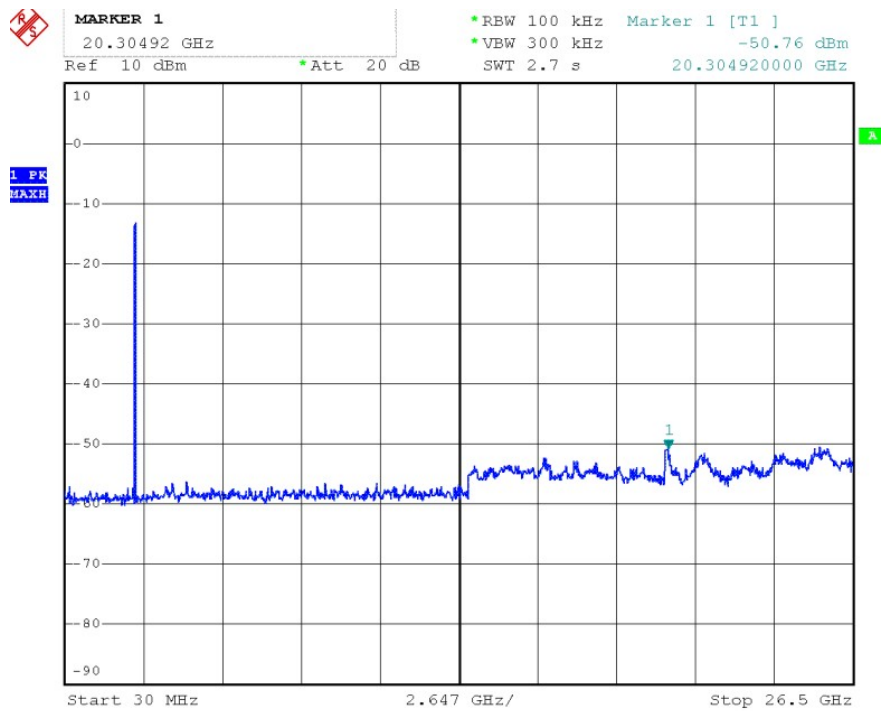


CH Mid

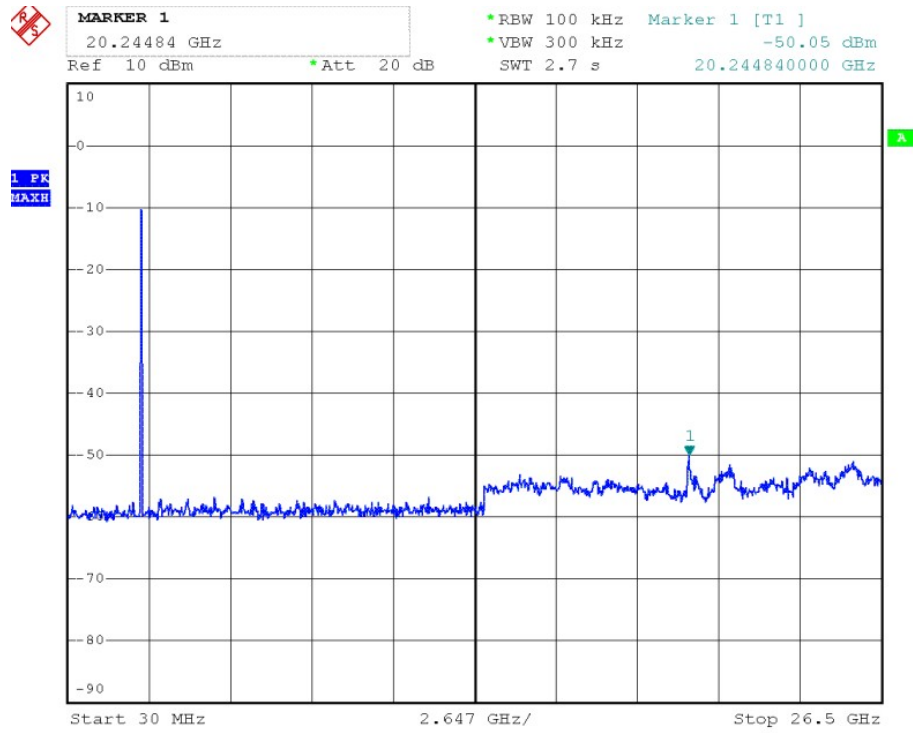


CH High

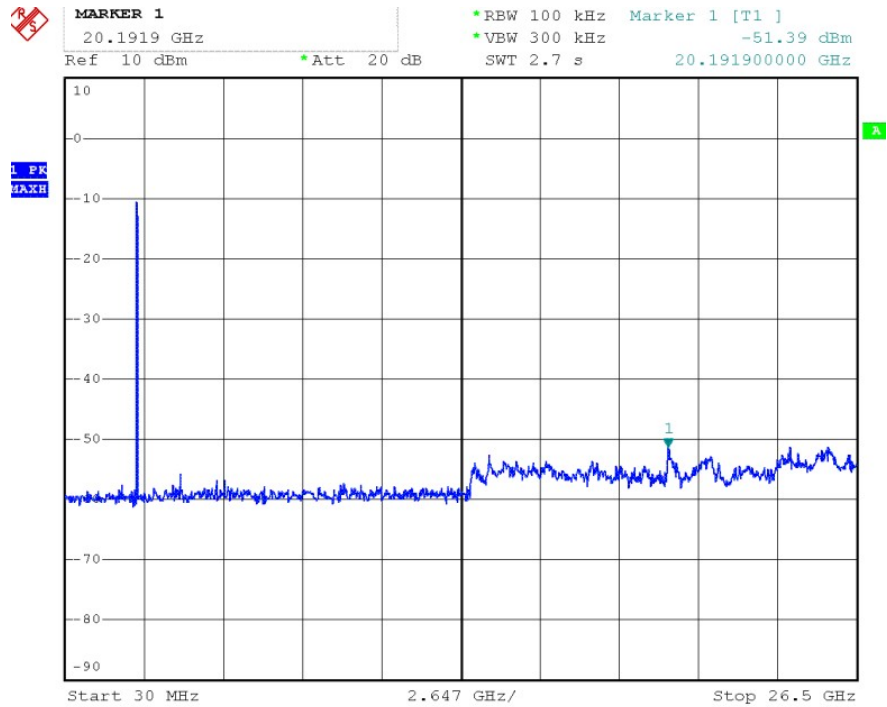


IEEE 802.11n HT20 mode
CH Low

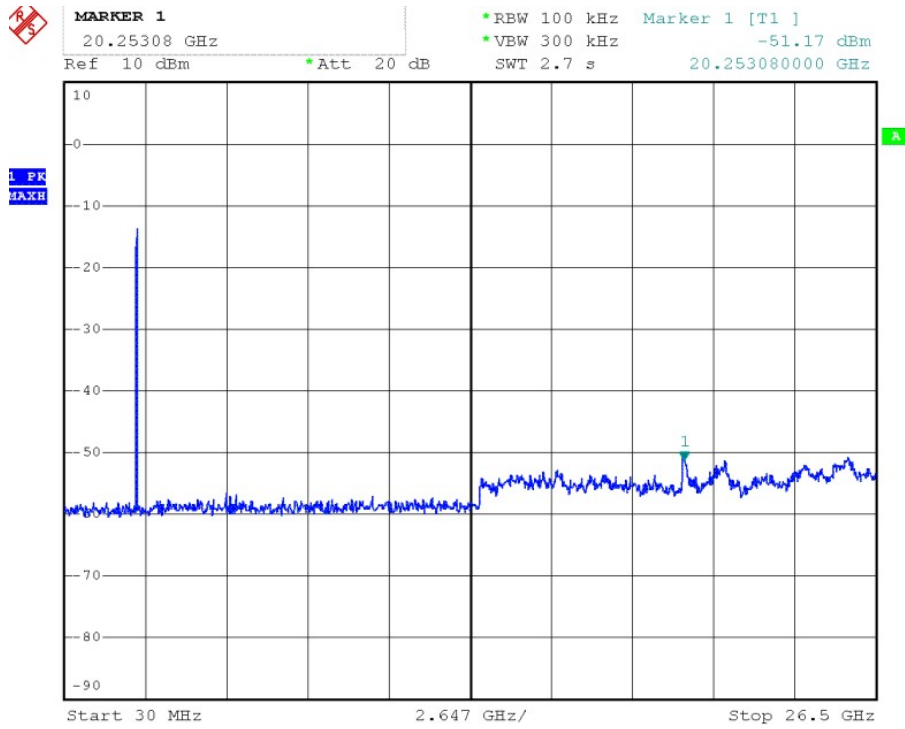


CH Mid

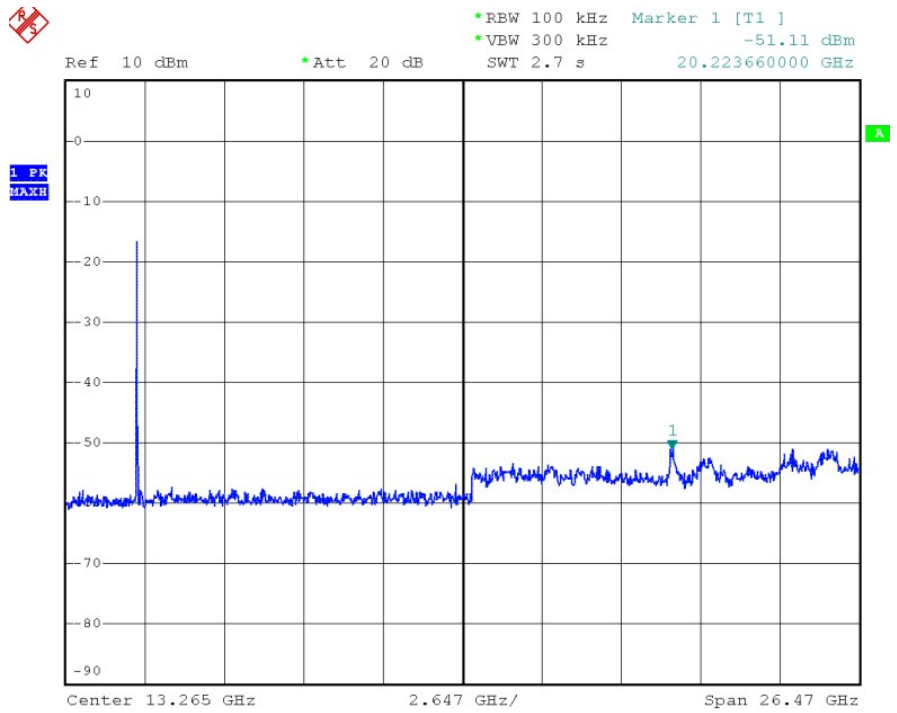


CH High

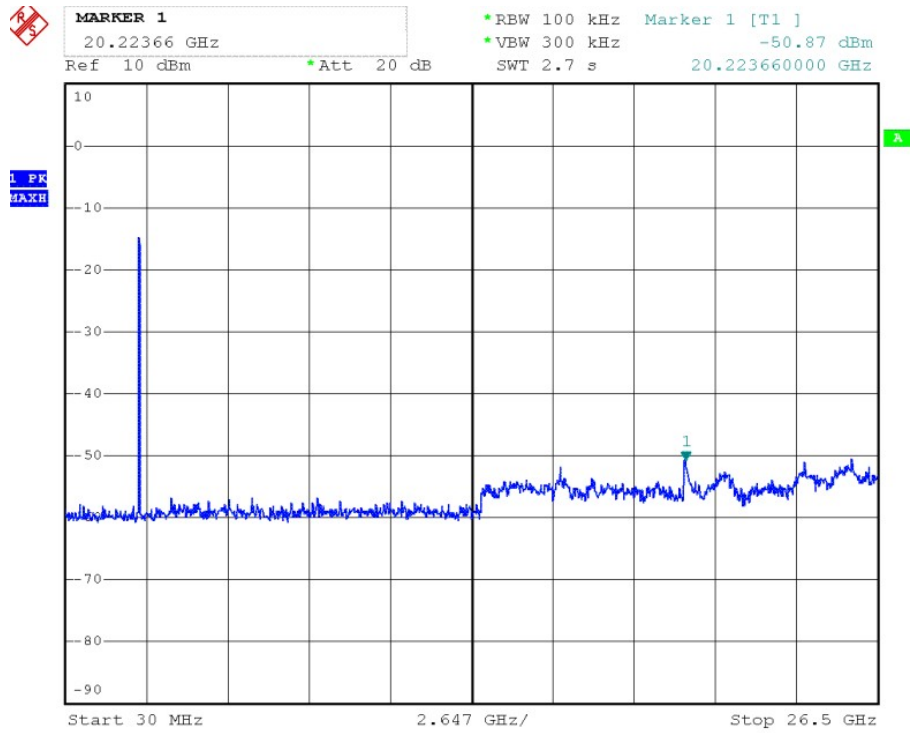


IEEE 802.11n HT40 mode
CH Low

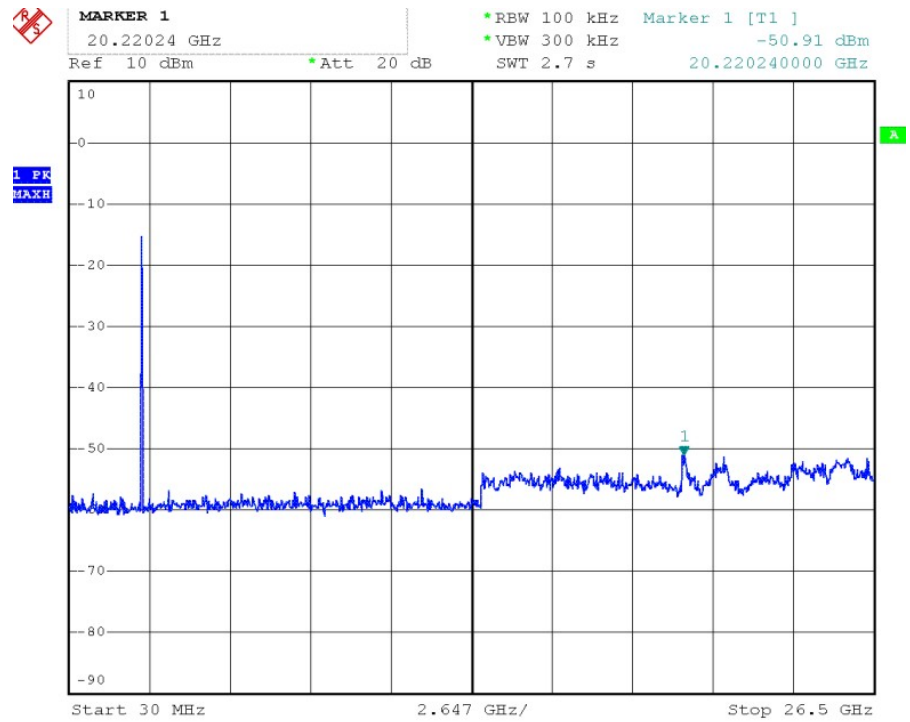

CH Mid

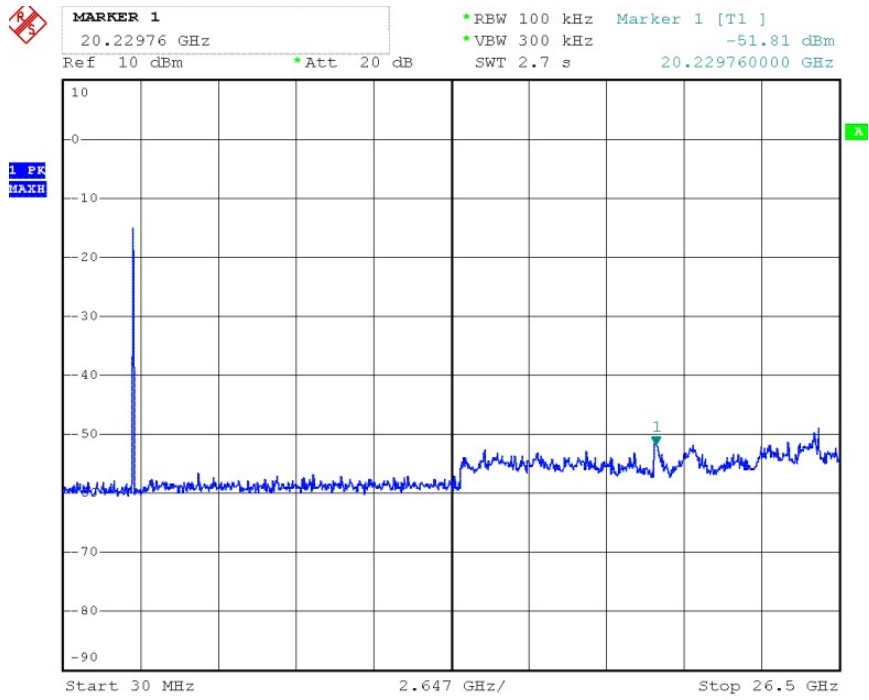

CH High

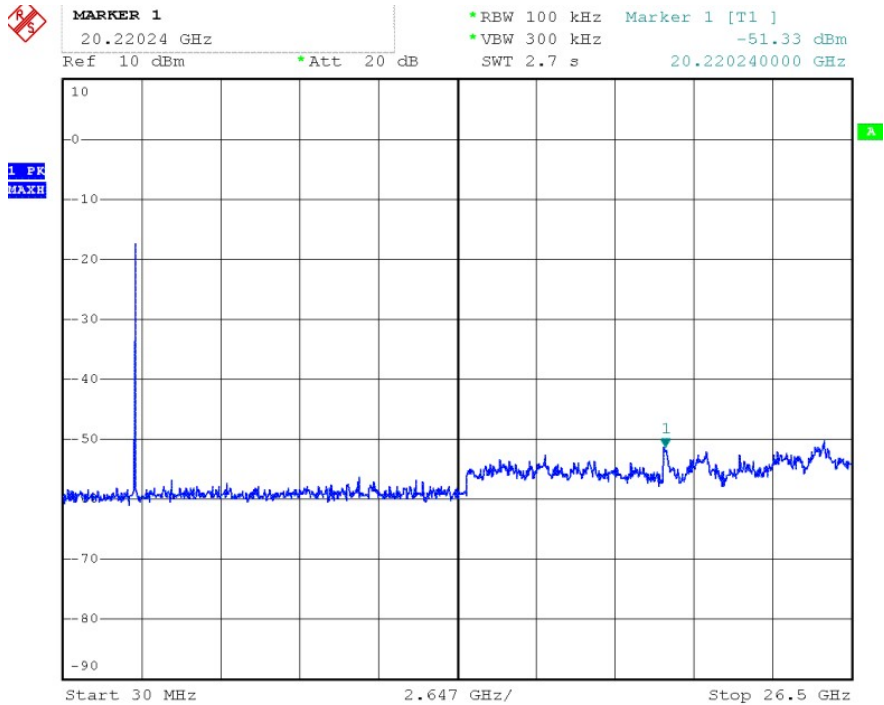

9. Test of Radiated Spurious Emission

9.1 Radiated Spurious Emission

9.1.1 Limits

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3338	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz

or 470-806 MHz, However, operation within these frequency bands is permitted under other sections of this Part, e-g, Sections 15.231 and 15.241.
 15.209 (b) In the emission table above, the tighter limit applies at the band edges.

9.1.2 EUT Setup

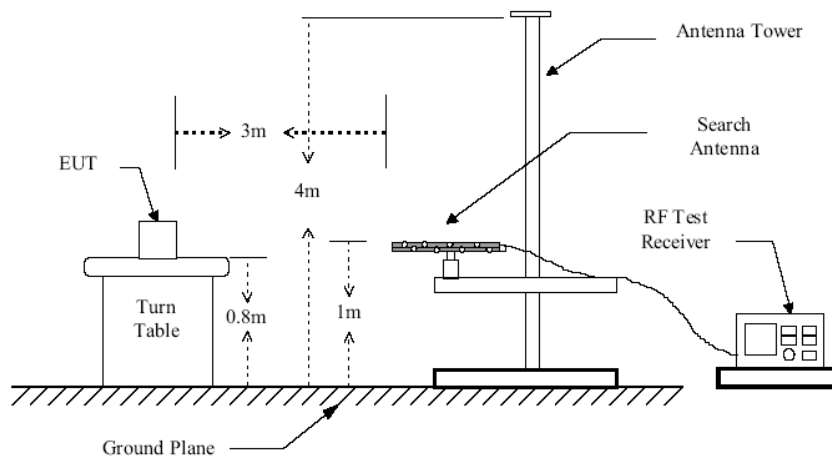
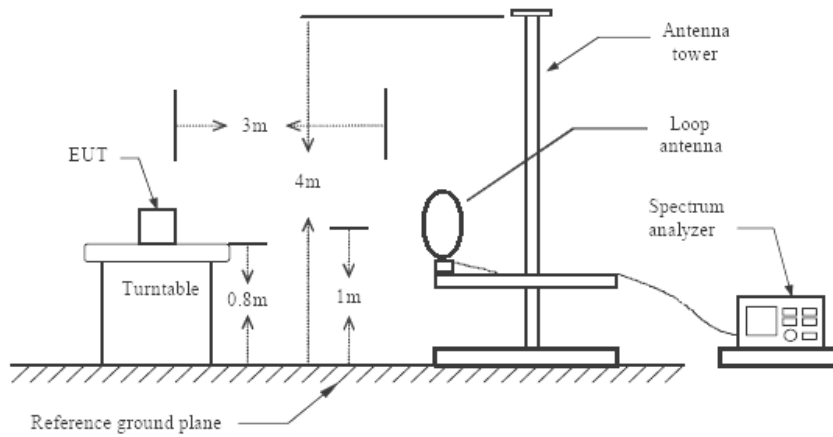


Figure 1 : Frequencies measured below 1 GHz configuration

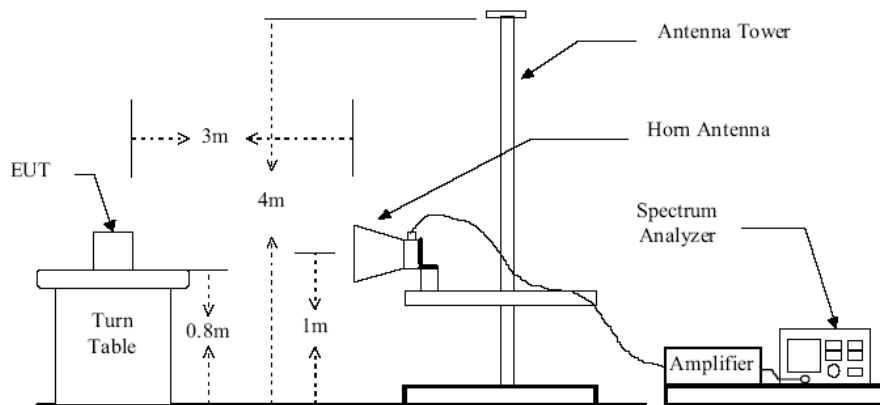


Figure 2 : Frequencies measured above 1 GHz configuration

9.1.3 Test Procedure

1. Configure the EUT according to ANSI C63.4-2003
2. The EUT was placed on the top of the turntable 0.8 meter above ground.
3. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
4. For each suspected emission, the antenna tower was scanned (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. According to the characteristic of the EUT crystals, the range of frequencies was investigated from 9KHz to 30MHz, 30MHz to 1GHz and 1GHz to 24.8GHz.
6. Any testing performed below 30 MHz was performed using a magnetic loop antenna in accordance with ANSI C63.10: section 4.5, Table 1
7. In accordance with 15.35(b), above 1 GHz, emissions measured using a peak detector shall not exceed a level 20 dB above the average limit.
8. Measurements at 2400 & 2483.5 MHz were made to ensure band edge compliance.
9. Testing was performed with the EUT orientated in three orthogonal planes and the maximum emissions level recorded. In addition, the EUT antenna was varied within its range of motion in order to maximise emissions.
10. For Frequencies below 1 GHz, RBW= 100 kHz, testing was performed with CISPR16 compliant test receiver with QP detector. Above 1 GHz tests were performed using a spectrum analyser using the following settings:
Peak RBW=VBW= 1MHz
Average RBW=VBW= 1MHz

These settings as per ANSI C63.10

9.1.4 Test Result

Temperature (°C) : 22~23	EUT: MID
Humidity (%RH) : 50~54	M/N: HS-9DTB7
Barometric Pressure (mbar) : 950~1000	Operation Condition: Normal operation & TX Mode

Note: In this testing, the EUT was respectively tested in three different orientations. That is:

1. EUT was lie vertically, and then its Antenna oriented upward
2. EUT was lie vertically, and then its Antenna oriented downward
3. EUT was lie flatwise, and then its Antenna oriented to the receiving antenna

The worst test data see following pages

When the EUT was lie flatwise, and its Antenna oriented to the receiving antenna, the worst test data was got as following table.

WORST-CASE RADIATED EMISSION BELOW 30 MHz

Normal operating Mode:

Frequency	Meter Reading	Antenna Factor	Cable Loss	Emission Levels	Limits	Margin	Detector Mode
(MHz)	(dB μ V)	(dB/M)	(dB)	(dB μ V/M)	(dB μ V/M)	(dB)	PK/QP
5.89	24.38	8.23	1.03	33.64	67	-33.36	QP
14.34	21.56	9.07	1.19	31.82	49.5	-17.68	QP
21.86	22.84	9.25	1.08	33.17	49.5	-16.33	QP
24.95	22.95	8.43	1.66	33.04	49.5	-16.46	QP

WORST-CASE RADIATED EMISSION BELOW 1 GHz

Normal operating Mode:

Horizontal

Frequency	Meter Reading	Tansd	Limits	Margin	Detector Mode
(MHz)	(dB μ V)	(dB)	(dB μ V/M)	(dB)	PK/QP
84.56	33.36	14.1	40	-6.64	QP
123.89	39.85	14.2	43.5	-3.65	QP
256.97	41.38	17.3	46	-4.62	QP
372.84	36.59	20.8	46	-9.41	QP
389.65	36.85	21.1	46	-9.15	QP
413.74	40.36	21.8	46	-5.64	QP
N/A	----	----	----	----	----

Vertical

Frequency	Meter Reading	Tansd	Limits	Margin	Detector Mode
(MHz)	(dB μ V)	(dB)	(dB μ V/M)	(dB)	PK/QP
35.85	37.19	14.7	40	-2.81	QP
84.98	35.36	14.1	40	-4.64	QP
123.12	38.89	14.2	43.5	-4.61	QP
374.85	38.54	20.8	46	-7.46	QP
414.89	42.03	21.38	46	-3.97	QP
516.99	42.64	24.2	46	-3.36	QP
N/A	----	----	----	----	----

Note: 1. Transd.=Antenna Factor+Cable Loss-Pre-amplifier
Margin = Level-Limit

**WORST-CASE RADIATED EMISSION ABOVE 1 GHz
IEEE 802.11b TX (CH Low)**

Channel Low (2412MHz)								
Maximum Frequency (MHz)	Polarity and Level					Limit (dBµV/m)	Margin (dBµV/m)	Mark (P/Q/A)
	Polarity	Height (m)	Reading dBµV	Transd	Result dBµV/m			
1385.21	H	1	53.06	-8.38	44.68	74	-29.32	P
			46.34	-8.38	37.96	54	-16.04	A
1387.21	V	1	52.52	-8.38	44.14	74	-29.86	P
			44.49	-8.38	36.11	54	-17.89	A
2412	H	1	96.83	-7.05	89.78	N/A	N/A	P
			89.23	-7.05	82.18	N/A	N/A	A
2412	V	1	97.36	-7.05	90.31	N/A	N/A	P
			89.34	-7.05	82.29	N/A	N/A	A
4824	H	1	50.75	2.45	53.2	74	-20.8	P
			41.13	2.45	43.58	54	-10.42	A
4824	V	1	50.49	2.45	52.94	74	-21.06	P
			41.15	2.45	43.6	54	-10.4	A
5375.35	H	1	49.86	6.27	56.13	74	-17.87	P
			36.54	6.34	42.88	54	-11.12	A
5375.89	V	1	49.25	6.39	55.64	74	-18.36	P
			37.43	6.43	43.86	54	-10.14	A
7236	H	1	46.58	7.43	54.01	74	-19.99	P
			35.52	7.43	42.95	54	-11.05	A
7236	V	1	46.59	7.43	54.02	74	-19.98	P
			35.23	7.43	42.66	54	-11.34	A
11145.34	H	1	44.51	9.37	53.88	74	-20.12	P
			33.06	9.41	42.47	54	-11.53	A
16327.65	----	----	----	----	----	----	----	----
25376.32	----	----	----	----	----	----	----	----

Remark: 1. Transd.=Antenna Factor+Cable Loss-Pre-amplifier
Margin = Level-Limit
Mark: P means Peak Value, Q means Quasi Peak Value, A means Average Value

2. Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz.

4. The test limit distance is 3m limit

IEEE 802.11b TX (CH Middle)

Channel Middle (2437MHz)								
Maximum Frequency	Polarity and Level					Limit	Margin	Mark (P/Q/A)
(MHz)	Polarity	Height (m)	Reading dBµV	Transd	Result dBµV/m	(dBµV/m)	(dBµV/m)	
1326.87	H	1	52.98	-8.45	44.53	74	-29.47	P
			44.15	-8.45	35.7	54	-18.3	A
1318.59	V	1	53.41	-8.43	44.98	74	-29.02	P
			44.43	-8.43	36	54	-18	A
2437	H	1	96.12	-7.05	89.07	N/A	N/A	P
			90.23	-7.05	83.18	N/A	N/A	A
2437	V	1	97.36	-7.05	90.31	N/A	N/A	P
			89.26	-7.05	82.21	N/A	N/A	A
4874	H	1	51.71	2.67	54.38	74	-19.62	P
			41.38	2.67	44.05	54	-9.95	A
4874	V	1	51.19	2.67	53.86	74	-20.14	P
			41.28	2.67	43.95	54	-10.05	A
5436.85	H	1	50.55	5.89	56.44	74	-17.56	P
			39.87	5.89	45.76	54	-8.24	A
5436.89	V	1	50.65	5.89	56.54	74	-17.46	P
			39.79	5.89	45.68	54	-8.32	A
7311	H	1	48.37	7.69	56.06	74	-17.94	P
			37.57	7.69	45.26	54	-8.74	A
7311	V	1	47.88	7.69	55.57	74	-18.43	P
			37.27	7.69	44.96	54	-9.04	A
11238.52	H	1	45.53	9.15	54.68	74	-19.32	P
			34.26	9.21	43.47	54	-10.53	A
16327.71	----	----	----	----	----	----	----	----
25376.58	----	----	----	----	----	----	----	----

Remark: 1. Transd.=Antenna Factor+Cable Loss-Pre-amplifier
 Margin = Level-Limit
 Mark: P means Peak Value, Q means Quasi Peak Value, A means Average Value

2. Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz.

4. The test limit distance is 3m limit

IEEE 802.11b TX (CH High)

Channel High (2462MHz)								
Maximum Frequency (MHz)	Polarity and Level					Limit (dBµV/m)	Margin (dBµV/m)	Mark (P/Q/A)
	Polarity	Height (m)	Reading dBµV	Transd	Result dBµV/m			
1389.36	H	1	52.95	-8.46	44.49	74	-29.51	P
			43.7	-8.46	35.24	54	-18.76	A
1389.24	V	1	53.39	-8.46	44.93	74	-29.07	P
			44.52	-8.46	36.06	54	-17.94	A
2462	H	1	95.76	-7.05	88.71	N/A	N/A	P
			90.12	-7.05	83.07	N/A	N/A	A
2462	V	1	97.07	-7.05	90.02	N/A	N/A	P
			89.2	-7.05	82.15	N/A	N/A	A
4924	H	1	49.51	2.45	51.96	74	-22.04	P
			40.38	2.45	42.83	54	-11.17	A
4924	V	1	50.23	2.45	52.68	74	-21.32	P
			41.41	2.45	43.86	54	-10.14	A
5435.71	H	1	49.41	5.67	55.08	74	-18.92	P
			40.25	5.56	45.81	54	-8.19	A
5442.12	V	1	49.53	5.88	55.41	74	-18.59	P
			40.49	5.52	46.01	54	-7.99	A
7356	H	1	47.67	7.43	55.1	74	-18.9	P
			36.51	7.43	43.94	54	-10.06	A
7386	V	1	46.21	7.43	53.64	74	-20.36	P
			36.21	7.43	43.64	54	-10.36	A
11243.58	H	1	45.43	9.31	54.74	74	-19.26	P
			34.35	9.35	43.7	54	-10.3	A
16327.45	----	----	----	----	----	----	----	----
25376.26	----	----	----	----	----	----	----	----

Remark: 1. Transd.=Antenna Factor+Cable Loss-Pre-amplifier
 Margin = Level-Limit
 Mark: P means Peak Value, Q means Quasi Peak Value, A means Average Value

2. Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz.

4. The test limit distance is 3m limit

IEEE 802.11g TX (CH Low)

Channel Low (2412MHz)								
Maximum Frequency (MHz)	Polarity and Level					Limit (dBµV/m)	Margin (dBµV/m)	Mark (P/Q/A)
	Polarity	Height (m)	Reading dBµV	Transd	Result dBµV/m			
1359.36	H	1	52.37	-8.46	43.91	74	-30.09	P
			45.62	-8.46	37.16	54	-16.84	A
1358.37	V	1	52.8	-8.46	44.34	74	-29.66	P
			46.26	-8.46	37.8	54	-16.2	A
2412	H	1	93.04	-7.05	85.99	N/A	N/A	P
			88.25	-7.05	81.2	N/A	N/A	A
2412	V	1	94.58	-7.05	87.53	N/A	N/A	P
			87.48	-7.05	80.43	N/A	N/A	A
4824	H	1	50.21	2.45	52.66	74	-21.34	P
			41.23	2.45	43.68	54	-10.32	A
4824	V	1	50.33	2.45	52.78	74	-21.22	P
			41.45	2.45	43.9	54	-10.1	A
5433.81	H	1	49.51	6.25	55.76	74	-18.24	P
			37.24	6.27	43.51	54	-10.49	A
5448.35	V	1	49.49	6.35	55.84	74	-18.16	P
			36.39	6.4	42.79	54	-11.21	A
7236	H	1	46.87	7.43	54.3	74	-19.7	P
			35.46	7.43	42.89	54	-11.11	A
7236	V	1	47.15	7.43	54.58	74	-19.42	P
			36.04	7.43	43.47	54	-10.53	A
11385.91	H	1	44.4	9.31	53.71	74	-20.29	P
			32.3	9.35	41.65	54	-12.35	A
16327.15	----	----	----	----	----	----	----	----
25375.69	----	----	----	----	----	----	----	----

Remark: 1. Transd.=Antenna Factor+Cable Loss-Pre-amplifier
 Margin = Level-Limit
 Mark: P means Peak Value, Q means Quasi Peak Value, A means Average Value

2. Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz.

4. The test limit distance is 3m limit

IEEE 802.11g TX (CH Middle)

Channel Middle (2437MHz)								
Maximum Frequency	Polarity and Level					Limit	Margin	Mark (P/Q/A)
(MHz)	Polarity	Height (m)	Reading dBµV	Transd	Result dBµV/m	(dBµV/m)	(dBµV/m)	
1368.5	H	1	52.68	-8.45	44.23	74	-29.77	P
			43.81	-8.45	35.36	54	-18.64	A
1368.7	V	1	53.12	-8.45	44.67	74	-29.33	P
			44.18	-8.45	35.73	54	-18.27	A
2437	H	1	86.34	-7.05	79.29	N/A	N/A	P
			82.24	-7.05	75.19	N/A	N/A	A
2437	V	1	88.77	-7.05	81.72	N/A	N/A	P
			83.77	-7.05	76.72	N/A	N/A	A
4874	H	1	51.33	2.67	54	74	-20	P
			41.19	2.67	43.86	54	-10.14	A
4874	V	1	51.06	2.67	53.73	74	-20.27	P
			41.12	2.67	43.79	54	-10.21	A
5386.35	H	1	50.12	5.72	55.84	74	-18.16	P
			39.21	5.75	44.96	54	-9.04	A
5387.38	V	1	50.39	5.8	56.19	74	-17.81	P
			39.51	5.78	45.29	54	-8.71	A
7311	H	1	48.07	7.69	55.76	74	-18.24	P
			37.36	7.69	45.05	54	-8.95	A
7311	V	1	47.67	7.69	55.36	74	-18.64	P
			36.8	7.69	44.49	54	-9.51	A
11223.16	H	1	45.4	9.17	54.57	74	-19.43	P
			34.44	9.23	43.67	54	-10.33	A
16336.53	----	----	----	----	----	----	----	----
25375.82	----	----	----	----	----	----	----	----

Remark: 1. Transd.=Antenna Factor+Cable Loss-Pre-amplifier
 Margin = Level-Limit
 Mark: P means Peak Value, Q means Quasi Peak Value, A means Average Value

2. Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz.

4. The test limit distance is 3m limit

IEEE 802.11g TX (CH High)

Channel High (2462MHz)								
Maximum Frequency (MHz)	Polarity and Level					Limit (dBµV/m)	Margin (dBµV/m)	Mark (P/Q/A)
	Polarity	Height (m)	Reading dBµV	Transd	Result dBµV/m			
1385.6	H	1	52.48	-8.42	44.06	74	-29.94	P
			43.45	-8.42	35.03	54	-18.97	A
1384.5	V	1	53	-8.42	44.58	74	-29.42	P
			44.31	-8.42	35.89	54	-18.11	A
2462	H	1	86.34	-7.05	79.29	N/A	N/A	P
			82.24	-7.05	75.19	N/A	N/A	A
2462	V	1	89.77	-7.05	82.72	N/A	N/A	P
			84.77	-7.05	77.72	N/A	N/A	A
4924	H	1	49.43	2.45	51.88	74	-22.12	P
			40.31	2.45	42.76	54	-11.24	A
4924	V	1	50.12	2.45	52.57	74	-21.43	P
			41.35	2.45	43.8	54	-10.2	A
5389.36	H	1	49.25	5.52	54.77	74	-19.23	P
			40.36	5.54	45.9	54	-8.1	A
5386.37	V	1	49.41	5.69	55.1	74	-18.9	P
			40.2	5.47	45.67	54	-8.33	A
7356	H	1	47.54	7.43	54.97	74	-19.03	P
			36.3	7.43	43.73	54	-10.27	A
7386	V	1	46.28	7.43	53.71	74	-20.29	P
			35.67	7.43	43.1	54	-10.9	A
11328.59	H	1	45.3	9.23	54.53	74	-19.47	P
			34.33	9.35	43.68	54	-10.32	A
16327.15	----	----	----	----	----	----	----	----
25375.69	----	----	----	----	----	----	----	----

Remark: 1. Transd.=Antenna Factor+Cable Loss-Pre-amplifier
 Margin = Level-Limit
 Mark: P means Peak Value, Q means Quasi Peak Value, A means Average Value

2. Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz.

4. The test limit distance is 3m limit

IEEE 802.11n HT20 TX (CH Low)

Channel Low (2412MHz)								
Maximum Frequency (MHz)	Polarity and Level					Limit (dBµV/m)	Margin (dBµV/m)	Mark (P/Q/A)
	Polarity	Height (m)	Reading dBµV	Transd	Result dBµV/m			
1356.45	H	1	52.43	-8.32	44.11	74	-29.89	P
			45.14	-8.35	36.79	54	-17.21	A
1356.45	V	1	52.87	-8.37	44.5	74	-29.5	P
			45.22	-8.33	36.89	54	-17.11	A
2412	H	1	87.34	-7.05	80.29	N/A	N/A	P
			84.08	-7.05	77.03	N/A	N/A	A
2412	V	1	90.8	-7.05	83.75	N/A	N/A	P
			83.77	-7.05	76.72	N/A	N/A	A
4824	H	1	49.15	2.45	51.6	74	-22.4	P
			40.11	2.45	42.56	54	-11.44	A
4824	V	1	50.26	2.45	52.71	74	-21.29	P
			41.37	2.45	43.82	54	-10.18	A
5435.48	H	1	49.1	6.17	55.27	74	-18.73	P
			38.05	6.24	44.29	54	-9.71	A
5435.48	V	1	49.23	6.31	55.54	74	-18.46	P
			36.85	6.35	43.2	54	-10.8	A
7236	H	1	46.54	7.43	53.97	74	-20.03	P
			34.95	7.43	42.38	54	-11.62	A
7236	V	1	45.73	7.43	53.16	74	-20.84	P
			33.71	7.43	41.14	54	-12.86	A
11841.35	H	1	43.29	9.25	52.54	74	-21.46	P
			32.44	9.22	41.66	54	-12.34	A
1356.45	H	1	52.43	-8.32	44.11	74	-29.89	P
			45.14	-8.35	36.79	54	-17.21	A

Remark: 1. Transd.=Antenna Factor+Cable Loss-Pre-amplifier
 Margin = Level-Limit
 Mark: P means Peak Value, Q means Quasi Peak Value, A means Average Value

2. Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz.

4. The test limit distance is 3m limit

IEEE 802.11n HT20 TX (CH Middle)

Channel Middle (2437MHz)								
Maximum Frequency (MHz)	Polarity and Level					Limit (dBµV/m)	Margin (dBµV/m)	Mark (P/Q/A)
	Polarity	Height (m)	Reading dBµV	Transd	Result dBµV/m			
1367.59	H	1	52.59	-8.42	44.17	74	-29.83	P
			43.74	-8.42	35.32	54	-18.68	A
1368.74	V	1	52.89	-8.42	44.47	74	-29.53	P
			44.12	-8.42	35.7	54	-18.3	A
2437	H	1	85.36	-7.05	78.31	N/A	N/A	P
			82.46	-7.05	75.41	N/A	N/A	A
2437	V	1	89.96	-7.05	82.91	N/A	N/A	P
			84.54	-7.05	77.49	N/A	N/A	A
4874	H	1	50.2	2.67	52.87	74	-21.13	P
			40.31	2.67	42.98	54	-11.02	A
4874	V	1	51.18	2.67	53.85	74	-20.15	P
			41.13	2.67	43.8	54	-10.2	A
5453.69	H	1	49.76	5.53	55.29	74	-18.71	P
			39.19	5.55	44.74	54	-9.26	A
5453.74	V	1	49.65	5.61	55.26	74	-18.74	P
			39.34	5.65	44.99	54	-9.01	A
7311	H	1	47.86	7.69	55.55	74	-18.45	P
			36.41	7.69	44.1	54	-9.9	A
7311	V	1	46.32	7.69	54.01	74	-19.99	P
			35.56	7.69	43.25	54	-10.75	A
11635.24	H	1	45.34	9.08	54.42	74	-19.58	P
			34.21	9.17	43.38	54	-10.62	A
16336.18	----	----	----	----	----	----	----	----
25375.67	----	----	----	----	----	----	----	----

Remark: 1. Transd.=Antenna Factor+Cable Loss-Pre-amplifier
 Margin = Level-Limit
 Mark: P means Peak Value, Q means Quasi Peak Value, A means Average Value

2. Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz.

4. The test limit distance is 3m limit

IEEE 802.11n HT20 TX (CH High)

Channel High (2462MHz)								
Maximum Frequency (MHz)	Polarity and Level					Limit (dBµV/m)	Margin (dBµV/m)	Mark (P/Q/A)
	Polarity	Height (m)	Reading dBµV	Transd	Result dBµV/m			
1342.1	H	1	52.95	-8.48	44.47	74	-29.53	P
			43.87	-8.48	35.39	54	-18.61	A
1348.8	V	1	53.12	-8.48	44.64	74	-29.36	P
			44.19	-8.48	35.71	54	-18.29	A
2462	H	1	85.33	-7.05	78.28	N/A	N/A	P
			82.23	-7.05	75.18	N/A	N/A	A
2462	V	1	88.8	-7.05	81.75	N/A	N/A	P
			83.04	-7.05	75.99	N/A	N/A	A
4924	H	1	49.29	2.45	51.74	74	-22.26	P
			40.14	2.45	42.59	54	-11.41	A
4924	V	1	50.04	2.45	52.49	74	-21.51	P
			41.26	2.45	43.71	54	-10.29	A
5455.34	H	1	49.05	5.32	54.37	74	-19.63	P
			40.13	5.37	45.5	54	-8.5	A
5455.34	V	1	49.21	5.43	54.64	74	-19.36	P
			40.07	5.42	45.49	54	-8.51	A
7356	H	1	47.46	7.43	54.89	74	-19.11	P
			35.76	7.43	43.19	54	-10.81	A
7386	V	1	46.17	7.43	53.6	74	-20.4	P
			36.05	7.43	43.48	54	-10.52	A
11646.18	H	1	45.23	9.13	54.36	74	-19.64	P
			34.51	9.26	43.77	54	-10.23	A
16326.47	----	----	----	----	----	----	----	----
25375.25	----	----	----	----	----	----	----	----

Remark: 1. Transd.=Antenna Factor+Cable Loss-Pre-amplifier
 Margin = Level-Limit
 Mark: P means Peak Value, Q means Quasi Peak Value, A means Average Value

2. Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz.

4. The test limit distance is 3m limit

IEEE 802.11n HT40 TX (CH Low)

Channel High (2422MHz)								
Maximum Frequency (MHz)	Polarity and Level					Limit (dBµV/m)	Margin (dBµV/m)	Mark (P/Q/A)
	Polarity	Height (m)	Reading dBµV	Transd	Result dBµV/m			
1345.36	H	1	52.91	-8.52	44.39	74	-29.61	P
			45.03	-8.52	36.51	54	-17.49	A
1345.85	V	1	52.23	-8.52	43.71	74	-30.29	P
			44.09	-8.52	35.57	54	-18.43	A
2412	H	1	86.41	-7.05	79.36	N/A	N/A	P
			83.24	-7.05	76.19	N/A	N/A	A
2412	V	1	88.01	-7.05	80.96	N/A	N/A	P
			83.23	-7.05	76.18	N/A	N/A	A
4824	H	1	48.75	2.45	51.2	74	-22.8	P
			39.63	2.45	42.08	54	-11.92	A
4824	V	1	49.66	2.45	52.11	74	-21.89	P
			40.83	2.45	43.28	54	-10.72	A
5436.37	H	1	48.84	6.09	54.93	74	-19.07	P
			37.77	6.18	43.95	54	-10.05	A
5437.85	V	1	48.86	6.25	55.11	74	-18.89	P
			37.09	6.3	43.39	54	-10.61	A
7236	H	1	46.11	7.43	53.54	74	-20.46	P
			34.57	7.43	42	54	-12	A
7236	V	1	45.4	7.43	52.83	74	-21.17	P
			33.24	7.43	40.67	54	-13.33	A
11252.58	H	1	42.74	9.18	51.92	74	-22.08	P
			32.26	9.15	41.41	54	-12.59	A
16336.42	----	----	----	----	----	----	----	----
25374.11	----	----	----	----	----	----	----	----

Remark: 1. Transd.=Antenna Factor+Cable Loss-Pre-amplifier
 Margin = Level-Limit
 Mark: P means Peak Value, Q means Quasi Peak Value, A means Average Value

2. Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz.

4. The test limit distance is 3m limit

IEEE 802.11n HT40 TX (CH Mid)

Channel Middle (2437MHz)								
Maximum Frequency	Polarity and Level					Limit	Margin	Mark (P/Q/A)
(MHz)	Polarity	Height (m)	Reading dBµV	Transd	Result dBµV/m	(dBµV/m)	(dBµV/m)	
1285.4	H	1	53.27	-8.31	44.96	74	-29.04	P
			43.59	-8.33	35.26	54	-18.74	A
1283.7	V	1	52.18	-8.41	43.77	74	-30.23	P
			42.87	-8.47	34.4	54	-19.6	A
2437	H	1	86.79	-6.98	79.81	N/A	N/A	P
			81.92	-6.98	74.94	N/A	N/A	A
2437	V	1	89.12	-6.98	82.14	N/A	N/A	P
			83.5	-6.98	76.52	N/A	N/A	A
4874	H	1	49.38	2.67	52.05	74	-21.95	P
			39.54	2.67	42.21	54	-11.79	A
4874	V	1	50.27	2.67	52.94	74	-21.06	P
			40.06	2.67	42.73	54	-11.27	A
5432.9	H	1	48.23	5.32	53.55	74	-20.45	P
			38.4	5.35	43.75	54	-10.25	A
5432.9	V	1	48.47	5.44	53.91	74	-20.09	P
			38.73	5.47	44.2	54	-9.8	A
7311	H	1	46.91	7.69	54.6	74	-19.4	P
			35.83	7.69	43.52	54	-10.48	A
7311	V	1	45.43	7.69	53.12	74	-20.88	P
			35.11	7.69	42.8	54	-11.2	A
11321.84	H	1	44.42	9.12	53.54	74	-20.46	P
			33.95	9.06	43.01	54	-10.99	A
16335.57	----	----	----	----	----	----	----	----
25374.88	----	----	----	----	----	----	----	----

Remark: 1. Transd.=Antenna Factor+Cable Loss-Pre-amplifier
 Margin = Level-Limit
 Mark: P means Peak Value, Q means Quasi Peak Value, A means Average Value

2. Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz.

4. The test limit distance is 3m limit

IEEE 802.11n HT40 TX (CH High)

Channel High (2452MHz)								
Maximum Frequency (MHz)	Polarity and Level					Limit (dBµV/m)	Margin (dBµV/m)	Mark (P/Q/A)
	Polarity	Height (m)	Reading dBµV	Transd	Result dBµV/m			
1385.4	H	1	53.05	-8.41	44.64	74	-29.36	P
			43.42	-8.43	34.99	54	-19.01	A
1384.3	V	1	51.87	-8.45	43.42	74	-30.58	P
			42.62	-8.44	34.18	54	-19.82	A
2462	H	1	86.43	-6.74	79.69	N/A	N/A	P
			82.66	-6.74	75.92	N/A	N/A	A
2462	V	1	89.27	-6.74	82.53	N/A	N/A	P
			83.07	-6.74	76.33	N/A	N/A	A
4924	H	1	48.44	2.45	50.89	74	-23.11	P
			39.31	2.45	41.76	54	-12.24	A
4924	V	1	49.49	2.45	51.94	74	-22.06	P
			40.31	2.45	42.76	54	-11.24	A
5368.5	H	1	48.1	5.16	53.26	74	-20.74	P
			38.22	5.24	43.46	54	-10.54	A
5384.4	V	1	48.11	5.31	53.42	74	-20.58	P
			38.33	5.35	43.68	54	-10.32	A
7356	H	1	46.83	7.43	54.26	74	-19.74	P
			34.56	7.43	41.99	54	-12.01	A
7386	V	1	45.54	7.43	52.97	74	-21.03	P
			34.24	7.43	41.67	54	-12.33	A
11242.13	H	1	44.35	9.02	53.37	74	-20.63	P
			33.38	9.14	42.52	54	-11.48	A
16325.22	----	----	----	----	----	----	----	----
25374.65	----	----	----	----	----	----	----	----

Remark: 1. Transd.=Antenna Factor+Cable Loss-Pre-amplifier
 Margin = Level-Limit
 Mark: P means Peak Value, Q means Quasi Peak Value, A means Average Value

2. Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz.

4. The test limit distance is 3m limit

10. Test of Band Edges Emission

10.1 Applicable Standard

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions that fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209.

10.2 EUT Setup

Radiated Measurement Setup


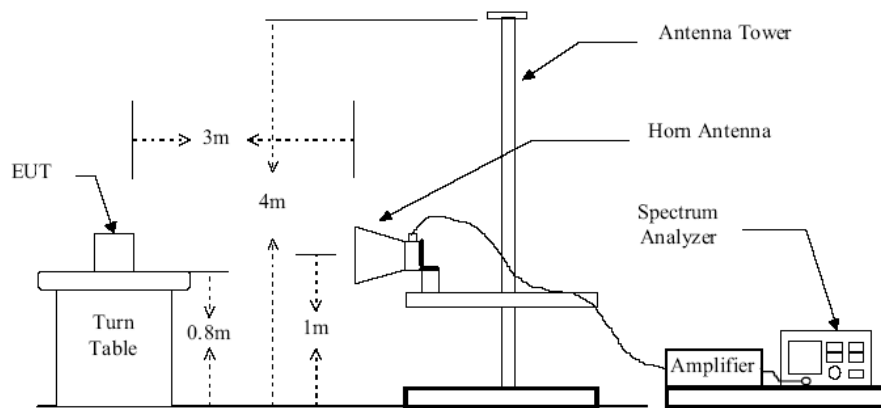


Figure 2 : Frequencies measured above 1 GHz configuration

Conducted Measurement Setup

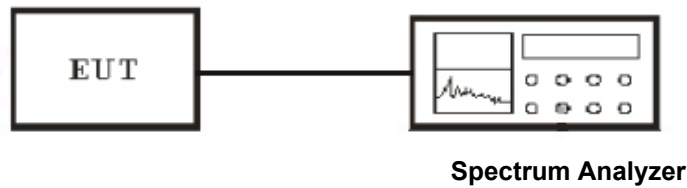

10.3 Test Equipment List and Details

See section 2.5.

10.4 Test Procedure

Conducted Measurement

1. The transmitter is set to the lowest channel.
2. The transmitter output was connected to the spectrum analyzer via a cable and cable loss is used as the offset of the spectrum analyzer.

3. Set both RBW and VBW of spectrum analyzer to 100KHz with convenient frequency span including 100MHz bandwidth from lower band edge. Then detector set to peak and max hold this trace.
4. The lowest band edges emission was measured and recorded.
5. The transmitter set to the highest channel and repeated 2~4.

Radiated Measurement

1. Configure the EUT according to ANSI C63.4-2003
2. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
4. For band edge emission, the antenna tower was scan (from 1 M to 4 M) and then the turn table was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. For band edge emission, use 1MHz VBW and 1MHz RBW for reading under AV and use 1MHz VBW and 1MHz RBW for reading under PK.

10.5 Test Result

Temperature (°C) : 22~23	EUT: MID
Humidity (%RH) : 50~54	M/N: HS-9DTB7
Barometric Pressure (mbar) : 950~1000	Operation Condition: Tx Mode

Radiated Test Result

TEST RESULT

IEEE 802.11b mode

Channel	Freq.(MHz)	Level(dBuV)	Limit(dBuV)	Margin(dB)	Detector
	2390	49.84	74	-24.16	Peak
LOW	2390	42.35	54	-11.65	Average
	2483.73	48.25	74	-25.75	Peak
HIGH	2483.73	42.15	54	-11.85	Average

IEEE 802.11g mode

Channel	Freq.(MHz)	Level(dBuV)	Limit(dBuV)	Margin(dB)	Detector
	2390	48.12	74	-25.88	Peak
LOW	2390	41.35	54	-12.65	Average
	2483.6	48.25	74	-25.75	Peak
HIGH	2483.6	42.15	54	-11.85	Average

IEEE 802.11n HT20 mode


Channel	Freq.(MHz)	Level(dBuV)	Limit(dBuV)	Margin(dB)	Detector
	2390	48.59	74	-25.41	Peak
LOW	2390	42.38	54	-11.62	Average
	2483.6	47.34	74	-26.66	Peak
HIGH	2483.6	41.53	54	-12.47	Average

IEEE 802.11n HT40 mode


Channel	Freq.(MHz)	Level(dBuV)	Limit(dBuV)	Margin(dB)	Detector
	2390	48.36	74	-25.64	Peak
LOW	2390	41.42	54	-12.58	Average
	2483.6	48.31	74	-25.69	Peak
HIGH	2483.6	42.14	54	-11.86	Average

Test of Conducted band edges


CH Low (802.11b MODE)

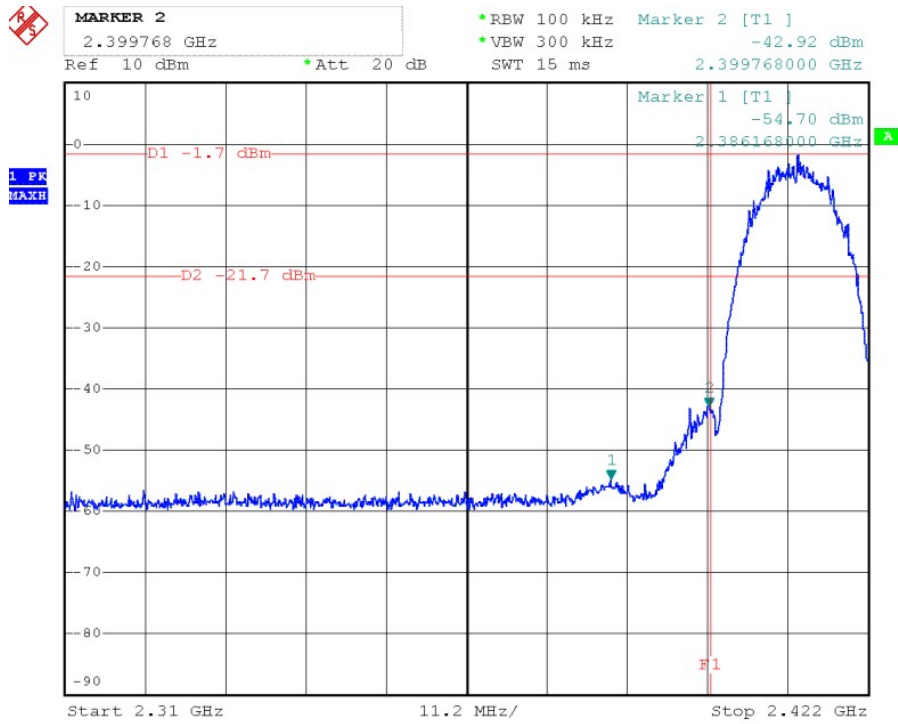


CH High (802.11b MODE)

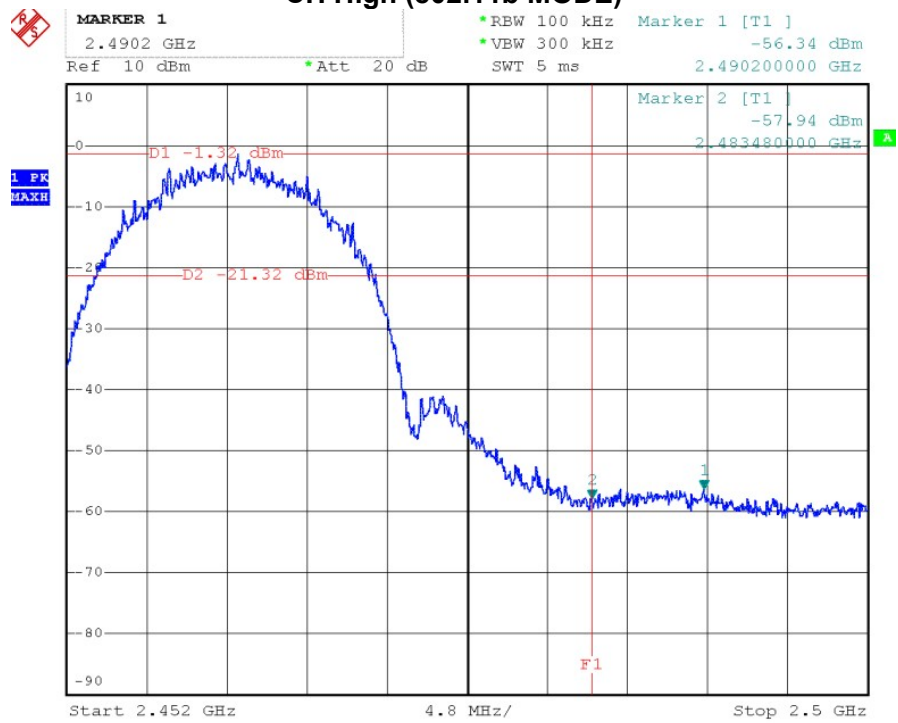


CH Low (802.11g MODE)

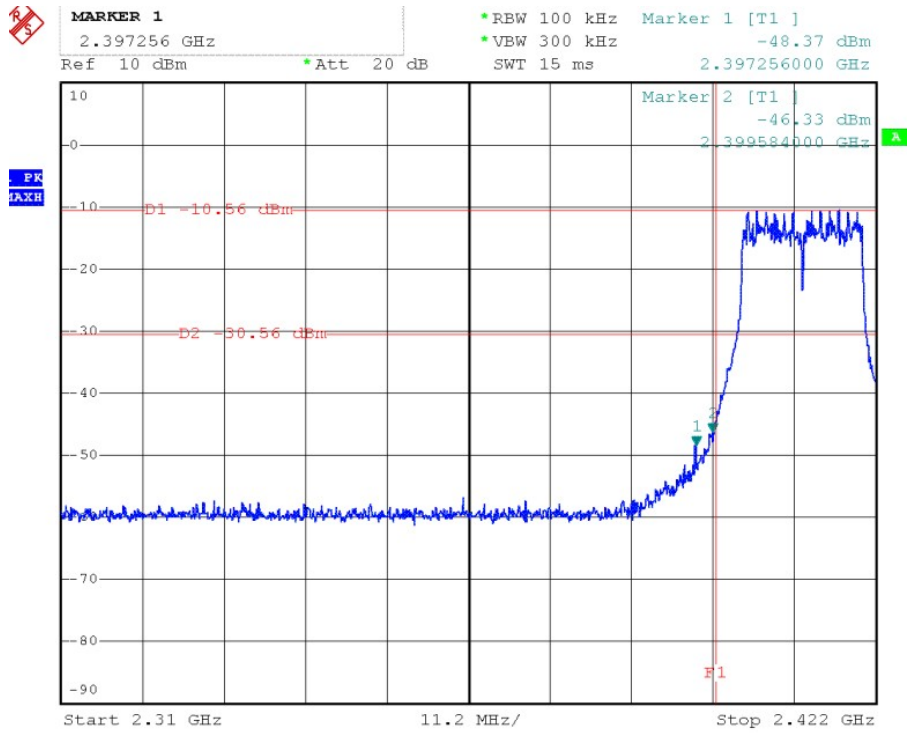


CH High (802.11g MODE)

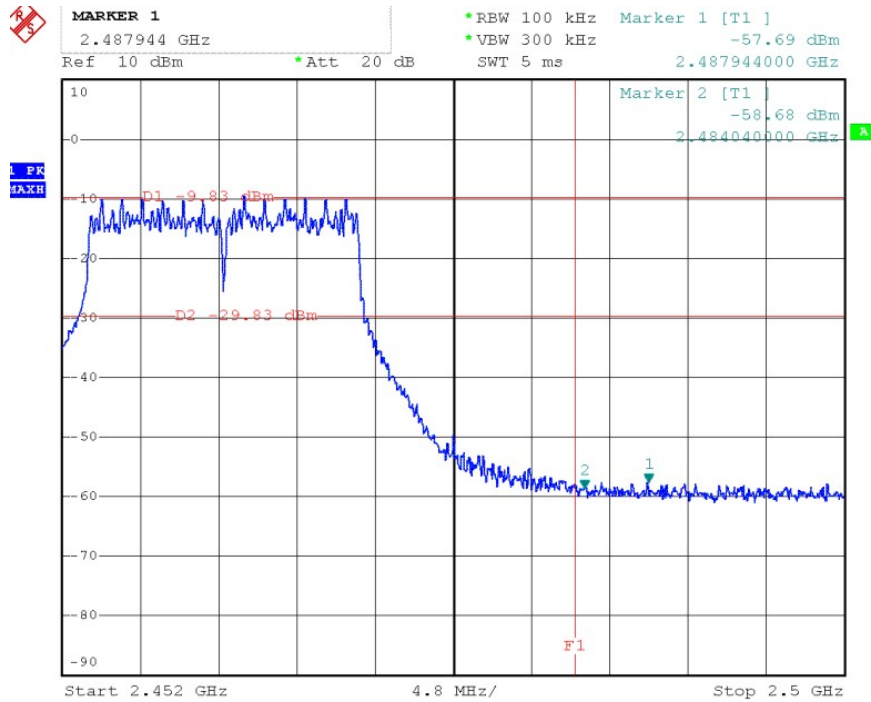


CH Low (802.11n HT20 MODE)

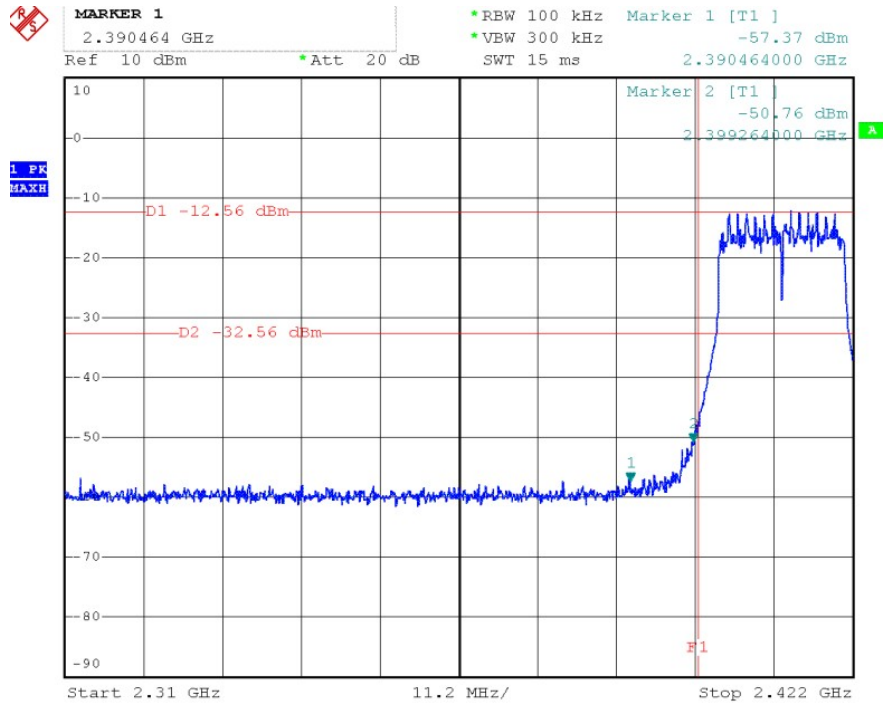


CH Low (802.11n HT20 MODE)

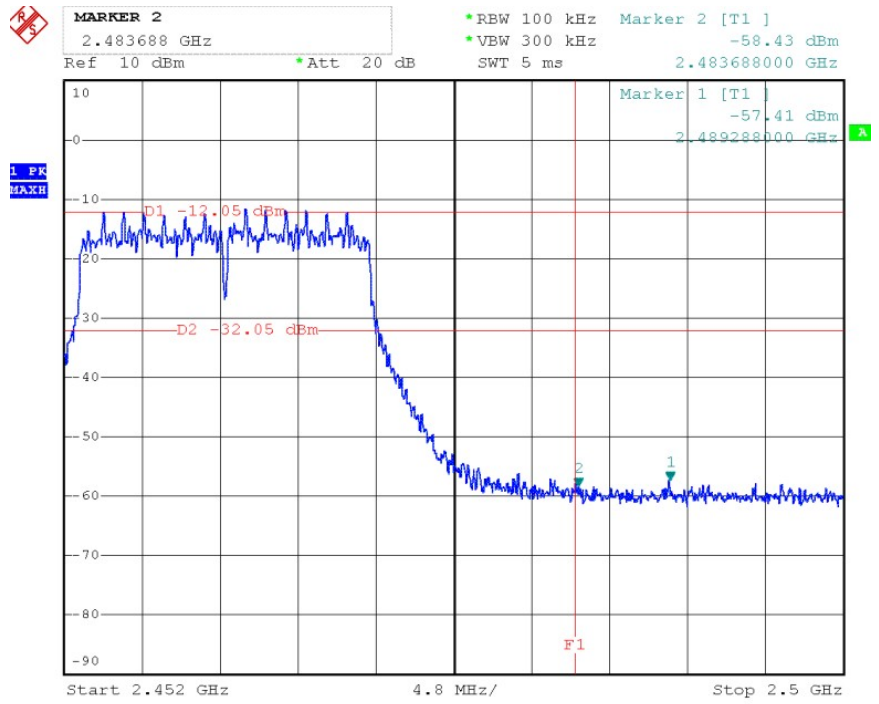

CH High (802.11n HT40 MODE)

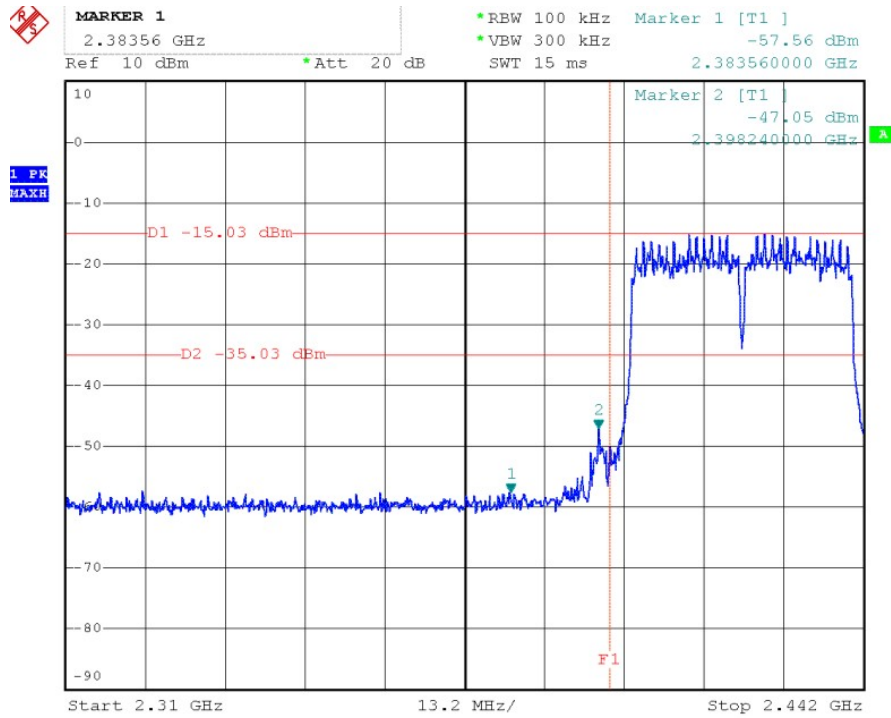

CH High (802.11n HT40 MODE)

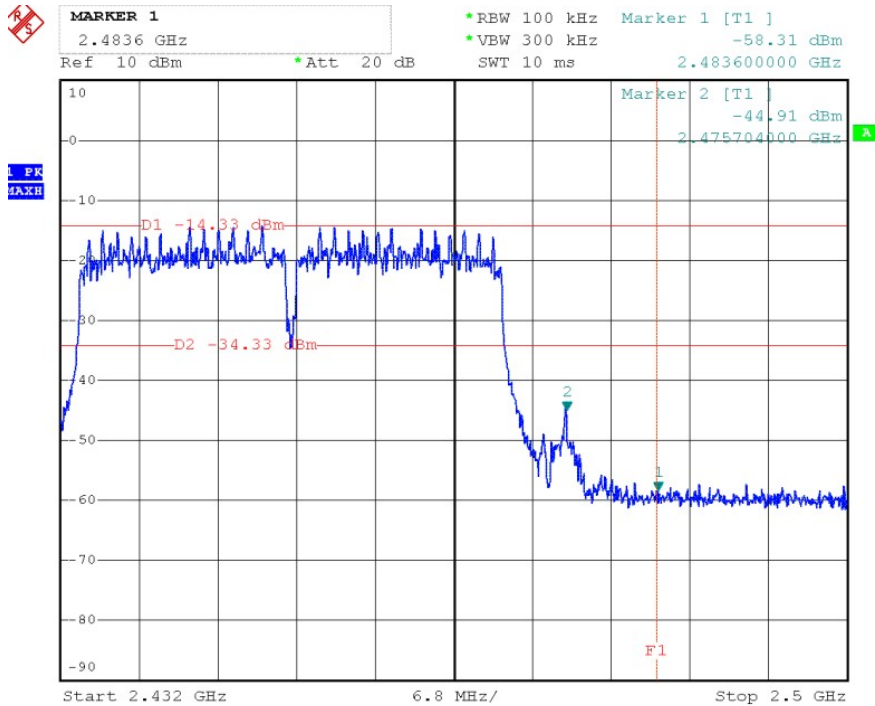

11. ANTENNA REQUIREMENT

11.1 Standard Applicable

Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Section 15.247(b)/(c):

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

If the intentional radiator is used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

11.2 Antenna Connected Construction

The antenna is designed with permanent attachment and no consideration of replacement. The antenna used in this product is complied with Standard. The maximum Gain of the antenna lower than 6.0dBi and have the definite antenna Specification.