

RADIO TEST REPORT

FOR

KOBIAN CANADA INC.

Bluetooth Headset

Model No.: HS-BT102

Prepared for : KOBIAN CANADA INC.
Address : 560 Denison Street, Unit 5, Markham, Ontario, L3R 2M8, Canada

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 1F., Xingyuan Industrial Park, Tongda Road, Bao'an Blvd., Bao'an District, Shenzhen, Guangdong, China

Date of receipt of test sample : November 01, 2012
Number of tested samples : 1
Serial number : Prototype
Date of Test : November 01, 2012 –November 09, 2012
Date of Report : November 09, 2012

TEST REPORT
FCC CFR 47 PART 15 C(15.247) / RSS-210 Issue 8/RSS-GEN Issue 3

Report Reference No. : **LCS121101005QE**

Date of Issue : November 09, 2012

Testing Laboratory Name..... : **Shenzhen LCS Compliance Testing Laboratory Ltd.**

Address : 1F., Xingyuan Industrial Park, Tongda Road, Bao'an Blvd.,
 Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure..... : Full application of Harmonised standards
 Partial application of Harmonised standards
 Other standard testing method

Applicant's Name : **KOBIAN CANADA INC.**

Address : 560 Denison Street, Unit 5,Markham, Ontario, L3R 2M8,
 Canada

Test Specification

Standard : FCC CFR 47 PART 15 C(15.247) / RSS-210 Issue 8/
 RSS-GEN Issue 3

Test Report Form No. : LCSEMC-1.0

TRF Originator : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2011-03

SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description..... : **Bluetooth Headset**


Trade Mark : **hipstreet**

Model/ Type reference : HS-BT102

Ratings : DC 3.7V by Built-in Li-ion Battery

Result : **Positive**

Compiled by:



Supervised by:



Approved by:



Yoyo Wang/ File administrators

Vito Cao/ Technique principal

Gavin Liang/ Manager

RADIO -- TEST REPORT

Test Report No. : LCS121101005QE	<u>November 09, 2012</u> Date of issue
---	---

Type / Model.....	: HS-BT102
EUT.....	: Bluetooth Headset
Applicant.....	: KOBIAN CANADA INC.
Address.....	: 560 Denison Street, Unit 5,Markham, Ontario, L3R 2M8, Canada
Telephone.....	: /
Fax.....	: /
Manufacturer.....	: KOBIAN CANADA INC.
Address.....	: 560 Denison Street, Unit 5,Markham, Ontario, L3R 2M8, Canada
Telephone.....	: /
Fax.....	: /
Factory.....	: KOBIAN CANADA INC.
Address.....	: 560 Denison Street, Unit 5,Markham, Ontario, L3R 2M8, Canada
Telephone.....	: /
Fax.....	: /

Test Result:	Positive
---------------------	-----------------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1 Description of Device (EUT).....	5
1.2 Host System Configuration List and Details	5
1.3 External I/O Cable	5
1.4 Description of Test Facility	5
1.5 Statement of The Measurement Uncertainty	6
1.6 Measurement Uncertainty	6
1.7 Description Of Test Modes.....	6
2. TEST METHODOLOGY	7
2.1 EUT Configuration	7
2.2 EUT Exercise.....	7
2.3 General Test Procedures	7
3. SYSTEM TEST CONFIGURATION.....	8
3.1 Justification.....	8
3.2 EUT Exercise Software	8
3.3 Special Accessories.....	8
3.4 Block Diagram/Schematics.....	8
3.5 Equipment Modifications	8
3.6 Test Setup	8
4. ANTENNA PORT MEASUREMENT	9
4.1 Peak Power	9
4.2 Frequency Separation	10
4.3 Number Of Hopping Frequency	16
4.4 Time Of Occupancy (Dwell Time).....	18
4.5 Spurious Emissions.....	21
5. RADIATED MEASUREMENT	25
5.1 Radiated Emission	25
5.2 Band Edges	34
6. LINE CONDUCTED EMISSIONS.....	43
6.1 Standard Applicable.....	43
6.2 Test Equipment.....	43
6.3 Block Diagram of Test Setup.....	44
6.4 Test Results.....	44
7. ANTENNA REQUIREMENT	46
7.1 Standard Applicable.....	46
7.2 Antenna Connected Construction	46
8. MANUFACTURER/ APPROVAL HOLDER DECLARATION	47

1. GENERAL INFORMATION

1.1 Description of Device (EUT)

- EUT : Bluetooth Headset
- Model Number : HS-BT102
- Power Supply : DC 3.7V by Built-in Li-ion Battery
- Frequency Range : 2402.00-2480.00MHz (Channel Frequency=2402+1(K-1), K=1, 2, 379)
- Modulation : GFSK(1Mbps)
- Technology : π /4-DQPSK(2Mbps)
8-DPSK(3Mbps)
- Module Channel : 79
- Channel Spacing : 1MHz
- Bluetooth Version : V2.1+EDR
- Antenna Gain : 2.0dBi(Max.)

1.2 Host System Configuration List and Details

Manufacturer	Description	Model	Serial Number	Certificate
Lenovo	Notebook	B470	--	DoC

1.3 External I/O Cable

Cable Description	Length (M)	From/Port	To
USB Charging Cable	0.8m	Charging Port	PC/Adapter

1.4 Description of Test Facility

Site Description

- EMC Lab. : Accredited by CNAS, June 04, 2010
The Certificate Registration Number. is L4595.
- Accredited by FCC, July 14, 2011
The Certificate Registration Number. is 899208.
- Accredited by Industry Canada, May. 02, 2011
The Certificate Registration Number. is 9642A-1

1.5 Statement of The Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.6 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Radiation Uncertainty	30MHz~200MHz	± 2.96dB	(1)
	200MHz~1000MHz	± 3.10dB	(1)
	1GHz~26.5GHz	± 3.80dB	(1)
Conduction Uncertainty	150kHz~30MHz	± 1.63dB	(1)
Power disturbance	30MHz~300MHz	± 1.60dB	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.7 Description Of Test Modes

Bluetooth operates in the unlicensed ISM Band at 2.4GHz. With the introduction of the enhanced data rate (EDR) feature, the data rates can be up to 3 Mb/s. An increase in the peak data rate beyond the basic rate of 1 Mb/s is achieved by modulating the RF carrier using GFSK techniques, resulting in an increase of two to three times the number of bits per symbol. The 2 Mb/s EDR packets use a $\pi/4$ -DQPSK modulation and the 3 Mb/s EDR packets use 8DPSK modulation. All 3axis have been tested. The following operating modes were applied for the related test items.

All test modes were tested, only the result of the worst case was recorded in the report.

Mode of Operations	Frequency Range (MHz)	Data Rate (Mbps)
GFSK	2402	1
	2441	1
	2480	1
$\pi/4$ DQPSK	2402	2
	2441	2
	2480	2
8-DPSK	2402	3
	2441	3
	2480	3
For Conducted Emission		
Test Mode	Normal Operating Mode	
For Radiated Emission		
Test Mode	TX Mode	

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4, RSS-210, FCC CFR PART 15C 15.207, 15.209, 15.247 and DA 00-705.

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209, 15.247 under the FCC Rules Part 15 Subpart C and RSS-210.

2.3 General Test Procedures

2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4

3. SYSTEM TEST CONFIGURATION

3.1 Justification

N/A.

3.2 EUT Exercise Software

N/A.

3.3 Special Accessories

N/A.

3.4 Block Diagram/Schematics

Please refer to the report.

3.5 Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6 Test Setup

Please refer to the test setup photo.


4. ANTENNA PORT MEASUREMENT

4.1 Peak Power

4.1.1 Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1	Power Sensor	Agilent	E9327A	US40441788	2012-06-18	2013-06-17
2	Power Meter	Agilent	E4416A	QB41292714	2012-06-18	2013-06-17
3	DC Filter	MPE	23872C	N/A	2012-06-18	2013-06-17

4.1.2 Block Diagram of Test Setup

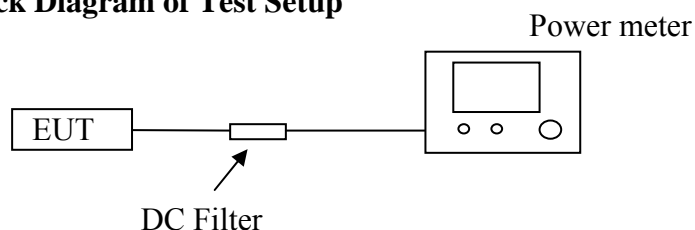

4.1.3 Limit

According to § 15.247(a)(1) or A8.4 (2), For frequency hopping systems operating in the band 2400-2483.5 MHz employing at least 75 hopping channels, the maximum peak conducted output power shall not exceed 1 W.

4.1.4 Test Procedure

The transmitter output is connected to the Power Meter.

4.1.5 Test Results

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (mW)	Limit (mW)	Result
GFSK	2402	-0.59	0.87	1000	Pass
	2441	-1.14	0.77	1000	Pass
	2480	-0.98	0.80	1000	Pass
$\pi/4$ DQPSK	2402	-0.62	0.87	1000	Pass
	2441	-1.12	0.77	1000	Pass
	2480	-0.98	0.80	1000	Pass
8-DPSK	2402	-0.62	0.87	1000	Pass
	2441	-1.19	0.76	1000	Pass
	2480	-0.98	0.80	1000	Pass

4.2 Frequency Separation


4.2.1 Limit

According to §15.247(c) or A8.1(a), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

4.2.2 Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1	Spectrum Analyzer	Agilent	E4407B	MY41440292	2012-06-18	2013-06-17
2	RF Cable	Hubersuhne	Sucoflex104	FP2RX2	2012-06-18	2013-06-17
3	DC Filter	MPE	23872C	N/A	2012-06-18	2013-06-17

4.2.3 Block Diagram of Test Setup

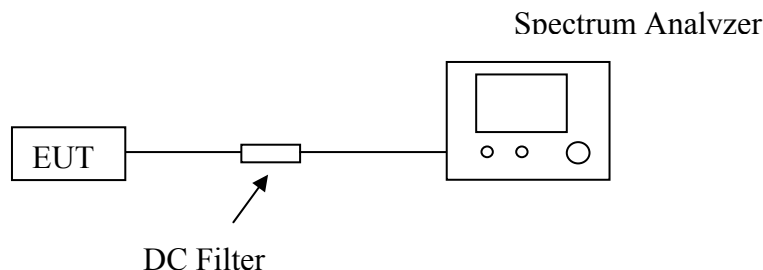

4.2.4 Test Procedure

- A. Place the EUT on the table and set it in transmitting mode.
- B. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.
- C. Set center frequency of Spectrum Analyzer = middle of hopping channel.
- D. Set the Spectrum Analyzer as RBW = 30kHz, VBW = 30kHz, Span = wide enough to capture the peaks of two adjacent channels, Sweep = auto.
- E. Max hold, mark 2 peaks of hopping channel and record the 2 peaks frequency.


4.2.5 Test Results

The Measurement Result With 1Mbps For GFSK Modulation				
Channel	20dB Bandwidth (KHz)	Channel Separation (MHz)	Limit (MHz)	Result
Low	851.91	1.000	≥ 25 KHz or 2/3 20 dB BW	Pass
Middle	848.67		≥ 25 KHz or 2/3 20 dB BW	Pass
High	851.31		≥ 25 KHz or 2/3 20 dB BW	Pass


The Measurement Result With 3Mbps For 8-DPSK Modulation				
Channel	20dB Bandwidth (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
Low	1.215	1.000	≥ 25 KHz or 2/3 20 dB BW	Pass
Middle	1.225		≥ 25 KHz or 2/3 20 dB BW	Pass
High	1.220		≥ 25 KHz or 2/3 20 dB BW	Pass

The test data refer to the following page.

Test Plot Of Frequency Separation (1Mbps)

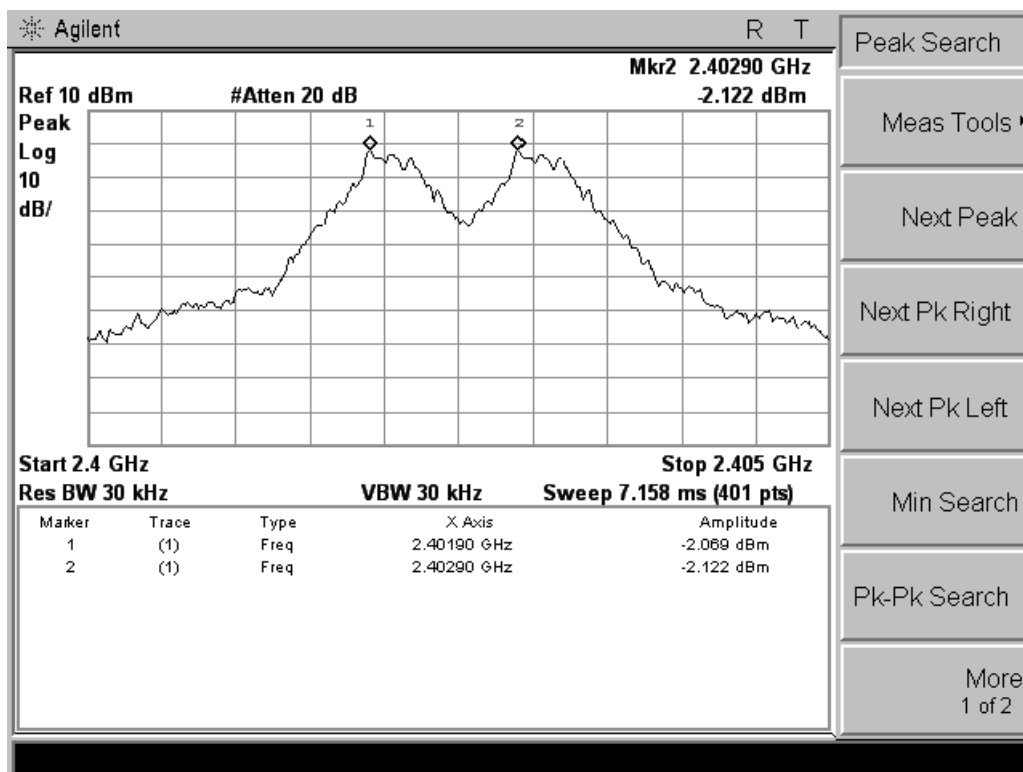


Test Plot Of Frequency Separation (3Mbps)

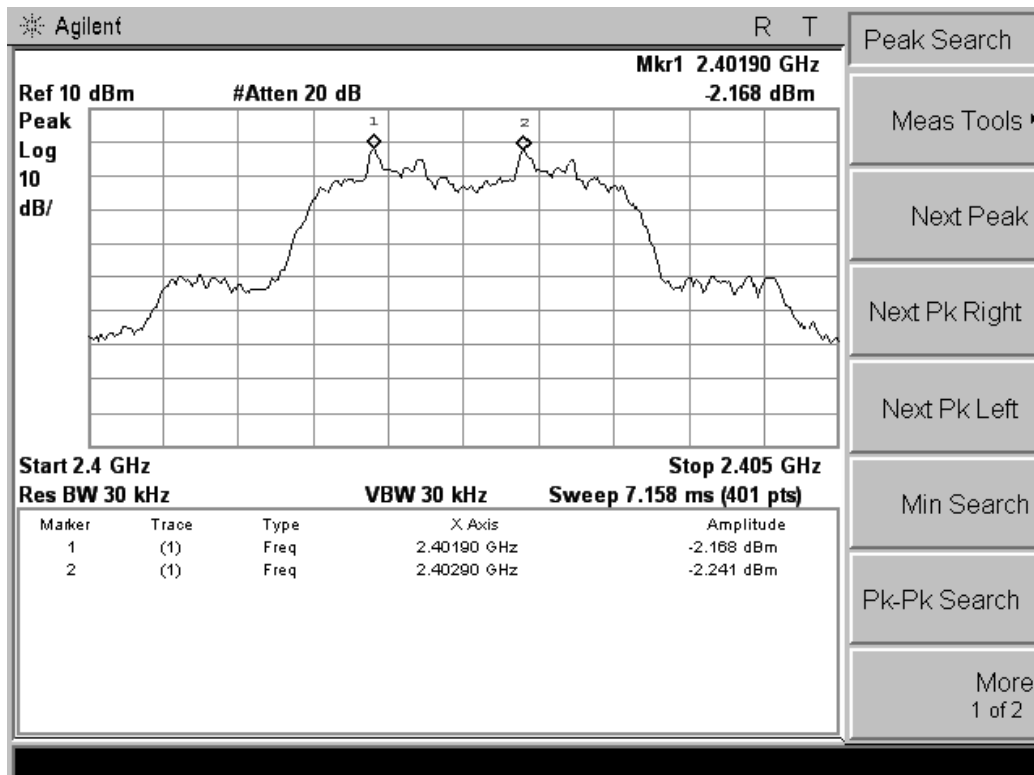


Measurement of 20dB Bandwidth


Test frequency: 2402MHz(1Mbps)

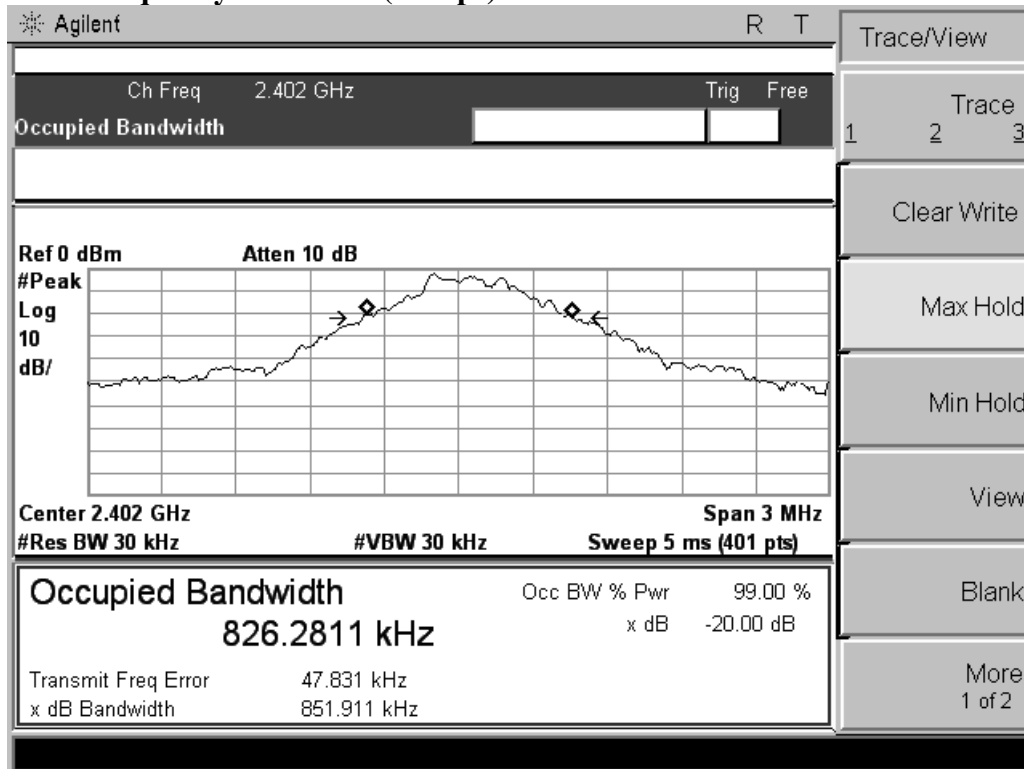


Test frequency: 2441MHz(1Mbps)

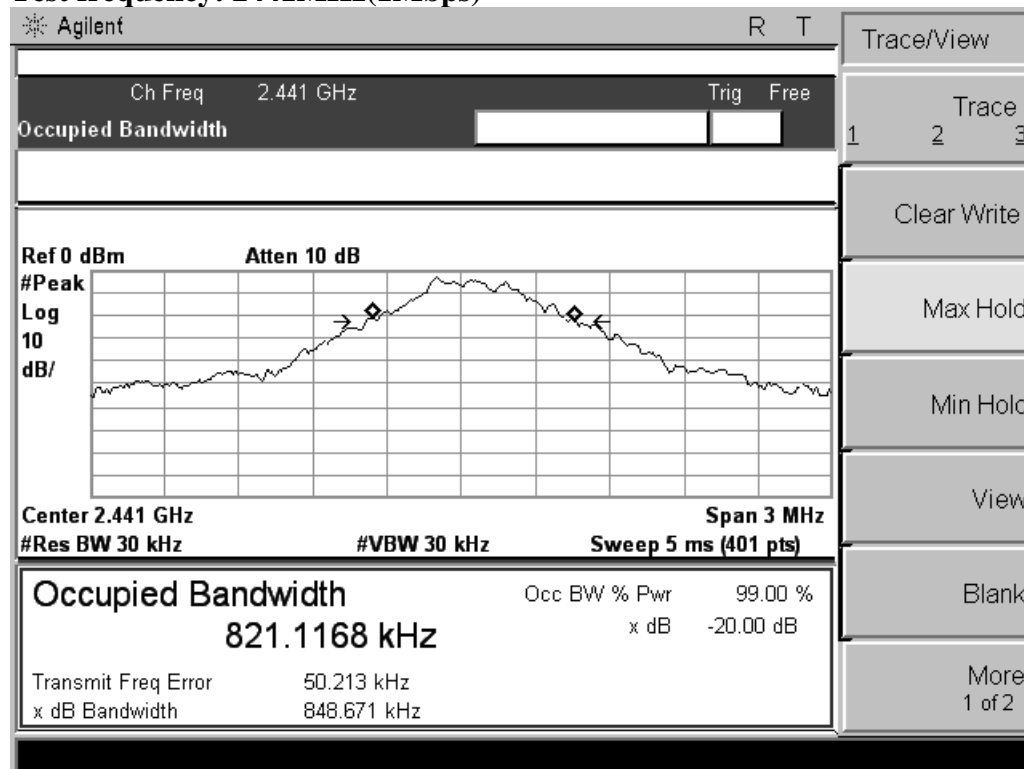


Test frequency: 2480MHz(1Mbps)

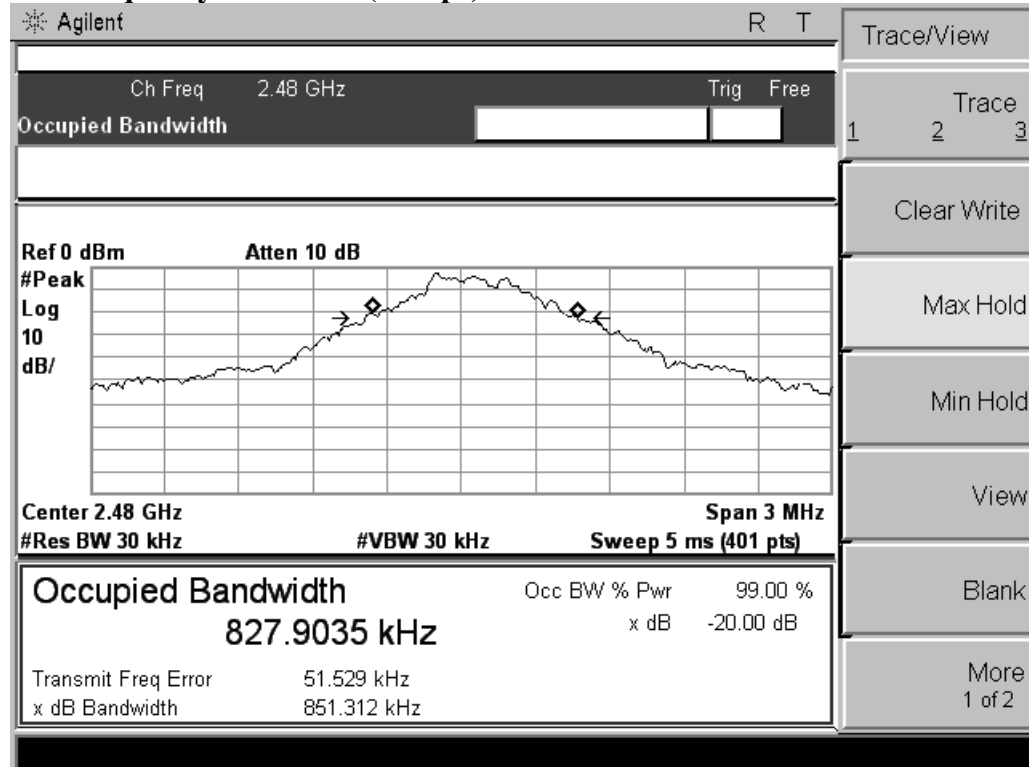


Test frequency: 2402MHz(3Mbps)

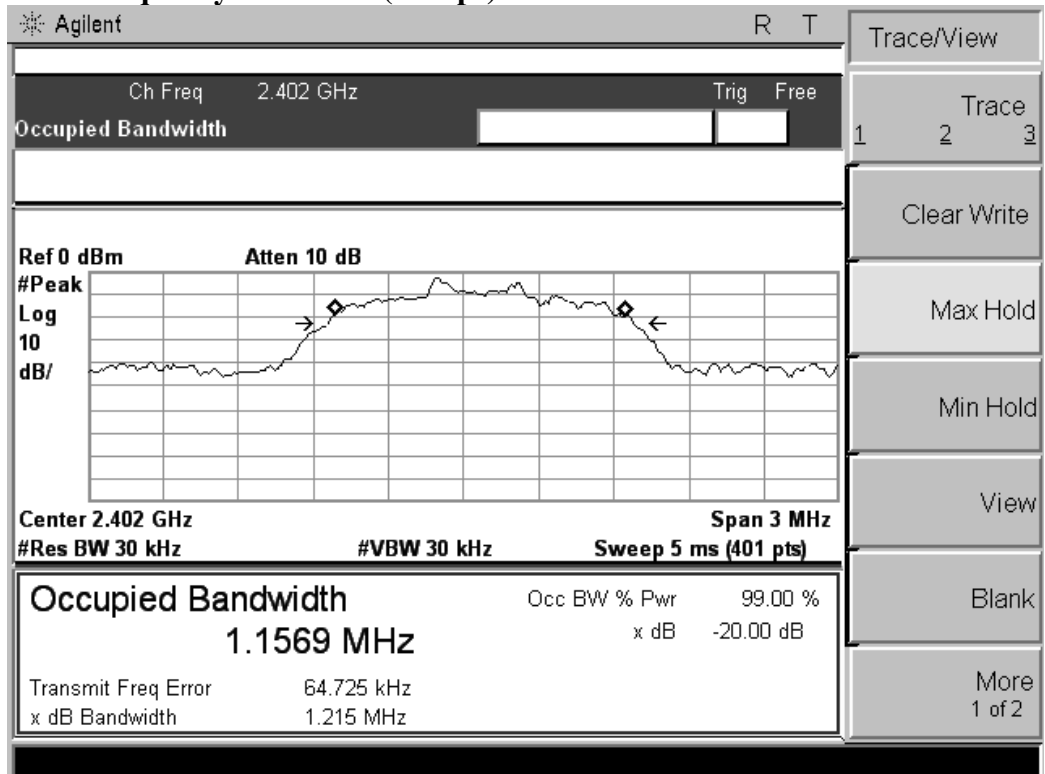

Test frequency: 2441MHz(3Mbps)

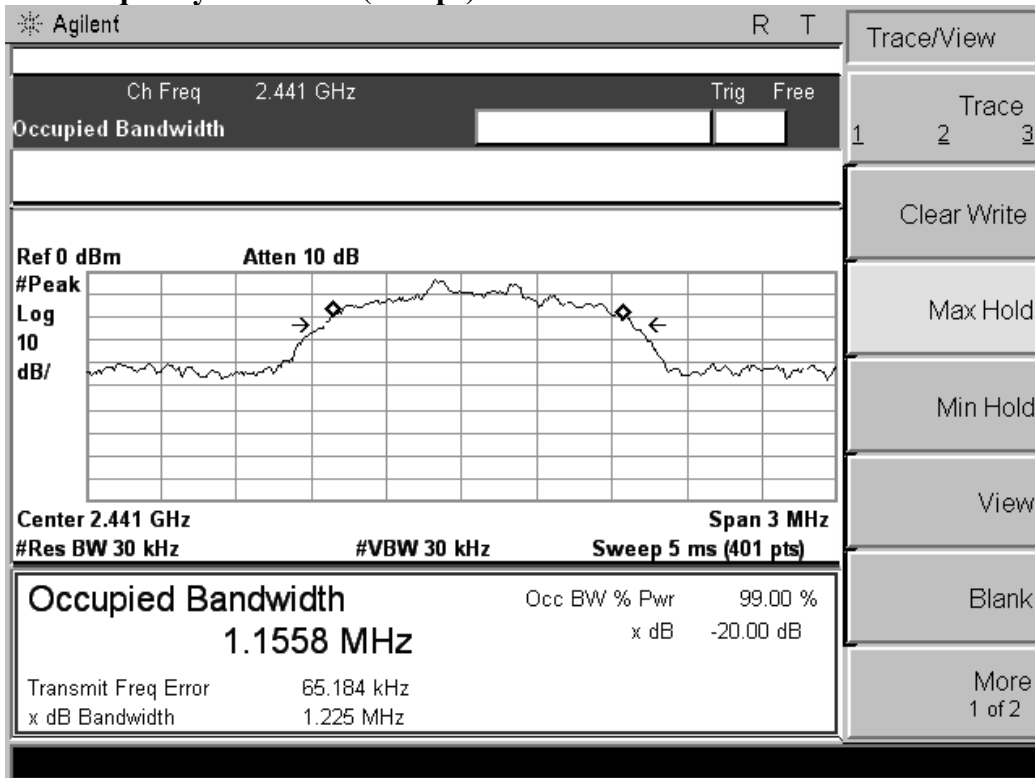

Test frequency: 2480MHz(3Mbps)

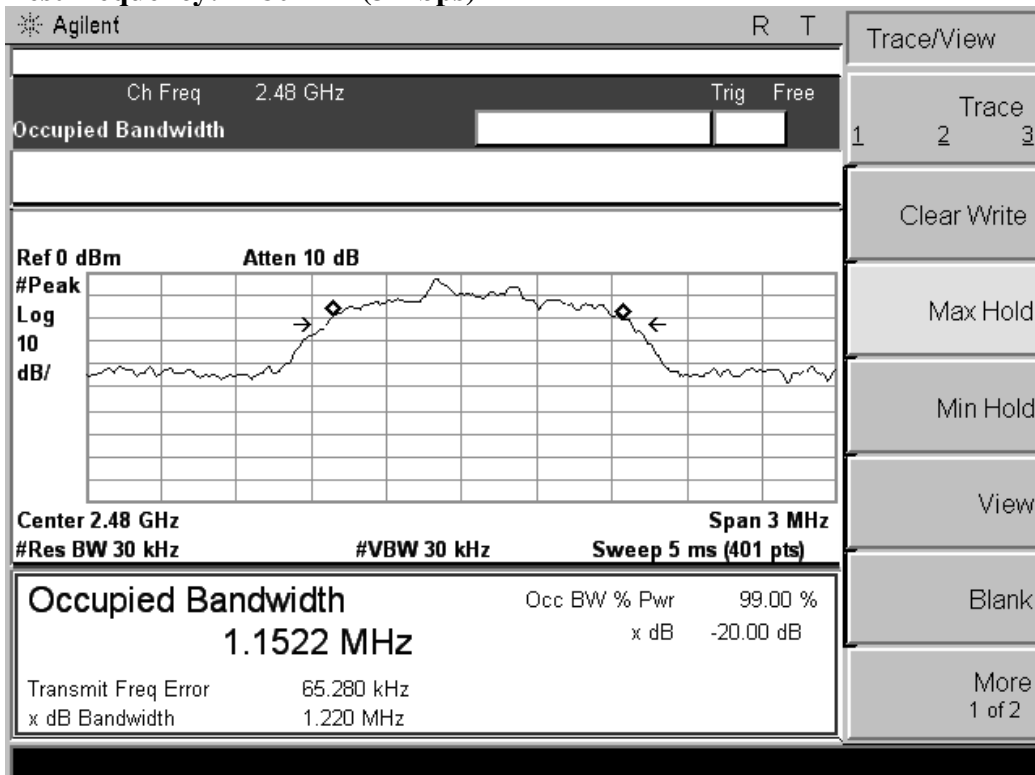

4.3 Number Of Hopping Frequency


4.3.1 Limit

According to §15.247(a)(1)(ii) or A8.1 (d), Frequency hopping systems operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels.

4.3.2 Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Last Cal.
1	Spectrum Analyzer	Agilent	E4407B	MY41440292	2012-06-18	2013-06-17
2	RF Cable	Hubersuhne	Sucoflex104	FP2RX2	2012-06-18	2013-06-17
3	DC Filter	MPE	23872C	N/A	2012-06-18	2013-06-17

4.3.3 Block Diagram of Test Setup

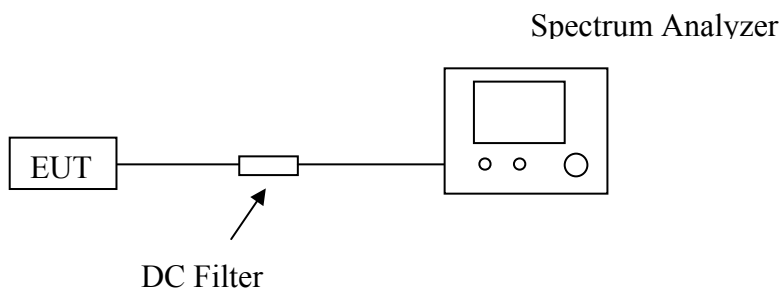

4.3.4 Test Procedure


- A. Place the EUT on the table and set it in transmitting mode.
- B. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.
- C. Set Spectrum Analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = auto.
- D. Set the Spectrum Analyzer as RBW, VBW=1MHz.
- E. Max hold, view and count how many channel in the band.

4.3.5 Test Results


The Measurement Result With The Worst Case of 1Mbps For GFSK Modulation			
Total No. of Hopping Channel	Measurement Result (No. of Ch)	Limit (MHz)	Result
	79	≥15	Pass

The test data refer to the following page.

Test Plot-1 For Number of Hopping Channel

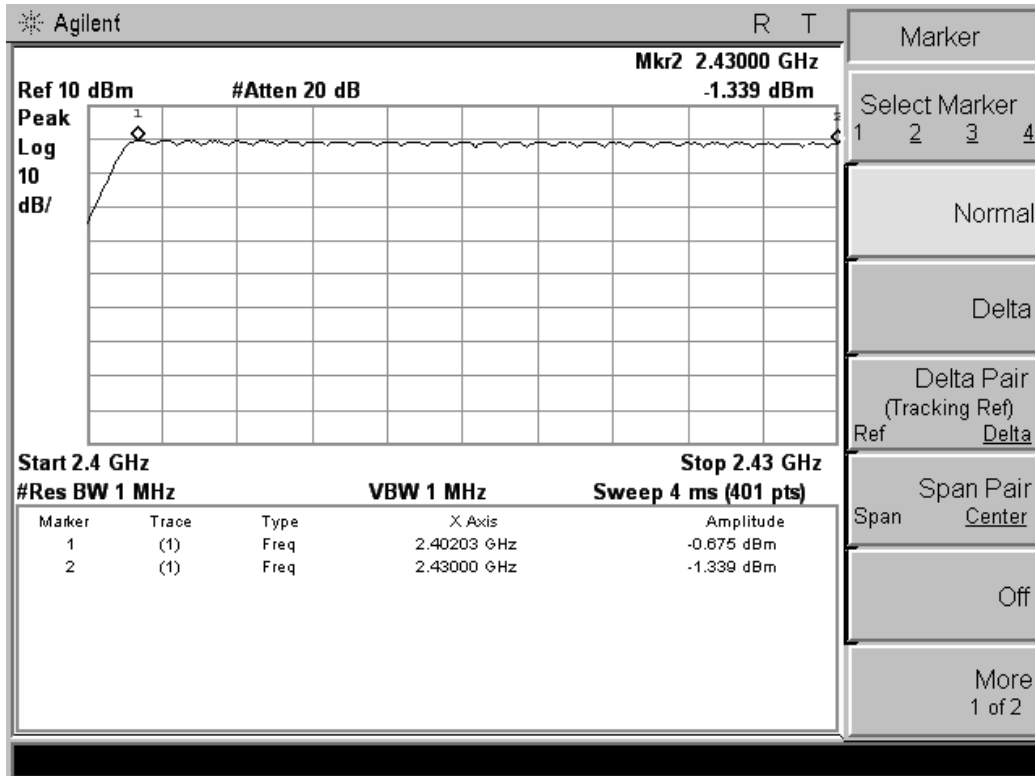

Test Plot-2 For Number of Hopping Channel

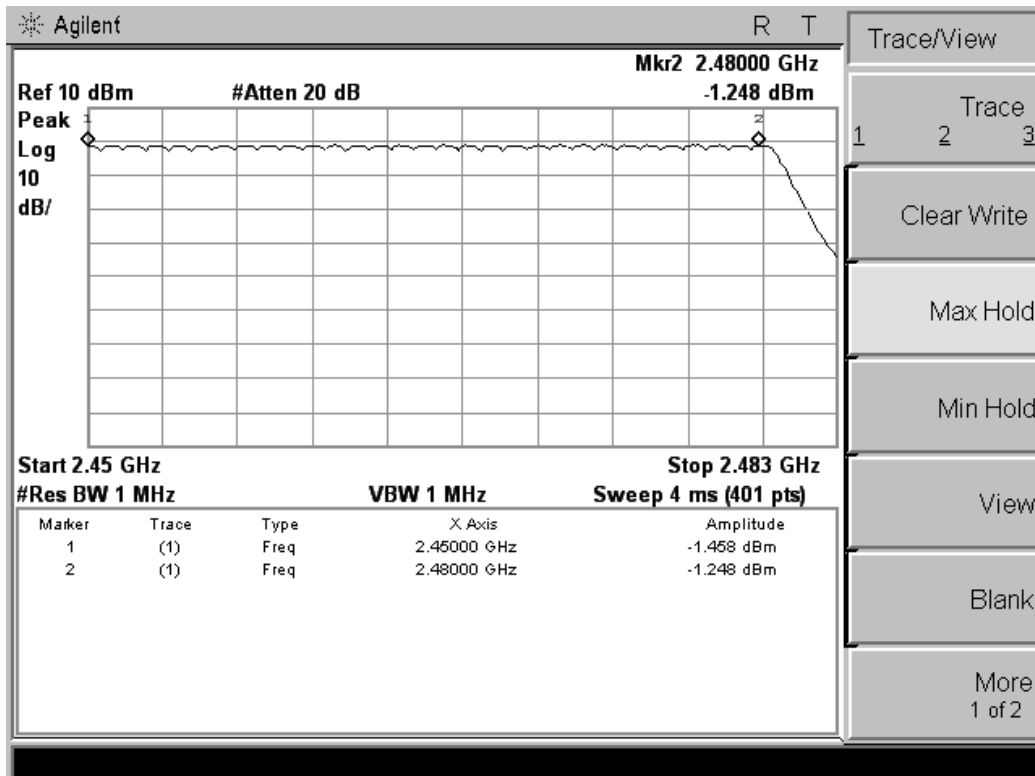

4.4 Time Of Occupancy (Dwell Time)


4.4.1 Limit

According to §15.247(a)(1)(iii) or A8.1 (d), Frequency hopping systems operating in the 2400MHz- 2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

4.4.2 Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1	Spectrum Analyzer	Agilent	E4407B	MY41440292	2012-06-18	2013-06-17
2	RF Cable	Hubersuhne	Sucoflex104	FP2RX2	2012-06-18	2013-06-17
3	DC Filter	MPE	23872C	N/A	2012-06-18	2013-06-17

4.4.3 Block Diagram of Test Setup

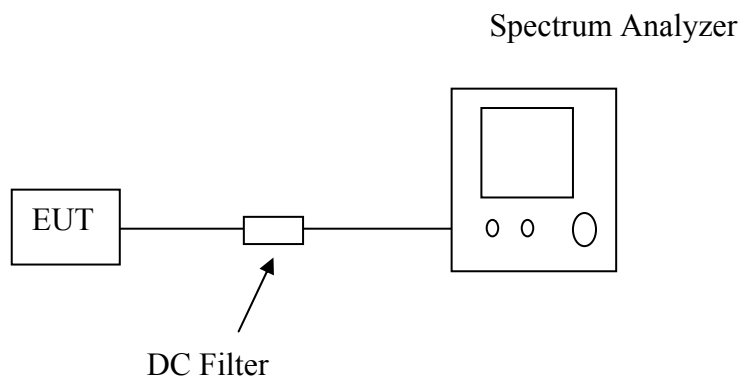

4.4.4 Test Procedure

- A. Place the EUT on the table and set it in transmitting mode.
- B. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.
- C. Set center frequency of Spectrum Analyzer = operating frequency.
- D. Set the Spectrum Analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
- E. Repeat above procedures until all frequency measured were complete.

4.5.5 Test Results

The Measurement Result With The Worst Case of 3Mbps For 8-DPSK Modulation				
Channel	Time of Pulse for DH5 (ms)	Period Time (s)	Sweep Time (ms)	Limit (ms)
Low	2.9	31.6	309.33	400
Middle	2.9	31.6	309.33	400
High	2.9	31.6	309.33	400

Low Channel

$$2.9 * (1600 / 6) / 79 * 31.6 = 309.33 \text{ms}$$

Middle Channel

$$2.9 * (1600 / 6) / 79 * 31.6 = 309.33 \text{ms}$$

High Channel


$$2.9 * (1600 / 6) / 79 * 31.6 = 309.33 \text{ms}$$

The test data refer to the following:


Low Channel



Middle Channel

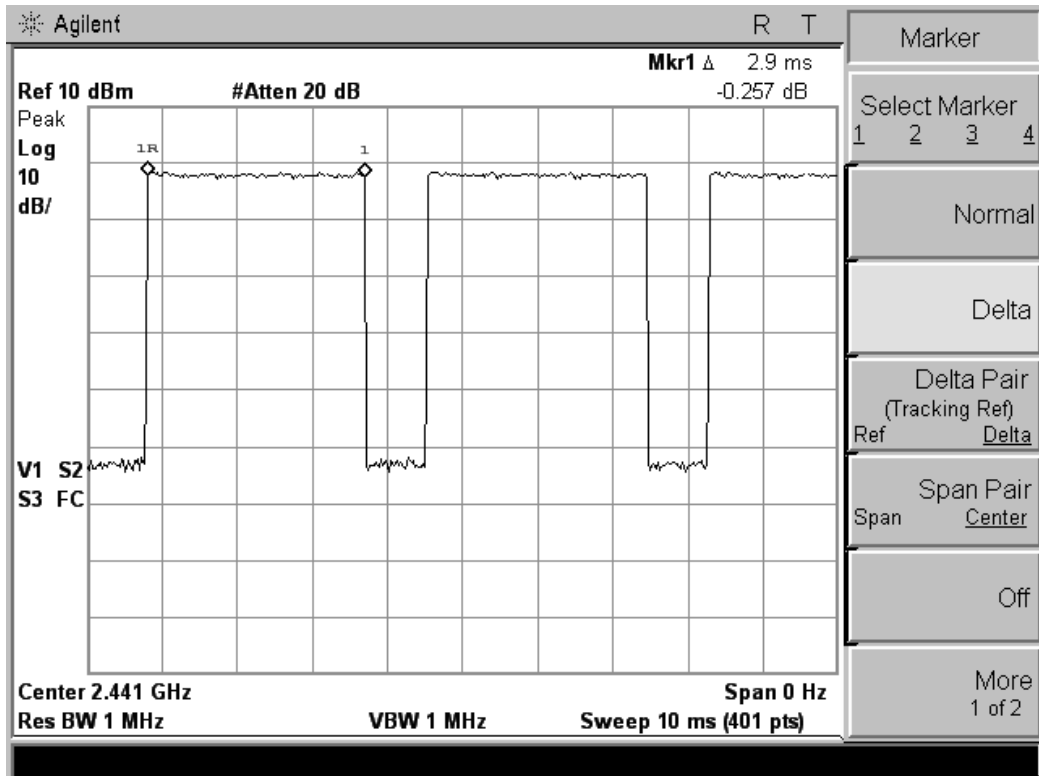

High Channel

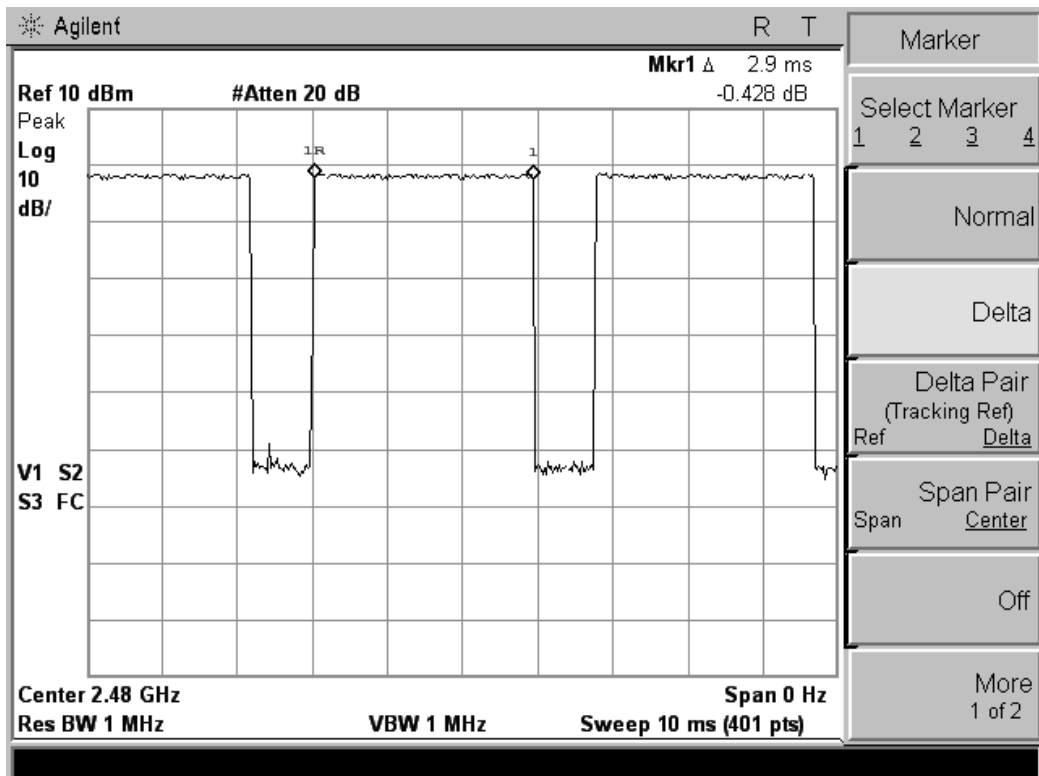

4.5 Spurious Emissions


4.5.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

4.5.2 Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1	Spectrum Analyzer	Agilent	E4407B	MY4144029 2	2012-06-18	2013-06-17
2	RF Cable	Hubersuhne	Sucoflex104	FP2RX2	2012-06-18	2013-06-17
3	DC Filter	MPE	23872C	N/A	2012-06-18	2013-06-17

4.5.3 Block Diagram of Test Setup

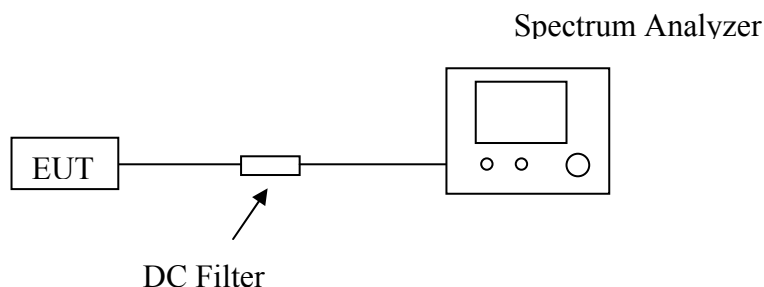

4.5.4 Test Procedure

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 KHz. The video bandwidth is set to 100 KHz.


Measurements are made over the 9kHz to 26.5GHz range with the transmitter set to the lowest, middle, and highest channels

4.5.5 Test Results


No non-compliance noted. Only record the worst test result (TX-GFSK) in this report. The test data refer to the following page.

Test Plot


9KHz-1000MHz Low Channel(GFSK)

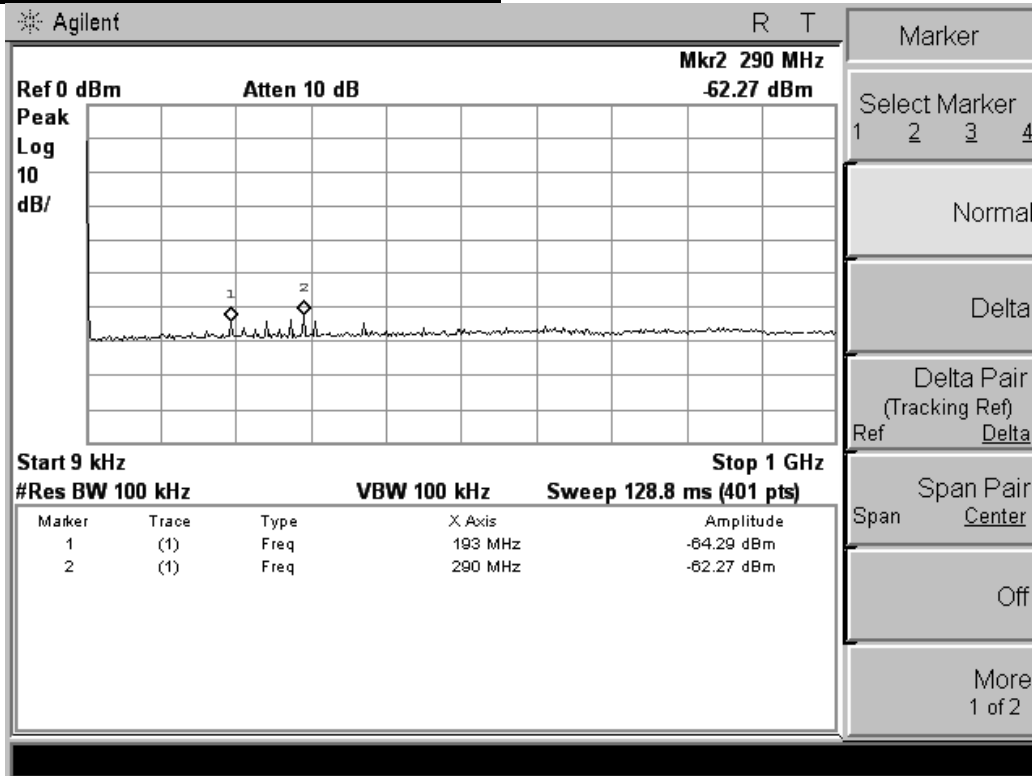


1-26.5GHz Low Channel(GFSK)

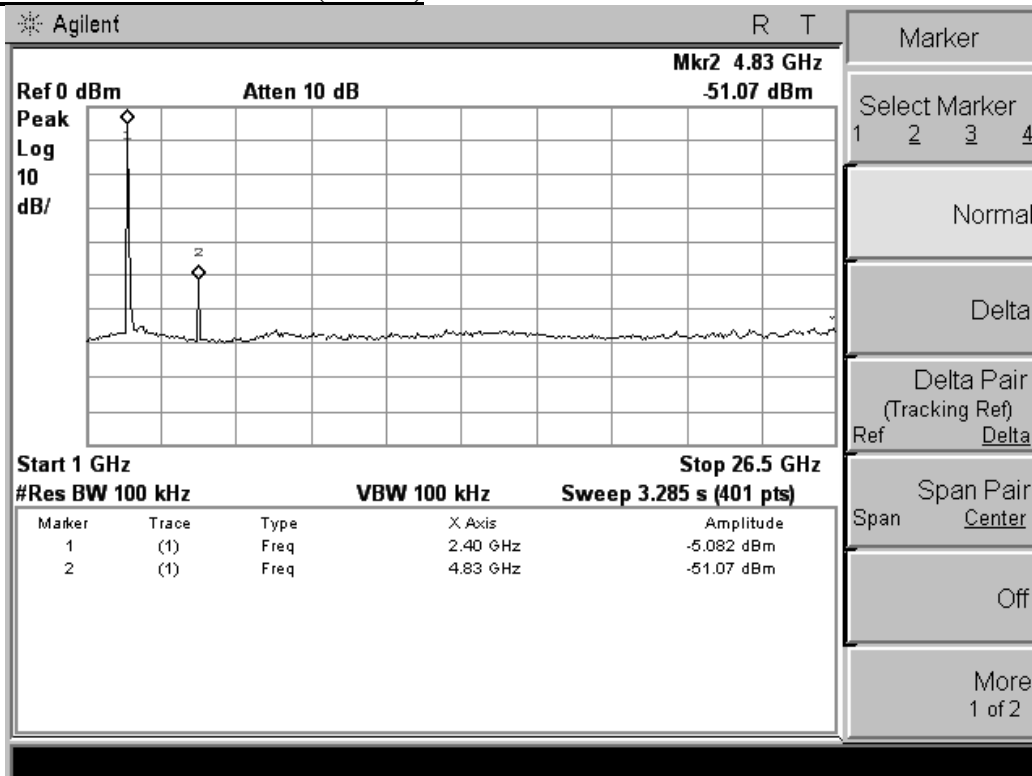


9KHz-1000MHz Middle Channel(GFSK)

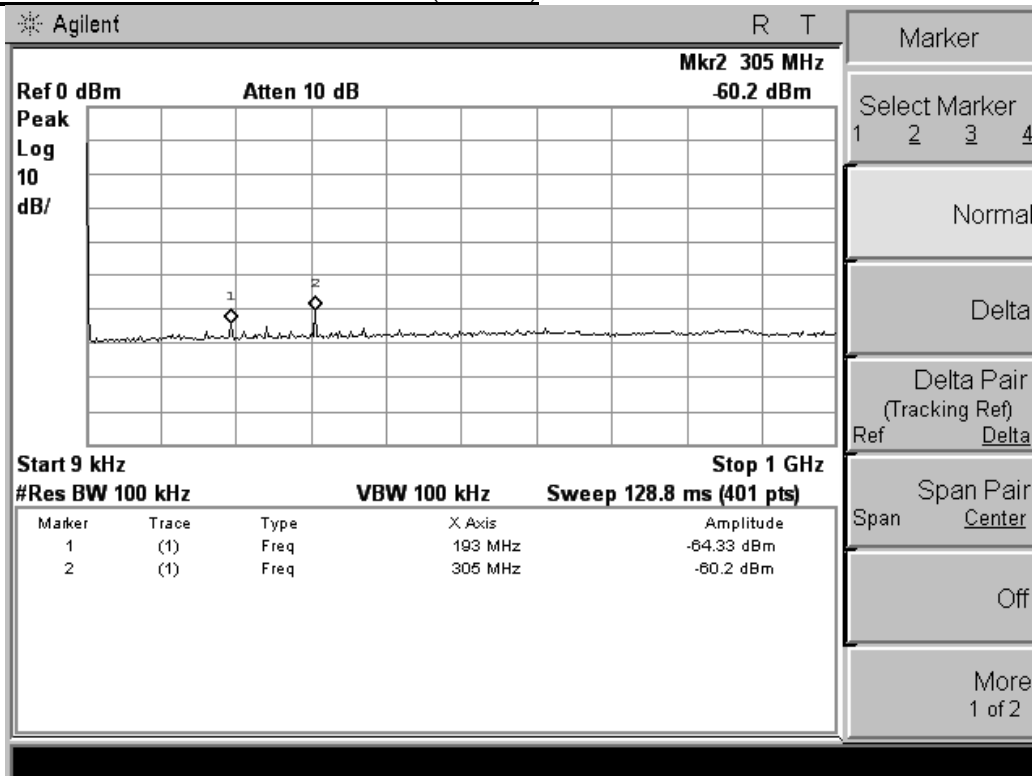


1-26.5GHz Middle Channel(GFSK)

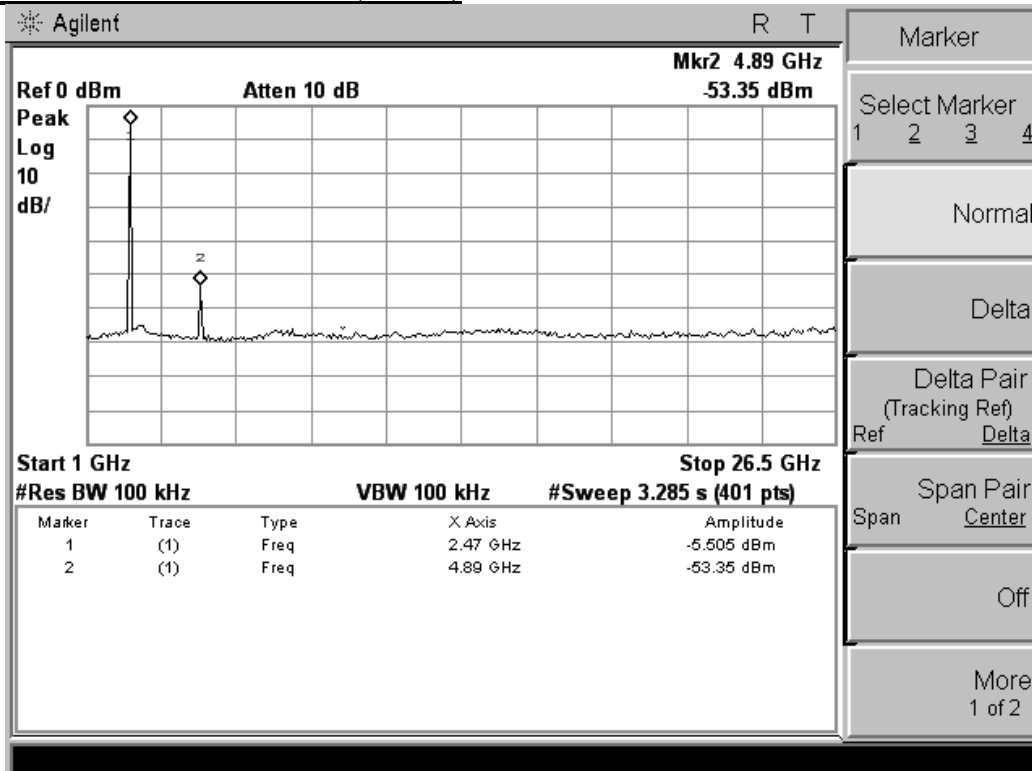

9KHz-1000MHz High Channel(GFSK)

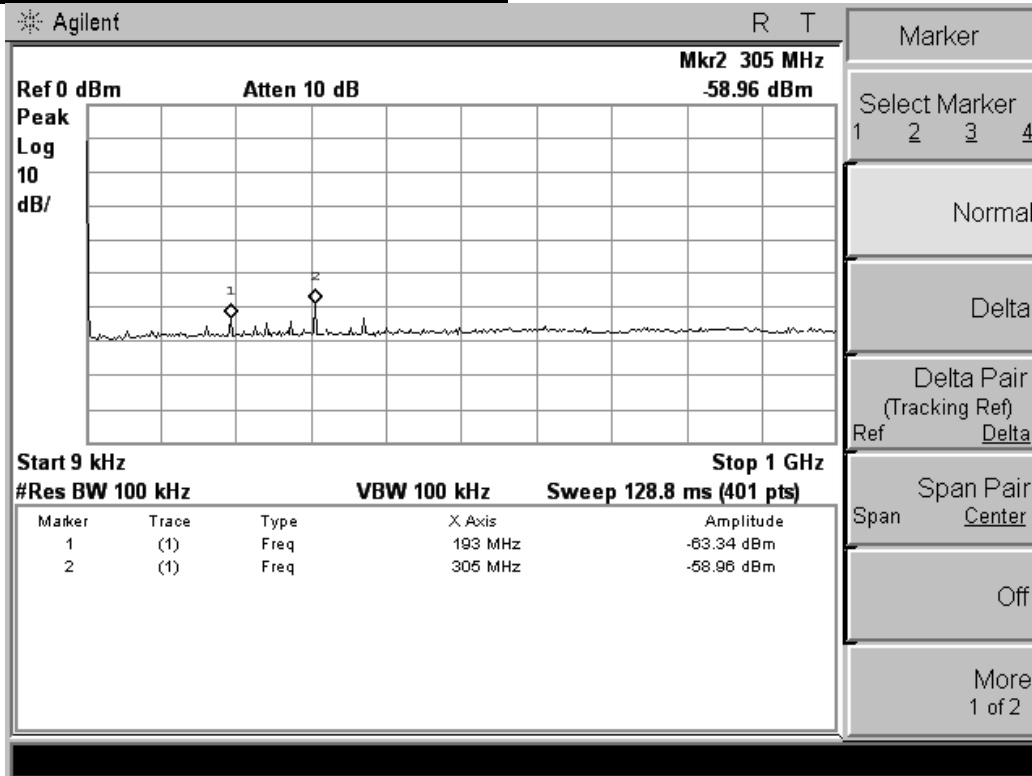

1-26GHz High Channel(GFSK)

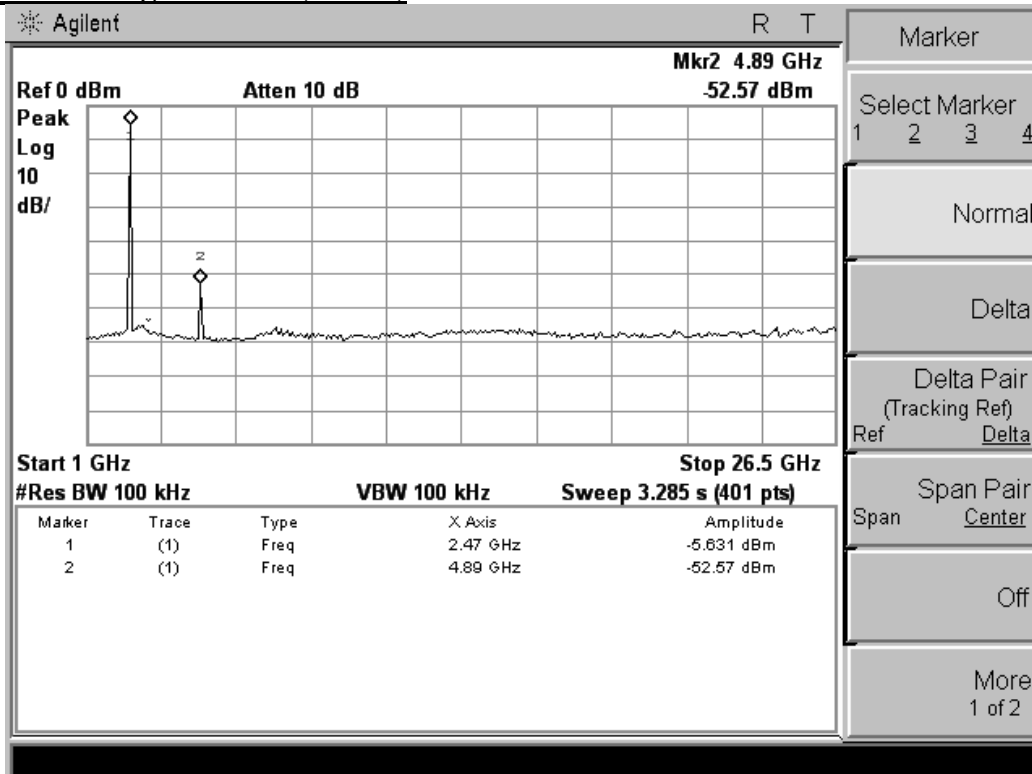


5. RADIATED MEASUREMENT

5.1 Radiated Emission


5.1.1 Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1	Spectrum Analyzer	Agilent	E4407B	MY41440292	2012-06-18	2013-06-17
2	Test Receiver	Rohde & Schwarz	ESCS30	828985/018	2012-06-18	2013-06-17
3	Loop antenna	EMCO	6502	0042963	2012-06-18	2013-06-17
4	Log per Antenna	Schwarzbeck	VULB9163	142	2012-06-18	2013-06-17
5	Horn-antenna	SCHWARZBECK	BBHA9120D	D:266	2012-06-18	2013-06-17
6	DC Filter	MPE	23872C	N/A	2012-06-18	2013-06-17

5.1.2 Block Diagram of Test Setup

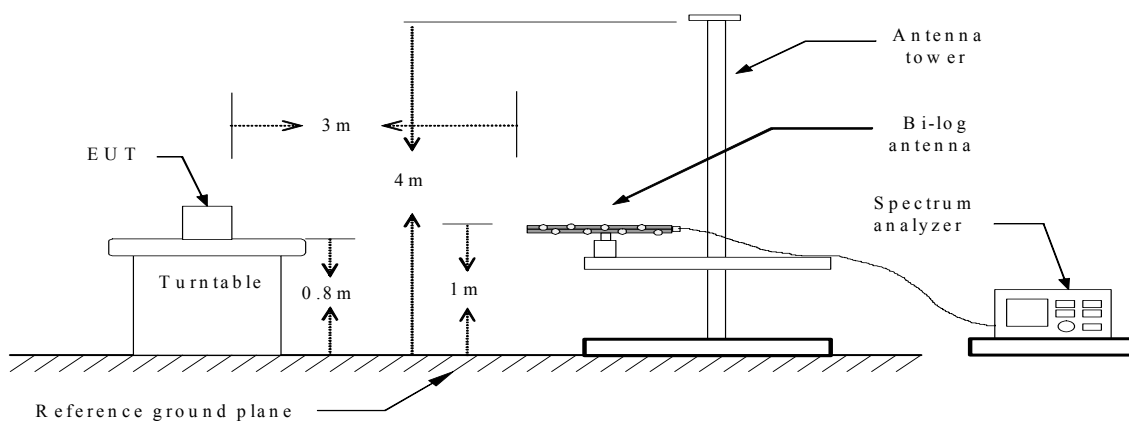

Below 1 GHz

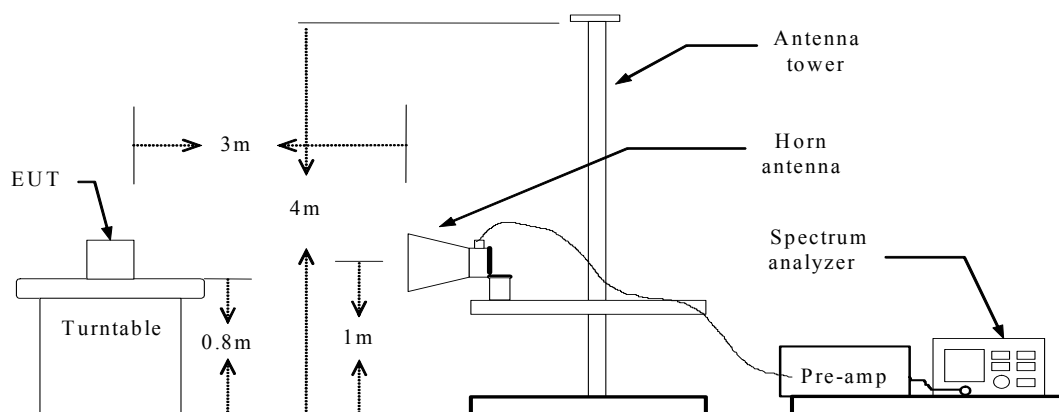

Above 1 GHz

5.1.3 Radiated Emission Limit

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
\1\ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293.	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(\2)
13.36-13.41			

\1\ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

\2\ Above 38.6

Part 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector.

Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

Part 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:


Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100**	3
88–216	150**	3
216–960	200**	3
Above 960	500	3

5.1.4 Test Results

PASS.

*Only record the worst test result in this report.
The test data please refer to following page:*


Below 1GHz

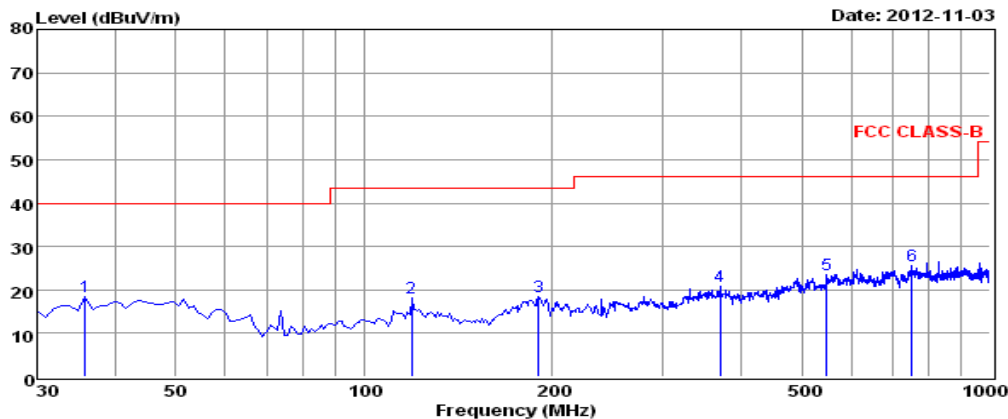

Env. /Ins: 24°C/56%
 EUT: Bluetooth Headset
 M/N: HS-BT102
 Power Rating: DC 3.7V
 Test Mode: TX2402-1Mbps
 Operator: KEN
 Memo:
 pol: VERTICAL

Freq.	Reading	CabLos	AntFac	PreFac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB/m	dB	dBuV/m	dBuV/m	dB	
1	35.82	0.41	12.51	30.13	18.30	40.00	-21.70	QP
2	119.24	0.64	10.61	30.20	18.19	43.50	-25.31	QP
3	190.05	0.86	10.56	30.20	18.30	43.50	-25.20	QP
4	370.47	1.20	14.51	30.11	20.83	46.00	-25.17	QP
5	547.98	1.45	17.48	30.03	23.58	46.00	-22.42	QP
6	750.71	1.79	19.44	30.08	25.58	46.00	-20.42	QP


Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that are 20dB below the official limit are not reported.

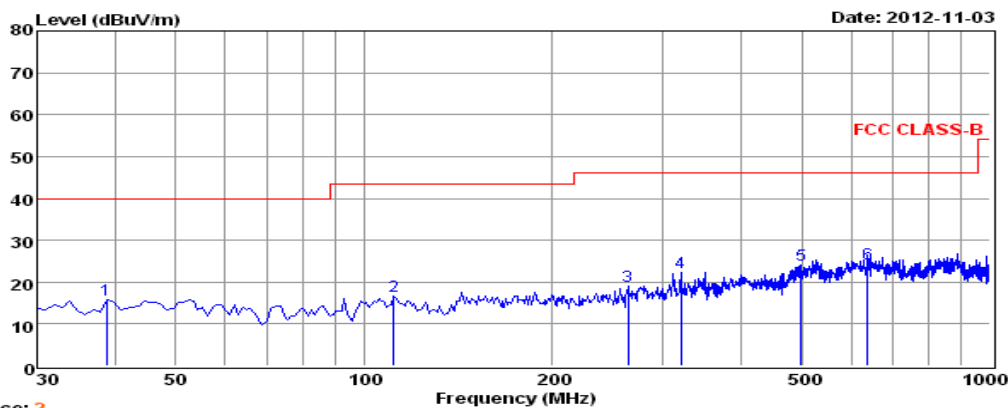

Trace: 2
 Env. /Ins: 24°C/56%
 EUT: Bluetooth Headset
 M/N: HS-BT102
 Power Rating: DC 3.7V
 Test Mode: TX2402-1Mbps
 Operator: KEN
 Memo:
 pol: HORIZONTAL

Freq.	Reading	CabLos	AntFac	PreFac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB/m	dB	dBuV/m	dBuV/m	dB	
1	38.73	0.38	13.25	30.13	15.80	40.00	-24.20	QP
2	111.48	0.61	11.99	30.20	16.64	43.50	-26.86	QP
3	263.77	1.03	12.17	30.17	19.12	46.00	-26.88	QP
4	321.00	1.16	13.37	30.14	22.17	46.00	-23.83	QP
5	499.48	1.34	16.57	30.05	24.13	46.00	-21.87	QP
6	637.22	1.71	18.58	30.02	24.52	46.00	-21.48	QP


Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that are 20dB below the official limit are not reported.

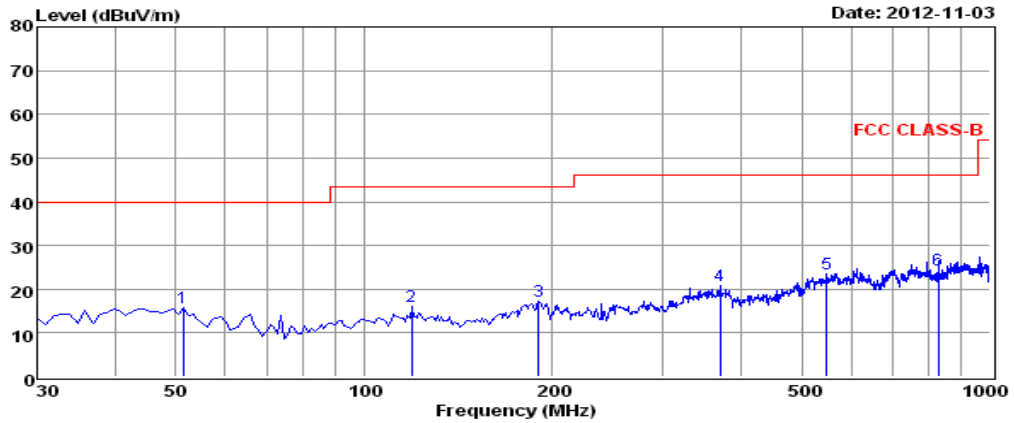

Env. /Ins: 24°C/56%
 EUT: Bluetooth Headset
 M/N: HS-BT102
 Power Rating: DC 3.7V
 Test Mode: TX2441-1Mbps
 Operator: KEN
 Memo:
 pol: VERTICAL

	Freq.	Reading	CabLos	AntFac	PreFac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dB	dBuV/m	dBuV/m	dB	
1	51.34	32.23	0.54	13.19	30.15	15.81	40.00	-24.19	QP
2	119.24	35.14	0.64	10.61	30.20	16.19	43.50	-27.31	QP
3	190.05	36.08	0.86	10.56	30.20	17.30	43.50	-26.20	QP
4	370.47	35.23	1.20	14.51	30.11	20.83	46.00	-25.17	QP
5	547.98	34.68	1.45	17.48	30.03	23.58	46.00	-22.42	QP
6	827.34	32.41	1.80	20.34	30.11	24.44	46.00	-21.56	QP


Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that are 20dB below the official limit are not reported.

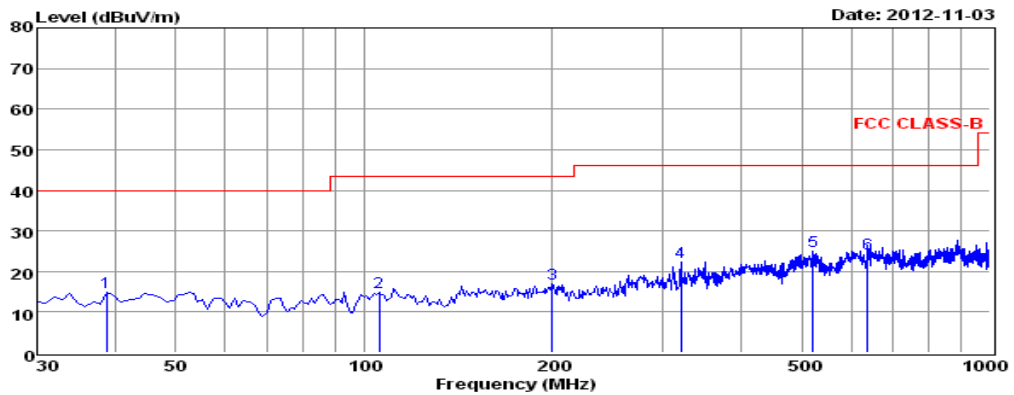

Env. /Ins: 24°C/56%
 EUT: Bluetooth Headset
 M/N: HS-BT102
 Power Rating: DC 3.7V
 Test Mode: TX2441-1Mbps
 Operator: KEN
 Memo:
 pol: HORIZONTAL

	Freq.	Reading	CabLos	AntFac	PreFac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dB	dBuV/m	dBuV/m	dB	
1	38.73	31.30	0.38	13.25	30.13	14.80	40.00	-25.20	QP
2	105.66	31.93	0.61	12.64	30.20	14.98	43.50	-28.52	QP
3	199.75	35.85	0.84	10.57	30.20	17.06	43.50	-26.44	QP
4	321.00	37.78	1.16	13.37	30.14	22.17	46.00	-23.83	QP
5	521.79	36.73	1.31	16.99	30.04	24.99	46.00	-21.01	QP
6	637.22	34.25	1.71	18.58	30.02	24.52	46.00	-21.48	QP


Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that are 20dB below the official limit are not reported.

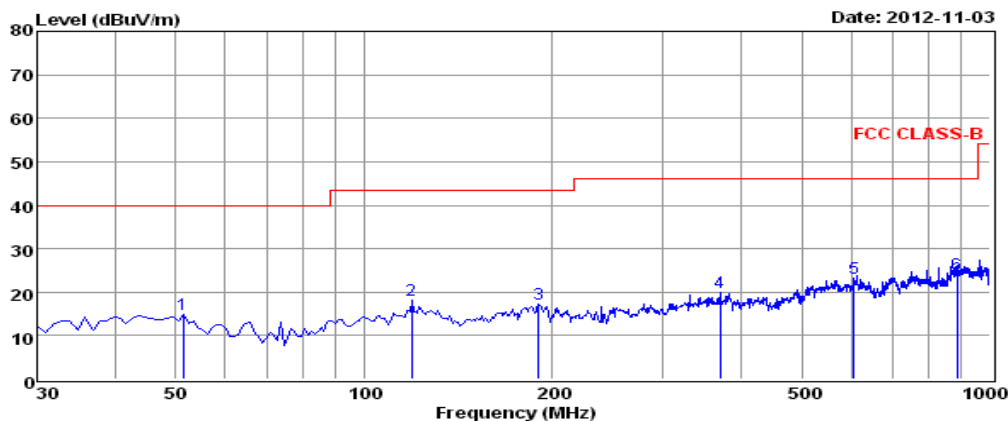

Env. /Ins: 24°C/56%
 EUT: Bluetooth Headset
 M/N: HS-BT102
 Power Rating: DC 3.7V
 Test Mode: TX2480-1Mbps
 Operator: KEN
 Memo:
 pol: VERTICAL

	Freq.	Reading	CabLos	AntFac	PreFac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dB	dBuV/m	dBuV/m	dB	
1	51.34	31.23	0.54	13.19	30.15	14.81	40.00	-25.19	QP
2	119.24	37.14	0.64	10.61	30.20	18.19	43.50	-25.31	QP
3	190.05	36.08	0.86	10.56	30.20	17.30	43.50	-26.20	QP
4	370.47	34.23	1.20	14.51	30.11	19.83	46.00	-26.17	QP
5	606.18	33.15	1.57	18.47	30.00	23.19	46.00	-22.81	QP
6	886.51	31.47	1.87	20.95	30.12	24.17	46.00	-21.83	QP

Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that are 20dB below the official limit are not reported.

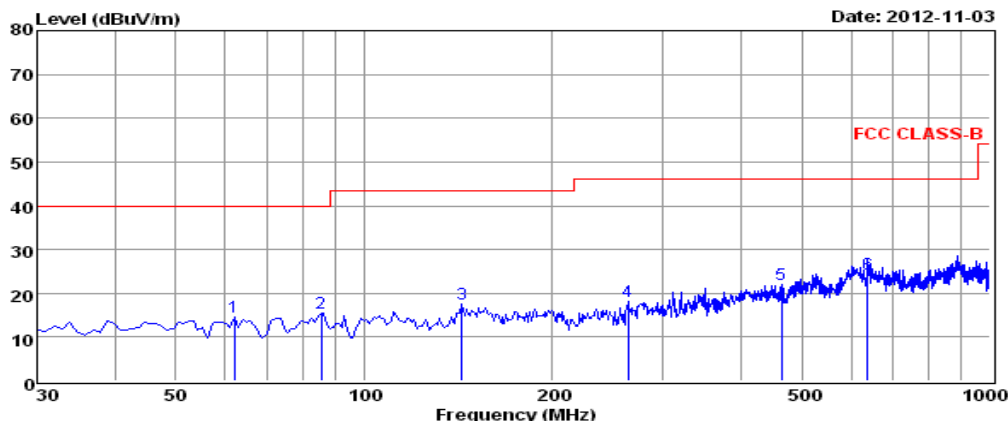


Env. /Ins: 24°C/56%
 EUT: Bluetooth Headset
 M/N: HS-BT102
 Power Rating: DC 3.7V
 Test Mode: TX2480-1Mbps
 Operator: KEN
 Memo:
 pol: HORIZONTAL

	Freq.	Reading	CabLos	AntFac	PreFac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dB	dBuV/m	dBuV/m	dB	
1	62.01	32.29	0.48	11.89	30.16	14.50	40.00	-25.50	QP
2	85.29	34.65	0.47	10.40	30.18	15.34	40.00	-24.66	QP
3	143.49	38.72	0.71	8.21	30.20	17.44	43.50	-26.06	QP
4	263.77	35.09	1.03	12.17	30.17	18.12	46.00	-27.88	QP
5	464.56	35.04	1.36	15.70	30.07	22.03	46.00	-23.97	QP
6	637.22	34.25	1.71	18.58	30.02	24.52	46.00	-21.48	QP

Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that are 20dB below the official limit are not reported.


Above 1GHz

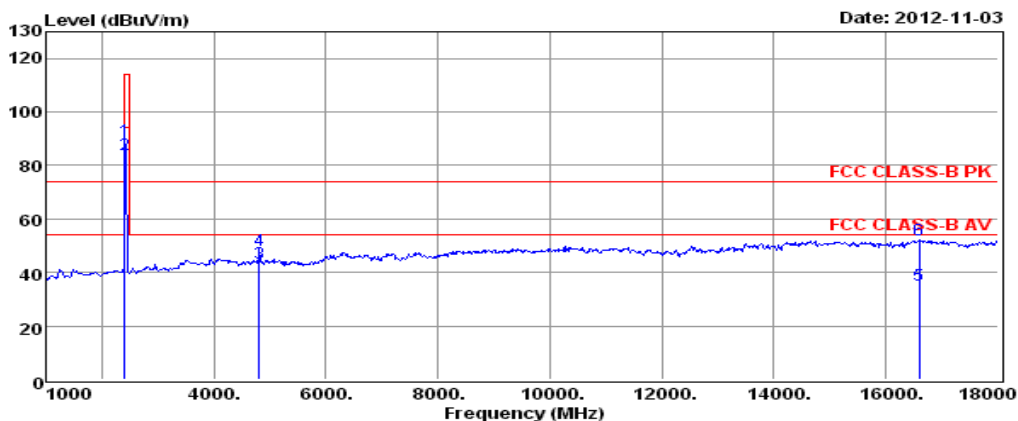

Env. /Ins: 24°C/56%
 EUT: Bluetooth Headset
 M/N: HS-BT102
 Power Rating: DC 3.7V
 Test Mode: TX2402-1Mbps
 Operator: KEN
 Memo:
 pol: HORIZONTAL

Freq.	Reading	CabLos	AntFac	PreFac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB/m	dB	dBuV/m	dBuV/m	dB	
3 4804.78	32.81	7.68	33.31	30.26	43.54	54.00	-10.46	Average
4 4805.00	37.84	7.68	33.31	30.26	48.57	74.00	-25.43	Peak
5 16588.90	15.86	10.88	39.25	30.77	35.22	54.00	-18.78	Average
6 16589.00	32.95	10.88	39.25	30.77	52.31	74.00	-21.69	Peak


Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that are 20dB below the official limit are not reported.

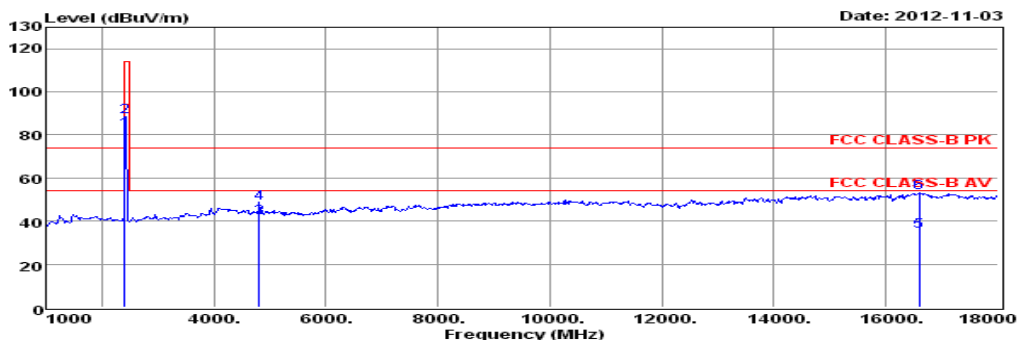

Env. /Ins: 24°C/56%
 EUT: Bluetooth Headset
 M/N: HS-BT102
 Power Rating: DC 3.7V
 Test Mode: TX2402-1Mbps
 Operator: KEN
 Memo:
 pol: VERTICAL

Freq.	Reading	CabLos	AntFac	PreFac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB/m	dB	dBuV/m	dBuV/m	dB	
3 4804.95	30.81	7.68	33.31	30.26	41.54	54.00	-12.46	Average
4 4805.00	37.84	7.68	33.31	30.26	48.57	74.00	-25.43	Peak
5 16588.70	15.92	10.88	39.25	30.77	35.28	54.00	-18.72	Average
6 16589.00	33.95	10.88	39.25	30.77	53.31	74.00	-20.69	Peak


Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that are 20dB below the official limit are not reported.

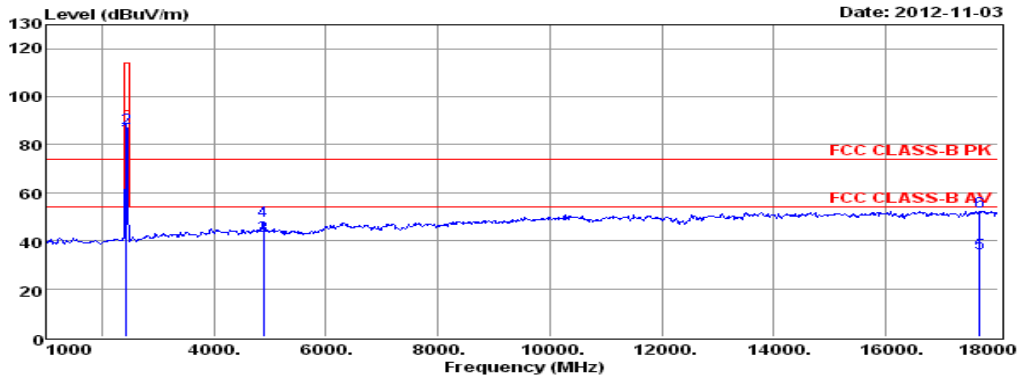

Env. /Ins: 24°C/56%
 EUT: Bluetooth Headset
 M/N: HS-BT102
 Power Rating: DC 3.7V
 Test Mode: TX2441-1Mbps
 Operator: KEN
 Memo:
 pol: HORIZONTAL

Freq.	Reading	CabLos	AntFac	PreFac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB/m	dB	dBuV/m	dBuV/m	dB	
3 4880.97	31.23	7.73	33.50	30.27	42.19	54.00	-11.81	Average
4 4881.00	37.29	7.73	33.50	30.27	48.25	74.00	-25.75	Peak
5 17676.89	12.68	11.20	41.52	30.82	34.58	54.00	-19.42	Average
6 17677.00	30.53	11.20	41.52	30.82	52.43	74.00	-21.57	Peak


Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that are 20dB below the official limit are not reported.

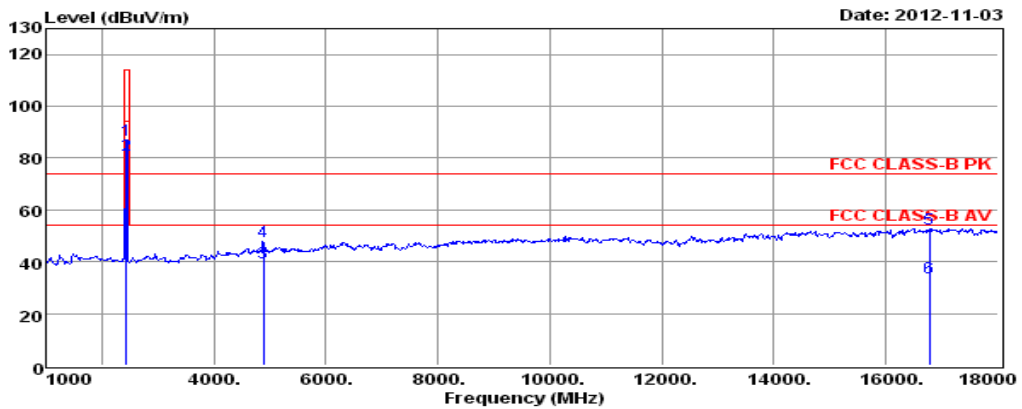

Env. /Ins: 24°C/56%
 EUT: Bluetooth Headset
 M/N: HS-BT102
 Power Rating: DC 3.7V
 Test Mode: TX2441-1Mbps
 Operator: KEN
 Memo:
 pol: VERTICAL

Freq.	Reading	CabLos	AntFac	PreFac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB/m	dB	dBuV/m	dBuV/m	dB	
3 4881.94	28.75	7.73	33.50	30.27	39.71	54.00	-14.29	Average
4 4882.00	36.93	7.73	33.51	30.27	47.90	74.00	-26.10	Peak
5 16776.00	33.06	10.93	39.64	30.78	52.85	74.00	-21.15	Peak
6 16776.53	14.01	10.93	39.64	30.78	33.80	54.00	-20.20	Average


Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that are 20dB below the official limit are not reported.

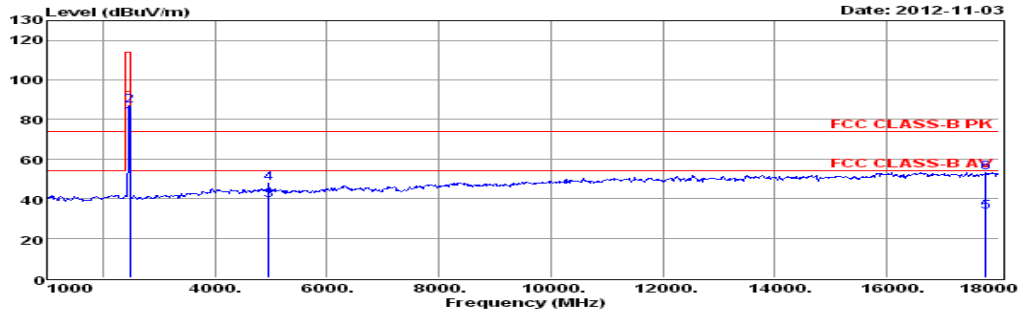

Env. / Ins: 24°C/56%
 EUT: Bluetooth Headset
 M/N: HS-BT102
 Power Rating: DC 3.7V
 Test Mode: TX2480-1Mbps
 Operator: KEN
 Memo:
 pol: HORIZONTAL

	Freq.	Reading	CabLos	AntFac	PreFac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dB	dBuV/m	dBuV/m	dB	
3	4960.89	27.84	7.78	33.70	30.27	39.05	54.00	-14.95	Average
4	4961.00	36.85	7.78	33.70	30.27	48.06	74.00	-25.94	Peak
5	17761.93	11.23	11.23	41.70	30.82	33.34	54.00	-20.66	Average
6	17762.00	31.12	11.23	41.70	30.82	53.23	74.00	-20.77	Peak

Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that are 20dB below the official limit are not reported.

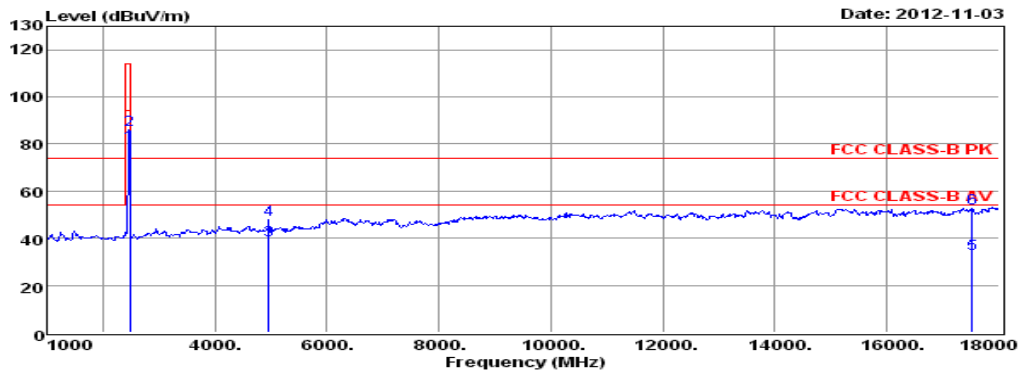

Env. / Ins: 24°C/56%
 EUT: Bluetooth Headset
 M/N: HS-BT102
 Power Rating: DC 3.7V
 Test Mode: TX2480-1Mbps
 Operator: KEN
 Memo:
 pol: VERTICAL

	Freq.	Reading	CabLos	AntFac	PreFac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dB	dBuV/m	dBuV/m	dB	
3	4960.91	27.84	7.78	33.70	30.27	39.05	54.00	-14.95	Average
4	4961.00	36.85	7.78	33.70	30.27	48.06	74.00	-25.94	Peak
5	17523.94	11.76	11.16	41.20	30.81	33.31	54.00	-20.69	Average
6	17524.00	30.94	11.16	41.20	30.81	52.49	74.00	-21.51	Peak

Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that are 20dB below the official limit are not reported.

Notes:

1. Measuring frequencies from 9k~10th harmonic (ex. 26GHz), No emission found between lowest internal used/generated frequency to 30 MHz.
2. Radiated emissions measured in frequency range from 9k~10th harmonic (ex. 26GHz) were made with an instrument using Peak detector mode.
3. 18~25GHz at least have 20dB margin. No recording in the test report.

5.2 Band Edges

5.2.1 Limit

According to §15.247(c) or A8.4 (2), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

5.2.2 Test Equipment

The same as described in section 5.1.1

5.2.3 Block Diagram of Test Setup


The same as described in section 5.1.2

5.2.4 Test Results

PASS

The worst test results as follows:


Band-edge For Low Channel– Hopping On(1Mbps)

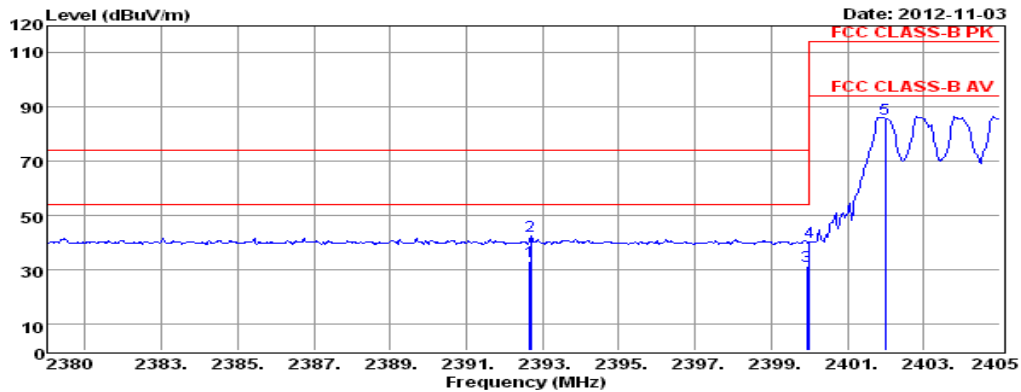

Env. /Ins: 24°C/56%
 EUT: Bluetooth Headset
 M/N: HS-BT102
 Power Rating: DC 3.7V
 Test Mode: Hopping On-1Mbps
 Operator: KEN
 Memo:
 pol: HORIZONTAL

	Freq.	Reading	CabLos	AntFac	PreFac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dB	dBuV/m	dBuV/m	dB	
1	2392.67	30.34	5.05	27.92	30.16	33.15	54.00	-20.85	Average
2	2392.70	39.38	5.05	27.92	30.16	42.19	74.00	-31.81	Peak
3	2399.93	28.21	5.06	27.90	30.16	31.01	54.00	-22.99	Average
4	2400.00	37.25	5.06	27.90	30.16	40.05	74.00	-33.95	Peak
5	2402.00	83.08	5.06	27.89	30.16	85.87	114.00	-28.13	Peak

Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that are 20dB below the official limit are not reported.

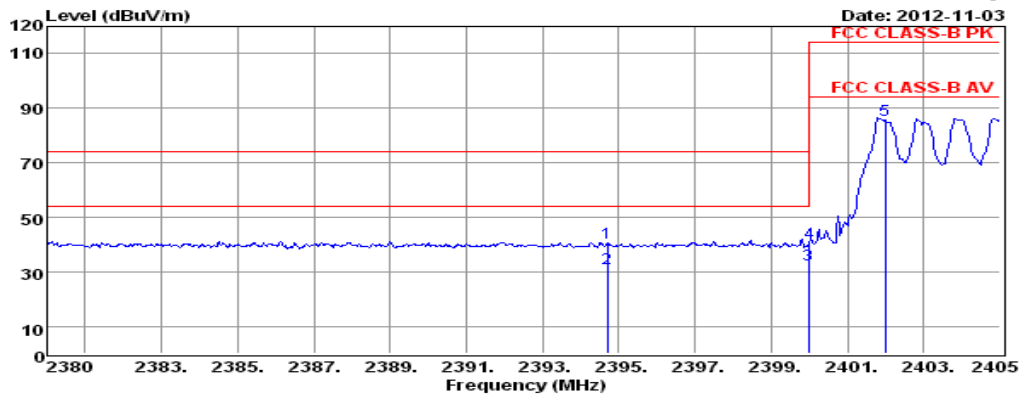


Env. /Ins: 24°C/56%
 EUT: Bluetooth Headset
 M/N: HS-BT102
 Power Rating: DC 3.7V
 Test Mode: Hopping On-1Mbps
 Operator: KEN
 Memo:
 pol: VERTICAL

	Freq.	Reading	CabLos	AntFac	PreFac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dB	dBuV/m	dBuV/m	dB	
1	2394.70	37.71	5.05	27.92	30.16	40.52	74.00	-33.48	Peak
2	2394.71	28.56	5.05	27.92	30.16	31.37	54.00	-22.63	Average
3	2399.97	29.67	5.06	27.90	30.16	32.47	54.00	-21.53	Average
4	2400.00	37.74	5.06	27.90	30.16	40.54	74.00	-33.46	Peak
5	2402.00	83.05	5.06	27.89	30.16	85.84	114.00	-28.16	Peak

Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that are 20dB below the official limit are not reported.


Band-edge For High Channel-Hopping On(1Mbps)

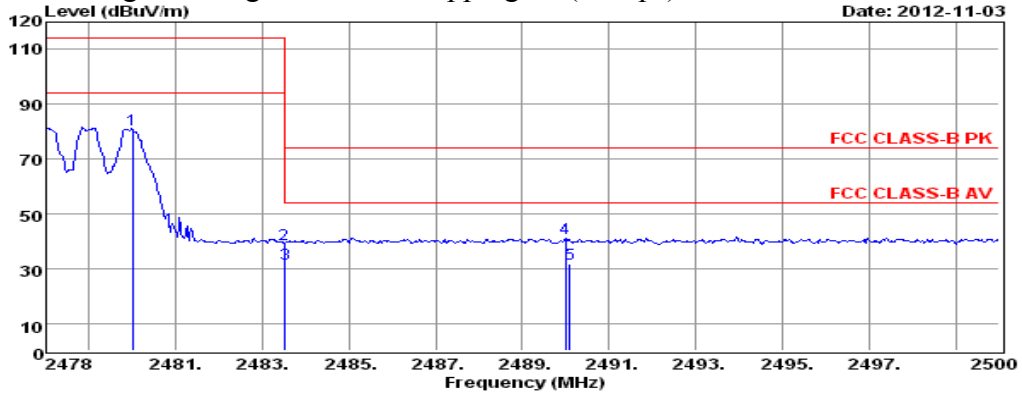

Env. /Ins: 24°C/56%
 EUT: Bluetooth Headset
 M/N: HS-BT102
 Power Rating: DC 3.7V
 Test Mode: Hopping On-1Mbps
 Operator: KEN
 Memo:
 pol: HORIZONTAL

	Freq.	Reading	CabLos	AntFac	PreFac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dB	dBuV/m	dBuV/m	dB	
1	2480.00	77.89	5.17	27.66	30.16	80.56	114.00	-33.44	Peak
2	2483.50	36.19	5.18	27.65	30.16	38.86	74.00	-35.14	Peak
3	2483.51	29.12	5.18	27.65	30.16	31.79	54.00	-22.21	Average
4	2489.99	38.25	5.19	27.63	30.16	40.91	74.00	-33.09	Peak
5	2490.10	29.20	5.19	27.63	30.16	31.86	54.00	-22.14	Average

Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that are 20dB below the official limit are not reported.

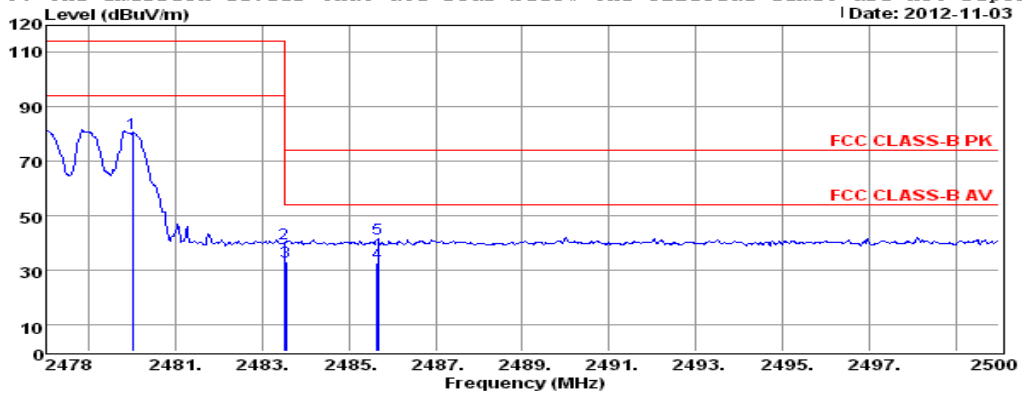


Env. /Ins: 24°C/56%
 EUT: Bluetooth Headset
 M/N: HS-BT102
 Power Rating: DC 3.7V
 Test Mode: Hopping On-1Mbps
 Operator: KEN
 Memo:
 pol: VERTICAL

	Freq.	Reading	CabLos	AntFac	PreFac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dB	dBuV/m	dBuV/m	dB	
1	2480.00	77.60	5.17	27.66	30.16	80.27	114.00	-33.73	Peak
2	2483.50	37.24	5.18	27.65	30.16	39.91	74.00	-34.09	Peak
3	2483.53	30.20	5.18	27.65	30.16	32.87	54.00	-21.13	Average
4	2485.64	29.91	5.18	27.64	30.16	32.57	54.00	-21.43	Average
5	2485.66	38.93	5.18	27.64	30.16	41.59	74.00	-32.41	Peak

Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that are 20dB below the official limit are not reported.


Band-edge For Low Channel- Hopping Off(1Mbps)

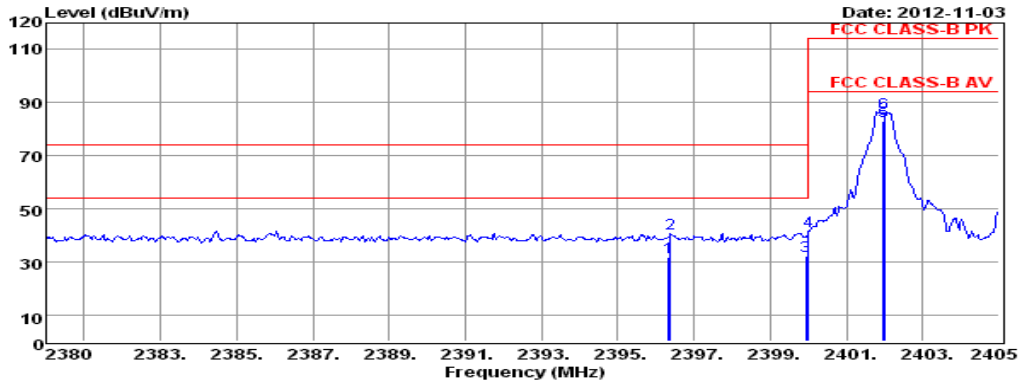

Env. / Ins: 24°C/56%
 EUT: Bluetooth Headset
 M/N: HS-BT102
 Power Rating: DC 3.7V
 Test Mode: TX2402-1Mbps
 Operator: KEN
 Memo:
 pol: HORIZONTAL

	Freq.	Reading	CabLos	AntFac	PreFac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dB	dBuV/m	dBuV/m	dB	
1	2396.34	28.75	5.05	27.91	30.16	31.55	54.00	-22.45	Average
2	2396.38	37.77	5.05	27.91	30.16	40.57	74.00	-33.43	Peak
3	2399.94	29.50	5.06	27.90	30.16	32.30	54.00	-21.70	Average
4	2400.00	38.50	5.06	27.90	30.16	41.30	74.00	-32.70	Peak
5	2401.97	80.25	5.06	27.89	30.16	83.04	94.00	-10.96	Average
6	2402.00	83.22	5.06	27.89	30.16	86.01	114.00	-27.99	Peak

Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that are 20dB below the official limit are not reported.

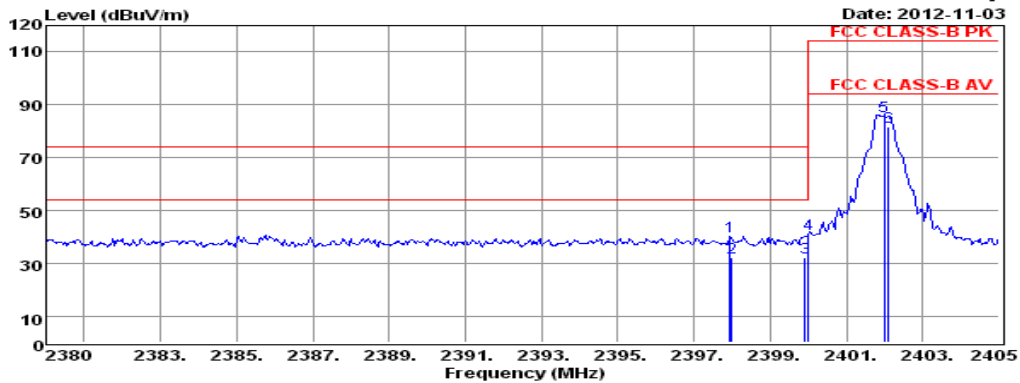


Env. / Ins: 24°C/56%
 EUT: Bluetooth Headset
 M/N: HS-BT102
 Power Rating: DC 3.7V
 Test Mode: TX2402-1Mbps
 Operator: KEN
 Memo:
 pol: VERTICAL

	Freq.	Reading	CabLos	AntFac	PreFac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dB	dBuV/m	dBuV/m	dB	
1	2397.95	37.23	5.06	27.91	30.16	40.04	74.00	-33.96	Peak
2	2397.99	29.18	5.06	27.91	30.16	31.99	54.00	-22.01	Average
3	2399.91	29.41	5.06	27.90	30.16	32.21	54.00	-21.79	Average
4	2400.00	38.45	5.06	27.90	30.16	41.25	74.00	-32.75	Peak
5	2402.00	82.94	5.06	27.89	30.16	85.73	114.00	-28.27	Peak
6	2402.11	78.92	5.06	27.89	30.16	81.71	94.00	-12.29	Average

Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that are 20dB below the official limit are not reported.


Band-edge For High Channel-Hopping Off(1Mbps)

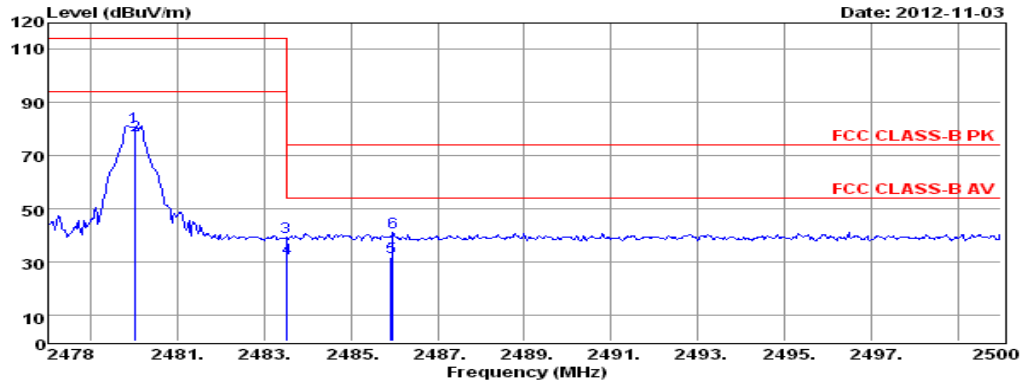

Env. /Ins: 24°C/56%
 EUT: Bluetooth Headset
 M/N: HS-BT102
 Power Rating: DC 3.7V
 Test Mode: TX2480-1Mbps
 Operator: KEN
 Memo:
 pol: HORIZONTAL

	Freq.	Reading	CabLos	AntFac	PreFac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dB	dBuV/m	dBuV/m	dB	
1	2480.00	77.92	5.17	27.66	30.16	80.59	114.00	-33.41	Peak
2	2480.01	75.14	5.17	27.66	30.16	77.81	94.00	-16.19	Average
3	2483.50	36.43	5.18	27.65	30.16	39.10	74.00	-34.90	Peak
4	2483.51	28.39	5.18	27.65	30.16	31.06	54.00	-22.94	Average
5	2485.93	29.19	5.18	27.64	30.16	31.85	54.00	-22.15	Average
6	2485.96	38.22	5.18	27.64	30.16	40.88	74.00	-33.12	Peak

Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that are 20dB below the official limit are not reported.

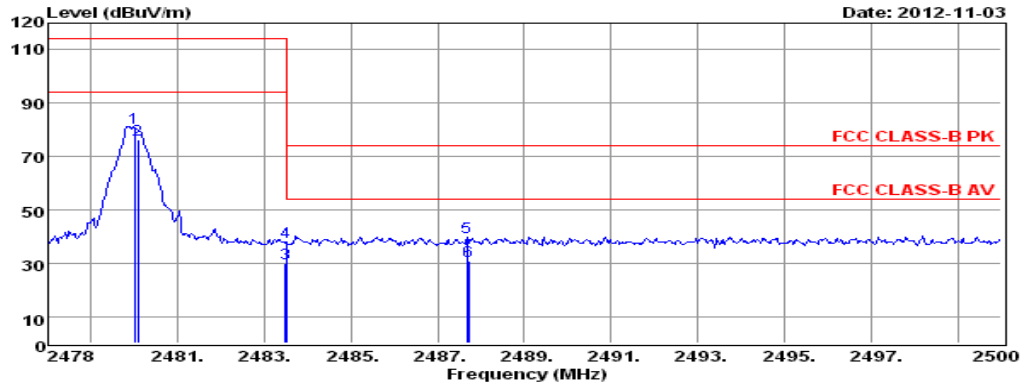


Env. /Ins: 24°C/56%
 EUT: Bluetooth Headset
 M/N: HS-BT102
 Power Rating: DC 3.7V
 Test Mode: TX2480-1Mbps
 Operator: KEN
 Memo:
 pol: VERTICAL

	Freq.	Reading	CabLos	AntFac	PreFac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dB	dBuV/m	dBuV/m	dB	
1	2480.00	77.86	5.17	27.66	30.16	80.53	114.00	-33.47	Peak
2	2480.07	73.61	5.17	27.66	30.16	76.28	94.00	-17.72	Average
3	2483.49	27.10	5.18	27.65	30.16	29.77	94.00	-64.23	Average
4	2483.50	35.19	5.18	27.65	30.16	37.86	74.00	-36.14	Peak
5	2487.68	37.09	5.18	27.64	30.16	39.75	74.00	-34.25	Peak
6	2487.71	28.01	5.18	27.64	30.16	30.67	54.00	-23.33	Average

Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that are 20dB below the official limit are not reported.


Band-edge For Low Channel- Hopping On(3Mbps)

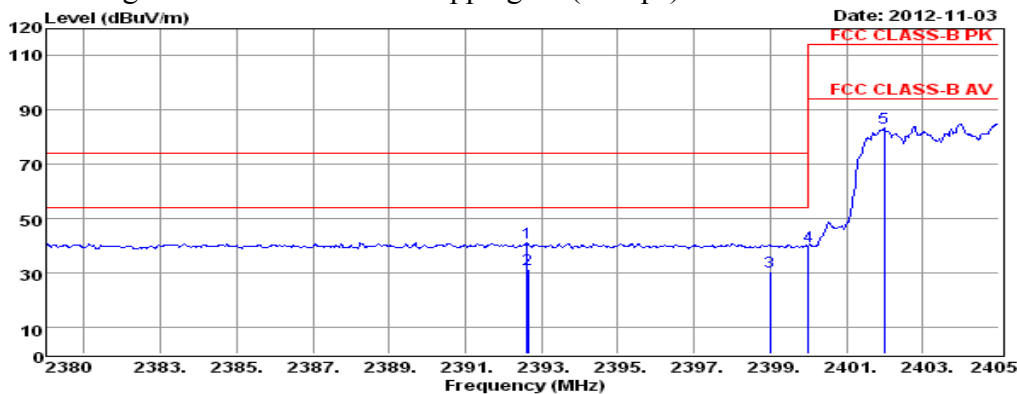

Env. /Ins: 24°C/56%
EUT: Bluetooth Headset
M/N: HS-BT102
Power Rating: DC 3.7V
Test Mode: Hopping On-3Mbps
Operator: KEN
Memo:
pol: HORIZONTAL

	Freq.	Reading	CabLos	AntFac	PreFac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dB	dBuV/m	dBuV/m	dB	
1	2392.63	38.28	5.05	27.92	30.16	41.09	74.00	-32.91	Peak
2	2392.64	28.21	5.05	27.92	30.16	31.02	54.00	-22.98	Average
3	2399.00	27.71	5.06	27.90	30.16	30.51	54.00	-23.49	Average
4	2400.00	36.78	5.06	27.90	30.16	39.58	74.00	-34.42	Peak
5	2402.00	80.78	5.06	27.89	30.16	83.57	114.00	-30.43	Peak

Note: 1. All readings are Quasi-peak values.
2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
3. The emission levels that are 20dB below the official limit are not reported.

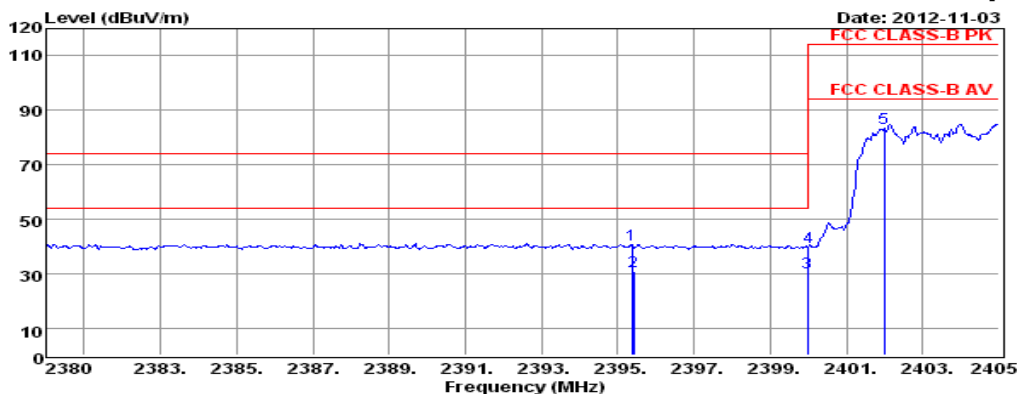


Env. /Ins: 24°C/56%
EUT: Bluetooth Headset
M/N: HS-BT102
Power Rating: DC 3.7V
Test Mode: Hopping On-3Mbps
Operator: KEN
Memo:
pol: VERTICAL

	Freq.	Reading	CabLos	AntFac	PreFac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dB	dBuV/m	dBuV/m	dB	
1	2395.38	43.06	0.00	27.91	30.16	40.81	74.00	-33.19	Peak
2	2395.41	33.01	0.00	27.91	30.16	30.76	54.00	-23.24	Average
3	2399.98	32.77	0.00	27.90	30.16	30.51	54.00	-23.49	Average
4	2400.00	41.84	0.00	27.90	30.16	39.58	74.00	-34.42	Peak
5	2402.00	85.84	0.00	27.89	30.16	83.57	114.00	-30.43	Peak

Note: 1. All readings are Quasi-peak values.
2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
3. The emission levels that are 20dB below the official limit are not reported.


Band-edge For High Channel-Hopping On(3Mbps)

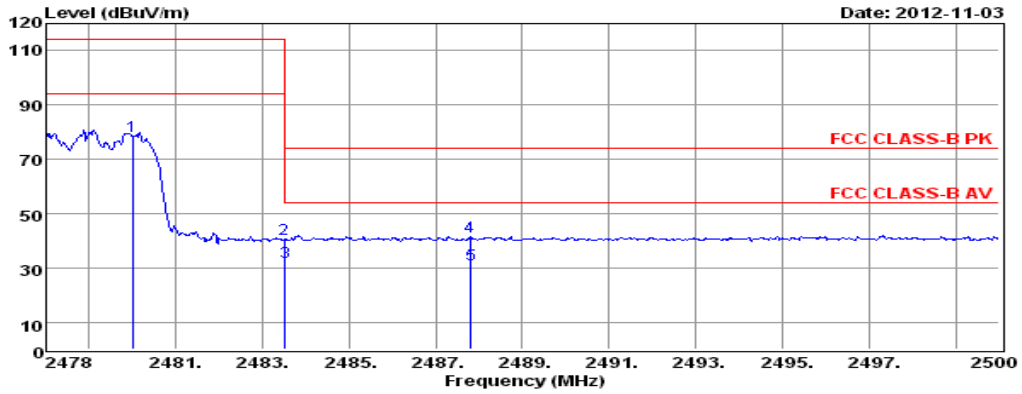

Env. /Ins: 24°C/56%
 EUT: Bluetooth Headset
 M/N: HS-BT102
 Power Rating: DC 3.7V
 Test Mode: Hopping On-3Mbps
 Operator: KEN
 Memo:
 pol: HORIZONTAL

	Freq.	Reading	CabLos	AntFac	PreFac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dB	dBuV/m	dBuV/m	dB	
1	2480.00	75.91	5.17	27.66	30.16	78.58	114.00	-35.42	Peak
2	2483.50	37.74	5.18	27.65	30.16	40.41	74.00	-33.59	Peak
3	2483.51	29.65	5.18	27.65	30.16	32.32	54.00	-21.68	Average
4	2487.79	38.70	5.18	27.64	30.16	41.36	74.00	-32.64	Peak
5	2487.81	28.67	5.18	27.64	30.16	31.33	54.00	-22.67	Average

Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that are 20dB below the official limit are not reported.

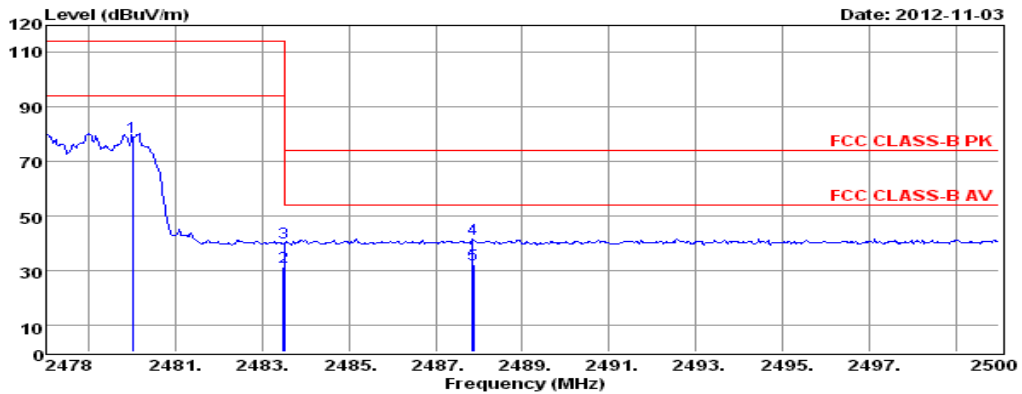


Env. /Ins: 24°C/56%
 EUT: Bluetooth Headset
 M/N: HS-BT102
 Power Rating: DC 3.7V
 Test Mode: Hopping On-3Mbps
 Operator: KEN
 Memo:
 pol: VERTICAL

	Freq.	Reading	CabLos	AntFac	PreFac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dB	dBuV/m	dBuV/m	dB	
1	2480.00	76.36	5.17	27.66	30.16	79.03	114.00	-34.97	Peak
2	2483.49	28.42	5.18	27.65	30.16	31.09	94.00	-62.91	Average
3	2483.50	37.46	5.18	27.65	30.16	40.13	74.00	-33.87	Peak
4	2487.86	38.79	5.18	27.64	30.16	41.45	74.00	-32.55	Peak
5	2487.87	29.66	5.18	27.64	30.16	32.32	54.00	-21.68	Average

Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that are 20dB below the official limit are not reported.


Band-edge For Low Channel- Hopping Off(3Mbps)

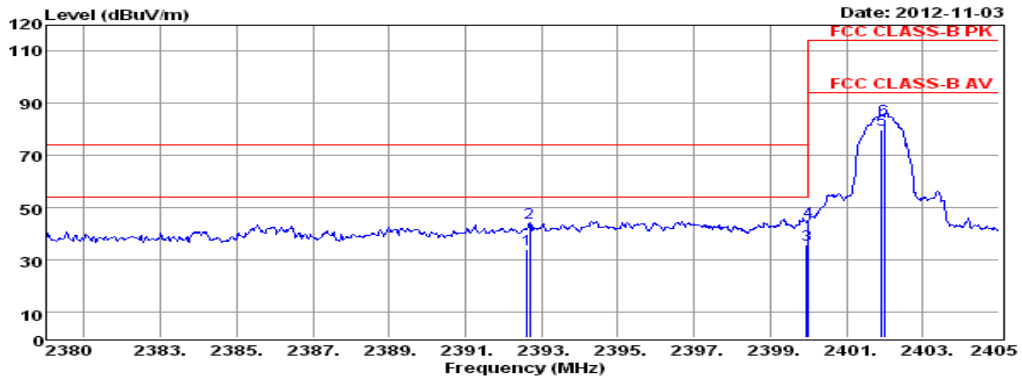

Env. /Ins: 24°C/56%
 EUT: Bluetooth Headset
 M/N: HS-BT102
 Power Rating: DC 3.7V
 Test Mode: TX2402-3Mbps
 Operator: KEN
 Memo:
 pol: HORIZONTAL

	Freq.	Reading	CabLos	AntFac	PreFac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dB	dBuV/m	dBuV/m	dB	
1	2392.63	31.23	5.05	27.92	30.16	34.04	54.00	-19.96	Average
2	2392.70	41.21	5.05	27.92	30.16	44.02	74.00	-29.98	Peak
3	2399.96	32.74	5.06	27.90	30.16	35.54	54.00	-18.46	Average
4	2400.00	41.78	5.06	27.90	30.16	44.58	74.00	-29.42	Peak
5	2401.93	76.96	5.06	27.89	30.16	79.75	94.00	-14.25	Average
6	2402.00	81.02	5.06	27.89	30.16	83.81	114.00	-30.19	Peak

Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that are 20dB below the official limit are not reported.

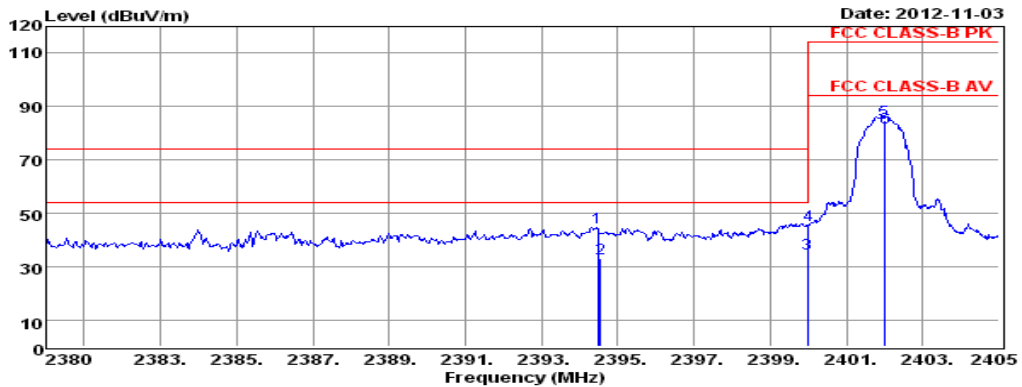


Env. /Ins: 24°C/56%
 EUT: Bluetooth Headset
 M/N: HS-BT102
 Power Rating: DC 3.7V
 Test Mode: TX2402-3Mbps
 Operator: KEN
 Memo:
 pol: VERTICAL

	Freq.	Reading	CabLos	AntFac	PreFac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dB	dBuV/m	dBuV/m	dB	
1	2394.48	41.94	5.05	27.92	30.16	44.75	74.00	-29.25	Peak
2	2394.55	30.35	5.05	27.92	30.16	33.16	54.00	-20.84	Average
3	2399.97	31.79	5.06	27.90	30.16	34.59	54.00	-19.41	Average
4	2400.00	42.78	5.06	27.90	30.16	45.58	74.00	-28.42	Peak
5	2402.00	82.02	5.06	27.89	30.16	84.81	114.00	-29.19	Peak
6	2402.02	79.12	5.06	27.89	30.16	81.91	94.00	-12.09	Average

Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that are 20dB below the official limit are not reported.


Band-edge For High Channel-Hopping Off(3Mbps)

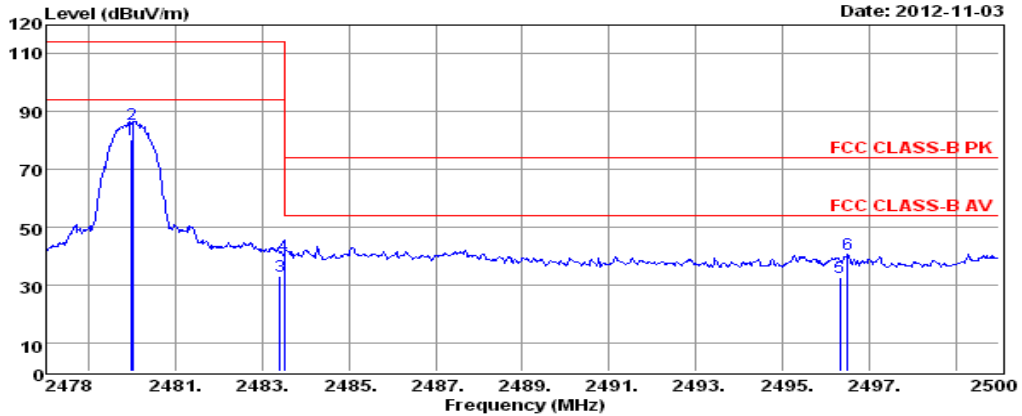

Env. /Ins: 24°C/56%
 EUT: Bluetooth Headset
 M/N: HS-BT102
 Power Rating: DC 3.7V
 Test Mode: TX2480-3Mbps
 Operator: KEN
 Memo:
 pol: HORIZONTAL

	Freq.	Reading	CabLos	AntFac	PreFac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dB	dBuV/m	dBuV/m	dB	
1	2479.95	77.81	5.17	27.66	30.16	80.48	94.00	-13.52	Average
2	2480.00	82.88	5.17	27.66	30.16	85.55	114.00	-28.45	Peak
3	2483.41	30.56	5.18	27.65	30.16	33.23	94.00	-60.77	Average
4	2483.50	37.54	5.18	27.65	30.16	40.21	74.00	-33.79	Peak
5	2496.33	29.91	5.19	27.61	30.16	32.55	54.00	-21.45	Average
6	2496.50	37.93	5.20	27.61	30.16	40.58	74.00	-33.42	Peak

Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that are 20dB below the official limit are not reported.

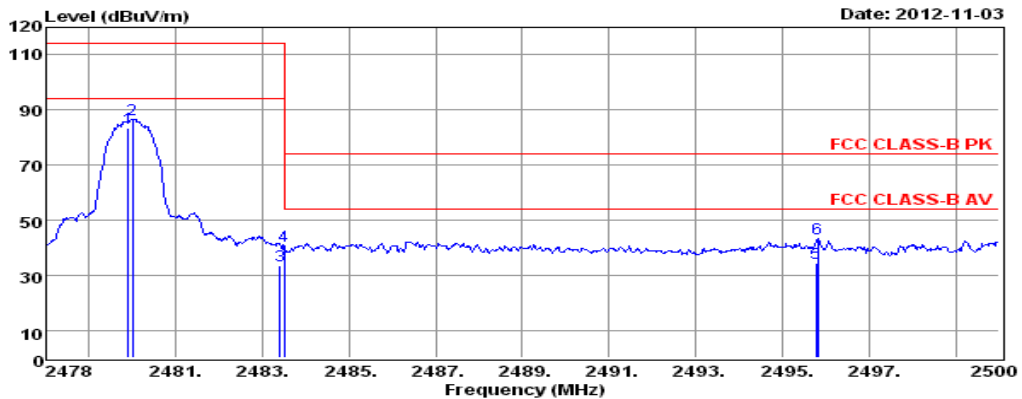

Env. /Ins: 24°C/56%
 EUT: Bluetooth Headset
 M/N: HS-BT102
 Power Rating: DC 3.7V
 Test Mode: TX2480-3Mbps
 Operator: KEN
 Memo:
 pol: VERTICAL

	Freq.	Reading	CabLos	AntFac	PreFac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dB	dBuV/m	dBuV/m	dB	
1	2479.89	80.81	5.17	27.66	30.16	83.48	94.00	-10.52	Average
2	2480.00	83.85	5.17	27.66	30.16	86.52	114.00	-27.48	Peak
3	2483.41	30.91	5.18	27.65	30.16	33.58	94.00	-60.42	Average
4	2483.50	37.95	5.18	27.65	30.16	40.62	74.00	-33.38	Peak
5	2495.77	31.69	5.19	27.61	30.16	34.33	54.00	-19.67	Average
6	2495.82	40.73	5.19	27.61	30.16	43.37	74.00	-30.63	Peak

Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that are 20dB below the official limit are not reported.

6. LINE CONDUCTED EMISSIONS

6.1 Standard Applicable


According to §15.207 (a) or RSS-GEN: For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolt (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

Frequency Range(MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

6.2 Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1	Test Receiver	Manufacturer	ESCS30	828985/018	2012-06-18	2013-06-17
2	L.I.S.N	Rohde & Schwarz	ESH2-Z5	834549/005	2012-06-18	2013-06-17
3	50 Ω Coaxial Switch	Rohde & Schwarz	MP59B	M20531	2012-06-18	2013-06-17
4	Pulse Limiter	Anritsu	ESH3-Z2	100006	2012-06-18	2013-06-17
5	Voltage Probe	Rohde & Schwarz	TK9416	N/A	2012-06-18	2013-06-17


6.3 Block Diagram of Test Setup

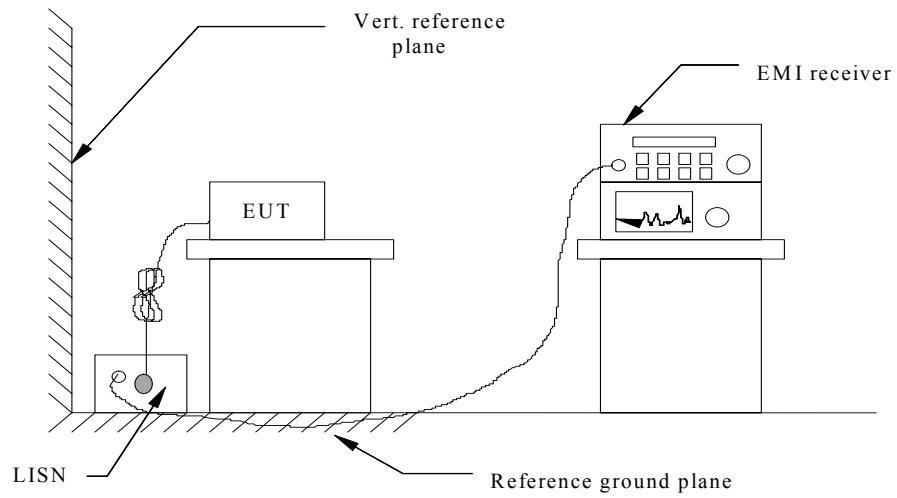

6.4 Test Results

PASS.


The test data please refer to following page.

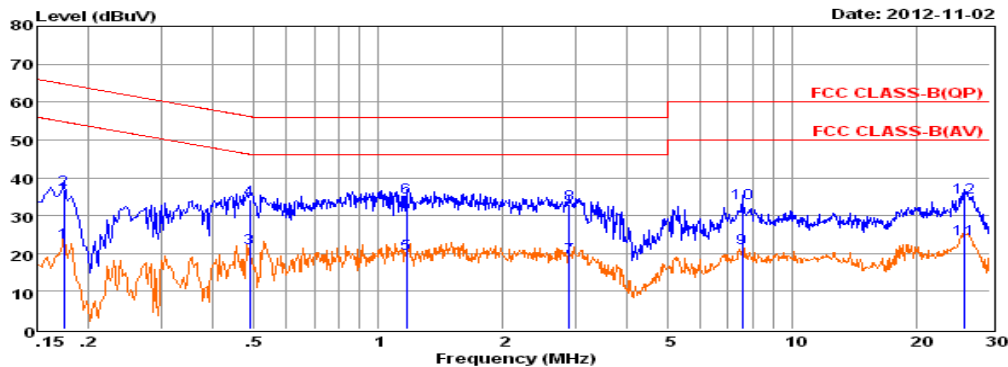

Env. Ins: 24*/56%
 EUT: Bluetooth Headset
 M/N: HS-BT102
 Power Rating: AC 120V/60Hz
 Test Mode: Normal Operating
 Operator: Ken
 Memo:
 Pol: NEUTRAL

	Freq	Reading	LisnFac	CabLos	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.17	13.31	9.64	0.02	22.97	54.77	-31.80	Average
2	0.17	27.31	9.64	0.02	36.97	64.77	-27.80	QP
3	0.49	11.64	9.62	0.04	21.30	46.19	-24.89	Average
4	0.49	24.65	9.62	0.04	34.31	56.19	-21.88	QP
5	1.17	10.15	9.63	0.05	19.83	46.00	-26.17	Average
6	1.17	25.16	9.63	0.05	34.84	56.00	-21.16	QP
7	2.90	9.28	9.64	0.06	18.98	46.00	-27.02	Average
8	2.90	23.28	9.64	0.06	32.98	56.00	-23.02	QP
9	7.57	11.51	9.70	0.07	21.28	50.00	-28.72	Average
10	7.57	23.52	9.70	0.07	33.29	60.00	-26.71	QP
11	26.00	13.91	9.83	0.13	23.87	50.00	-26.13	Average
12	26.00	24.92	9.83	0.13	34.88	60.00	-25.12	QP

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss.
 2. The emission levels that are 20dB below the official limit are not reported.

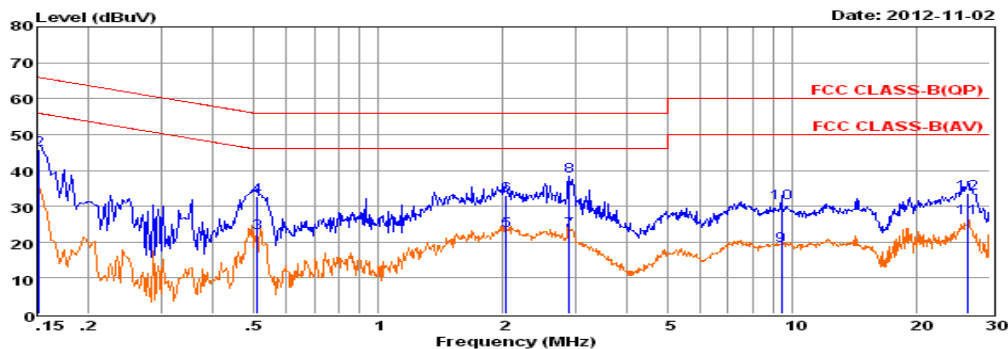

Env. Ins: 24*/56%
 EUT: Bluetooth Headset
 M/N: HS-BT102
 Power Rating: AC 120V/60Hz
 Test Mode: Normal Operating
 Operator: Ken
 Memo:
 Pol: LINE

	Freq	Reading	LisnFac	CabLos	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.15	24.29	9.57	0.02	33.88	55.91	-22.03	Average
2	0.15	36.30	9.57	0.02	45.89	65.91	-20.02	QP
3	0.51	13.06	9.62	0.04	22.72	46.00	-23.28	Average
4	0.51	23.06	9.62	0.04	32.72	56.00	-23.28	QP
5	2.03	13.45	9.64	0.05	23.14	46.00	-22.86	Average
6	2.03	23.46	9.64	0.05	33.15	56.00	-22.85	QP
7	2.90	13.64	9.64	0.06	23.34	46.00	-22.66	Average
8	2.90	28.64	9.64	0.06	38.34	56.00	-17.66	QP
9	9.40	9.30	9.69	0.08	19.07	50.00	-30.93	Average
10	9.40	21.31	9.69	0.08	31.08	60.00	-28.92	QP
11	26.56	16.88	9.71	0.13	26.72	50.00	-23.28	Average
12	26.56	23.89	9.71	0.13	33.73	60.00	-26.27	QP

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss.
 2. The emission levels that are 20dB below the official limit are not reported.

Note: Pre-scan all modes and recorded the worst case results in this report.

7. ANTENNA REQUIREMENT

7.1 Standard Applicable

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

7.2 Antenna Connected Construction

This EUT uses an integral antenna which is permanently attached on the main PCB (refer to EUT interior photographs) .

8. MANUFACTURER/ APPROVAL HOLDER DECLARATION

The following identical model(s):

--	--	--
----	----	----

Belong to the tested device:

Product description : Bluetooth Headset

Model name : HS-BT102

-----THE END OF REPORT-----