

HEARING AID COMPATIBILITY Volume Control Evaluation Report

FCC ID : YHLBLU64W
Equipment : Smart Phone
Brand Name : BLU
Model Name : G64
Receive Volume Control Results : PASS
Lowest Conversational Gain : 2N: 7.40 dB
8N: 11.10 dB
Applicant : BLU Products, Inc.
8600 NW 36th Street, Suite #300 Doral, FL 33166, USA
Manufacturer : BLU Products, Inc.
8600 NW 36th Street, Suite #300 Doral, FL 33166, USA
FCC 47 CFR §20.19
Standard : ANSI C63.19-2019
ANSI/TIA-5050-2018
Date Tested : Jun. 26, 2024 ~ Jun. 28, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in ANSI C63.19-2019 / 47 CFR Part 20.19 / ANSI/TIA-5050-2018 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.



Approved by: Si Zhang

Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



Table of Contents

1. General Information	4
2. Testing Location.....	5
3. Applied Standards	5
4. Air Interface and Operating Mode.....	6
5. Volume Control Requirements	7
6. System Description.....	8
7. Volume Control Test Procedure	9
8. Test Equipment List	10
9. Device Support Codec.....	11
10. Volume Control Evaluation Results.....	12
11. Uncertainty Assessment	21
12. References.....	22

Appendix A. Volume Control Evaluation Results

Appendix B. Calibration Certificate

Appendix C. Test Setup Photos



History of this test report

Report No.	Version	Description	Issued Date
HA460412C	Rev. 01	Initial issue of report	Jul. 18, 2024

**1. General Information**

Product Feature & Specification	
Applicant Name	BLU Products, Inc.
Equipment Name	Smart Phone
Brand Name	BLU
Model Name	G64
IMEI Code	IMEI 1: 867696067310401 IMEI 2: 867696067310414
FCC ID	YHLBLU64W
HW	FS310-MB-V0.1
SW	BLU_G1010_V14.0.03.07_GENERIC 06-07-2024
EUT Stage	Production Unit
Frequency Band	GSM850: 824 MHz ~ 849 MHz GSM1900: 1850MHz ~ 1910 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5700 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Mode	GSM/GPRS/EGPRS AMR / RMC 12.2Kbps HSDPA HSUPA DC-HSDPA HSPA+ (16QAM uplink is supported) LTE: QPSK, 16QAM, 64QAM WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE



2. Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Testing Laboratory			
Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	AC01-KS	CN1257	314309

3. Applied Standards

- FCC CFR47 Part 20.19
- ANSI C63.19-2019
- ANSI/TIA-5050-2018
- FCC KDB 285076 D01 HAC Guidance v06r04
- FCC KDB 285076 D04 Volume Control v02
- FCC KDB 285076 D05 CG Interim Waiver DA 23-914 v01

4. Air Interface and Operating Mode

Air Interface	Band MHz	Type	C63.19 Volume Control Tested	Simultaneous Transmitter	Name of Voice Service	Power State Compliance
GSM	GSM850	VO	Yes	WLAN, BT	CMRS Voice	Full
	GSM1900			WLAN, BT		
	EDGE850	VD	No	WLAN, BT	NA	
	EDGE1900					
UMTS	Band 2	VO	Yes	WLAN, BT	CMRS Voice	Full
	Band 4			WLAN, BT		
	Band 5			WLAN, BT		
	HSPA	VD	No	WLAN, BT	NA	
LTE (FDD)	Band 2	VD	Yes	WLAN, BT	VoLTE	Full
	Band 4			WLAN, BT		
	Band 5			WLAN, BT		
	Band 7			WLAN, BT		
	Band 12			WLAN, BT		
	Band 17			WLAN, BT		
	Band 66			WLAN, BT		
	Band 71			WLAN, BT		
Wi-Fi	2450	VD	Yes	GSM, WCDMA, LTE	VoWiFi	Full
	5200			GSM, WCDMA, LTE, BT		
	5300			GSM, WCDMA, LTE, BT		
	5500			GSM, WCDMA, LTE, BT		
	5800			GSM, WCDMA, LTE, BT		
BT	2450	DT	No	GSM, WCDMA, LTE, WLAN5GHz	NA	NA
Type Transport: VO= Voice only DT= Digital Transport only (no voice) VD= CMRS and IP Voice Service over Digital Transport						
Remark 1. Per KDB 285076 D05, Waiver DA 23-914 only requires conversational gain compliance for CMRS narrowband and CMRS wideband voice codecs as stated below. All other codecs either part of 3GPP set such as full-band and super-wideband codecs or OTT codecs are to be documented in the test report but not required to comply with the TIA 5050 Volume Control Standard						

5. Volume Control Requirements

<Conversational Gain>

- Per KDB 285076 D05, With a mounting force of 8N, the DUT shall have at least one volume control setting that will produce a conversational gain of ≥ 6 dB
- Per KDB 285076 D05, With a mounting force of 2N, the DUT shall have at least one volume control setting that will produce a conversational gain of ≥ 6 dB.
- Calculate the Conversational Gain by subtracting 70 dB from the measured dBSPL.
[Conversational Gain = (Measured dBSPL Level – 70 dBSPL) dB]

<Receive Distortion And Noise Performance>

With a mounting force of 8N and 2N, the ratio of the stimulus signal power to the 100 Hz to 8000 Hz total A-weighted distortion and noise power shall be ≥ 20 dB when tested over the range of 1/3 octave band center frequencies:

- Narrowband transmission mode: Each 1/3 octave band center frequency from 400 Hz to 3150 Hz
- Wideband transmission mode: Each 1/3 octave band center frequency from 250 Hz to 5000 Hz
- Per KDB 285076 D05, choose one narrowband and one wideband for all voice services, bands of operation and air interfaces over which it operates using one codec bit rate of the applicant's choosing to meet Receive Distortion And Noise Performance requirement.

<Receive Acoustic Frequency Response Performance>

For the volume control settings determined in ANSI/TIA-5050-2018 section 5.1.1 with a mounting force of 8N and 2N, the receive frequency response shall be measured at the DRP in 1/12 octave bands. After translation to the FF, it shall fall between the applicable upper and lower limits. The exact limit values at any 1/12 octave band center frequency falling between two consecutive points specified in the table may be calculated using the formula given in Eq 2 below:

$$X_f = X_1 + (X_2 - X_1) * \left(\frac{\log_{10} f - \log_{10} f_1}{\log_{10} f_2 - \log_{10} f_1} \right) \quad \text{Eq 2}$$

Where

X_f = limit value at frequency f

X_1 = limit value at frequency f_1 as given in table

X_2 = limit value at frequency f_2 as given in table

For Narrowband: The 1/12 octave band frequency response after translation to the FF shall fall between the upper and lower limits given in Table 1.

For Wideband: The 1/12 octave band frequency response after translation to the FF shall fall between the upper and lower limits given in Table 2.

Table 1 – Narrowband Receive Frequency Response Limits

Lower Limit Frequency (Hz)	Lower Limit (dB)	Upper Limit Frequency (Hz)	Upper Limit (dB)
300	-6	100	+6
3400	-6	4000	+6



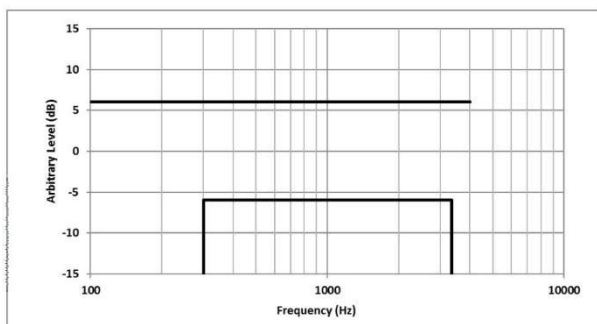


Table 2 – Wideband Receive Frequency Response Limits

Lower Limit Frequency (Hz)	Lower Limit (dB)	Upper Limit Frequency (Hz)	Upper Limit (dB)
200	-10	100	+6
300	-6	1000	+6
5000	-6	2000	+8
6300	-12	8000	+8

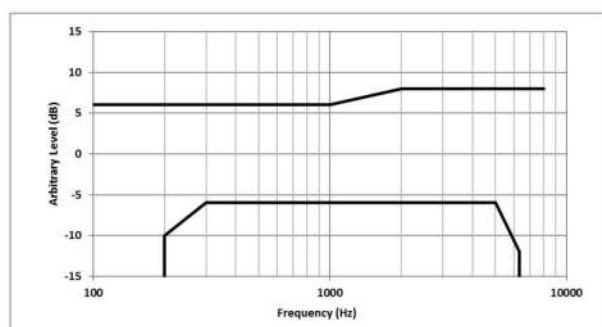

6. System Description

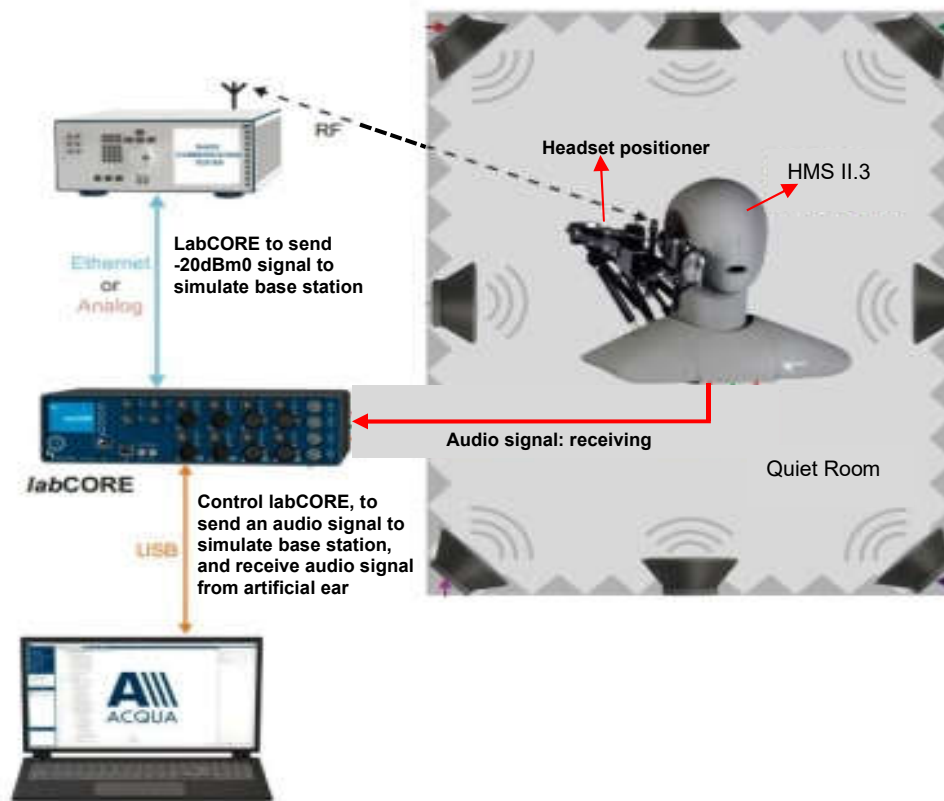

System Components:

Name of Equipment	Equipment Description
labCORE Audio Analyzer	labCORE is a high-precision measurement hardware platform. It provides multiple channels, a wide variety of analog and digital inputs and outputs, high processing power and high-performance interfaces. labCORE is an all-in-one solution for measuring the voice and audio quality of a wide range of devices. labCORE is used in conjunction with the communication quality analysis system ACQUA. Connected to a computer via USB (Plug & Play), it is configured and controlled by ACQUA. Combinations with other HEAD acoustics hardware platforms and software applications are possible. labCORE settings are controlled via the intuitive ACQUA settings. They can be stored and assigned to selectable measurement sequences.
HMS II.3, artificial head	HMS II.3 supports measurements in sending and receiving direction. For this purpose, the artificial head is equipped with an impedance simulator in the right ear and a two-way mouth loudspeaker – both meeting the requirements in the recommendations ITU-T P.57 and P.58
Handset positioner	Control the Newton's force(2N/8N) of the mobile phone on the artificial head
ACQUA, TIA-5050 Test Software	The SW version5.1.200 can be evaluated TIA-5050 section5.1, 5.2, 5.3
R&S base station simulator	RF connect with the mobile phone

7. Volume Control Test Procedure

<Conversational Gain>

1. Configure the DUT with a mounting force of 8N and test equipment as shown in section 5 in an active call state with the applicable codec for the transmission mode under test.
2. Set the DUT volume control to the maximum setting.
3. If the DUT has an adjustable tone control feature, a tone control setting that meets the frequency response requirements in ANSI/TIA-5050 section 5.3.1 shall be used.
4. The ACQUA system is apply the real speech test signal at a level of -20 dBm0 at the RETP and measure the acoustic output at the Drum Reference Point (DRP) over one complete sequence of the test signal.
5. Translate the measurement made at the DRP to the Free Field (FF) using the translation data in ANSI/TIA-5050 Annex B.
6. Over the applicable frequency band, determine the ASL in dBSPL for the resulting sound pressure level in accordance with Method B of ITU-T Recommendation P.56:
 - a. Narrowband 100 Hz through 4000 Hz.
 - b. Wideband 100 Hz through 7720 Hz.Calculate the Conversational Gain by subtracting 70 dB from the measured dBSPL.
[Conversational Gain = (Measured dBSPL Level – 70 dBSPL) dB]
7. Measure the output distortion per ANSI/TIA-5050 clause 5.2. If a distortion failure occurs at the maximum volume control setting, reduce the volume control setting and repeat the measurement to determine if a setting can be found for which the conversational gain requirement is met without a distortion failure.
8. Repeat steps 2-8 with a mounting force of 2N.

<Receive Distortion And Noise Performance>

1. Configure the DUT with a mounting force of 8N and test equipment as shown in section in an active call state with the applicable codec for the transmission mode under test.
2. Receive distortion and noise is measured using the PN-SDNR procedure as described in ANSI/TIA-5050 Annex A.
3. To ensure DUT activation, the ACQUA system is apply the real speech test signal at a level of -20 dBm0 followed immediately by the initial 1/3 octave center frequency PN test signal in ANSI/TIA-5050 Table A.1 based on the narrowband or wideband operating mode. Measure the acoustic output at the DRP over the complete sequence of the PN test signal.
4. Translate the measurement made at the DRP to the FF using the translation data in ANSI/TIA-5050 Annex B.
5. Calculate the acoustic output unweighted total signal power of the stimulus measurement band as described in ANSI/TIA-5050 A.2.
6. Calculate the notched A-weighting distortion and noise components as described in ANSI/TIA-5050 A.3.
7. Calculate the ratio of the signal power to the total A-weighted distortion and noise power using ANSI/TIA-5050 Eq A-1.
8. Repeat for each of the remaining 1/3 octave center frequencies in Table A.1 based on the narrowband or wideband operating mode.
9. Repeat steps 2-8 with a mounting force of 2N.
10. The measured value that the system equipment will automatically calculates or converts to define whether it meets the requirements of ANSI/TIA-5050 annex A and annex B.

<Receive Acoustic Frequency Response Performance>

1. Configure the DUT with a mounting force of 8N and test equipment as shown in Figure 1 in an active call state with the applicable codec for the transmission mode under test.
2. If the DUT has an adjustable tone control feature the initial measurement is to be performed with the default tone control setting.
3. The ACQUA system is apply the real speech test signal with a level of -20 dBm0 at the RETP.
4. Capture the frequency spectrum at the DRP of the HATS using real-time analysis with 1/12 octave bands over the frequency range from 100 Hz to 4000 Hz for narrowband measurements, or over the frequency range from 100 Hz to 8000 Hz for wideband measurements, averaged over the entire duration of the test signal.
5. Transform the DRP frequency spectrum measurement to the FF (include ANSI/TIA-5050 Annex B).
6. Divide the 1/12 octave measurement data by the 1/12 octave frequency spectrum of the test signal at the RETP and present the measurement in terms of dB(Pa/V).
7. Apply the applicable frequency response limits to determine compliance.
8. If the default tone control setting does not meet the requirement, repeat the above steps for other tone control settings to determine a tone control setting that meets the requirements.
9. Repeat with a mounting force of 2N.
10. The receive acoustic frequency response performance was perform at max tone control setting.

8. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
HEAD acoustic GmbH	Audio Analyzer	labCORE	77000544	2023/10/27	2024/10/26
HEAD acoustic GmbH	Fullband artificial head	HMS II.3	12306242	2023/11/2	2024/11/1
G.R.A.S	Sound Calibrator	42AB	31744	2023/10/27	2024/10/26
R&S	Base Station	CMW500	143030	2023/7/5	2024/7/4
Testo	Thermo-Hygrometer	608-H1	1241332126	2023/7/10	2024/7/9

9. Device Support Codec

General Note:

1. Per KDB 285076 D04, it is expected to investigate and document only the worst-case test conditions and results. Each submitted test report shall document the codec type (i.e., NB, WB, EVS, etc.), every air interface (i.e., LTE, 5G NR, WI-FI) and band supported for the worst-case codec bit rate, band channel, bandwidth, air interface bit rate, subcarrier spacings, and resource blocks
2. Through Internal codec and air interface configuration investigation (e.g. (i.e., NB, WB, EVS codec, bandwidth, modulation data rate, subcarrier spacing, and resource blocks) that the worst investigate results of codec, air interface configuration etc. were include in section10
3. Per KDB 285076 D05, Waiver DA 23-914 only requires conversational gain compliance for CMRS narrowband and CMRS wideband voice codecs as stated below. All other codecs either part of 3GPP set such as full-band and super-wideband codecs or OTT codecs are to be documented in the test report but not required to comply with the TIA 5050 Volume Control Standard
4. If a handset does not have a wideband codec or the handset only has an AMR wideband codec, then the test report must document this fact and the passing requirement under these circumstances for the wideband codec test is waived. The passing results for the distortion/noise and frequency response tests must be reported in the handset's test report

GSM Codec/bitrate		
Codec	AMR NB	EFR NB
Bitrate	4.75kbps	12.2kbps
	5.15kbps	
	5.9kbps	
	6.7kbps	
	7.4kbps	
	7.95kbps	
	10.2kbps	
	12.2kbps	

WCDMA Codec/bitrate		
Codec	AMR NB	AMR WB
Bitrate	4.75kbps	6.60kbps
	5.15kbps	8.85kbps
	5.9kbps	12.65kbps
	6.7kbps	14.25kbps
	7.4kbps	15.85kbps
	7.95kbps	18.25kbps
	10.2kbps	19.85kbps
	12.2kbps	23.05kbps
		23.85kbps

VoLTE/VoNR/VoWIFI Codec/bitrate					
Codec	AMR NB	AMR WB	EVS NB	EVS WB	EVS SWB
Bitrate	4.75kbps	6.60kbps	5.9kbps	5.9kbps	9.6kbps
	5.15kbps	8.85kbps	7.2kbps	7.2kbps	13.2kbps
	5.9kbps	12.65kbps	8kbps	8kbps	16.4kbps
	6.7kbps	14.25kbps	9.6kbps	9.6kbps	24.4kbps
	7.4kbps	15.85kbps	13.2kbps	13.2kbps	
	7.95kbps	18.25kbps	16.4kbps	16.4kbps	
	10.2kbps	19.85kbps	24.4kbps	24.4kbps	
	12.2kbps	23.05kbps			
		23.85kbps			

10. Volume Control Evaluation Results

General Note:

1. All the test result was done at quiet room and ambient noise is less than 40dBA.
2. Per KDB 285076 D05, in section2 addresses the technical testing requirements for the conversational gain, distortion, and frequency response tests that amends KDB 285076 D04 Volume Control under the conditions of the limited-term waiver DA 23-914, as follows:
 - a. Under the waiver, only CMRS narrowband and CMRS wideband voice codecs are required to comply with the volume control requirements of the TIA 5050-2018 Volume Control Standard as amended as follows:
 1. For the 2N mounting force test, one narrowband and one wideband voice codec embedded with the handset must pass with at least one volume control setting with a conversational gain of ≥ 6 dB for all voice services, bands of operation and air interfaces over which it operates using one codec bit rate of the applicant's choosing
 2. For the 8N mounting force test, one narrowband and one wideband voice codec embedded with the handset must pass with at least one volume control setting with a conversational gain of ≥ 6 dB 8 for all voice services, bands of operation and air interfaces over which they operate but is not required to meet or exceed the full 18 dB of conversational gain specified in section 5.1.1 of the TIA 5050 Volume Control Standard using one codec bit rate of the applicant's choosing
 - b. For all other narrowband and wideband codecs not evaluated in 2.a. above, TIA 5050-2018 Receive Distortion and Noise Performance and Receive Acoustic Frequency Response Performance evaluations are not required; however, these codecs shall be assessed for conversational gain and documented in the test report at the 2N and 8N levels with a gain of ≥ 6 dB for all voice services, bands of operation and air interfaces over which they operate. The handset volume setting used to comply with 2.a. shall be used for these other CMRS codec evaluations.
 - c. Any other codec for voice services embedded in the handset, not identified in 2.a. and 2.b. above, is not required to comply or demonstrate in the test reports for conversational gain.
3. All the test results were set the DUT volume control to the maximum setting.
4. Conversational Gain = (measured dBSPL Level – 70 dBSPL) dB
5. Through Internal radio configuration investigation (e.g. bandwidth, modulation data rate, subcarrier spacing, and resource blocks) that the worst radio configuration was document as below table.
6. Per KDB 285076 D05 and document of DA 23-914 item 30, the manufacturer only perform EVS codec to meet distortion/noise and frequency response tests at the 2N and 8N force levels.
7. The device have similar frequency in some LTE bands: LTE B12/17, 4/66, since the supported frequency spans for the smaller LTE bands are completely cover by the larger LTE bands, therefore, only larger LTE bands were required to be tested for hearing-aid compliance.
8. The worst case results of each air interface include in appendix A.

The 2N mounting force lowest conversational gain is 7.40 dB with a hearing aid.

The 8N mounting force lowest conversational gain is 11.10 dB without a hearing aid.



<Evaluation results for KDB 285076 D05 2.a>

<LTE>

HAC (Volume control) Test Record									Receive Volume Control Performance					Receive Distortion and Noise Performance				Receive Acoustic Frequency Response Performance
Plot No.	Air Interface	BW (MHz)	Modulation / Mode	RB Size	RB offset	Channel	Audio Codec	Mounting Force (N)	Measured dB SPL Level	Conversational Gain (Measured dB SPL Level – 70 dB SPL) (dB)	Limit (dB)	Margin to Limit (dB)	PASS/FAIL	Minimum PN-SDNR (dB) Doc. Section	Limit (dB)	Margin to Limit (dB)	PASS/FAIL	Free Field (FF)
	LTE Band 2	20M	QPSK	1	0	18900	EVS NB 24.4kbps	2N	79.14	9.14	≥6	3.14	PASS	24.72	≥20	4.72	PASS	0.30
	LTE Band 2	20M	QPSK	1	0	18900	EVS NB 24.4kbps	8N	83.08	13.08	≥6	7.08	PASS	24.11	≥20	4.11	PASS	0.32
	LTE Band 2	20M	QPSK	1	0	18900	EVS WB 24.4kbps	2N	79.25	9.25	≥6	3.25	PASS	25.7	≥20	5.7	PASS	2.30
	LTE Band 2	20M	QPSK	1	0	18900	EVS WB 24.4kbps	8N	83.51	13.51	≥6	7.51	PASS	25.63	≥20	5.63	PASS	2.23
	LTE Band 5	10M	QPSK	1	0	20525	EVS NB 24.4kbps	2N	78.94	8.94	≥6	2.94	PASS	27.66	≥20	7.66	PASS	0.34
	LTE Band 5	10M	QPSK	1	0	20525	EVS NB 24.4kbps	8N	83.18	13.18	≥6	7.18	PASS	27.79	≥20	7.79	PASS	0.41
	LTE Band 5	10M	QPSK	1	0	20525	EVS WB 24.4kbps	2N	79.29	9.29	≥6	3.29	PASS	25.5	≥20	5.5	PASS	2.31
	LTE Band 5	10M	QPSK	1	0	20525	EVS WB 24.4kbps	8N	83.5	13.5	≥6	7.5	PASS	25.72	≥20	5.72	PASS	2.29
	LTE Band 7	20M	QPSK	1	0	21100	EVS NB 24.4kbps	2N	78.84	8.84	≥6	2.84	PASS	27.33	≥20	7.33	PASS	0.54
	LTE Band 7	20M	QPSK	1	0	21100	EVS NB 24.4kbps	8N	83.15	13.15	≥6	7.15	PASS	26.29	≥20	6.29	PASS	0.33
	LTE Band 7	20M	QPSK	1	0	21100	EVS WB 24.4kbps	2N	79.17	9.17	≥6	3.17	PASS	25.07	≥20	5.07	PASS	2.42
	LTE Band 7	20M	QPSK	1	0	21100	EVS WB 24.4kbps	8N	83.51	13.51	≥6	7.51	PASS	25.47	≥20	5.47	PASS	2.38
	LTE Band 12	10M	QPSK	1	0	23095	EVS NB 24.4kbps	2N	78.9	8.9	≥6	2.9	PASS	28.03	≥20	8.03	PASS	0.76
	LTE Band 12	10M	QPSK	1	0	23095	EVS NB 24.4kbps	8N	83.13	13.13	≥6	7.13	PASS	25.38	≥20	5.38	PASS	0.62
	LTE Band 12	10M	QPSK	1	0	23095	EVS WB 24.4kbps	2N	79.33	9.33	≥6	3.33	PASS	25.12	≥20	5.12	PASS	2.47
	LTE Band 12	10M	QPSK	1	0	23095	EVS WB 24.4kbps	8N	83.53	13.53	≥6	7.53	PASS	25.67	≥20	5.67	PASS	2.53
	LTE Band 66	20M	QPSK	1	0	132322	EVS NB 24.4kbps	2N	78.92	8.92	≥6	2.92	PASS	26.13	≥20	6.13	PASS	0.57
	LTE Band 66	20M	QPSK	1	0	132322	EVS NB 24.4kbps	8N	83.11	13.11	≥6	7.11	PASS	24.59	≥20	4.59	PASS	0.49
	LTE Band 66	20M	QPSK	1	0	132322	EVS WB 24.4kbps	2N	79.36	9.36	≥6	3.36	PASS	25.61	≥20	5.61	PASS	2.39
	LTE Band 66	20M	QPSK	1	0	132322	EVS WB 24.4kbps	8N	83.51	13.51	≥6	7.51	PASS	25.13	≥20	5.13	PASS	2.35
	LTE Band 71	20M	QPSK	1	0	133297	EVS NB 24.4kbps	2N	78.88	8.88	≥6	2.88	PASS	27.92	≥20	7.92	PASS	0.44
	LTE Band 71	20M	QPSK	1	0	133297	EVS NB 24.4kbps	8N	83.12	13.12	≥6	7.12	PASS	27.44	≥20	7.44	PASS	0.26
01	LTE Band 71	20M	QPSK	1	0	133297	EVS WB 24.4kbps	2N	79.33	9.33	≥6	3.33	PASS	22.72	≥20	2.72	PASS	2.27
02	LTE Band 71	20M	QPSK	1	0	133297	EVS WB 24.4kbps	8N	83.57	13.57	≥6	7.57	PASS	23.53	≥20	3.53	PASS	2.28



<WLAN>

HAC (Volume control) Test Record						Receive Volume Control Performance					Receive Distortion and Noise Performance				Receive Acoustic Frequency Response Performance
Plot No.	Air Interface	Modulation / Mode	Channel	Audio Codec	Mounting Force (N)	Measured dB SPL Level	Conversational Gain (Measured dB SPL Level – 70 dB SPL) (dB)	Limit (dB)	Margin to Limit (dB)	PASS/FAIL	Minimum PN-SDNR (dB) Doc. Section	Limit (dB)	Margin to Limit (dB)	PASS/FAIL	Free Field (FF)
	WLAN2.4GHz	802.11b 1Mbps	6	EVS NB 24.4kbps	2N	78.72	8.72	≥6	2.72	PASS	26.6	≥20	6.6	PASS	1.00
	WLAN2.4GHz	802.11b 1Mbps	6	EVS NB 24.4kbps	8N	82.74	12.74	≥6	6.74	PASS	28.17	≥20	8.17	PASS	1.20
	WLAN2.4GHz	802.11b 1Mbps	6	EVS WB 24.4kbps	2N	79.32	9.32	≥6	3.32	PASS	26.69	≥20	6.69	PASS	1.66
	WLAN2.4GHz	802.11b 1Mbps	6	EVS WB 24.4kbps	8N	83.3	13.3	≥6	7.3	PASS	28.36	≥20	8.36	PASS	1.62
	WLAN5GHz	802.11a 6Mbps	40	EVS NB 24.4kbps	2N	77.4	7.4	≥6	1.4	PASS	28.15	≥20	8.15	PASS	1.10
	WLAN5GHz	802.11a 6Mbps	40	EVS NB 24.4kbps	8N	81.1	11.1	≥6	5.1	PASS	29.12	≥20	9.12	PASS	0.87
	WLAN5GHz	802.11a 6Mbps	40	EVS WB 24.4kbps	2N	77.77	7.77	≥6	1.77	PASS	28.67	≥20	8.67	PASS	1.54
	WLAN5GHz	802.11a 6Mbps	40	EVS WB 24.4kbps	8N	81.48	11.48	≥6	5.48	PASS	28.74	≥20	8.74	PASS	1.57
	WLAN5GHz	802.11a 6Mbps	40	EVS NB 24.4kbps	2N	78.55	8.55	≥6	2.55	PASS	27.77	≥20	7.77	PASS	0.98
	WLAN5GHz	802.11a 6Mbps	60	EVS NB 24.4kbps	8N	82.28	12.28	≥6	6.28	PASS	28.15	≥20	8.15	PASS	1.15
	WLAN5GHz	802.11a 6Mbps	60	EVS WB 24.4kbps	2N	79.39	9.39	≥6	3.39	PASS	25.37	≥20	5.37	PASS	1.52
	WLAN5GHz	802.11a 6Mbps	60	EVS WB 24.4kbps	8N	82.86	12.86	≥6	6.86	PASS	26.11	≥20	6.11	PASS	1.17
	WLAN5GHz	802.11a 6Mbps	116	EVS NB 24.4kbps	2N	78.74	8.74	≥6	2.74	PASS	28.06	≥20	8.06	PASS	1.04
	WLAN5GHz	802.11a 6Mbps	116	EVS NB 24.4kbps	8N	82.5	12.5	≥6	6.5	PASS	27.24	≥20	7.24	PASS	1.28
03	WLAN5GHz	802.11a 6Mbps	116	EVS WB 24.4kbps	2N	79.31	9.31	≥6	3.31	PASS	24.67	≥20	4.67	PASS	1.13
	WLAN5GHz	802.11a 6Mbps	116	EVS WB 24.4kbps	8N	82.89	12.89	≥6	6.89	PASS	25.25	≥20	5.25	PASS	1.76
	WLAN5GHz	802.11a 6Mbps	157	EVS NB 24.4kbps	2N	78.57	8.57	≥6	2.57	PASS	25.88	≥20	5.88	PASS	1.16
	WLAN5GHz	802.11a 6Mbps	157	EVS NB 24.4kbps	8N	82.42	12.42	≥6	6.42	PASS	28.45	≥20	8.45	PASS	1.22
	WLAN5GHz	802.11a 6Mbps	157	EVS WB 24.4kbps	2N	79.43	9.43	≥6	3.43	PASS	26.38	≥20	6.38	PASS	1.51
	WLAN5GHz	802.11a 6Mbps	157	EVS WB 24.4kbps	8N	83	13	≥6	7	PASS	25.37	≥20	5.37	PASS	1.82

<Codec Investigation and Evaluation results for KDB 285076 D05 2.b>

<GSM>

HAC (Volume control) Test Record						Receive Volume Control Performance				
Plot No.	Air Interface	Modulation / Mode	Channel	Audio Codec	Mounting Force (N)	Measured dB SPL Level	Conversational Gain (Measured dB SPL Level – 70 dB SPL) (dB)	Limit (dB)	Margin to Limit (dB)	PASS/FAIL
04	GSM850	GSM Voice	189	EFR NB 12.2Kbps	2N	78.86	8.86	≥6	2.86	PASS
	GSM850	GSM Voice	189	EFR NB 12.2Kbps	8N	82.44	12.44	≥6	6.44	PASS
	GSM850	GSM Voice	189	AMR NB 4.75kbps	2N	78.19	8.19	≥6	2.19	PASS
	GSM850	GSM Voice	189	AMR NB 4.75kbps	8N	81.77	11.77	≥6	5.77	PASS
	GSM850	GSM Voice	189	AMR NB 12.2kbps	2N	78.61	8.61	≥6	2.61	PASS
	GSM850	GSM Voice	189	AMR NB 12.2kbps	8N	82.58	12.58	≥6	6.58	PASS
	GSM1900	GSM Voice	661	EFR NB 12.2Kbps	2N	78.93	8.93	≥6	2.93	PASS
	GSM1900	GSM Voice	661	EFR NB 12.2Kbps	8N	82.55	12.55	≥6	6.55	PASS
	GSM1900	GSM Voice	661	AMR NB 4.75kbps	2N	78.26	8.26	≥6	2.26	PASS
	GSM1900	GSM Voice	661	AMR NB 4.75kbps	8N	81.86	11.86	≥6	5.86	PASS
	GSM1900	GSM Voice	661	AMR NB 12.2kbps	2N	78.71	8.71	≥6	2.71	PASS
	GSM1900	GSM Voice	661	AMR NB 12.2kbps	8N	81.92	11.92	≥6	5.92	PASS

<UMTS>

HAC (Volume control) Test Record						Receive Volume Control Performance				
Plot No.	Air Interface	Modulation / Mode	Channel	Audio Codec	Mounting Force (N)	Measured dB SPL Level	Conversational Gain (Measured dB SPL Level – 70 dB SPL) (dB)	Limit (dB)	Margin to Limit (dB)	PASS/FAIL
	WCDMA II	Voice	9400	AMR NB 4.75kbps	2N	78.11	8.11	≥6	2.11	PASS
	WCDMA II	Voice	9400	AMR NB 4.75kbps	8N	82.15	12.15	≥6	6.15	PASS
	WCDMA II	Voice	9400	AMR NB 12.2kbps	2N	78.93	8.93	≥6	2.93	PASS
	WCDMA II	Voice	9400	AMR NB 12.2kbps	8N	82.85	12.85	≥6	6.85	PASS
	WCDMA II	Voice	9400	AMR WB 6.60kbps	2N	79.77	9.77	≥6	3.77	PASS
	WCDMA II	Voice	9400	AMR WB 6.60kbps	8N	82.96	12.96	≥6	6.96	PASS
	WCDMA II	Voice	9400	AMR WB 23.85kbps	2N	80.22	10.22	≥6	4.22	PASS
	WCDMA II	Voice	9400	AMR WB 23.85kbps	8N	83.36	13.36	≥6	7.36	PASS
	WCDMA IV	Voice	1413	AMR NB 4.75kbps	2N	78.16	8.16	≥6	2.16	PASS
	WCDMA IV	Voice	1413	AMR NB 4.75kbps	8N	82.15	12.15	≥6	6.15	PASS
	WCDMA IV	Voice	1413	AMR NB 12.2kbps	2N	78.91	8.91	≥6	2.91	PASS
	WCDMA IV	Voice	1413	AMR NB 12.2kbps	8N	82.88	12.88	≥6	6.88	PASS
	WCDMA IV	Voice	1413	AMR WB 6.60kbps	2N	79.81	9.81	≥6	3.81	PASS
	WCDMA IV	Voice	1413	AMR WB 6.60kbps	8N	82.91	12.91	≥6	6.91	PASS
	WCDMA IV	Voice	1413	AMR WB 23.85kbps	2N	82.25	12.25	≥6	6.25	PASS
	WCDMA IV	Voice	1413	AMR WB 23.85kbps	8N	83.45	13.45	≥6	7.45	PASS
	WCDMA V	Voice	4182	AMR NB 4.75kbps	2N	78.03	8.03	≥6	2.03	PASS
	WCDMA V	Voice	4182	AMR NB 4.75kbps	8N	82.08	12.08	≥6	6.08	PASS
	WCDMA V	Voice	4182	AMR NB 12.2kbps	2N	78.87	8.87	≥6	2.87	PASS
	WCDMA V	Voice	4182	AMR NB 12.2kbps	8N	82.74	12.74	≥6	6.74	PASS
	WCDMA V	Voice	4182	AMR WB 6.60kbps	2N	79.69	9.69	≥6	3.69	PASS
	WCDMA V	Voice	4182	AMR WB 6.60kbps	8N	82.81	12.81	≥6	6.81	PASS
	WCDMA V	Voice	4182	AMR WB 23.85kbps	2N	80.13	10.13	≥6	4.13	PASS
	WCDMA V	Voice	4182	AMR WB 23.85kbps	8N	83.23	13.23	≥6	7.23	PASS



<LTE>

HAC (Volume control) Test Record									Receive Volume Control Performance				
Plot No.	Air Interface	BW (MHz)	Modulation / Mode	RB Size	RB offset	Channel	Audio Codec	Mounting Force (N)	Measured dBSPL Level	Conversational Gain (Measured dBSPL Level – 70 dBSPL) (dB)	Limit (dB)	Margin to Limit (dB)	PASS/FAIL
	LTE Band 2	20M	QPSK	1	0	18900	AMR NB 4.75kbps	2N	79.27	9.27	≥6	3.27	PASS
	LTE Band 2	20M	QPSK	1	0	18900	AMR NB 4.75kbps	8N	83.25	13.25	≥6	7.25	PASS
	LTE Band 2	20M	QPSK	1	0	18900	AMR NB 12.2kbps	2N	79.35	9.35	≥6	3.35	PASS
	LTE Band 2	20M	QPSK	1	0	18900	AMR NB 12.2kbps	8N	83.13	13.13	≥6	7.13	PASS
	LTE Band 2	20M	QPSK	1	0	18900	AMR WB 6.60kbps	2N	79.48	9.48	≥6	3.48	PASS
	LTE Band 2	20M	QPSK	1	0	18900	AMR WB 6.60kbps	8N	83.41	13.41	≥6	7.41	PASS
	LTE Band 2	20M	QPSK	1	0	18900	AMR WB 23.85kbps	2N	79.43	9.43	≥6	3.43	PASS
	LTE Band 2	20M	QPSK	1	0	18900	AMR WB 23.85kbps	8N	83.43	13.43	≥6	7.43	PASS
	LTE Band 2	20M	QPSK	1	0	18900	EVS NB 5.9kbps	2N	79.43	9.43	≥6	3.43	PASS
	LTE Band 2	20M	QPSK	1	0	18900	EVS NB 5.9kbps	8N	83.38	13.38	≥6	7.38	PASS
	LTE Band 2	20M	QPSK	1	0	18900	EVS NB 24.4kbps	2N	79.14	9.14	≥6	3.14	PASS
	LTE Band 2	20M	QPSK	1	0	18900	EVS NB 24.4kbps	8N	83.08	13.08	≥6	7.08	PASS
	LTE Band 2	20M	QPSK	1	0	18900	EVS WB 5.9kbps	2N	79.27	9.27	≥6	3.27	PASS
	LTE Band 2	20M	QPSK	1	0	18900	EVS WB 5.9kbps	8N	83.36	13.36	≥6	7.36	PASS
	LTE Band 2	20M	QPSK	1	0	18900	EVS WB 24.4kbps	2N	79.25	9.25	≥6	3.25	PASS
	LTE Band 2	20M	QPSK	1	0	18900	EVS WB 24.4kbps	8N	83.51	13.51	≥6	7.51	PASS
	LTE Band 2	20M	QPSK	1	0	18900	EVS SWB 9.6kbps	2N	79.28	9.28	≥6	3.28	PASS
	LTE Band 2	20M	QPSK	1	0	18900	EVS SWB 9.6kbps	8N	83.39	13.39	≥6	7.39	PASS
	LTE Band 2	20M	QPSK	1	0	18900	EVS SWB 24.4kbps	2N	79.33	9.33	≥6	3.33	PASS
	LTE Band 2	20M	QPSK	1	0	18900	EVS SWB 24.4kbps	8N	83.15	13.15	≥6	7.15	PASS
	LTE Band 5	10M	QPSK	1	0	20525	AMR NB 4.75kbps	2N	79.23	9.23	≥6	3.23	PASS
	LTE Band 5	10M	QPSK	1	0	20525	AMR NB 4.75kbps	8N	83.24	13.24	≥6	7.24	PASS
	LTE Band 5	10M	QPSK	1	0	20525	AMR NB 12.2kbps	2N	79.05	9.05	≥6	3.05	PASS
	LTE Band 5	10M	QPSK	1	0	20525	AMR NB 12.2kbps	8N	83.39	13.39	≥6	7.39	PASS
	LTE Band 5	10M	QPSK	1	0	20525	AMR WB 6.60kbps	2N	79.57	9.57	≥6	3.57	PASS
	LTE Band 5	10M	QPSK	1	0	20525	AMR WB 6.60kbps	8N	83.8	13.8	≥6	7.8	PASS
	LTE Band 5	10M	QPSK	1	0	20525	AMR WB 23.85kbps	2N	79.58	9.58	≥6	3.58	PASS
	LTE Band 5	10M	QPSK	1	0	20525	AMR WB 23.85kbps	8N	83.61	13.61	≥6	7.61	PASS
	LTE Band 5	10M	QPSK	1	0	20525	EVS NB 5.9kbps	2N	79.28	9.28	≥6	3.28	PASS
	LTE Band 5	10M	QPSK	1	0	20525	EVS NB 5.9kbps	8N	83.5	13.5	≥6	7.5	PASS
	LTE Band 5	10M	QPSK	1	0	20525	EVS NB 24.4kbps	2N	78.94	8.94	≥6	2.94	PASS
	LTE Band 5	10M	QPSK	1	0	20525	EVS NB 24.4kbps	8N	83.18	13.18	≥6	7.18	PASS
	LTE Band 5	10M	QPSK	1	0	20525	EVS WB 5.9kbps	2N	79.6	9.6	≥6	3.6	PASS
	LTE Band 5	10M	QPSK	1	0	20525	EVS WB 5.9kbps	8N	83.77	13.77	≥6	7.77	PASS
	LTE Band 5	10M	QPSK	1	0	20525	EVS WB 24.4kbps	2N	79.29	9.29	≥6	3.29	PASS
	LTE Band 5	10M	QPSK	1	0	20525	EVS WB 24.4kbps	8N	83.5	13.5	≥6	7.5	PASS
	LTE Band 5	10M	QPSK	1	0	20525	EVS SWB 9.6kbps	2N	79.52	9.52	≥6	3.52	PASS
	LTE Band 5	10M	QPSK	1	0	20525	EVS SWB 9.6kbps	8N	83.81	13.81	≥6	7.81	PASS
	LTE Band 5	10M	QPSK	1	0	20525	EVS SWB 24.4kbps	2N	79.43	9.43	≥6	3.43	PASS
	LTE Band 5	10M	QPSK	1	0	20525	EVS SWB 24.4kbps	8N	83.83	13.83	≥6	7.83	PASS
	LTE Band 7	20M	QPSK	1	0	21100	AMR NB 4.75kbps	2N	79.09	9.09	≥6	3.09	PASS
	LTE Band 7	20M	QPSK	1	0	21100	AMR NB 4.75kbps	8N	83.28	13.28	≥6	7.28	PASS
	LTE Band 7	20M	QPSK	1	0	21100	AMR NB 12.2kbps	2N	79.13	9.13	≥6	3.13	PASS
	LTE Band 7	20M	QPSK	1	0	21100	AMR NB 12.2kbps	8N	83.38	13.38	≥6	7.38	PASS
	LTE Band 7	20M	QPSK	1	0	21100	AMR WB 6.60kbps	2N	79.28	9.28	≥6	3.28	PASS
	LTE Band 7	20M	QPSK	1	0	21100	AMR WB 6.60kbps	8N	83.72	13.72	≥6	7.72	PASS
	LTE Band 7	20M	QPSK	1	0	21100	AMR WB 23.85kbps	2N	79.41	9.41	≥6	3.41	PASS
	LTE Band 7	20M	QPSK	1	0	21100	AMR WB 23.85kbps	8N	83.64	13.64	≥6	7.64	PASS
	LTE Band 7	20M	QPSK	1	0	21100	EVS NB 5.9kbps	2N	78.94	8.94	≥6	2.94	PASS
	LTE Band 7	20M	QPSK	1	0	21100	EVS NB 5.9kbps	8N	83.27	13.27	≥6	7.27	PASS



Volume Control Evaluation Report

Report No. : HA460412C

06	LTE Band 7	20M	QPSK	1	0	21100	EVS NB 24.4kbps	2N	78.84	8.84	≥6	2.84	PASS
	LTE Band 7	20M	QPSK	1	0	21100	EVS NB 24.4kbps	8N	83.15	13.15	≥6	7.15	PASS
	LTE Band 7	20M	QPSK	1	0	21100	EVS WB 5.9kbps	2N	79.5	9.5	≥6	3.5	PASS
	LTE Band 7	20M	QPSK	1	0	21100	EVS WB 5.9kbps	8N	83.79	13.79	≥6	7.79	PASS
	LTE Band 7	20M	QPSK	1	0	21100	EVS WB 24.4kbps	2N	79.17	9.17	≥6	3.17	PASS
	LTE Band 7	20M	QPSK	1	0	21100	EVS WB 24.4kbps	8N	83.51	13.51	≥6	7.51	PASS
	LTE Band 7	20M	QPSK	1	0	21100	EVS SWB 9.6kbps	2N	79.28	9.28	≥6	3.28	PASS
	LTE Band 7	20M	QPSK	1	0	21100	EVS SWB 9.6kbps	8N	83.66	13.66	≥6	7.66	PASS
	LTE Band 7	20M	QPSK	1	0	21100	EVS SWB 24.4kbps	2N	79.33	9.33	≥6	3.33	PASS
	LTE Band 7	20M	QPSK	1	0	21100	EVS SWB 24.4kbps	8N	83.58	13.58	≥6	7.58	PASS
	LTE Band 12	10M	QPSK	1	0	23095	AMR NB 4.75kbps	2N	78.97	8.97	≥6	2.97	PASS
	LTE Band 12	10M	QPSK	1	0	23095	AMR NB 4.75kbps	8N	83.46	13.46	≥6	7.46	PASS
	LTE Band 12	10M	QPSK	1	0	23095	AMR NB 12.2kbps	2N	78.97	8.97	≥6	2.97	PASS
	LTE Band 12	10M	QPSK	1	0	23095	AMR NB 12.2kbps	8N	83.38	13.38	≥6	7.38	PASS
	LTE Band 12	10M	QPSK	1	0	23095	AMR WB 6.60kbps	2N	79.55	9.55	≥6	3.55	PASS
	LTE Band 12	10M	QPSK	1	0	23095	AMR WB 6.60kbps	8N	83.65	13.65	≥6	7.65	PASS
	LTE Band 12	10M	QPSK	1	0	23095	AMR WB 23.85kbps	2N	79.41	9.41	≥6	3.41	PASS
	LTE Band 12	10M	QPSK	1	0	23095	AMR WB 23.85kbps	8N	83.67	13.67	≥6	7.67	PASS
	LTE Band 12	10M	QPSK	1	0	23095	EVS NB 5.9kbps	2N	79.02	9.02	≥6	3.02	PASS
	LTE Band 12	10M	QPSK	1	0	23095	EVS NB 5.9kbps	8N	83.31	13.31	≥6	7.31	PASS
	LTE Band 12	10M	QPSK	1	0	23095	EVS NB 24.4kbps	2N	78.9	8.9	≥6	2.9	PASS
	LTE Band 12	10M	QPSK	1	0	23095	EVS NB 24.4kbps	8N	83.13	13.13	≥6	7.13	PASS
	LTE Band 12	10M	QPSK	1	0	23095	EVS WB 5.9kbps	2N	79.45	9.45	≥6	3.45	PASS
	LTE Band 12	10M	QPSK	1	0	23095	EVS WB 5.9kbps	8N	83.76	13.76	≥6	7.76	PASS
	LTE Band 12	10M	QPSK	1	0	23095	EVS WB 24.4kbps	2N	79.33	9.33	≥6	3.33	PASS
	LTE Band 12	10M	QPSK	1	0	23095	EVS WB 24.4kbps	8N	83.53	13.53	≥6	7.53	PASS
	LTE Band 12	10M	QPSK	1	0	23095	EVS SWB 9.6kbps	2N	79.65	9.65	≥6	3.65	PASS
	LTE Band 12	10M	QPSK	1	0	23095	EVS SWB 9.6kbps	8N	83.83	13.83	≥6	7.83	PASS
	LTE Band 12	10M	QPSK	1	0	23095	EVS SWB 24.4kbps	2N	79.63	9.63	≥6	3.63	PASS
	LTE Band 12	10M	QPSK	1	0	23095	EVS SWB 24.4kbps	8N	83.88	13.88	≥6	7.88	PASS
	LTE Band 66	20M	QPSK	1	0	132322	AMR NB 4.75kbps	2N	79.18	9.18	≥6	3.18	PASS
	LTE Band 66	20M	QPSK	1	0	132322	AMR NB 4.75kbps	8N	83.16	13.16	≥6	7.16	PASS
	LTE Band 66	20M	QPSK	1	0	132322	AMR NB 12.2kbps	2N	79.26	9.26	≥6	3.26	PASS
	LTE Band 66	20M	QPSK	1	0	132322	AMR NB 12.2kbps	8N	83.18	13.18	≥6	7.18	PASS
	LTE Band 66	20M	QPSK	1	0	132322	AMR WB 6.60kbps	2N	79.57	9.57	≥6	3.57	PASS
	LTE Band 66	20M	QPSK	1	0	132322	AMR WB 6.60kbps	8N	83.85	13.85	≥6	7.85	PASS
	LTE Band 66	20M	QPSK	1	0	132322	AMR WB 23.85kbps	2N	79.67	9.67	≥6	3.67	PASS
	LTE Band 66	20M	QPSK	1	0	132322	AMR WB 23.85kbps	8N	83.64	13.64	≥6	7.64	PASS
	LTE Band 66	20M	QPSK	1	0	132322	EVS NB 5.9kbps	2N	79.2	9.2	≥6	3.2	PASS
	LTE Band 66	20M	QPSK	1	0	132322	EVS NB 5.9kbps	8N	83.3	13.3	≥6	7.3	PASS
	LTE Band 66	20M	QPSK	1	0	132322	EVS NB 24.4kbps	2N	78.92	8.92	≥6	2.92	PASS
	LTE Band 66	20M	QPSK	1	0	132322	EVS NB 24.4kbps	8N	83.11	13.11	≥6	7.11	PASS
	LTE Band 66	20M	QPSK	1	0	132322	EVS WB 5.9kbps	2N	79.69	9.69	≥6	3.69	PASS
	LTE Band 66	20M	QPSK	1	0	132322	EVS WB 5.9kbps	8N	83.82	13.82	≥6	7.82	PASS
	LTE Band 66	20M	QPSK	1	0	132322	EVS WB 24.4kbps	2N	79.36	9.36	≥6	3.36	PASS
	LTE Band 66	20M	QPSK	1	0	132322	EVS WB 24.4kbps	8N	83.51	13.51	≥6	7.51	PASS
	LTE Band 66	20M	QPSK	1	0	132322	EVS SWB 9.6kbps	2N	79.67	9.67	≥6	3.67	PASS
	LTE Band 66	20M	QPSK	1	0	132322	EVS SWB 9.6kbps	8N	83.64	13.64	≥6	7.64	PASS
	LTE Band 66	20M	QPSK	1	0	132322	EVS SWB 24.4kbps	2N	79.42	9.42	≥6	3.42	PASS
	LTE Band 66	20M	QPSK	1	0	132322	EVS SWB 24.4kbps	8N	83.66	13.66	≥6	7.66	PASS
	LTE Band 71	20M	QPSK	1	0	133297	AMR NB 4.75kbps	2N	79.15	9.15	≥6	3.15	PASS
	LTE Band 71	20M	QPSK	1	0	133297	AMR NB 4.75kbps	8N	83.23	13.23	≥6	7.23	PASS
	LTE Band 71	20M	QPSK	1	0	133297	AMR NB 12.2kbps	2N	79.09	9.09	≥6	3.09	PASS
	LTE Band 71	20M	QPSK	1	0	133297	AMR NB 12.2kbps	8N	83.19	13.19	≥6	7.19	PASS
	LTE Band 71	20M	QPSK	1	0	133297	AMR WB 6.60kbps	2N	79.62	9.62	≥6	3.62	PASS
	LTE Band 71	20M	QPSK	1	0	133297	AMR WB 6.60kbps	8N	83.75	13.75	≥6	7.75	PASS



Volume Control Evaluation Report

Report No. : HA460412C

	LTE Band 71	20M	QPSK	1	0	133297	AMR WB 23.85kbps	2N	79.58	9.58	≥6	3.58	PASS
	LTE Band 71	20M	QPSK	1	0	133297	AMR WB 23.85kbps	8N	83.88	13.88	≥6	7.88	PASS
	LTE Band 71	20M	QPSK	1	0	133297	EVS NB 5.9kbps	2N	78.95	8.95	≥6	2.95	PASS
	LTE Band 71	20M	QPSK	1	0	133297	EVS NB 5.9kbps	8N	83.38	13.38	≥6	7.38	PASS
	LTE Band 71	20M	QPSK	1	0	133297	EVS NB 24.4kbps	2N	78.88	8.88	≥6	2.88	PASS
	LTE Band 71	20M	QPSK	1	0	133297	EVS NB 24.4kbps	8N	83.12	13.12	≥6	7.12	PASS
	LTE Band 71	20M	QPSK	1	0	133297	EVS WB 5.9kbps	2N	79.52	9.52	≥6	3.52	PASS
	LTE Band 71	20M	QPSK	1	0	133297	EVS WB 5.9kbps	8N	83.63	13.63	≥6	7.63	PASS
	LTE Band 71	20M	QPSK	1	0	133297	EVS WB 24.4kbps	2N	79.33	9.33	≥6	3.33	PASS
	LTE Band 71	20M	QPSK	1	0	133297	EVS WB 24.4kbps	8N	83.57	13.57	≥6	7.57	PASS
	LTE Band 71	20M	QPSK	1	0	133297	EVS SWB 9.6kbps	2N	79.56	9.56	≥6	3.56	PASS
	LTE Band 71	20M	QPSK	1	0	133297	EVS SWB 9.6kbps	8N	83.91	13.91	≥6	7.91	PASS
	LTE Band 71	20M	QPSK	1	0	133297	EVS SWB 24.4kbps	2N	79.47	9.47	≥6	3.47	PASS
	LTE Band 71	20M	QPSK	1	0	133297	EVS SWB 24.4kbps	8N	83.88	13.88	≥6	7.88	PASS

<WLAN>

HAC (Volume control) Test Record						Receive Volume Control Performance				
Plot No.	Air Interface	Modulation / Mode	Channel	Audio Codec	Mounting Force (N)	Measured dBSPL Level	Conversational Gain (Measured dBSPL Level – 70 dBSPL) (dB)	Limit (dB)	Margin to Limit (dB)	PASS/FAIL
	WLAN2.4GHz	802.11b 1Mbps	6	AMR NB 4.75kbps	2N	78.94	8.94	≥6	2.94	PASS
	WLAN2.4GHz	802.11b 1Mbps	6	AMR NB 4.75kbps	8N	82.88	12.88	≥6	6.88	PASS
	WLAN2.4GHz	802.11b 1Mbps	6	AMR NB 12.2kbps	2N	78.95	8.95	≥6	2.95	PASS
	WLAN2.4GHz	802.11b 1Mbps	6	AMR NB 12.2kbps	8N	82.87	12.87	≥6	6.87	PASS
	WLAN2.4GHz	802.11b 1Mbps	6	AMR WB 6.60kbps	2N	79.59	9.59	≥6	3.59	PASS
	WLAN2.4GHz	802.11b 1Mbps	6	AMR WB 6.60kbps	8N	83.47	13.47	≥6	7.47	PASS
	WLAN2.4GHz	802.11b 1Mbps	6	AMR WB 23.85kbps	2N	79.53	9.53	≥6	3.53	PASS
	WLAN2.4GHz	802.11b 1Mbps	6	AMR WB 23.85kbps	8N	83.64	13.64	≥6	7.64	PASS
	WLAN2.4GHz	802.11b 1Mbps	6	EVS NB 5.9kbps	2N	78.93	8.93	≥6	2.93	PASS
	WLAN2.4GHz	802.11b 1Mbps	6	EVS NB 5.9kbps	8N	82.99	12.99	≥6	6.99	PASS
	WLAN2.4GHz	802.11b 1Mbps	6	EVS NB 24.4kbps	2N	78.72	8.72	≥6	2.72	PASS
	WLAN2.4GHz	802.11b 1Mbps	6	EVS NB 24.4kbps	8N	82.74	12.74	≥6	6.74	PASS
	WLAN2.4GHz	802.11b 1Mbps	6	EVS WB 5.9kbps	2N	79.45	9.45	≥6	3.45	PASS
	WLAN2.4GHz	802.11b 1Mbps	6	EVS WB 5.9kbps	8N	83.4	13.4	≥6	7.4	PASS
	WLAN2.4GHz	802.11b 1Mbps	6	EVS WB 24.4kbps	2N	79.32	9.32	≥6	3.32	PASS
	WLAN2.4GHz	802.11b 1Mbps	6	EVS WB 24.4kbps	8N	83.3	13.3	≥6	7.3	PASS
	WLAN2.4GHz	802.11b 1Mbps	6	EVS SWB 9.6kbps	2N	79.38	9.38	≥6	3.38	PASS
	WLAN2.4GHz	802.11b 1Mbps	6	EVS SWB 9.6kbps	8N	83.63	13.63	≥6	7.63	PASS
	WLAN2.4GHz	802.11b 1Mbps	6	EVS SWB 24.4kbps	2N	79.61	9.61	≥6	3.61	PASS
	WLAN2.4GHz	802.11b 1Mbps	6	EVS SWB 24.4kbps	8N	83.43	13.43	≥6	7.43	PASS
	WLAN5GHz	802.11a 6Mbps	40	AMR NB 4.75kbps	2N	77.61	7.61	≥6	1.61	PASS
	WLAN5GHz	802.11a 6Mbps	40	AMR NB 4.75kbps	8N	81.17	11.17	≥6	5.17	PASS
	WLAN5GHz	802.11a 6Mbps	40	AMR NB 12.2kbps	2N	77.58	7.58	≥6	1.58	PASS
	WLAN5GHz	802.11a 6Mbps	40	AMR NB 12.2kbps	8N	81.2	11.2	≥6	5.2	PASS
	WLAN5GHz	802.11a 6Mbps	40	AMR WB 6.60kbps	2N	77.6	7.6	≥6	1.6	PASS
	WLAN5GHz	802.11a 6Mbps	40	AMR WB 6.60kbps	8N	81.37	11.37	≥6	5.37	PASS
	WLAN5GHz	802.11a 6Mbps	40	AMR WB 23.85kbps	2N	77.56	7.56	≥6	1.56	PASS
	WLAN5GHz	802.11a 6Mbps	40	AMR WB 23.85kbps	8N	81.36	11.36	≥6	5.36	PASS
	WLAN5GHz	802.11a 6Mbps	40	EVS NB 5.9kbps	2N	77.69	7.69	≥6	1.69	PASS
	WLAN5GHz	802.11a 6Mbps	40	EVS NB 5.9kbps	8N	81.32	11.32	≥6	5.32	PASS
07	WLAN5GHz	802.11a 6Mbps	40	EVS NB 24.4kbps	2N	77.4	7.4	≥6	1.4	PASS
08	WLAN5GHz	802.11a 6Mbps	40	EVS NB 24.4kbps	8N	81.1	11.1	≥6	5.1	PASS
	WLAN5GHz	802.11a 6Mbps	40	EVS WB 5.9kbps	2N	77.62	7.62	≥6	1.62	PASS
	WLAN5GHz	802.11a 6Mbps	40	EVS WB 5.9kbps	8N	81.34	11.34	≥6	5.34	PASS



Volume Control Evaluation Report

Report No. : HA460412C

	WLAN5GHz	802.11a 6Mbps	40	EVS WB 24.4kbps	2N	77.77	7.77	≥6	1.77	PASS
	WLAN5GHz	802.11a 6Mbps	40	EVS WB 24.4kbps	8N	81.48	11.48	≥6	5.48	PASS
	WLAN5GHz	802.11a 6Mbps	40	EVS SWB 9.6kbps	2N	77.68	7.68	≥6	1.68	PASS
	WLAN5GHz	802.11a 6Mbps	40	EVS SWB 9.6kbps	8N	81.42	11.42	≥6	5.42	PASS
	WLAN5GHz	802.11a 6Mbps	40	EVS SWB 24.4kbps	2N	77.45	7.45	≥6	1.45	PASS
	WLAN5GHz	802.11a 6Mbps	40	EVS SWB 24.4kbps	8N	81.37	11.37	≥6	5.37	PASS
	WLAN5GHz	802.11a 6Mbps	60	AMR NB 4.75kbps	2N	78.65	8.65	≥6	2.65	PASS
	WLAN5GHz	802.11a 6Mbps	60	AMR NB 4.75kbps	8N	82.47	12.47	≥6	6.47	PASS
	WLAN5GHz	802.11a 6Mbps	60	AMR NB 12.2kbps	2N	78.83	8.83	≥6	2.83	PASS
	WLAN5GHz	802.11a 6Mbps	60	AMR NB 12.2kbps	8N	82.38	12.38	≥6	6.38	PASS
	WLAN5GHz	802.11a 6Mbps	60	AMR WB 6.60kbps	2N	79.55	9.55	≥6	3.55	PASS
	WLAN5GHz	802.11a 6Mbps	60	AMR WB 6.60kbps	8N	82.99	12.99	≥6	6.99	PASS
	WLAN5GHz	802.11a 6Mbps	60	AMR WB 23.85kbps	2N	79.47	9.47	≥6	3.47	PASS
	WLAN5GHz	802.11a 6Mbps	60	AMR WB 23.85kbps	8N	82.91	12.91	≥6	6.91	PASS
	WLAN5GHz	802.11a 6Mbps	60	EVS NB 5.9kbps	2N	78.8	8.8	≥6	2.8	PASS
	WLAN5GHz	802.11a 6Mbps	60	EVS NB 5.9kbps	8N	82.6	12.6	≥6	6.6	PASS
	WLAN5GHz	802.11a 6Mbps	60	EVS NB 24.4kbps	2N	78.55	8.55	≥6	2.55	PASS
	WLAN5GHz	802.11a 6Mbps	60	EVS NB 24.4kbps	8N	82.28	12.28	≥6	6.28	PASS
	WLAN5GHz	802.11a 6Mbps	60	EVS WB 5.9kbps	2N	79.64	9.64	≥6	3.64	PASS
	WLAN5GHz	802.11a 6Mbps	60	EVS WB 5.9kbps	8N	83.06	13.06	≥6	7.06	PASS
	WLAN5GHz	802.11a 6Mbps	60	EVS WB 24.4kbps	2N	79.39	9.39	≥6	3.39	PASS
	WLAN5GHz	802.11a 6Mbps	60	EVS WB 24.4kbps	8N	82.86	12.86	≥6	6.86	PASS
	WLAN5GHz	802.11a 6Mbps	60	EVS SWB 9.6kbps	2N	79.45	9.45	≥6	3.45	PASS
	WLAN5GHz	802.11a 6Mbps	60	EVS SWB 9.6kbps	8N	83.11	13.11	≥6	7.11	PASS
	WLAN5GHz	802.11a 6Mbps	60	EVS SWB 24.4kbps	2N	79.47	9.47	≥6	3.47	PASS
	WLAN5GHz	802.11a 6Mbps	60	EVS SWB 24.4kbps	8N	83.05	13.05	≥6	7.05	PASS
	WLAN5GHz	802.11a 6Mbps	116	AMR NB 4.75kbps	2N	78.87	8.87	≥6	2.87	PASS
	WLAN5GHz	802.11a 6Mbps	116	AMR NB 4.75kbps	8N	82.75	12.75	≥6	6.75	PASS
	WLAN5GHz	802.11a 6Mbps	116	AMR NB 12.2kbps	2N	78.81	8.81	≥6	2.81	PASS
	WLAN5GHz	802.11a 6Mbps	116	AMR NB 12.2kbps	8N	82.7	12.7	≥6	6.7	PASS
	WLAN5GHz	802.11a 6Mbps	116	AMR WB 6.60kbps	2N	79.61	9.61	≥6	3.61	PASS
	WLAN5GHz	802.11a 6Mbps	116	AMR WB 6.60kbps	8N	82.67	12.67	≥6	6.67	PASS
	WLAN5GHz	802.11a 6Mbps	116	AMR WB 23.85kbps	2N	79.65	9.65	≥6	3.65	PASS
	WLAN5GHz	802.11a 6Mbps	116	AMR WB 23.85kbps	8N	82.77	12.77	≥6	6.77	PASS
	WLAN5GHz	802.11a 6Mbps	116	EVS NB 5.9kbps	2N	79.03	9.03	≥6	3.03	PASS
	WLAN5GHz	802.11a 6Mbps	116	EVS NB 5.9kbps	8N	82.73	12.73	≥6	6.73	PASS
	WLAN5GHz	802.11a 6Mbps	116	EVS NB 24.4kbps	2N	78.74	8.74	≥6	2.74	PASS
	WLAN5GHz	802.11a 6Mbps	116	EVS NB 24.4kbps	8N	82.5	12.5	≥6	6.5	PASS
	WLAN5GHz	802.11a 6Mbps	116	EVS WB 5.9kbps	2N	79.39	9.39	≥6	3.39	PASS
	WLAN5GHz	802.11a 6Mbps	116	EVS WB 5.9kbps	8N	82.84	12.84	≥6	6.84	PASS
	WLAN5GHz	802.11a 6Mbps	116	EVS WB 24.4kbps	2N	79.31	9.31	≥6	3.31	PASS
	WLAN5GHz	802.11a 6Mbps	116	EVS WB 24.4kbps	8N	82.89	12.89	≥6	6.89	PASS
	WLAN5GHz	802.11a 6Mbps	116	EVS SWB 9.6kbps	2N	79.55	9.55	≥6	3.55	PASS
	WLAN5GHz	802.11a 6Mbps	116	EVS SWB 9.6kbps	8N	82.68	12.68	≥6	6.68	PASS
	WLAN5GHz	802.11a 6Mbps	116	EVS SWB 24.4kbps	2N	79.49	9.49	≥6	3.49	PASS
	WLAN5GHz	802.11a 6Mbps	116	EVS SWB 24.4kbps	8N	82.66	12.66	≥6	6.66	PASS
	WLAN5GHz	802.11a 6Mbps	157	AMR NB 4.75kbps	2N	78.67	8.67	≥6	2.67	PASS
	WLAN5GHz	802.11a 6Mbps	157	AMR NB 4.75kbps	8N	82.61	12.61	≥6	6.61	PASS
	WLAN5GHz	802.11a 6Mbps	157	AMR NB 12.2kbps	2N	78.64	8.64	≥6	2.64	PASS
	WLAN5GHz	802.11a 6Mbps	157	AMR NB 12.2kbps	8N	82.67	12.67	≥6	6.67	PASS
	WLAN5GHz	802.11a 6Mbps	157	AMR WB 6.60kbps	2N	79.64	9.64	≥6	3.64	PASS
	WLAN5GHz	802.11a 6Mbps	157	AMR WB 6.60kbps	8N	83.31	13.31	≥6	7.31	PASS
	WLAN5GHz	802.11a 6Mbps	157	AMR WB 23.85kbps	2N	79.72	9.72	≥6	3.72	PASS
	WLAN5GHz	802.11a 6Mbps	157	AMR WB 23.85kbps	8N	83.12	13.12	≥6	7.12	PASS
	WLAN5GHz	802.11a 6Mbps	157	EVS NB 5.9kbps	2N	78.82	8.82	≥6	2.82	PASS
	WLAN5GHz	802.11a 6Mbps	157	EVS NB 5.9kbps	8N	82.67	12.67	≥6	6.67	PASS



Volume Control Evaluation Report

Report No. : HA460412C

	WLAN5GHz	802.11a 6Mbps	157	EVS NB 24.4kbps	2N	78.57	8.57	≥6	2.57	PASS
	WLAN5GHz	802.11a 6Mbps	157	EVS NB 24.4kbps	8N	82.42	12.42	≥6	6.42	PASS
	WLAN5GHz	802.11a 6Mbps	157	EVS WB 5.9kbps	2N	79.73	9.73	≥6	3.73	PASS
	WLAN5GHz	802.11a 6Mbps	157	EVS WB 5.9kbps	8N	83.33	13.33	≥6	7.33	PASS
	WLAN5GHz	802.11a 6Mbps	157	EVS WB 24.4kbps	2N	79.43	9.43	≥6	3.43	PASS
	WLAN5GHz	802.11a 6Mbps	157	EVS WB 24.4kbps	8N	83	13	≥6	7	PASS
	WLAN5GHz	802.11a 6Mbps	157	EVS SWB 9.6kbps	2N	79.59	9.59	≥6	3.59	PASS
	WLAN5GHz	802.11a 6Mbps	157	EVS SWB 9.6kbps	8N	83.07	13.07	≥6	7.07	PASS
	WLAN5GHz	802.11a 6Mbps	157	EVS SWB 24.4kbps	2N	79.49	9.49	≥6	3.49	PASS
	WLAN5GHz	802.11a 6Mbps	157	EVS SWB 24.4kbps	8N	83.3	13.3	≥6	7.3	PASS

Test Engineer : Martin Li, Varus Wang, Light Wang, Ricky Gu

11. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances. Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %.

The judgment of conformity in the report is based on the measurement results excluding the measurement uncertainty.

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Component	Standard uncertainty (dB)	U^2 (%)
Generator Accuracy To enable harmonic distortion measurements to 0.1%, the generator distortion must be <0.05%. This is equivalent to a standard uncertainty of 0.043 dB.	0.043	0.25
Ear Simulator Pressure Sensitivity (incl. Measurement Mic.) The uncertainty of the ear simulator as per the standards and quoted on its calibration certificate is 0.3 dB with a coverage factor of $k = 2$. This is equivalent to a standard uncertainty of $0.3/2 = 0.15$ dB.	0.15	3.03
Microphone Preamplifier The manufacturer quotes the preamp to be within ± 0.02 dB with a 95% probability or 2σ . This is equivalent to a standard uncertainty of $0.02/2 = 0.01$ dB.	0.01	0.01
Analysis System / RMS Detector Typical measurement system detector accuracy is 0.1 dB with a coverage factor of $k = 2$. This is equivalent to a standard uncertainty of $0.1/2 = 0.05$ dB.	0.05	0.33
Effect of Positioning on Mid-Band Sensitivity For a handset, with the HATS positioning jig, the typical standard deviation estimated from a statistically significant number of measurements is ± 2 dB. This is equivalent to a standard uncertainty of 2 dB.	2	670.42
Time Varying Effects of the Mouth Simulator for Send & Sidetone For a receive measurement on a handset, the mouth simulator is not used (its uncertainty is zero), The standard uncertainty of 0 dB	0	0.00
Total Standard Uncertainty (%)	25.96	
UMAX ($k = 2$) (%)	51.9	
UMAX ($k = 2$) (dB)	3.6	

Uncertainty Budget of Volume Control assessment

12. References

- [1] ANSI C63.19:2019, "American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids", Aug. 2019.
- [2] ANSI/TIA-5050-2018, "Receive Volume Control Requirements for Wireless (Mobile) Devices", Jan. 2018
- [3] FCC KDB 285076 D01v06r04, "Equipment Authorization Guidance for Hearing Aid Compatibility", Sep. 2023.
- [4] FCC KDB 285076 D04 Volume Control v02, "GUIDANCE FOR PERFORMING VOLUME CONTROL MEASUREMENTS ON MOBILE HANDSETS", Sep. 2023
- [5] FCC KDB 285076 D05 HAC Waiver DA 23-914 v01, "HAC COMPLIANCE UNDER WAIVER DA 23-914", Sep. 2023
- [6] Head Acoustic System Handbook



Appendix A. Plots of Volume Control Evaluation Results

The plots are shown as follows.

Measurement Protocol

Measurement Object	LTE Band 71_20M_QPSK_1RB_0Offset_EVS WB 24.4kbps_Ch133297_2N
--------------------	--

Project	460412
Report Generation Date	24/06/26 7:06
Responsible Person	AC01-KS

Status Overview


SMD	Status	Single Value Description	Single Value	Object
Overall Receive Delay WB	Done	Delay (Cross) [ms]	134.8	LTE Band 71_20M_QPSK_1RB_0Offset_EV S WB 24.4kbps_Ch133297_2N
5.1b Receive Volume Control Performance 2N WB	Ok	Speech Level [dB[SPL]]	79.33	LTE Band 71_20M_QPSK_1RB_0Offset_EV S WB 24.4kbps_Ch133297_2N
5.2 RCV Distortion and Noise - 250 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	25.65	LTE Band 71_20M_QPSK_1RB_0Offset_EV S WB 24.4kbps_Ch133297_2N
5.2 RCV Distortion and Noise - 315 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	26.89	LTE Band 71_20M_QPSK_1RB_0Offset_EV S WB 24.4kbps_Ch133297_2N
5.2 RCV Distortion and Noise - 400 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	30.23	LTE Band 71_20M_QPSK_1RB_0Offset_EV S WB 24.4kbps_Ch133297_2N
5.2 RCV Distortion and Noise - 500 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	30.47	LTE Band 71_20M_QPSK_1RB_0Offset_EV S WB 24.4kbps_Ch133297_2N
5.2 RCV Distortion and Noise - 630 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	35.33	LTE Band 71_20M_QPSK_1RB_0Offset_EV S WB 24.4kbps_Ch133297_2N
5.2 RCV Distortion and Noise - 800 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	33.09	LTE Band 71_20M_QPSK_1RB_0Offset_EV S WB 24.4kbps_Ch133297_2N
5.2 RCV Distortion and Noise - 1000 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	38.11	LTE Band 71_20M_QPSK_1RB_0Offset_EV S WB 24.4kbps_Ch133297_2N
5.2 RCV Distortion and Noise - 1250 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	22.72	LTE Band 71_20M_QPSK_1RB_0Offset_EV S WB 24.4kbps_Ch133297_2N
5.2 RCV Distortion and Noise - 1600 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	38.44	LTE Band 71_20M_QPSK_1RB_0Offset_EV S WB 24.4kbps_Ch133297_2N
5.2 RCV Distortion and Noise - 2000 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	24.77	LTE Band 71_20M_QPSK_1RB_0Offset_EV S WB 24.4kbps_Ch133297_2N
5.2 RCV Distortion and Noise - 2500 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	32.30	LTE Band 71_20M_QPSK_1RB_0Offset_EV S WB 24.4kbps_Ch133297_2N
5.2 RCV Distortion and Noise - 3150 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	34.40	LTE Band 71_20M_QPSK_1RB_0Offset_EV S WB 24.4kbps_Ch133297_2N
5.2 RCV Distortion and Noise - 4000 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	43.86	LTE Band 71_20M_QPSK_1RB_0Offset_EV S WB 24.4kbps_Ch133297_2N
5.2 RCV Distortion and Noise - 5000 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	39.35	LTE Band 71_20M_QPSK_1RB_0Offset_EV S WB 24.4kbps_Ch133297_2N
Report - Receive Distortion	Ok	Minimum SDNR [dB]	22.72	LTE Band

and Noise (Conversational Gain)		, (occured at 1250Hz)		71_20M_QPSK_1RB_0Offset_EVS WB 24.4kbps_Ch133297_2N
5.3 Frequency Response 2N FF	Ok	Min. dist. to tolerance scheme [dB], 611.7 Hz	2.27	LTE Band 71_20M_QPSK_1RB_0Offset_EVS WB 24.4kbps_Ch133297_2N
5.3 Frequency Response 2N DF	Ok	Min. dist. to tolerance scheme [dB], 4119.5 Hz	1.06	LTE Band 71_20M_QPSK_1RB_0Offset_EVS WB 24.4kbps_Ch133297_2N

Overall Receive Delay WB	6
5.1b Receive Volume Control Performance 2N WB	7
5.2 RCV Distortion and Noise - 250 Hz WB	8
5.2 RCV Distortion and Noise - 315 Hz WB	9
5.2 RCV Distortion and Noise - 400 Hz WB	10
5.2 RCV Distortion and Noise - 500 Hz WB	11
5.2 RCV Distortion and Noise - 630 Hz WB	12
5.2 RCV Distortion and Noise - 800 Hz WB	13
5.2 RCV Distortion and Noise - 1000 Hz WB	14
5.2 RCV Distortion and Noise - 1250 Hz WB	15
5.2 RCV Distortion and Noise - 1600 Hz WB	16
5.2 RCV Distortion and Noise - 2000 Hz WB	17
5.2 RCV Distortion and Noise - 2500 Hz WB	18
5.2 RCV Distortion and Noise - 3150 Hz WB	19
5.2 RCV Distortion and Noise - 4000 Hz WB	20
5.2 RCV Distortion and Noise - 5000 Hz WB	21
Report - Receive Distortion and Noise (Conversational Gain)	22
5.3 Frequency Response 2N FF	23
5.3 Frequency Response 2N DF	24

Overall Receive Delay WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ Preparation - Delay measurement

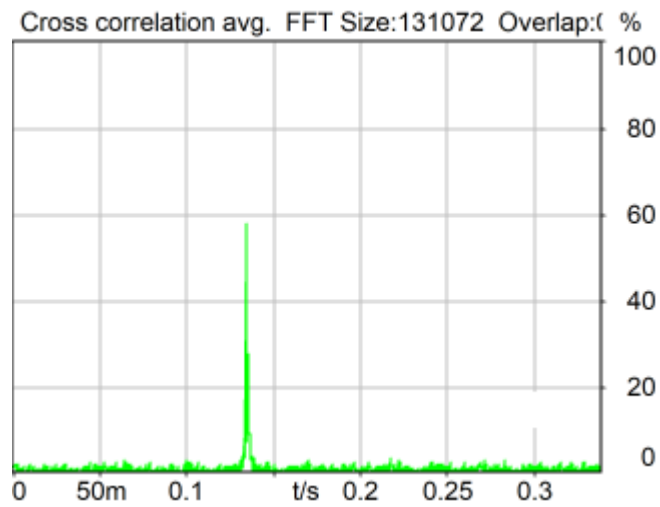


Delay (Cross): 134.8 ms

24/06/26 6:54 ACQUA 5.1.200

5.1b Receive Volume Control Performance 2N WB

TIA-5050 (2018-01) \ Measurements \ Wideband

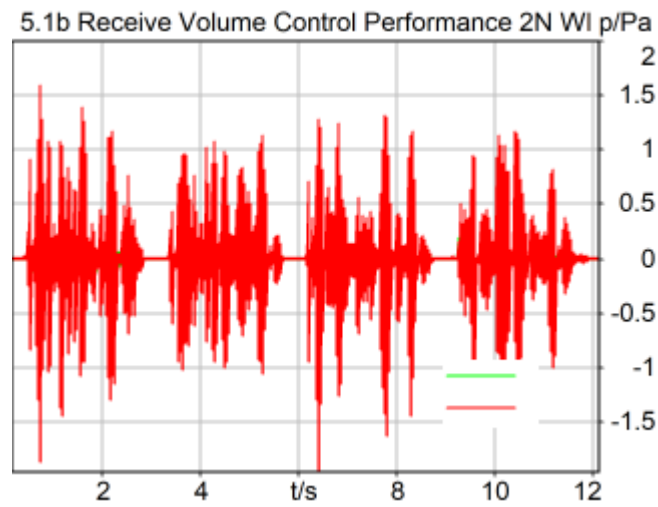


Speech Level RCV: 79.33 dB[SPL], Act.: 83.92% Ok

Ok

24/06/26 6:54 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 250 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

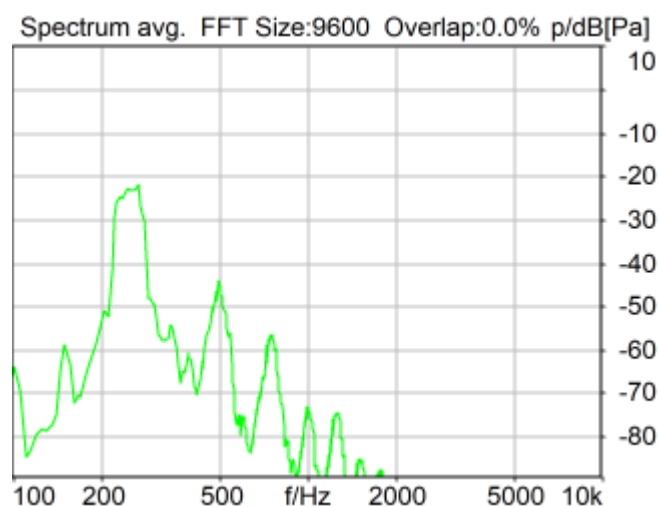


Distortion (Noise) RCV (packed): 25.65 dB (5.22%) Ok

Ok

24/06/26 6:55 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 315 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

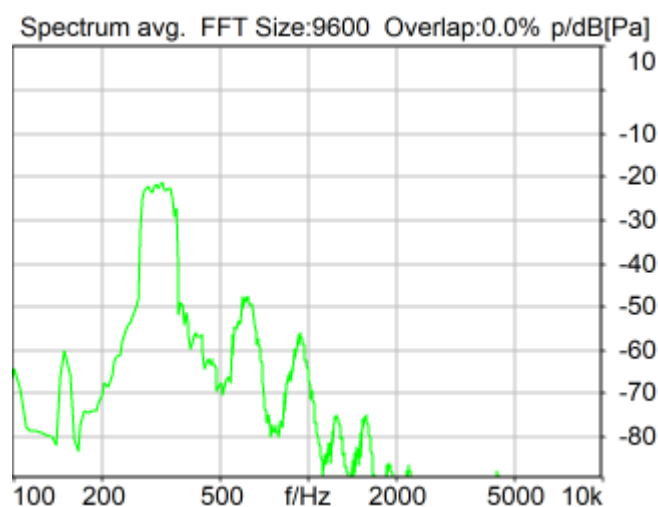


Distortion (Noise) RCV (packed): 26.89 dB (4.53%) Ok

Ok

24/06/26 6:55 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 400 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

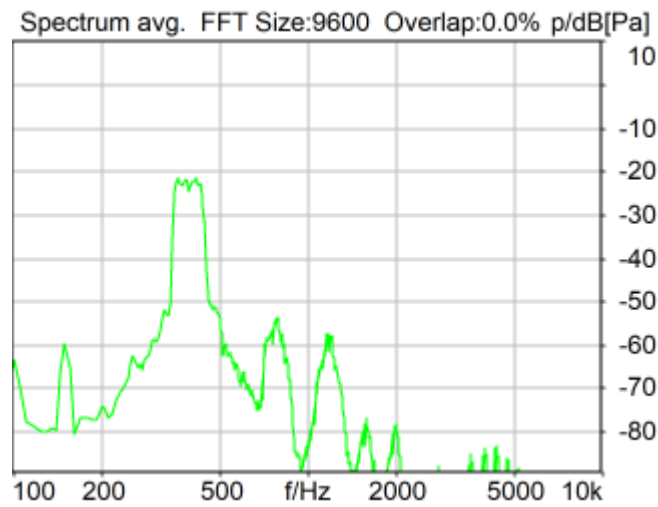


Distortion (Noise) RCV (packed): 30.23 dB (3.08%) Ok

Ok

24/06/26 6:56 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 500 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

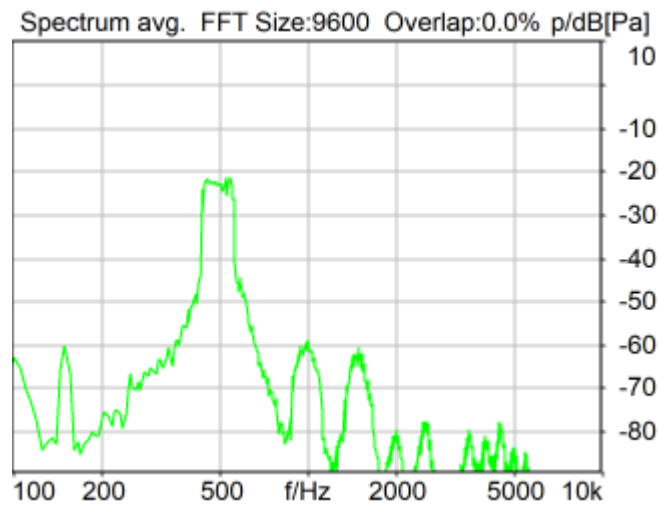


Distortion (Noise) RCV (packed): 30.47 dB (3.00%) Ok

Ok

24/06/26 6:56 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 630 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

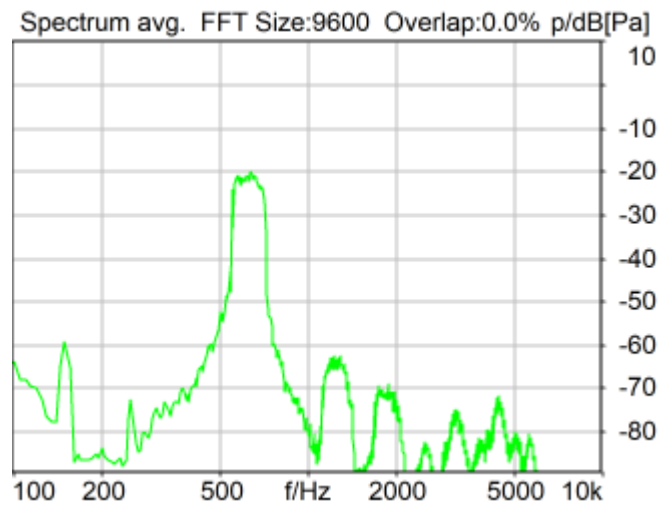


Distortion (Noise) RCV (packed): 35.33 dB (1.71%) Ok

Ok

24/06/26 6:57 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 800 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

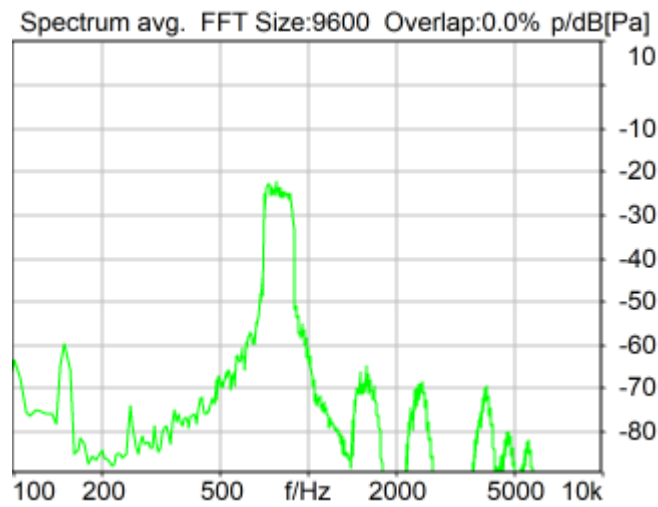


Distortion (Noise) RCV (packed): 33.09 dB (2.22%) Ok

Ok

24/06/26 6:57 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 1000 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

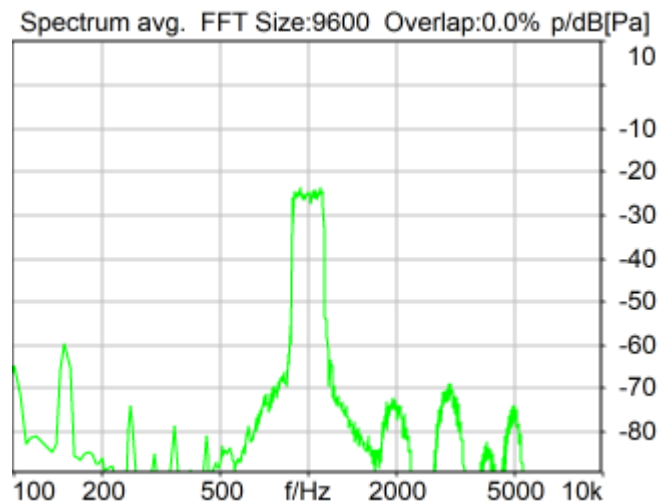


Distortion (Noise) RCV (packed): 38.11 dB (1.24%) Ok

Ok

24/06/26 6:58 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 1250 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

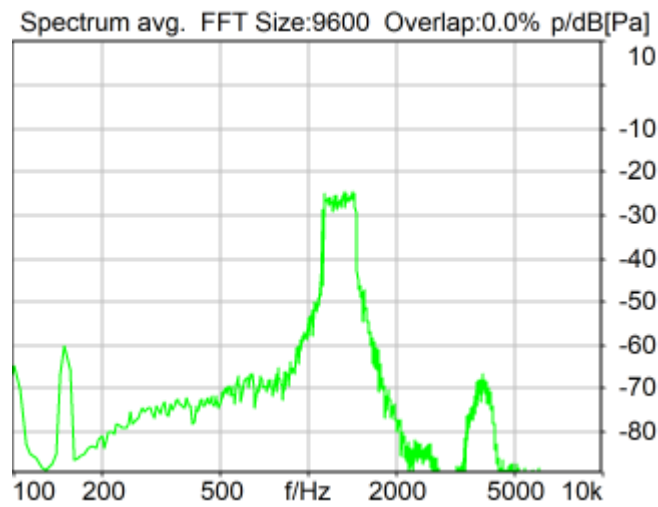


Distortion (Noise) RCV (packed): 22.72 dB (7.31%) Ok

Ok

24/06/26 6:58 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 1600 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

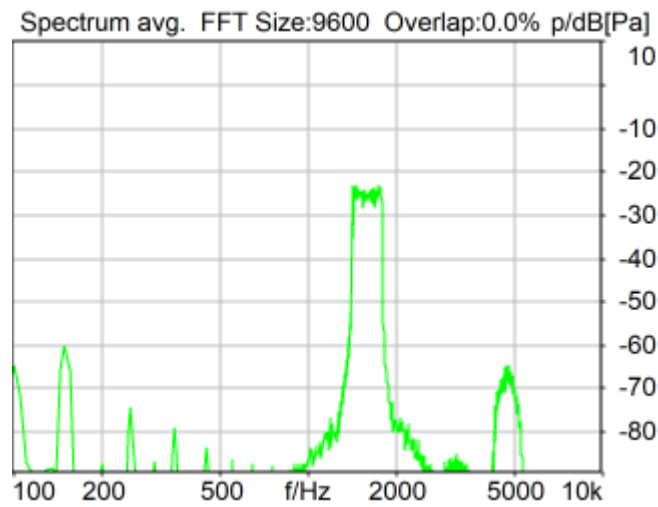


Distortion (Noise) RCV (packed): 38.44 dB (1.20%) Ok

Ok

24/06/26 6:59 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 2000 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

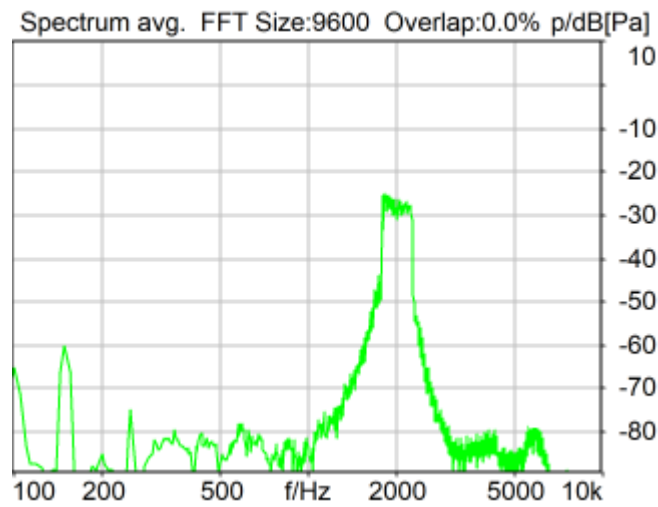


Distortion (Noise) RCV (packed): 24.77 dB (5.77%) Ok

Ok

24/06/26 6:59 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 2500 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

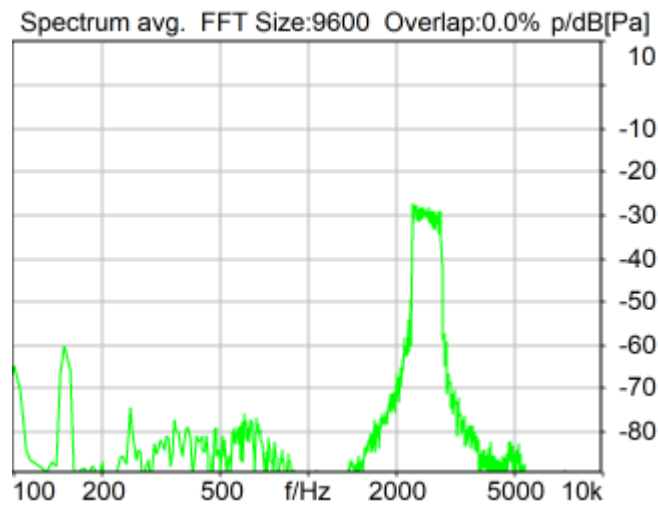


Distortion (Noise) RCV (packed): 32.30 dB (2.43%) Ok

Ok

24/06/26 7:00 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 3150 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

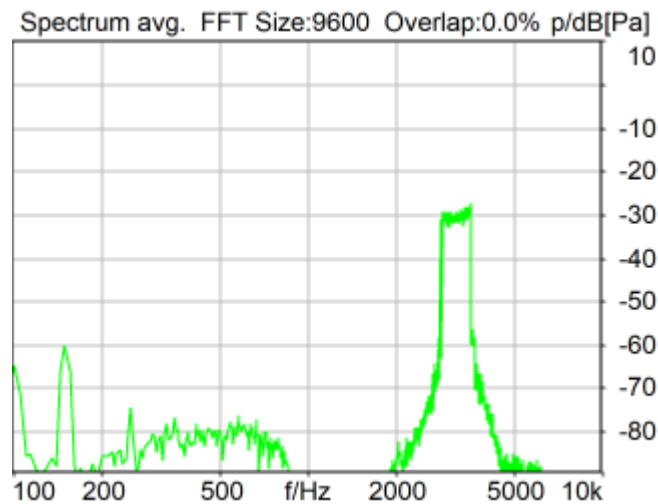


Distortion (Noise) RCV (packed): 34.40 dB (1.90%) Ok

Ok

24/06/26 7:00 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 4000 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

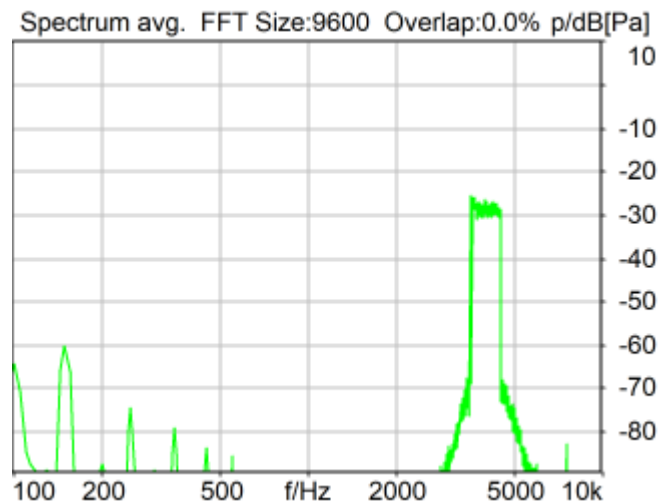


Distortion (Noise) RCV (packed): 43.86 dB (0.64%) Ok

Ok

24/06/26 7:00 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 5000 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

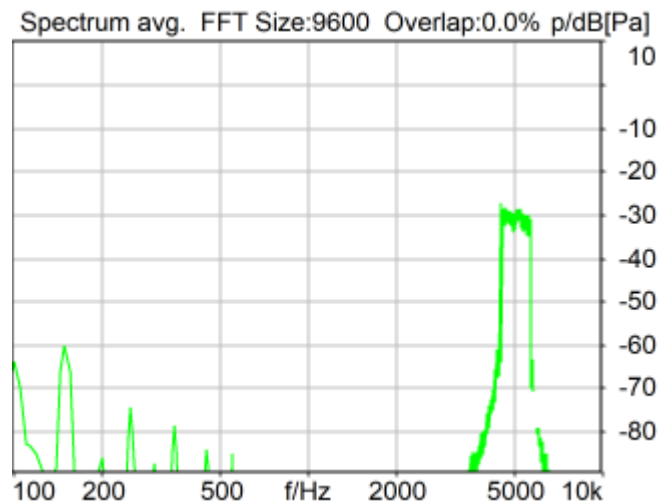

Distortion (Noise) RCV (packed): 39.35 dB (1.08%) Ok

Ok

24/06/26 7:01 ACQUA 5.1.200

Report - Receive Distortion and Noise (Conversational Gain)

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

Region	Frequency	SDNR
1	250Hz	25.65 dB
2	315Hz	26.89 dB
3	400Hz	30.23 dB
4	500Hz	30.47 dB
5	630Hz	35.33 dB
6	800Hz	33.09 dB
7	1000Hz	38.11 dB
8	1250Hz	22.72 dB
9	1600Hz	38.44 dB
10	2000Hz	24.77 dB
11	2500Hz	32.30 dB
12	3150Hz	34.40 dB
13	4000Hz	43.86 dB
14	5000Hz	39.35 dB


All SDNRs were greater than 20.0 dB, requirement was met.

Smallest SDNR was 22.72dB at 1250Hz.

24/06/26 7:05 ACQUA

5.3 Frequency Response 2N FF

TIA-5050 (2018-01) \ Measurements \ Wideband

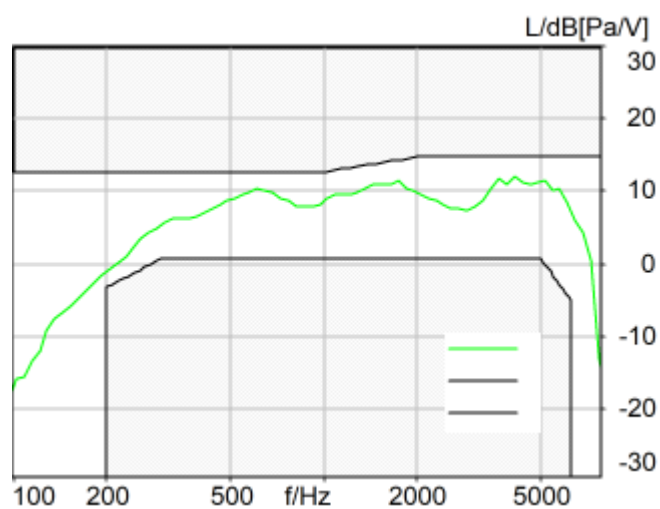


Absolute minimal distance
2.27 dB at 611.7 Hz Ok

Ok

24/06/26 7:05 ACQUA 5.1.200

5.3 Frequency Response 2N DF

TIA-5050 (2018-01) \ Measurements \ Wideband

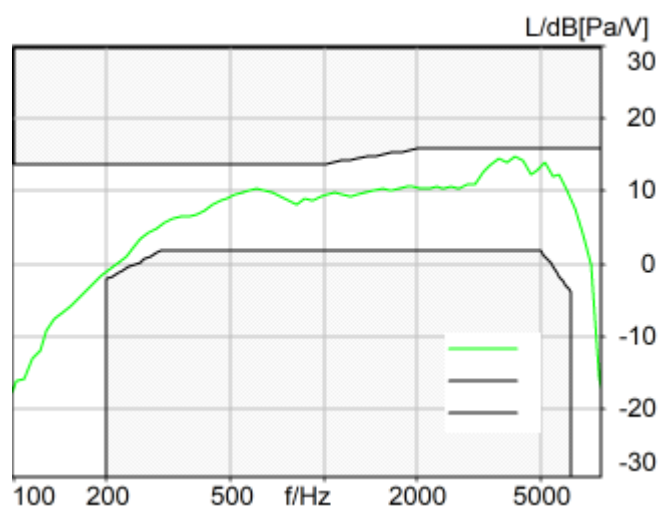

Absolute minimal distance
1.06 dB at 4119.5 Hz Ok

Ok

24/06/26 7:06 ACQUA 5.1.200

Measurement Protocol

Measurement Object	LTE Band 71_20M_QPSK_1RB_0Offset_EVS WB 24.4kbps_Ch133297_8N
--------------------	--

Project	460412
Report Generation Date	24/06/26 7:27
Responsible Person	AC01-KS

Status Overview


SMD	Status	Single Value Description	Single Value	Object
Overall Receive Delay WB	Done	Delay (Cross) [ms]	139.7	LTE Band 71_20M_QPSK_1RB_0Offset_EV S WB 24.4kbps_Ch133297_8N
5.1a Receive Volume Control Performance 8N WB	Ok	Speech Level [dB[SPL]]	83.57	LTE Band 71_20M_QPSK_1RB_0Offset_EV S WB 24.4kbps_Ch133297_8N
5.2 RCV Distortion and Noise - 250 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	25.96	LTE Band 71_20M_QPSK_1RB_0Offset_EV S WB 24.4kbps_Ch133297_8N
5.2 RCV Distortion and Noise - 315 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	27.09	LTE Band 71_20M_QPSK_1RB_0Offset_EV S WB 24.4kbps_Ch133297_8N
5.2 RCV Distortion and Noise - 400 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	30.59	LTE Band 71_20M_QPSK_1RB_0Offset_EV S WB 24.4kbps_Ch133297_8N
5.2 RCV Distortion and Noise - 500 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	32.48	LTE Band 71_20M_QPSK_1RB_0Offset_EV S WB 24.4kbps_Ch133297_8N
5.2 RCV Distortion and Noise - 630 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	36.00	LTE Band 71_20M_QPSK_1RB_0Offset_EV S WB 24.4kbps_Ch133297_8N
5.2 RCV Distortion and Noise - 800 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	35.44	LTE Band 71_20M_QPSK_1RB_0Offset_EV S WB 24.4kbps_Ch133297_8N
5.2 RCV Distortion and Noise - 1000 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	30.57	LTE Band 71_20M_QPSK_1RB_0Offset_EV S WB 24.4kbps_Ch133297_8N
5.2 RCV Distortion and Noise - 1250 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	32.67	LTE Band 71_20M_QPSK_1RB_0Offset_EV S WB 24.4kbps_Ch133297_8N
5.2 RCV Distortion and Noise - 1600 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	26.15	LTE Band 71_20M_QPSK_1RB_0Offset_EV S WB 24.4kbps_Ch133297_8N
5.2 RCV Distortion and Noise - 2000 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	23.53	LTE Band 71_20M_QPSK_1RB_0Offset_EV S WB 24.4kbps_Ch133297_8N
5.2 RCV Distortion and Noise - 2500 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	44.21	LTE Band 71_20M_QPSK_1RB_0Offset_EV S WB 24.4kbps_Ch133297_8N
5.2 RCV Distortion and Noise - 3150 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	43.49	LTE Band 71_20M_QPSK_1RB_0Offset_EV S WB 24.4kbps_Ch133297_8N
5.2 RCV Distortion and Noise - 4000 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	32.89	LTE Band 71_20M_QPSK_1RB_0Offset_EV S WB 24.4kbps_Ch133297_8N
5.2 RCV Distortion and Noise - 5000 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	35.84	LTE Band 71_20M_QPSK_1RB_0Offset_EV S WB 24.4kbps_Ch133297_8N
Report - Receive Distortion	Ok	Minimum SDNR [dB]	23.53	LTE Band

and Noise (Conversational Gain)		, (occured at 2000Hz)		71_20M_QPSK_1RB_0Offset_EVS WB 24.4kbps_Ch133297_8N
5.3 Frequency Response 8N FF	Ok	Min. dist. to tolerance scheme [dB], 611.7 Hz	2.28	LTE Band 71_20M_QPSK_1RB_0Offset_EVS WB 24.4kbps_Ch133297_8N
5.3 Frequency Response 8N DF	Ok	Min. dist. to tolerance scheme [dB], 5143.7 Hz	2.23	LTE Band 71_20M_QPSK_1RB_0Offset_EVS WB 24.4kbps_Ch133297_8N

Overall Receive Delay WB	6
5.1a Receive Volume Control Performance 8N WB	7
5.2 RCV Distortion and Noise - 250 Hz WB	8
5.2 RCV Distortion and Noise - 315 Hz WB	9
5.2 RCV Distortion and Noise - 400 Hz WB	10
5.2 RCV Distortion and Noise - 500 Hz WB	11
5.2 RCV Distortion and Noise - 630 Hz WB	12
5.2 RCV Distortion and Noise - 800 Hz WB	13
5.2 RCV Distortion and Noise - 1000 Hz WB	14
5.2 RCV Distortion and Noise - 1250 Hz WB	15
5.2 RCV Distortion and Noise - 1600 Hz WB	16
5.2 RCV Distortion and Noise - 2000 Hz WB	17
5.2 RCV Distortion and Noise - 2500 Hz WB	18
5.2 RCV Distortion and Noise - 3150 Hz WB	19
5.2 RCV Distortion and Noise - 4000 Hz WB	20
5.2 RCV Distortion and Noise - 5000 Hz WB	21
Report - Receive Distortion and Noise (Conversational Gain)	22
5.3 Frequency Response 8N FF	23
5.3 Frequency Response 8N DF	24

Overall Receive Delay WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ Preparation - Delay measurement

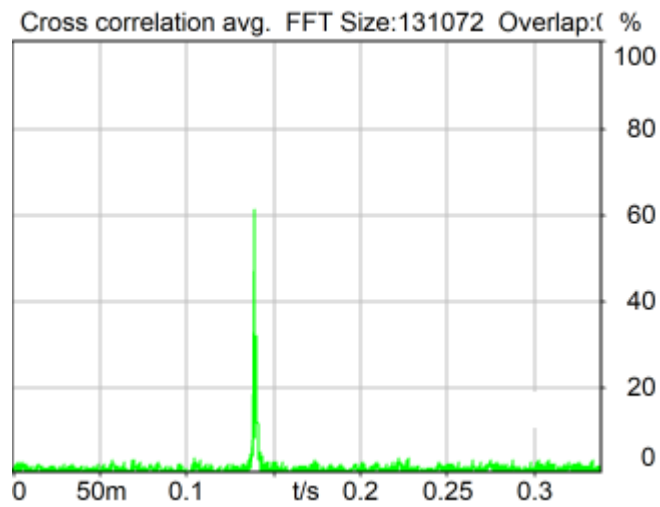


Delay (Cross): 139.7 ms

24/06/26 7:08 ACQUA 5.1.200

5.1a Receive Volume Control Performance 8N WB

TIA-5050 (2018-01) \ Measurements \ Wideband

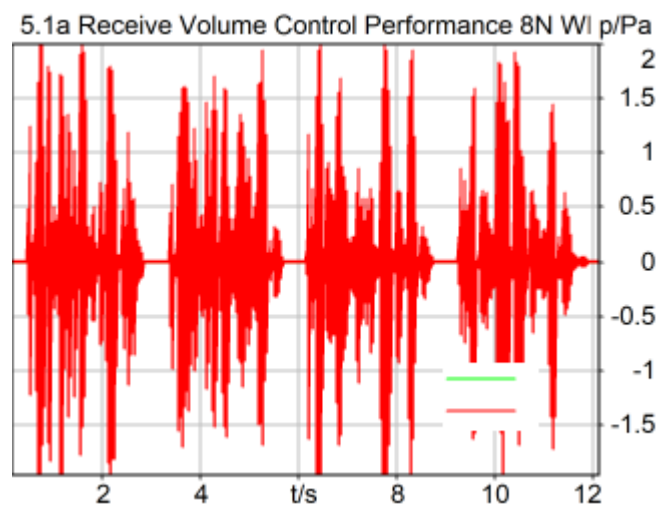


Speech Level RCV: 83.57 dB[SPL], Act.: 83.23% Ok

Ok

24/06/26 7:08 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 250 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

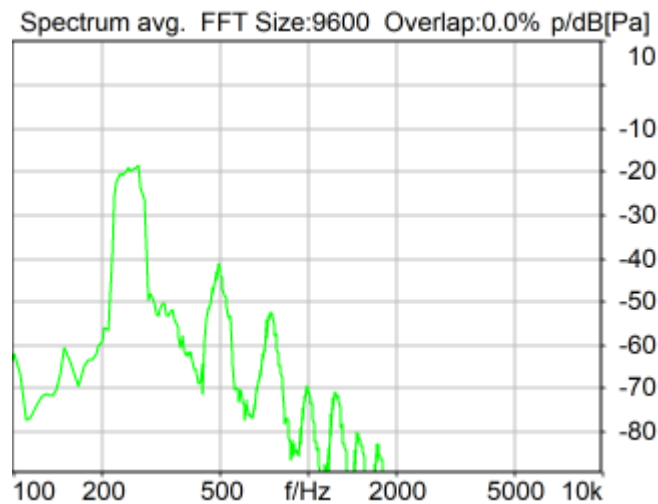


Distortion (Noise) RCV (packed): 25.96 dB (5.04%) Ok

Ok

24/06/26 7:09 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 315 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

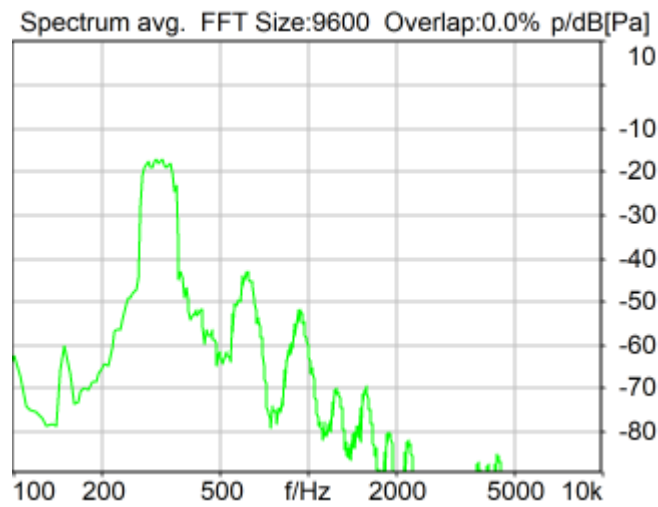


Distortion (Noise) RCV (packed): 27.09 dB (4.42%) Ok

Ok

24/06/26 7:09 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 400 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

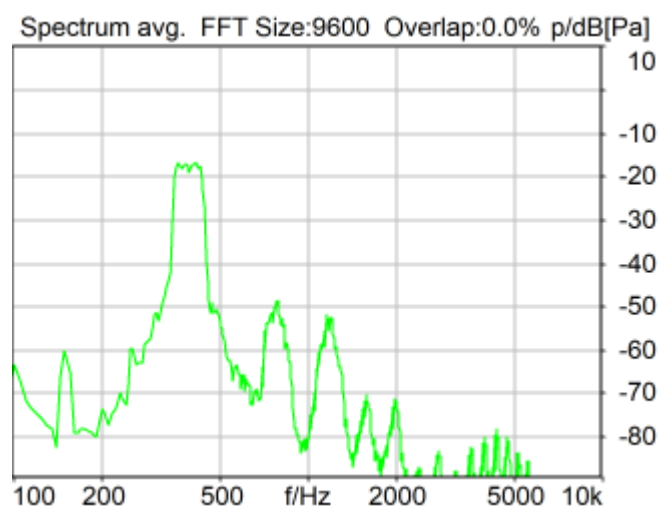


Distortion (Noise) RCV (packed): 30.59 dB (2.95%) Ok

Ok

24/06/26 7:09 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 500 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

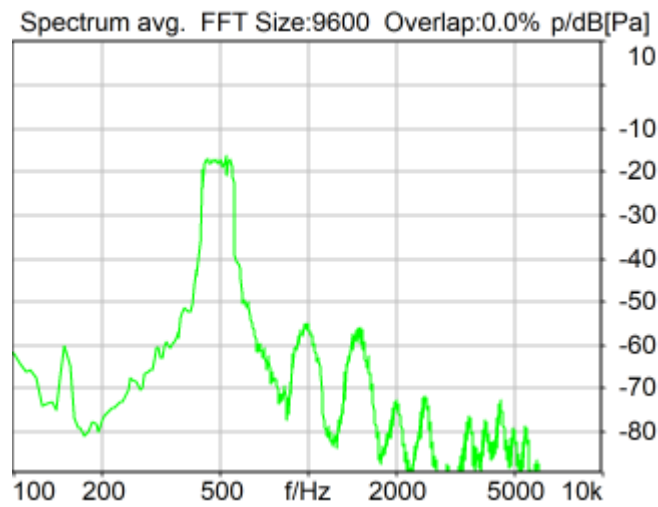


Distortion (Noise) RCV (packed): 32.48 dB (2.38%) Ok

Ok

24/06/26 7:10 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 630 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

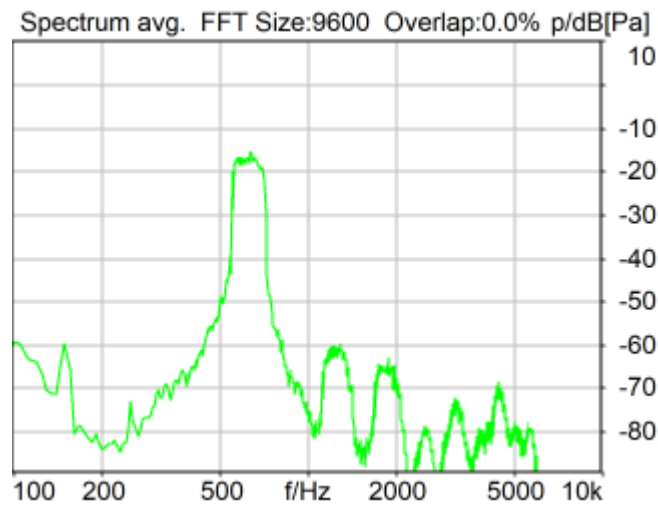


Distortion (Noise) RCV (packed): 36.00 dB (1.59%) Ok

Ok

24/06/26 7:10 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 800 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

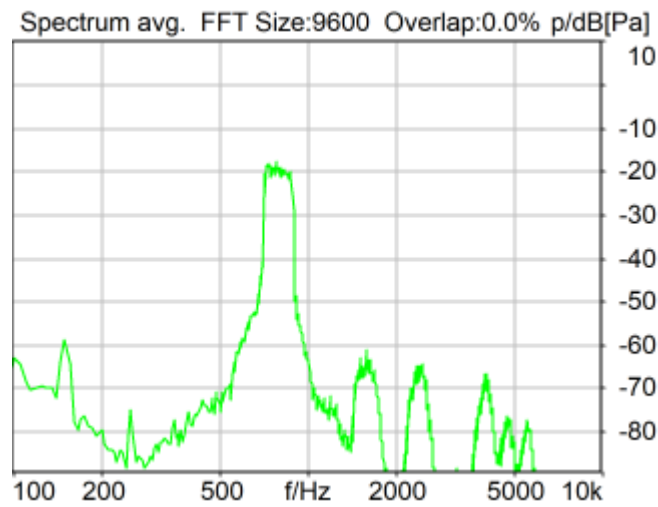


Distortion (Noise) RCV (packed): 35.44 dB (1.69%) Ok

Ok

24/06/26 7:11 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 1000 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

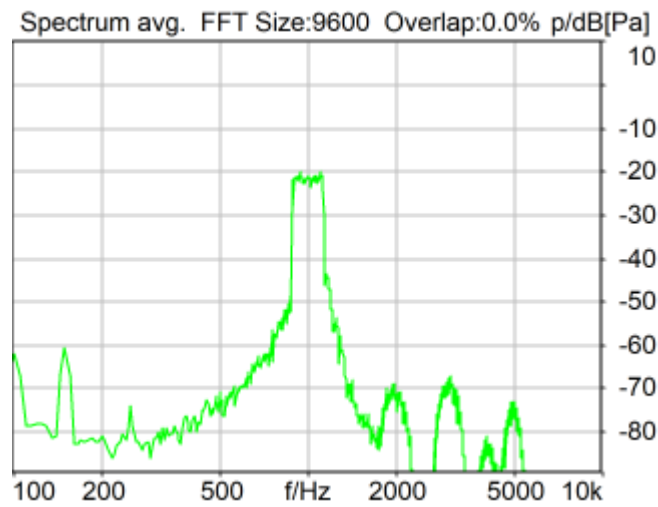


Distortion (Noise) RCV (packed): 30.57 dB (2.96%) Ok

Ok

24/06/26 7:11 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 1250 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

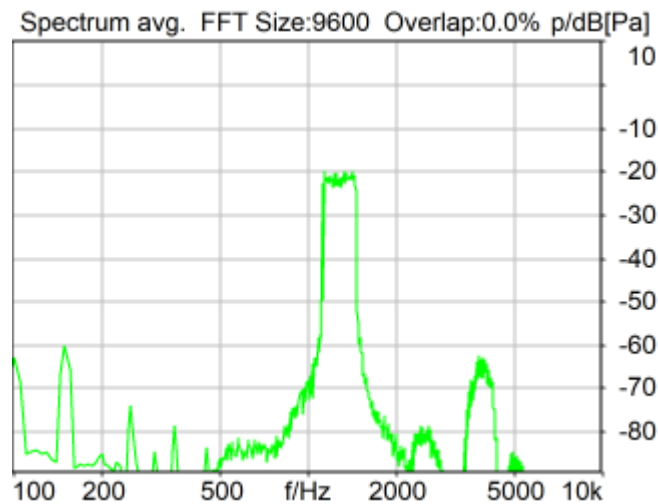


Distortion (Noise) RCV (packed): 32.67 dB (2.33%) Ok

Ok

24/06/26 7:12 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 1600 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

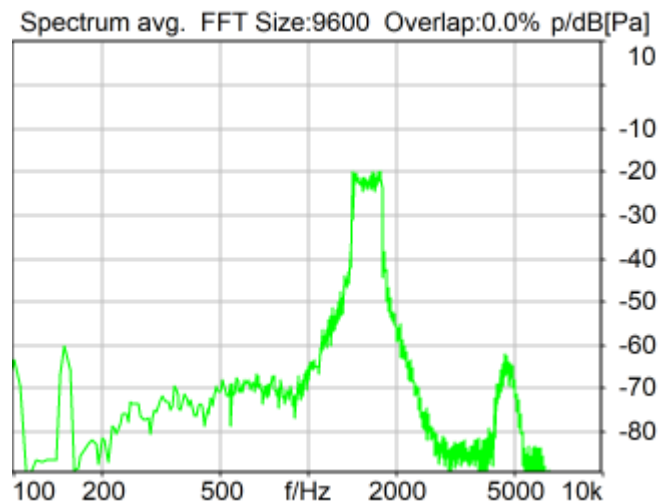


Distortion (Noise) RCV (packed): 26.15 dB (4.93%) Ok

Ok

24/06/26 7:12 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 2000 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

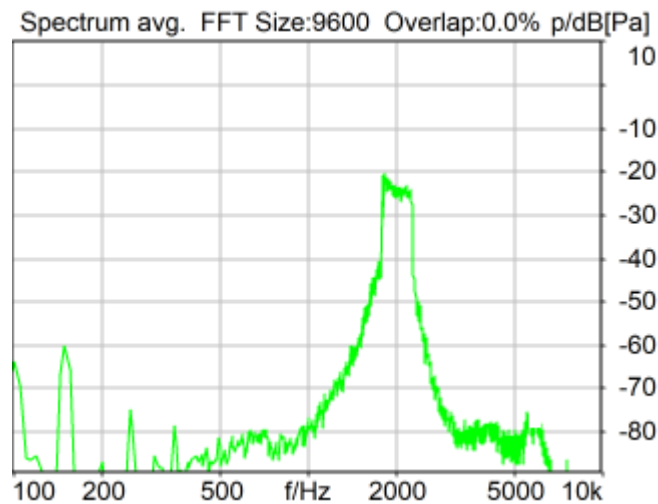


Distortion (Noise) RCV (packed): 23.53 dB (6.66%) Ok

Ok

24/06/26 7:13 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 2500 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

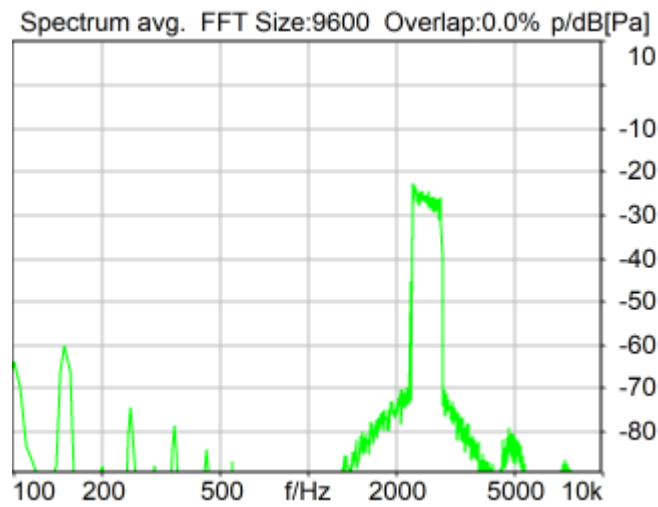


Distortion (Noise) RCV (packed): 44.21 dB (0.62%) Ok

Ok

24/06/26 7:13 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 3150 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

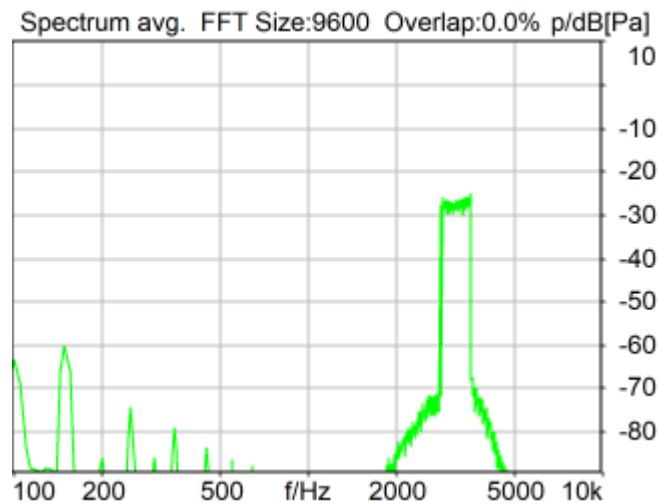


Distortion (Noise) RCV (packed): 43.49 dB (0.67%) Ok

Ok

24/06/26 7:14 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 4000 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

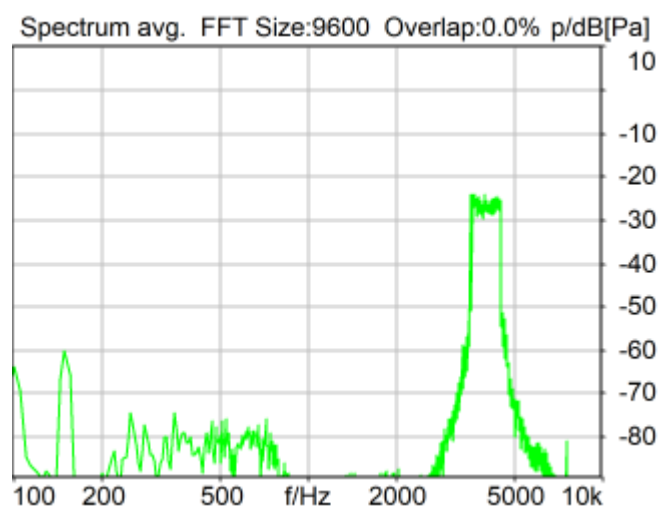


Distortion (Noise) RCV (packed): 32.89 dB (2.27%) Ok

Ok

24/06/26 7:14 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 5000 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

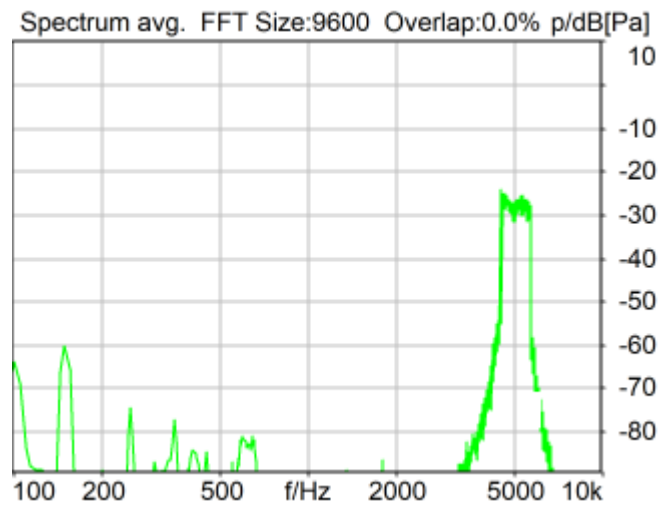

Distortion (Noise) RCV (packed): 35.84 dB (1.61%) Ok

Ok

24/06/26 7:15 ACQUA 5.1.200

Report - Receive Distortion and Noise (Conversational Gain)

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

Region	Frequency	SDNR
1	250Hz	25.96 dB
2	315Hz	27.09 dB
3	400Hz	30.59 dB
4	500Hz	32.48 dB
5	630Hz	36.00 dB
6	800Hz	35.44 dB
7	1000Hz	30.57 dB
8	1250Hz	32.67 dB
9	1600Hz	26.15 dB
10	2000Hz	23.53 dB
11	2500Hz	44.21 dB
12	3150Hz	43.49 dB
13	4000Hz	32.89 dB
14	5000Hz	35.84 dB


All SDNRs were greater than 20.0 dB, requirement was met.

Smallest SDNR was 23.53dB at 2000Hz.

24/06/26 7:26 ACQUA

5.3 Frequency Response 8N FF

TIA-5050 (2018-01) \ Measurements \ Wideband

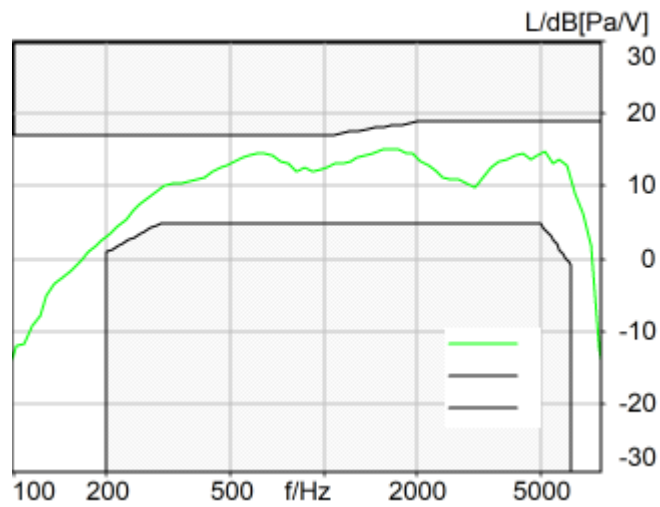


Absolute minimal distance
2.28 dB at 611.7 Hz Ok

Ok

24/06/26 7:26 ACQUA 5.1.200

5.3 Frequency Response 8N DF

TIA-5050 (2018-01) \ Measurements \ Wideband

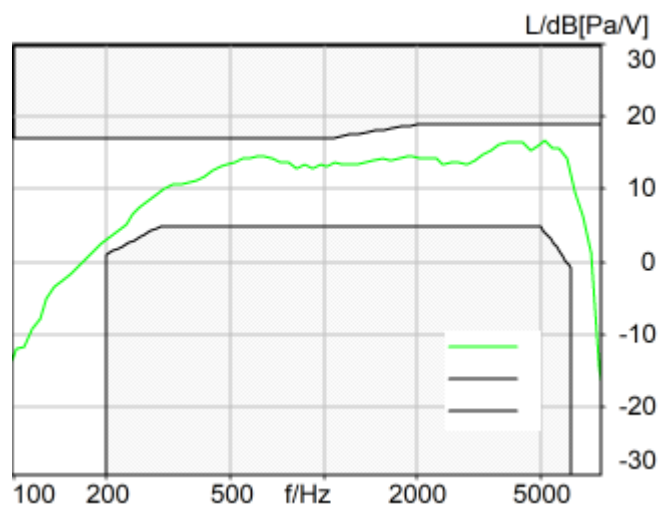

Absolute minimal distance
2.23 dB at 5143.7 Hz Ok

Ok

24/06/26 7:26 ACQUA 5.1.200

Measurement Protocol

Measurement Object	WLAN5GHz_802.11a 6Mbps_EVS WB 24.4kbps_Ch116_2N
--------------------	---

Project	460412
Report Generation Date	24/06/28 23:40
Responsible Person	AC01-KS

Status Overview


SMD	Status	Single Value Description	Single Value	Object
Overall Receive Delay WB	Done	Delay (Cross) [ms]	157.0	WLAN5GHz_802.11a 6Mbps_EVS WB 24. 4kbps_Ch116_2N
5.1b Receive Volume Control Performance 2N WB	Ok	Speech Level [dB[SPL]]	79.31	WLAN5GHz_802.11a 6Mbps_EVS WB 24. 4kbps_Ch116_2N
5.2 RCV Distortion and Noise - 250 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	26.62	WLAN5GHz_802.11a 6Mbps_EVS WB 24. 4kbps_Ch116_2N
5.2 RCV Distortion and Noise - 315 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	26.77	WLAN5GHz_802.11a 6Mbps_EVS WB 24. 4kbps_Ch116_2N
5.2 RCV Distortion and Noise - 400 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	30.39	WLAN5GHz_802.11a 6Mbps_EVS WB 24. 4kbps_Ch116_2N
5.2 RCV Distortion and Noise - 500 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	31.57	WLAN5GHz_802.11a 6Mbps_EVS WB 24. 4kbps_Ch116_2N
5.2 RCV Distortion and Noise - 630 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	33.50	WLAN5GHz_802.11a 6Mbps_EVS WB 24. 4kbps_Ch116_2N
5.2 RCV Distortion and Noise - 800 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	32.37	WLAN5GHz_802.11a 6Mbps_EVS WB 24. 4kbps_Ch116_2N
5.2 RCV Distortion and Noise - 1000 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	36.70	WLAN5GHz_802.11a 6Mbps_EVS WB 24. 4kbps_Ch116_2N
5.2 RCV Distortion and Noise - 1250 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	28.98	WLAN5GHz_802.11a 6Mbps_EVS WB 24. 4kbps_Ch116_2N
5.2 RCV Distortion and Noise - 1600 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	30.66	WLAN5GHz_802.11a 6Mbps_EVS WB 24. 4kbps_Ch116_2N
5.2 RCV Distortion and Noise - 2000 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	24.67	WLAN5GHz_802.11a 6Mbps_EVS WB 24. 4kbps_Ch116_2N
5.2 RCV Distortion and Noise - 2500 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	35.95	WLAN5GHz_802.11a 6Mbps_EVS WB 24. 4kbps_Ch116_2N
5.2 RCV Distortion and Noise - 3150 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	32.51	WLAN5GHz_802.11a 6Mbps_EVS WB 24. 4kbps_Ch116_2N
5.2 RCV Distortion and Noise - 4000 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	28.35	WLAN5GHz_802.11a 6Mbps_EVS WB 24. 4kbps_Ch116_2N
5.2 RCV Distortion and Noise - 5000 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	30.29	WLAN5GHz_802.11a 6Mbps_EVS WB 24. 4kbps_Ch116_2N
Report - Receive Distortion	Ok	Minimum SDNR [dB],	24.67	WLAN5GHz_802.11a

and Noise (Conversational Gain)		(occured at 2000Hz)		6Mbps_EVS WB 24. 4kbps_Ch116_2N
5.3 Frequency Response 2N FF	Ok	Min. dist. to tolerance scheme [dB], 4119.5 Hz	1.13	WLAN5GHz_802.11a 6Mbps_EVS WB 24. 4kbps_Ch116_2N
5.3 Frequency Response 2N DF	Not Ok	Min. dist. to tolerance scheme [dB], 4119.5 Hz	-0.19	WLAN5GHz_802.11a 6Mbps_EVS WB 24. 4kbps_Ch116_2N

Overall Receive Delay WB	6
5.1b Receive Volume Control Performance 2N WB	7
5.2 RCV Distortion and Noise - 250 Hz WB	8
5.2 RCV Distortion and Noise - 315 Hz WB	9
5.2 RCV Distortion and Noise - 400 Hz WB	10
5.2 RCV Distortion and Noise - 500 Hz WB	11
5.2 RCV Distortion and Noise - 630 Hz WB	12
5.2 RCV Distortion and Noise - 800 Hz WB	13
5.2 RCV Distortion and Noise - 1000 Hz WB	14
5.2 RCV Distortion and Noise - 1250 Hz WB	15
5.2 RCV Distortion and Noise - 1600 Hz WB	16
5.2 RCV Distortion and Noise - 2000 Hz WB	17
5.2 RCV Distortion and Noise - 2500 Hz WB	18
5.2 RCV Distortion and Noise - 3150 Hz WB	19
5.2 RCV Distortion and Noise - 4000 Hz WB	20
5.2 RCV Distortion and Noise - 5000 Hz WB	21
Report - Receive Distortion and Noise (Conversational Gain)	22
5.3 Frequency Response 2N FF	23
5.3 Frequency Response 2N DF	24

Overall Receive Delay WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ Preparation - Delay measurement

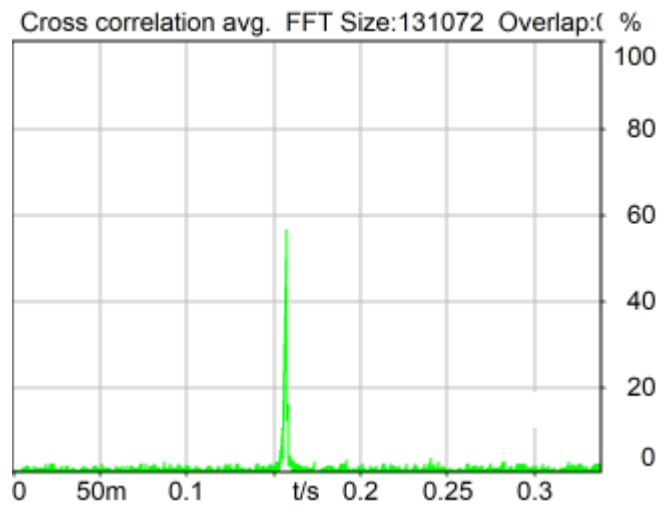


Delay (Cross): 157.0 ms

24/06/28 15:42 ACQUA 5.1.200

5.1b Receive Volume Control Performance 2N WB

TIA-5050 (2018-01) \ Measurements \ Wideband

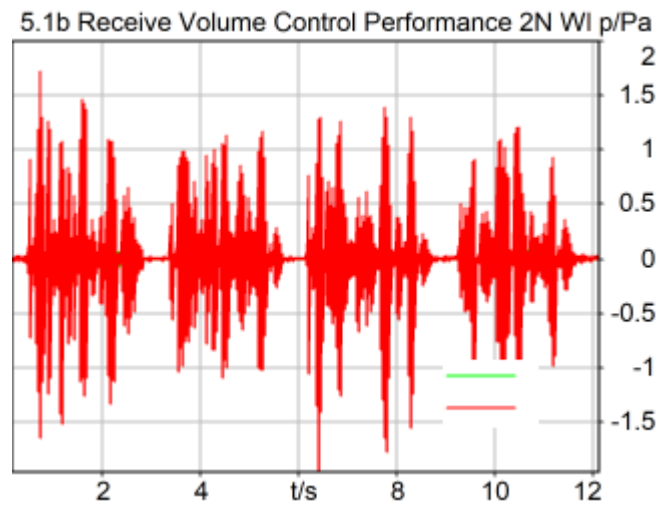


Speech Level RCV: 79.31 dB[SPL], Act.: 83.56% Ok

Ok

24/06/28 15:42 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 250 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

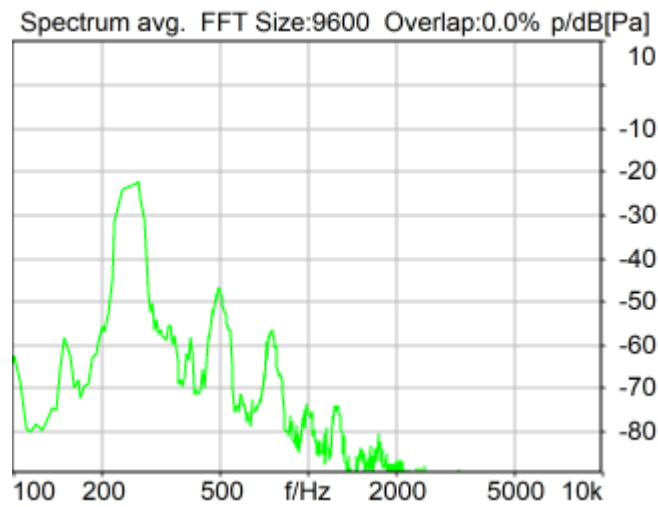


Distortion (Noise) RCV (packed): 26.62 dB (4.67%) Ok

Ok

24/06/28 15:42 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 315 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

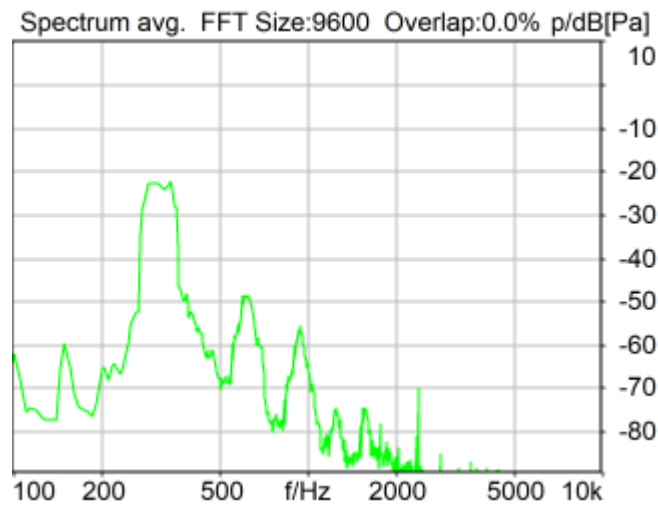


Distortion (Noise) RCV (packed): 26.77 dB (4.58%) Ok

Ok

24/06/28 15:43 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 400 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

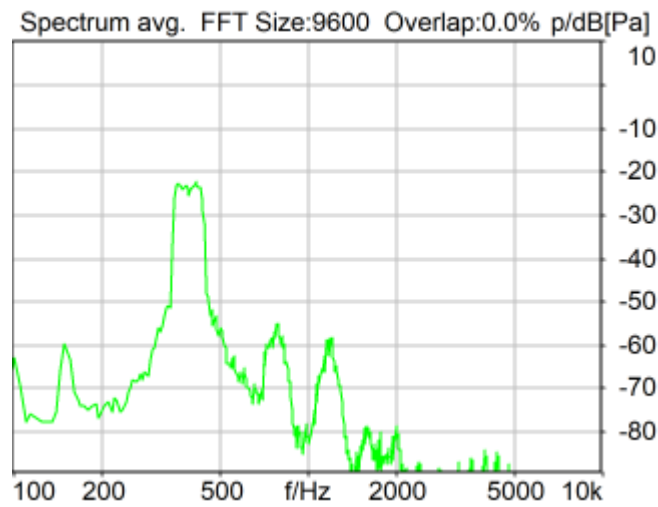


Distortion (Noise) RCV (packed): 30.39 dB (3.02%) Ok

Ok

24/06/28 15:43 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 500 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

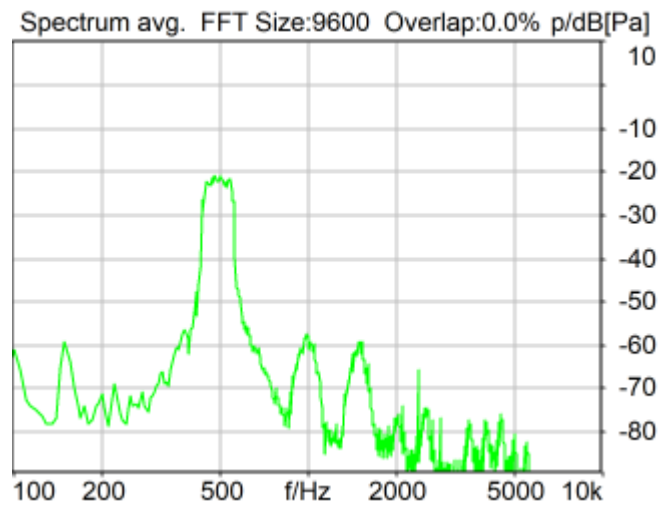


Distortion (Noise) RCV (packed): 31.57 dB (2.64%) Ok

Ok

24/06/28 15:44 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 630 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

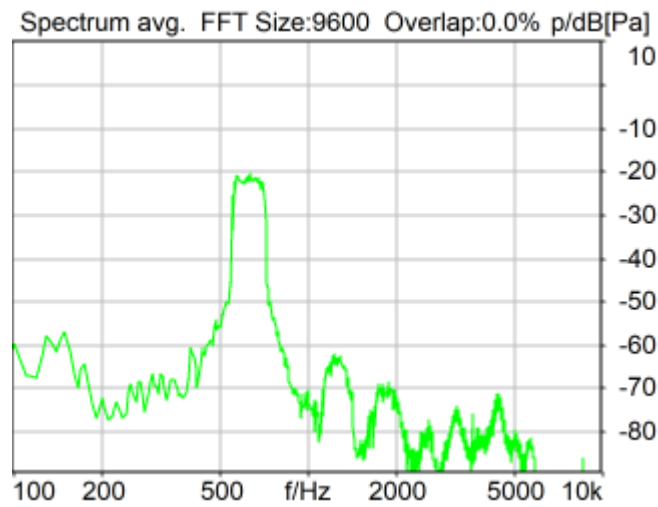


Distortion (Noise) RCV (packed): 33.50 dB (2.11%) Ok

Ok

24/06/28 15:44 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 800 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

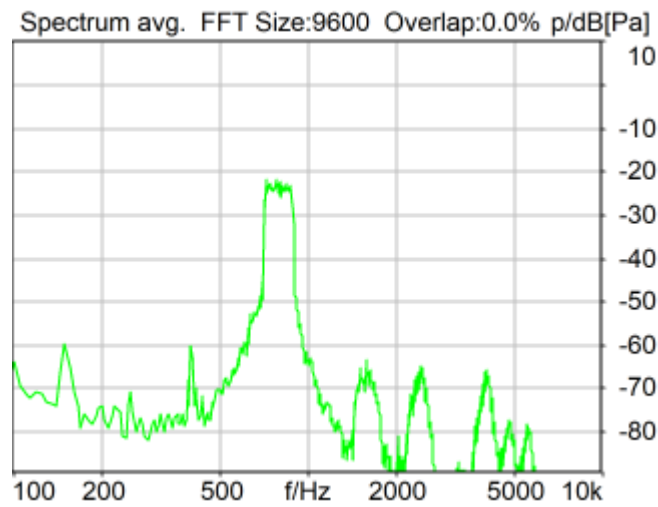


Distortion (Noise) RCV (packed): 32.37 dB (2.41%) Ok

Ok

24/06/28 15:45 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 1000 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

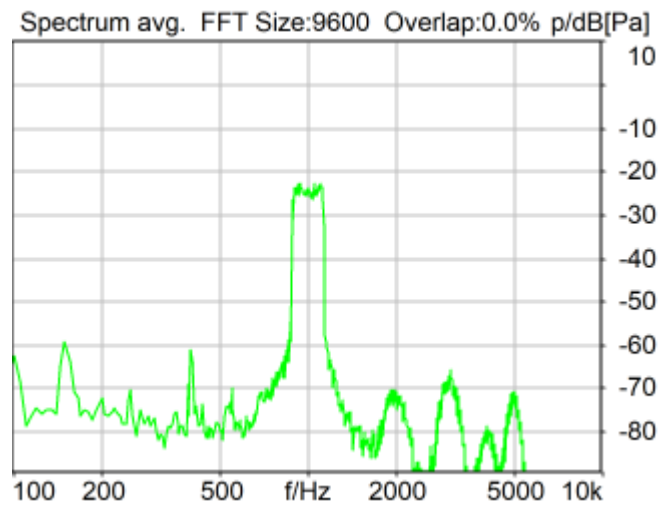


Distortion (Noise) RCV (packed): 36.70 dB (1.46%) Ok

Ok

24/06/28 15:45 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 1250 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

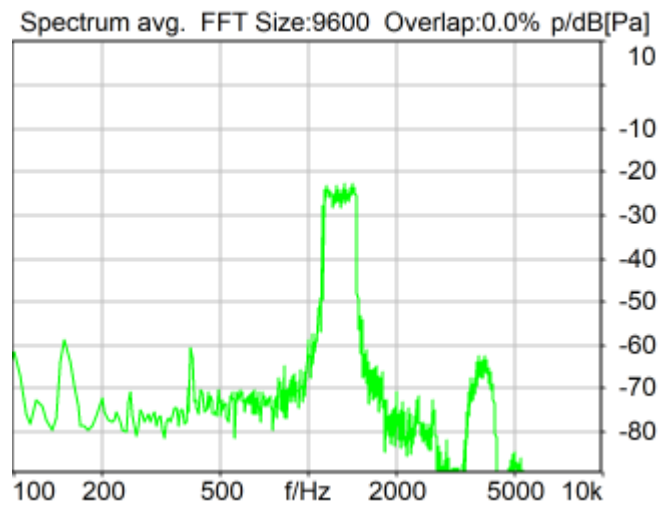


Distortion (Noise) RCV (packed): 28.98 dB (3.56%) Ok

Ok

24/06/28 15:45 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 1600 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

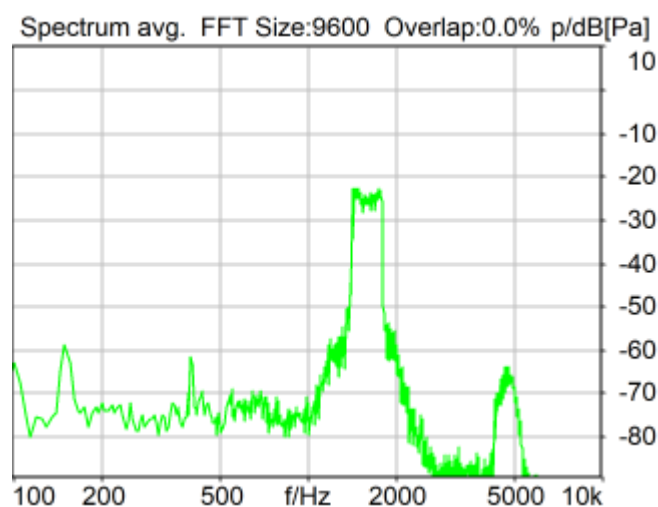


Distortion (Noise) RCV (packed): 30.66 dB (2.93%) Ok

Ok

24/06/28 15:46 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 2000 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

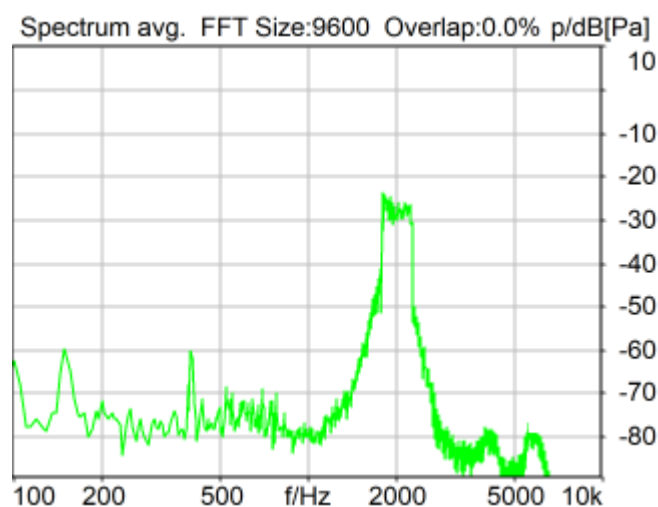


Distortion (Noise) RCV (packed): 24.67 dB (5.84%) Ok

Ok

24/06/28 15:46 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 2500 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

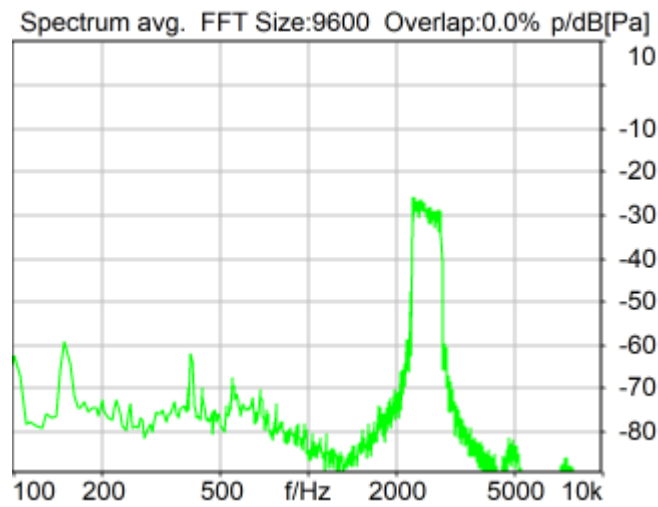


Distortion (Noise) RCV (packed): 35.95 dB (1.59%) Ok

Ok

24/06/28 15:47 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 3150 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

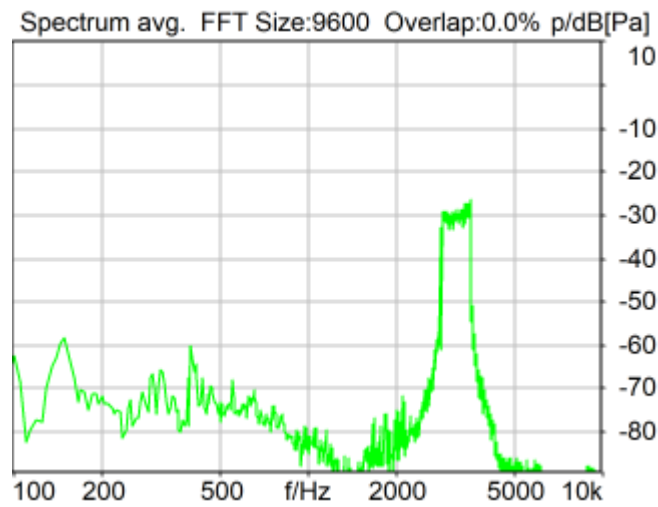


Distortion (Noise) RCV (packed): 32.51 dB (2.37%) Ok

Ok

24/06/28 15:47 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 4000 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

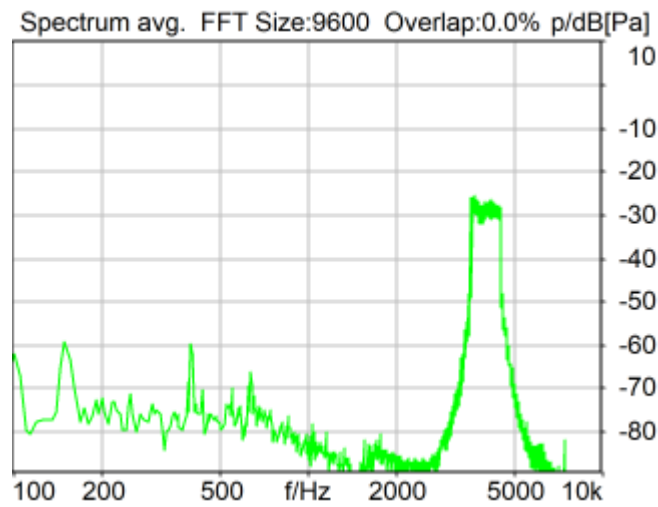


Distortion (Noise) RCV (packed): 28.35 dB (3.82%) Ok

Ok

24/06/28 15:48 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 5000 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

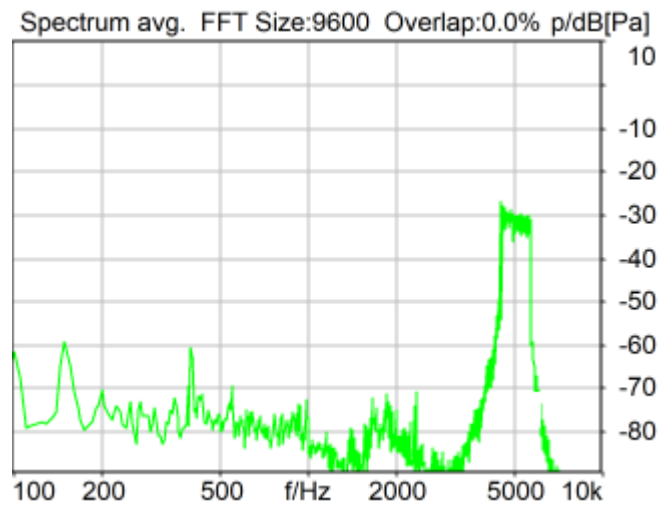

Distortion (Noise) RCV (packed): 30.29 dB (3.06%) Ok

Ok

24/06/28 15:48 ACQUA 5.1.200

Report - Receive Distortion and Noise (Conversational Gain)

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

Region	Frequency	SDNR
1	250Hz	26.62 dB
2	315Hz	26.77 dB
3	400Hz	30.39 dB
4	500Hz	31.57 dB
5	630Hz	33.50 dB
6	800Hz	32.37 dB
7	1000Hz	36.70 dB
8	1250Hz	28.98 dB
9	1600Hz	30.66 dB
10	2000Hz	24.67 dB
11	2500Hz	35.95 dB
12	3150Hz	32.51 dB
13	4000Hz	28.35 dB
14	5000Hz	30.29 dB


All SDNRs were greater than 20.0 dB, requirement was met.

Smallest SDNR was 24.67dB at 2000Hz.

24/06/28 15:51 ACQUA

5.3 Frequency Response 2N FF

TIA-5050 (2018-01) \ Measurements \ Wideband

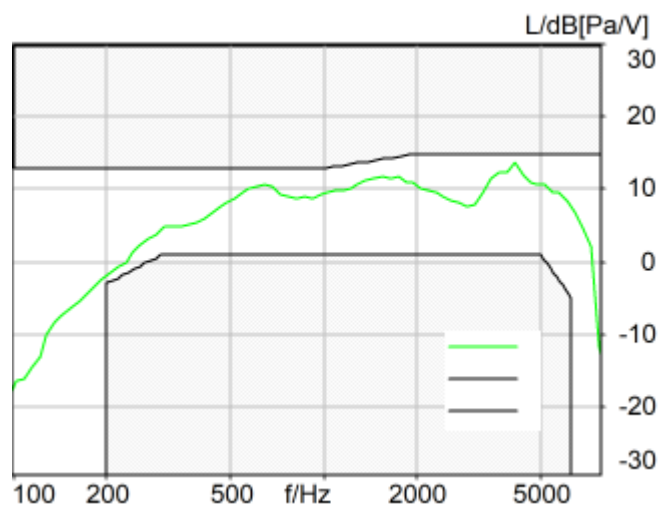


Absolute minimal distance
1.13 dB at 4119.5 Hz Ok

Ok

24/06/28 15:51 ACQUA 5.1.200

5.3 Frequency Response 2N DF

TIA-5050 (2018-01) \ Measurements \ Wideband

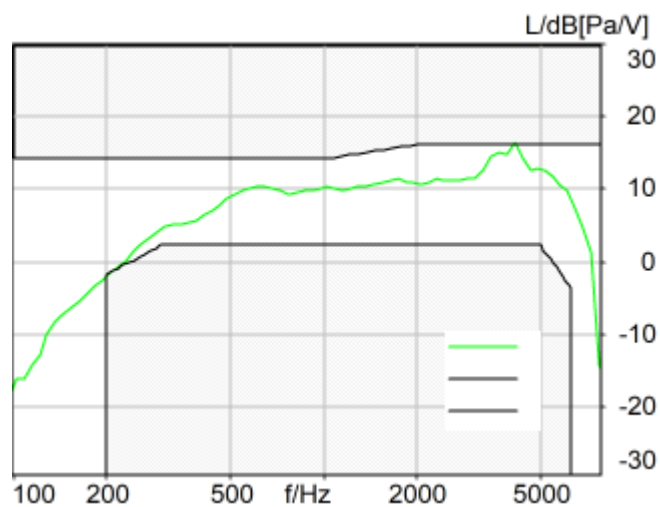

Absolute minimal distance
-0.19 dB at 4119.5 Hz Not Ok

Not Ok

24/06/28 15:52 ACQUA 5.1.200

Measurement Protocol

Measurement Object	GSM850_Voice_AMR NB 4.75Kbps_Ch189_2N
--------------------	---------------------------------------

Project	460412
Report Generation Date	24/06/28 23:49
Responsible Person	AC01-KS


Status Overview

SMD	Status	Single Value Description	Single Value	Object
Overall Receive Delay NB	Done	Delay (Cross) [ms]	192.9	GSM850_Voice_AMR NB 4. 75Kbps_Ch189_2N
5.1b Receive Volume Control Performance 2N NB	Ok	Speech Level [dB[SPL]]	78.19	GSM850_Voice_AMR NB 4. 75Kbps_Ch189_2N

Overall Receive Delay NB	5
5.1b Receive Volume Control Performance 2N NB	6

Overall Receive Delay NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ Preparation - Delay measurement

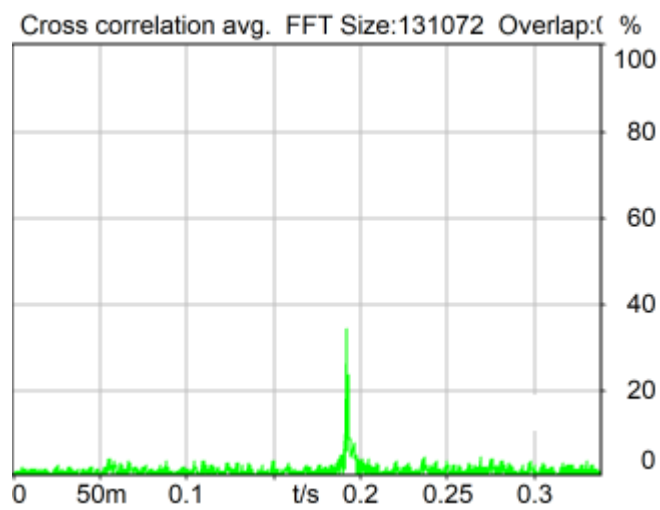


Delay (Cross): 192.9 ms

24/06/28 18:29 ACQUA 5.1.200

5.1b Receive Volume Control Performance 2N NB

TIA-5050 (2018-01) \ Measurements \ Narrowband

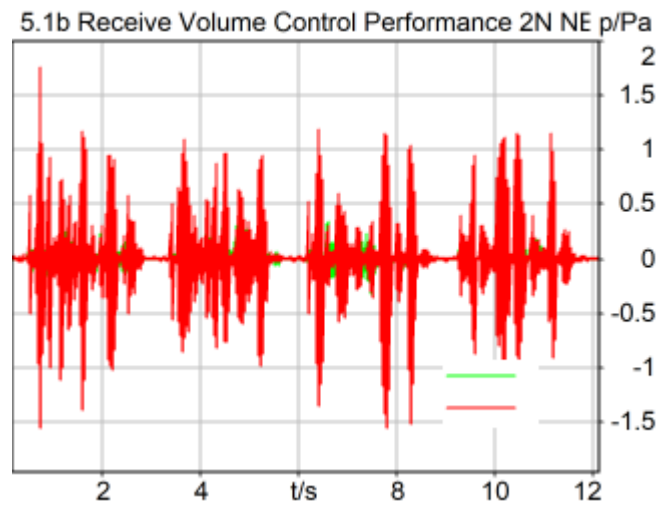

Speech Level RCV: 78.19 dB[SPL], Act.: 79.66% Ok

Ok

24/06/28 18:29 ACQUA 5.1.200

Measurement Protocol

Measurement Object	WCDMA V_Voice_AMR NB 4.75Kbps_Ch4182_2N
--------------------	---

Project	460412
Report Generation Date	24/06/28 23:50
Responsible Person	AC01-KS


Status Overview

SMD	Status	Single Value Description	Single Value	Object
Overall Receive Delay NB	Done	Delay (Cross) [ms]	200.4	WCDMA V_Voice_AMR NB 4. 75Kbps_Ch4182_2N
5.1b Receive Volume Control Performance 2N NB	Ok	Speech Level [dB[SPL]]	78.03	WCDMA V_Voice_AMR NB 4. 75Kbps_Ch4182_2N

Overall Receive Delay NB	5
5.1b Receive Volume Control Performance 2N NB	6

Overall Receive Delay NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ Preparation - Delay measurement

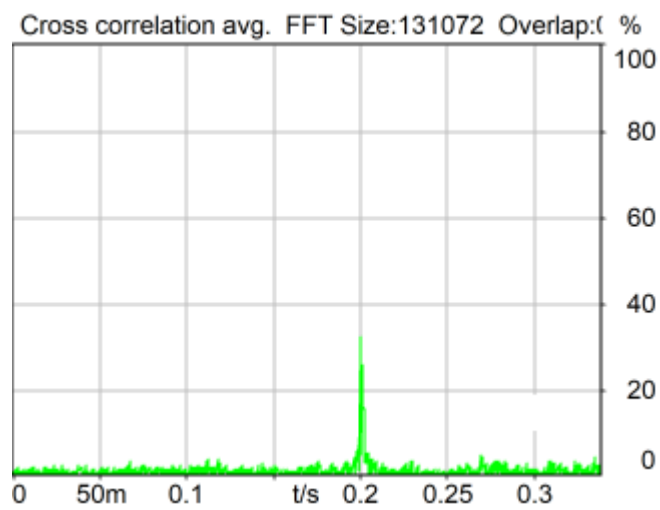


Delay (Cross): 200.4 ms

24/06/28 19:00 ACQUA 5.1.200

5.1b Receive Volume Control Performance 2N NB

TIA-5050 (2018-01) \ Measurements \ Narrowband

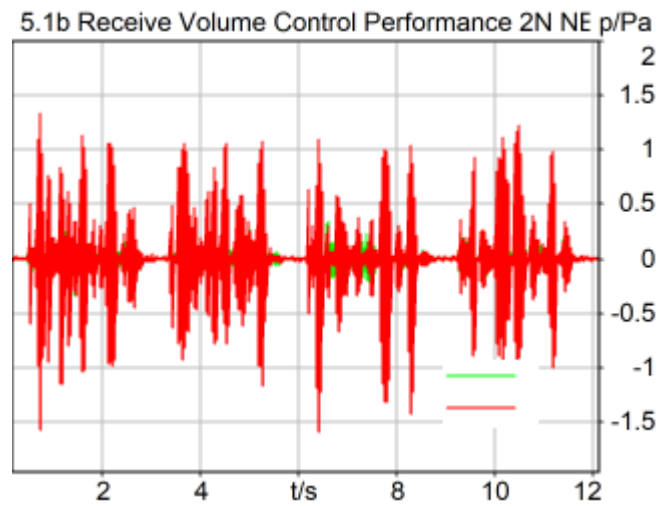

Speech Level RCV: 78.03 dB[SPL], Act.: 80.11% Ok

Ok

24/06/28 19:00 ACQUA 5.1.200

Measurement Protocol

Measurement Object	LTE Band 7_20M_QPSK_1RB_0Offset_EVS NB 24.4kbps_Ch21100_2N
--------------------	--

Project	460412
Report Generation Date	24/06/26 3:11
Responsible Person	AC01-KS


Status Overview

SMD	Status	Single Value Description	Single Value	Object
Overall Receive Delay NB	Done	Delay (Cross) [ms]	136.3	LTE Band 7_20M_QPSK_1RB_0Offset_EV S NB 24.4kbps_Ch21100_2N
5.1b Receive Volume Control Performance 2N NB	Ok	Speech Level [dB[SPL]]	78.84	LTE Band 7_20M_QPSK_1RB_0Offset_EV S NB 24.4kbps_Ch21100_2N
5.2 RCV Distortion and Noise - 400 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	28.17	LTE Band 7_20M_QPSK_1RB_0Offset_EV S NB 24.4kbps_Ch21100_2N
5.2 RCV Distortion and Noise - 500 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	31.30	LTE Band 7_20M_QPSK_1RB_0Offset_EV S NB 24.4kbps_Ch21100_2N
5.2 RCV Distortion and Noise - 630 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	27.33	LTE Band 7_20M_QPSK_1RB_0Offset_EV S NB 24.4kbps_Ch21100_2N
5.2 RCV Distortion and Noise - 800 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	34.77	LTE Band 7_20M_QPSK_1RB_0Offset_EV S NB 24.4kbps_Ch21100_2N
5.2 RCV Distortion and Noise - 1000 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	39.10	LTE Band 7_20M_QPSK_1RB_0Offset_EV S NB 24.4kbps_Ch21100_2N
5.2 RCV Distortion and Noise - 1250 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	31.30	LTE Band 7_20M_QPSK_1RB_0Offset_EV S NB 24.4kbps_Ch21100_2N
5.2 RCV Distortion and Noise - 1600 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	35.19	LTE Band 7_20M_QPSK_1RB_0Offset_EV S NB 24.4kbps_Ch21100_2N
5.2 RCV Distortion and Noise - 2000 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	41.49	LTE Band 7_20M_QPSK_1RB_0Offset_EV S NB 24.4kbps_Ch21100_2N
5.2 RCV Distortion and Noise - 2500 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	43.89	LTE Band 7_20M_QPSK_1RB_0Offset_EV S NB 24.4kbps_Ch21100_2N
5.2 RCV Distortion and Noise - 3150 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	43.00	LTE Band 7_20M_QPSK_1RB_0Offset_EV S NB 24.4kbps_Ch21100_2N
Report - Receive Distortion and Noise (Conversational Gain)	Ok	Minimum SDNR [dB], (occured at 630Hz)	27.33	LTE Band 7_20M_QPSK_1RB_0Offset_EV S NB 24.4kbps_Ch21100_2N
5.3 Frequency Response 2N FF HANB	Ok	Min. dist. to tolerance scheme [dB], 1547.5 Hz	0.54	LTE Band 7_20M_QPSK_1RB_0Offset_EV S NB 24.4kbps_Ch21100_2N
5.3 Frequency Response 2N DF HANB	Ok	Min. dist. to tolerance scheme [dB], 388.2 Hz	1.08	LTE Band 7_20M_QPSK_1RB_0Offset_EV S NB 24.4kbps_Ch21100_2N

Overall Receive Delay NB	5
5.1b Receive Volume Control Performance 2N NB	6
5.2 RCV Distortion and Noise - 400 Hz NB	7
5.2 RCV Distortion and Noise - 500 Hz NB	8
5.2 RCV Distortion and Noise - 630 Hz NB	9
5.2 RCV Distortion and Noise - 800 Hz NB	10
5.2 RCV Distortion and Noise - 1000 Hz NB	11
5.2 RCV Distortion and Noise - 1250 Hz NB	12
5.2 RCV Distortion and Noise - 1600 Hz NB	13
5.2 RCV Distortion and Noise - 2000 Hz NB	14
5.2 RCV Distortion and Noise - 2500 Hz NB	15
5.2 RCV Distortion and Noise - 3150 Hz NB	16
Report - Receive Distortion and Noise (Conversational Gain)	17
5.3 Frequency Response 2N FF HANB	18
5.3 Frequency Response 2N DF HANB	19

Overall Receive Delay NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ Preparation - Delay measurement

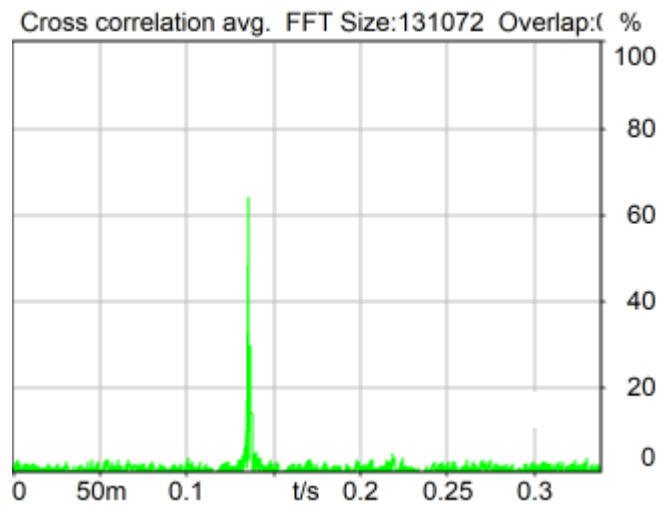


Delay (Cross): 136.3 ms

24/06/26 2:54 ACQUA 5.1.200

5.1b Receive Volume Control Performance 2N NB

TIA-5050 (2018-01) \ Measurements \ Narrowband

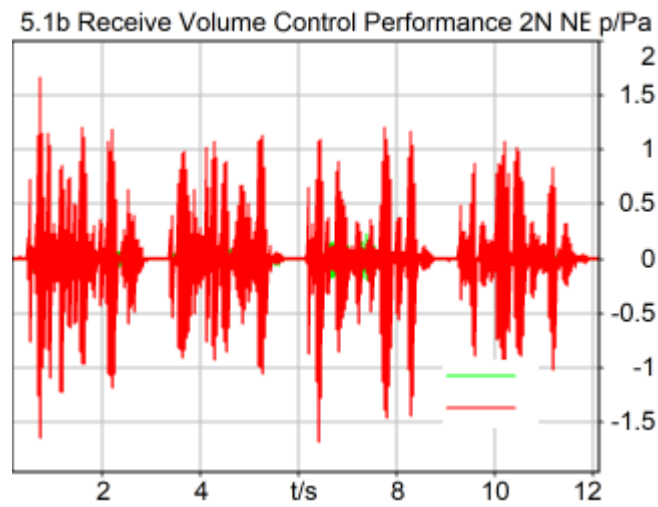


Speech Level RCV: 78.84 dB[SPL], Act.: 80.23% Ok

Ok

24/06/26 2:54 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 400 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

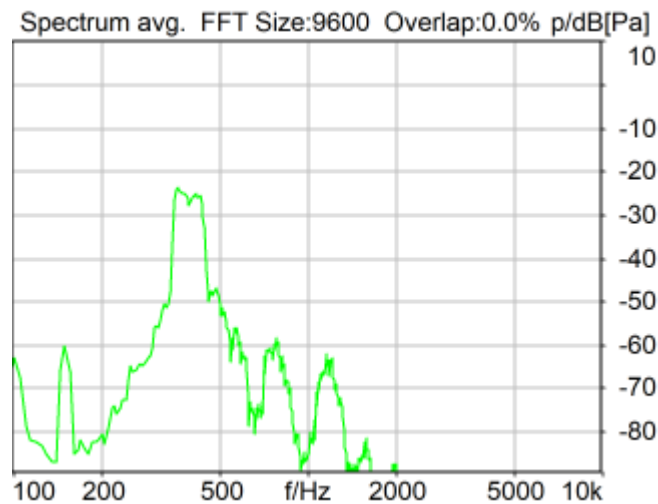


Distortion (Noise) RCV (packed): 28.17 dB (3.90%) Ok

Ok

24/06/26 2:55 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 500 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

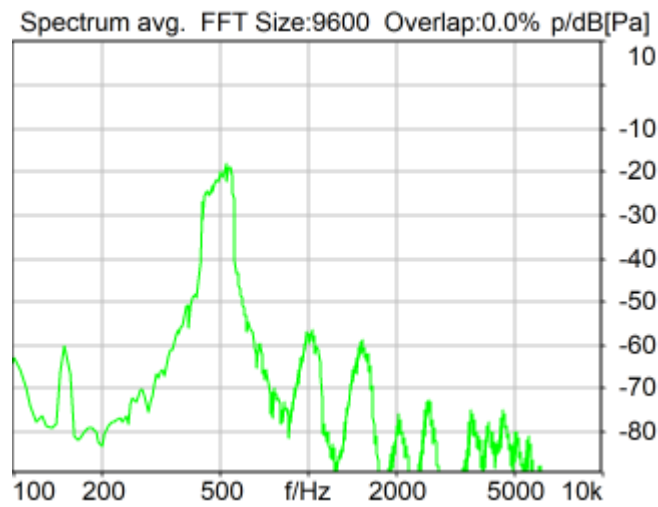


Distortion (Noise) RCV (packed): 31.30 dB (2.72%) Ok

Ok

24/06/26 2:55 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 630 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

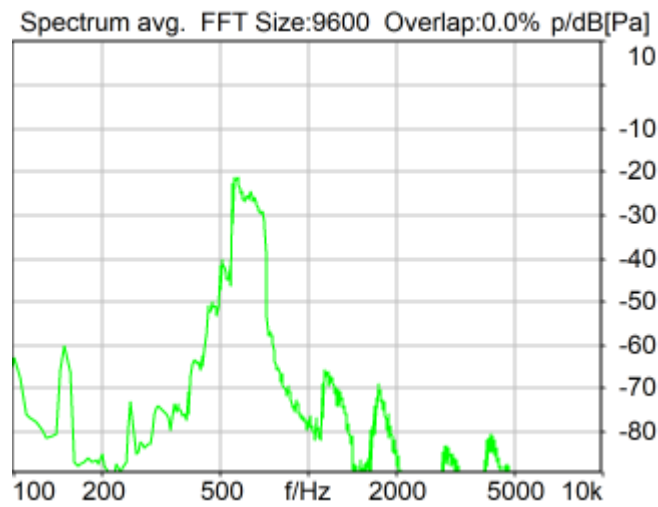


Distortion (Noise) RCV (packed): 27.33 dB (4.30%) Ok

Ok

24/06/26 2:56 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 800 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

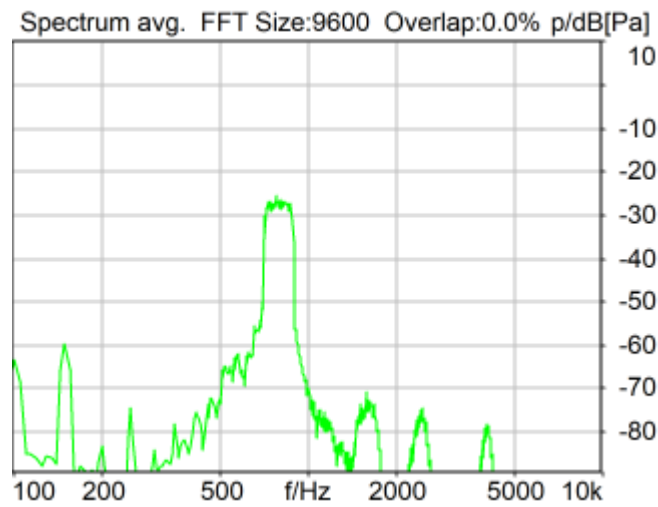


Distortion (Noise) RCV (packed): 34.77 dB (1.83%) Ok

Ok

24/06/26 2:56 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 1000 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

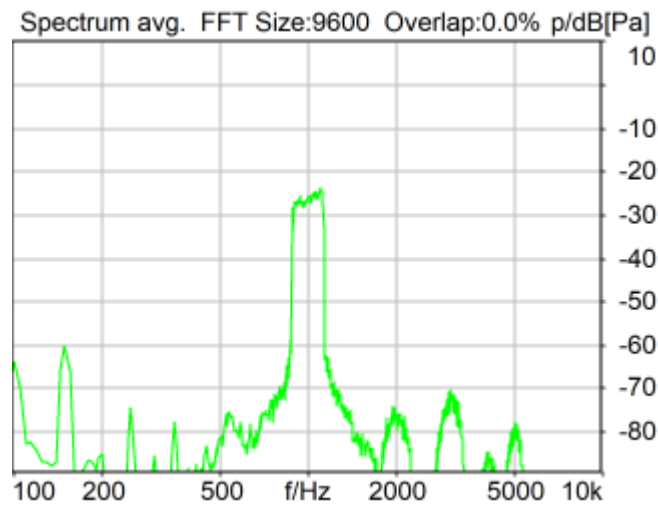


Distortion (Noise) RCV (packed): 39.10 dB (1.11%) Ok

Ok

24/06/26 2:57 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 1250 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

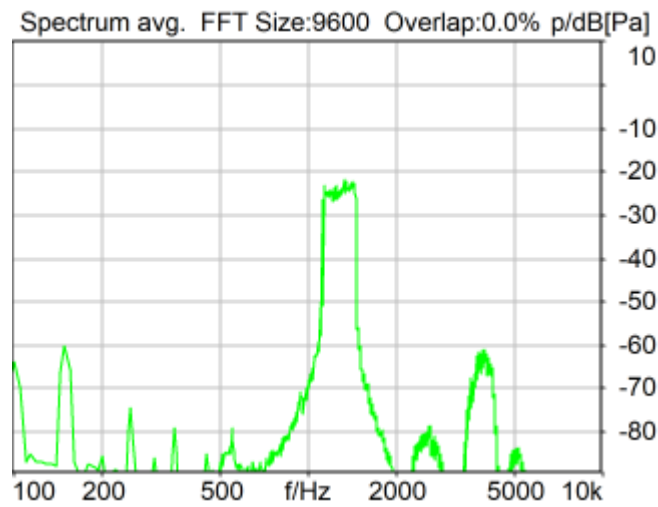


Distortion (Noise) RCV (packed): 31.30 dB (2.72%) Ok

Ok

24/06/26 2:57 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 1600 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

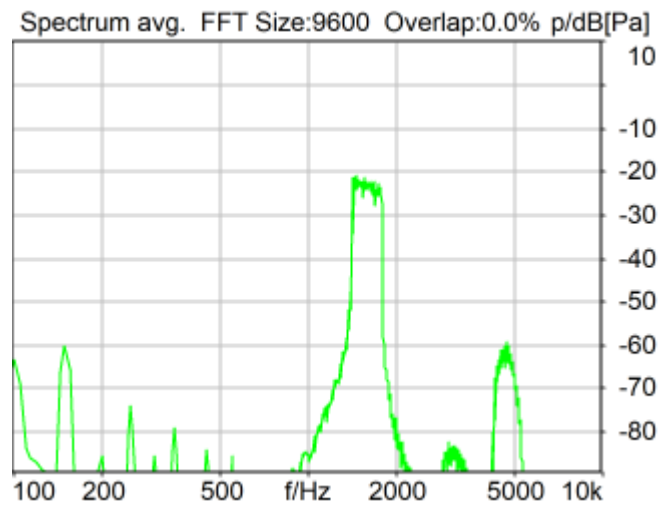


Distortion (Noise) RCV (packed): 35.19 dB (1.74%) Ok

Ok

24/06/26 2:58 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 2000 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

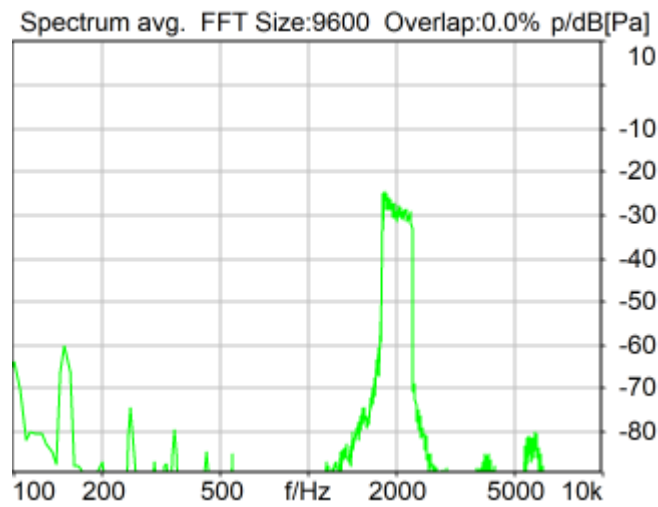


Distortion (Noise) RCV (packed): 41.49 dB (0.84%) Ok

Ok

24/06/26 2:58 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 2500 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

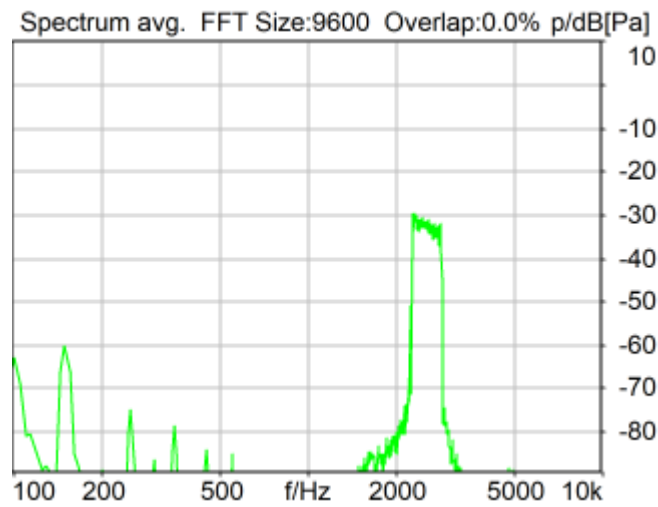


Distortion (Noise) RCV (packed): 43.89 dB (0.64%) Ok

Ok

24/06/26 2:58 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 3150 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

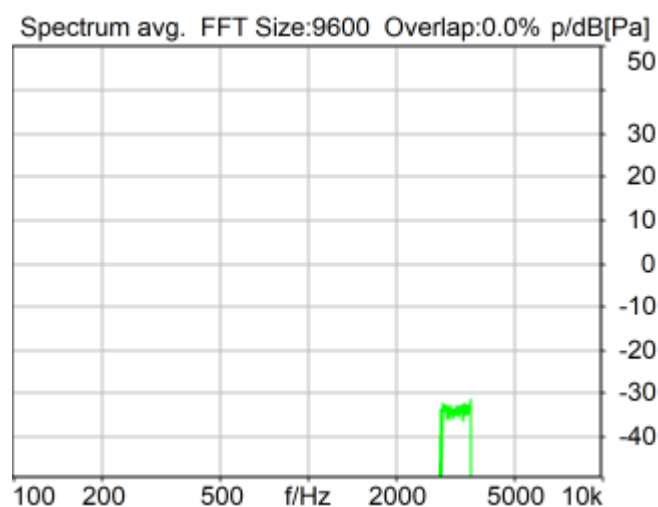

Distortion (Noise) RCV (packed): 43.00 dB (0.71%) Ok

Ok

24/06/26 2:59 ACQUA 5.1.200

Report - Receive Distortion and Noise (Conversational Gain)

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

Region	Frequency	SDNR
1	400Hz	28.17 dB
2	500Hz	31.30 dB
3	630Hz	27.33 dB
4	800Hz	34.77 dB
5	1000Hz	39.10 dB
6	1250Hz	31.30 dB
7	1600Hz	35.19 dB
8	2000Hz	41.49 dB
9	2500Hz	43.89 dB
10	3150Hz	43.00 dB


All SDNRs were greater than 20.0 dB, requirement was met.

Smallest SDNR was 27.33dB at 630Hz.

24/06/26 3:09 ACQUA

5.3 Frequency Response 2N FF HANB

TIA-5050 (2018-01) \ Measurements \ Narrowband

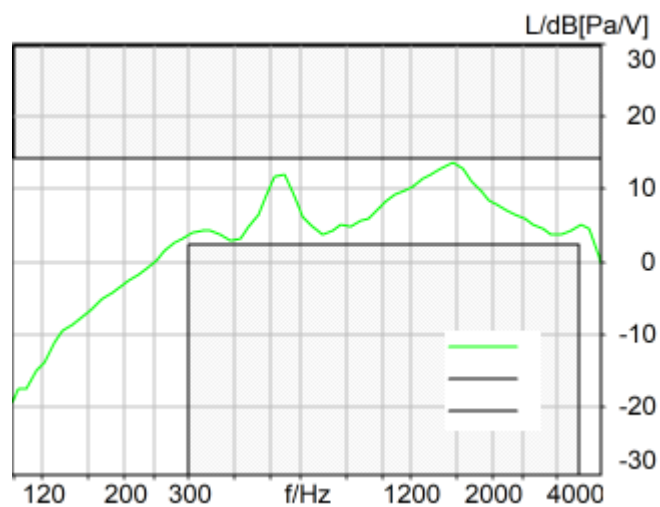


Absolute minimal distance
0.54 dB at 1547.5 Hz Ok

Ok

24/06/26 3:10 ACQUA 5.1.200

5.3 Frequency Response 2N DF HANB

TIA-5050 (2018-01) \ Measurements \ Narrowband

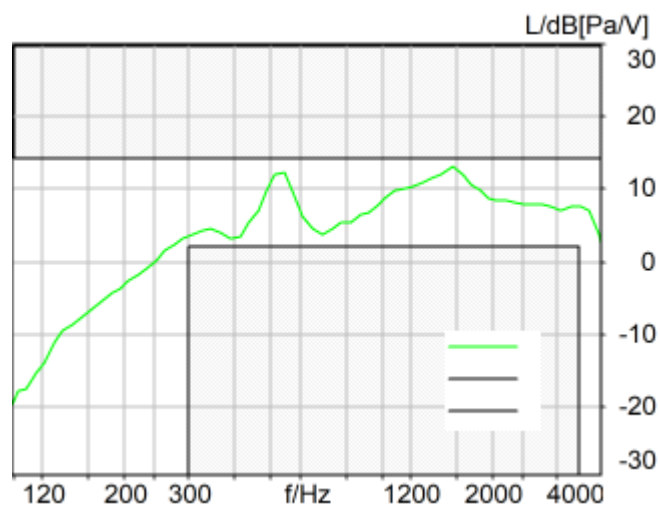

Absolute minimal distance
1.08 dB at 388.2 Hz Ok

Ok

24/06/26 3:10 ACQUA 5.1.200

Measurement Protocol

Measurement Object	WLAN5GHz_802.11a 6Mbps_EVS NB 24.4kbps_Ch40_2N
--------------------	--

Project	460412
Report Generation Date	24/06/27 21:13
Responsible Person	AC01-KS


Status Overview

SMD	Status	Single Value Description	Single Value	Object
Overall Receive Delay NB	Done	Delay (Cross) [ms]	139.6	WLAN5GHz_802.11a 6Mbps_EVS NB 24. 4kbps_Ch40_2N
5.1b Receive Volume Control Performance 2N NB	Ok	Speech Level [dB[SPL]]	77.40	WLAN5GHz_802.11a 6Mbps_EVS NB 24. 4kbps_Ch40_2N
5.2 RCV Distortion and Noise - 400 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	29.54	WLAN5GHz_802.11a 6Mbps_EVS NB 24. 4kbps_Ch40_2N
5.2 RCV Distortion and Noise - 500 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	30.45	WLAN5GHz_802.11a 6Mbps_EVS NB 24. 4kbps_Ch40_2N
5.2 RCV Distortion and Noise - 630 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	28.15	WLAN5GHz_802.11a 6Mbps_EVS NB 24. 4kbps_Ch40_2N
5.2 RCV Distortion and Noise - 800 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	36.34	WLAN5GHz_802.11a 6Mbps_EVS NB 24. 4kbps_Ch40_2N
5.2 RCV Distortion and Noise - 1000 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	40.59	WLAN5GHz_802.11a 6Mbps_EVS NB 24. 4kbps_Ch40_2N
5.2 RCV Distortion and Noise - 1250 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	29.99	WLAN5GHz_802.11a 6Mbps_EVS NB 24. 4kbps_Ch40_2N
5.2 RCV Distortion and Noise - 1600 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	32.97	WLAN5GHz_802.11a 6Mbps_EVS NB 24. 4kbps_Ch40_2N
5.2 RCV Distortion and Noise - 2000 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	43.35	WLAN5GHz_802.11a 6Mbps_EVS NB 24. 4kbps_Ch40_2N
5.2 RCV Distortion and Noise - 2500 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	44.34	WLAN5GHz_802.11a 6Mbps_EVS NB 24. 4kbps_Ch40_2N
5.2 RCV Distortion and Noise - 3150 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	43.67	WLAN5GHz_802.11a 6Mbps_EVS NB 24. 4kbps_Ch40_2N
Report - Receive Distortion and Noise (Conversational Gain)	Ok	Minimum SDNR [dB], (occured at 630Hz)	28.15	WLAN5GHz_802.11a 6Mbps_EVS NB 24. 4kbps_Ch40_2N
5.3 Frequency Response 2N FF HANB	Ok	Min. dist. to tolerance scheme [dB], 1547.5 Hz	1.10	WLAN5GHz_802.11a 6Mbps_EVS NB 24. 4kbps_Ch40_2N
5.3 Frequency Response 2N DF HANB	Ok	Min. dist. to tolerance scheme [dB], 544.4 Hz	1.43	WLAN5GHz_802.11a 6Mbps_EVS NB 24. 4kbps_Ch40_2N

Overall Receive Delay NB	5
5.1b Receive Volume Control Performance 2N NB	6
5.2 RCV Distortion and Noise - 400 Hz NB	7
5.2 RCV Distortion and Noise - 500 Hz NB	8
5.2 RCV Distortion and Noise - 630 Hz NB	9
5.2 RCV Distortion and Noise - 800 Hz NB	10
5.2 RCV Distortion and Noise - 1000 Hz NB	11
5.2 RCV Distortion and Noise - 1250 Hz NB	12
5.2 RCV Distortion and Noise - 1600 Hz NB	13
5.2 RCV Distortion and Noise - 2000 Hz NB	14
5.2 RCV Distortion and Noise - 2500 Hz NB	15
5.2 RCV Distortion and Noise - 3150 Hz NB	16
Report - Receive Distortion and Noise (Conversational Gain)	17
5.3 Frequency Response 2N FF HANB	18
5.3 Frequency Response 2N DF HANB	19

Overall Receive Delay NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ Preparation - Delay measurement

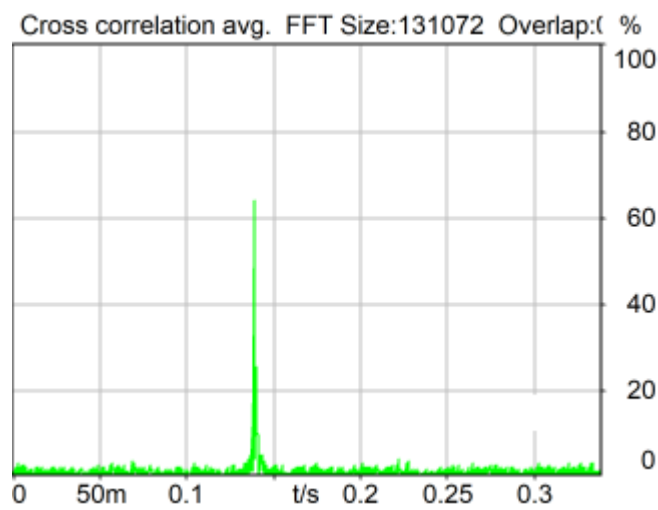


Delay (Cross): 139.6 ms

24/06/27 20:37 ACQUA 5.1.200

5.1b Receive Volume Control Performance 2N NB

TIA-5050 (2018-01) \ Measurements \ Narrowband

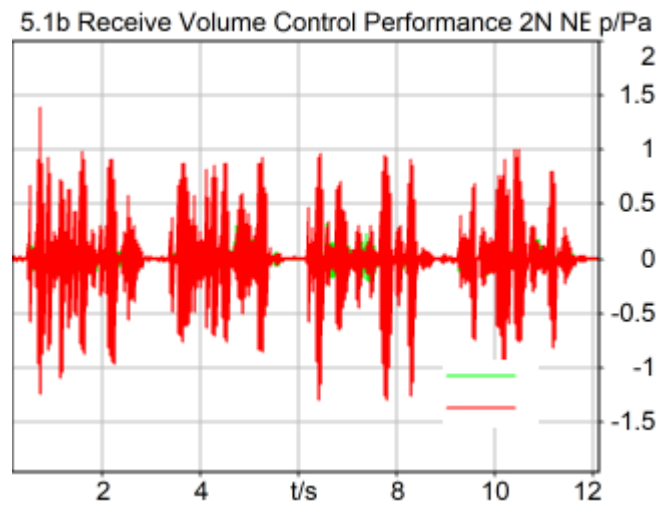


Speech Level RCV: 77.40 dB[SPL], Act.: 80.08% Ok

Ok

24/06/27 20:38 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 400 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

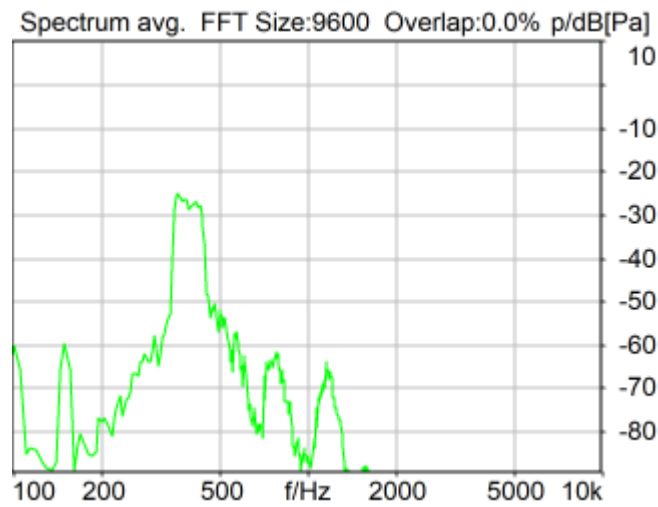


Distortion (Noise) RCV (packed): 29.54 dB (3.33%) Ok

Ok

24/06/27 20:38 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 500 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

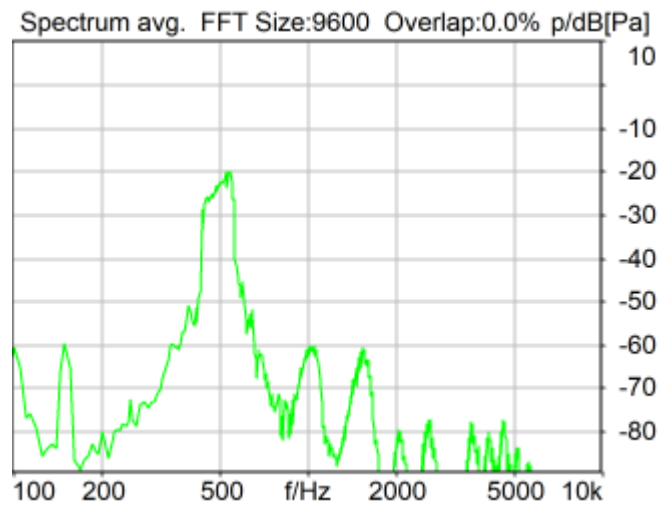


Distortion (Noise) RCV (packed): 30.45 dB (3.00%) Ok

Ok

24/06/27 20:38 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 630 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

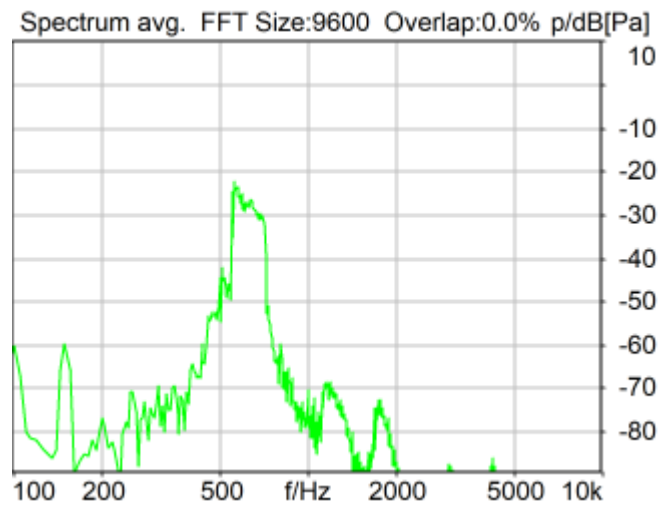


Distortion (Noise) RCV (packed): 28.15 dB (3.91%) Ok

Ok

24/06/27 20:39 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 800 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

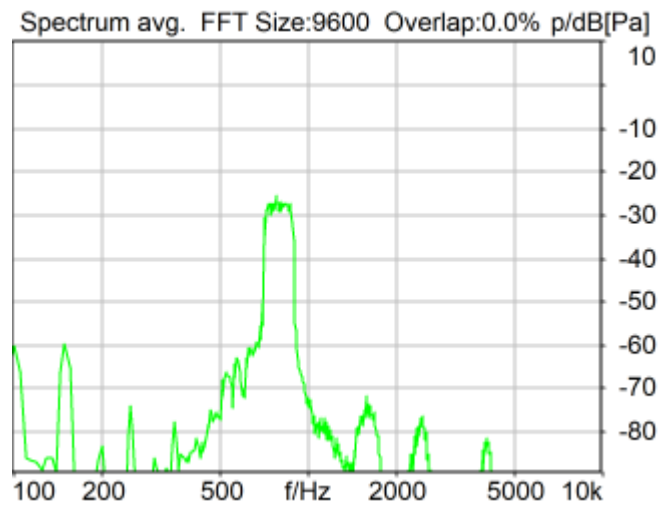


Distortion (Noise) RCV (packed): 36.34 dB (1.52%) Ok

Ok

24/06/27 20:39 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 1000 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

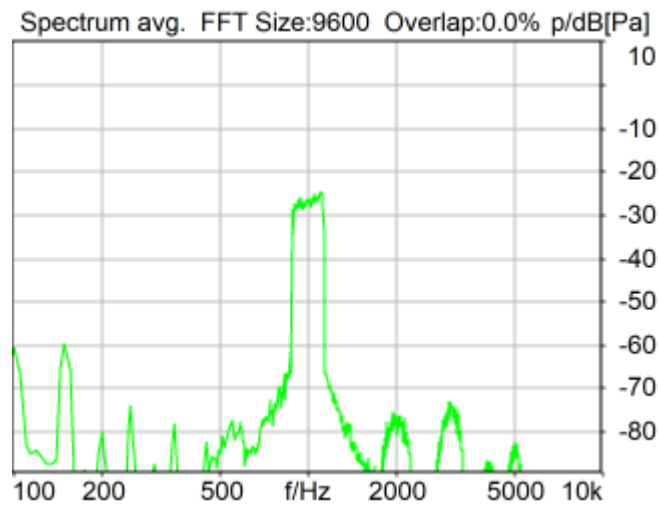


Distortion (Noise) RCV (packed): 40.59 dB (0.93%) Ok

Ok

24/06/27 20:40 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 1250 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

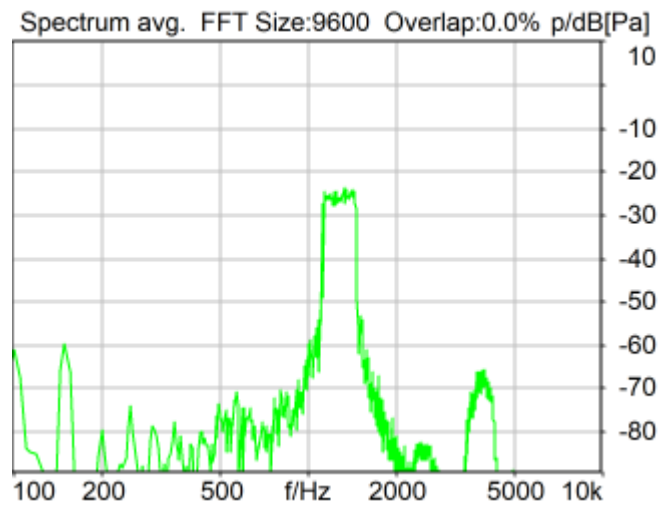


Distortion (Noise) RCV (packed): 29.99 dB (3.17%) Ok

Ok

24/06/27 20:40 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 1600 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

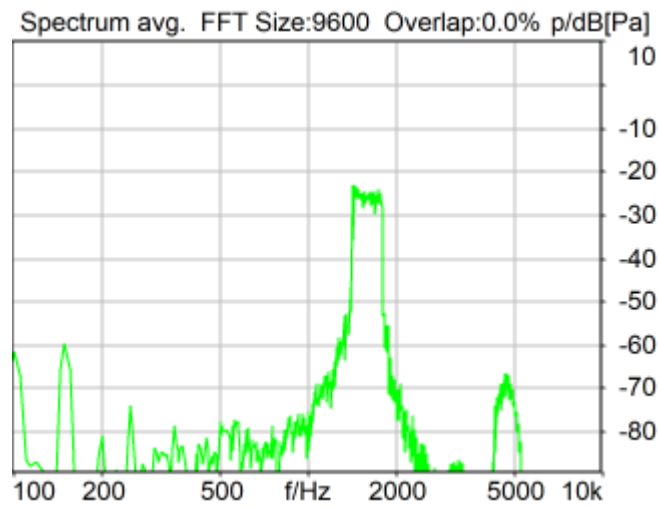


Distortion (Noise) RCV (packed): 32.97 dB (2.25%) Ok

Ok

24/06/27 20:41 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 2000 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

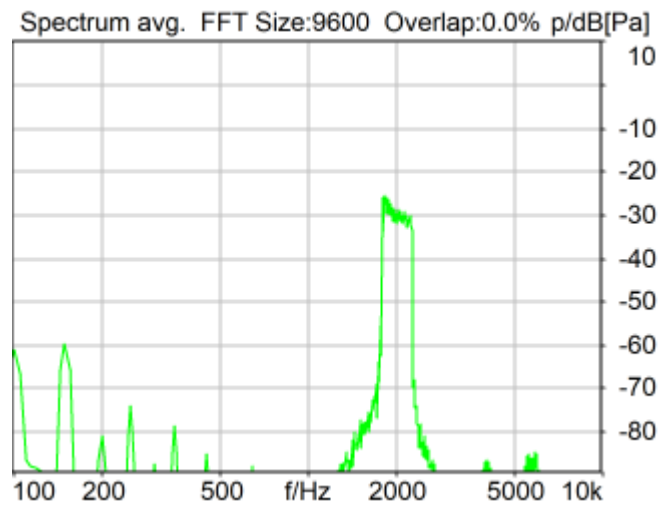


Distortion (Noise) RCV (packed): 43.35 dB (0.68%) Ok

Ok

24/06/27 20:41 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 2500 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

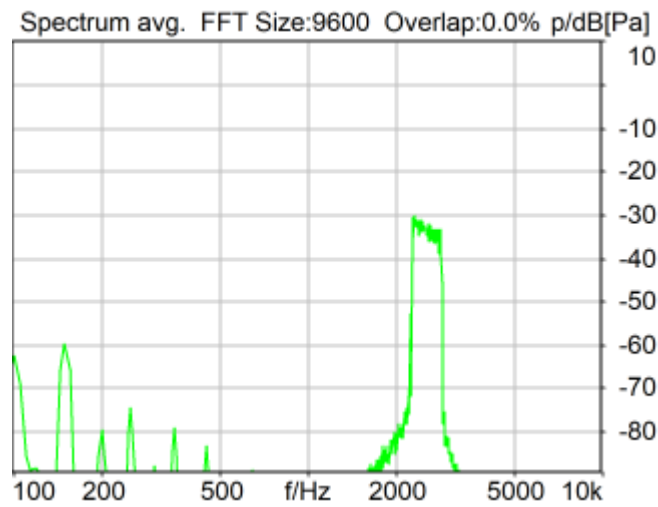


Distortion (Noise) RCV (packed): 44.34 dB (0.61%) Ok

Ok

24/06/27 20:42 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 3150 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

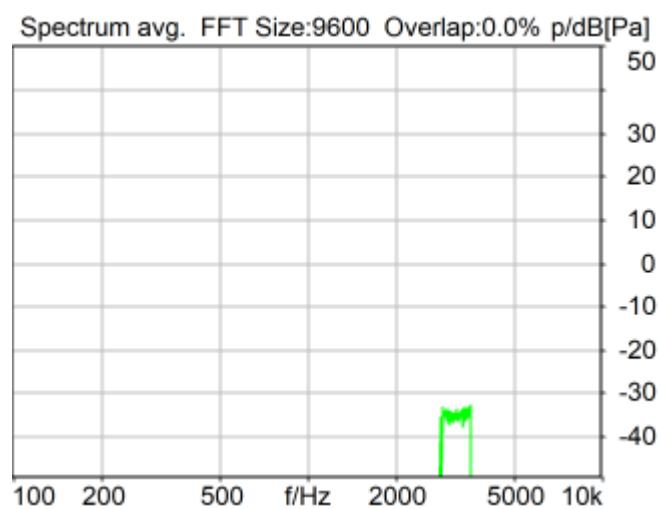

Distortion (Noise) RCV (packed): 43.67 dB (0.66%) Ok

Ok

24/06/27 20:42 ACQUA 5.1.200

Report - Receive Distortion and Noise (Conversational Gain)

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

Region	Frequency	SDNR
1	400Hz	29.54 dB
2	500Hz	30.45 dB
3	630Hz	28.15 dB
4	800Hz	36.34 dB
5	1000Hz	40.59 dB
6	1250Hz	29.99 dB
7	1600Hz	32.97 dB
8	2000Hz	43.35 dB
9	2500Hz	44.34 dB
10	3150Hz	43.67 dB


All SDNRs were greater than 20.0 dB, requirement was met.

Smallest SDNR was 28.15dB at 630Hz.

24/06/27 20:43 ACQUA

5.3 Frequency Response 2N FF HANB

TIA-5050 (2018-01) \ Measurements \ Narrowband

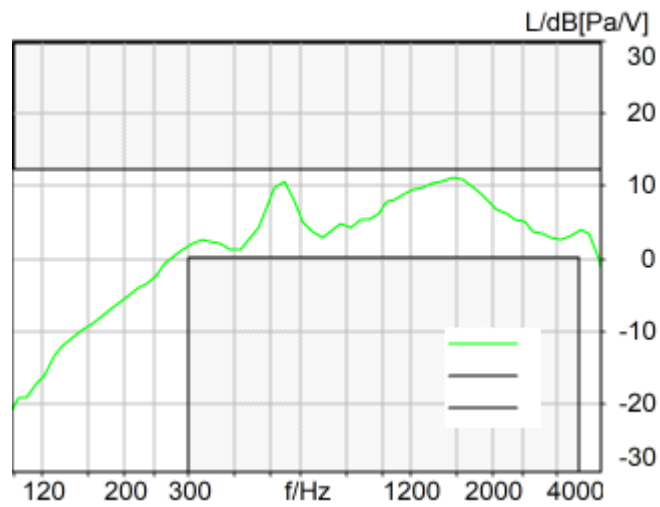


Absolute minimal distance
1.10 dB at 1547.5 Hz Ok

Ok

24/06/27 20:43 ACQUA 5.1.200

5.3 Frequency Response 2N DF HANB

TIA-5050 (2018-01) \ Measurements \ Narrowband

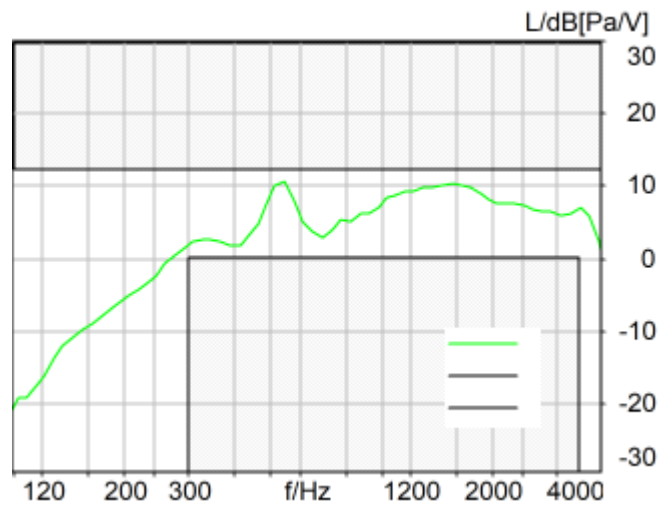

Absolute minimal distance
1.43 dB at 544.4 Hz Ok

Ok

24/06/27 20:44 ACQUA 5.1.200

Measurement Protocol

Measurement Object	WLAN5GHz_802.11a 6Mbps_EVS NB 24.4kbps_Ch40_8N
--------------------	--

Project	460412
Report Generation Date	24/06/27 21:14
Responsible Person	AC01-KS


Status Overview

SMD	Status	Single Value Description	Single Value	Object
Overall Receive Delay NB	Done	Delay (Cross) [ms]	140.9	WLAN5GHz_802.11a 6Mbps_EVS NB 24. 4kbps_Ch40_8N
5.1a Receive Volume Control Performance 8N NB	Ok	Speech Level [dB[SPL]]	81.10	WLAN5GHz_802.11a 6Mbps_EVS NB 24. 4kbps_Ch40_8N
5.2 RCV Distortion and Noise - 400 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	29.56	WLAN5GHz_802.11a 6Mbps_EVS NB 24. 4kbps_Ch40_8N
5.2 RCV Distortion and Noise - 500 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	30.02	WLAN5GHz_802.11a 6Mbps_EVS NB 24. 4kbps_Ch40_8N
5.2 RCV Distortion and Noise - 630 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	29.12	WLAN5GHz_802.11a 6Mbps_EVS NB 24. 4kbps_Ch40_8N
5.2 RCV Distortion and Noise - 800 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	29.17	WLAN5GHz_802.11a 6Mbps_EVS NB 24. 4kbps_Ch40_8N
5.2 RCV Distortion and Noise - 1000 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	39.18	WLAN5GHz_802.11a 6Mbps_EVS NB 24. 4kbps_Ch40_8N
5.2 RCV Distortion and Noise - 1250 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	32.09	WLAN5GHz_802.11a 6Mbps_EVS NB 24. 4kbps_Ch40_8N
5.2 RCV Distortion and Noise - 1600 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	39.81	WLAN5GHz_802.11a 6Mbps_EVS NB 24. 4kbps_Ch40_8N
5.2 RCV Distortion and Noise - 2000 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	42.83	WLAN5GHz_802.11a 6Mbps_EVS NB 24. 4kbps_Ch40_8N
5.2 RCV Distortion and Noise - 2500 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	43.44	WLAN5GHz_802.11a 6Mbps_EVS NB 24. 4kbps_Ch40_8N
5.2 RCV Distortion and Noise - 3150 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	43.59	WLAN5GHz_802.11a 6Mbps_EVS NB 24. 4kbps_Ch40_8N
Report - Receive Distortion and Noise (Conversational Gain)	Ok	Minimum SDNR [dB], (occured at 630Hz)	29.12	WLAN5GHz_802.11a 6Mbps_EVS NB 24. 4kbps_Ch40_8N
5.3 Frequency Response 8N FF HANB	Ok	Min. dist. to tolerance scheme [dB], 1547.5 Hz	0.87	WLAN5GHz_802.11a 6Mbps_EVS NB 24. 4kbps_Ch40_8N
5.3 Frequency Response 8N DF HANB	Ok	Min. dist. to tolerance scheme [dB], 544.4 Hz	1.35	WLAN5GHz_802.11a 6Mbps_EVS NB 24. 4kbps_Ch40_8N

Overall Receive Delay NB	5
5.1a Receive Volume Control Performance 8N NB	6
5.2 RCV Distortion and Noise - 400 Hz NB	7
5.2 RCV Distortion and Noise - 500 Hz NB	8
5.2 RCV Distortion and Noise - 630 Hz NB	9
5.2 RCV Distortion and Noise - 800 Hz NB	10
5.2 RCV Distortion and Noise - 1000 Hz NB	11
5.2 RCV Distortion and Noise - 1250 Hz NB	12
5.2 RCV Distortion and Noise - 1600 Hz NB	13
5.2 RCV Distortion and Noise - 2000 Hz NB	14
5.2 RCV Distortion and Noise - 2500 Hz NB	15
5.2 RCV Distortion and Noise - 3150 Hz NB	16
Report - Receive Distortion and Noise (Conversational Gain)	17
5.3 Frequency Response 8N FF HANB	18
5.3 Frequency Response 8N DF HANB	19

Overall Receive Delay NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ Preparation - Delay measurement

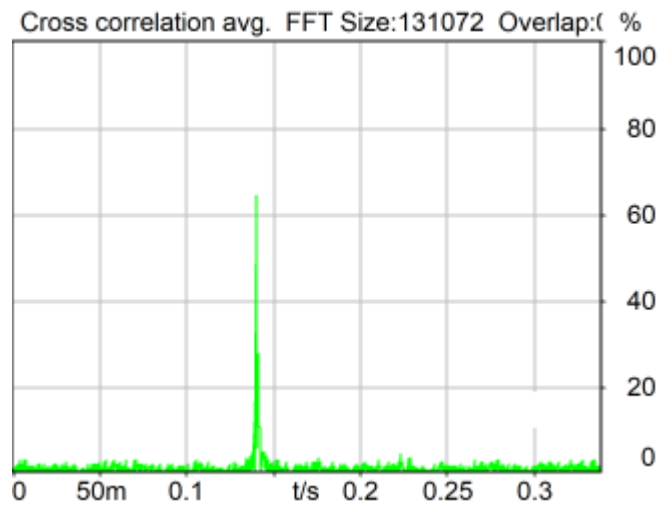


Delay (Cross): 140.9 ms

24/06/27 20:45 ACQUA 5.1.200

5.1a Receive Volume Control Performance 8N NB

TIA-5050 (2018-01) \ Measurements \ Narrowband

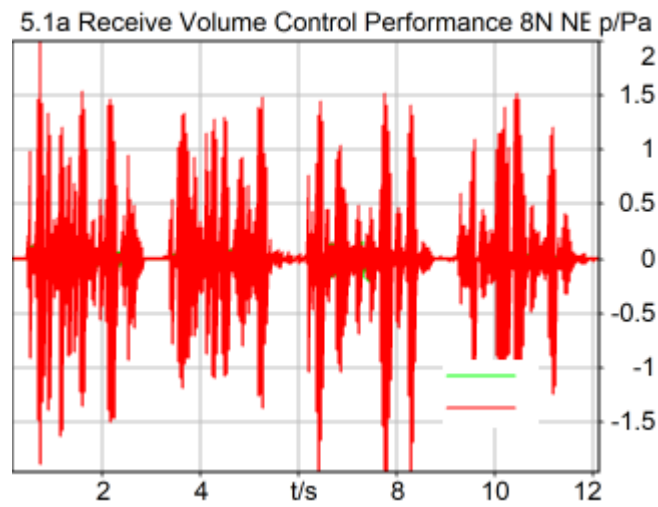


Speech Level RCV: 81.10 dB[SPL], Act.: 80.18% Ok

Ok

24/06/27 20:45 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 400 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

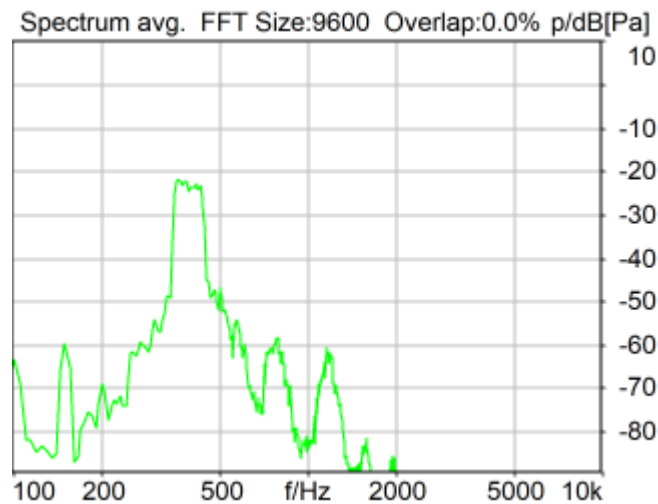


Distortion (Noise) RCV (packed): 29.56 dB (3.33%) Ok

Ok

24/06/27 20:46 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 500 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

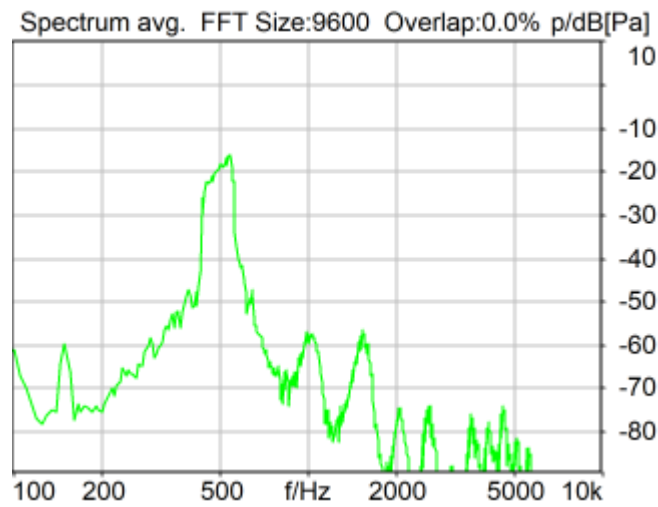


Distortion (Noise) RCV (packed): 30.02 dB (3.15%) Ok

Ok

24/06/27 20:46 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 630 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

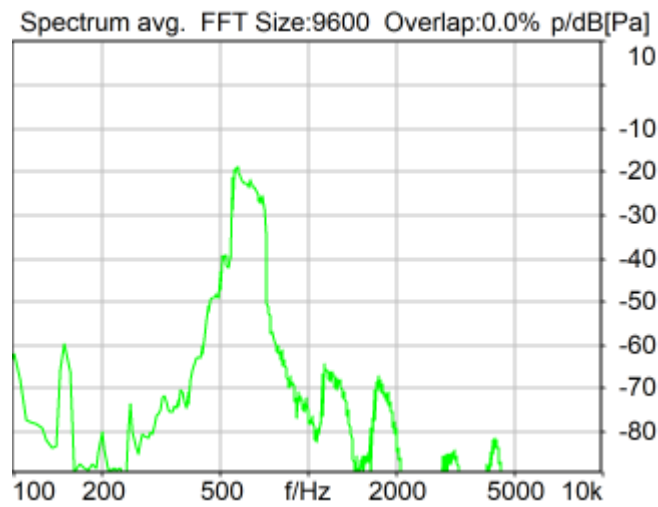


Distortion (Noise) RCV (packed): 29.12 dB (3.50%) Ok

Ok

24/06/27 20:47 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 800 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

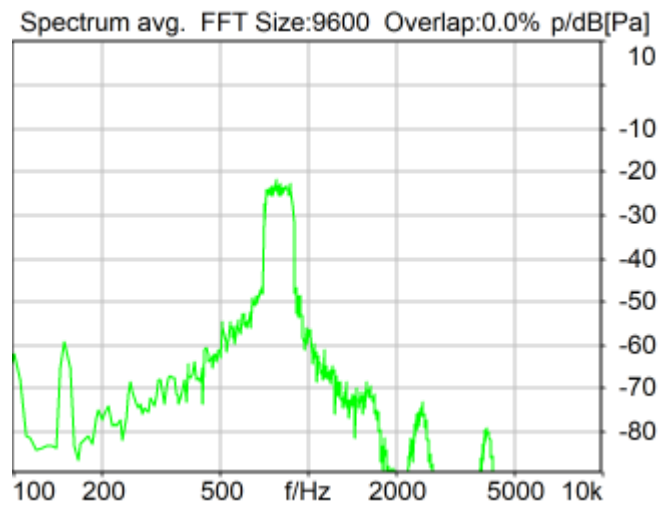


Distortion (Noise) RCV (packed): 29.17 dB (3.48%) Ok

Ok

24/06/27 20:47 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 1000 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

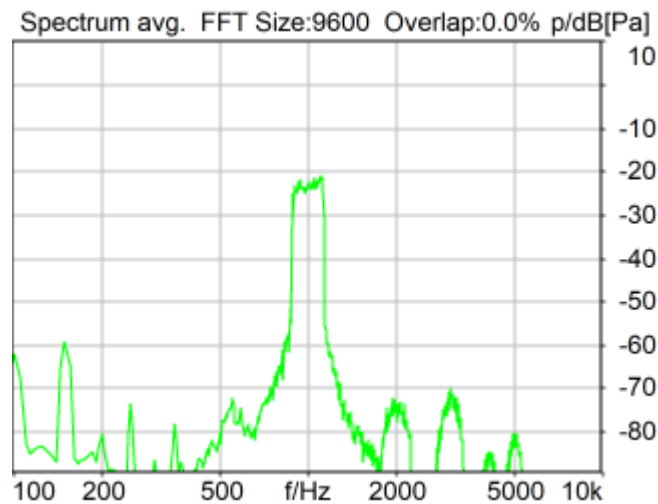


Distortion (Noise) RCV (packed): 39.18 dB (1.10%) Ok

Ok

24/06/27 20:48 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 1250 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

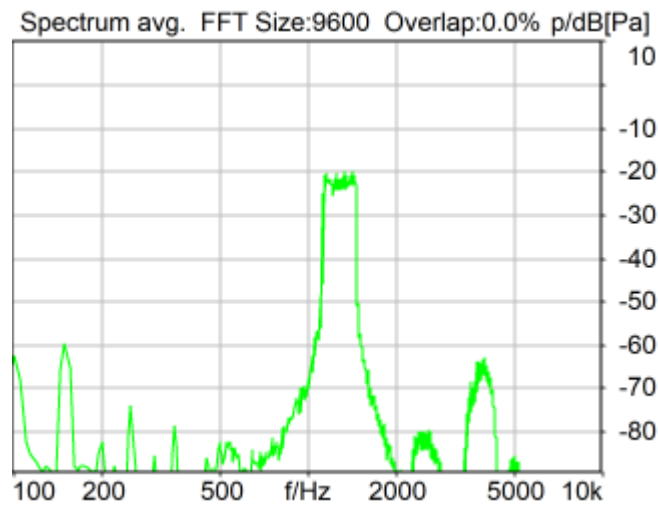


Distortion (Noise) RCV (packed): 32.09 dB (2.49%) Ok

Ok

24/06/27 20:48 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 1600 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

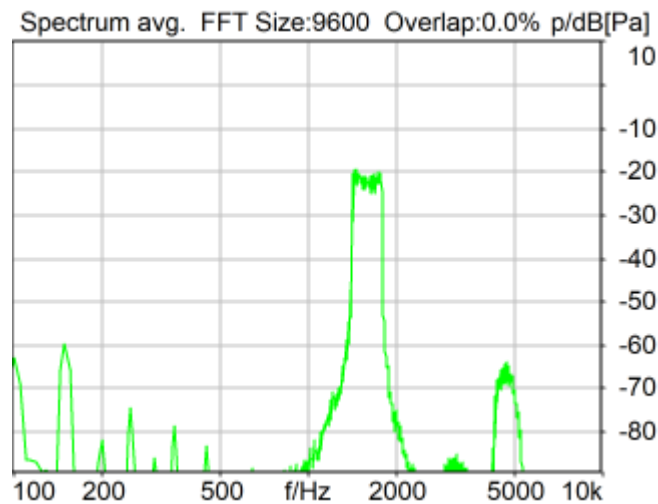


Distortion (Noise) RCV (packed): 39.81 dB (1.02%) Ok

Ok

24/06/27 20:48 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 2000 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

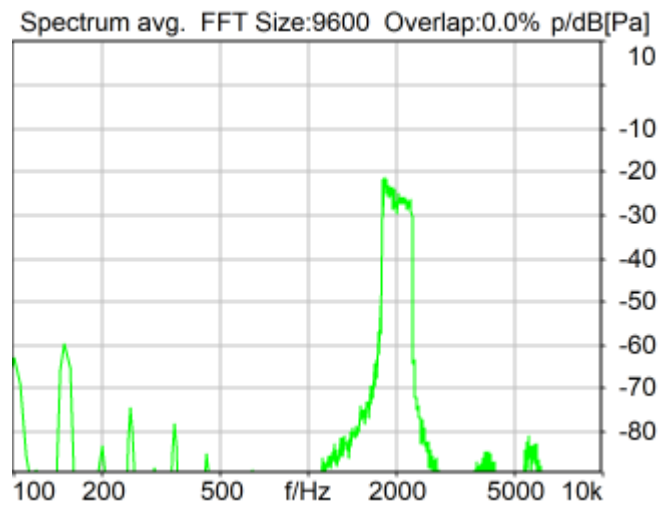


Distortion (Noise) RCV (packed): 42.83 dB (0.72%) Ok

Ok

24/06/27 20:49 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 2500 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

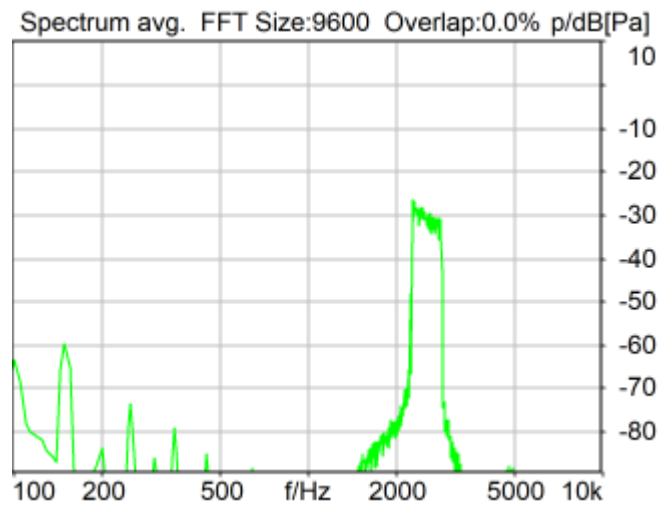


Distortion (Noise) RCV (packed): 43.44 dB (0.67%) Ok

Ok

24/06/27 20:49 ACQUA 5.1.200

5.2 RCV Distortion and Noise - 3150 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

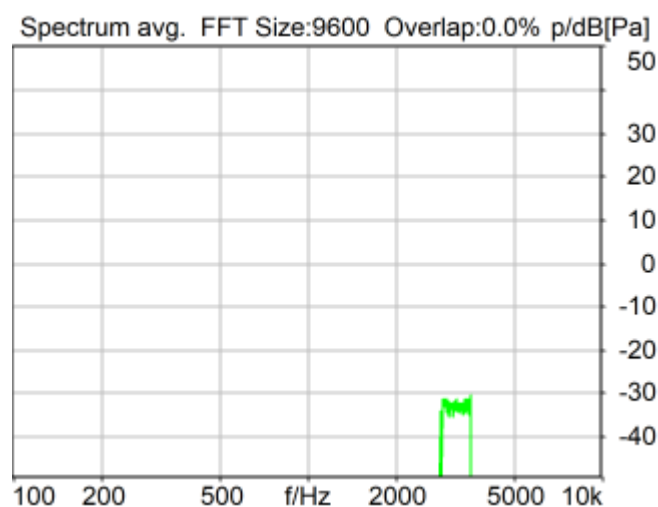

Distortion (Noise) RCV (packed): 43.59 dB (0.66%) Ok

Ok

24/06/27 20:50 ACQUA 5.1.200

Report - Receive Distortion and Noise (Conversational Gain)

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

Region	Frequency	SDNR
1	400Hz	29.56 dB
2	500Hz	30.02 dB
3	630Hz	29.12 dB
4	800Hz	29.17 dB
5	1000Hz	39.18 dB
6	1250Hz	32.09 dB
7	1600Hz	39.81 dB
8	2000Hz	42.83 dB
9	2500Hz	43.44 dB
10	3150Hz	43.59 dB


All SDNRs were greater than 20.0 dB, requirement was met.

Smallest SDNR was 29.12dB at 630Hz.

24/06/27 21:12 ACQUA

5.3 Frequency Response 8N FF HANB

TIA-5050 (2018-01) \ Measurements \ Narrowband

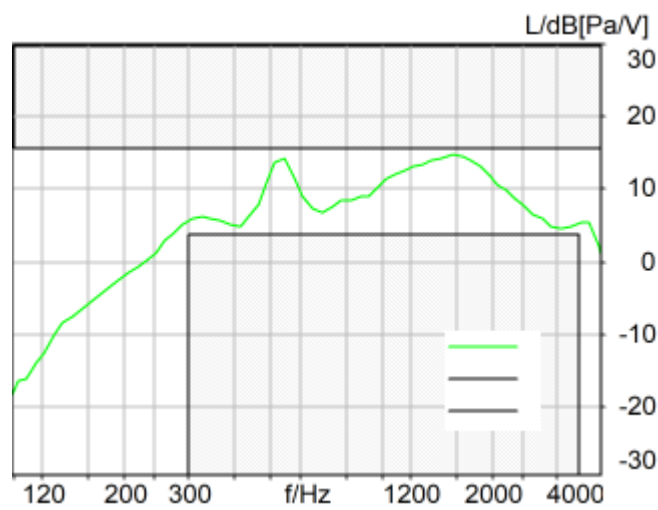


Absolute minimal distance
0.87 dB at 1547.5 Hz Ok

Ok

24/06/27 21:12 ACQUA 5.1.200

5.3 Frequency Response 8N DF HANB

TIA-5050 (2018-01) \ Measurements \ Narrowband

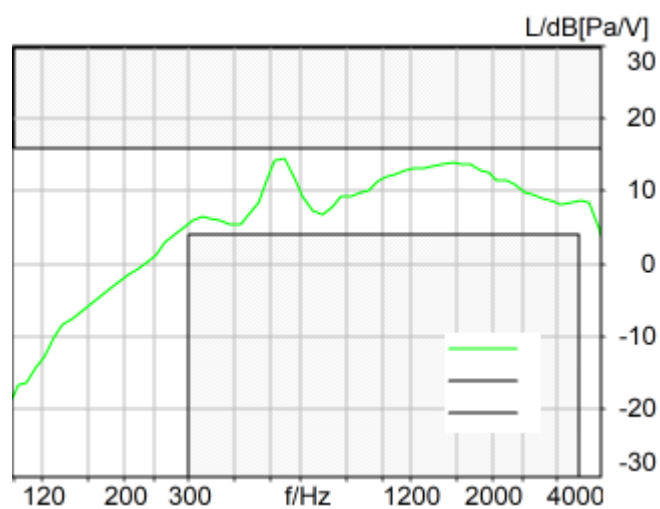

Absolute minimal distance
1.35 dB at 544.4 Hz Ok

Ok

24/06/27 21:12 ACQUA 5.1.200



Appendix B. Calibration Certificate

The calibration certificates are shown as follows.



中国认可
国际互认
校准
CALIBRATION
CNAS L0134

校准证书编号:

Calibration certificate series No.

2023D51-10-4912001001



上海市计量测试技术研究院

SHANGHAI INSTITUTE OF MEASUREMENT AND TESTING TECHNOLOGY

华东国家计量测试中心

NATIONAL CENTER OF MEASUREMENT AND TESTING FOR EAST CHINA

校准证书

Calibration Certificate

委 托 者

Customer

Sporton

联络信息

Contact information

/

器具名称

Name of Instrument

多通道声分析仪

制 造 厂

Manufacturer

HEAD acoustics

型号/规格

Model/Specification

labCORE

器具编号

No. of instrument

77000544

器具准确度

Instrument accuracy

/

批 准 人

Approved by

姜志华

姜志华

(机构校准专用章)

核 验 员

Checked by

陈文王

陈文王

校 准 员

Calibrated by

杨易宁

杨易宁

发布日期

Issue date

2023

年

10

月

31

日

Year

Month

Day



地址: 上海市张衡路1500号(总部)

Address No.1500 Zhangheng Road, Shanghai(headquarter)

电话: 021-38839800

Tel.

传真: 021-50798390

Fax

邮编: 201203

PostCode

客户咨询电话: 800-820-5172

Inquire line

投诉电话: 021-50798262

Complaints line

未经本院/中心批准, 部分采用本证书内容无效。

Partly using this certificate will not be admitted unless allowed by SIMT.

第 1 页 共 3 页

Page of total pages



中国认可
国际互认
校准
CALIBRATION
CNAS L0134

校准证书编号:

2023D51-10-4912001001

Calibration certificate series No.



国家法定计量检定机构计量授权证书号(中心/院):(国)法计(2022)01039号/(2022)01019号

The number of the Certificate of Metrological Authorization to The Legal Metrological Verification Institution is No. (2022) 01039/ No. (2022) 01019

本次校准所依据的技术规范(代号、名称):

Reference documents for the calibration (code、name)

JJF 1288-2011《多通道声分析仪校准规范》

本次校准所使用的主要计量标准器具:

Main measurement standards used in this calibration

名称 Name	型号规格 Model	编号 Number	测量范围 Measurement range	不确定度或准确度等级或最大允许误差 Uncertainty/Accuracy Class/Maximum Permissible Error	溯源机构名称 Name of traceability institution	证书编号/有效期限 Certificate No./Due date
正弦/噪声发生器	1054	2515963	2Hz~200kHz	幅频特性:MPE: $\pm 0.2\text{dB}$	SIMT	2023F00-10-4451793001/ 2024-03-05
数字多用表	8508A	900151275	0.01V~1000V	MPE: $\pm 0.2\%$	NIM	DCsy2023-01703/ 2024-06-27
频率计数器	E312A	87090459	10Hz~10MHz	MPE: $\pm 0.01\%$	SIMT	2022F34-10-4263795001/ 2023-11-16
多通道声分析仪	3160-A-042	3160-107018	混响时间: 0.01s~30s 频率: 10Hz~50kHz 声压级: 1dB~140dB	混响时间: $\pm 5\%$, 频率响应: $\pm 0.1\text{dB}$	SIMT	2023D51-10-4786532001/ 2024-08-21
/	/	/	/	/	/	/

以上计量标准器具的量值溯源至国家基准/测量标准。

Quantity values of above measurement standards used in this calibration are traced to the national primary standards of P.R. China / national measurement standards.

其他校准信息:

Calibration Information

地点: 张衡路1500号机械楼203室

Location

温度: 21.5℃

Ambient temperature

湿度: 68.5%RH

Humidity

其他: 气压: 101.5 kPa

Others

受样日期 2023年10月27日

Received date

校准日期 2023年10月27日

Date for calibration

备注:

Note:

本证书提供的结果仅对本次被校的器具有效。

The data are valid only for the instrument(s).

校准证书续页专用

Continued page of calibration certificate

第 2 页 共 3 页

Page of total pages



校准结果/说明:

Results of calibration and additional explanation

输入通道: 1

一、 频率计权和频率响应:

频率 /Hz	频率计权和频率响应/dB			频率/Hz	频率计权和频率响应/dB		
	A	C	L		A	C	L
10	-70.7	/	-0.3	500	-3.2	/	0.0
12.5	-63.5	/	-0.1	630	-1.9	/	0.0
16	-56.7	/	0.0	800	-0.8	/	0.0
20	-50.5	/	0.0	1000	0.0	/	0.0
25	-44.7	/	0.0	1250	0.6	/	0.0
31.5	-39.4	/	0.0	1600	1.0	/	0.0
40	-34.6	/	0.0	2000	1.2	/	0.0
50	-30.2	/	0.0	2500	1.3	/	0.0
63	-26.2	/	0.0	3150	1.2	/	0.0
80	-22.5	/	0.0	4000	1.0	/	0.0
100	-19.1	/	0.0	5000	0.5	/	0.0
125	-16.1	/	0.0	6300	-0.1	/	0.0
160	-13.4	/	0.0	8000	-1.1	/	0.0
200	-10.9	/	0.0	10000	-2.5	/	0.0
250	-8.6	/	0.0	12500	-4.4	/	-0.1
315	-6.6	/	0.0	16000	-7.0	/	-0.4
400	-4.8	/	0.0	20000	-10.1	/	-0.8

频率计权和频率响应校准值的扩展不确定度 $U=0.1\text{dB}(k=2)$

二、 级线性 (1kHz)

起始点指示声级 90.0 dB

起始点以上间隔10dB点的最大误差 0.0 dB;

起始点以下间隔10dB点的最大误差 0.0 dB。

上限以下5dB以内的1dB点的最大误差 0.0 dB;

下限以上5dB以内的1dB点的最大误差 0.0 dB。

级线性校准值的扩展不确定度 $U=0.2\text{dB}(k=2)$

三、 自生噪声: A 5.3 dB; C / dB; L 9.0 dB。

自生噪声的扩展不确定度 $U=0.2\text{dB}(k=2)$

注: 自生噪声非我院CNAS授权范围。

校准结果内容结束

上海市计量测试技术研究院

SHANGHAI INSTITUTE OF MEASUREMENT AND TESTING TECHNOLOGY

华东国家计量测试中心

NATIONAL CENTER OF MEASUREMENT AND TESTING FOR EAST CHINA

校准证书

Calibration Certificate

委 托 者

Customer

Sporton

联 络 信 息

Contact information

/

器 具 名 称

Name of Instrument

声学用人头和躯干模拟器

制 造 厂

Manufacturer

Head Acoutics

型 号 / 规 格

Model/Specification

HMS II.3

器 具 编 号

No. of instrument

12306242

器具准确度

Instrument accuracy

/

批 准 人

Approved by

姜志华

(机构校准专用章)

核 验 员

Checked by

杨易宁

校 准 员

Calibrated by

邓峥

发布日期

Issue date

2023

年

11

月

03

日

Year

Month

Day



地址: 上海市张衡路1500号(总部)

Address No.1500 Zhangheng Road, Shanghai(headquarter)

电话: 021-38839800

Tel.

传真: 021-50798390

Fax

邮编: 201203

PostCode

客户咨询电话: 800-820-5172 投诉电话: 021-50798262

Inquire line

Complaints line

未经本院/中心批准, 部分采用本证书内容无效。

Partly using this certificate will not be admitted unless allowed by SIMT.

第 1 页 共 3 页

Page of total pages

国家法定计量检定机构计量授权证书号(中心/院):(国)法计(2022)01039号/(2022)01019号
The number of the Certificate of Metrological Authorization to The Legal Metrological Verification Institution is No. (2022) 01039/ No. (2022) 01019

本次校准所依据的技术规范(代号、名称):

Reference documents for the calibration (code、name)

JJF 1520-2015 《声学用头和躯干模拟器校准规范》

本次校准所使用的主要计量标准器具:

Main measurement standards used in this calibration

名称 Name	型号规格 Model	编号 Number	测量范围 Measurement range	不确定度或准确度等级或最大允许误差 Uncertainty/Accuracy Class/Maximum Permissible Error	溯源机构名称 Name of traceability institution	证书编号/有效期限 Certificate No./Due date
多通道声分析仪	3160-A-042	3160-107018	10Hz~50kHz;-10dB~160dB	MPE:±0.1dB	SIMT	2023D51-10-4786532001 / 2024-08-21 /
/	/	/	/	/	/	/

以上计量标准器具的量值溯源至国家基准/测量标准。

Quantity values of above measurement standards used in this calibration are traced to the national primary standards of P.R. China / national measurement standards.

其他校准信息:

Calibration Information

地点: 张衡路1500号声学楼全消声室

Location

温度: 23.3℃

Ambient temperature

湿度: 60.3%RH

Humidity

其他: 气压(kPa):101.2

Others

受样日期 2023年10月27日

Received date

校准日期

Date for calibration

2023年11月02日

备注:

Note:

本证书提供的结果仅对本次被校的器具有效。

The data are valid only for the instrument(s).

校准结果/说明:
Results of calibration and additional explanation

一、耳自由场频率响应
右耳

频率/Hz	100	125	160	200	250	315
频率响应/dB	0.5	0.5	0.4	0.2	0.0	0.5

频率/Hz	400	500	630	800	1000	1250
频率响应/dB	1.5	2.8	3.6	4.9	5.2	3.6


频率/Hz	1600	2000	2500	3150	4000	5000
频率响应/dB	4.0	12.4	16.9	16.0	14.0	12.4

频率/Hz	6300	8000	10000
频率响应/dB	8.0	6.6	5.2


耳自由场频率响应校准值的扩展不确定度 $U=1.0\text{ dB}(k=2)$

校准结果内容结束

Appendix C. Test Setup Photos

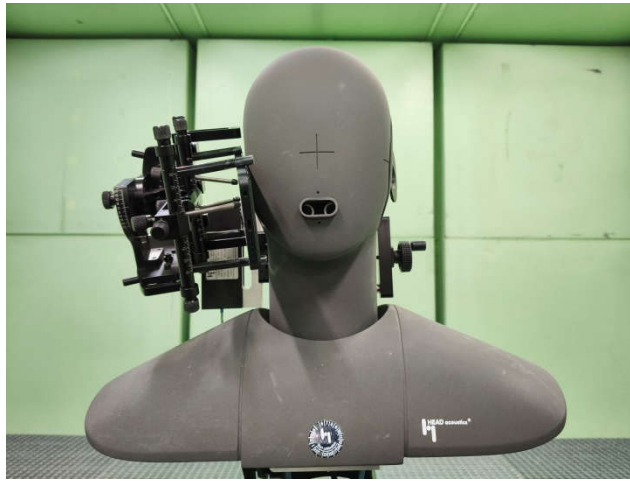

Front View

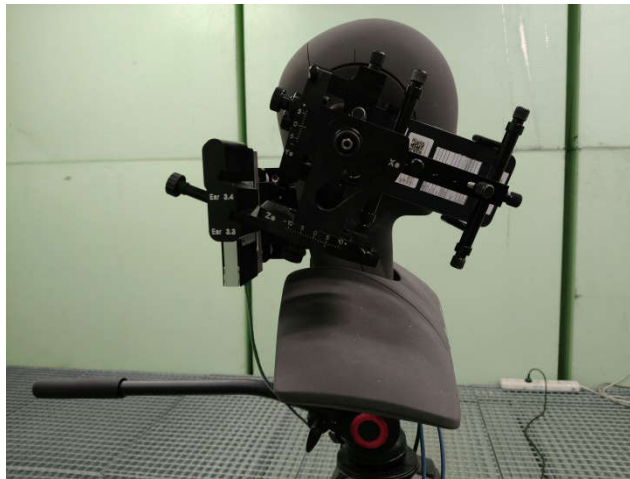

Left Side View