

GSM850_GPRS10_Left Cheek_128

DUT: EUT


Communication System: GPRS 850-2solt; Frequency: 824.2 MHz;Duty Cycle: 1:4
Medium: H835 Medium parameters used : $f = 824.2$ MHz; $\sigma = 0.925$ mho/m; $\epsilon_r = 41.8$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.25, 6.25, 6.25); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x71x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.551 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.07 V/m; Power Drift = -0.043 dB
Peak SAR (extrapolated) = 0.606 W/kg
SAR(1 g) = 0.469 mW/g; SAR(10 g) = 0.335 mW/g
Maximum value of SAR (measured) = 0.521 mW/g

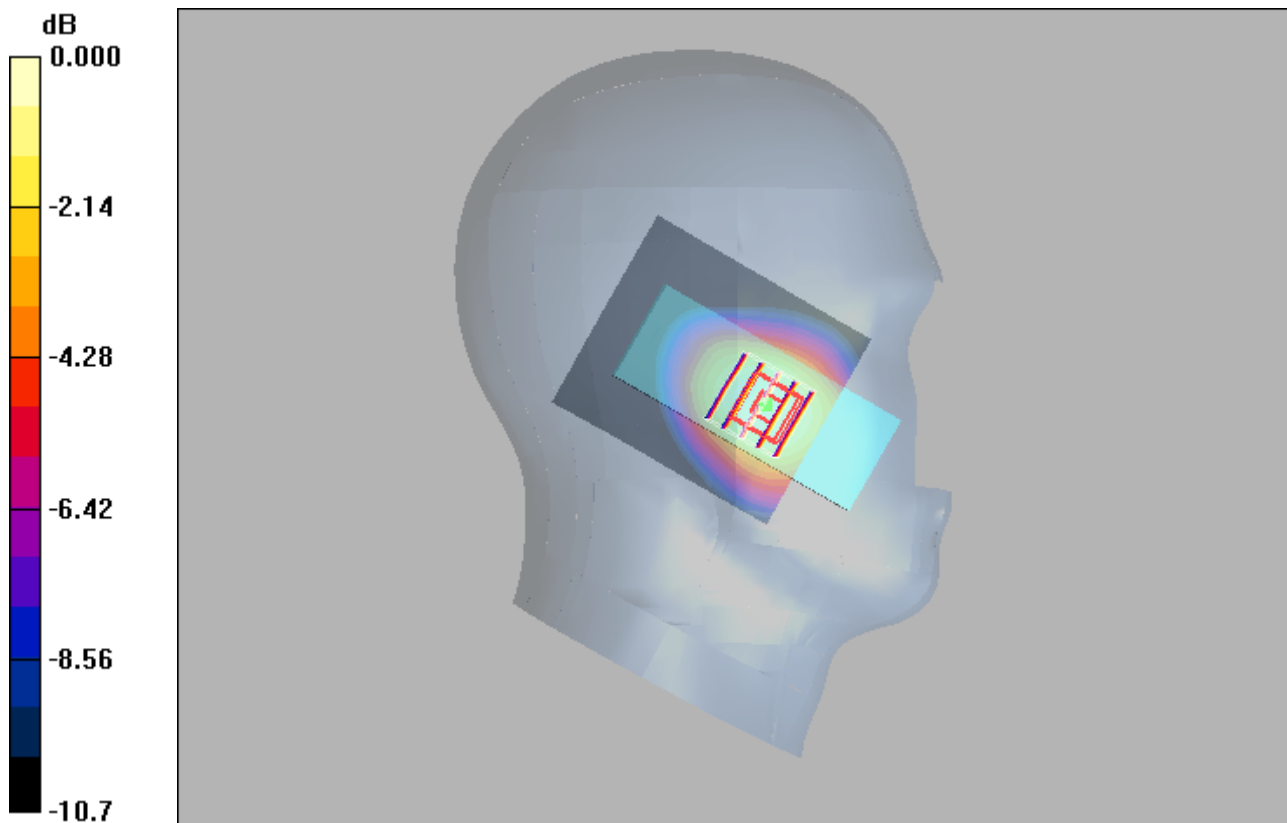

0 dB = 0.521mW/g

GSM1900_GPRS10_Right Cheek_512

DUT: EUT


Communication System: GPRS1900-2slots; Frequency: 1850.2 MHz; Duty Cycle: 1:4
 Medium: H1900 Medium parameters used : $f = 1850.2$ MHz; $\sigma = 1.34$ mho/m; $\epsilon_r = 39.3$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.11, 5.11, 5.11); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x71x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.535 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 7.40 V/m; Power Drift = -0.057 dB
 Peak SAR (extrapolated) = 0.677 W/kg
SAR(1 g) = 0.437 mW/g; SAR(10 g) = 0.274 mW/g
 Maximum value of SAR (measured) = 0.514 mW/g

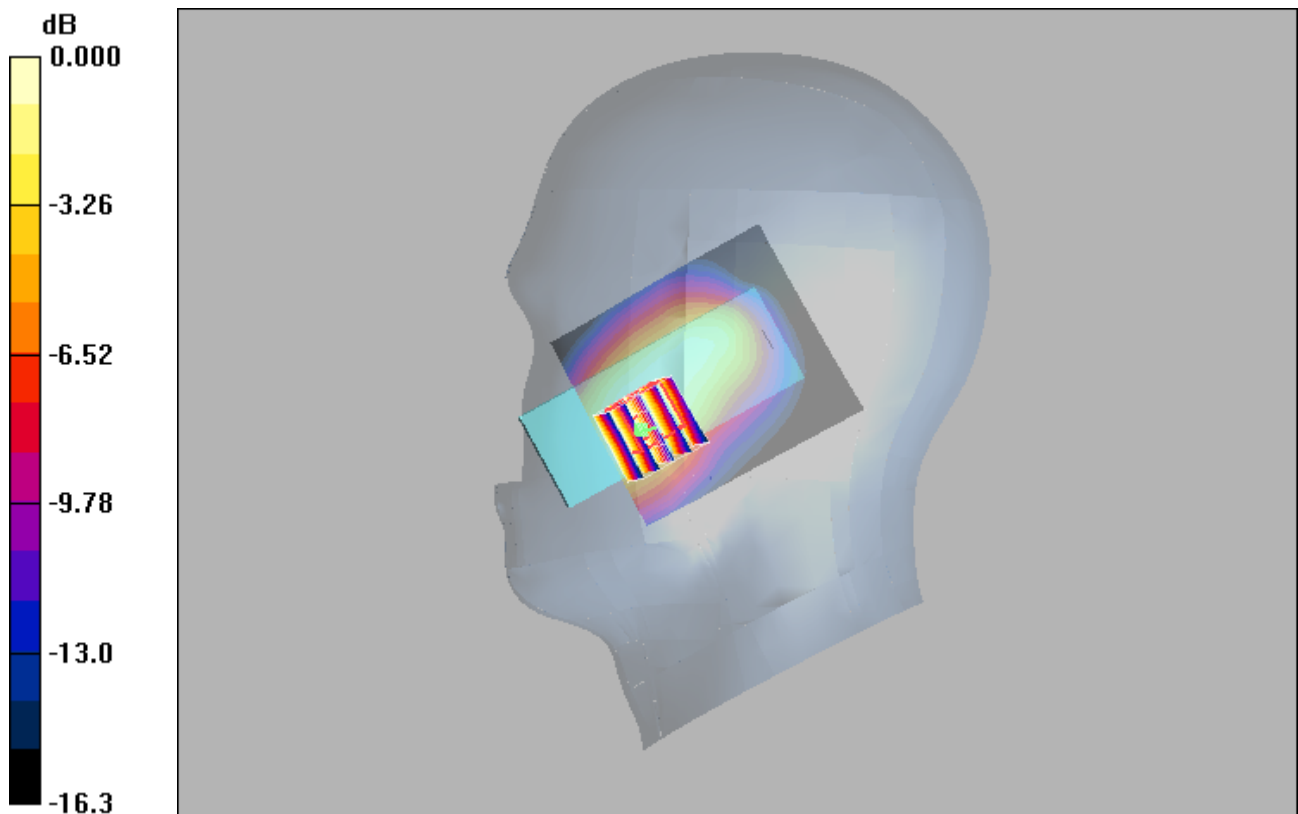

0 dB = 0.514mW/g

WCDMA II_RMC12.2K_Right Cheek_9262

DUT: EUT


Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1
 Medium: H1900 Medium parameters used : $f = 1852.4 \text{ MHz}$; $\sigma = 1.34 \text{ mho/m}$; $\epsilon_r = 39.3$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.11, 5.11, 5.11); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x71x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.360 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 5.62 V/m ; Power Drift = -0.113 dB
 Peak SAR (extrapolated) = 0.425 W/kg
SAR(1 g) = 0.289 mW/g ; SAR(10 g) = 0.178 mW/g
 Maximum value of SAR (measured) = 0.330 mW/g

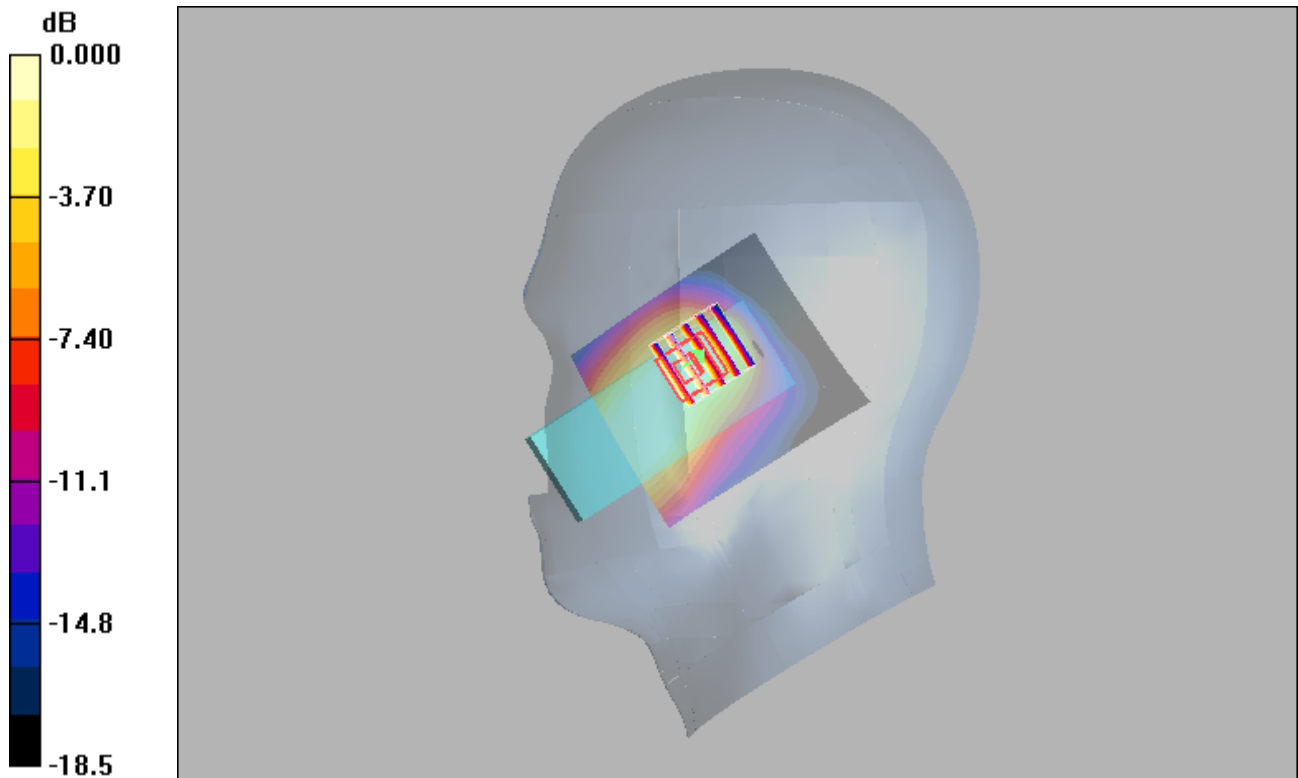

0 dB = 0.330mW/g

WCDMA V_RMC12.2K_Left Cheek_4233

DUT: EUT

Communication System: WCDMA Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: H835 Medium parameters used: $f = 847 \text{ MHz}$; $\sigma = 0.938 \text{ mho/m}$; $\epsilon_r = 41.7$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.25, 6.25, 6.25); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x71x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.962 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.43 V/m; Power Drift = 0.189 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.845 mW/g; SAR(10 g) = 0.592 mW/g

Maximum value of SAR (measured) = 0.960 mW/g

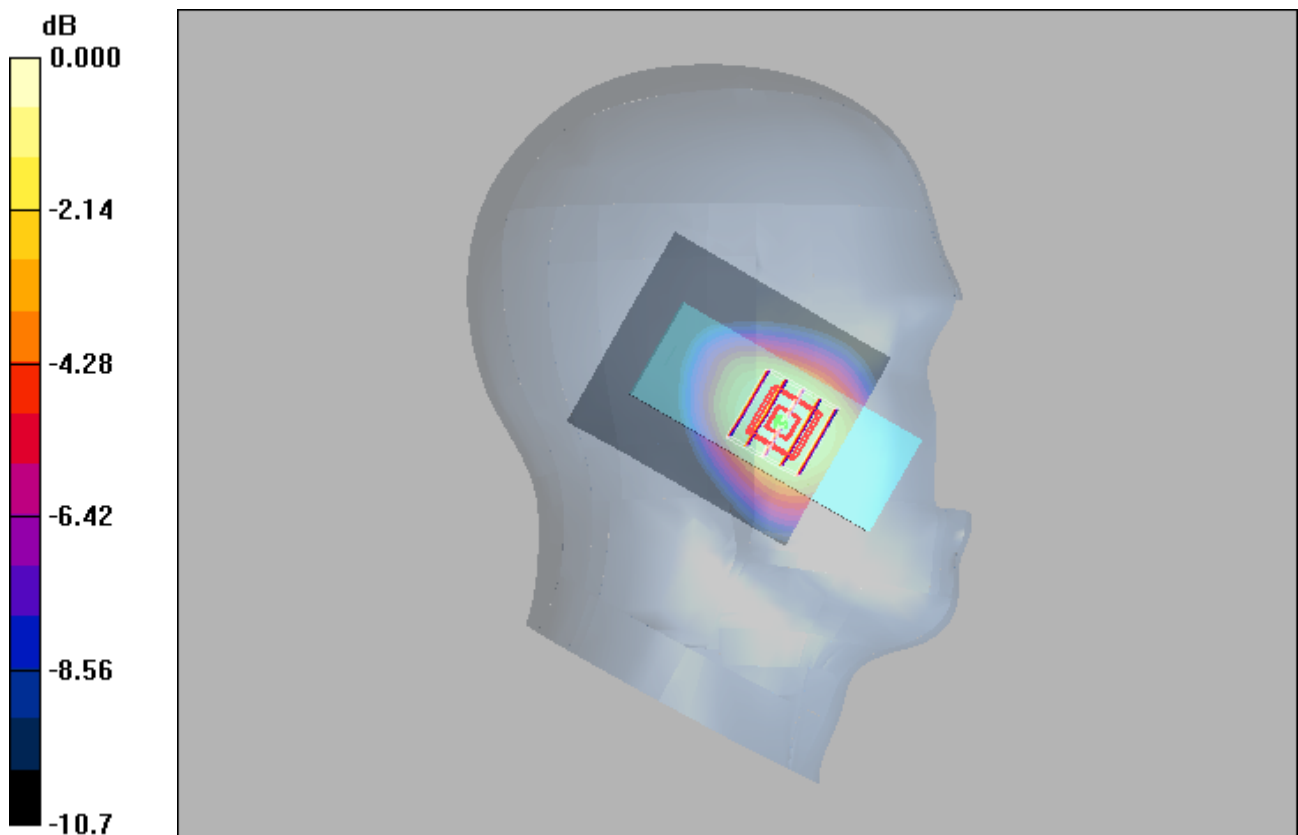

0 dB = 0.960mW/g

LTE 2_QPSK20M_50_50_Right Cheek_18700

DUT: EUT



Communication System: LTE Band 2; Frequency: 1860 MHz; Duty Cycle: 1:1
Medium: H1900 Medium parameters used : $f = 1860$ MHz; $\sigma = 1.34$ mho/m; $\epsilon_r = 39.3$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.11, 5.11, 5.11); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x71x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.502 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 9.35 V/m; Power Drift = 0.064 dB
Peak SAR (extrapolated) = 0.593 W/kg
SAR(1 g) = 0.390 mW/g; SAR(10 g) = 0.237 mW/g
Maximum value of SAR (measured) = 0.456 mW/g

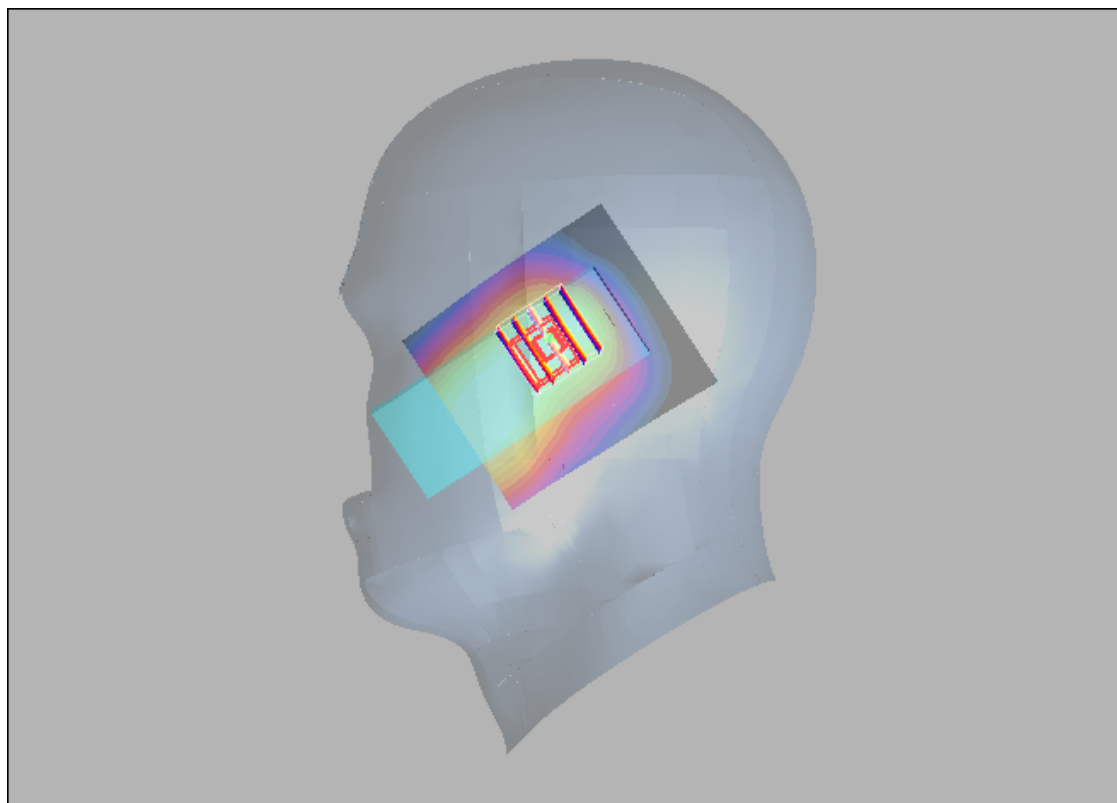

0 dB = 0.456mW/g

LTE 4_QPSK20M_1_0_Right Check_20175

DUT: EUT


Communication System: LTE Band 4&20M; Frequency: 1732.5 MHz; Duty Cycle: 1:1
 Medium: H1750 Medium parameters used : $f = 1732.5$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.37, 5.37, 5.37); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x71x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.513 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 8.58 V/m; Power Drift = -0.007 dB
 Peak SAR (extrapolated) = 0.637 W/kg
SAR(1 g) = 0.448 mW/g; SAR(10 g) = 0.292 mW/g
 Maximum value of SAR (measured) = 0.506 mW/g

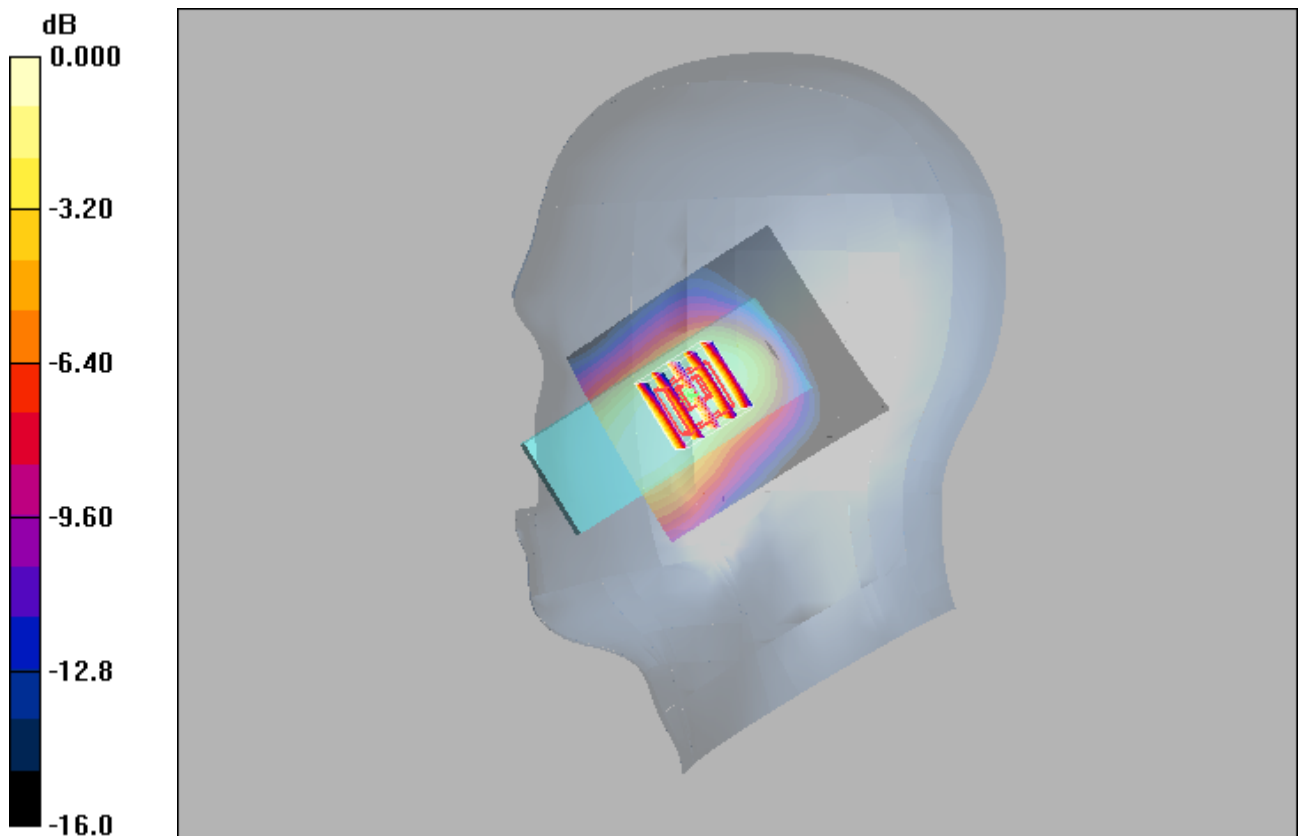

0 dB = 0.506mW/g

LTE 5_QPSK10M_1_49_Left Cheek_20600

DUT: EUT

Communication System: LTE Band5; Frequency: 844 MHz; Duty Cycle: 1:1

Medium: H835 Medium parameters used: $f = 844$ MHz; $\sigma = 0.936$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.25, 6.25, 6.25); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.12 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.60 V/m; Power Drift = -0.001 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.963 mW/g; SAR(10 g) = 0.673 mW/g

Maximum value of SAR (measured) = 1.09 mW/g

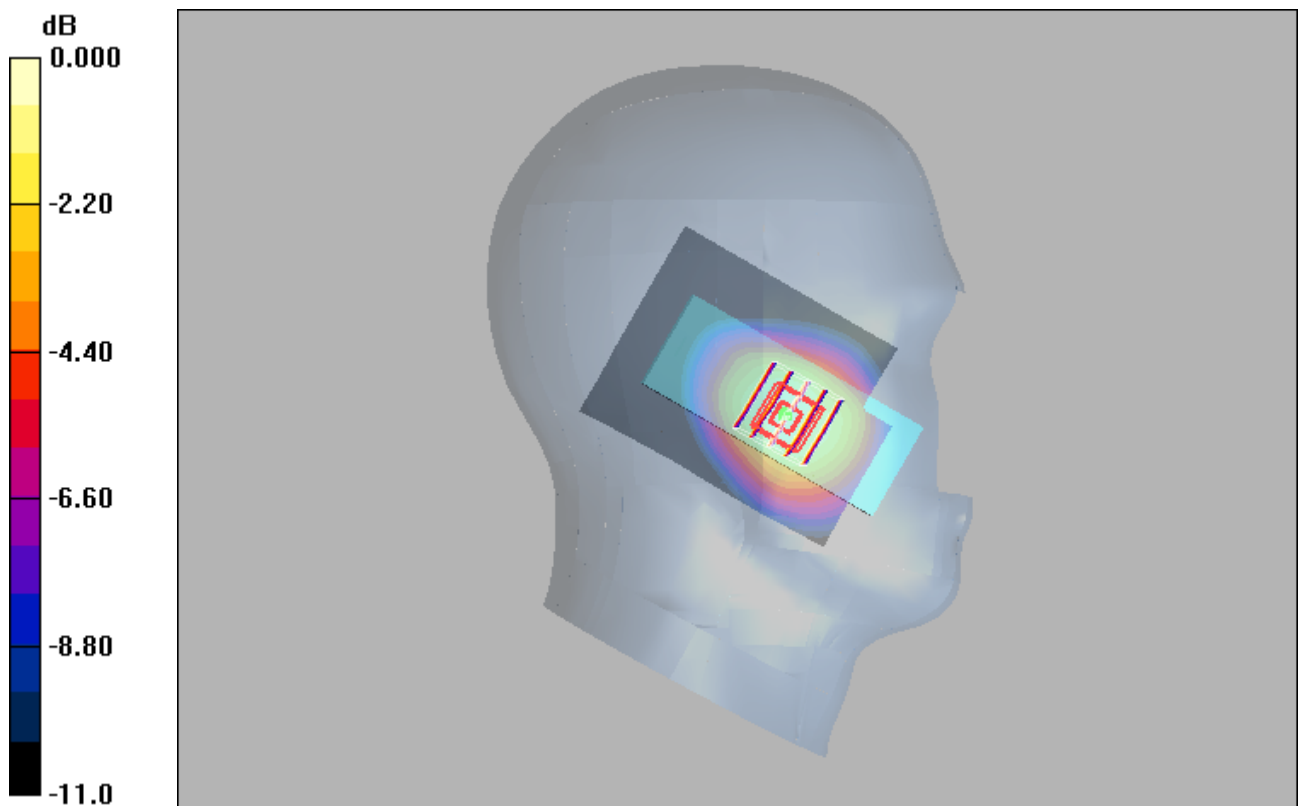

0 dB = 1.09mW/g

LTE 7_QPSK20M_1_99_Right Cheek_21350

DUT: EUT


Communication System: LTE Band 7&20M; Frequency: 2560 MHz;Duty Cycle: 1:1
Medium: H2600 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.84$ mho/m; $\epsilon_r = 37.7$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.53, 4.53, 4.53); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x91x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.779 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 5.96 V/m; Power Drift = 0.040 dB
Peak SAR (extrapolated) = 1.05 W/kg
SAR(1 g) = 0.587 mW/g; SAR(10 g) = 0.310 mW/g
Maximum value of SAR (measured) = 0.725 mW/g

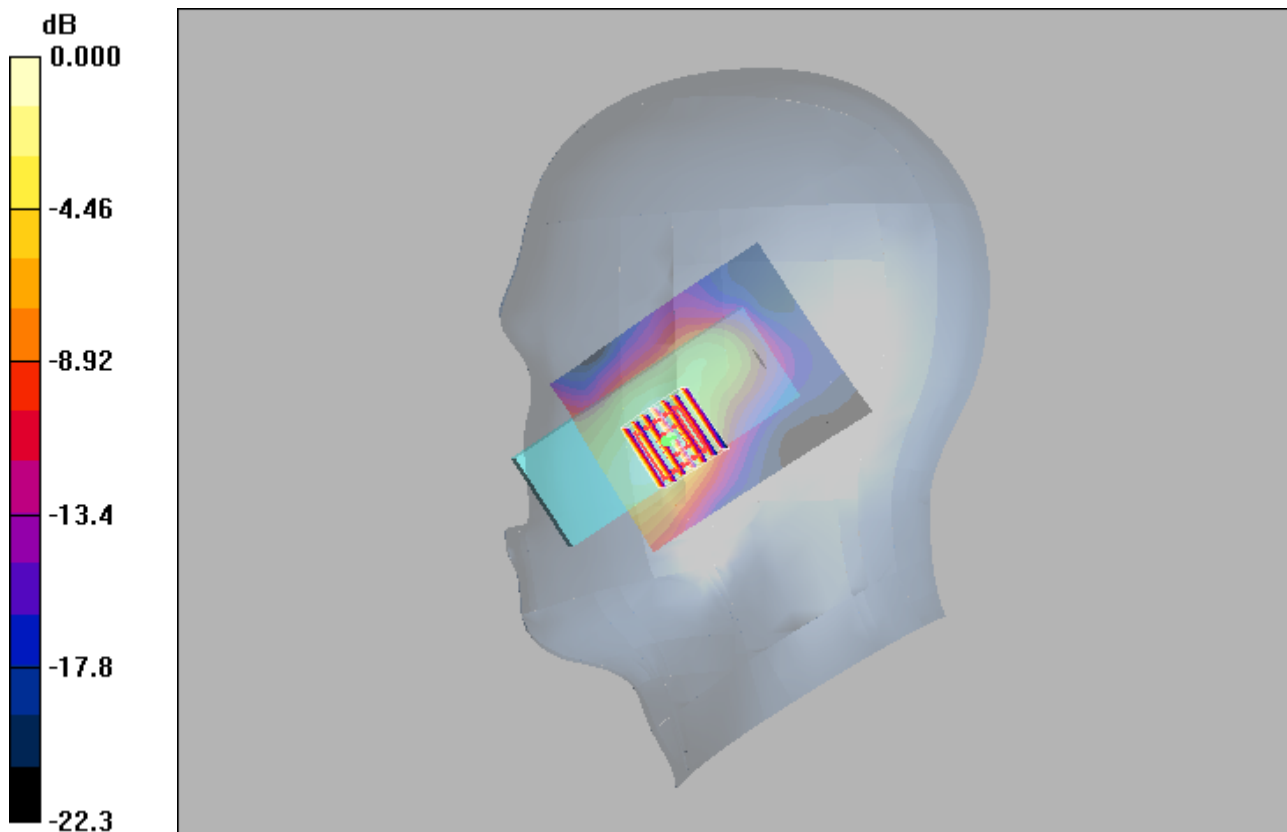

0 dB = 0.725mW/g

EDR_DH5_Left Cheek_39

DUT: EUT

Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2441$ MHz; $\sigma = 1.71$ mho/m; $\epsilon_r = 38$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.68, 4.68, 4.68); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.081 mW/g



Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.82 V/m; Power Drift = 0.113 dB

Peak SAR (extrapolated) = 0.124 W/kg

SAR(1 g) = 0.064 mW/g; SAR(10 g) = 0.034 mW/g

Maximum value of SAR (measured) = 0.079 mW/g

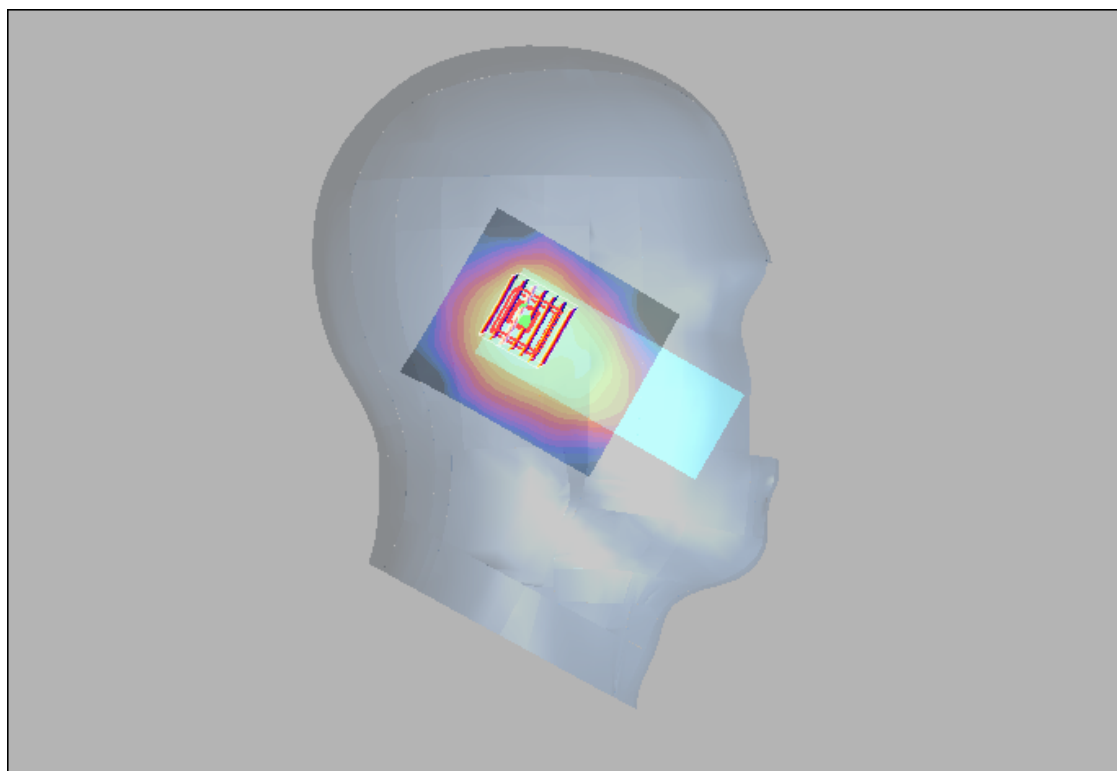

0 dB = 0.079mW/g

GSM850_GPRS10_Rear Face_10mm_128

DUT: EUT


Communication System: GPRS 850-2solt; Frequency: 824.2 MHz;Duty Cycle: 1:4
 Medium: H835 Medium parameters used : $f = 824.2 \text{ MHz}$; $\sigma = 0.925 \text{ mho/m}$; $\epsilon_r = 41.8$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.25, 6.25, 6.25); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x61x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.419 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 20.4 V/m; Power Drift = 0.084 dB
 Peak SAR (extrapolated) = 0.514 W/kg
SAR(1 g) = 0.368 mW/g; SAR(10 g) = 0.256 mW/g
 Maximum value of SAR (measured) = 0.418 mW/g

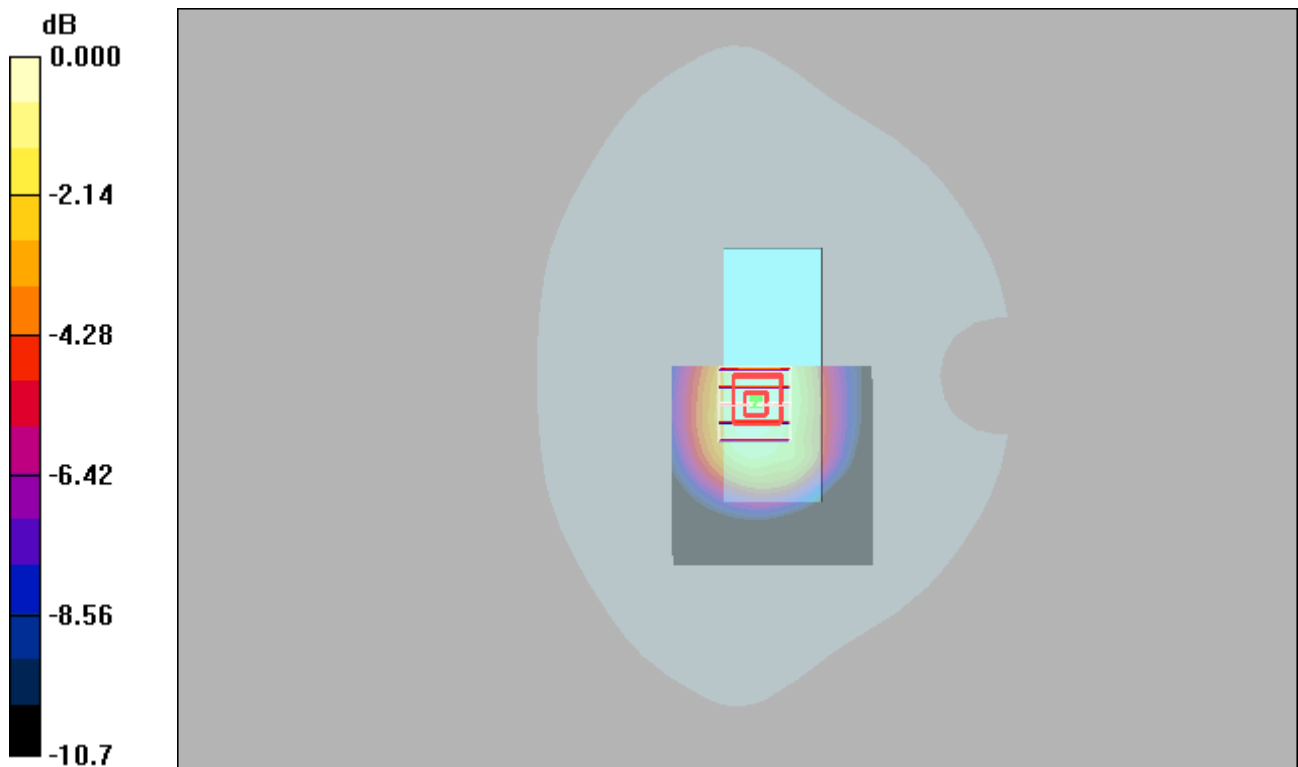

0 dB = 0.418mW/g

GSM1900_GPRS10_Rear Face_10mm_512

DUT: EUT


Communication System: GPRS1900-2slots; Frequency: 1850.2 MHz; Duty Cycle: 1:4
 Medium: H1900 Medium parameters used : $f = 1850.2$ MHz; $\sigma = 1.34$ mho/m; $\epsilon_r = 39.3$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.11, 5.11, 5.11); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 1.14 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 9.85 V/m; Power Drift = 0.006 dB
 Peak SAR (extrapolated) = 1.45 W/kg
SAR(1 g) = 0.814 mW/g; SAR(10 g) = 0.454 mW/g
 Maximum value of SAR (measured) = 0.986 mW/g

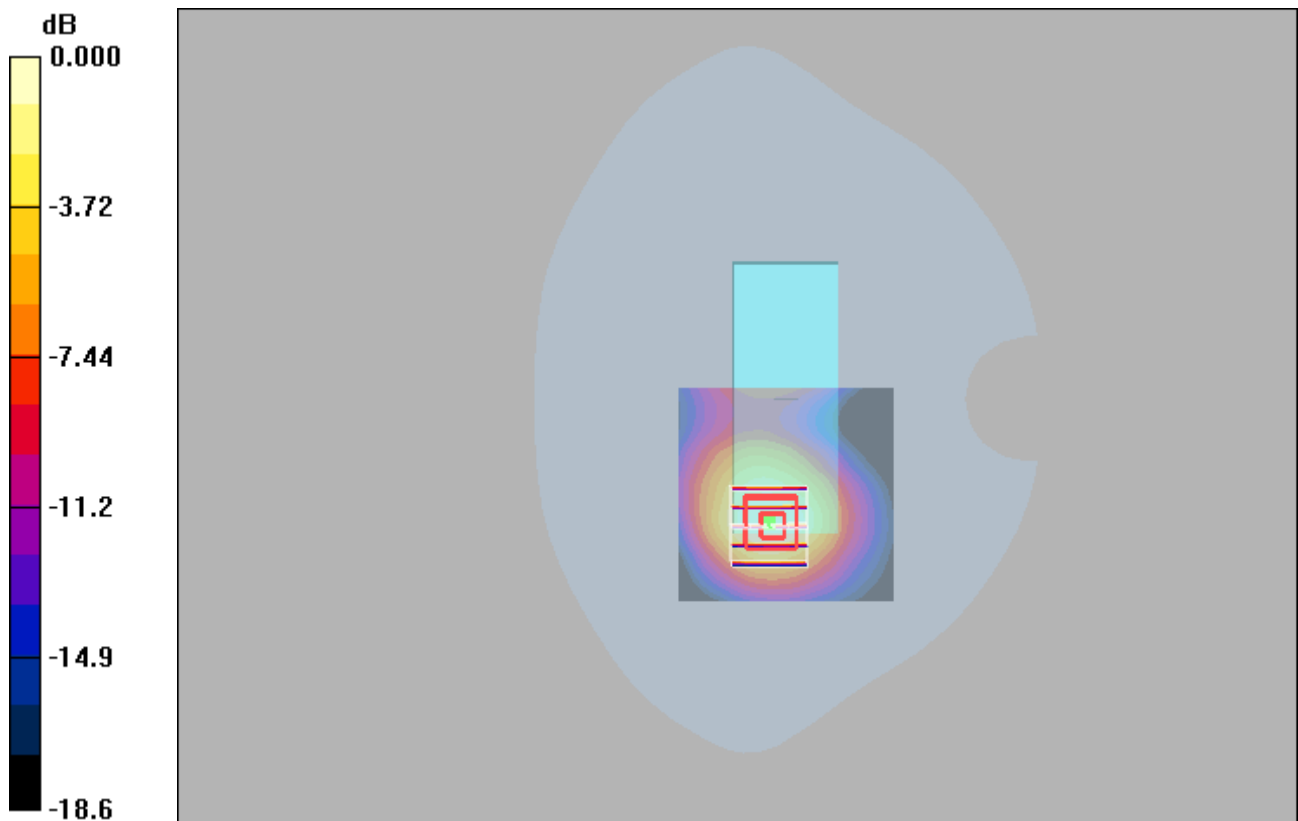

WCDMA II_RMC12.2K_Rear Face_10mm_9262

DUT: EUT


Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium: H1900 Medium parameters used : $f = 1852.4$ MHz; $\sigma = 1.34$ mho/m; $\epsilon_r = 39.3$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.11, 5.11, 5.11); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.906 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 9.86 V/m; Power Drift = -0.037 dB
Peak SAR (extrapolated) = 1.16 W/kg
SAR(1 g) = 0.652 mW/g; SAR(10 g) = 0.365 mW/g
Maximum value of SAR (measured) = 0.780 mW/g

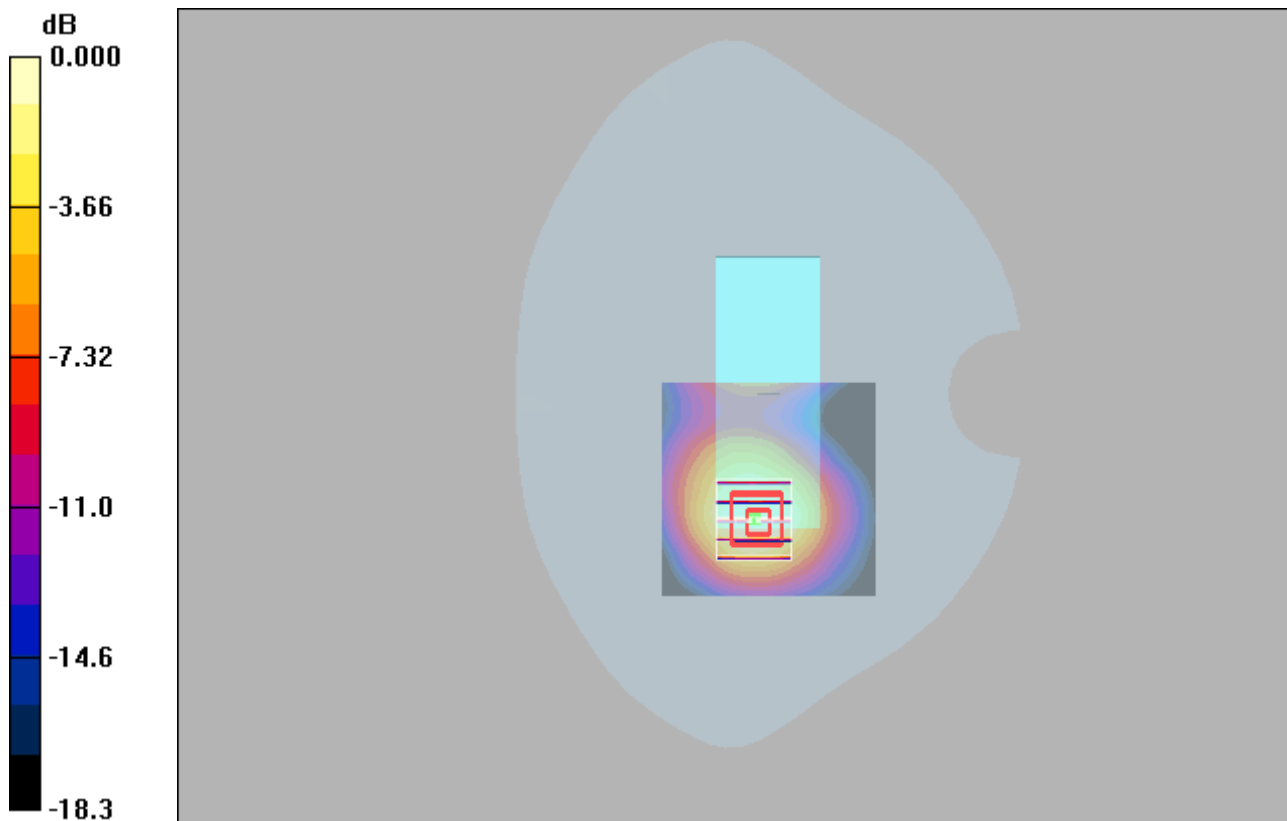

WCDMA V_RMC12.2K_Rear Face_10mm_4233

DUT: EUT

Communication System: WCDMA Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: H835 Medium parameters used: $f = 847 \text{ MHz}$; $\sigma = 0.938 \text{ mho/m}$; $\epsilon_r = 41.7$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.25, 6.25, 6.25); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x61x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.733 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 27.4 V/m; Power Drift = 0.055 dB

Peak SAR (extrapolated) = 0.893 W/kg

SAR(1 g) = 0.644 mW/g; SAR(10 g) = 0.448 mW/g

Maximum value of SAR (measured) = 0.731 mW/g

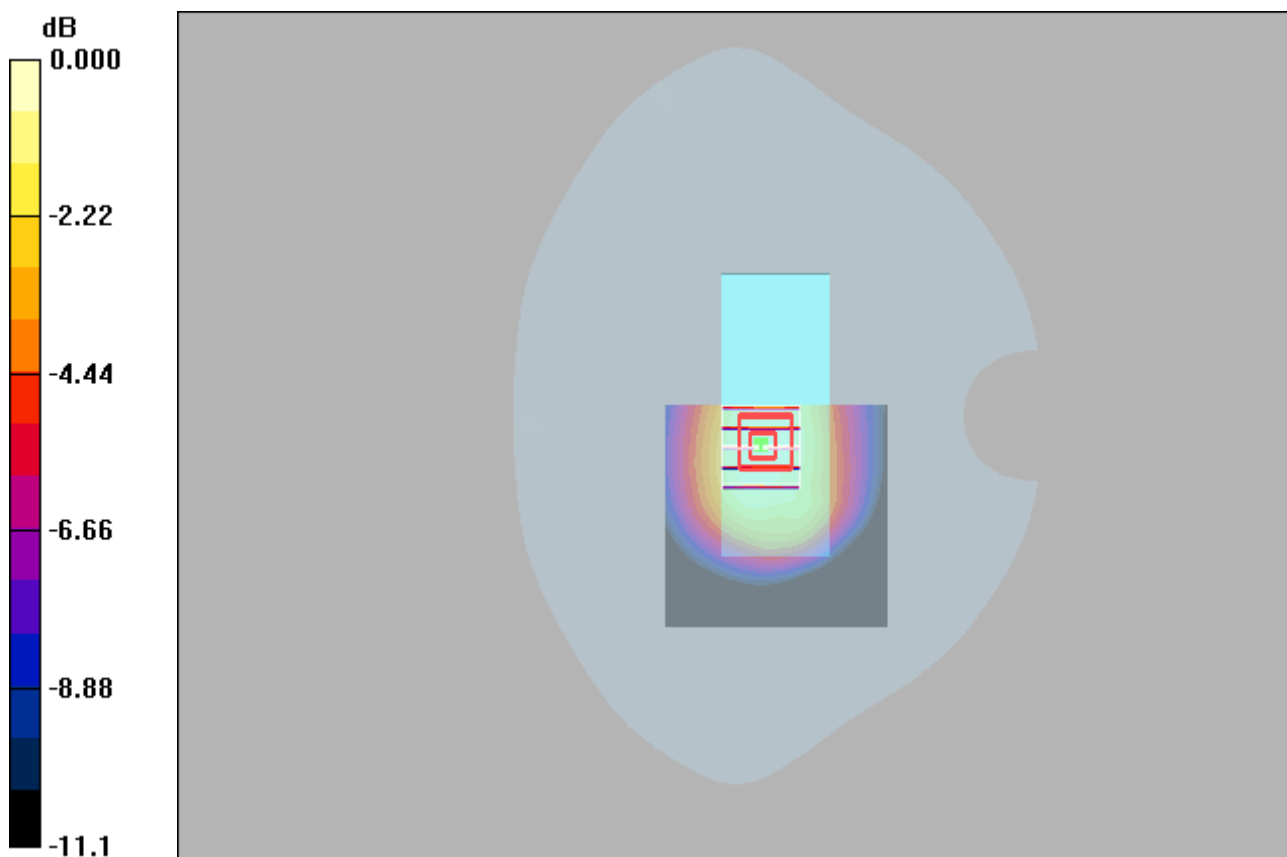

0 dB = 0.731mW/g

LTE 2_QPSK20M_50_50_Rear Face_10mm_18700

DUT: EUT

Communication System: LTE Band 2; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: H1900 Medium parameters used : $f = 1860$ MHz; $\sigma = 1.34$ mho/m; $\epsilon_r = 39.3$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.11, 5.11, 5.11); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.28 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.8 V/m; Power Drift = 0.008 dB

Peak SAR (extrapolated) = 1.78 W/kg

SAR(1 g) = 0.973 mW/g; SAR(10 g) = 0.540 mW/g

Maximum value of SAR (measured) = 1.15 mW/g

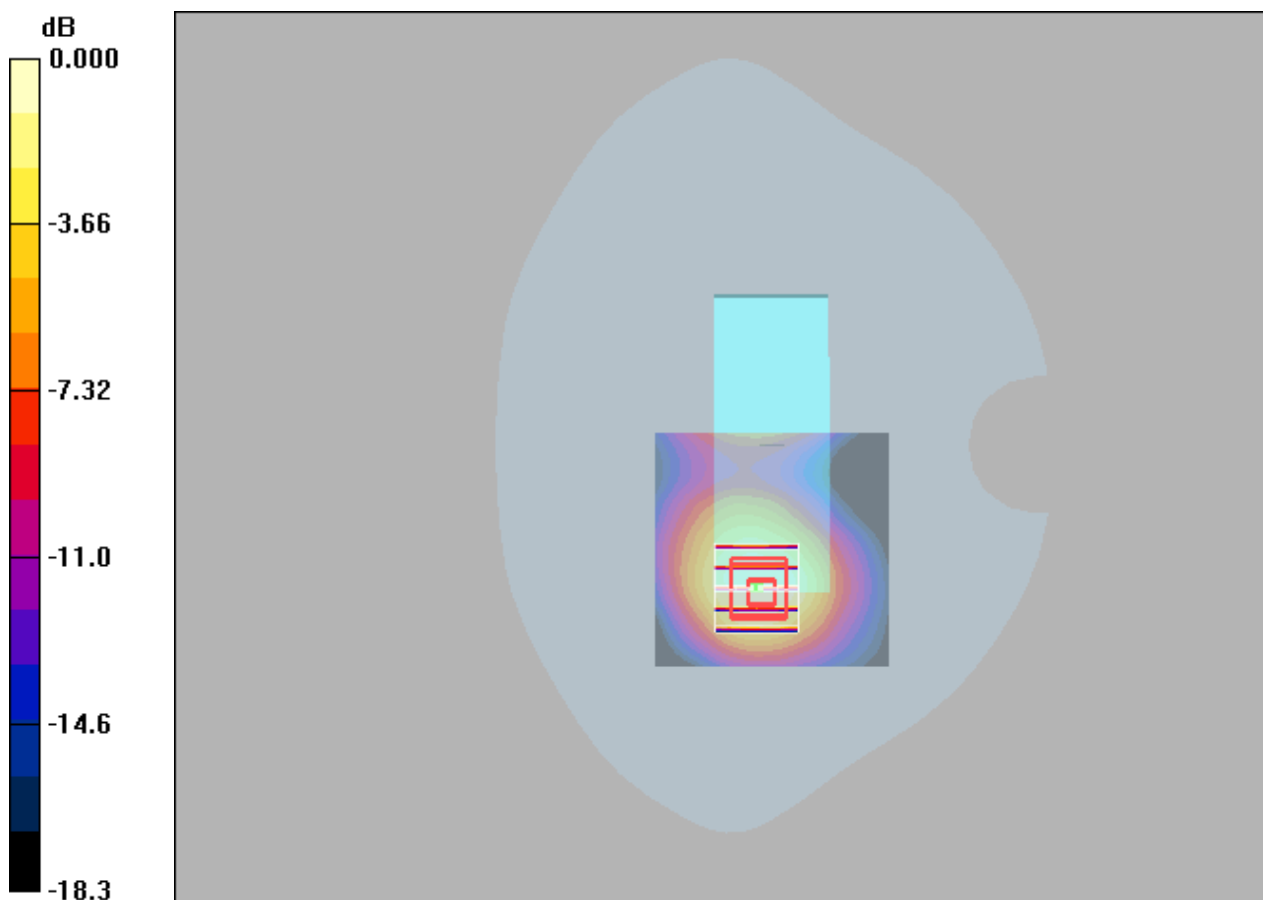

0 dB = 1.15mW/g

LTE 4_QPSK20M_1_0_Rear Face_10mm_20175

DUT: EUT


Communication System: LTE Band 4&20M; Frequency: 1732.5 MHz; Duty Cycle: 1:1
 Medium: H1750 Medium parameters used : $f = 1732.5$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.37, 5.37, 5.37); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 1.41 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 11.9 V/m; Power Drift = 0.031 dB
 Peak SAR (extrapolated) = 2.04 W/kg
SAR(1 g) = 1.16 mW/g; SAR(10 g) = 0.638 mW/g
 Maximum value of SAR (measured) = 1.44 mW/g

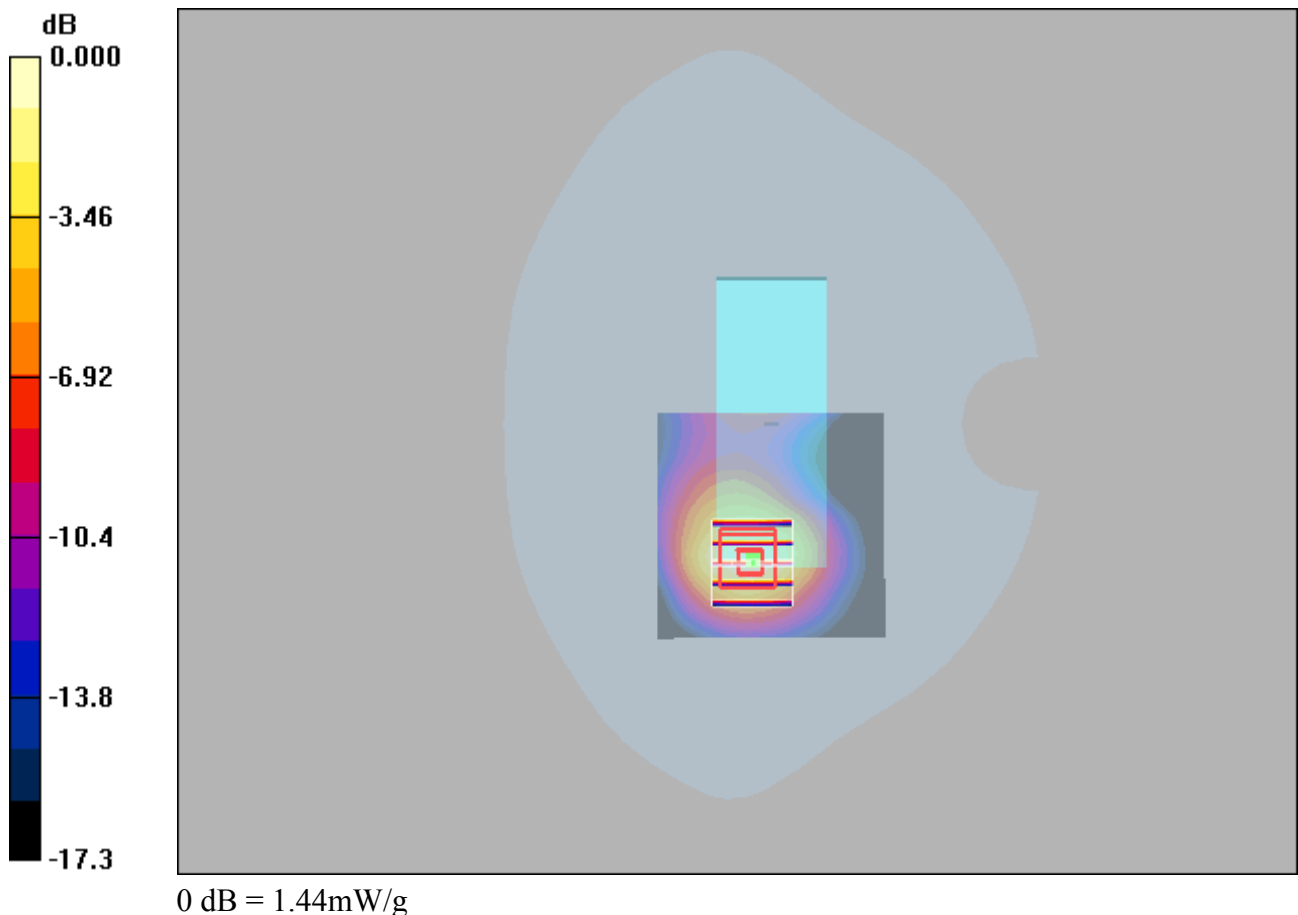

LTE 5_QPSK10M_1_49_Rear Face_10mm_20525

DUT: EUT


Communication System: LTE Band5; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium: H835 Medium parameters used : $f = 836.5$ MHz; $\sigma = 0.931$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.25, 6.25, 6.25); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.635 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 25.8 V/m; Power Drift = 0.166 dB
Peak SAR (extrapolated) = 0.805 W/kg
SAR(1 g) = 0.570 mW/g; SAR(10 g) = 0.399 mW/g
Maximum value of SAR (measured) = 0.646 mW/g

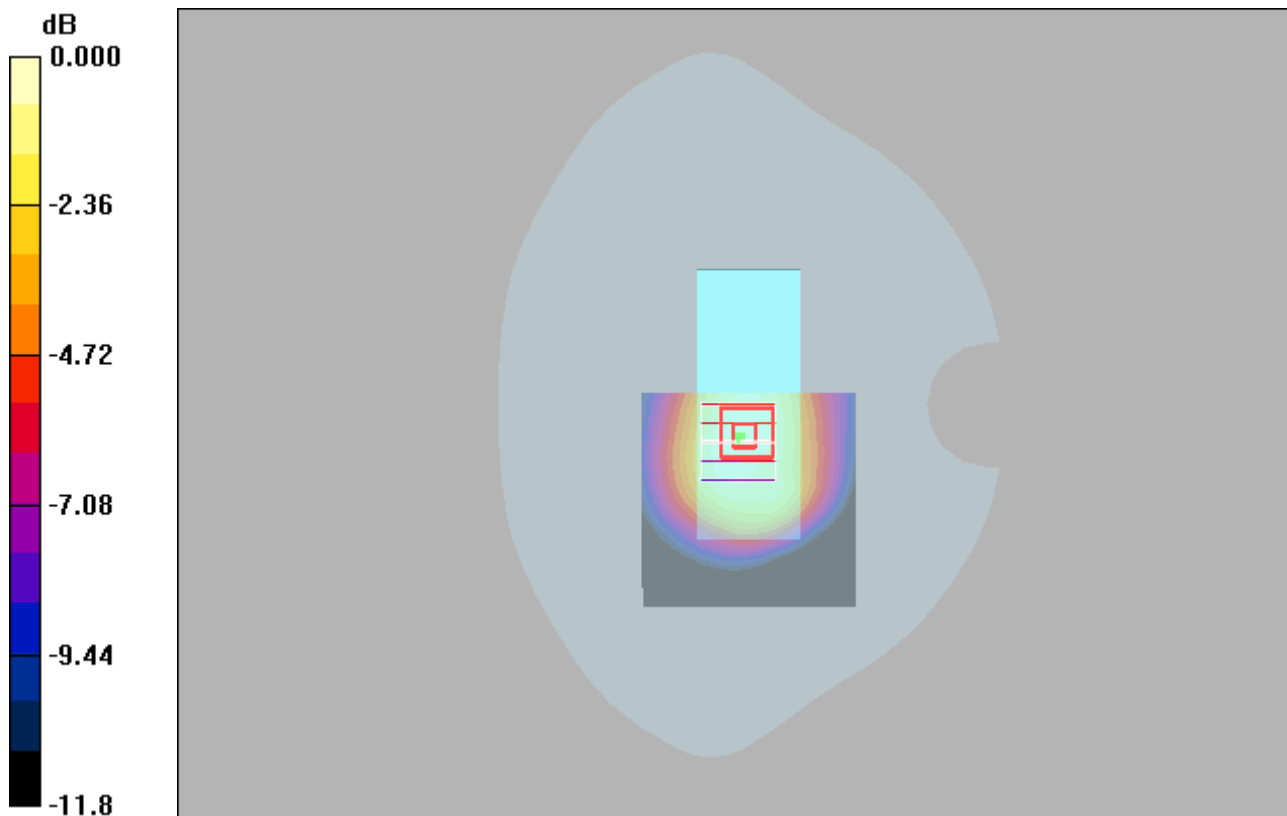

LTE 7_QPSK20M_1_99_Rear Face_10mm_21350

DUT: EUT


Communication System: LTE Band 7&20M; Frequency: 2560 MHz;Duty Cycle: 1:1
Medium: H2600 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.84$ mho/m; $\epsilon_r = 37.7$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.53, 4.53, 4.53); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x61x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 1.42 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 18.1 V/m; Power Drift = 0.078 dB
Peak SAR (extrapolated) = 2.27 W/kg
SAR(1 g) = 1.06 mW/g; SAR(10 g) = 0.473 mW/g
Maximum value of SAR (measured) = 1.39 mW/g

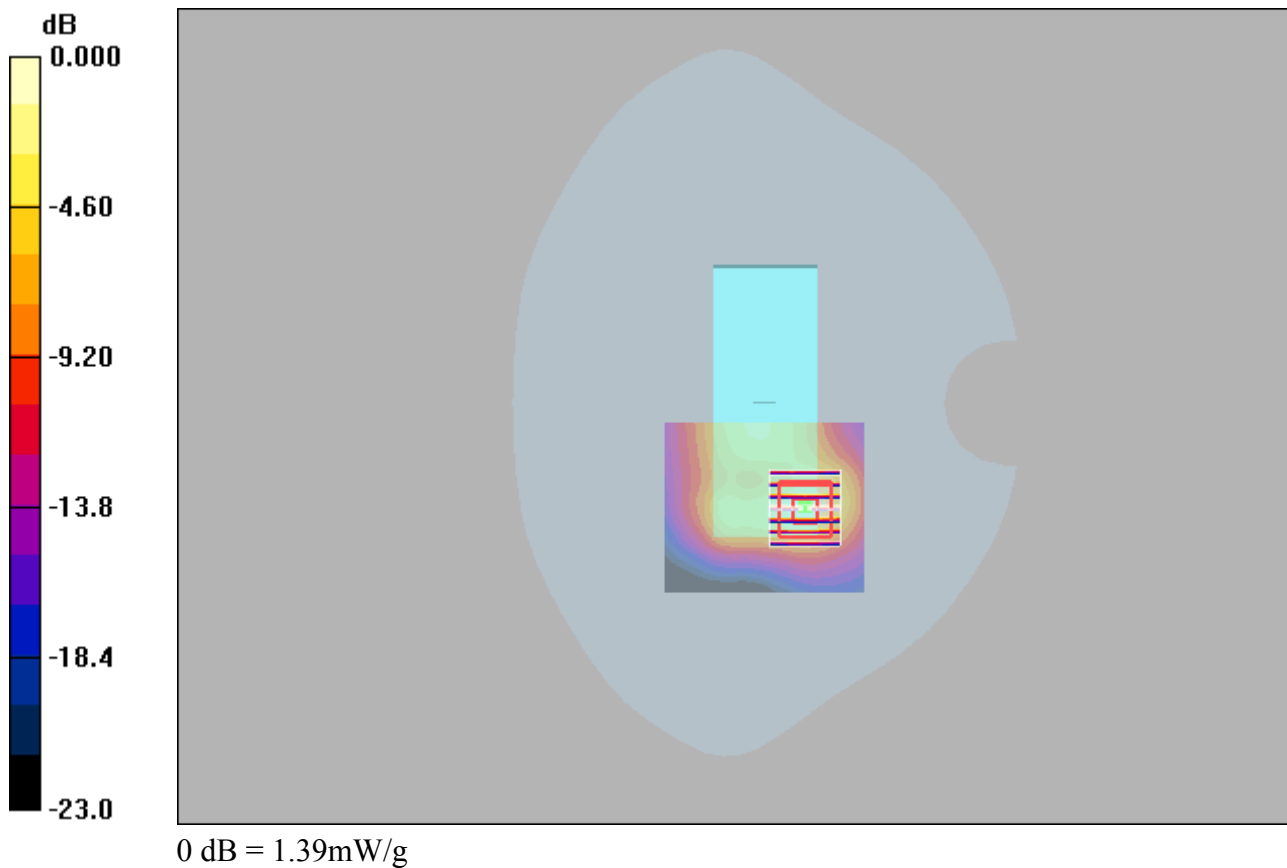

EDR_DH5_Rear Face_10mm_39

DUT: EUT

Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2441 \text{ MHz}$; $\sigma = 1.71 \text{ mho/m}$; $\epsilon_r = 38$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.68, 4.68, 4.68); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x61x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (interpolated) = 0.034 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.35 V/m; Power Drift = 0.043 dB

Peak SAR (extrapolated) = 0.053 W/kg

SAR(1 g) = 0.027 mW/g; SAR(10 g) = 0.015 mW/g

Maximum value of SAR (measured) = 0.034 mW/g

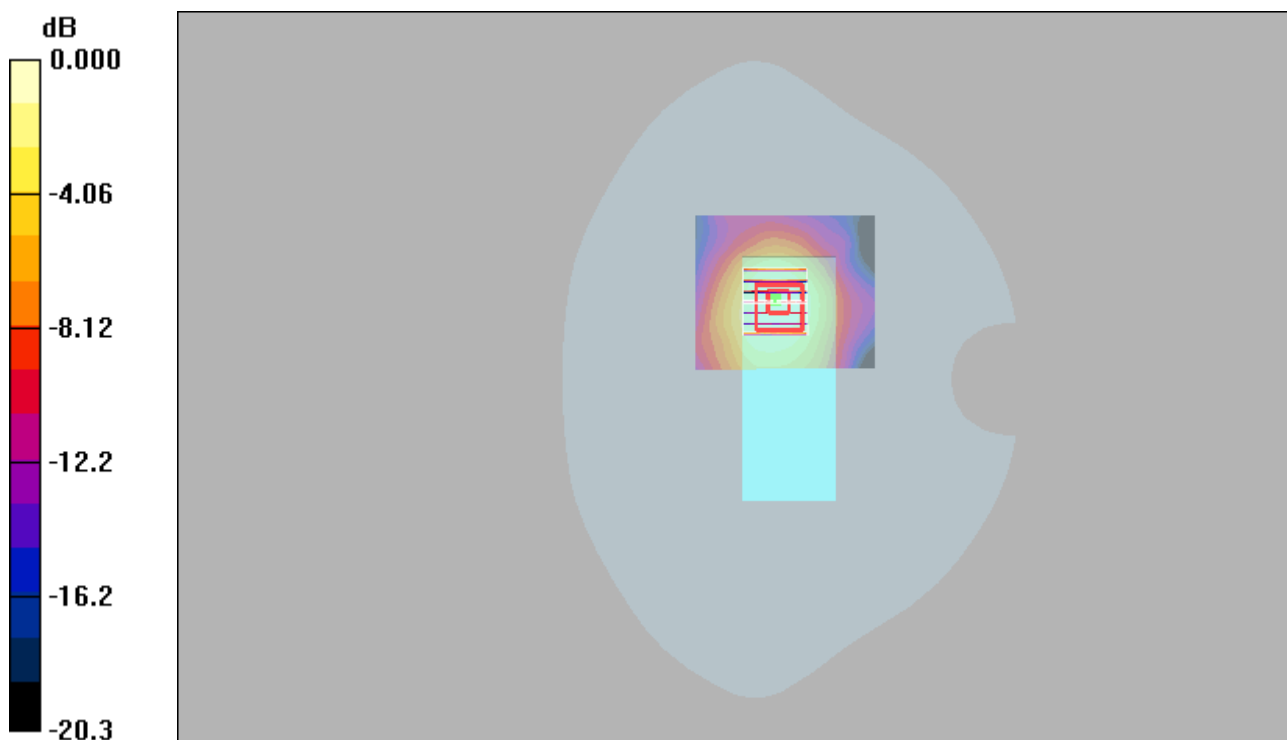

0 dB = 0.034mW/g