

# FCC TEST REPORT

**Product Name:** Smart Phone  
**Trade Mark:** BLU  
**Model No.:** ADVANCE L5  
**Add. Model No.:** N/A  
**Report Number:** 200916004RFM-1  
**Test Standards:** FCC 47 CFR Part 22 Subpart H  
 FCC 47 CFR Part 24 Subpart E  
**FCC ID:** YHLBLUADL5  
**Test Result:** PASS  
**Date of Issue:** October 10, 2020

Prepared for:

**BLU Products, Inc.**  
 10814 NW 33rd St # 100 Doral, FL 33172 ,USA

Prepared by:

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**  
 16/F, Block A, Building 6, Baoneng Science and Technology Park,  
 Qingxiang Road No.1, Longhua New District, Shenzhen, China  
**TEL: +86-755-2823 0888**  
**FAX: +86-755-2823 0886**

Prepared by: Ryan Zhou  
 Ryan Zhou  
 Senior Project Engineer

Reviewed by: Kevin Liang  
 Kevin Liang  
 Assistant Manager

Approved by: Billy Li  
 Billy Li  
 Technical Director



Date: October 10, 2020

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

**Version**

Version No.	Date	Description
V1.0	October 10, 2020	Original



## CONTENTS

<b>1. GENERAL INFORMATION</b>	<b>4</b>
1.1 CLIENT INFORMATION	4
1.2 EUT INFORMATION	4
1.2.1 GENERAL DESCRIPTION OF EUT	4
1.2.2 DESCRIPTION OF ACCESSORIES	4
1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	5
1.4 DESCRIPTION OF SUPPORT UNITS	6
1.5 TEST LOCATION	6
1.6 TEST FACILITY	6
1.7 DEVIATION FROM STANDARDS	6
1.8 ABNORMALITIES FROM STANDARD CONDITIONS	6
1.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
1.10 MEASUREMENT UNCERTAINTY	7
<b>2. TEST SUMMARY</b>	<b>8</b>
<b>3. EQUIPMENT LIST</b>	<b>9</b>
<b>4. TEST CONFIGURATION</b>	<b>10</b>
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING	10
4.2 TEST SETUP	11
4.2.1 FOR RADIATED EMISSIONS TEST SETUP	11
4.2.2 FOR CONDUCTED RF TEST SETUP	12
4.3 TEST CHANNELS	13
4.4 SYSTEM TEST CONFIGURATION	13
4.5 PRE-SCAN	14
<b>5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION</b>	<b>17</b>
5.1 REFERENCE DOCUMENTS FOR TESTING	17
5.2 MAXIMUM ERP/EIRP	17
5.3 CONDUCTED OUTPUT POWER	19
5.4 PEAK-TO-AVERAGE RATIO	20
5.5 99%&26DB BANDWIDTH	24
5.6 BAND EDGE AT ANTENNA TERMINALS	28
5.7 SPURIOUS EMISSIONS AT ANTENNA TERMINALS	32
5.8 FIELD STRENGTH OF SPURIOUS RADIATION	36
5.9 FREQUENCY STABILITY	41
<b>APPENDIX 1 PHOTOS OF TEST SETUP</b>	<b>44</b>
<b>APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS</b>	<b>44</b>

## 1. GENERAL INFORMATION

### 1.1 CLIENT INFORMATION

<b>Applicant:</b>	BLU Products, Inc.
<b>Address of Applicant:</b>	10814 NW 33rd St # 100 Doral, FL 33172 ,USA
<b>Manufacturer:</b>	BLU Products, Inc.
<b>Address of Manufacturer:</b>	10814 NW 33rd St # 100 Doral, FL 33172 ,USA

### 1.2 EUT INFORMATION

#### 1.2.1 General Description of EUT

<b>Product Name:</b>	Smart Phone	
<b>Model No.:</b>	ADVANCE L5	
<b>Trade Mark:</b>	BLU	
<b>DUT Stage:</b>	Identical Prototype	
<b>EUT Supports Function:</b>	GSM Bands:	GSM850/ PCS 1900
	UTRA Bands:	Band II/ BandV
	E-UTRA Bands:	FDD Band 2/ Band 4/ Band 5/ Band 7
	2.4 GHz ISM Band:	IEEE 802.11b/g/n Bluetooth V4.2
<b>Sample Received Date:</b>	September 16, 2020	
<b>Sample Tested Date:</b>	September 20, 2020 to September 30, 2020	

#### 1.2.2 Description of Accessories

Adapter	
<b>Model No.:</b>	US-AR-0500
<b>Input:</b>	100-240 V~50/60 Hz 0.15 A
<b>Output:</b>	5.0 V --- 500 mA
<b>DC Cable:</b>	1.0 Meter, Unshielded without ferrite
<b>Manufacturer:</b>	Chongqing lianmao Electronic Co., Ltd.

Battery	
<b>Model No.:</b>	C348246140L
<b>Battery Type:</b>	Lithium-ion Polymer Rechargeable Battery
<b>Rated Voltage:</b>	3.7 Vdc
<b>Limited Charge Voltage:</b>	4.2 Vdc
<b>Rated Capacity:</b>	1400 mAh
<b>Manufacturer:</b>	Shenzhen Truepower New Energy Co.,Ltd.

Cable	
<b>Description:</b>	USB Micro-B Plug Cable
<b>Cable Type:</b>	Unshielded without ferrite
<b>Length:</b>	1.0 Meter

### 1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

<b>Support Networks:</b>	GSM, EDGE, WCDMA, HSDPA, HSUPA,	
<b>Type of Modulation:</b>	GSM/GPRS:	GMSK
	EDGE:	GMSK, 8PSK
	WCDMA	BPSK
	HSDPA/DC-HSDPA:	QPSK
	HSUPA:	QPSK
<b>Frequency Range:</b>	GSM/GPRS/EDGE 850:	824.2-848.8 MHz
	GSM/GPRS/EDGE 1900:	1850.2-1909.8 MHz
	WCDMA Band II:	1852.4-1907.6 MHz
	WCDMA Band V:	826.4-846.6 MHz
<b>Max RF Output Power:</b>	GSM/GPRS 850:	32.02dBm
	EDGE 850:	25.45dBm
	GSM/GPRS 1900:	31.71dBm
	EDGE 1900:	27.96dBm
	WCDMA Band II:	23.22dBm
	WCDMA Band V:	23.02dBm
<b>Emission Designator:</b>	GSM/GPRS 850:	250KGXW
	EDGE 850:	249KG7W
	GSM/GPRS 1900:	251KGXW
	EDGE 1900:	245KG7W
	WCDMA Band II:	4M16F9W
	WCDMA Band V:	4M18F9W
<b>Antenna Type:</b>	PIFA Antenna	
<b>Antenna Gain:</b>	GSM 850:	-0.85 dBi
	PCS 1900:	0.81 dBi
	WCDMA Band II:	0.83 dBi
	WCDMA Band V:	-0.86 dBi
<b>GPRS/EDGE Class:</b>	Class 33	
<b>Normal Test Voltage:</b>	3.7 Vdc	
<b>Extreme Test Voltage:</b>	3.4 to 4.2Vdc	
<b>Extreme Test Temperature:</b>	-5 °C to +55 °C	

## 1.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

### 1) Support Equipment

Description	Manufacturer	Model No.	Serial Number	Supplied by
--	--	--	--	--

### 2) Support Cable

Cable No.	Description	Connector	Length	Supplied by
1	Antenna Cable	SMA	0.30 Meter	UnionTrust

## 1.5 TEST LOCATION

### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China 518109

Telephone: +86 (0) 755 2823 0888

Fax: +86 (0) 755 2823 0886

## 1.6 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

### CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC/EN 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

### A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

### ISED Wireless Device Testing Laboratories

CAB identifier: CN0032

### FCC Accredited Lab.

Designation Number: CN1194

Test Firm Registration Number: 259480

## 1.7 DEVIATION FROM STANDARDS

None.

## 1.8 ABNORMALITIES FROM STANDARD CONDITIONS

None.

### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC23G-V1.0

### 1.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

### 1.10 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted emission 9KHz-150KHz	±3.8 dB
2	Conducted emission 150KHz-30MHz	±3.4 dB
3	Radiated emission 9KHz-30MHz	±4.9 dB
4	Radiated emission 30MHz-1GHz	±4.7 dB
5	Radiated emission 1GHz-18GHz	±5.1 dB
6	Radiated emission 18GHz-26GHz	±5.2 dB
7	Radiated emission 26GHz-40GHz	±5.2 dB

## 2. TEST SUMMARY

FCC 47 CFR Part 22 Subpart H Test Cases			
Test Item	Test Requirement	Test Method	Result
Effective Radiated Power (ERP)	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 22.913(a)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Conducted Output Power	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 22.913(a)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Peak-to-average ratio	FCC 47 CFR Part 22.913(a)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
99%&26dB Bandwidth	FCC 47 CFR Part 2.1049(h)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Band Edge at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 22.917(a)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Spurious emissions at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 22.917(a)(b)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Field strength of spurious radiation	FCC 47 CFR Part 2.1053 & FCC 47 CFR Part 22.917(a)(b)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Frequency stability	FCC 47 CFR Part 2.1055 & FCC 47 CFR Part 22.355	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS

FCC 47 CFR Part 24 Subpart E Test Cases			
Test Item	Test Requirement	Test Method	Result
Equivalent Isotropic Radiated Power (EIRP)	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 24.232(c)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Conducted Output Power	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 24.232(c)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Peak-to-average ratio	FCC 47 CFR Part 24.232(d)	KDB 971168 D01v03r01	PASS
99%&26dB Bandwidth	FCC 47 CFR Part 2.1049(h) & FCC 47 CFR Part 24.238(b)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Band Edge at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 24.238(a)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Spurious emissions at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 24.238(a)(b)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Field strength of spurious radiation	FCC 47 CFR Part 2.1053 & FCC 47 CFR Part 24.238(a)(b)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Frequency stability	FCC 47 CFR Part 2.1055 & FCC 47 CFR Part 24.235	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS

### 3. EQUIPMENT LIST

Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
<input checked="" type="checkbox"/>	3M Chamber & Accessory Equipment	ETS-LINDGREN	3M	N/A	Dec. 03, 2018	Dec. 03, 2021
<input checked="" type="checkbox"/>	Receiver	R&S	ESIB26	100114	Nov. 24, 2019	Nov. 23, 2020
<input type="checkbox"/>	Loop Antenna	ETS-LINDGREN	6502	00202525	Nov. 16, 2019	Nov. 15, 2020
<input checked="" type="checkbox"/>	Broadband Antenna	ETS-LINDGREN	3142E	00201566	Nov. 16, 2019	Nov. 15, 2020
<input checked="" type="checkbox"/>	6dB Attenuator	Talent	RA6A5-N-18	18103001	Nov. 16, 2019	Nov. 15, 2020
<input checked="" type="checkbox"/>	Preamplifier	HP	8447F	2805A02960	Nov. 16, 2019	Nov. 15, 2020
<input type="checkbox"/>	Broadband Antenna (Pre-amplifier)	ETS-LINDGREN	3142E-PA	00201891	May. 30, 2020	May. 29, 2021
<input type="checkbox"/>	6dB Attenuator	Talent	RA6A5-N-18	18103002	Nov. 24, 2019	Nov. 23, 2020
<input type="checkbox"/>	Horn Antenna	ETS-LINDGREN	3117	00164202	Nov. 24, 2019	Nov. 23, 2020
<input checked="" type="checkbox"/>	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201874	May. 30, 2020	May. 29, 2021
<input type="checkbox"/>	Horn Antenna	ETS-LINDGREN	3116C	00200180	Jun. 19, 2020	Jun. 18, 2021
<input checked="" type="checkbox"/>	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3116C-PA	00202652	Nov. 16, 2019	Nov. 15, 2020
<input checked="" type="checkbox"/>	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A
<input checked="" type="checkbox"/>	Test Software	Audix	e3	Software Version: 9.160323		

RF Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
<input checked="" type="checkbox"/>	Wideband Radio Communication Tester	R&S	CMW500	119583	July 20, 2020	July 19, 2021
<input checked="" type="checkbox"/>	Signal Generator	R&S	SMF 100A	100691	May 14, 2020	May 13, 2021
<input checked="" type="checkbox"/>	Vector Signal Generator	R&S	SMU200A	101638	May 14, 2020	May 13, 2021
<input checked="" type="checkbox"/>	Spectrum Analyzer	R&S	FSP13	1164.6391.13	June 11, 2020	June 10, 2021
<input checked="" type="checkbox"/>	Temp Humidity chamber	Votisch	VT4002	58566133290020	May 11, 2020	May 10, 2021
<input checked="" type="checkbox"/>	Shielding room	ETS-Lindgren	333	Euroshiedpn-T J2343-S1608	June 5, 2020	June 4, 2021
<input checked="" type="checkbox"/>	Temperature & Humidity Datalogger	CEM	DT-172	200408605	July 24, 2020	July 23, 2021
<input checked="" type="checkbox"/>	RF Box	ECIT	M4300	20170501	N/A	N/A
<input checked="" type="checkbox"/>	Test Software	Automation Test System	ECIT	Software Version: 1.0659.27819		

#### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC23G-V1.0

#### 4. TEST CONFIGURATION

##### 4.1 ENVIRONMENTAL CONDITIONS FOR TESTING


Test Environment	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage (V)	Relative Humidity (%)
TN/VN	+15 to +35	3.7	20 to 75
TL/VL	-5	3.4	20 to 75
TH/VL	+55	3.4	20 to 75
TL/VH	-5	4.2	20 to 75
TH/VH	+55	4.2	20 to 75

**Remark:**


- 1) The EUT just work in such extreme temperature of -5 °C to +55 °C and the extreme voltage of 3.4 V to 4.2V, so here the EUT is tested in the temperature of -5 °C to +55 °C and the voltage of 3.4V to 4.2 V.
- 2) VN: Normal Voltage; TN: Normal Temperature;  
 TL: Low Extreme Test Temperature; TH: High Extreme Test Temperature;  
 VL: Low Extreme Test Voltage; VH: High Extreme Test Voltage.

## 4.2 TEST SETUP

### 4.2.1 For Radiated Emissions test setup

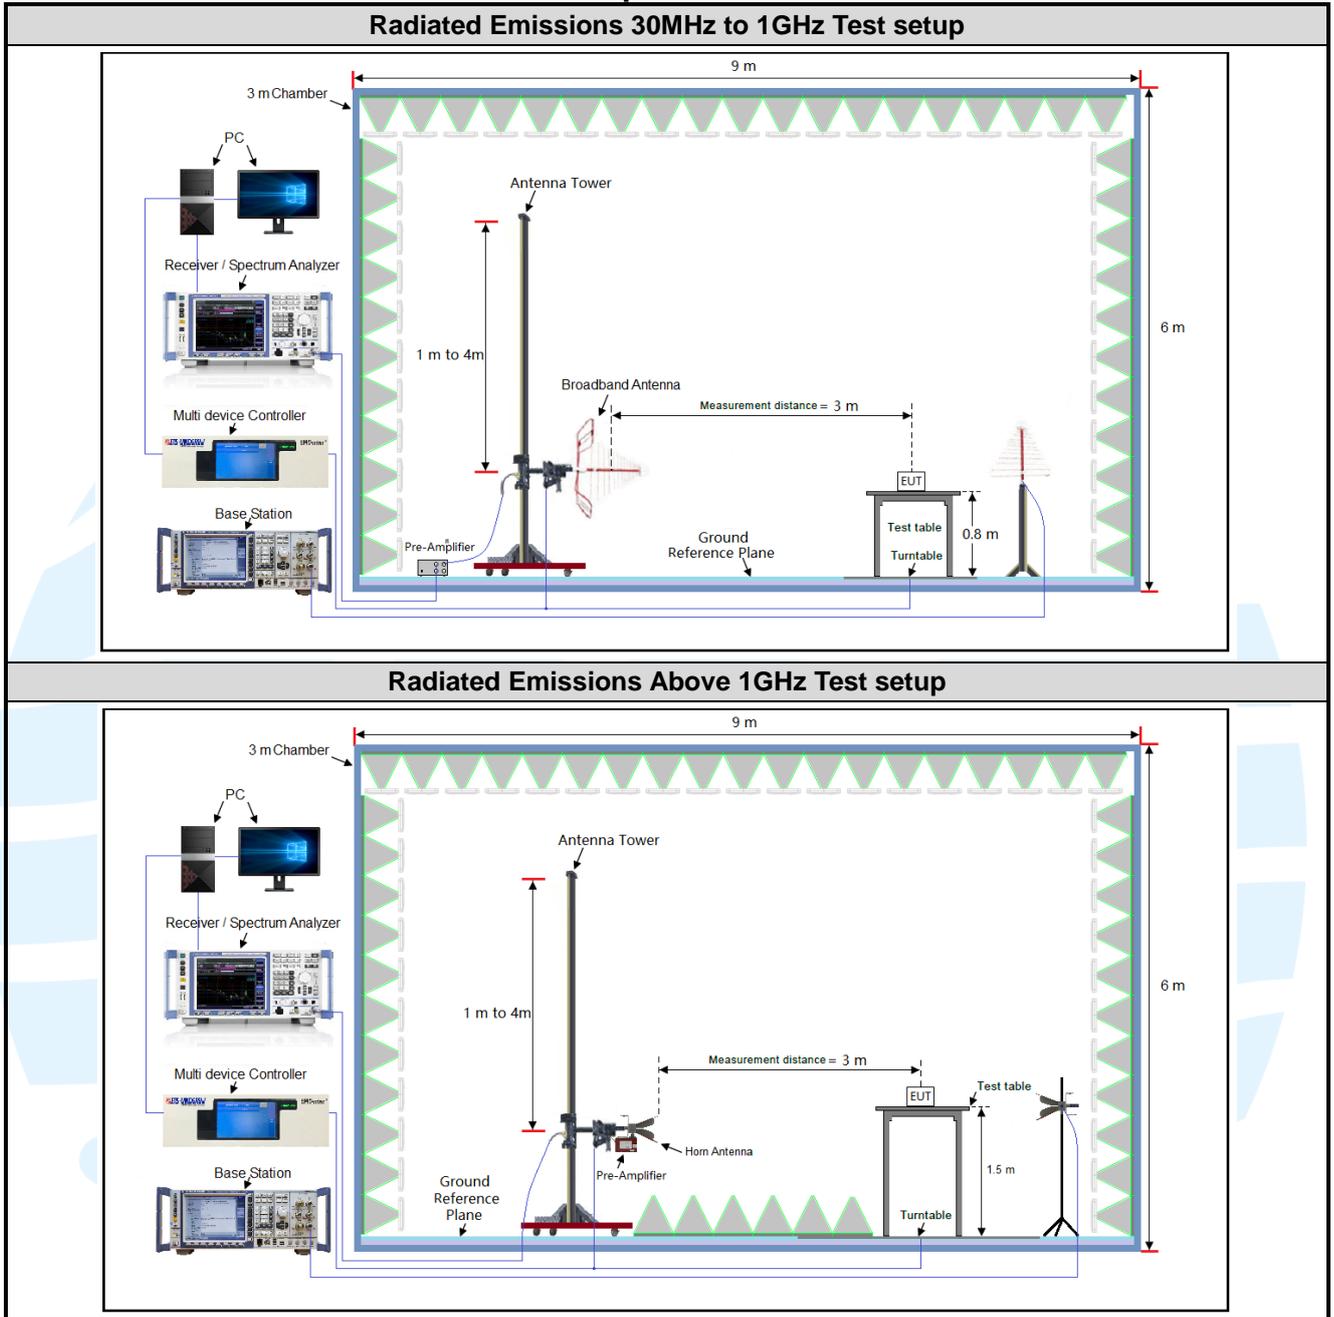

4.2.2 For Conducted RF test setup

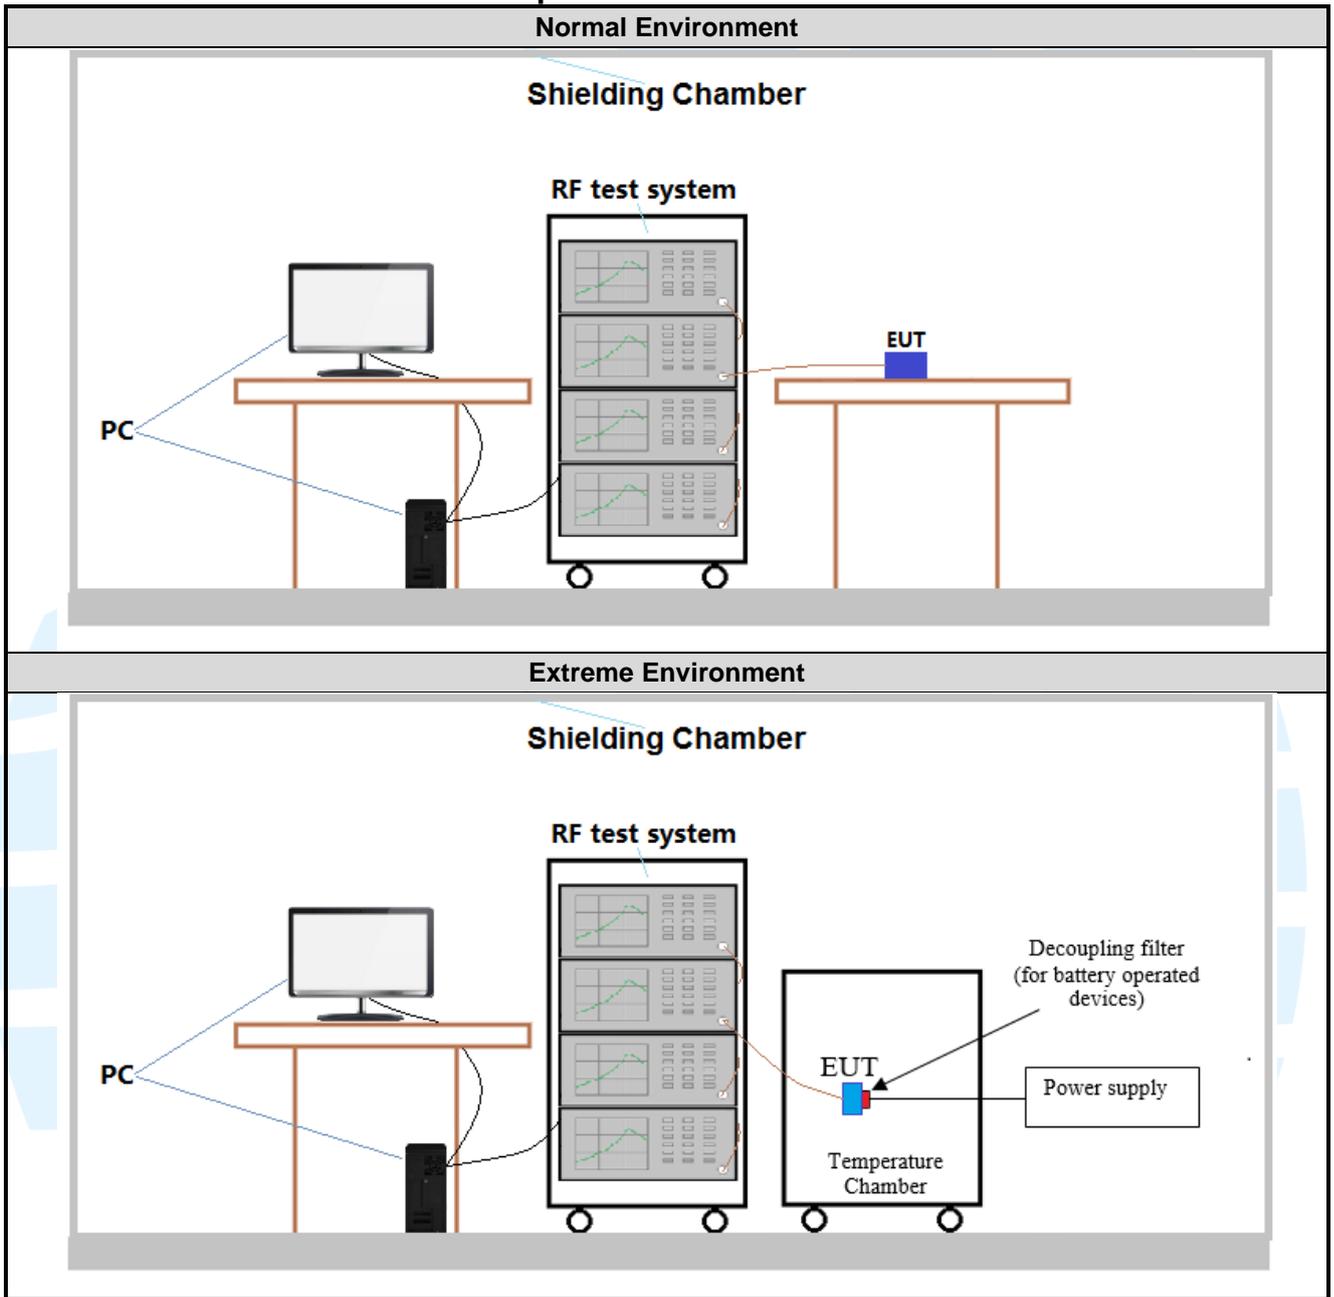

### 4.3 TEST CHANNELS

Bands	Tx/Rx Frequency	RF Channel		
		Low(L)	Middle(M)	High(H)
GSM/GPRS/ EDGE850	Tx (824 MHz ~ 849 MHz)	Channel 128	Channel 190	Channel 251
		824.2 MHz	836.6 MHz	848.8 MHz
WCDMA band V	Tx (824 MHz ~ 849 MHz)	Channel 4132	Channel 4182	Channel 4233
		826.4 MHz	836.4 MHz	846.6 MHz

Bands	Tx/Rx Frequency	RF Channel		
		Low(L)	Middle(M)	High(H)
GSM/GPRS/ EDGE1900	Tx (1850 MHz-1910 MHz)	Channel 512	Channel 661	Channel 810
		1850.2 MHz	1880.0 MHz	1909.8 MHz
WCDMA Band II	Tx (1850 MHz-1910 MHz)	Channel 9262	Channel 9400	Channel 9538
		1852.4 MHz	1880.0 MHz	1907.6 MHz

### 4.4 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. It was powered by a 3.7Vdc rechargeable Li-on battery. Only the worst case data were recorded in this test report.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, X/Y/Z axis, and antenna ports. The worst case was found when positioned as the table below.

Bands	Mode	Antenna Port	Worst-case axis positioning
GSM 850	1TX	Chain 0	Y axis
PCS 1900	1TX	Chain 0	Y axis
WCDMA Band II	1TX	Chain 0	Y axis
WCDMA Band V	1TX	Chain 0	Y axis

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000MHz. The resolution is 1 MHz or greater for frequencies above 1000MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

### 4.5 PRE-SCAN

Pre-scan under all rate at lowest middle and highest channel, find the transmitter power as below:  
SIM 1 Card Conducted transmitter power measurement result.

GSM 850 Maximum Average Power (dBm)			
Channel	128	190	251
Frequency(MHz)	824.2 MHz	836.6 MHz	848.8 MHz
GSM (GMSK, 1Tx-slot)	32.84	32.87	32.83
GPRS (GMSK, 1Tx-slot)	32.83	32.85	32.82
GPRS (GMSK, 2Tx-slot)	30.68	30.70	30.64
GPRS (GMSK, 3Tx-slot)	28.80	28.82	28.77
GPRS (GMSK, 4Tx-slot)	26.47	26.51	26.66
EDGE (8PSK, 1Tx-slot)	26.26	26.30	26.16
EDGE (8PSK, 2Tx-slot)	24.60	24.80	24.68
EDGE (8PSK, 3Tx-slot)	22.26	22.12	22.01
EDGE (8PSK, 4Tx-slot)	19.61	19.60	19.54

PCS 1900 Maximum Average Power (dBm)			
Channel	512	661	810
Frequency(MHz)	1850.2 MHz	1880.0 MHz	1909.8 MHz
GSM (GMSK, 1Tx-slot)	30.87	30.90	30.68
GPRS (GMSK, 1Tx-slot)	30.85	30.88	30.66
GPRS (GMSK, 2Tx-slot)	28.70	28.64	28.58
GPRS (GMSK, 3Tx-slot)	27.09	27.13	26.91
GPRS (GMSK, 4Tx-slot)	25.05	25.00	25.01
EDGE (8PSK, 1Tx-slot)	24.75	27.15	26.25
EDGE (8PSK, 2Tx-slot)	21.70	24.33	23.52
EDGE (8PSK, 3Tx-slot)	17.21	20.47	19.25
EDGE (8PSK, 4Tx-slot)	16.03	20.22	18.91

WCDMA Band II Maximum Average Power (dBm)			
Channel	9262	9400	9538
Frequency(MHz)	1852.4 MHz	1880.0 MHz	1907.6 MHz
RMC 12.2kbps	23.64	23.88	23.85
HSDPA Subtest-1	22.94	22.50	22.43
HSDPA Subtest-2	21.19	20.41	20.38
HSDPA Subtest-3	20.10	20.06	20.04
HSDPA Subtest-4	20.33	19.62	19.42
HSUPA Subtest-1	20.28	19.94	19.74
HSUPA Subtest-2	20.83	20.35	20.39
HSUPA Subtest-3	20.61	20.41	20.35
HSUPA Subtest-4	21.20	20.66	20.62
HSUPA Subtest-5	23.12	23.14	23.17

WCDMA Band V Maximum Average Power (dBm)			
Channel	4132	4182	4233
Frequency(MHz)	826.4 MHz	836.4 MHz	846.6 MHz
RMC 12.2kbps	22.35	22.39	22.38
HSDPA Subtest-1	21.81	21.34	21.88
HSDPA Subtest-2	21.93	21.54	21.97
HSDPA Subtest-3	21.92	21.56	22.07
HSDPA Subtest-4	21.99	21.63	22.04
HSUPA Subtest-1	20.18	19.80	20.36
HSUPA Subtest-2	20.47	20.14	20.25
HSUPA Subtest-3	20.19	20.05	20.34
HSUPA Subtest-4	20.22	19.82	20.17
HSUPA Subtest-5	21.96	21.53	22.00

Pre-scan all bandwidth and RB, find worse case mode are chosen to the report, the worse mode applicability and tested channel detail as below:

Band	Radiated	Conducted
GSM/GPRS/ EDGE 850/1900	1) GSM (GMSK, 1Tx-slot) Link 2) GPRS (GMSK, 1Tx-slot) Link 3) EDGE (8PSK, 1Tx-slot) Link	1) GSM (GMSK,1Tx-slot) Link 2) GPRS (GMSK, 1Tx-slot) Link 3) EDGE (8PSK, 1Tx-slot) Link
WCDMA Band II/V	RMC 12.2kbps Link	RMC 12.2kbps Link

## 5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

### 5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 22	Public Mobile Services
3	FCC 47 CFR Part 24	Personal Communications Services
4	ANSI C63.26-2015	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services
5	KDB 971168 D01	KDB 971168 D01 Power Meas License Digital Systems v03r01

### 5.2 MAXIMUM ERP/EIRP

**Test Requirement:** FCC 47 CFR Part 2.1046(a),  
FCC 47 CFR Part 22.913(a),  
FCC 47 CFR Part 24.232(c),

**Test Method:** KDB 971168 D01v03r01 Section 5.6 & ANSI C63.26-2015

**Limit:**

**FCC 47 CFR Part 22.913(a)**

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

**FCC 47 CFR Part 24.232(c)**

Mobile and portable stations are limited to 2 watts EIRP.

**Test Procedure:**

$$ERP \text{ or } EIRP = P_{Meas} + G_T - L_C$$

where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively (expressed in the same units as P<sub>Meas</sub>, typically dBW or dBm);

P<sub>Meas</sub> = measured transmitter output power or PSD, in dBm or dBW;

G<sub>T</sub> = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

L<sub>C</sub> = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

**Test Setup:** Refer to section 4.2.1 for details.

**Instruments Used:** Refer to section 3 for details

**Test Mode:** Link mode

**Test Results:** Pass

**Test Data:** See table below

Bands	Modulation	Max. Conducted Avg. Power	Ant. Gain	Limit	ERP		Result
		(dBm)	(dBi)	(W)	(dBm)	(W)	
GSM 850 (824-849 MHz)	GSM	32.87	-0.85	7.0	32.02	1.592209	Pass
	EDGE	26.30	-0.85		25.45	0.350752	Pass
WCDMA Band V (824-849 MHz)	RMC 12.2kbps	23.88	-0.86	7.0	23.02	0.200447	Pass
	HSUPA	23.17	-0.86		22.31	0.170216	Pass
	HSDPA	22.94	-0.86		22.08	0.161436	Pass

Bands	Modulation	Max. Conducted Avg. Power	Ant. Gain	Limit	EIRP		Result
		(dBm)	(dBi)	(W)	(dBm)	(W)	
PCS 1900 (1850-1910 MHz)	GSM	30.90	0.81	2.0	31.71	1.482518	Pass
	EDGE	27.15	0.81		27.96	0.625173	Pass
WCDMA Band II (1850-1910 MHz)	RMC 12.2kbps	22.39	0.83	2.0	23.22	0.209894	Pass
	HSUPA	22.00	0.83		22.83	0.191867	Pass
	HSDPA	22.07	0.83		22.90	0.194984	Pass

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC23G-V1.0

### 5.3 CONDUCTED OUTPUT POWER

**Test Requirement:** FCC 47 CFR Part 2.1046(a),  
FCC 47 CFR Part 22.913(a),  
FCC 47 CFR Part 24.232(c),

**Test Method:** KDB 971168 D01v03r01 & ANSI C63.26-2015

**Limit:**

**FCC 47 CFR Part 22.913(a)**

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

**FCC 47 CFR Part 24.232(c)**

Mobile and portable stations are limited to 2 watts EIRP.

**Test Procedure:**

The EUT was set up for the maximum power with GSM, GPRS, EDGE, WCDMA, CDMA2000, and LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

**Test Setup:** Refer to section 4.2.2 for details.

**Instruments Used:** Refer to section 3 for details

**Test Mode:** Link mode

**Test Results:** Pass

**Test Data:** The full result refer to section 4.5 for details.

### 5.4 PEAK-TO-AVERAGE RATIO

**Test Requirement:** FCC 47 CFR Part 22.913(a),  
FCC 47 CFR Part 24.232(c),  
**Test Method:** KDB 971168 D01v03r01 Section 5.7  
**Limit:** In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB

**Test Procedure:**  
The EUT was connected to Spectrum Analyzer and Base Station via power divider. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Some regulatory requirements specify a PAPR limit when the output power limits are specified in terms of average power. If it becomes necessary to provide measurement data to demonstrate compliance to a PAPR limit, then the appropriate procedure from those provided in 5.2.3 shall be utilized to determine the peak power (or peak PSD) and the appropriate procedure from those provided in 5.2.4 shall be used to determine the average power (or average PSD). The data from these measurements is then used in Equation (2) to determine the PAPR of a narrowband CW-like signal. See 5.2.3.4 for guidance on determining the PAPR of a broadband noise-like signal.

$$PAPR (dB) = PPK (dBm \text{ or } dBW) - PAvg (dBm \text{ or } dBW)$$

where:

PAPR peak-to-average power ratio, in dB;

PPk measured peak power or peak PSD level, in dBm or dBW;

PAvg measured average power or average PSD level, in dBm or dBW.

OR

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer.

- a) Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth
- b) Set the number of counts to a value that stabilizes the measured CCDF curve
- c) Record the maximum PAPR level associated with a probability of 0.1 %

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

**Test Setup:** Refer to section 4.2.2 for details.

**Instruments Used:** Refer to section 3 for details

**Test Mode:** Link mode

**Test Results:** Pass


**Test Data:** See table below

Bands	Modulation	Peak-to-average ratio (dB)			Limit (dBm)	Result
		Lowest	Middle	Highest		
GSM 850	GSM	0.32	0.31	0.31	13	Pass
	EDGE	0.32	0.28	0.32	13	Pass
PCS 1900	GSM	0.36	0.40	0.38	13	Pass
	EDGE	0.31	0.31	0.33	13	Pass
WCDMA Band II	RMC 12.2kbps	3.45	3.45	3.47	13	Pass
WCDMA Band V	RMC 12.2kbps	3.64	3.50	3.45	13	Pass

The test plots as follows:





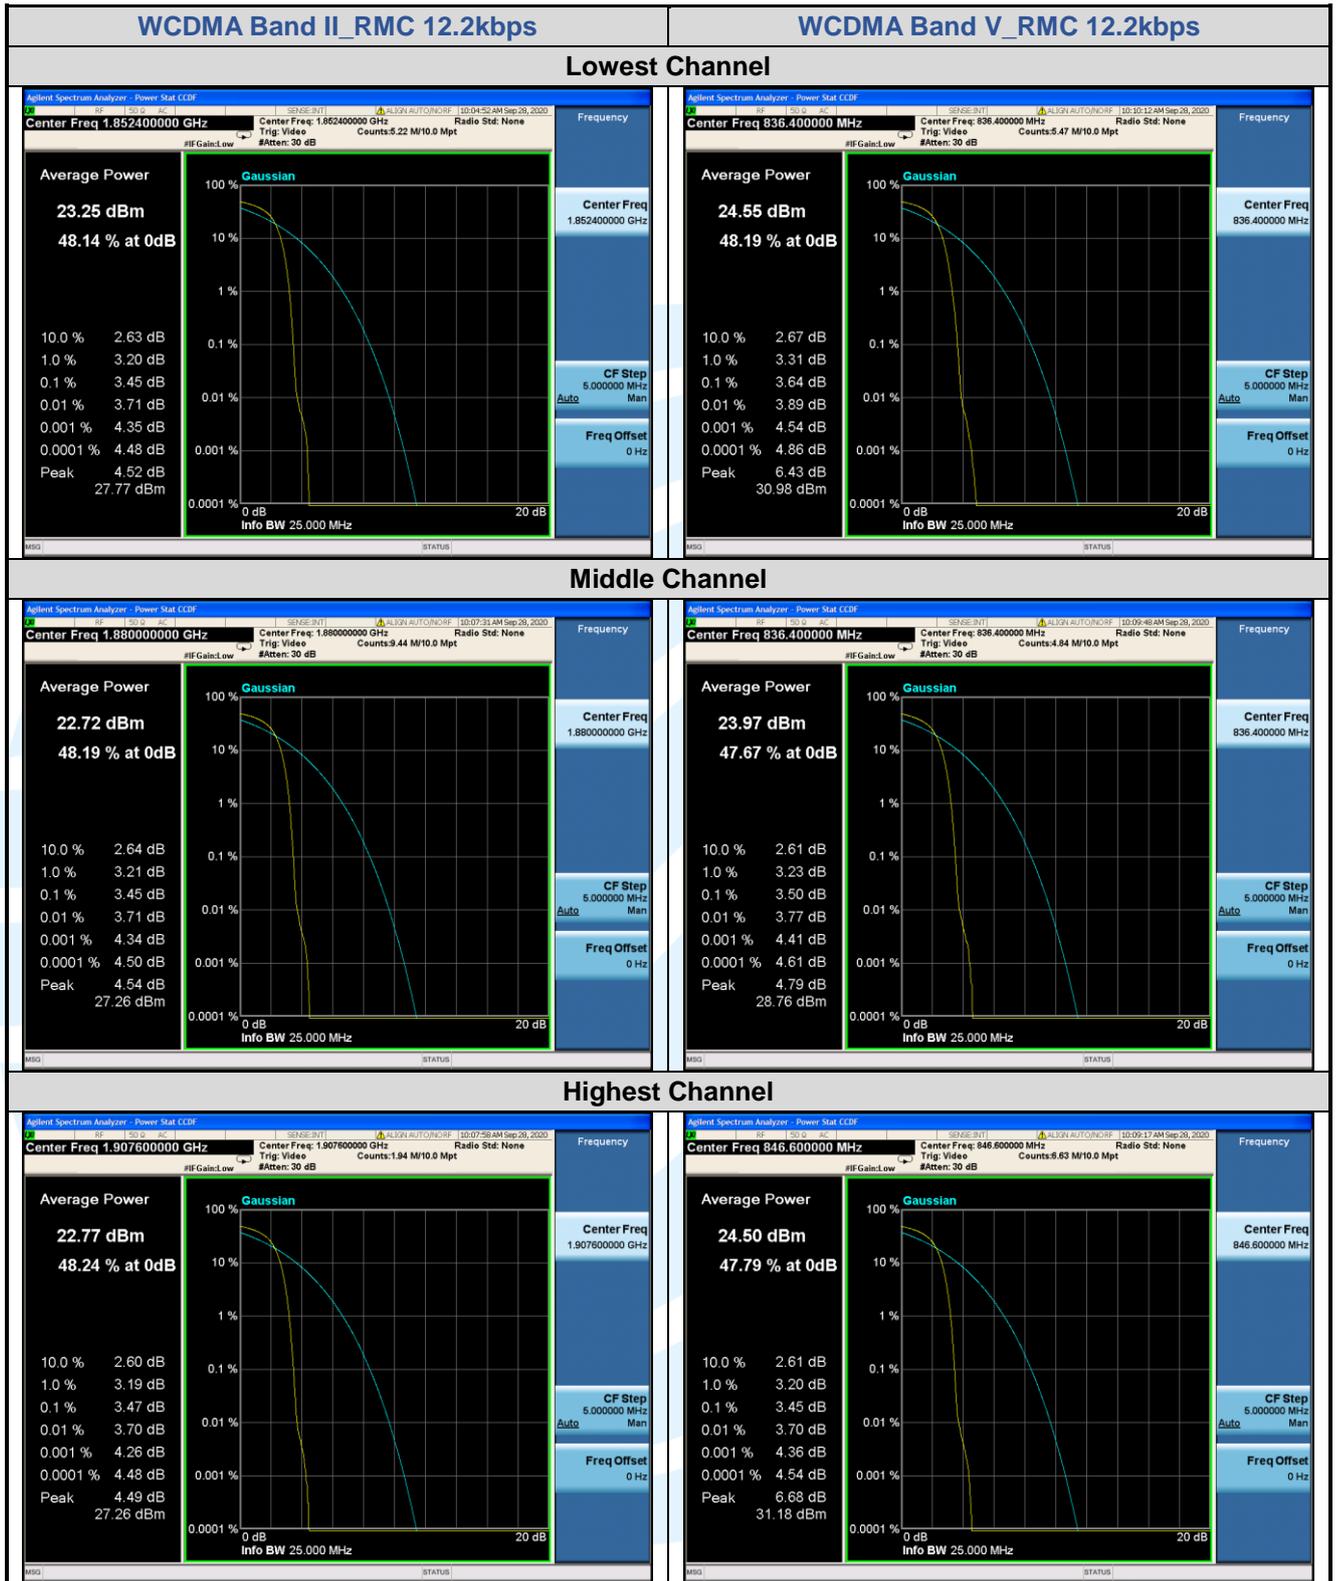

## Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC23G-V1.0

### 5.5 99%&26DB BANDWIDTH

**Test Requirement:** FCC 47 CFR Part 2.1049(h),  
 FCC 47 CFR Part 22.917(b),  
 FCC 47 CFR Part 24.238(b),

**Test Method:** ANSI C63.26-2015 & KDB 971168 D01v03r01 Section 4

**Limit:** No Limit, for reporting purposes only.

**Test Procedure:**  
 The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The 99% and -26dB bandwidths was also measured and recorded.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

**Test Setup:** Refer to section 4.2.2 for details.

**Instruments Used:** Refer to section 3 for details

**Test Mode:** Link mode


**Test Results:** Pass

**Test Data:** See table below

Bands	Modulation	Channel	Frequency (MHz)	26 dB BW (kHz)	99% BW (kHz)
GSM 850	GSM	128	824.2	320.3	247.62
		190	836.6	324.4	249.50
		251	848.8	320.3	248.06
	EDGE	128	824.2	317.4	249.12
		190	836.6	318.2	238.16
		251	848.8	317.4	242.00
PCS 1900	GSM	512	1850.2	321.4	249.06
		661	1880.0	317.9	247.29
		810	1909.8	318.7	251.06
	EDGE	512	1850.2	316.4	245.43
		661	1880.0	323.7	244.42
		810	1909.8	321.5	243.43

Bands	Modulation	Channel	Frequency (MHz)	26 dB BW (MHz)	99% BW (MHz)
WCDMA Band II	RMC 12.2kbps	9262	1852.4	4.703	4.1476
		9400	1880.0	4.694	4.1648
		9538	1907.6	4.692	4.1635
WCDMA Band V	RMC 12.2kbps	4132	826.4	4.699	4.1543
		4182	836.4	4.725	4.1811
		4233	846.6	4.710	4.1649

The test plots as follows:

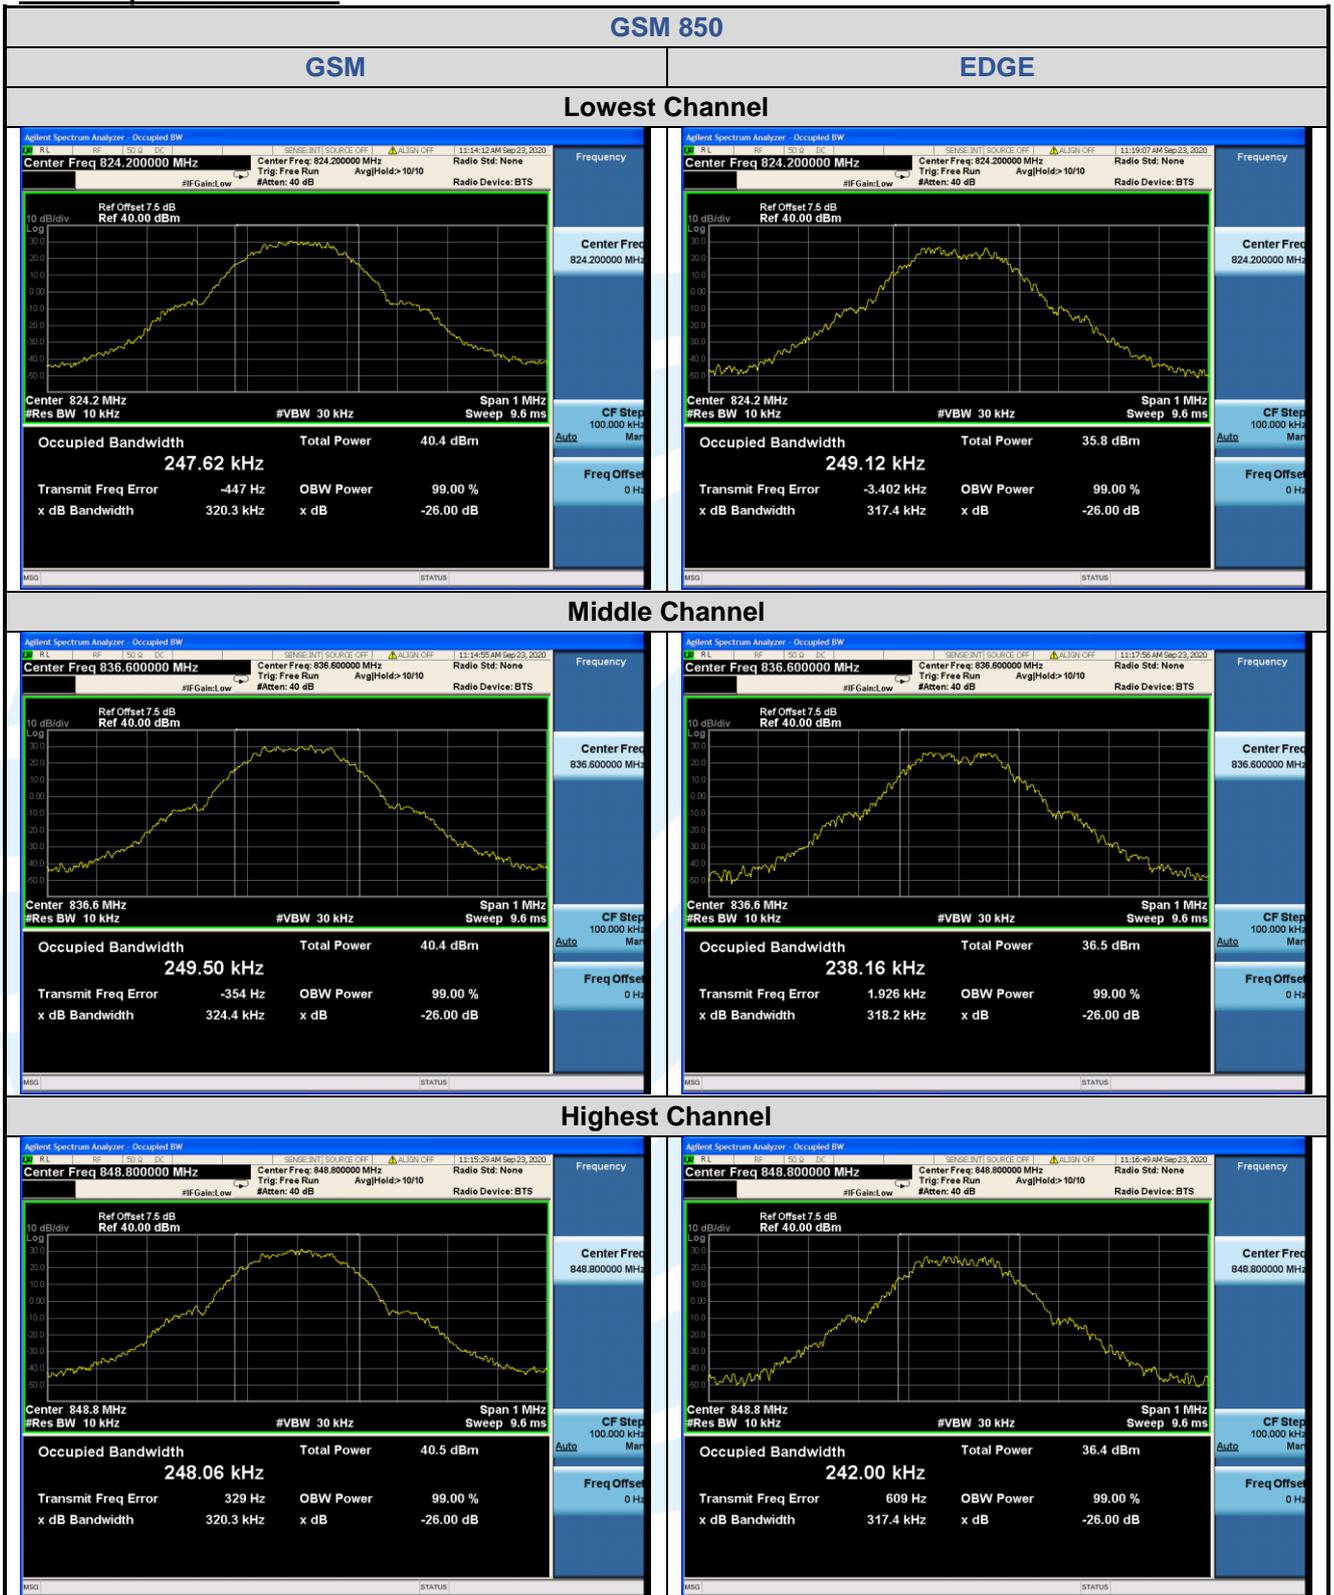

## Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China


Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC23G-V1.0

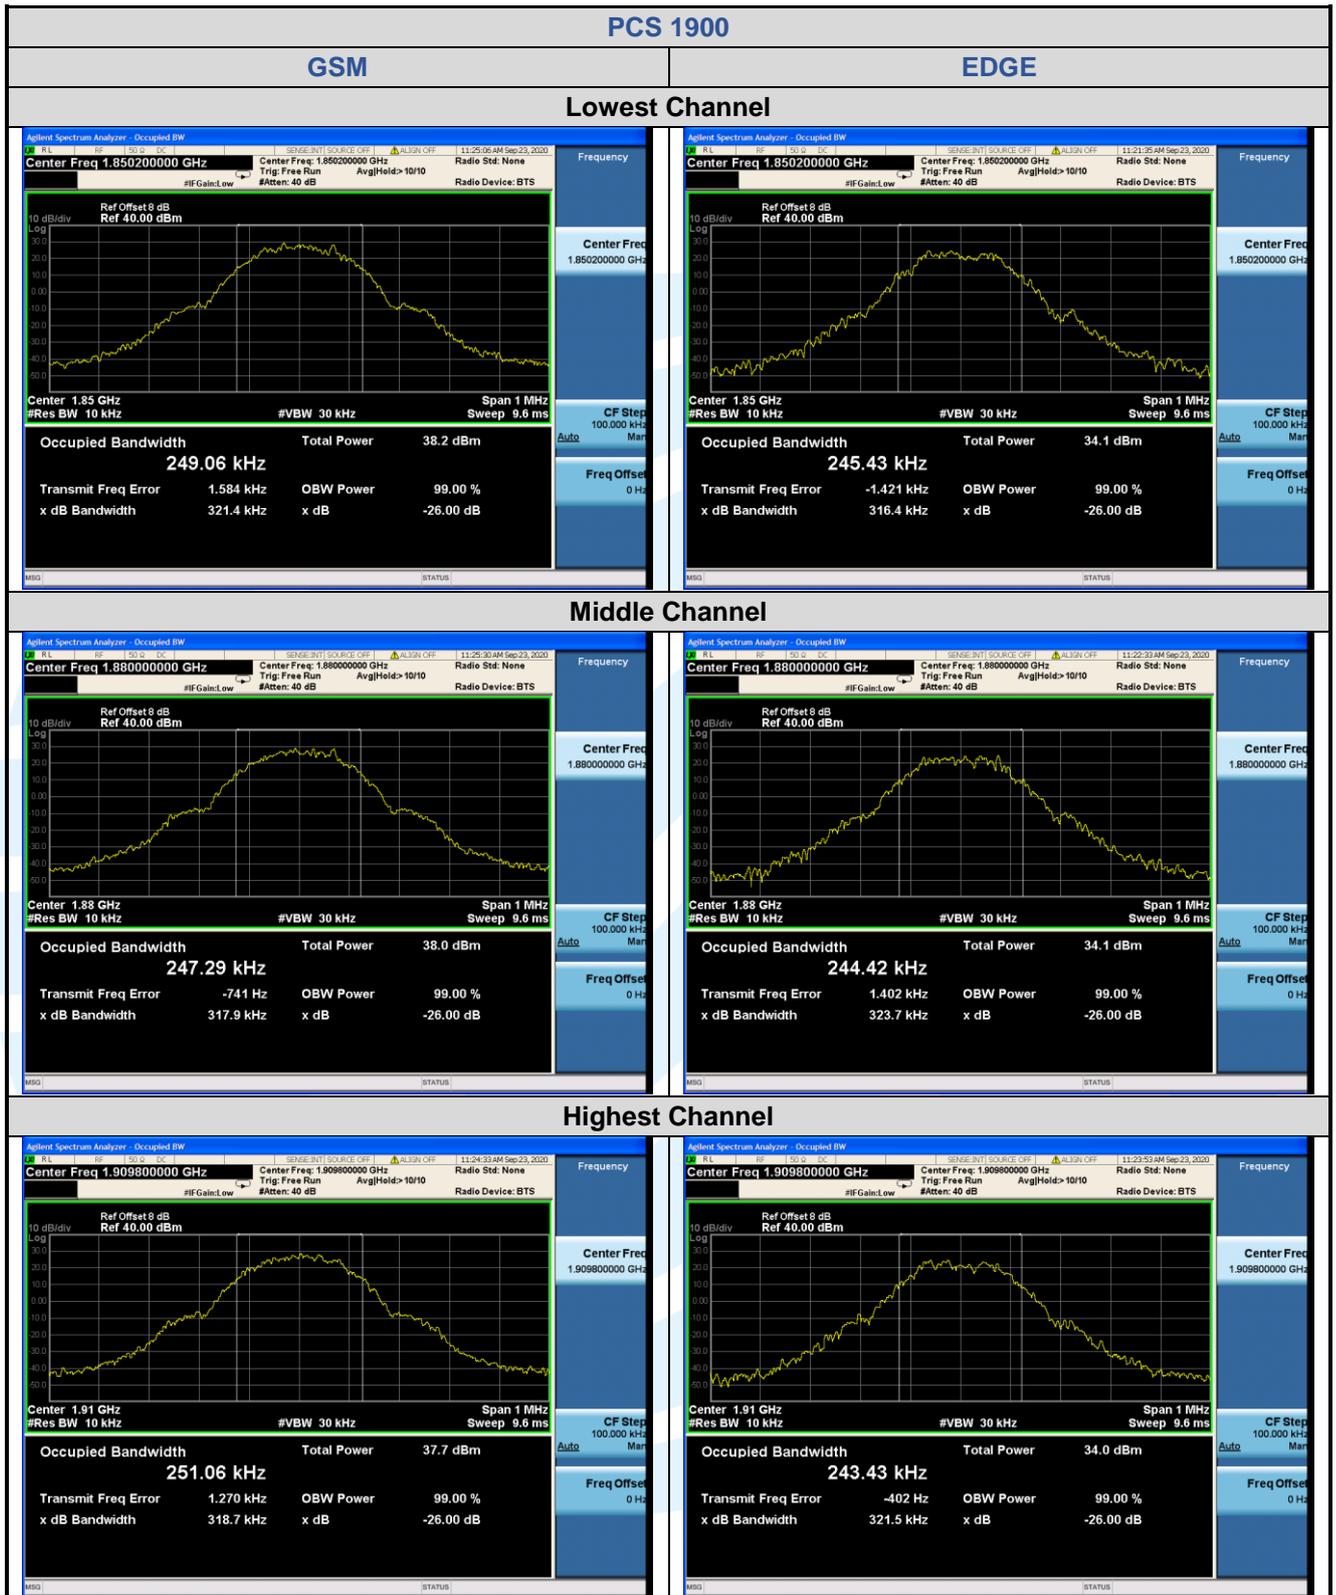

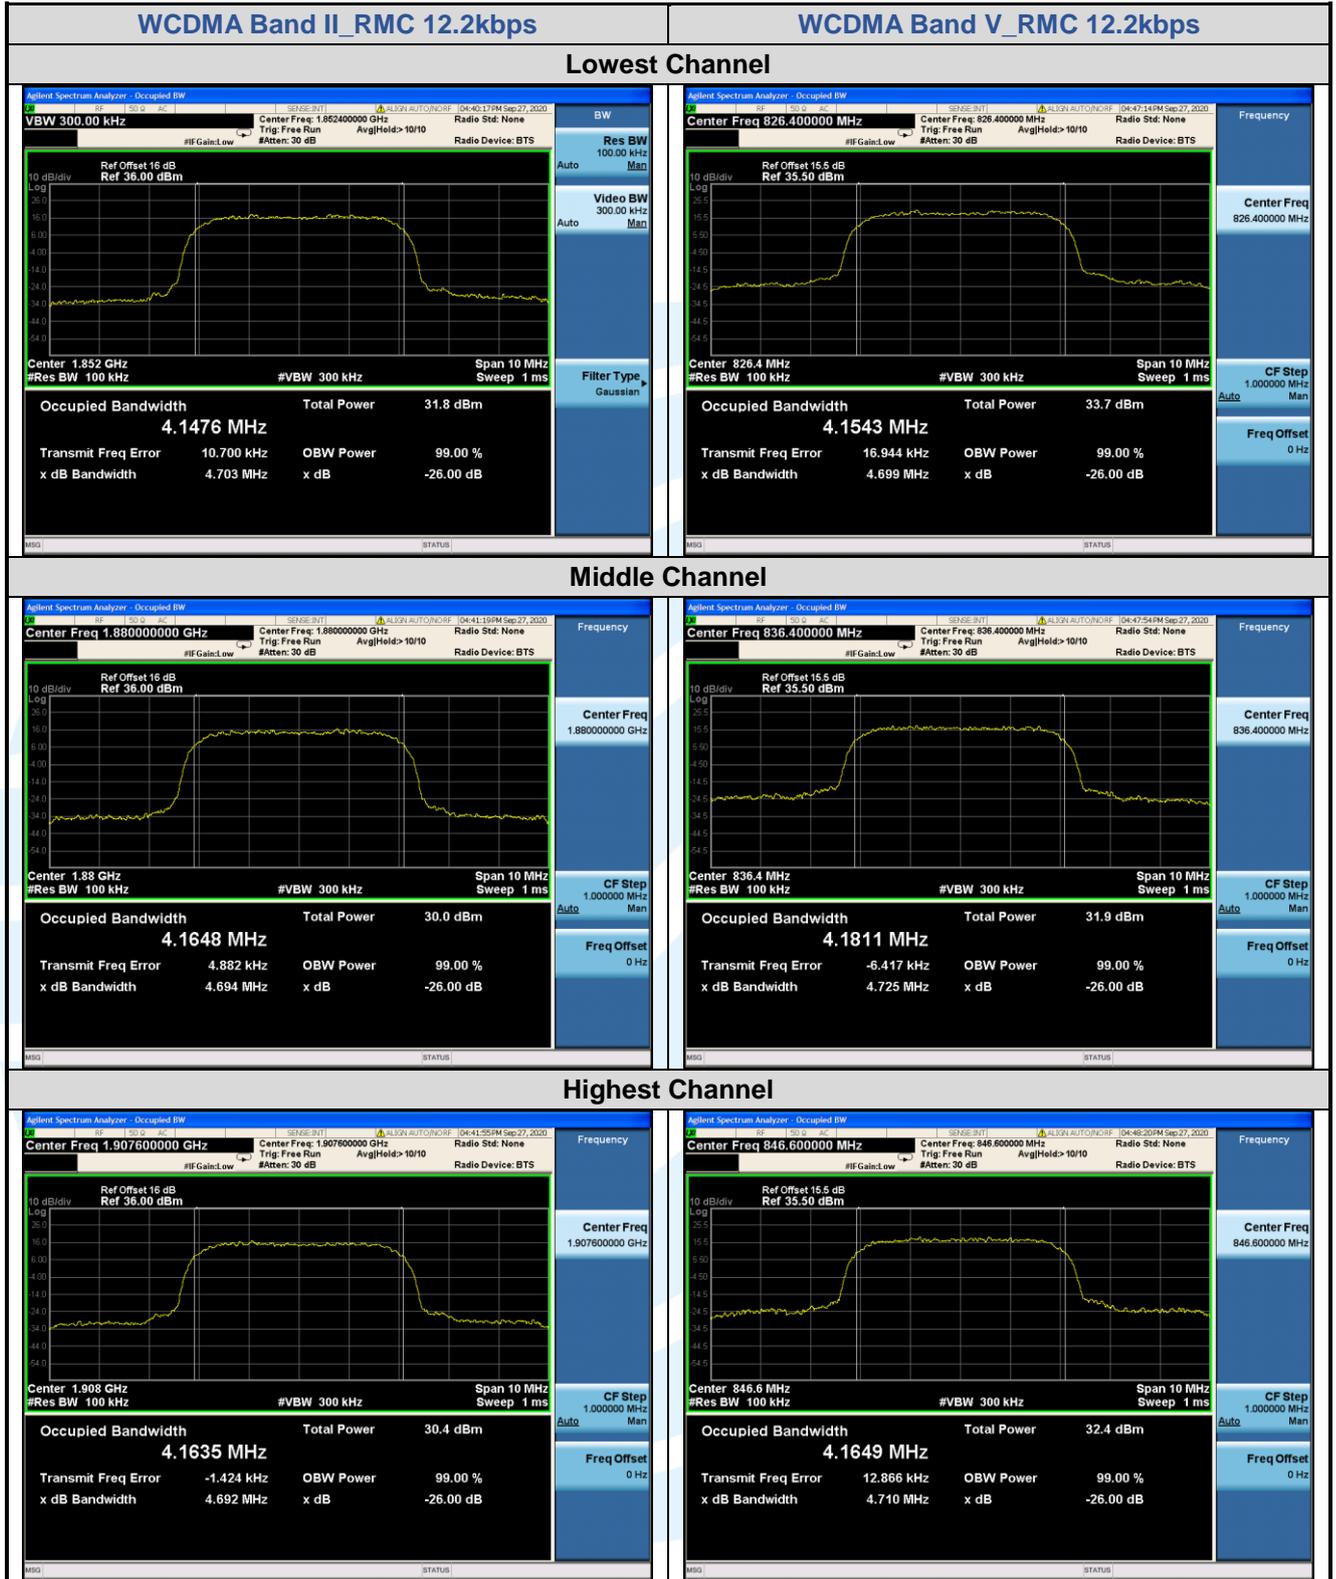

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC23G-V1.0

## 5.6 BAND EDGE AT ANTENNA TERMINALS

**Test Requirement:** FCC 47 CFR Part 2.1051,  
FCC 47 CFR Part 22.917(a),  
FCC 47 CFR Part 24.238(a),

**Test Method:** ANSI C63.26-2015 & KDB 971168 D01v03r01

**Limit:**

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to -13 dBm.

**Test Procedure:**

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer.

For each band edge measurement:

- 1) Set the spectrum analyzer span to include the block edge frequency.
- 2) Set a marker to point the corresponding band edge frequency in each test case.
- 3) Set display line at -13 dBm
- 4) Set resolution bandwidth to at least 1% of emission bandwidth.
- 5) Set spectrum analyzer with RMS detector.
- 6) Record the max trace plot into the test report

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

**Test Setup:** Refer to section 4.2.2 for details.

**Instruments Used:** Refer to section 3 for details

**Test Mode:** Link mode

**Test Results:** Pass