



# TEST REPORT

## No. I22Z61006-WMD01

for

**BLU Products,Inc.**

**Mobile Phone**

**Model Name: B200VL**

**FCC ID: YHLBLUB200VL**

with

**Hardware Version: V1.0**

**Software Version: BLU\_B200VL\_V11.0.02.05.02.02**

**Issued Date: 2022-07-27**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S.Government.

**Test Laboratory:**

**CTTL, Telecommunication Technology Labs, CAICT**

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: [ctl\\_terminals@caict.ac.cn](mailto:ctl_terminals@caict.ac.cn), website: [www.caict.ac.cn](http://www.caict.ac.cn)



## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
I22Z61006-WMD01	Rev.0	1 <sup>st</sup> edition	2022-07-27

Note: the latest revision of the test report supersedes all previous version.

## **CONTENTS**

<b>1. TEST LABORATORY .....</b>	<b>4</b>
<b>1.1. INTRODUCTION &amp; ACCREDITATION.....</b>	<b>4</b>
<b>1.2. TESTING LOCATION .....</b>	<b>4</b>
<b>1.3. TESTING ENVIRONMENT .....</b>	<b>5</b>
<b>1.4. PROJECT DATA .....</b>	<b>5</b>
<b>1.5. SIGNATURE .....</b>	<b>5</b>
<b>2. CLIENT INFORMATION.....</b>	<b>6</b>
<b>2.1. APPLICANT INFORMATION .....</b>	<b>6</b>
<b>2.2. MANUFACTURER INFORMATION.....</b>	<b>6</b>
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>7</b>
<b>3.1. ABOUT EUT .....</b>	<b>7</b>
<b>3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....</b>	<b>7</b>
<b>3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST .....</b>	<b>7</b>
<b>4. REFERENCE DOCUMENTS.....</b>	<b>8</b>
<b>5. LABORATORY ENVIRONMENT .....</b>	<b>9</b>
<b>6. SUMMARY OF TEST RESULT .....</b>	<b>10</b>
<b>7. TEST EQUIPMENT UTILIZED .....</b>	<b>12</b>
<b>ANNEX A: MEASUREMENT RESULTS.....</b>	<b>13</b>
<b>A.1 OUTPUT POWER .....</b>	<b>13</b>
<b>A.2 EMISSION LIMIT .....</b>	<b>18</b>
<b>A.3 FREQUENCY STABILITY .....</b>	<b>25</b>
<b>A.4 OCCUPIED BANDWIDTH.....</b>	<b>28</b>
<b>A.5 EMISSION BANDWIDTH.....</b>	<b>41</b>
<b>A.6 BAND EDGE COMPLIANCE .....</b>	<b>54</b>
<b>A.7 CONDUCTED SPURIOUS EMISSION .....</b>	<b>58</b>
<b>A.8 PEAK-TO-AVERAGE POWER RATIO .....</b>	<b>65</b>
<b>ANNEX B: ACCREDITATION CERTIFICATE.....</b>	<b>66</b>



## **1. Test Laboratory**

### **1.1. Introduction & Accreditation**

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2017 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0 and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (CN0066). The detail accreditation scope can be found on NVLAP website.

### **1.2. Testing Location**

Location 1: CTTL (huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China 100191

Location 2: CTTL (BDA)

Address: No.18A, Kangding Street, Beijing Economic-Technology  
Development Area, Beijing, P. R. China 100176

### 1.3. Testing Environment

Normal Temperature: 15-35°C  
Relative Humidity: 20-75%

### 1.4. Project Data

Testing Start Date: 2022-06-02  
Testing End Date: 2022-07-22

### 1.5. Signature



---

**Dong Yuan**  
**(Prepared this test report)**



---

**Zhou Yu**  
**(Reviewed this test report)**



---

**Zhao Hui Lin**  
**Deputy Director of the laboratory**  
**(Approved this test report)**



## **2. Client Information**

### **2.1. Applicant Information**

Company Name: BLU Products,Inc.  
Address /Post: 10814 NW 33rd St # 100 Doral, FL 33172,USA  
Contact: Zeng wei  
Email: zwei@ctasiasz.com  
Telephone: 305.715.7171  
Fax: 305.436.8819

### **2.2. Manufacturer Information**

Company Name: BLU Products,Inc.  
Address /Post: 10814 NW 33rd St # 100 Doral, FL 33172,USA  
Contact: Zeng wei  
Email: zwei@ctasiasz.com  
Telephone: 305.715.7171  
Fax: 305.436.8819

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	Mobile Phone
Model Name	B200VL
FCC ID	YHLBLUB200VL
Antenna	Embedded
Output power	24.61dBm maximum EIRP measured for WCDMA Band II
Extreme vol. Limits	3.5VDC to 4.35VDC (nominal: 3.8VDC)
Extreme temp. Tolerance	-10°C to +45°C

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL.

#### **3.2. Internal Identification of EUT used during the test**

<b>EUT ID*</b>	<b>IMEI</b>	<b>HW Version</b>	<b>SW Version</b>	<b>Date of receipt</b>
UT38a	357173130002521	V1.0	BLU_B200VL_ V11.0.02.05.02.02	2022-05-19
UT52a	357173130006129	V1.0	BLU_B200VL_ V11.0.02.05.02.02	2022-06-19

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE used during the test**

<b>AE ID*</b>	<b>Description</b>
AE1	Battery
AE1	
Model	LT25H426271B
Manufacturer	GUANGDONG FENGHUA NEW ENERGY CO.,LTD.
Capacitance	1450mAh

\*AE ID: is used to identify the test sample in the lab internally.

## **4. Reference Documents**

### **4.1. Documents supplied by applicant**

EUT parameters are supplied by the client or manufacturer, which are the bases of testing.

### **4.2. Reference Documents for testing**

The following documents listed in this section are referred for testing.

<b>Reference</b>	<b>Title</b>	<b>Version</b>
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	10-1-20 Edition
FCC Part 22	PUBLIC MOBILE SERVICES	10-1-20 Edition
FCC Part 27	MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES	10-1-20 Edition
ANSI/TIA-603-E	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2016
ANSI C63.26	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services	2015
KDB 971168 D01	MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS	v03r01



## 5. Laboratory Environment

**Fully-anechoic chamber** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4Ω
Site voltage standing-wave ratio ( <i>S<sub>VSWR</sub></i> )	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz

**Shielded room** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4Ω

## 6. Summary Of Test Result

### WCDMA Band II

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	24.232	P
2	Emission Limit	2.1051/24.238	P
3	Frequency Stability	2.1055	P
4	Occupied Bandwidth	2.1049	P
5	Emission Bandwidth	24.238	P
6	Band Edge Compliance	24.238	P
7	Conducted Spurious Emission	24.238	P
8	Peak-to-Average Power Ratio	24.232	P

### WCDMA Band V

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	22.913	P
2	Emission Limit	2.1051/22.917	P
3	Frequency Stability	2.1055	P
4	Occupied Bandwidth	2.1049	P
5	Emission Bandwidth	22.917	P
6	Band Edge Compliance	22.917	P
7	Conducted Spurious Emission	22.917	P

### WCDMA Band IV

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	27.50	P
2	Emission Limit	2.1051/27.53	P
3	Frequency Stability	2.1055	P
4	Occupied Bandwidth	2.1049	P
5	Emission Bandwidth	27.53	P
6	Band Edge Compliance	27.53	P
7	Conducted Spurious Emission	27.53	P
8	Peak-to-Average Power Ratio	27.50	P

## Terms used in Verdict column

P	Pass. The EUT complies with the essential requirements in the standard.
NP	Not Performed. The test was not performed by CTTL.
NA	Not Applicable. The test was not applicable.
BR	Re-use test data from basic model report.
F	Fail. The EUT does not comply with the essential requirements in the standard.

All the test results are based on normal power.

## Explanation of worst-case configuration

The worst-case scenario for all measurements is based on the conducted output power measurement investigation results. Output power was measured on QPSK and 16QAM modulations. It was found that QPSK was the worst case. All testing was performed using QPSK modulations to represent the worst case unless otherwise stated. The test results shown in the following sections represent the worst case emission.

## 7. Test Equipment Utilized

Description	Type	Series Number	Manufacture	Cal Due Date	Calibration Interval
Universal Radio Communication Tester	CMU200	108646	R&S	2023-01-17	25 months
Spectrum Analyzer	FSU	200030	R&S	2023-05-25	1 year
Climate chamber	SH-242	93008556	ESPEC	2023-12-23	3 years
Wireless Communication Test Set	E5515E	MY53211012	Agilent	2022-08-01	1 year
Test Receiver	E4440A	MY48250642	Agilent	2023-03-10	1 year
Universal Radio Communication Tester	CMW500	143008	R&S	2022-12-01	1 year
EMI Antenna	VULB9163	9163-482	Schwarzbeck	2022-11-16	1 year
Signal Generator	SMF100A	101295	R&S	2022-12-23	1 year
EMI Antenna	3117	00058889	ETS-Lindgren	2022-11-07	1 year
EMI Antenna	LB-7180-NF	J203001300005	A-INFO	2023-02-23	1 year

## **Annex A: Measurement Results**

### **A.1 Output Power**

#### **A.1.1 Summary**

During the process of testing, the EUT was controlled via communication tester to ensure max power transmission and proper modulation.

In all cases, output power is within the specified limits.

#### **A.1.2 Conducted**

##### **A.1.2.1 Method of Measurements**

The EUT was set up for the max output power with pseudo random data modulation.

These measurements were done at 3 frequencies (bottom, middle and top of operational frequency range) for each bandwidth.

##### **A.1.2.2 Measurement Result**

###### **WCDMA Band II**

###### **QPSK**

	CH	Frequency (MHz)	output power (dBm)
WCDMA (Band II)	9262	1852.4	22.54
	9400	1880.0	22.59
	9538	1907.6	22.63

###### **16QAM**

	CH	Frequency (MHz)	output power (dBm)
WCDMA (Band II)	9262	1852.4	21.01
	9400	1880.0	21.08
	9538	1907.6	21.14

###### **WCDMA Band V**

###### **QPSK**

	CH	Frequency (MHz)	output power (dBm)
WCDMA (Band V)	4132	826.4	22.57
	4183	836.6	22.61
	4233	846.6	22.57

###### **16QAM**

	CH	Frequency (MHz)	output power (dBm)
WCDMA (Band V)	4132	826.4	21.15
	4183	836.6	21.16
	4233	846.6	21.14

**WCDMA Band IV****QPSK**

WCDMA (Band IV)	CH	Frequency (MHz)	output power (dBm)
	1312	1712.4	22,01
	1412	1732.4	22.06
	1513	1752.6	22.12

**16QAM**

WCDMA (Band IV)	CH	Frequency (MHz)	output power (dBm)
	1312	1712.4	21.03
	1412	1732.4	21.18
	1513	1752.6	21.01

### **A.1.3 Radiated**

#### **A.1.3.1 Description**

This is the test for the maximum radiated power from the EUT.

Part 22.913(a) specifies "The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts".

Part 24.232(c) specifies "Mobile and portable stations are limited to 2 watts EIRP".

#### **A.1.3.2 Method of Measurement**

NASI C63.26 chapter 5.2.5.5: when working in decibels (i.e., logarithmic scale), the ERP and EIRP represent the sum of the transmit antenna gain (in dBd or dBi, respectively) and the conducted RF output power (expressed in dB relative to watts or milliwatts).

The relevant equation for determining the maximum ERP or EIRP from the measured RF output power is given in Equation (1) as follows:

$$\text{ERP or EIRP} = P_{\text{Mea}} + G_T$$

Where

ERP or EIRP                      effective radiated power or equivalent isotropically radiated power,  
respectively

(expressed in the same units as  $P_{\text{Mea}}$ , e.g., dBm or dBW)

$P_{\text{Mea}}$                               measured transmitter output power or PSD, in dBm or dBW

$G_T$                                   gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

**WCDMA Band II**
**QPSK**

Frequency (MHz)	Conducted output power (dBm)	Radiated output power (dBm) GT = 1.98 dBi
1852.4	22.54	24.52
1880.0	22.59	24.57
1907.6	22.63	24.61

**16QAM**

Frequency (MHz)	Conducted output power (dBm)	Radiated output power (dBm) GT = 1.98 dBi
1852.4	21.01	22.99
1880.0	21.08	23.06
1907.6	21.14	23.12

**WCDMA Band V**
**QPSK**

Frequency (MHz)	Conducted output power (dBm)	Radiated output power (dBm) GT = 2.68dBi
826.4	22.57	23.10
836.6	22.61	23.14
846.6	22.57	23.10

**16QAM**

Frequency (MHz)	Conducted output power (dBm)	Radiated output power (dBm) GT = 2.68dBi
826.4	21.15	21.68
836.6	21.16	21.69
846.6	21.14	21.67



**WCDMA Band IV****QPSK**

Frequency (MHz)	Conducted output power (dBm)	Radiated output power (dBm) GT = -1.46 dBi
1712.4	22.01	20.55
1732.4	22.06	20.60
1752.6	22.12	20.66

**16QAM**

Frequency (MHz)	Conducted output power (dBm)	Radiated output power (dBm) GT = -1.46 dBi
1712.4	21.03	19.57
1732.4	21.18	19.72
1752.6	21.01	19.55

## **A.2 Emission Limit**


### **A.2.1 Measurement Method**


The measurements procedures in C63.26 are used.

The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set as outlined in Part 24.238, Part 22.917, Part 27.53. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of WCDMA Band II, WCDMA Band V and WCDMA Band IV.

#### **The procedure of radiated spurious emissions is as follows:**

Using the test configuration as follow, measure the radiated emissions directly from the EUT and convert the measured field strength or received power to ERP or EIRP, as required, for comparison to the applicable limits.

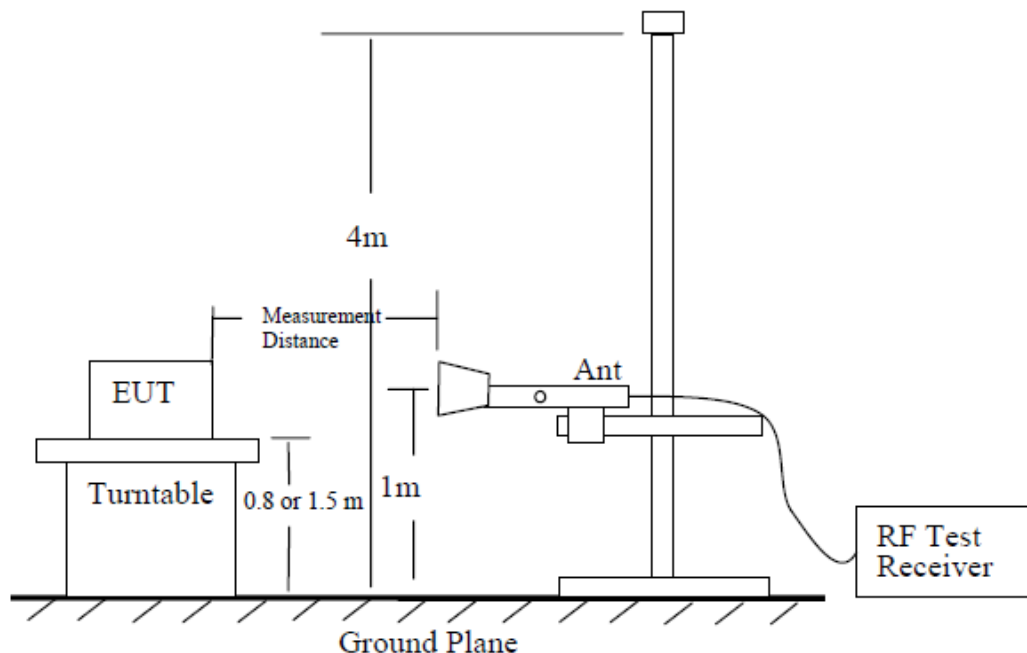

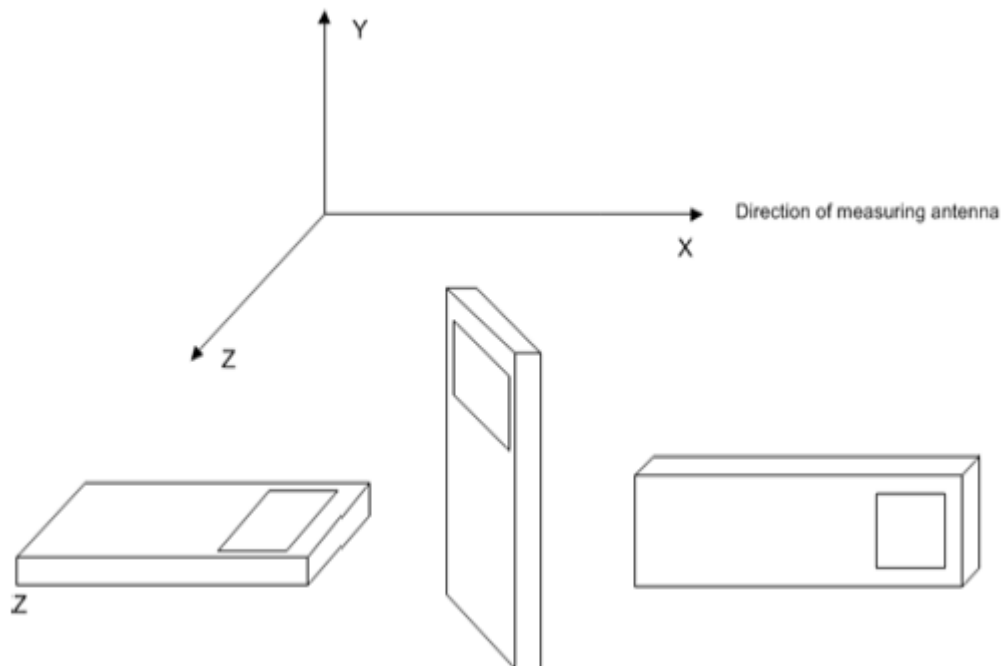

The emission characteristics of the EUT can be identified from the pre-scan measurement information.

Exploratory radiated measurements (pre-scans) may be performed to determine the general EUT radiated emissions characteristics and, when necessary, the EUT-to-measurement antenna orientation that produces the maximum emission amplitude. Pre-scans shall only be used to determine the emission frequencies (i.e., not amplitude levels). The information garnered from a pre-scan can then be used to perform final compliance measurements using either the substitution or direct field strength method.

For radiated emissions measurements performed at frequencies less than or equal to 1 GHz, the EUT shall be placed on a RF-transparent table or support at a nominal height of 80 cm above the reference ground plane. Radiated measurements shall be made with the measurement antenna positioned in both horizontal and vertical polarization. The measurement antenna shall be varied from 1 m to 4 m in height above the reference ground in a search for the relative positioning that produces the maximum radiated signal level (i.e., field strength or received power). When orienting the measurement antenna in vertical polarization, the minimum height of the lowest element of the antenna shall clear the site reference ground plane by at least 25 cm.

The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

For radiated measurements performed at frequencies above 1 GHz, the EUT shall be placed on an RF transparent table or support at a nominal height of 1.5 m above the ground plane. When maximizing the emissions from the EUT for measurement, the EUT and its transmitting antenna(s) shall be rotated through 360°. For each mode of operation to be tested, the frequency spectrum (based on findings from exploratory measurements) shall be monitored. Final measurements shall be performed for the worst case combination(s) of variable technical parameters that result in the maximum measured emission amplitude, record the frequency and amplitude of the highest fundamental emission (if applicable), and the frequency and amplitude data for the six highest-amplitude spurious emissions.

### A.2.2 Measurement Limit

**Band V:** Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10\log(P)$  dB.

**Band II:** 24.238 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10\log(P)$  dB.

**Band IV:** 27.53(m) specify that “For mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.”

### A.2.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of WCDMA Band II (1852.4 MHz, 1880.0MHz and 1907.6MHz), WCDMA Band V (826.4MHz, 836.6MHz and 846.6MHz) and WCDMA Band IV (1712.4MHz, 1732.4MHz and 1752.6MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the WCDMA Band II, WCDMA Band V and WCDMA Band IV into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

#### A.2.4 Measurement Results Table

Frequency	Channel	Frequency Range	Result
WCDMA Band V	Low	30MHz-10GHz	Pass
	Middle	30MHz-10GHz	Pass
	High	30MHz-10GHz	Pass
WCDMA Band II	Low	30MHz-20GHz	Pass
	Middle	30MHz-20GHz	Pass
	High	30MHz-20GHz	Pass
WCDMA Band IV	Low	30MHz-20GHz	Pass
	Middle	30MHz-20GHz	Pass
	High	30MHz-20GHz	Pass

#### A.2.5 Sweep Table

Working Frequency	Subrange (GHz)	RBW	VBW	Sweep time (s)
WCDMA Band V	0.03~1	100kHz	300kHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~10	1 MHz	3 MHz	3
WCDMA Band II	0.03~1	100kHz	300kHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
18~20	1 MHz	3 MHz	2	
WCDMA Band IV	0.03~1	100kHz	300kHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
	18~20	1 MHz	3 MHz	2

**Measurement Results:**
**WCDMA BAND II Mode Channel 9262/1852.4MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss (dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3707.02	-57.45	6.41	8.49	-55.37	-13.00	42.37	V
5557.02	-56.88	7.19	10.59	-53.48	-13.00	40.48	H
7413.01	-53.76	8.15	12.10	-49.81	-13.00	36.81	V
9283.01	-54.26	9.11	13.27	-50.10	-13.00	37.10	H
11093.01	-49.86	9.85	13.18	-46.53	-13.00	33.53	V
12991.01	-48.05	10.47	13.49	-45.03	-13.00	32.03	H

**WCDMA BAND II Mode Channel 9400/1880MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss (dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3757.02	-55.94	6.27	8.56	-53.65	-13.00	40.65	H
5644.02	-56.45	7.27	10.57	-53.15	-13.00	40.15	H
7533.01	-53.89	8.26	12.23	-49.92	-13.00	36.92	V
9403.01	-51.19	9.05	13.34	-46.90	-13.00	33.90	V
11283.01	-48.60	9.89	13.14	-45.35	-13.00	32.35	V
13150.01	-43.65	10.72	13.71	-40.66	-13.00	27.66	V

**WCDMA BAND II Mode Channel 9538/1907.6MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss (dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3813.02	-56.97	6.10	8.64	-54.43	-13.00	41.43	H
5721.02	-55.66	7.30	10.56	-52.40	-13.00	39.40	H
7622.01	-53.90	8.07	12.30	-49.67	-13.00	36.67	V
9555.01	-53.58	9.34	13.34	-49.58	-13.00	36.58	H
11464.01	-48.55	9.90	13.11	-45.34	-13.00	32.34	V
13386.01	-43.47	10.57	14.04	-40.00	-13.00	27.00	H

**WCDMA BAND V Mode Channel 4132/826.4MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1651.01	-53.54	3.57	5.23	2.15	-54.03	-13.00	41.03	H
2478.00	-29.01	4.60	6.03	2.15	-29.73	-13.00	16.73	V
3282.02	-61.44	5.28	7.68	2.15	-61.19	-13.00	48.19	V
4137.02	-56.98	6.06	9.04	2.15	-56.15	-13.00	43.15	V
4939.01	-56.98	6.71	9.84	2.15	-56.00	-13.00	43.00	H
5782.01	-56.19	7.22	10.54	2.15	-55.02	-13.00	42.02	H

**WCDMA BAND V Mode Channel 4183/836.6MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1668.01	-54.36	3.58	5.20	2.15	-54.89	-13.00	41.89	H
2510.00	-43.87	4.63	6.12	2.15	-44.53	-13.00	31.53	H
3352.02	-60.40	5.32	7.84	2.15	-60.03	-13.00	47.03	V
4163.02	-57.03	6.12	9.06	2.15	-56.24	-13.00	43.24	V
5033.01	-58.03	6.58	9.95	2.15	-56.81	-13.00	43.81	H
5857.01	-57.22	7.26	10.53	2.15	-56.10	-13.00	43.10	V

**WCDMA BAND V Mode Channel 4233/846.6MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1686.01	-54.79	3.59	5.17	2.15	-55.36	-13.00	42.36	V
2542.00	-45.00	4.66	6.18	2.15	-45.63	-13.00	32.63	H
3383.02	-60.99	5.35	7.92	2.15	-60.57	-13.00	47.57	V
4230.02	-57.54	6.26	9.13	2.15	-56.82	-13.00	43.82	H
5081.01	-57.07	6.72	10.01	2.15	-55.93	-13.00	42.93	V
5955.01	-56.26	7.47	10.51	2.15	-55.37	-13.00	42.37	V

**WCDMA BAND IV Mode Channel 1312/1712.4MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3423.02	-66.11	5.38	8.02	-63.47	-13.00	50.47	H
5139.02	-65.98	6.86	10.09	-62.75	-13.00	49.75	H
6849.01	-63.54	7.83	11.42	-59.95	-13.00	46.95	H
8561.01	-61.84	8.56	13.01	-57.39	-13.00	44.39	H
10289.01	-61.33	9.61	13.02	-57.92	-13.00	44.92	V
12001.01	-58.35	10.05	13.00	-55.40	-13.00	42.40	V

**WCDMA BAND IV Mode Channel 1412/1732.4MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3463.02	-65.18	5.45	8.11	-62.52	-13.00	49.52	H
5201.02	-69.97	6.96	10.18	-66.75	-13.00	53.75	H
6979.01	-64.82	8.14	11.57	-61.39	-13.00	48.39	V
8713.01	-64.65	8.40	13.04	-60.01	-13.00	47.01	V
10451.01	-60.29	9.72	13.08	-56.93	-13.00	43.93	V
12180.01	-58.72	10.12	13.07	-55.77	-13.00	42.77	V

**WCDMA BAND IV Mode Channel 1513/1752.6MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3507.02	-66.83	5.53	8.21	-64.15	-13.00	51.15	H
5259.02	-70.17	7.00	10.26	-66.91	-13.00	53.91	V
7007.01	-62.39	8.29	11.61	-59.07	-13.00	46.07	H
8759.01	-62.92	8.54	13.05	-58.41	-13.00	45.41	H
10500.01	-60.99	9.65	13.10	-57.54	-13.00	44.54	V
12253.01	-58.46	10.03	13.10	-55.39	-13.00	42.39	V

Sample: 3507.02 MHz

Power (EIRP) = P<sub>Mea</sub> - P<sub>pl</sub> + G<sub>a</sub>

Power (-64.15dBm) = P<sub>Mea</sub> (-66.83dBm) - P<sub>pl</sub> (5.53dB) + G<sub>a</sub>(8.21dBi)

Note: Expanded measurement uncertainty

Frequency range	Expanded measurement uncertainty
30MHz-1GHz	5.76dB, k=2
1GHz-18GHz	4.69dB, k=2
18GHz-40GHz	3.37dB, k=2

Note: The measurement results showed here are worst cases



## **A.3 Frequency Stability**

### **A.3.1 Method of Measurement**

Frequency stability is a measure of the frequency drift due to temperature and supply voltage variations, with reference to the frequency measured at +20 °C and rated supply voltage. Two reference points are established at the applicable unwanted emissions limit using a RBW equal to the RBW required by the unwanted emissions specification of the applicable regulatory standard. These reference points measured using the lowest and highest channel of operation shall be identified as  $F_L$  and  $F_H$  respectively.

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of CMU200.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on mid channel of each band, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10°C increments from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of the lower, higher and nominal voltage. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress.

### A.3.2 Measurement results

#### WCDMA Band II QPSK

##### Frequency Error vs Temperature

Temperature(°C)	Voltage(V)	F <sub>L</sub> (MHz)	F <sub>H</sub> (MHz)	Offset(Hz)	Frequency error(ppm)
20	3.8	1850.128	1909.864		
50				6.24	0.0033
40				-15.67	0.0083
30				3.49	0.0019
10				4.36	0.0023
0				9.34	0.0050
-10				8.83	0.0047
-20				9.81	0.0052
-30				9.22	0.0049

##### Frequency Error vs Voltage

Voltage(V)	Temperature(°C)	F <sub>L</sub> (MHz)	F <sub>H</sub> (MHz)	Offset(Hz)	Frequency error(ppm)
3.5	20	1850.128	1909.864	6.45	0.0034
4.35				8.70	0.0046

#### WCDMA Band V QPSK

##### Frequency Error vs Temperature

Temperature(°C)	Voltage(V)	F <sub>L</sub> (MHz)	F <sub>H</sub> (MHz)	Offset(Hz)	Frequency error(ppm)
20	3.8	824.152	848.848		
50				2.56	0.0031
40				0.70	0.0008
30				9.05	0.0108
10				7.69	0.0092
0				6.65	0.0079
-10				4.61	0.0055
-20				2.20	0.0026
-30				9.48	0.0113

##### Frequency Error vs Voltage

Voltage(V)	Temperature(°C)	F <sub>L</sub> (MHz)	F <sub>H</sub> (MHz)	Offset(Hz)	Frequency error(ppm)
3.5	20	824.152	848.848	4.33	0.0052
4.35				4.97	0.0059

**WCDMA Band IV QPSK**
**Frequency Error vs Temperature**

Temperature(°C)	Voltage(V)	F <sub>L</sub> (MHz)	F <sub>H</sub> (MHz)	Offset(Hz)	Frequency error(ppm)
20	3.8	1710.136	1754.872		
50				5.98	0.0035
40				8.04	0.0046
30				5.08	0.0029
10				2.44	0.0014
0				2.43	0.0014
-10				1.11	0.0006
-20				3.43	0.0020
-30				4.61	0.0027

**Frequency Error vs Voltage**

Voltage(V)	Temperature(°C)	F <sub>L</sub> (MHz)	F <sub>H</sub> (MHz)	Offset(Hz)	Frequency error(ppm)
3.5	20	1710.136	1754.872	2.37	0.0014
4.35				5.71	0.0033

#### **A.4 Occupied Bandwidth**

Occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequency. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.

The measurement method is from ANSI C63.26:


- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts.
- b) The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set  $\geq 3 \times$  RBW.
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation.
- d) Set the detection mode to peak, and the trace mode to max-hold.

### WCDMA Band II (99%)-QPSK

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)
1852.4	4166.67
1880.0	4166.67
1907.6	4182.69


### WCDMA Band II (99%)

### Channel 9262-Occupied Bandwidth (99% BW)

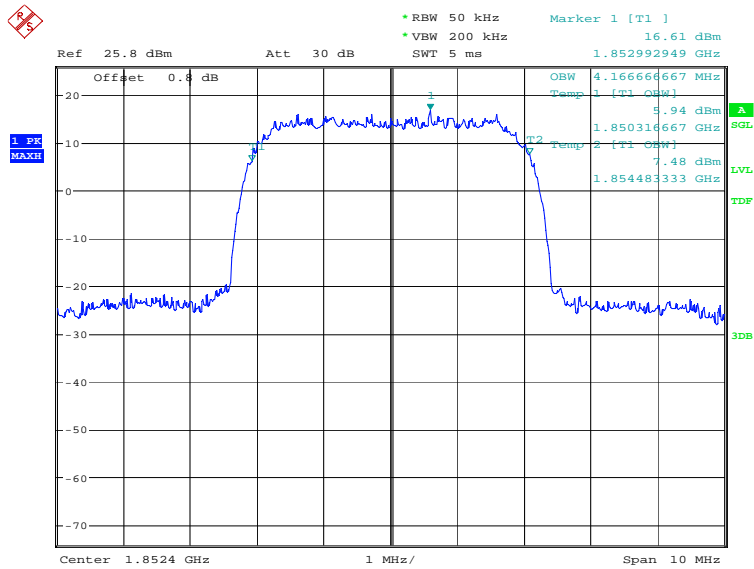


Date: 2.JUN.2022 13:18:50

### Channel 9400-Occupied Bandwidth (99% BW)

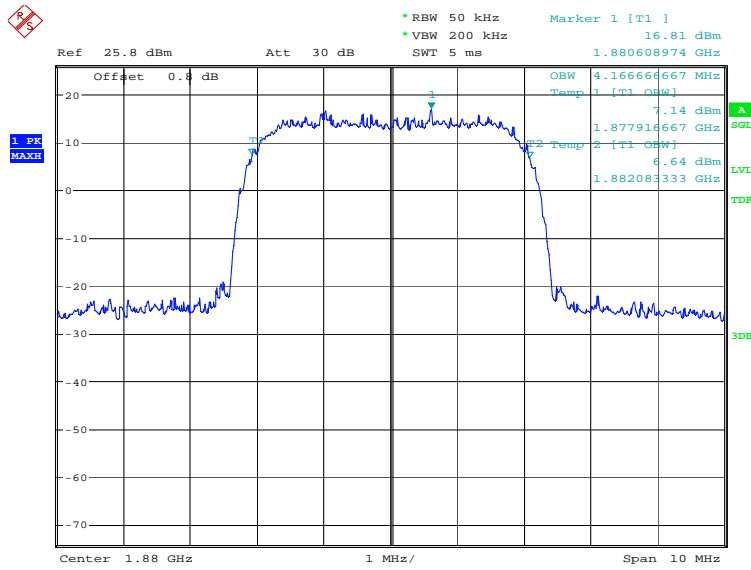

Date: 2.JUN.2022 13:19:16

### Channel 9538-Occupied Bandwidth (99% BW)

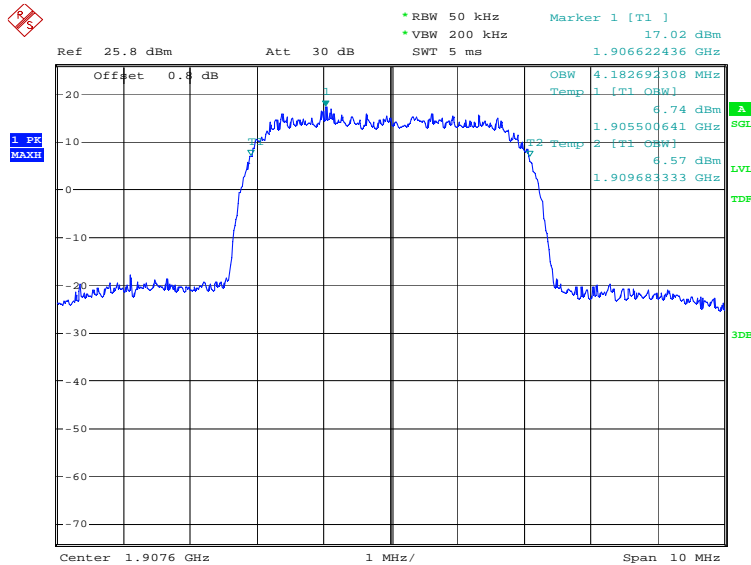


Date: 2.JUN.2022 13:19:41

**WCDMA Band II (99%)-16QAM**

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)
1852.4	4166.67
1880.0	4166.67
1907.6	4166.67


**WCDMA Band II (99%)**

**Channel 9262-Occupied Bandwidth (99% BW)**

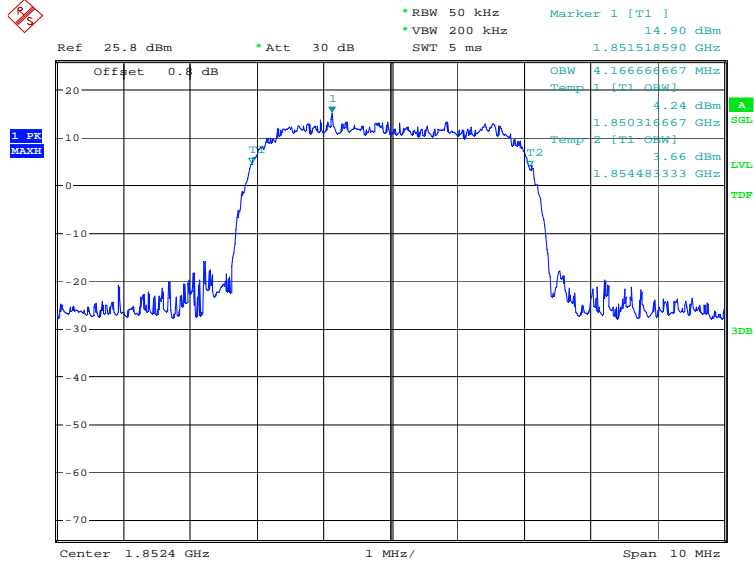


Date: 2.JUN.2022 14:12:43

### Channel 9400-Occupied Bandwidth (99% BW)

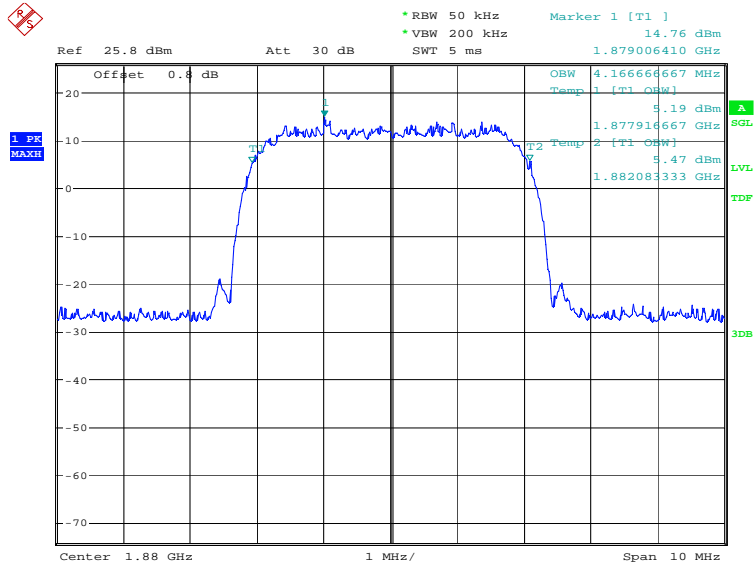

Date: 2.JUN.2022 14:13:10

### Channel 9538-Occupied Bandwidth (99% BW)

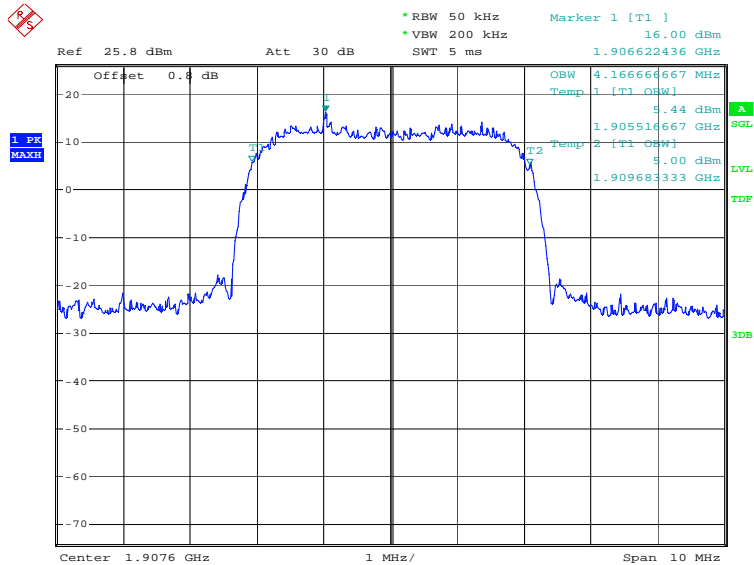

Date: 2.JUN.2022 14:13:37




### WCDMA Band V (99%)-QPSK

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)
826.4	4166.67
836.6	4166.67
846.6	4150.64


### WCDMA Band V (99%)

#### Channel 4132-Occupied Bandwidth (99% BW)

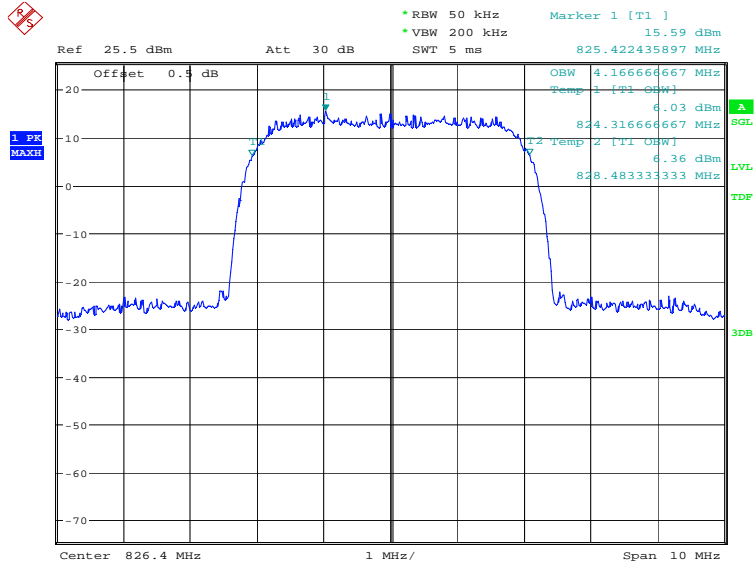


Date: 2.JUN.2022 13:23:07

### Channel 4183-Occupied Bandwidth (99% BW)

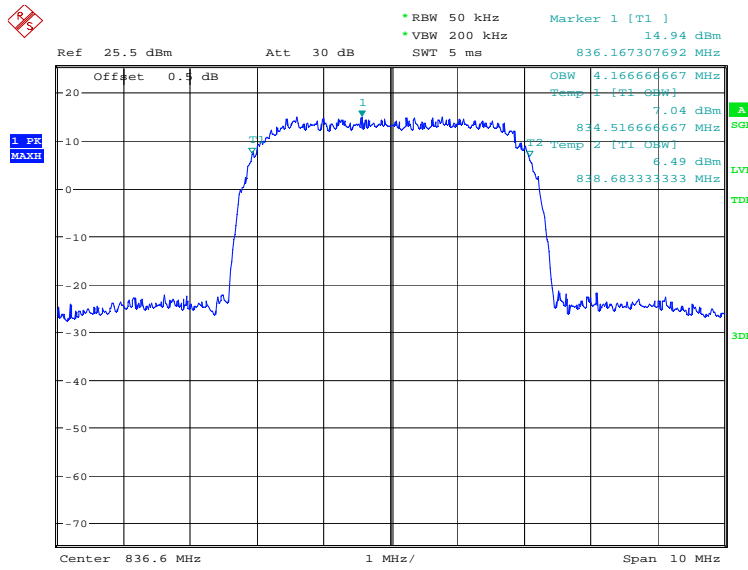

Date: 2.JUN.2022 13:23:33

### Channel 4233-Occupied Bandwidth (99% BW)

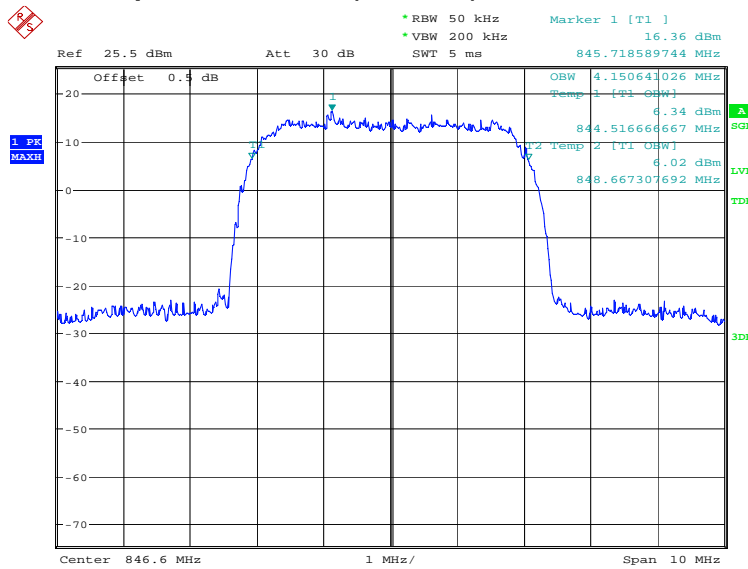


Date: 2.JUN.2022 13:23:59

### WCDMA Band V (99%)-16QAM

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)
826.4	4166.67
836.6	4166.67
846.6	4166.67


### WCDMA Band V (99%)

#### Channel 4132-Occupied Bandwidth (99% BW)

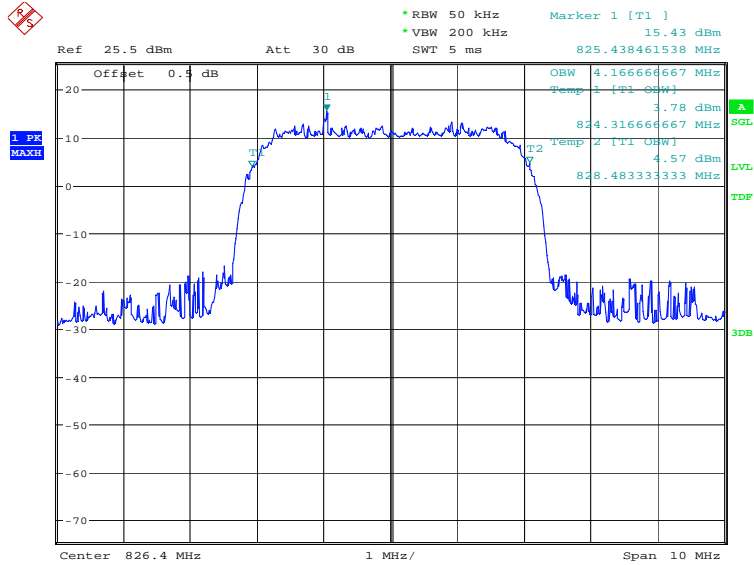


Date: 2.JUN.2022 14:17:11

### Channel 4183-Occupied Bandwidth (99% BW)

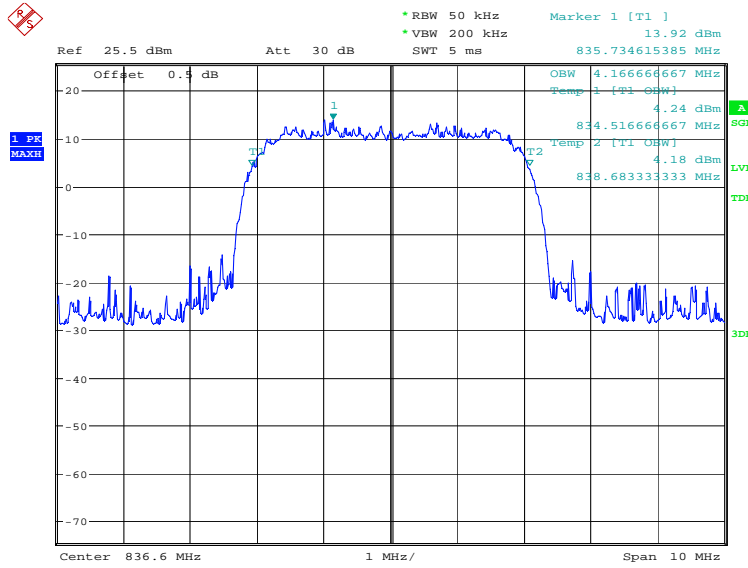

Date: 2.JUN.2022 14:17:37

### Channel 4233-Occupied Bandwidth (99% BW)

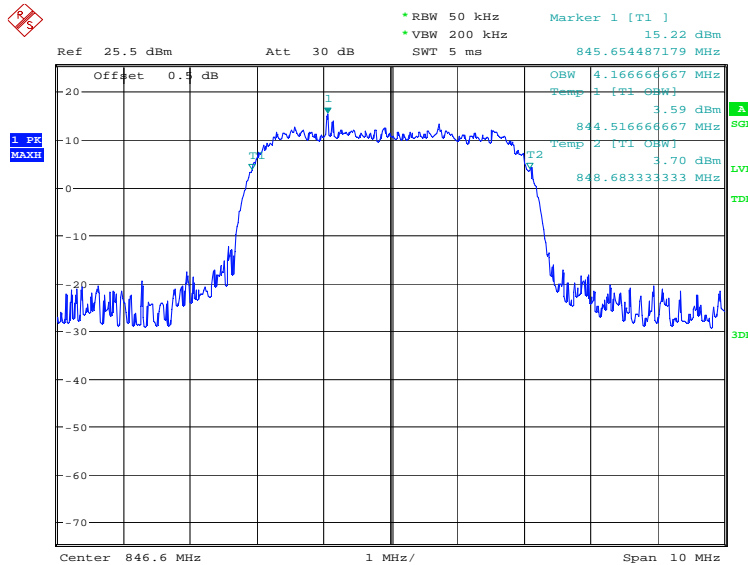


Date: 2.JUN.2022 14:18:04

**WCDMA Band IV (99%)-QPSK**

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)
1712.4	4166.67
1732.4	4182.69
1752.6	4166.67


**WCDMA Band IV (99%)**

**Channel 1312-Occupied Bandwidth (99% BW)**

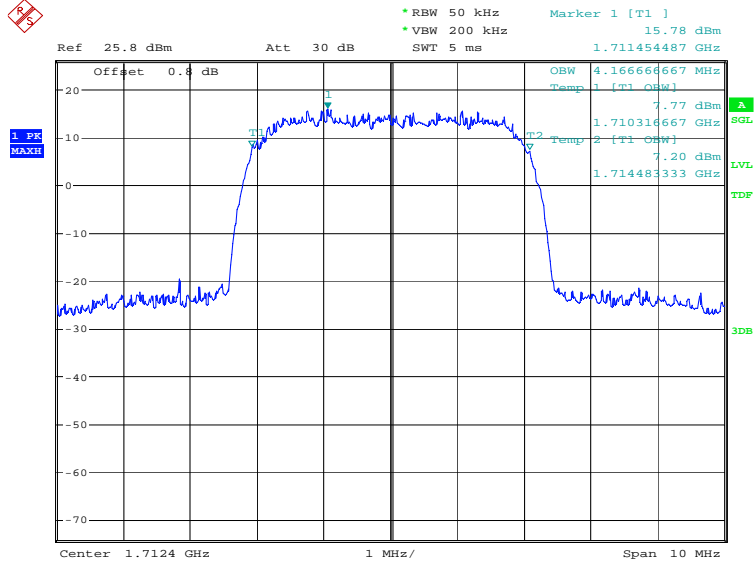


Date: 2.JUN.2022 13:21:03

### Channel 1412-Occupied Bandwidth (99% BW)

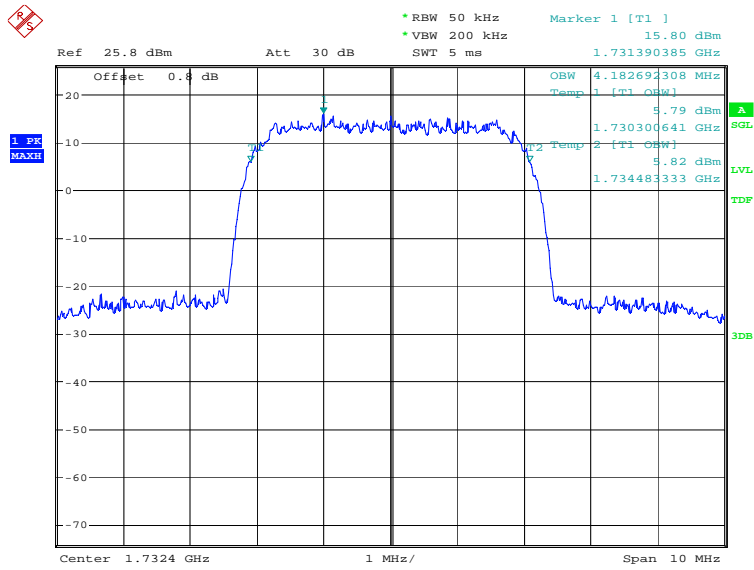

Date: 2.JUN.2022 13:21:29

### Channel 1513-Occupied Bandwidth (99% BW)

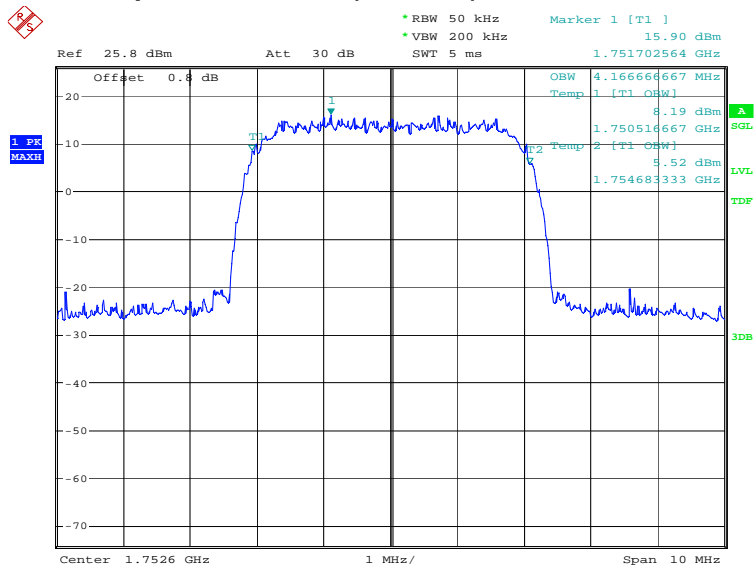


Date: 2.JUN.2022 13:21:54

### WCDMA Band IV (99%)-16QAM

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)
1712.4	4166.67
1732.4	4166.67
1752.6	4166.67


### WCDMA Band IV (99%)

#### Channel 1312-Occupied Bandwidth (99% BW)

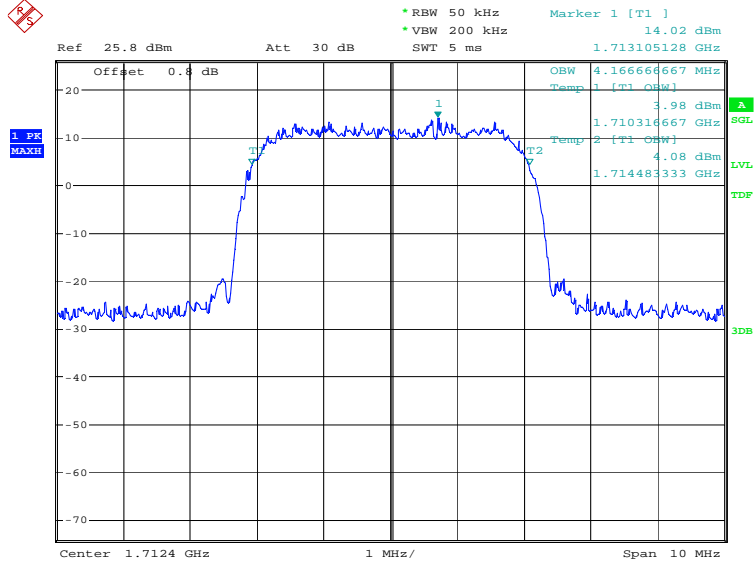


Date: 2.JUN.2022 14:14:57

### Channel 1412-Occupied Bandwidth (99% BW)

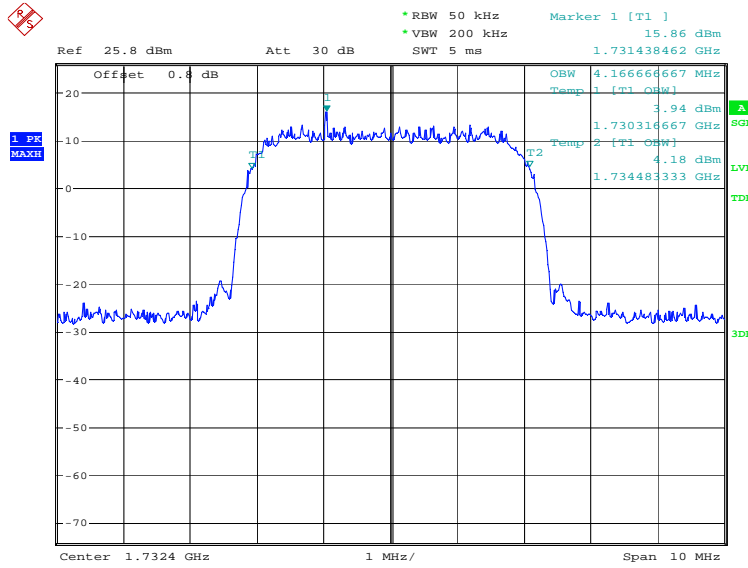

Date: 2.JUN.2022 14:15:24

### Channel 1513-Occupied Bandwidth (99% BW)

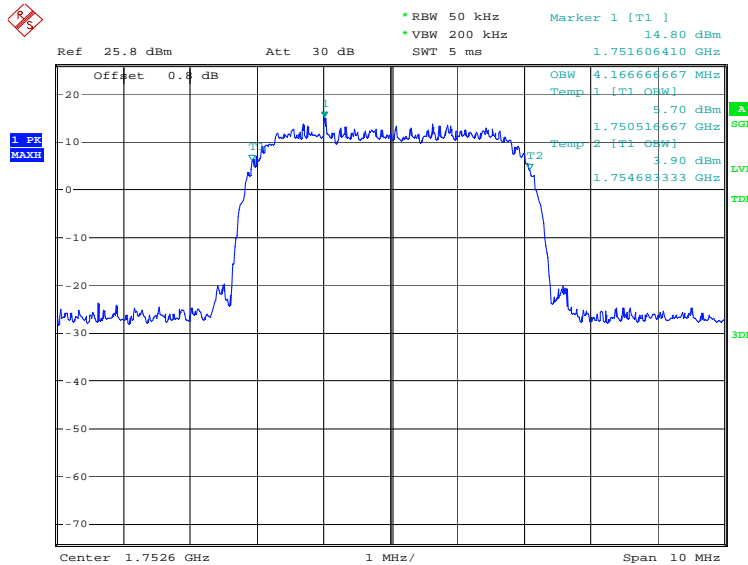

Date: 2.JUN.2022 14:15:50



## **A.5 Emission Bandwidth**

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

The measurement method is from ANSI C63.26:


- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be wide enough to see sufficient roll off of the signal to make the measurement.
- b) The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set  $\geq 3 \times$  RBW.
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation.
- d) The dynamic range of the spectrum analyzer at the selected RBW shall be more than 10 dB below the target “-X dB” requirement, i.e., if the requirement calls for measuring the -26 dB OBW, the spectrum analyzer noise floor at the selected RBW shall be at least 36 dB below the reference level.
- e) Set spectrum analyzer detection mode to peak, and the trace mode to max hold.

**WCDMA Band II-QPSK (-26dBc)**

Frequency (MHz)	Emission Bandwidth (-26dBc)(kHz)
1852.4	4711.54
1880.0	4711.54
1907.6	4727.56


**WCDMA Band II (-26dBc)**

**Channel 9262-Emission Bandwidth (-26dBc BW)**

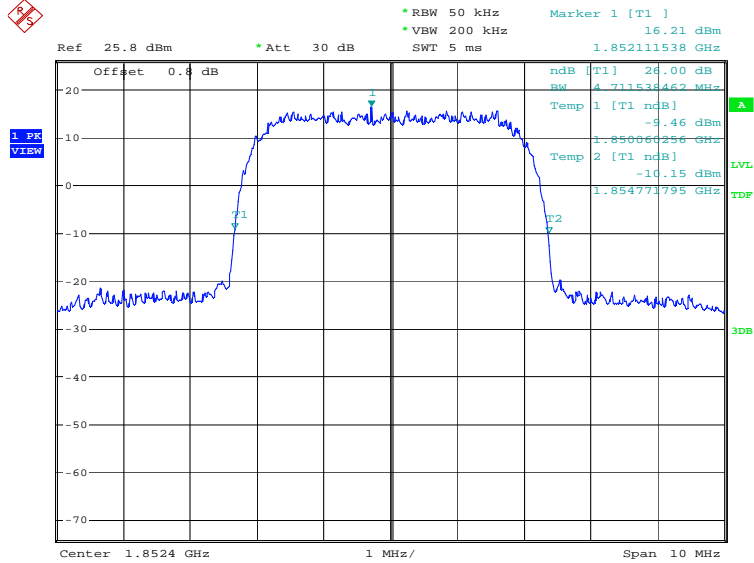


Date: 2.JUN.2022 13:25:14

### Channel 9400-Emission Bandwidth (-26dBc BW)

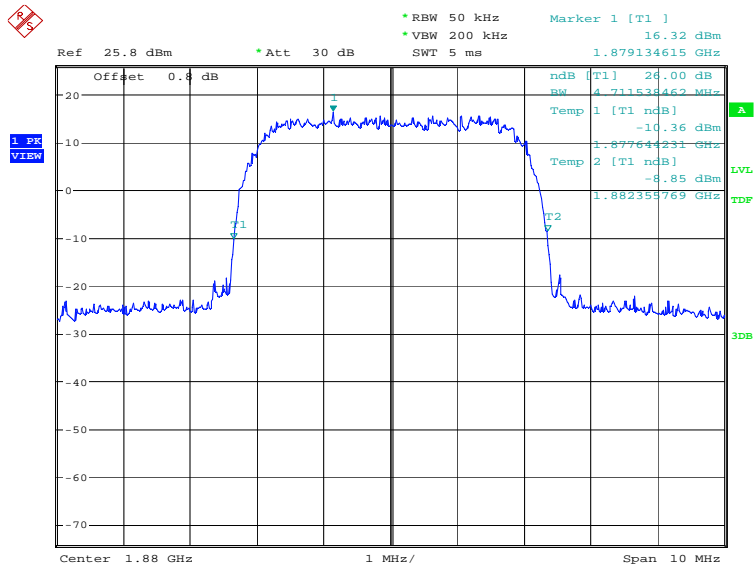

Date: 2.JUN.2022 13:25:40

### Channel 9538-Emission Bandwidth (-26dBc BW)

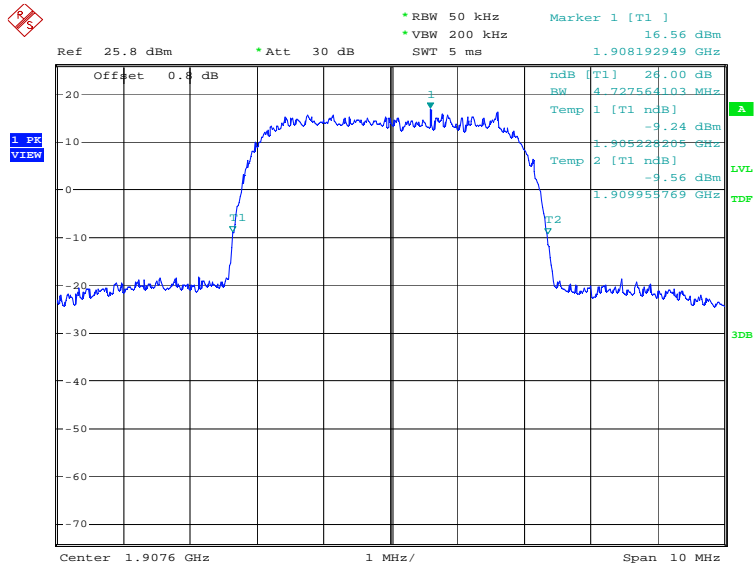


Date: 2.JUN.2022 13:26:06

**WCDMA Band II -16QAM (-26dBc)**

Frequency (MHz)	Emission Bandwidth (-26dBc)(kHz)
1852.4	4647.44
1880.0	4679.49
1907.6	4647.44


**WCDMA Band II (-26dBc)**

**Channel 9262-Emission Bandwidth (-26dBc BW)**

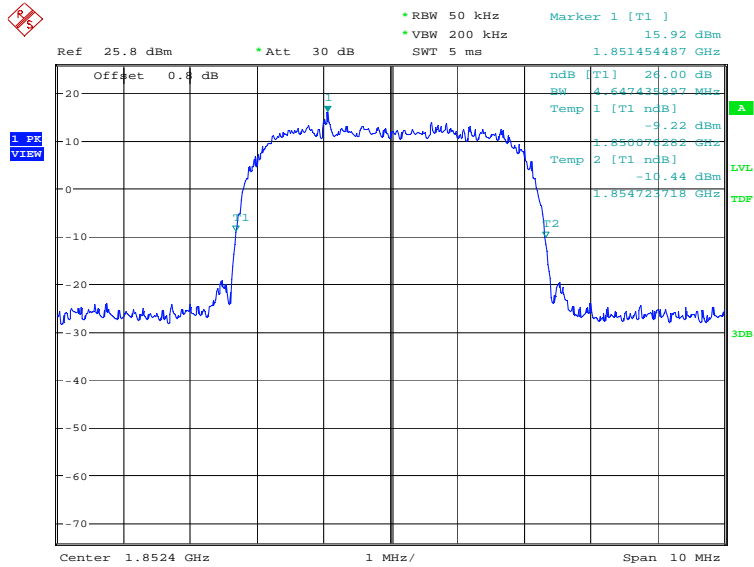


Date: 2.JUN.2022 14:19:30

### Channel 9400-Emission Bandwidth (-26dBc BW)

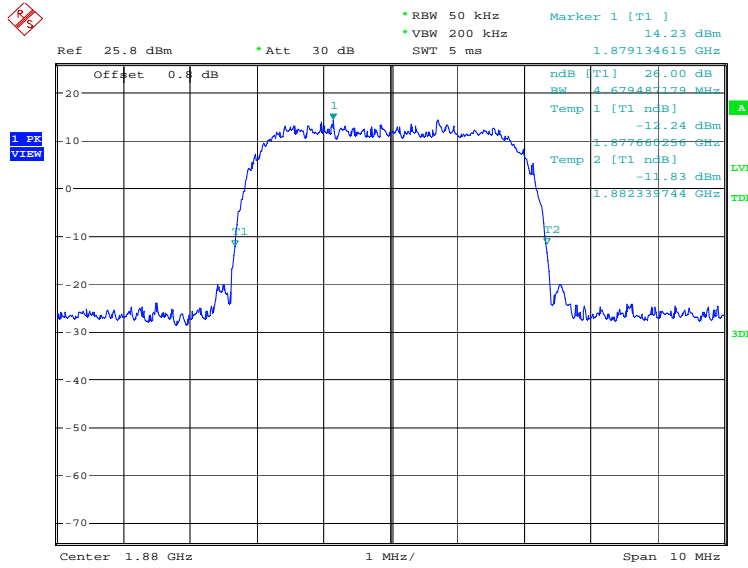

Date: 2.JUN.2022 14:19:57

### Channel 9538-Emission Bandwidth (-26dBc BW)

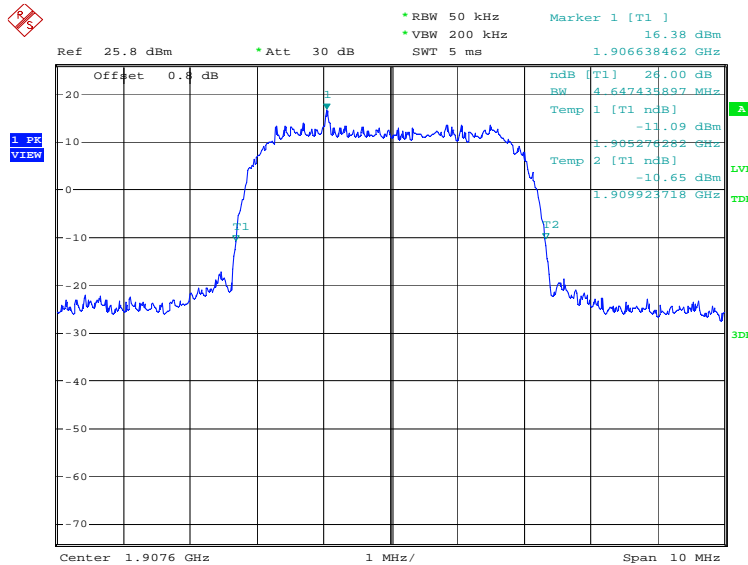


Date: 2.JUN.2022 14:20:24

**WCDMA Band V-QPSK (-26dBc)**

Frequency (MHz)	Emission Bandwidth (-26dBc)(kHz)
826.40	4695.51
836.60	4695.51
846.60	4679.49


**WCDMA Band V (-26dBc)**

**Channel 4132-Emission Bandwidth (-26dBc BW)**

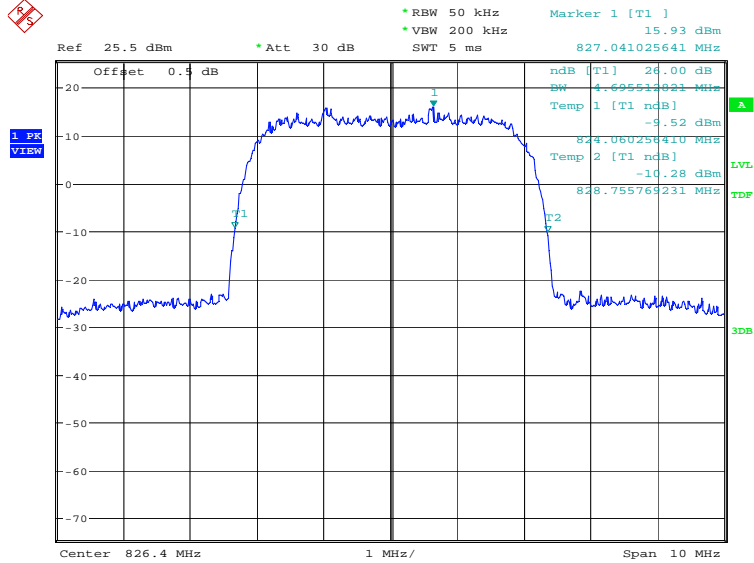


Date: 2.JUN.2022 13:29:05

### Channel 4183-Emission Bandwidth (-26dBc BW)

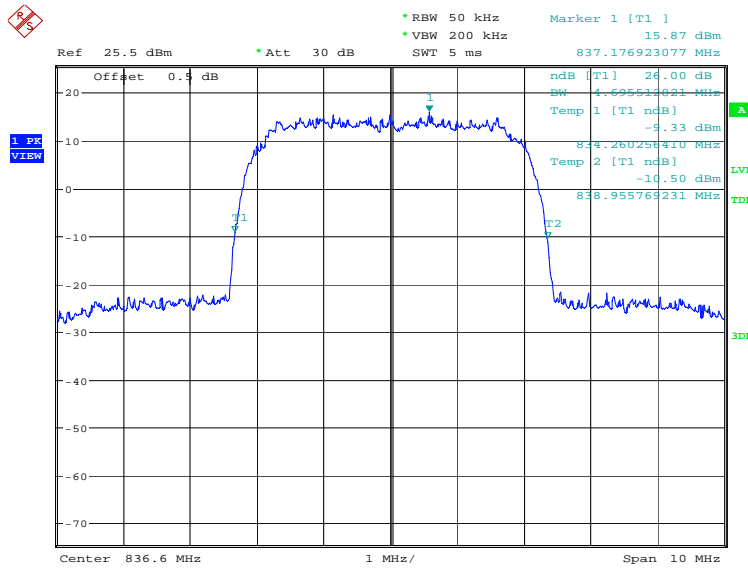

Date: 2.JUN.2022 13:29:32

### Channel 4233-Emission Bandwidth (-26dBc BW)

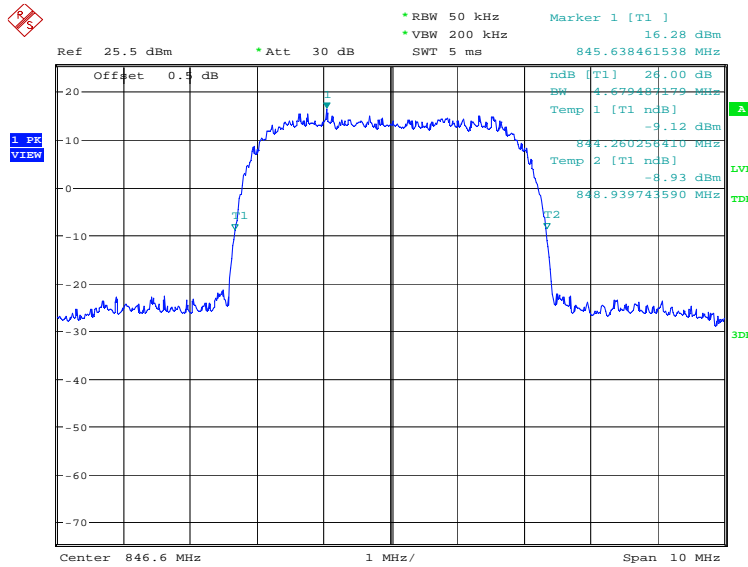


Date: 2.JUN.2022 13:29:58

### WCDMA Band V-16QAM (-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc)(kHz)
826.40	4663.46
836.60	4647.44
846.60	4695.51

### WCDMA Band V (-26dBc)


#### Channel 4132-Emission Bandwidth (-26dBc BW)

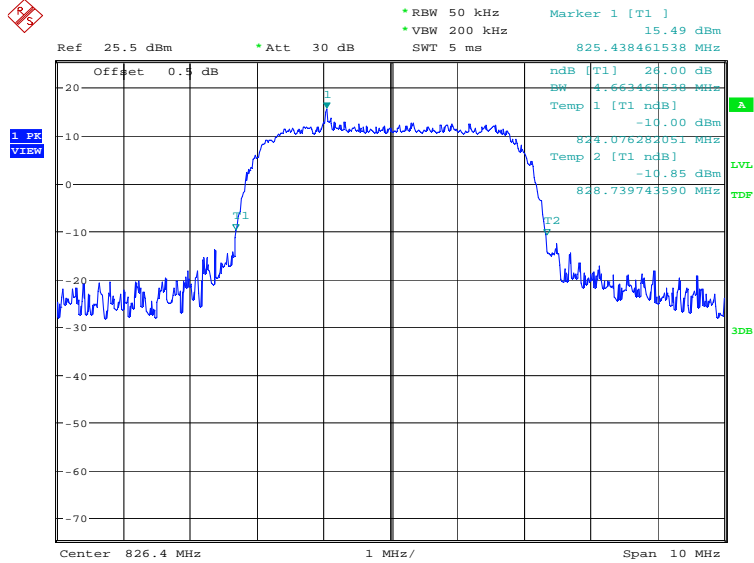

Date: 2.JUN.2022 14:23:59




### Channel 4183-Emission Bandwidth (-26dBc BW)

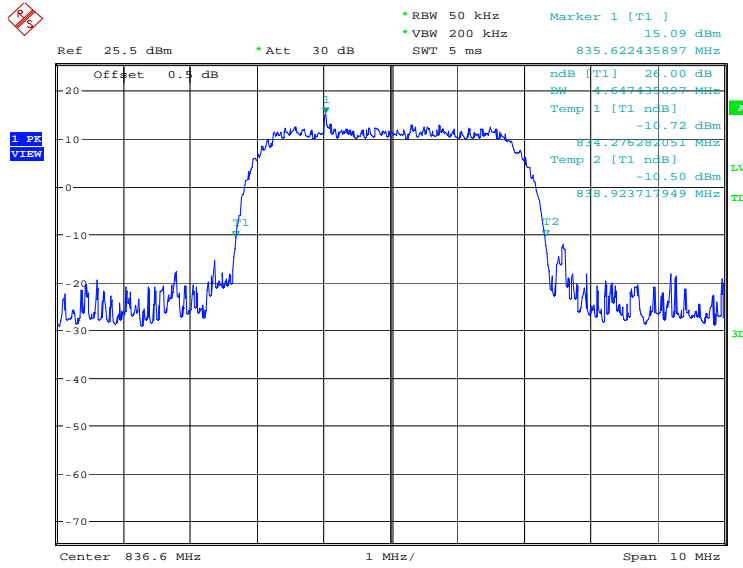

Date: 2.JUN.2022 14:24:26

### Channel 4233-Emission Bandwidth (-26dBc BW)

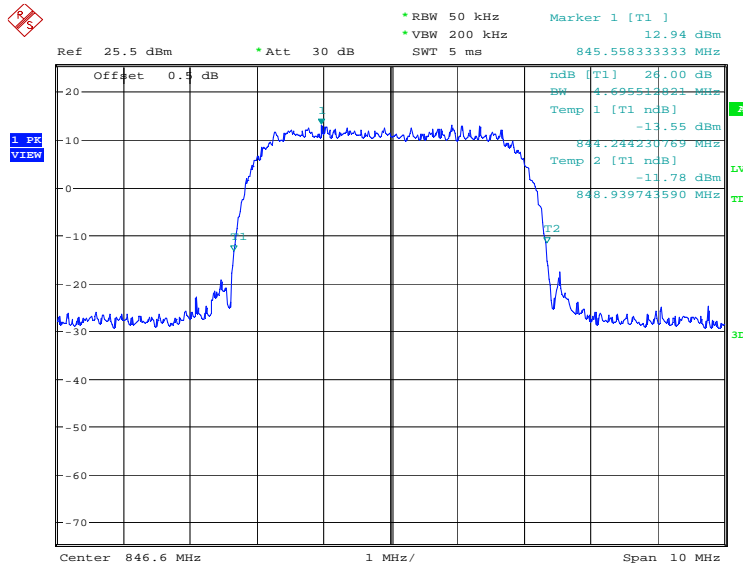


Date: 2.JUN.2022 14:24:53

### WCDMA Band IV-QPSK (-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc)(kHz)
1712.4	4695.51
1732.4	4711.54
1752.6	4695.51


### WCDMA Band IV (-26dBc)

#### Channel 1312-Emission Bandwidth (-26dBc BW)

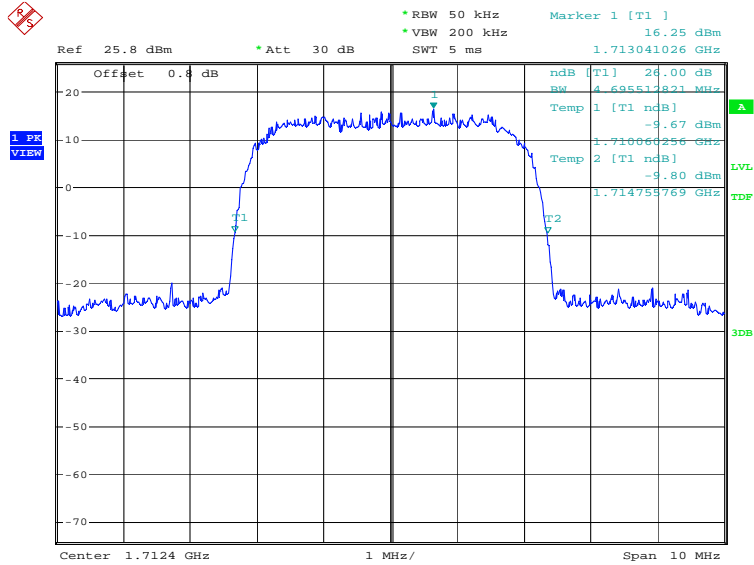


Date: 2.JUN.2022 13:27:10

### Channel 1412-Emission Bandwidth (-26dBc BW)

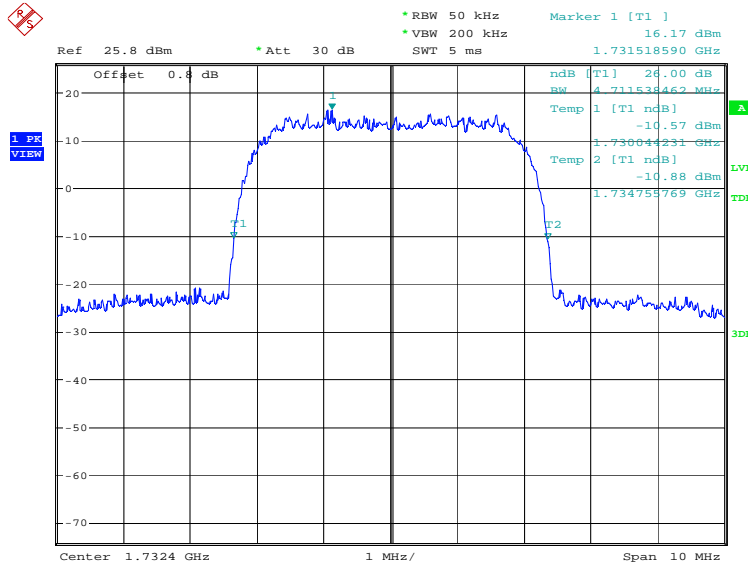

Date: 2.JUN.2022 13:27:36

### Channel 1513-Emission Bandwidth (-26dBc BW)

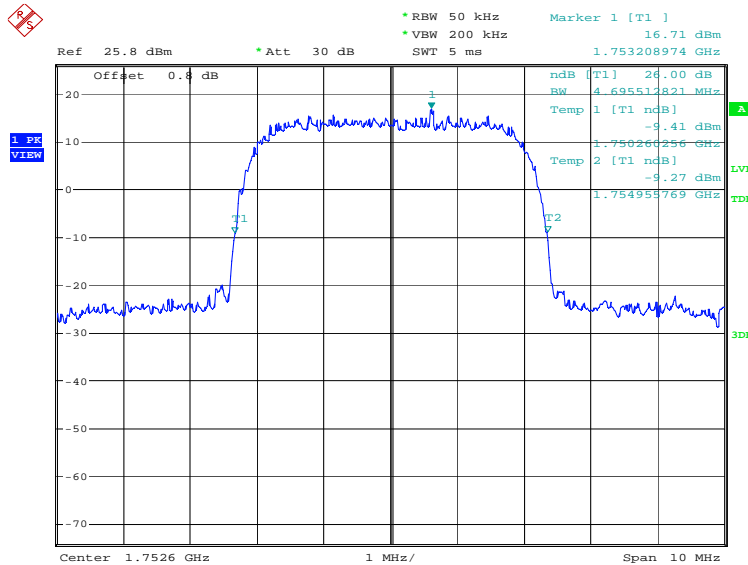


Date: 2.JUN.2022 13:28:02

**WCDMA Band IV-16QAM (-26dBc)**

Frequency (MHz)	Emission Bandwidth (-26dBc)(kHz)
1712.4	4647.44
1732.4	4679.49
1752.6	4631.41


**WCDMA Band IV (-26dBc)**

**Channel 1312-Emission Bandwidth (-26dBc BW)**

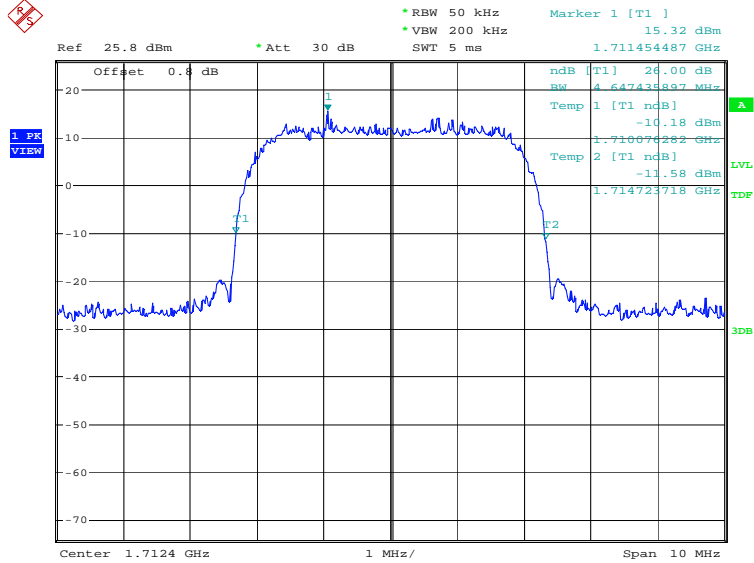


Date: 2.JUN.2022 14:21:45

### Channel 1412-Emission Bandwidth (-26dBc BW)

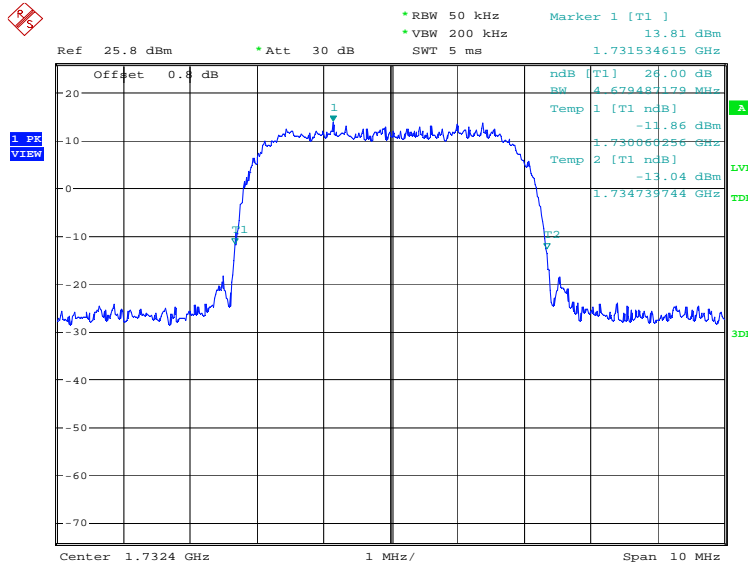

Date: 2.JUN.2022 14:22:11

### Channel 1513-Emission Bandwidth (-26dBc BW)

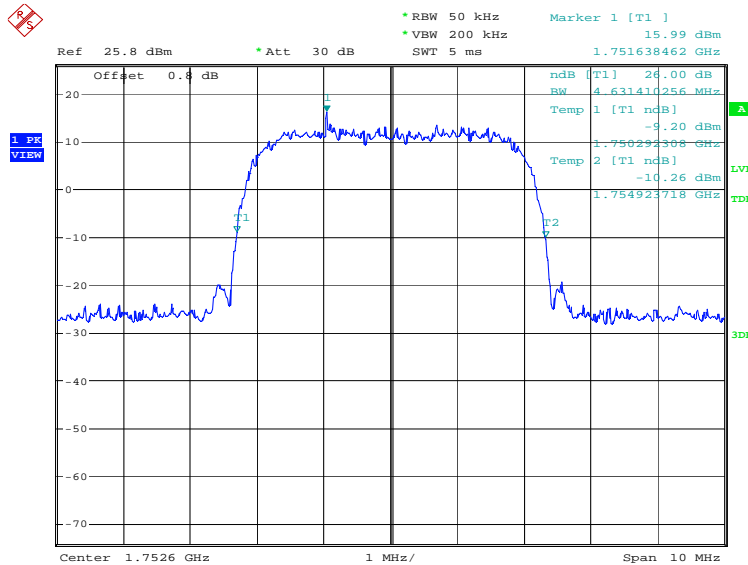

Date: 2.JUN.2022 14:22:38

## **A.6 Band Edge Compliance**

### **A.6.1 Measurement limit**


Part 22.917 , Part 24.238 and Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to KDB 971168, a relaxation of the reference bandwidth is often provided for measurements within a specified frequency range at the edge of the authorized frequency block/band. This is often implemented by permitting the use of a narrower RBW (typically limited to a minimum RBW of 1% of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth.

### A.6.2 Measurement result


#### WCDMA Band II-QPSK

#### Channel 9262

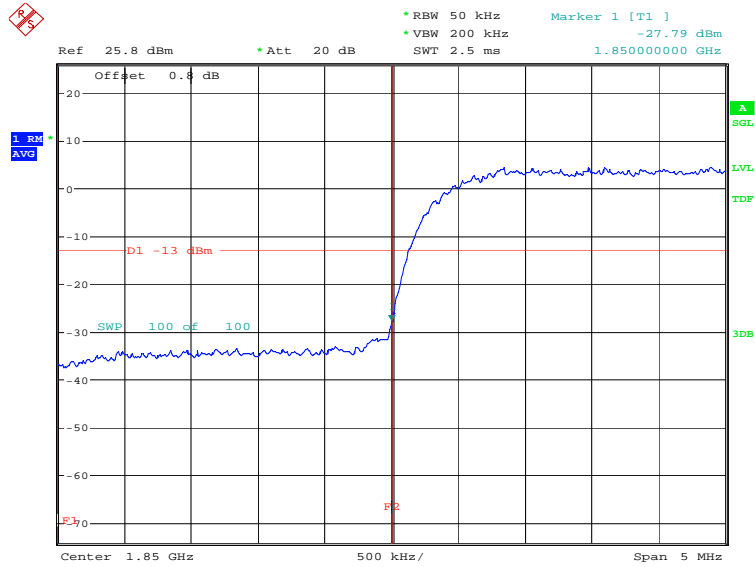


Date: 2.JUN.2022 13:31:04

#### Channel 9538

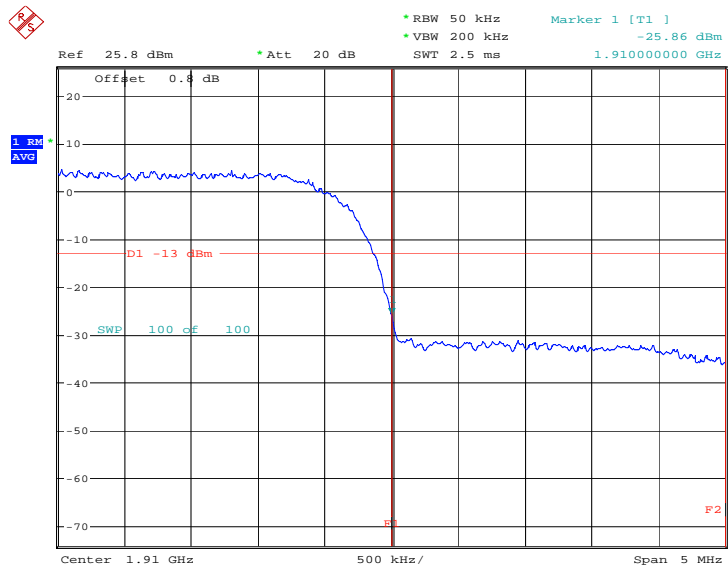


Date: 2.JUN.2022 13:32:11

### WCDMA Band V-QPSK Channel 4132

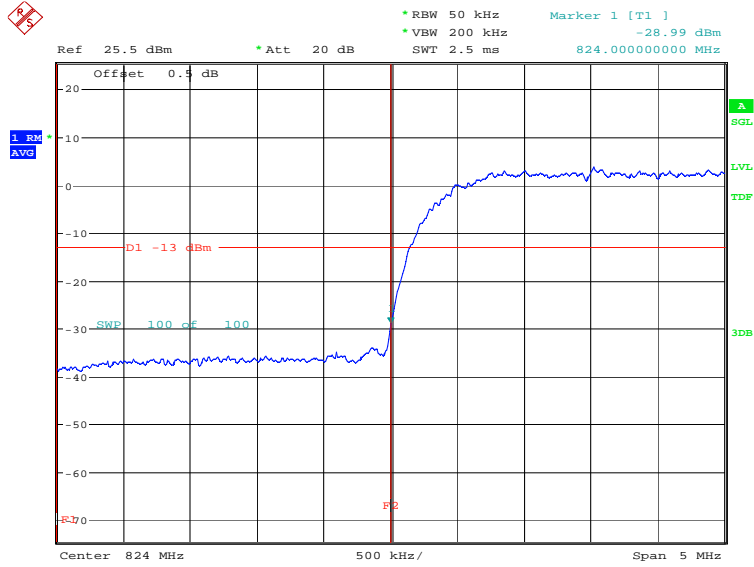

Date: 2.JUN.2022 13:36:46


### Channel 4233

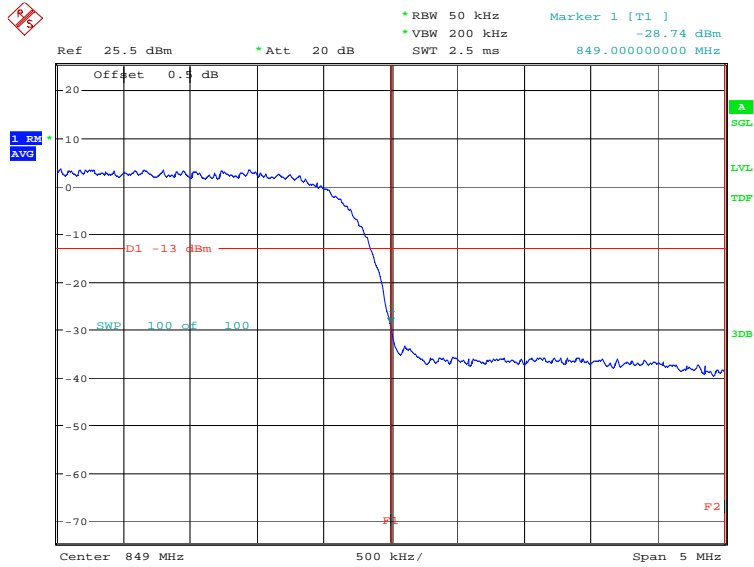

Date: 2.JUN.2022 13:37:53




### WCDMA Band IV-QPSK Channel 1312

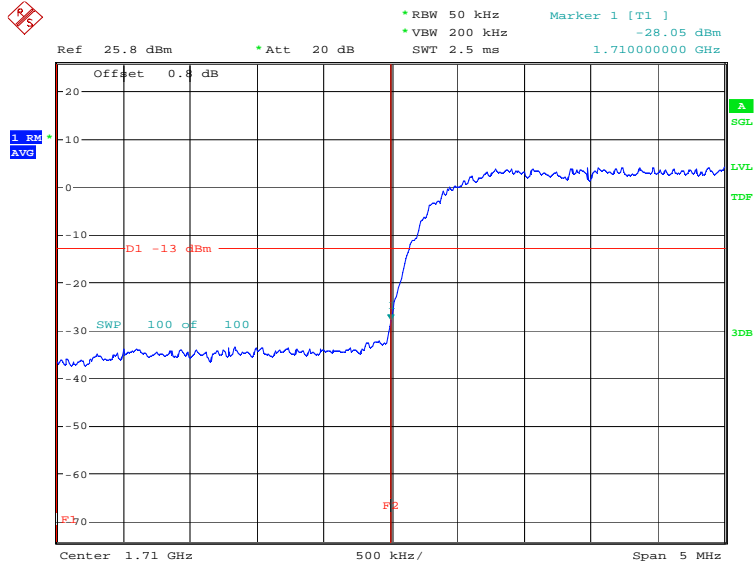

Date: 2.JUN.2022 13:33:55

### Channel 1513

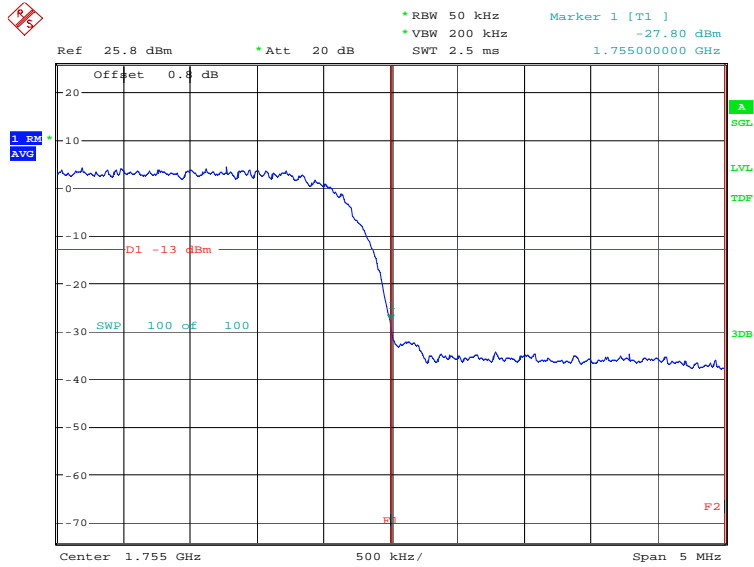

Date: 2.JUN.2022 13:35:02

## **A.7 Conducted Spurious Emission**

### **A.7.1 Measurement Method**

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. In measuring unwanted emissions, the spectrum shall be investigated from 30 MHz or the lowest radio frequency signal generated in the equipment, whichever is lower, without going below 9 kHz, up to at least the frequency given below:
  - (a) If the equipment operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
  - (b) If the equipment operates at or above 10 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.
3. The number of sweep points of spectrum analyzer is greater than  $2 \times \text{span}/\text{RBW}$ .

### **A. 7.2 Measurement Limit**


Part 22.917 , Part 24.238 and Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

### A.7.3 Measurement result

#### WCDMA Band II

#### Channel 9262: 30MHz – 19.10GHz


NOTE: peak above the limit line is the carrier frequency.

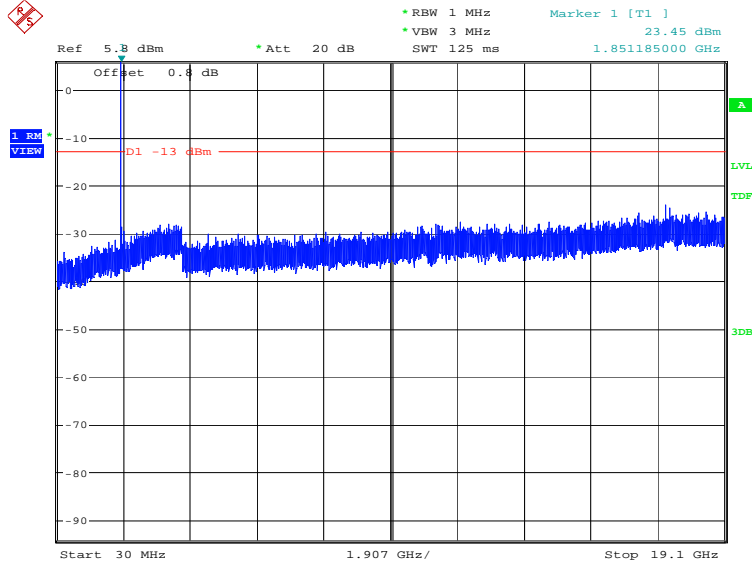

Date: 2.JUN.2022 13:40:01

#### Channel 9400: 30MHz – 19.10GHz


NOTE: peak above the limit line is the carrier frequency.

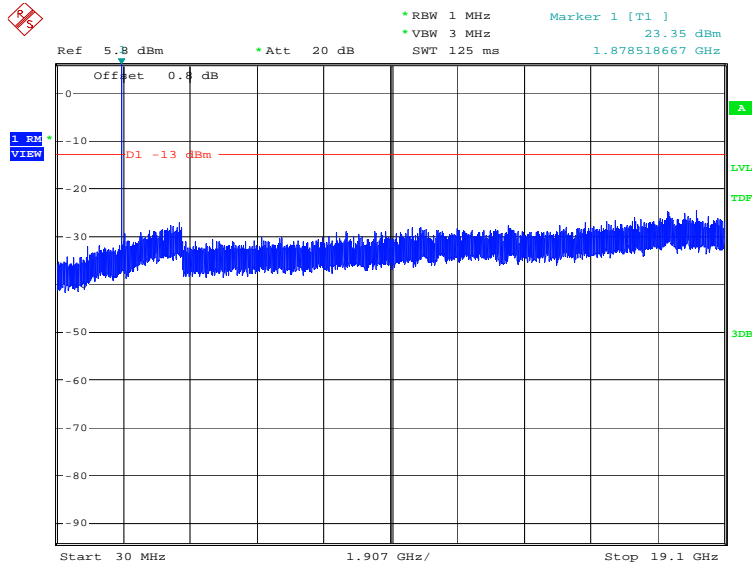

Date: 2.JUN.2022 13:40:30

### Channel 9538: 30MHz –19.10GHz

NOTE: peak above the limit line is the carrier frequency.

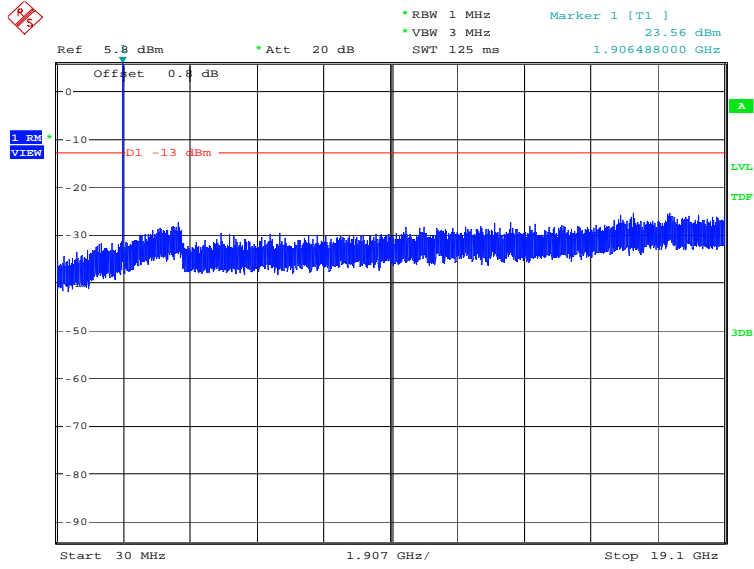


Date: 2.JUN.2022 13:40:59

**WCDMA Band V**

**Channel 4132: 30MHz –8.49GHz**


**NOTE: peak above the limit line is the carrier frequency.**

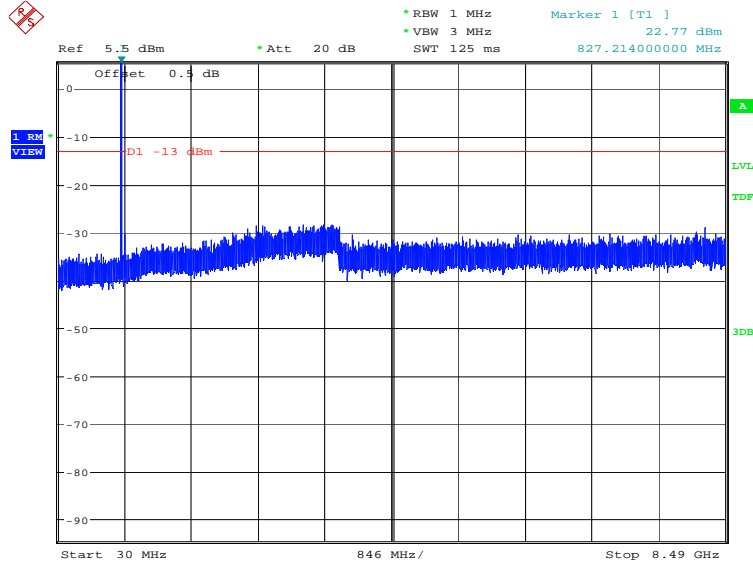

Date: 2.JUN.2022 13:44:11

**Channel 4183: 30MHz –8.49GHz**


**NOTE: peak above the limit line is the carrier frequency.**

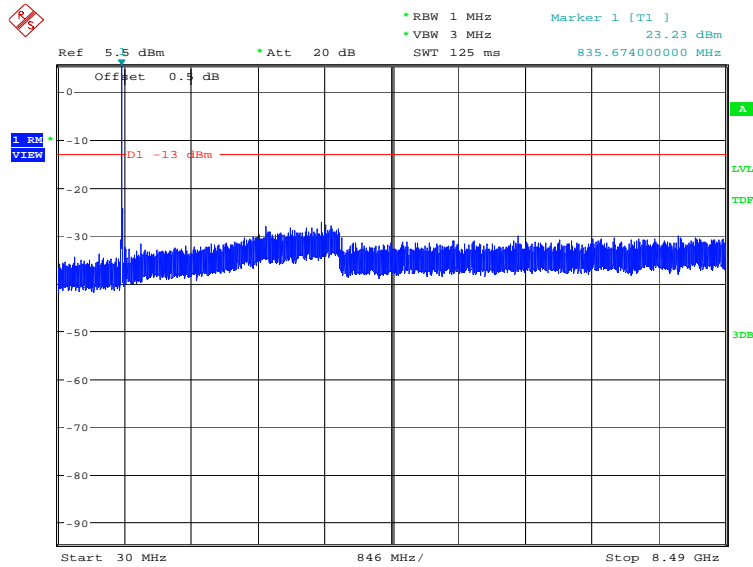

Date: 2.JUN.2022 13:44:40

### Channel 4233: 30MHz –8.49GHz


NOTE: peak above the limit line is the carrier frequency.

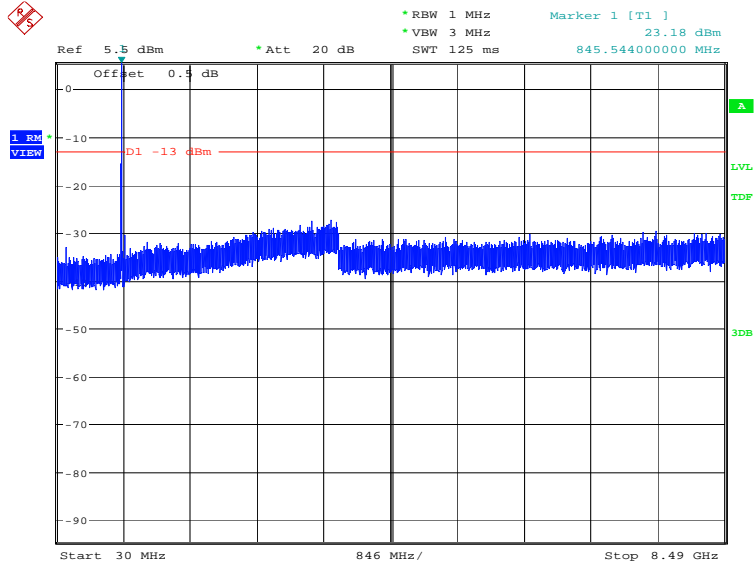

Date: 2.JUN.2022 13:45:09

**WCDMA Band IV**  
**Channel 1312: 30MHz –17.55GHz**


**NOTE: peak above the limit line is the carrier frequency.**

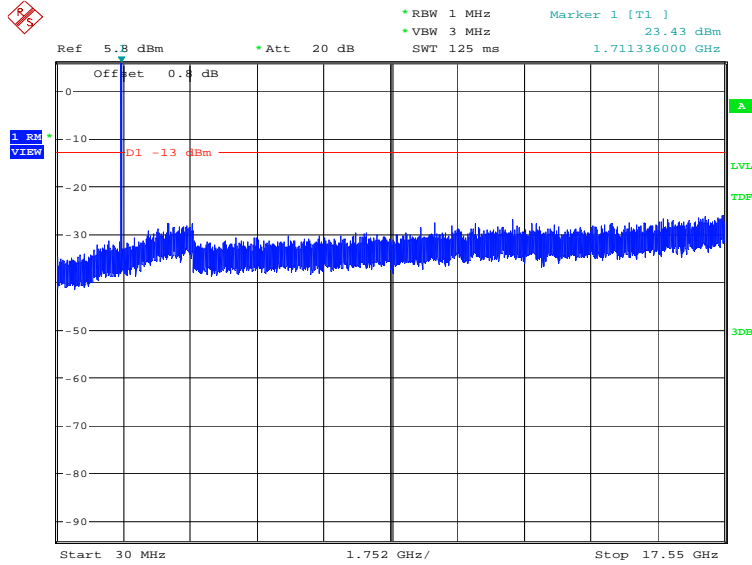

Date: 2.JUN.2022 13:42:06

**WCDMA Band IV**  
**Channel 1412: 30MHz –17.55GHz**

**NOTE: peak above the limit line is the carrier frequency.**

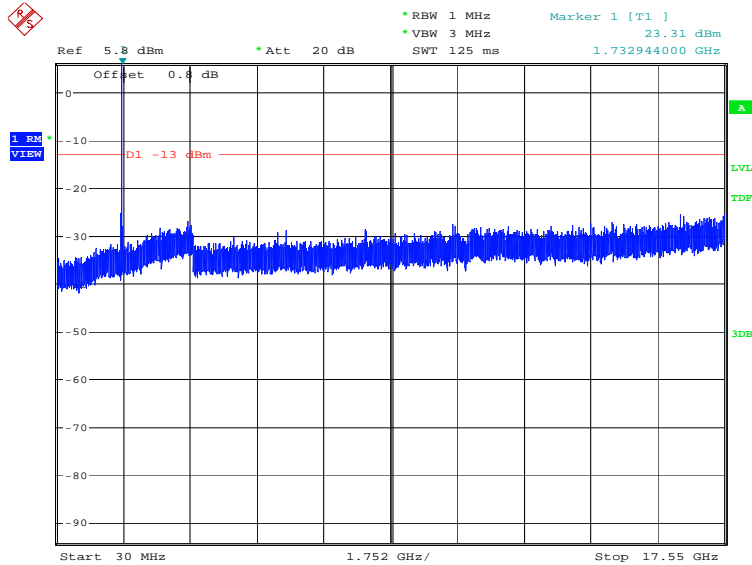


Date: 2.JUN.2022 13:42:35



WCDMA Band IV

Channel 1513: 30MHz -17.55GHz

NOTE: peak above the limit line is the carrier frequency.

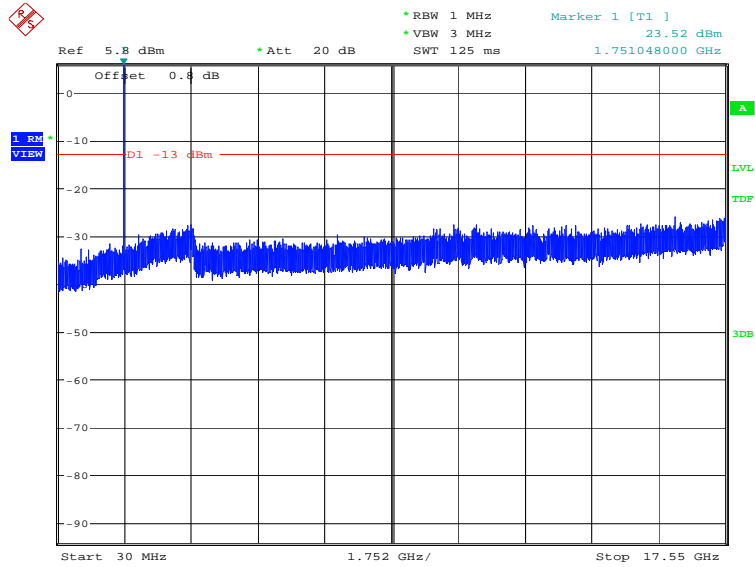

Date: 2.JUN.2022 13:43:04



## **A.8 Peak-to-Average Power Ratio**

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- b) Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;
- d) Record the maximum PAPR level associated with a probability of 0.1%.

### **WCDMA Band II-QPSK**

#### **Measurement result**

CH	Frequency (MHz)	PAPR (dB)
9400	1880.0	3.85

### **WCDMA Band II-16QAM**

#### **Measurement result**

CH	Frequency (MHz)	PAPR (dB)
9400	1880.0	5.22

### **WCDMA Band IV-QPSK**

#### **Measurement result**

CH	Frequency (MHz)	PAPR (dB)
1412	1732.4	3.72

### **WCDMA Band IV-16QAM**

#### **Measurement result**

CH	Frequency (MHz)	PAPR (dB)
1412	1732.4	5.03

## Annex B: Accreditation Certificate

<p>United States Department of Commerce National Institute of Standards and Technology</p>  	
<hr/> <b>Certificate of Accreditation to ISO/IEC 17025:2017</b> <hr/>	
NVLAP LAB CODE: 600118-0	
<b>Telecommunication Technology Labs, CAICT</b> Beijing China	
<i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i>	
<b>Electromagnetic Compatibility &amp; Telecommunications</b>	
<i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i>	
<hr/> 2021-09-29 through 2022-09-30 <i>Effective Dates</i>	 <hr/>  <i>For the National Voluntary Laboratory Accreditation Program</i>

\*\*\*END OF REPORT\*\*\*