

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.891$  S/m;  $\epsilon_r = 42.262$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.46, 9.46, 9.46) @ 836.6 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Left Head/GSM 850 Mid/Area Scan (101x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.387 W/kg


**Left Head/GSM 850 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.589 V/m; Power Drift = -0.036 dB

Peak SAR (extrapolated) = 0.456 W/kg

**SAR(1 g) = 0.362 W/kg; SAR(10 g) = 0.268 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.378 W/kg

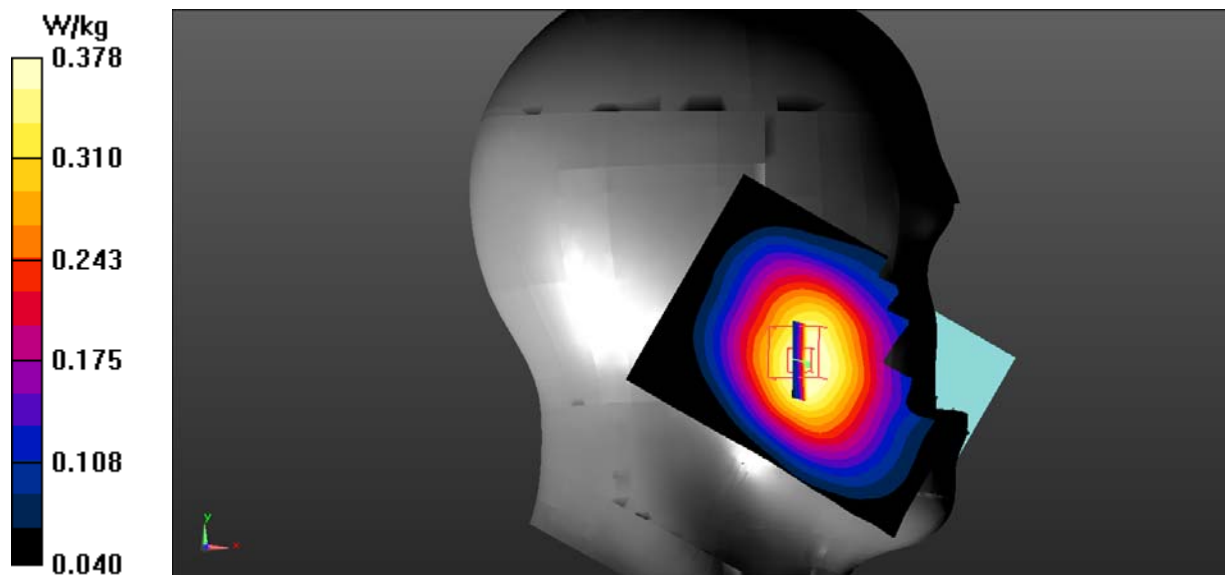

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8  
Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.891$  S/m;  $\epsilon_r = 42.262$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.46, 9.46, 9.46) @ 836.6 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Left Head/GSM 850 Tilt Mid 2/Area Scan (101x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.293 W/kg


**Left Head/GSM 850 Tilt Mid 2/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.288 V/m; Power Drift = 0.169 dB

Peak SAR (extrapolated) = 0.331 W/kg

**SAR(1 g) = 0.275 W/kg; SAR(10 g) = 0.209 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.283 W/kg

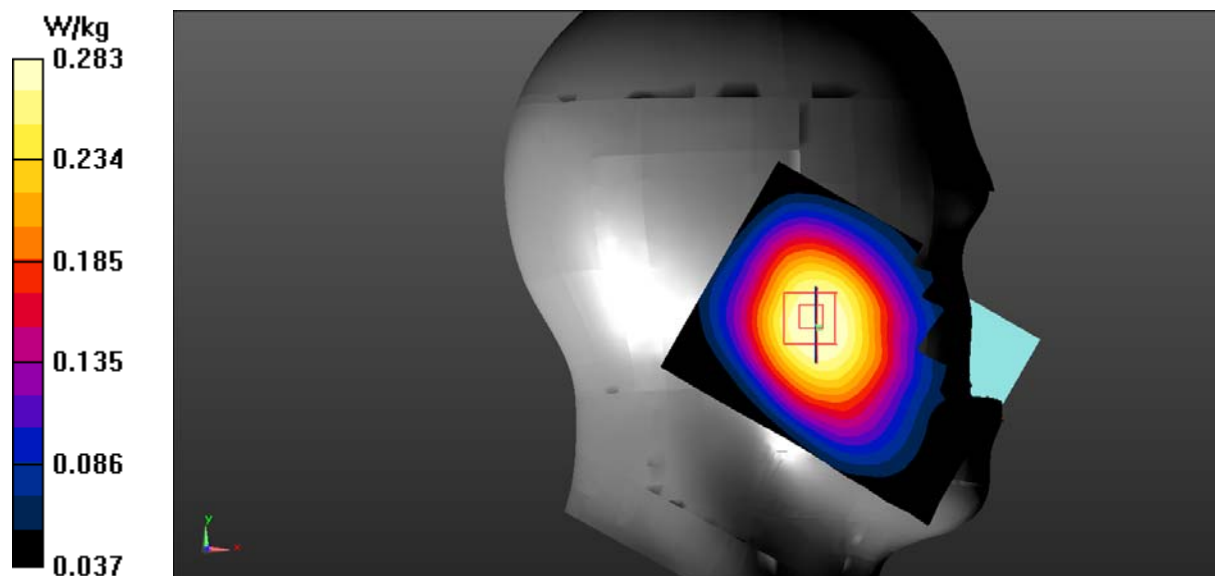

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.891$  S/m;  $\epsilon_r = 42.262$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.46, 9.46, 9.46) @ 836.6 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Right Head Cheek/GSM 850 Mid/Area Scan (101x131x1):** Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 0.403 W/kg


**Right Head Cheek/GSM 850 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 7.561 V/m; Power Drift = 0.027 dB

Peak SAR (extrapolated) = 0.503 W/kg

**SAR(1 g) = 0.387 W/kg; SAR(10 g) = 0.285 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.404 W/kg

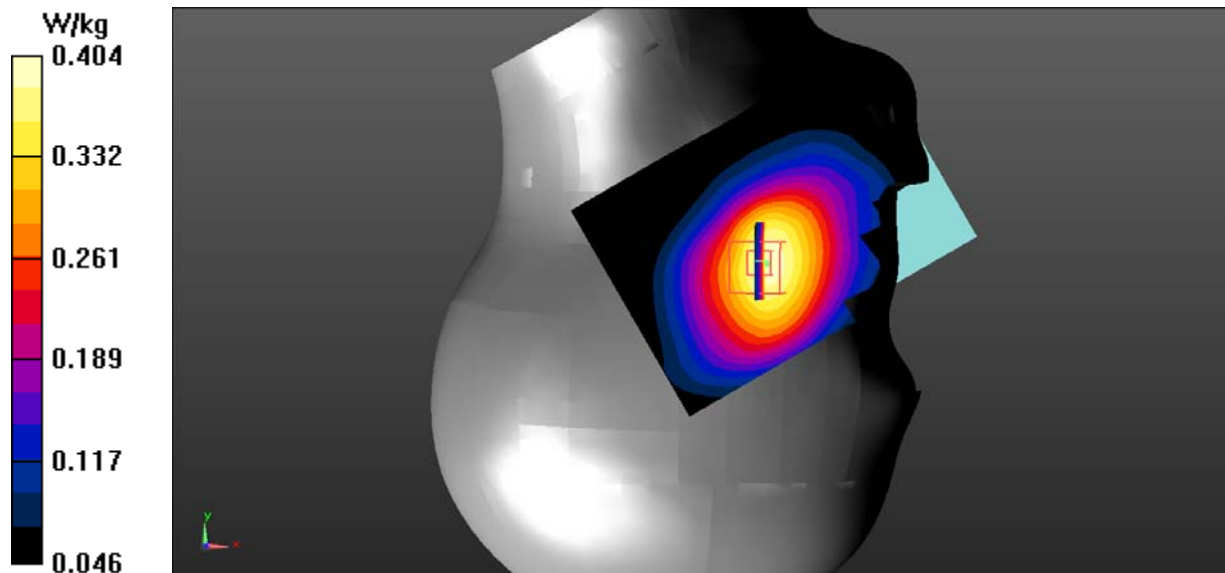

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.891$  S/m;  $\epsilon_r = 42.262$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.46, 9.46, 9.46) @ 836.6 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Right Head Cheek/GSM 850 Tilt Mid/Area Scan (101x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.311 W/kg


**Right Head Cheek/GSM 850 Tilt Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.99 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 0.365 W/kg

**SAR(1 g) = 0.302 W/kg; SAR(10 g) = 0.230 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.311 W/kg

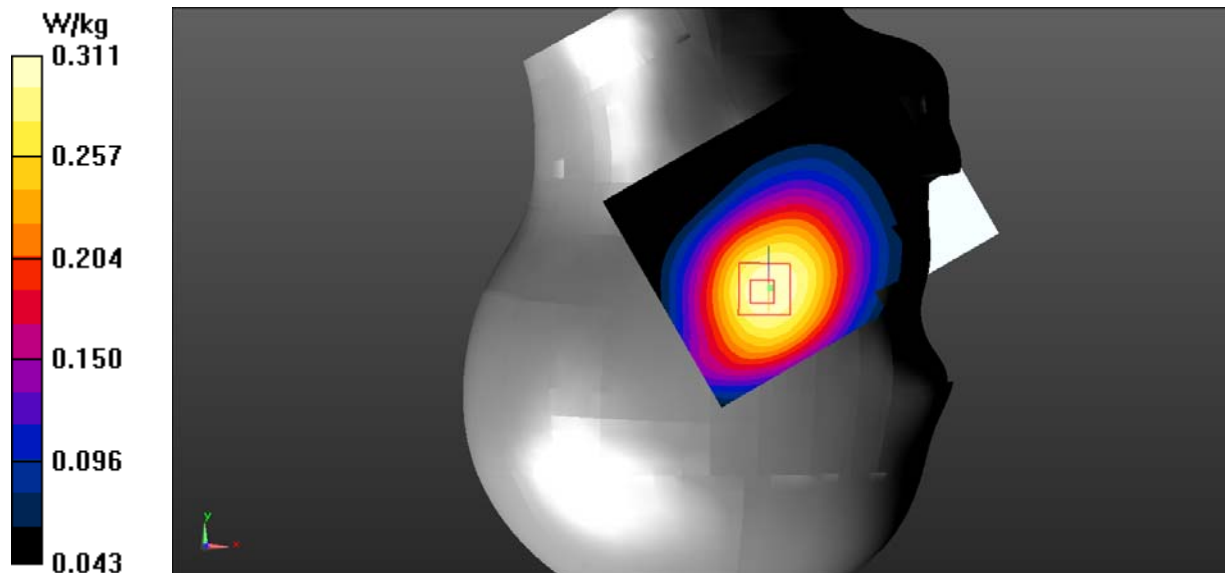

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.961$  S/m;  $\epsilon_r = 56.879$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.54, 9.54, 9.54) @ 836.6 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Worn Back/GSM 850 Mid/Area Scan (101x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.442 W/kg


**Body Worn Back/GSM 850 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.61 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.551 W/kg

**SAR(1 g) = 0.424 W/kg; SAR(10 g) = 0.319 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.444 W/kg

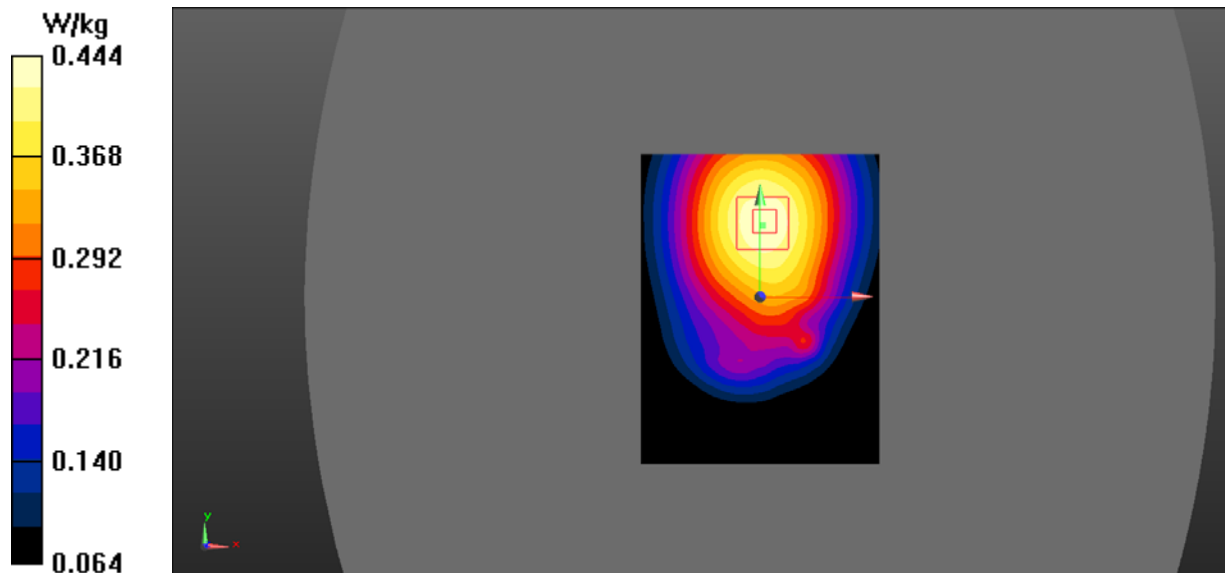

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic GPRS-3 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.67  
Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.961$  S/m;  $\epsilon_r = 56.879$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.54, 9.54, 9.54) @ 836.6 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Back/GSM 850 Mid/Area Scan (101x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.406 W/kg


**Body Back/GSM 850 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.07 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.501 W/kg

**SAR(1 g) = 0.387 W/kg; SAR(10 g) = 0.291 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.405 W/kg

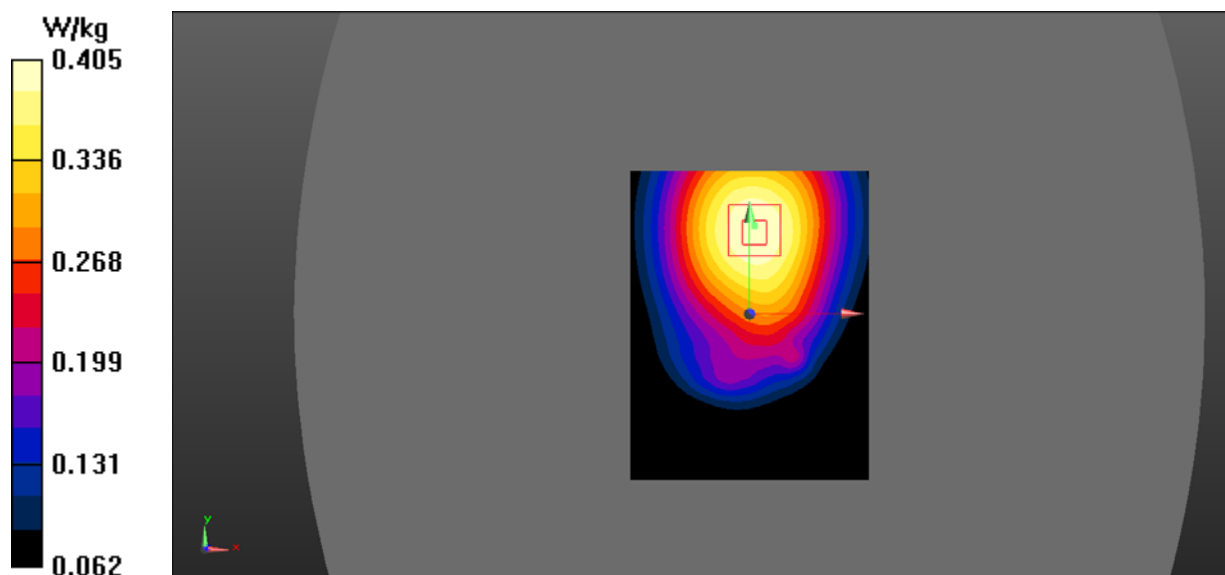

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic GPRS-3 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.67  
Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.961$  S/m;  $\epsilon_r = 56.879$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.54, 9.54, 9.54) @ 836.6 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Right/Body right 850 Mid/Area Scan (101x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.345 W/kg


**Body Right/Body right 850 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.54 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.473 W/kg

**SAR(1 g) = 0.325 W/kg; SAR(10 g) = 0.227 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.344 W/kg

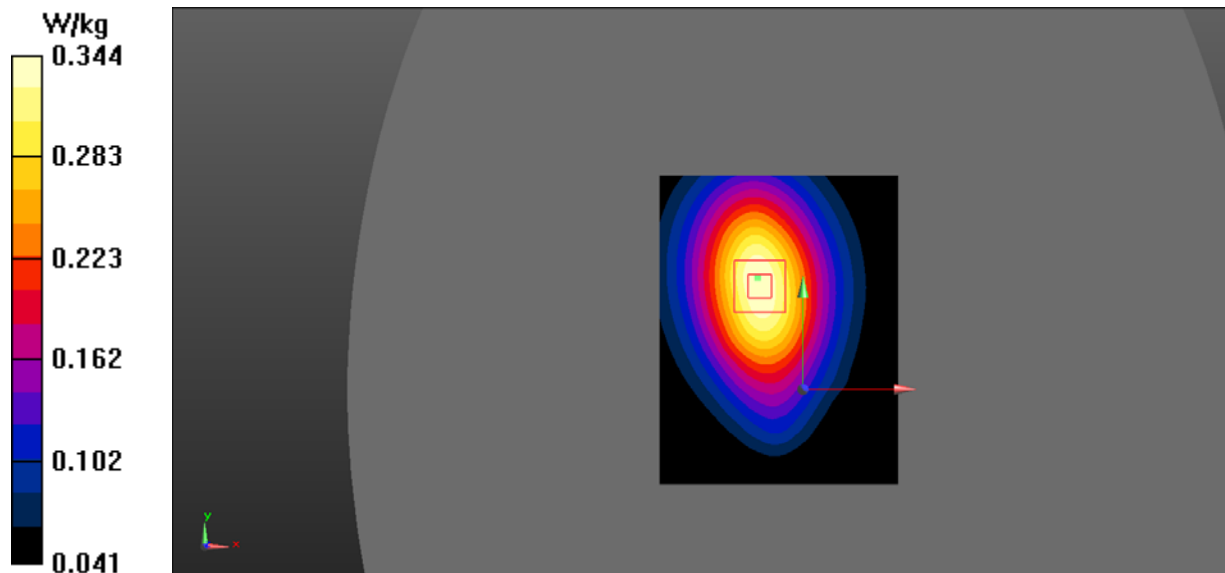

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic GPRS-3 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.67  
Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.961$  S/m;  $\epsilon_r = 56.879$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.54, 9.54, 9.54) @ 836.6 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Bottom/GSM 850 Mid/Area Scan (101x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.125 W/kg


**Body Bottom/GSM 850 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.22 V/m; Power Drift = -0.137 dB

Peak SAR (extrapolated) = 0.181 W/kg

**SAR(1 g) = 0.107 W/kg; SAR(10 g) = 0.068 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.114 W/kg

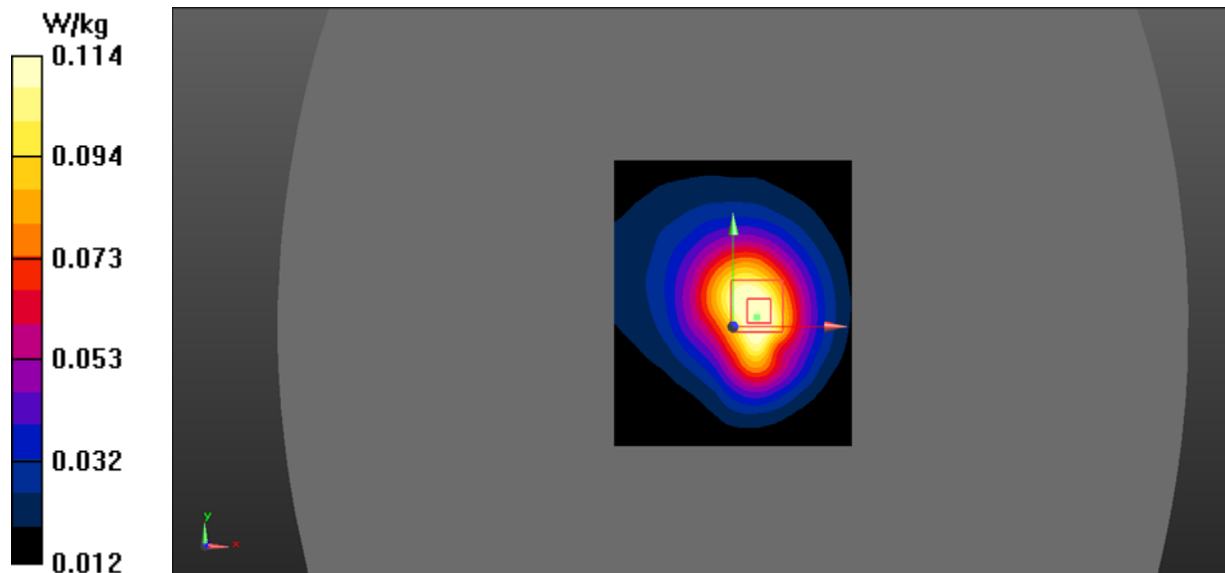



**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8  
Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.383$  S/m;  $\epsilon_r = 40.493$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.91, 7.91, 7.91) @ 1880 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Left Head/PCS 1900 Mid/Area Scan (101x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.178 W/kg


**Left Head/PCS 1900 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.121 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 0.247 W/kg

**SAR(1 g) = 0.160 W/kg; SAR(10 g) = 0.101 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.173 W/kg

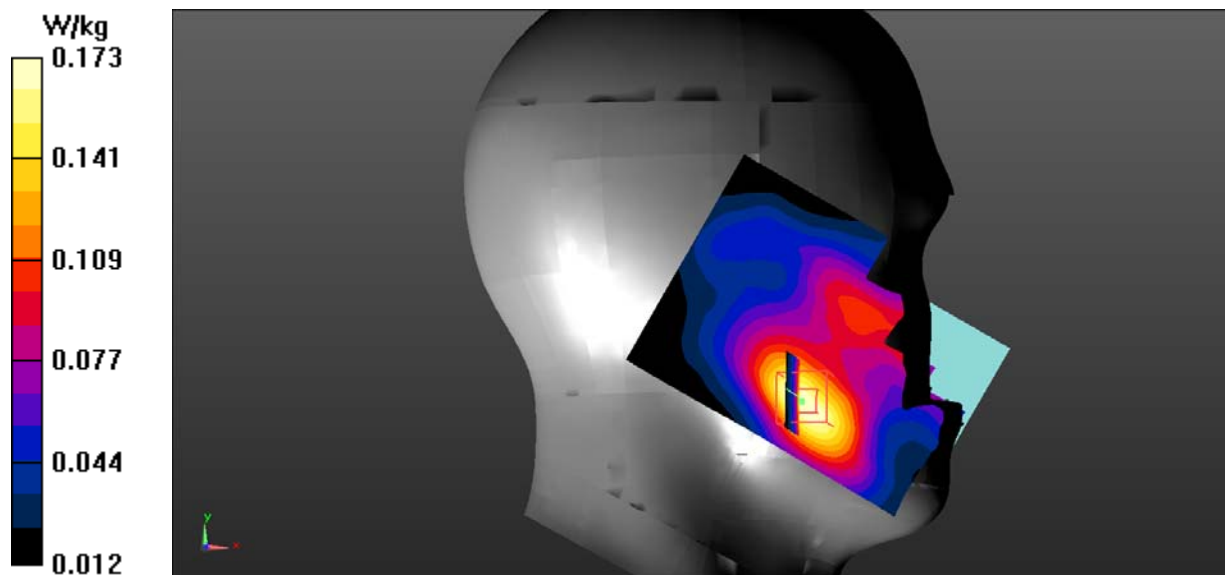

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8  
Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.383$  S/m;  $\epsilon_r = 40.493$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.91, 7.91, 7.91) @ 1880 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Left Head/PCS 1900 Tilt Mid/Area Scan (101x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0696 W/kg


**Left Head/PCS 1900 Tilt Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.956 V/m; Power Drift = -0.152 dB

Peak SAR (extrapolated) = 0.0900 W/kg

**SAR(1 g) = 0.062 W/kg; SAR(10 g) = 0.043 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.0665 W/kg

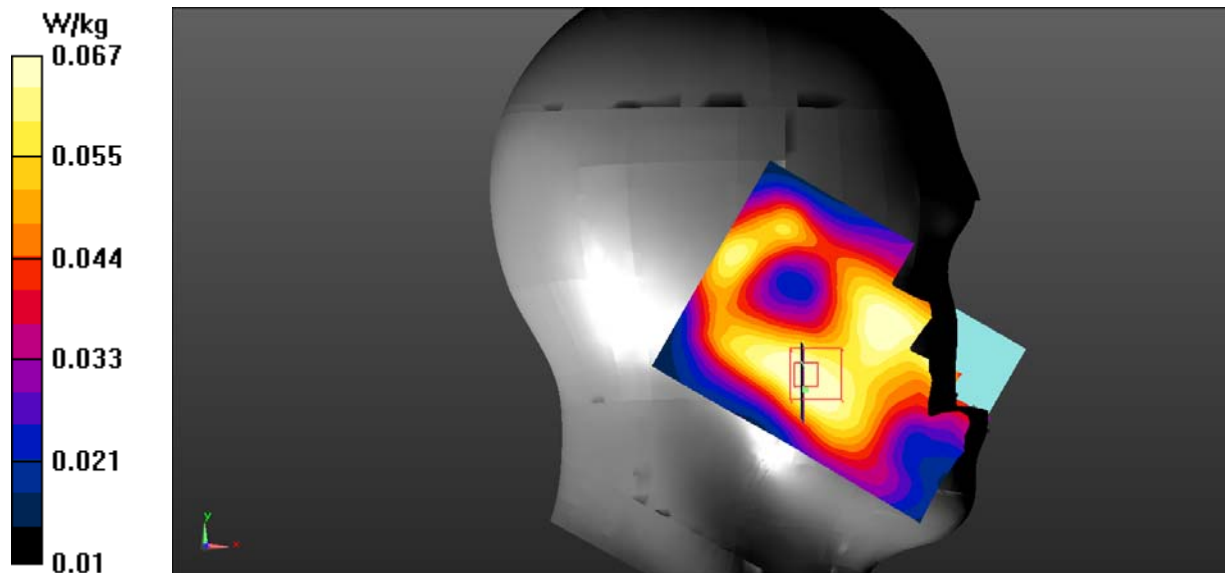

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8  
Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.383$  S/m;  $\epsilon_r = 40.493$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.91, 7.91, 7.91) @ 1880 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Right Head Cheek/PCS 1900 Mid/Area Scan (101x131x1):** Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 0.242 W/kg


**Right Head Cheek/PCS 1900 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 4.213 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 0.359 W/kg

**SAR(1 g) = 0.224 W/kg; SAR(10 g) = 0.136 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.243 W/kg

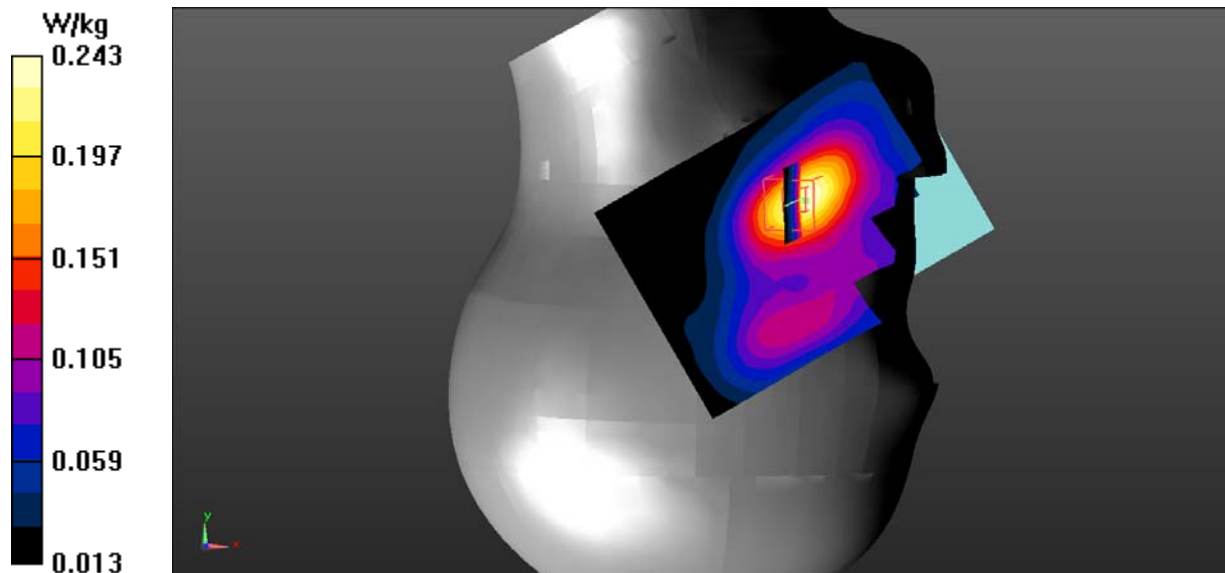

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8  
Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.383$  S/m;  $\epsilon_r = 40.493$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.91, 7.91, 7.91) @ 1880 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Right Head Cheek/PCS 1900 Tilt Mid/Area Scan (101x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.104 W/kg


**Right Head Cheek/PCS 1900 Tilt Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.947 V/m; Power Drift = 0.21 dB

Peak SAR (extrapolated) = 0.143 W/kg

**SAR(1 g) = 0.092 W/kg; SAR(10 g) = 0.060 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.0958 W/kg

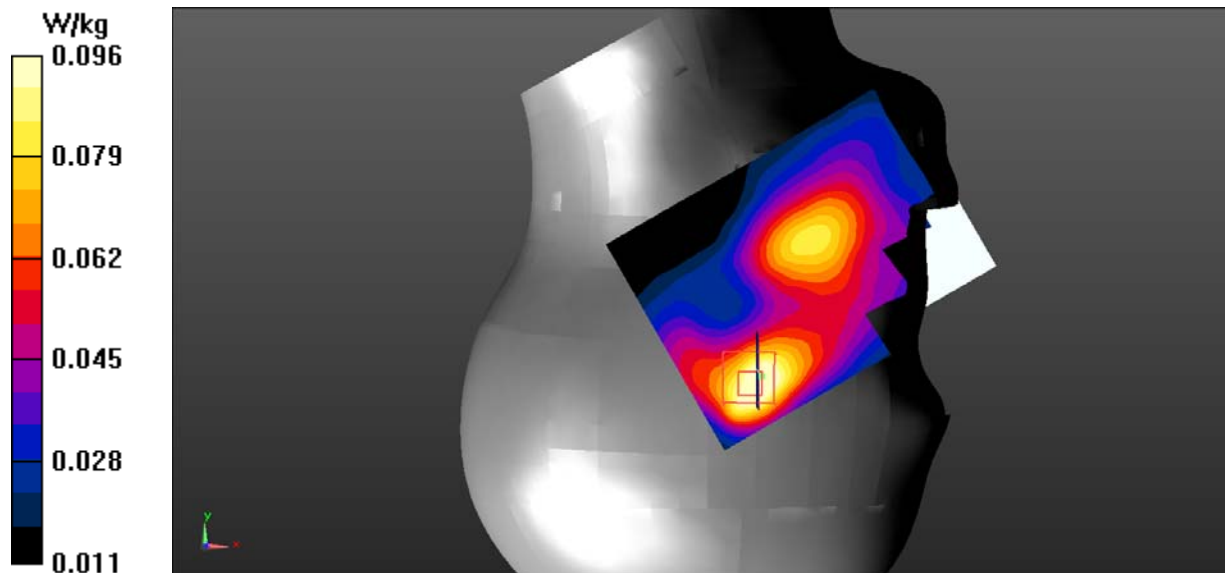

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8  
Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.493$  S/m;  $\epsilon_r = 54.141$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.48, 7.48, 7.48) @ 1880 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Back/Body worn 1900 Mid/Area Scan (101x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.486 W/kg


**Body Back/Body worn 1900 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.79 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.752 W/kg

**SAR(1 g) = 0.438 W/kg; SAR(10 g) = 0.250 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.484 W/kg

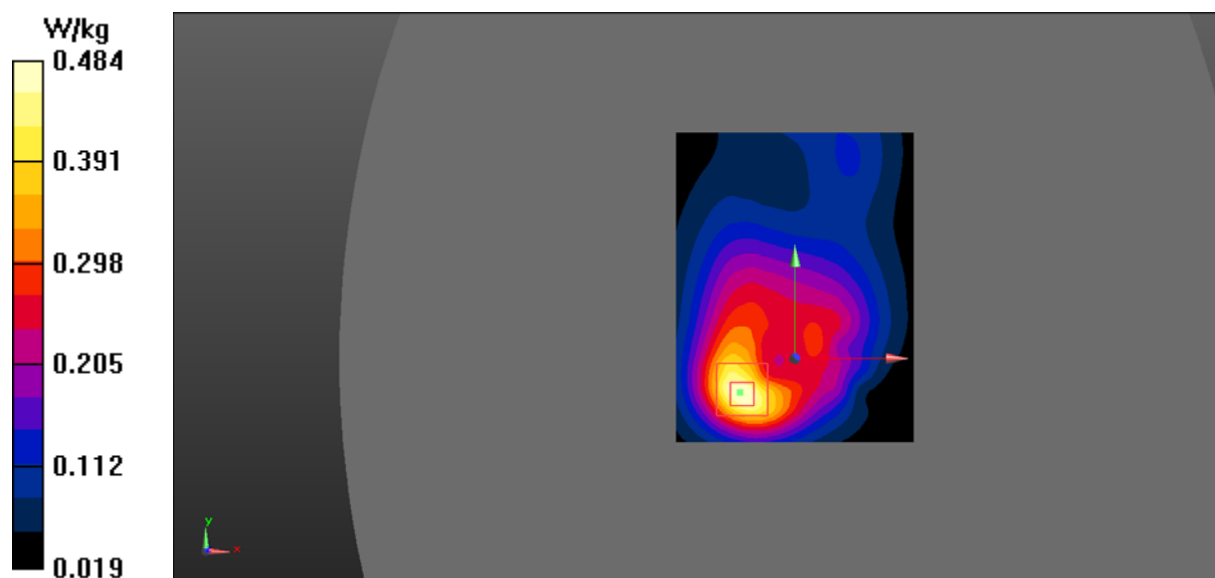

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic GPRS-3 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2.67  
Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.493$  S/m;  $\epsilon_r = 54.141$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.48, 7.48, 7.48) @ 1880 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Back/GSM 1900 Mid/Area Scan (101x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.504 W/kg


**Body Back/GSM 1900 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.96 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.788 W/kg

**SAR(1 g) = 0.455 W/kg; SAR(10 g) = 0.258 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.500 W/kg

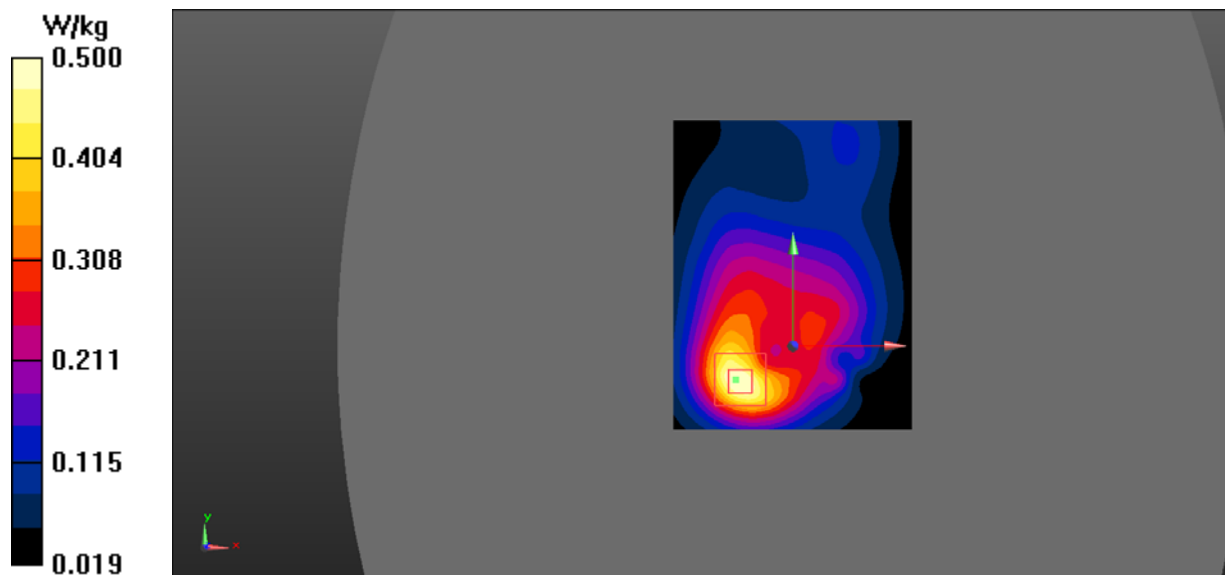

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic GPRS-3 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2.67  
Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.493$  S/m;  $\epsilon_r = 54.141$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:


- Probe: EX3DV4 - SN7522; ConvF(7.48, 7.48, 7.48) @ 1880 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Right/1900 Mid/Area Scan (101x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.179 W/kg

**Body Right/1900 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 6.814 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 0.268 W/kg

**SAR(1 g) = 0.162 W/kg; SAR(10 g) = 0.098 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.175 W/kg

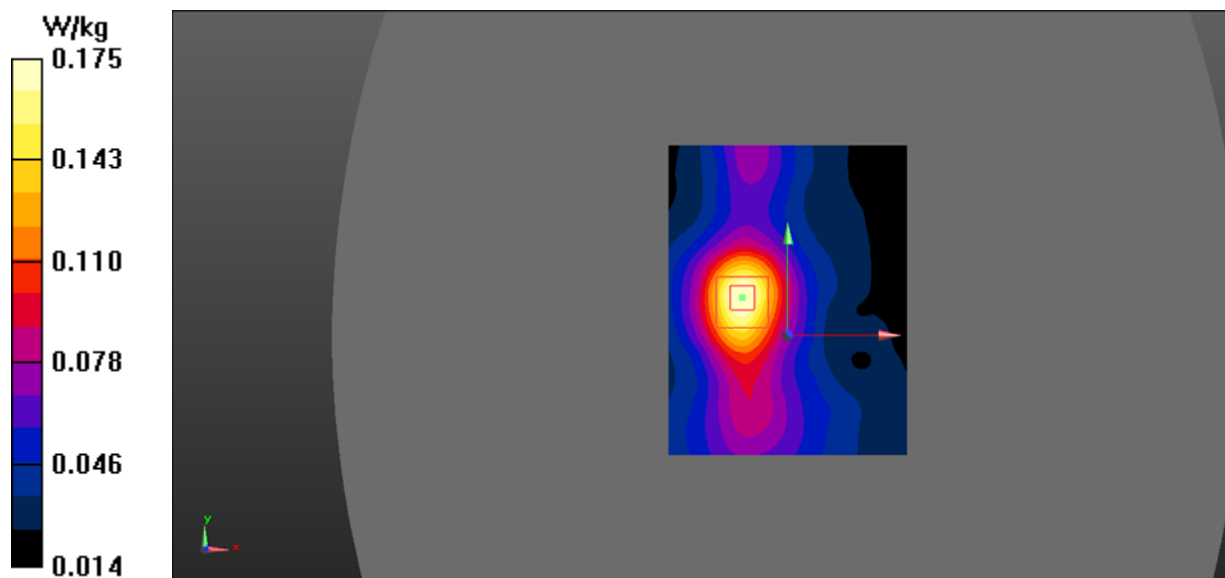

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic GPRS-3 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2.67  
Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.493$  S/m;  $\epsilon_r = 54.141$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.48, 7.48, 7.48) @ 1880 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Bottom/GSM 1900 Mid/Area Scan (101x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.410 W/kg


**Body Bottom/GSM 1900 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.32 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.582 W/kg

**SAR(1 g) = 0.354 W/kg; SAR(10 g) = 0.205 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.390 W/kg

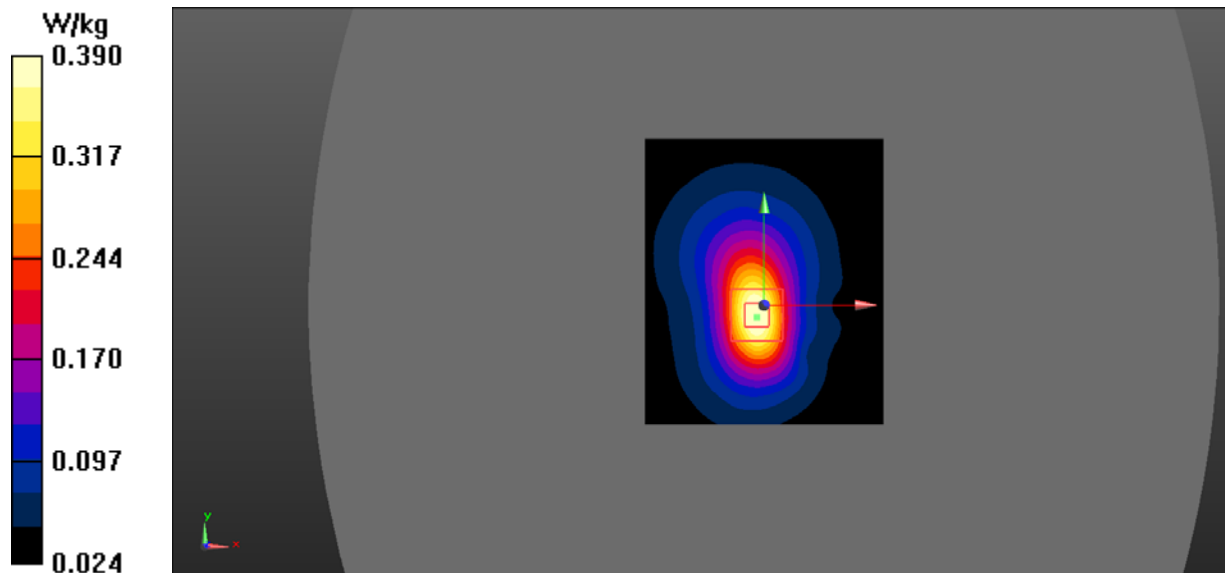



**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.383$  S/m;  $\epsilon_r = 40.493$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.91, 7.91, 7.91) @ 1880 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Left Head Cheek/WCDMA Band 2 Mid/Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.353 W/kg


**Left Head Cheek/WCDMA Band 2 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.623 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.487 W/kg

**SAR(1 g) = 0.317 W/kg; SAR(10 g) = 0.197 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.338 W/kg

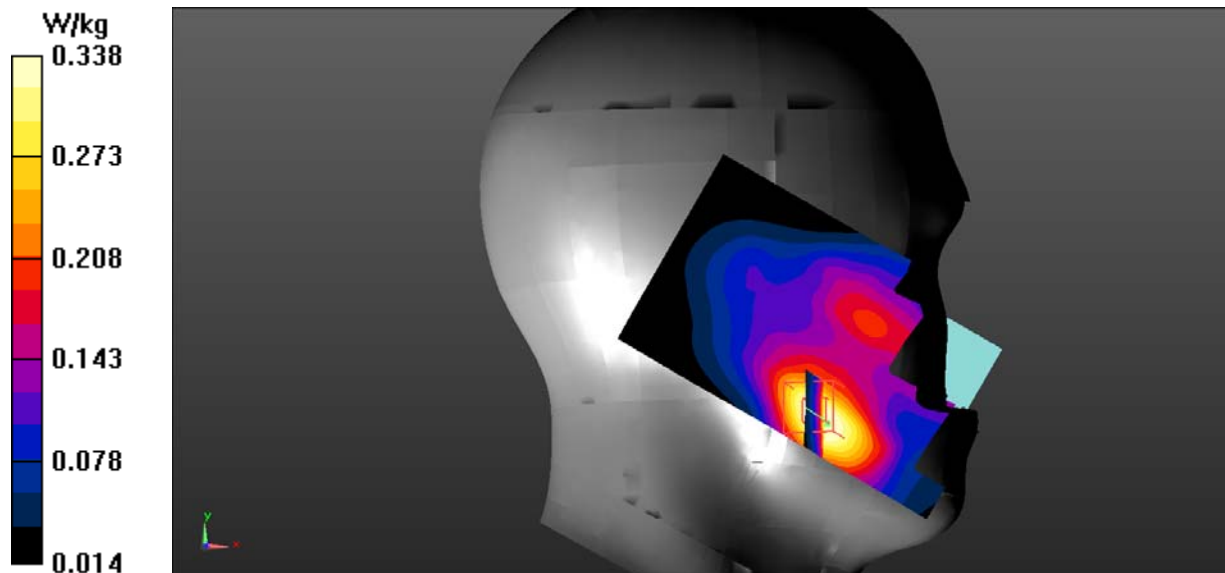

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.383$  S/m;  $\epsilon_r = 40.493$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.91, 7.91, 7.91) @ 1880 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Left Head Tilt/WCDMA Band 2 Mid/Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.180 W/kg


**Left Head Tilt/WCDMA Band 2 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.40 V/m; Power Drift = 0.21 dB

Peak SAR (extrapolated) = 0.250 W/kg

**SAR(1 g) = 0.156 W/kg; SAR(10 g) = 0.094 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.169 W/kg

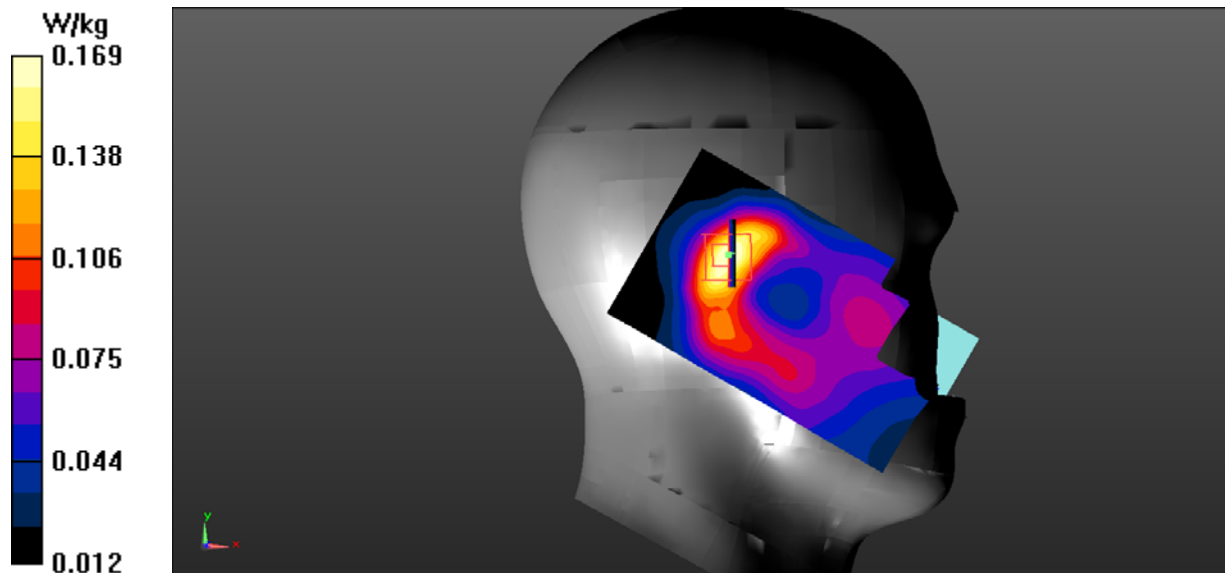

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.383$  S/m;  $\epsilon_r = 40.493$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.91, 7.91, 7.91) @ 1880 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Right Head Cheek/WCDMA Band 2 Mid/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.442 W/kg

**Right Head Cheek/WCDMA Band 2 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.814 V/m; Power Drift = 0.166 dB

Peak SAR (extrapolated) = 0.669 W/kg

**SAR(1 g) = 0.411 W/kg; SAR(10 g) = 0.244 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.451 W/kg

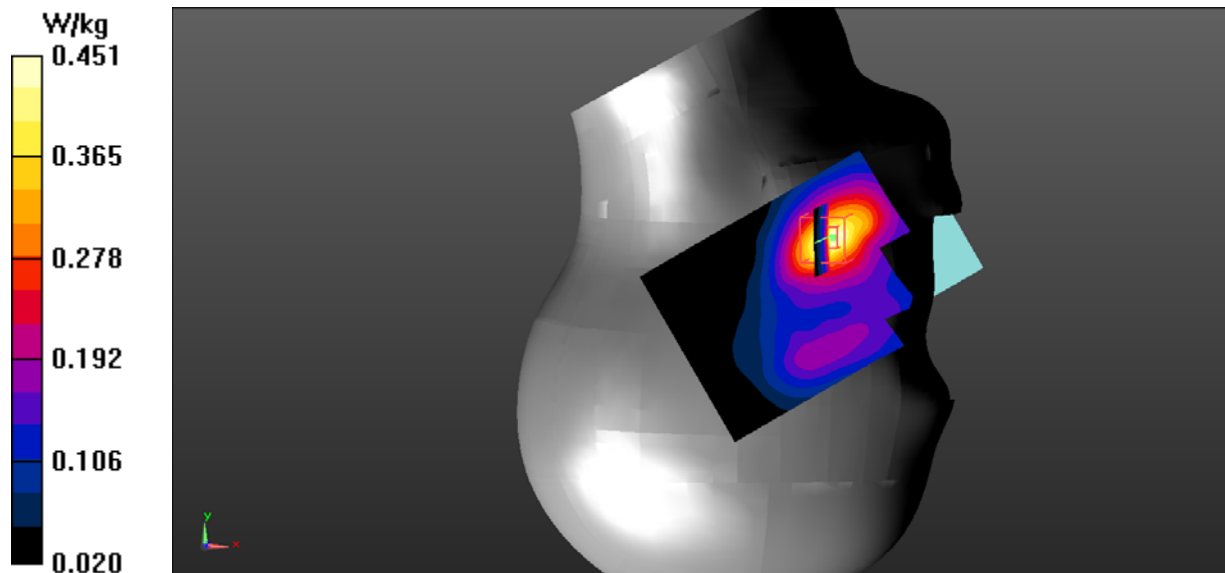

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.383$  S/m;  $\epsilon_r = 40.493$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.91, 7.91, 7.91) @ 1880 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Right Head Tilt/WCDMA Band 2 Mid/Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.219 W/kg


**Right Head Tilt/WCDMA Band 2 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.589 V/m; Power Drift = 0.027 dB

Peak SAR (extrapolated) = 0.301 W/kg

**SAR(1 g) = 0.193 W/kg; SAR(10 g) = 0.122 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.207 W/kg

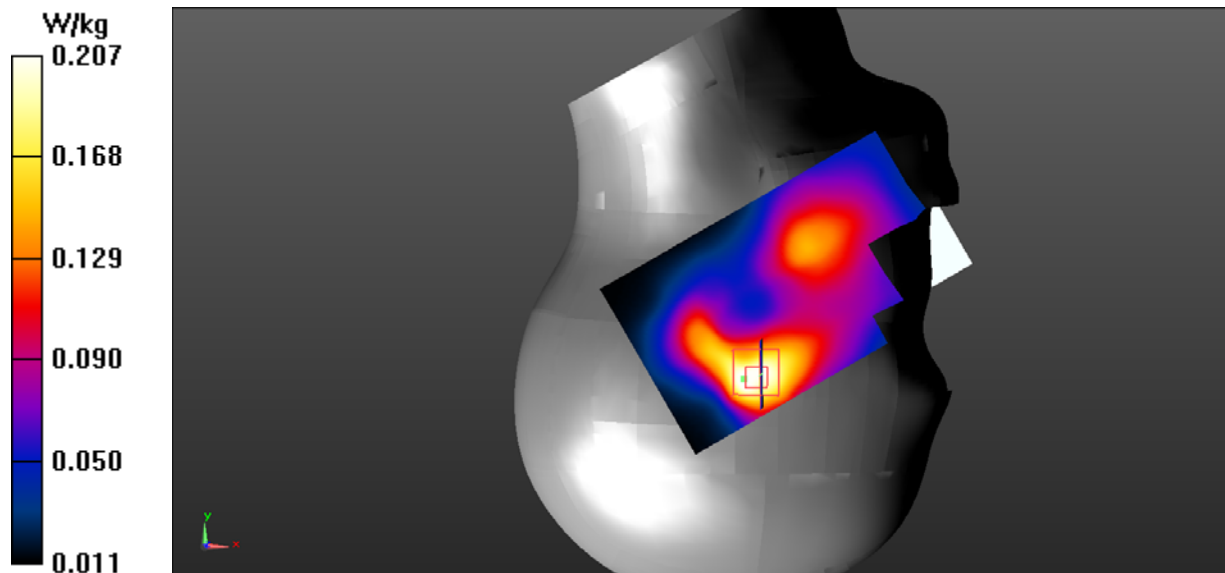

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, WCDMA (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1852.4$  MHz;  $\sigma = 1.483$  S/m;  $\epsilon_r = 54.574$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

**DASY Configuration:**

- Probe: EX3DV4 - SN7522; ConvF(7.48, 7.48, 7.48) @ 1852.4 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Back/WCDMA Band 2 Low/Area Scan (111x141x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.967 W/kg


**Body Back/WCDMA Band 2 Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.84 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.46 W/kg

**SAR(1 g) = 0.870 W/kg; SAR(10 g) = 0.498 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.964 W/kg

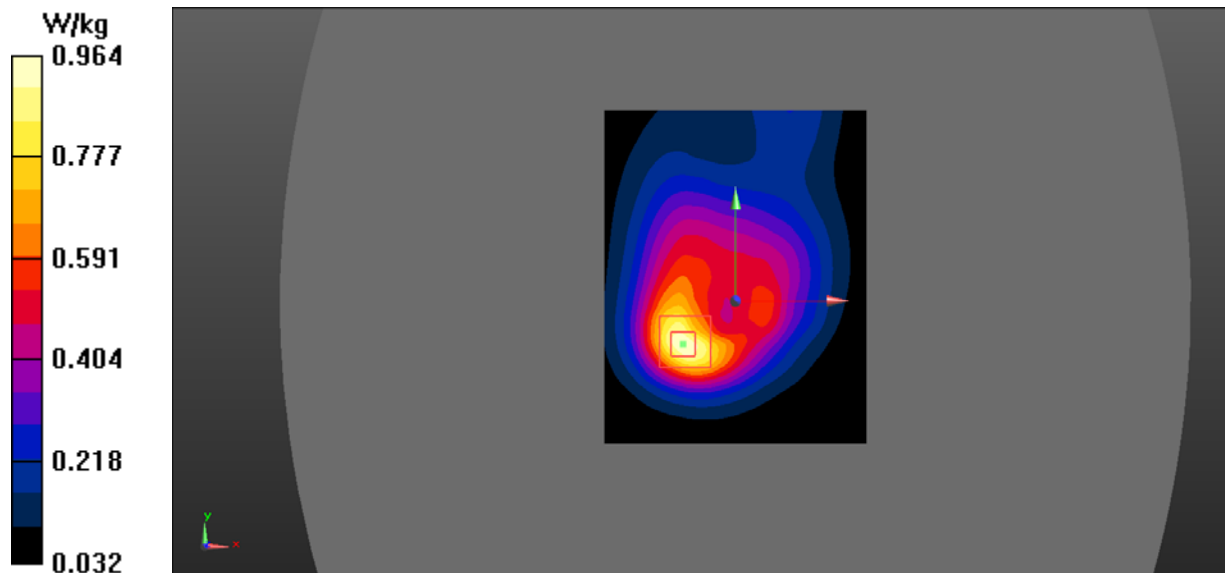

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.493$  S/m;  $\epsilon_r = 54.141$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.48, 7.48, 7.48) @ 1880 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Back/WCDMA Band 2 Mid/Area Scan (61x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.915 W/kg


**Body Back/WCDMA Band 2 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.33 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.43 W/kg

**SAR(1 g) = 0.842 W/kg; SAR(10 g) = 0.485 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.926 W/kg

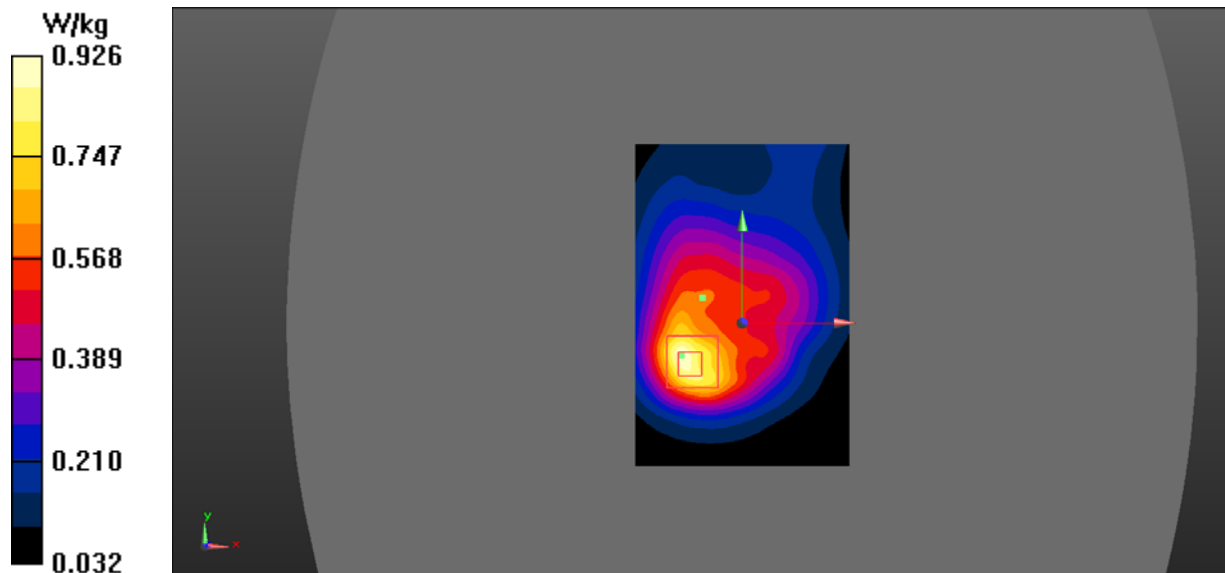

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, WCDMA (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1907.6$  MHz;  $\sigma = 1.529$  S/m;  $\epsilon_r = 53.444$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.48, 7.48, 7.48) @ 1907.6 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Back/WCDMA Band 2 High/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.883 W/kg


**Body Back/WCDMA Band 2 High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.58 V/m; Power Drift = 0.022 dB

Peak SAR (extrapolated) = 1.46 W/kg

**SAR(1 g) = 0.810 W/kg; SAR(10 g) = 0.456 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.898 W/kg

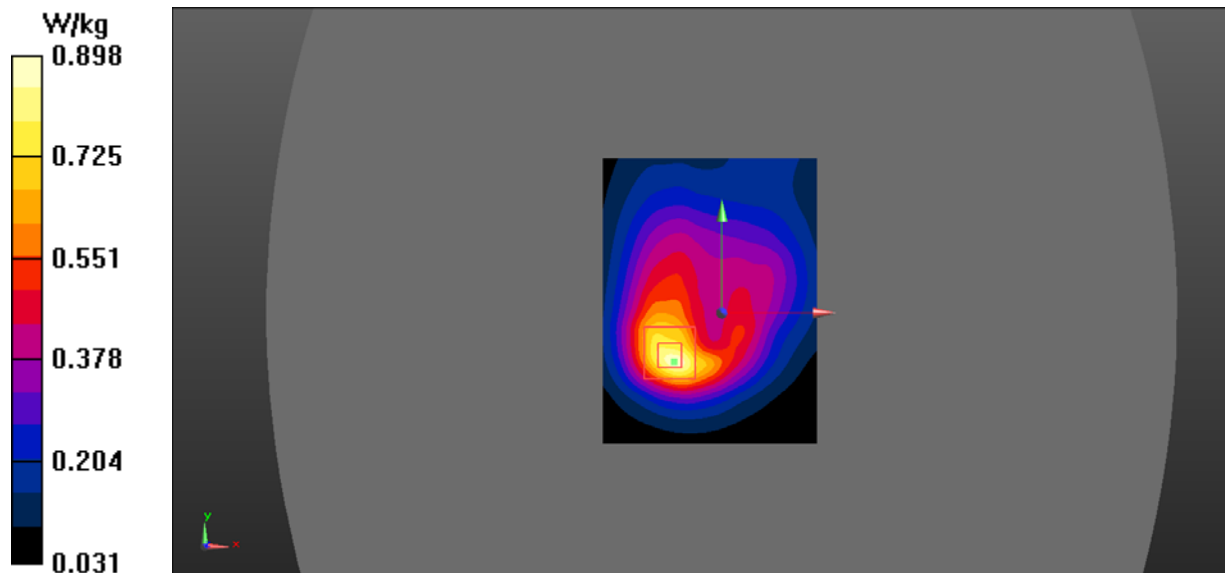

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.493$  S/m;  $\epsilon_r = 54.141$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.48, 7.48, 7.48) @ 1880 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Right/WCDMA Band 2 Mid/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm,  
dy=1.500 mm

Maximum value of SAR (interpolated) = 0.285 W/kg


**Body Right/WCDMA Band 2 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm,  
dy=5mm, dz=5mm

Reference Value = 10.20 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.427 W/kg

**SAR(1 g) = 0.260 W/kg; SAR(10 g) = 0.155 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.281 W/kg

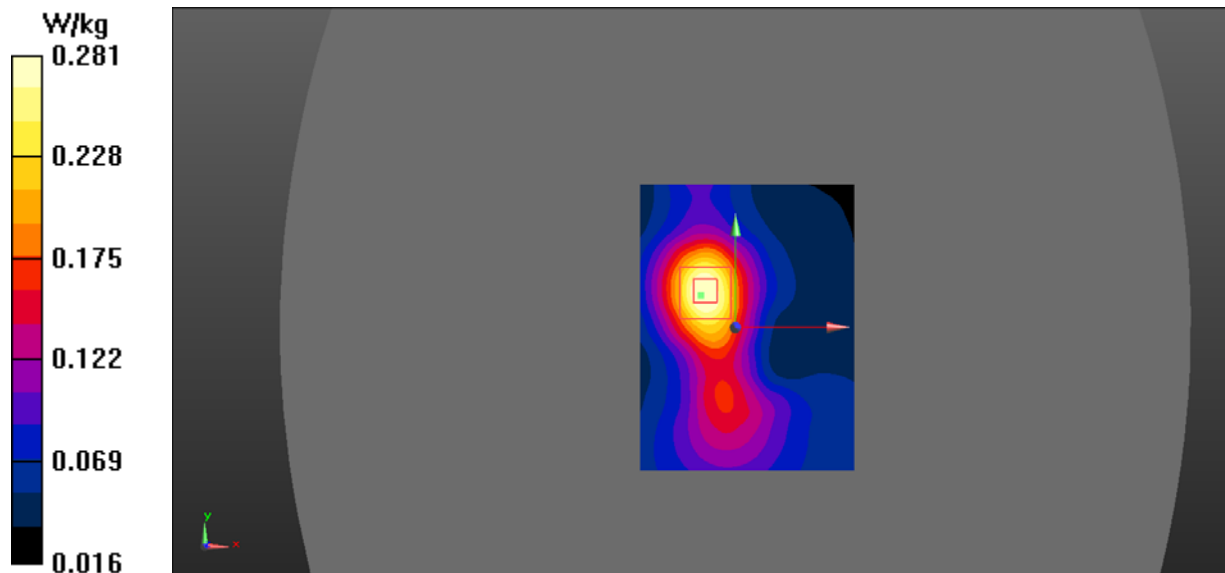



**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.493$  S/m;  $\epsilon_r = 54.141$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.48, 7.48, 7.48) @ 1880 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Bottom/WCDMA Band 2 Mid/Area Scan (101x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.878 W/kg


**Body Bottom/WCDMA Band 2 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.16 V/m; Power Drift = -0.124 dB

Peak SAR (extrapolated) = 1.11 W/kg

**SAR(1 g) = 0.480 W/kg; SAR(10 g) = 0.244 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.591 W/kg

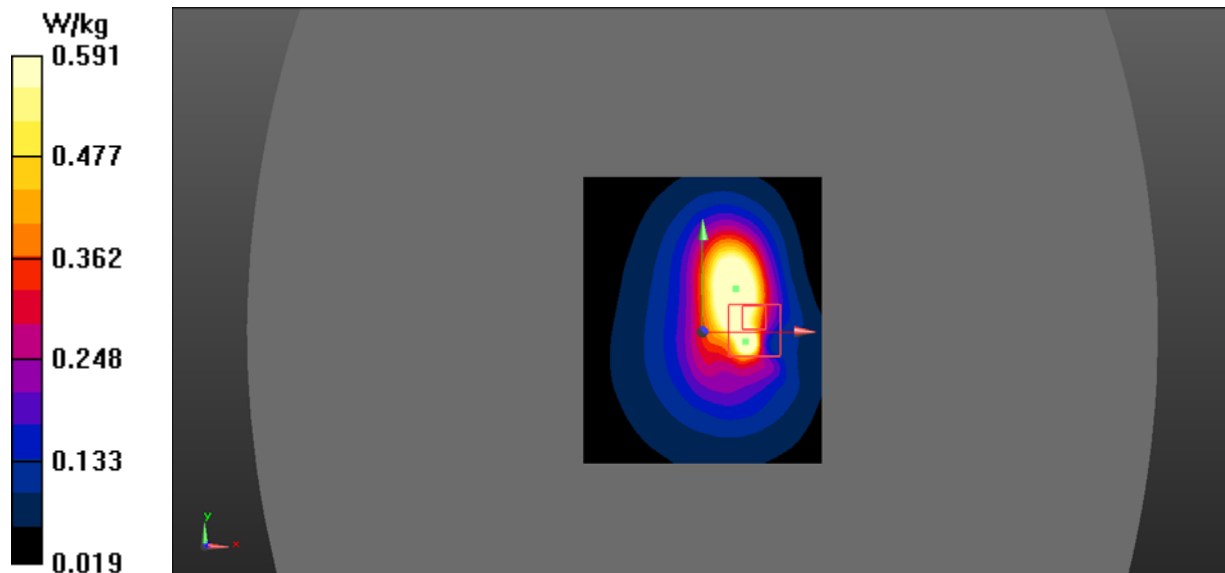

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1732.6$  MHz;  $\sigma = 1.386$  S/m;  $\epsilon_r = 41.215$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.2, 8.2, 8.2) @ 1732.6 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Left Head Cheek/WCDMA Band 4 Mid/Area Scan (101x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.381 W/kg


**Left Head Cheek/WCDMA Band 4 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.233 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 0.523 W/kg

**SAR(1 g) = 0.350 W/kg; SAR(10 g) = 0.217 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.369 W/kg

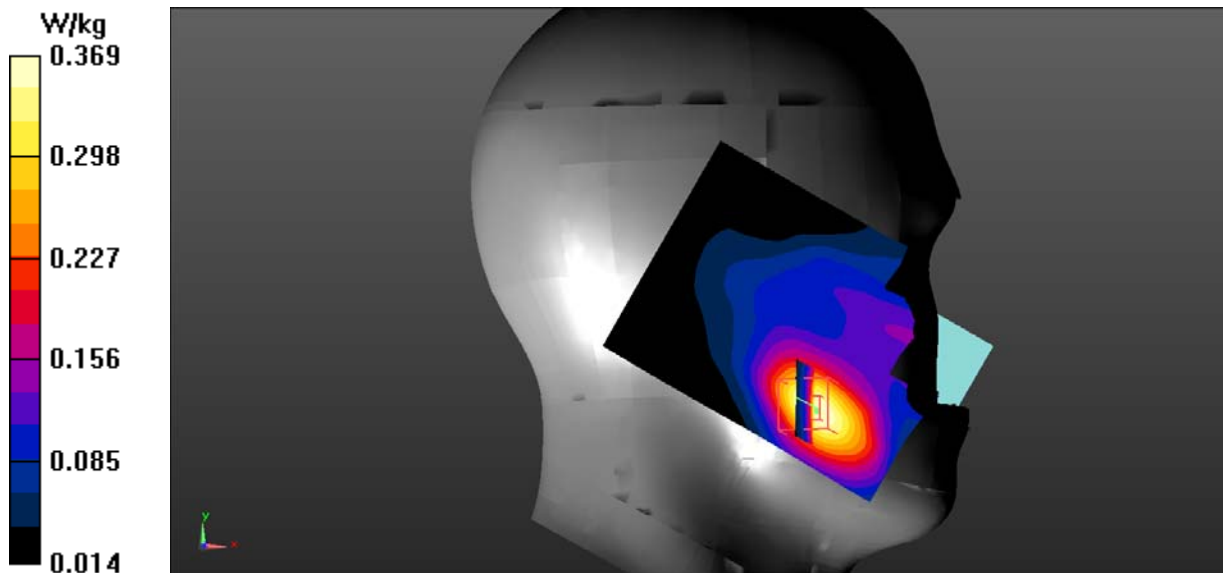

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1732.6$  MHz;  $\sigma = 1.386$  S/m;  $\epsilon_r = 41.215$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.2, 8.2, 8.2) @ 1732.6 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Left Head Tilt/WCDMA Band 4 Mid/Area Scan (101x131x1):** Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 0.162 W/kg


**Left Head Tilt/WCDMA Band 4 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 10.95 V/m; Power Drift = 0.026 dB

Peak SAR (extrapolated) = 0.243 W/kg

**SAR(1 g) = 0.160 W/kg; SAR(10 g) = 0.099 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.167 W/kg

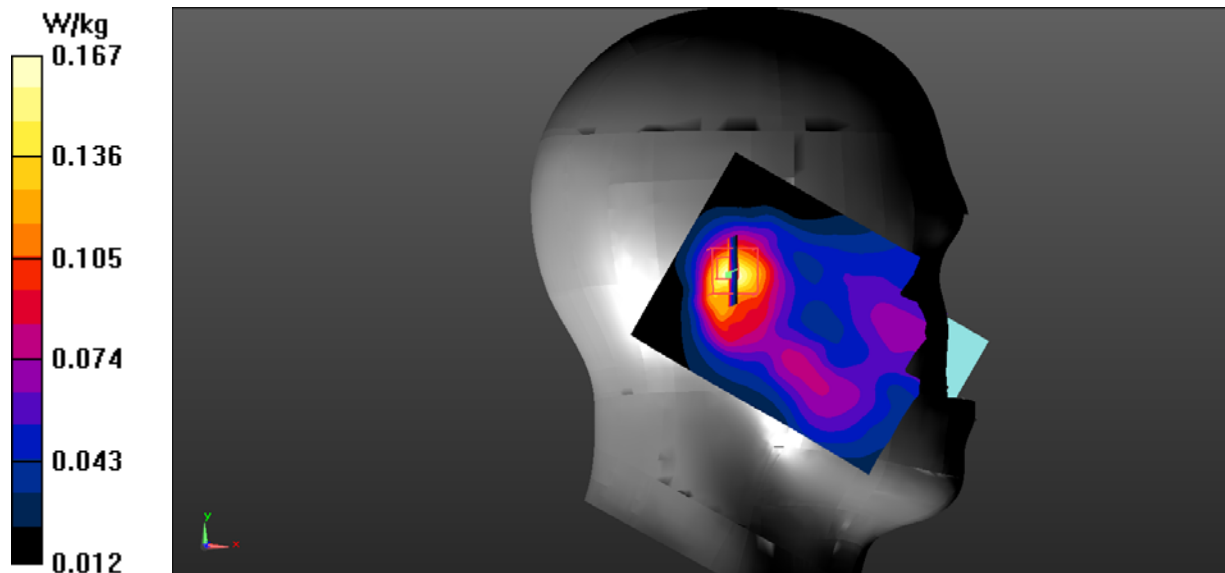

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1732.6$  MHz;  $\sigma = 1.386$  S/m;  $\epsilon_r = 41.215$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.2, 8.2, 8.2) @ 1732.6 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Right Head Cheek/WCDMA Band 4 Mid/Area Scan (101x131x1):** Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 0.312 W/kg

**Right Head Cheek/WCDMA Band 4 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:


$dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 4.953 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.446 W/kg

**SAR(1 g) = 0.293 W/kg; SAR(10 g) = 0.179 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.310 W/kg

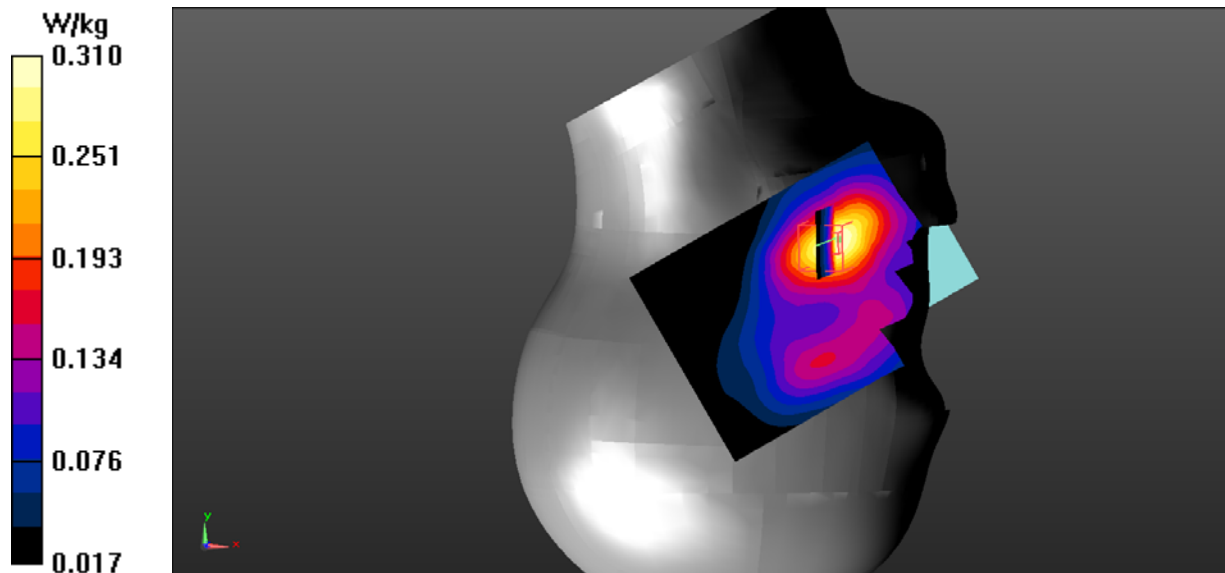

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1732.6$  MHz;  $\sigma = 1.386$  S/m;  $\epsilon_r = 41.215$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.2, 8.2, 8.2) @ 1732.6 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Right Head Tilt/WCDMA Band 4 Mid/Area Scan (101x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.117 W/kg


**Right Head Tilt/WCDMA Band 4 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.209 V/m; Power Drift = 0.041 dB

Peak SAR (extrapolated) = 0.165 W/kg

**SAR(1 g) = 0.111 W/kg; SAR(10 g) = 0.074 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.113 W/kg

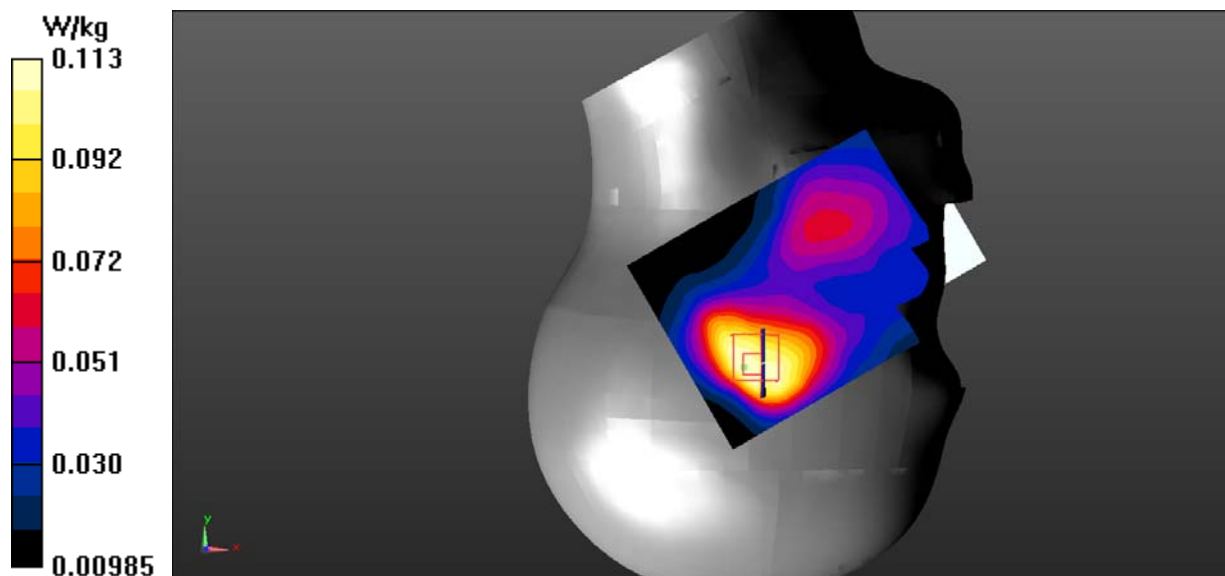

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, WCDMA (0); Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1712.4$  MHz;  $\sigma = 1.464$  S/m;  $\epsilon_r = 54.849$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.88, 7.88, 7.88) @ 1712.4 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Back/WCDMA Band 4 Low/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.749 W/kg


**Body Back/WCDMA Band 4 Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.95 V/m; Power Drift = 0.031 dB

Peak SAR (extrapolated) = 1.11 W/kg

**SAR(1 g) = 0.701 W/kg; SAR(10 g) = 0.432 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.748 W/kg

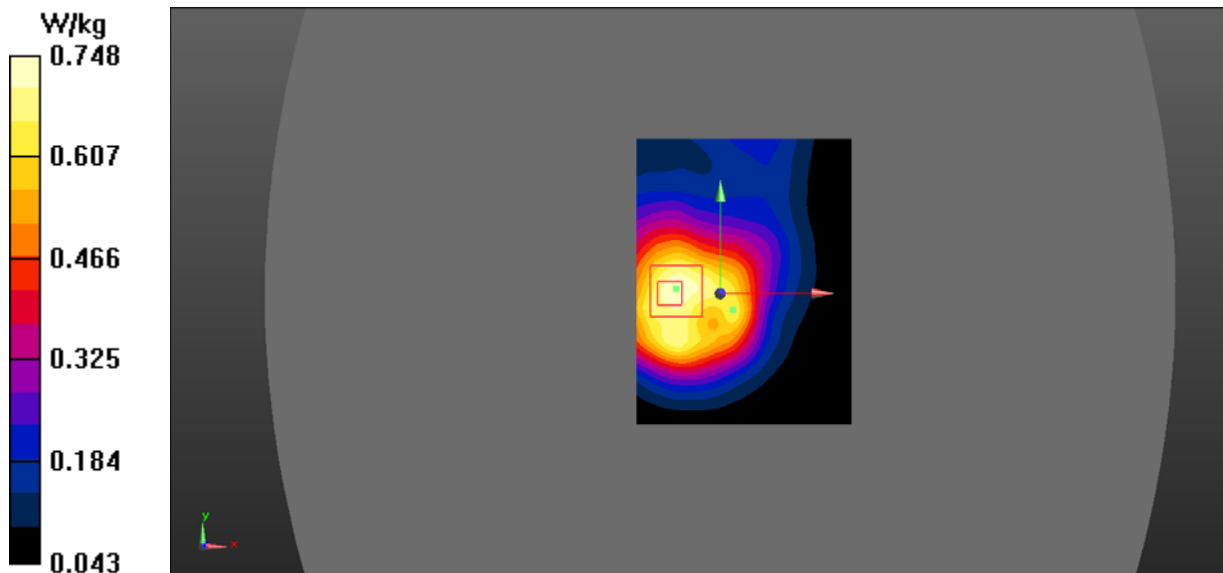

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1732.6$  MHz;  $\sigma = 1.472$  S/m;  $\epsilon_r = 54.703$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.88, 7.88, 7.88) @ 1732.6 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Back/WCDMA Band 4 Mid/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.901 W/kg


**Body Back/WCDMA Band 4 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.91 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.36 W/kg

**SAR(1 g) = 0.812 W/kg; SAR(10 g) = 0.488 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.868 W/kg

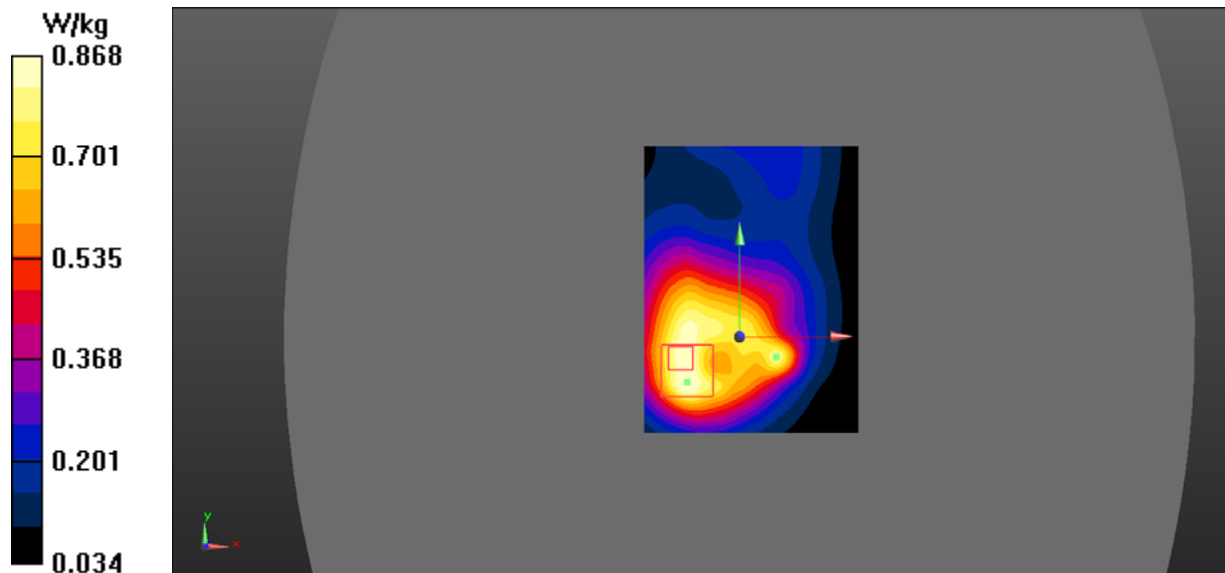

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, WCDMA (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1752.6$  MHz;  $\sigma = 1.508$  S/m;  $\epsilon_r = 54.451$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

**DASY Configuration:**

- Probe: EX3DV4 - SN7522; ConvF(7.88, 7.88, 7.88) @ 1752.6 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Back/WCDMA Band 4 High/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.870 W/kg


**Body Back/WCDMA Band 4 High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.66 V/m; Power Drift = 0.70 dB

Peak SAR (extrapolated) = 1.42 W/kg

**SAR(1 g) = 0.865 W/kg; SAR(10 g) = 0.512 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.933 W/kg

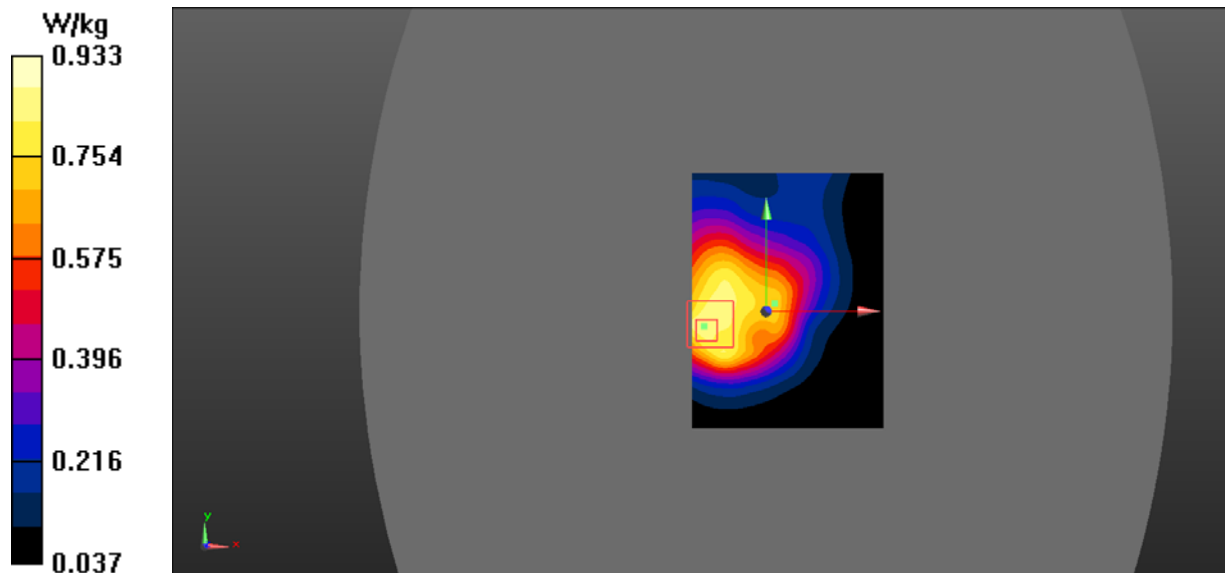



**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1732.6$  MHz;  $\sigma = 1.472$  S/m;  $\epsilon_r = 54.703$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

**DASY Configuration:**

- Probe: EX3DV4 - SN7522; ConvF(7.88, 7.88, 7.88) @ 1732.6 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Right/WCDMA Band 4 Mid/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.111 W/kg


**Body Right/WCDMA Band 4 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.962 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.157 W/kg

**SAR(1 g) = 0.103 W/kg; SAR(10 g) = 0.065 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.110 W/kg

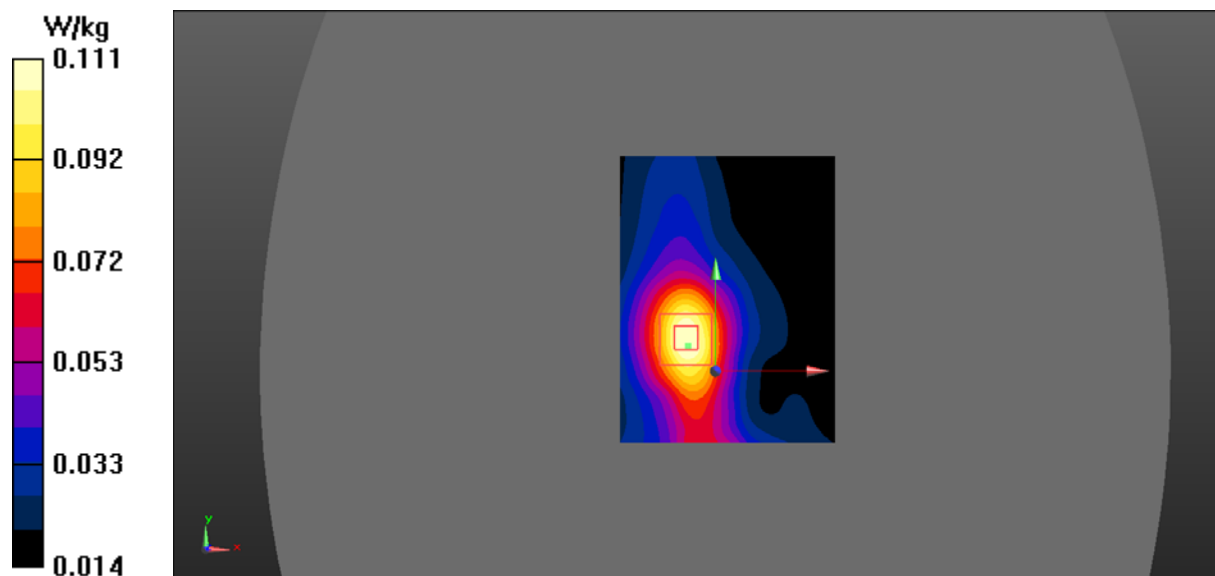

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1732.6$  MHz;  $\sigma = 1.472$  S/m;  $\epsilon_r = 54.703$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.88, 7.88, 7.88) @ 1732.6 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Bottom/WCDMA Band 4 Mid/Area Scan (101x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.759 W/kg


**Body Bottom/WCDMA Band 4 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.18 V/m; Power Drift = -0.182 dB

Peak SAR (extrapolated) = 1.07 W/kg

**SAR(1 g) = 0.634 W/kg; SAR(10 g) = 0.354 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.687 W/kg

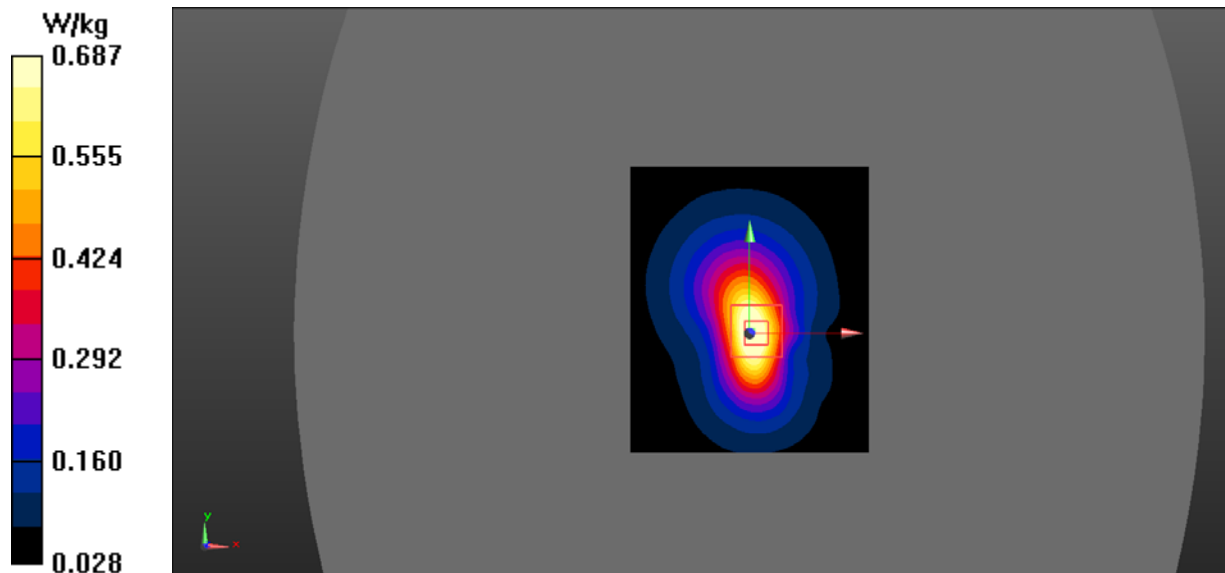

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.891$  S/m;  $\epsilon_r = 42.262$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.46, 9.46, 9.46) @ 836.6 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Left Head Cheek/WCDMA Band 5 Mid/Area Scan (101x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.126 W/kg


**Left Head Cheek/WCDMA Band 5 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.408 V/m; Power Drift = 0.178 dB

Peak SAR (extrapolated) = 0.155 W/kg

**SAR(1 g) = 0.119 W/kg; SAR(10 g) = 0.089 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.124 W/kg

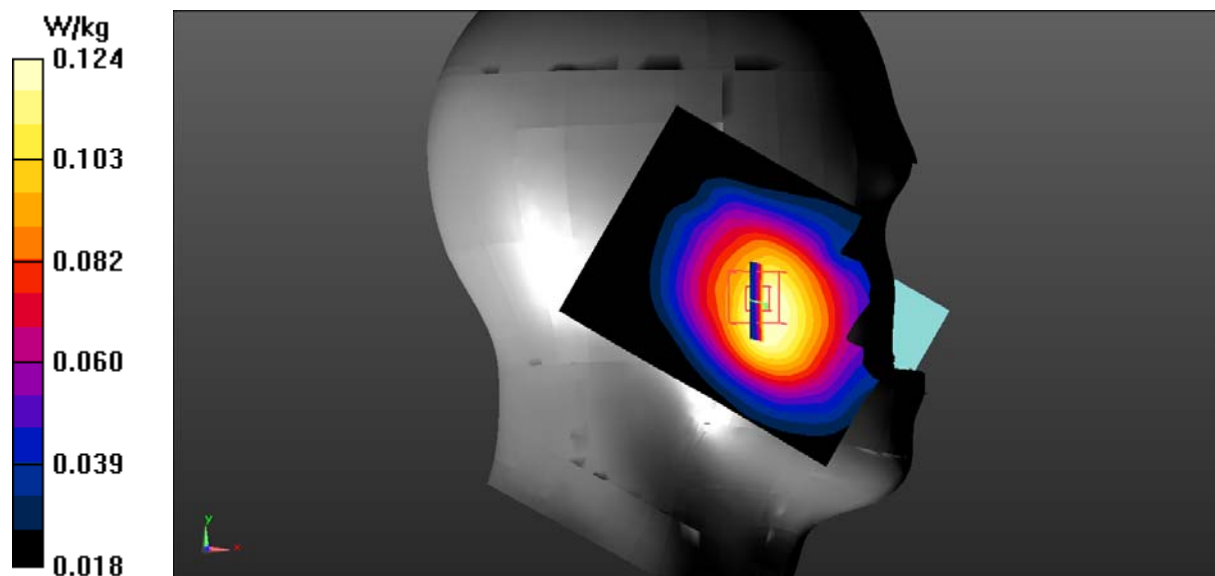

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.891$  S/m;  $\epsilon_r = 42.262$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.46, 9.46, 9.46) @ 836.6 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Left Head Tilt/WCDMA Band 5 Mid/Area Scan (101x131x1):** Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 0.0791 W/kg


**Left Head Tilt/WCDMA Band 5 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 6.463 V/m; Power Drift = 0.031 dB

Peak SAR (extrapolated) = 0.0930 W/kg

**SAR(1 g) = 0.075 W/kg; SAR(10 g) = 0.057 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.0769 W/kg

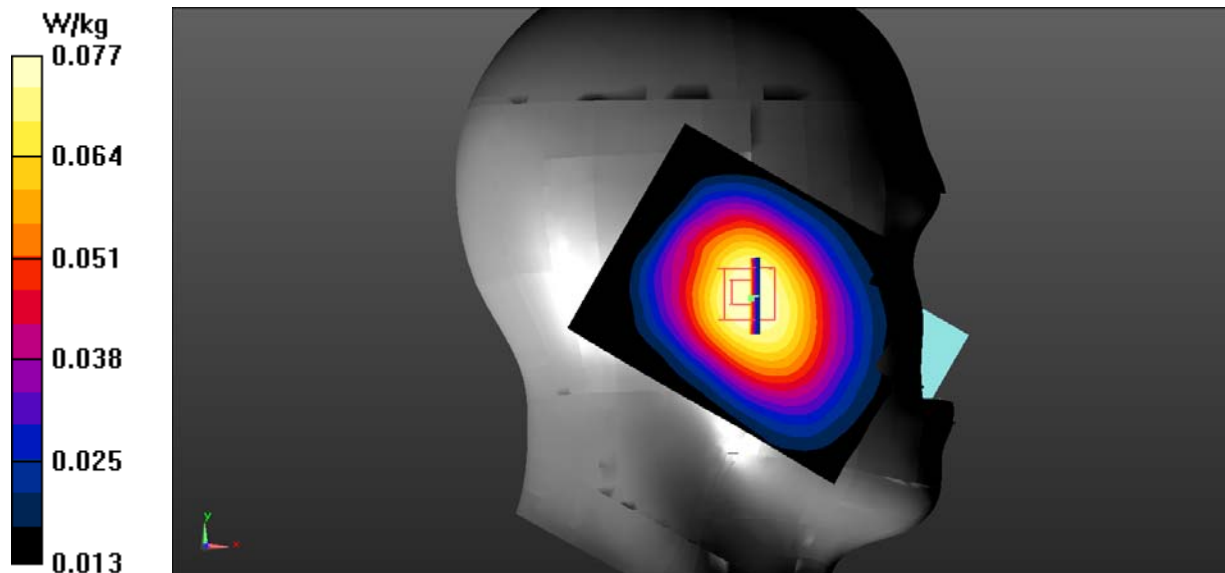

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.891$  S/m;  $\epsilon_r = 42.262$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.46, 9.46, 9.46) @ 836.6 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Right Head Cheek/WCDMA Band 5 Mid/Area Scan (101x131x1):** Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 0.207 W/kg

**Right Head Cheek/WCDMA Band 5 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:


$dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 6.295 V/m; Power Drift = 0.047 dB

Peak SAR (extrapolated) = 0.257 W/kg

**SAR(1 g) = 0.200 W/kg; SAR(10 g) = 0.149 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.210 W/kg

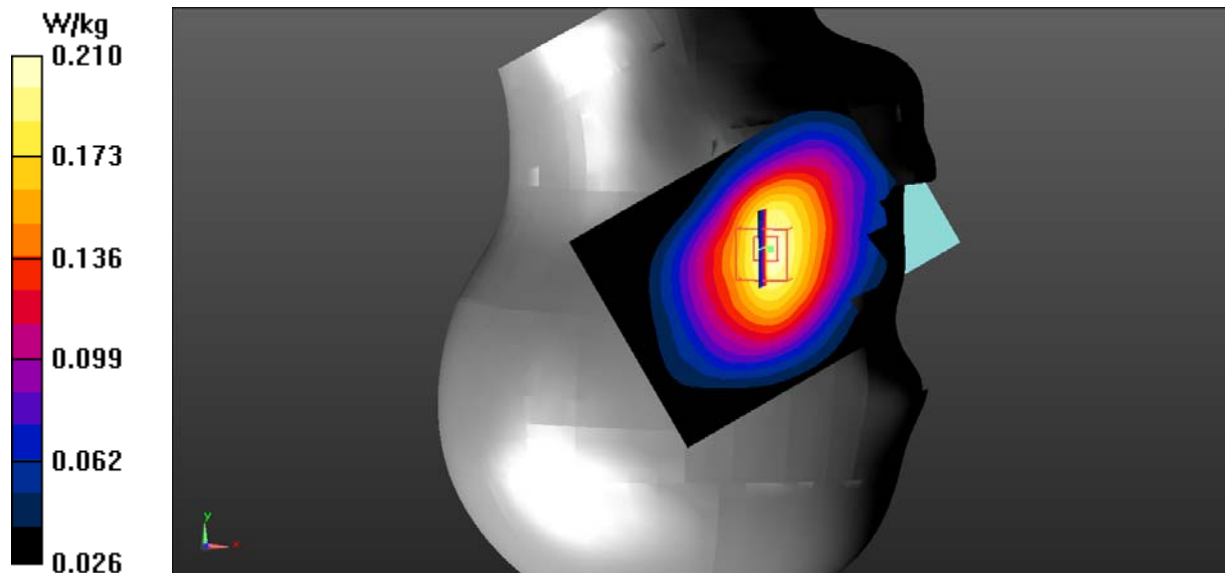

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.891$  S/m;  $\epsilon_r = 42.262$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.46, 9.46, 9.46) @ 836.6 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Right Head Tilt/WCDMA Band 5 Mid/Area Scan (101x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.118 W/kg


**Right Head Tilt/WCDMA Band 5 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.590 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.147 W/kg

**SAR(1 g) = 0.117 W/kg; SAR(10 g) = 0.088 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.122 W/kg

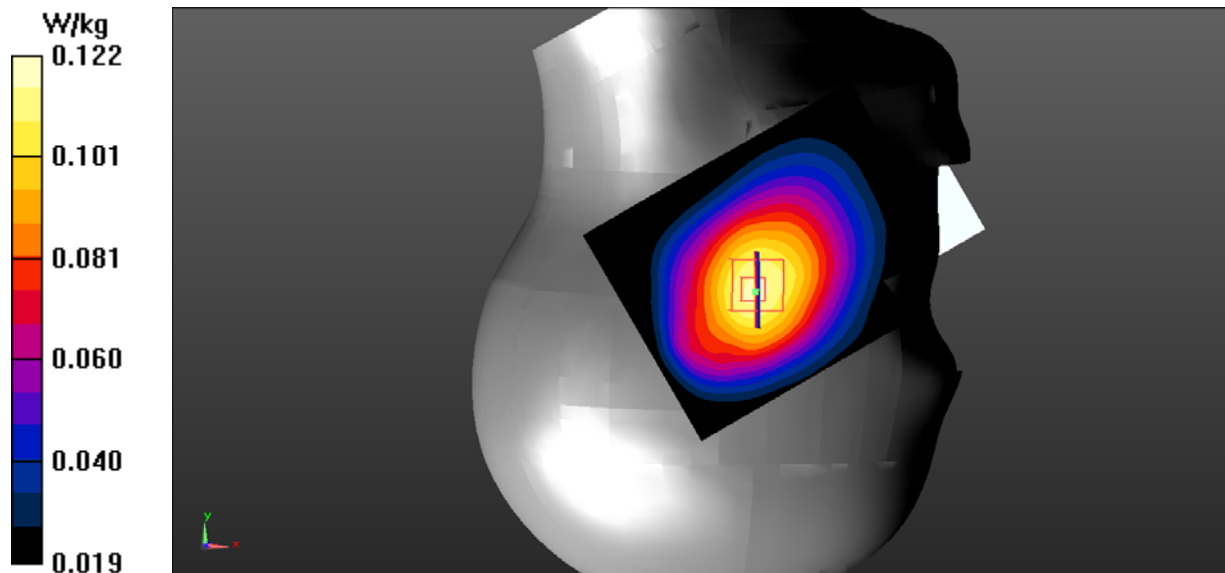

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.891$  S/m;  $\epsilon_r = 42.262$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

**DASY Configuration:**

- Probe: EX3DV4 - SN7522; ConvF(9.46, 9.46, 9.46) @ 836.6 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Back/WCDMA Band 5 Mid/Area Scan (101x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0537 W/kg


**Body Back/WCDMA Band 5 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.085 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.0640 W/kg

**SAR(1 g) = 0.050 W/kg; SAR(10 g) = 0.038 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.0522 W/kg

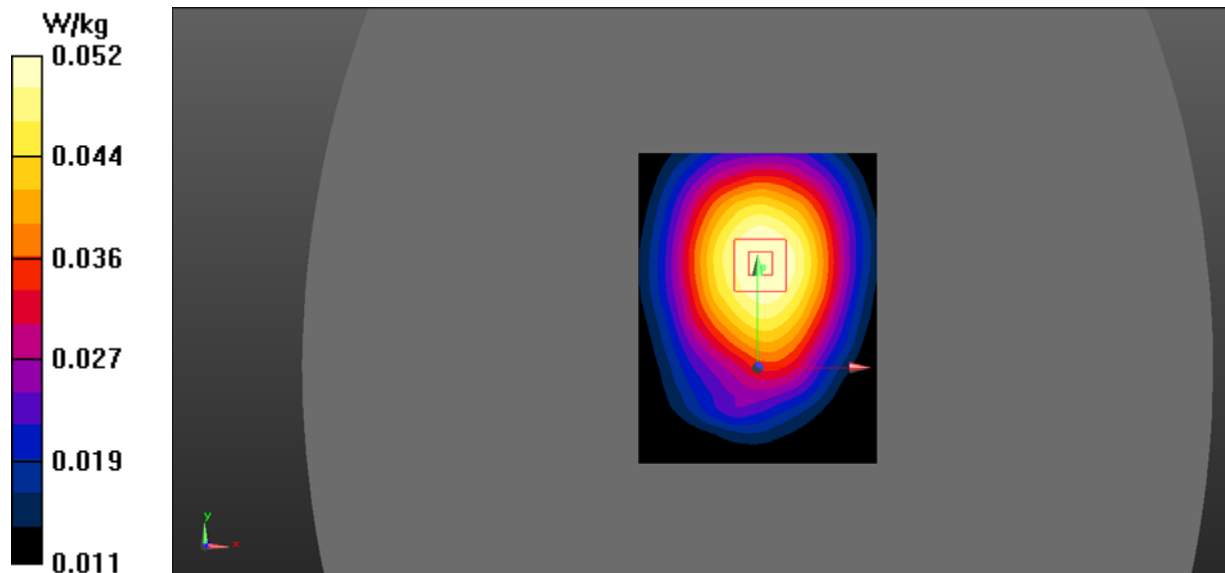

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.891$  S/m;  $\epsilon_r = 42.262$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.46, 9.46, 9.46) @ 836.6 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Right/WCDMA Band 5 Mid/Area Scan (101x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0235 W/kg


**Body Right/WCDMA Band 5 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.828 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.0300 W/kg

**SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.017 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.0235 W/kg

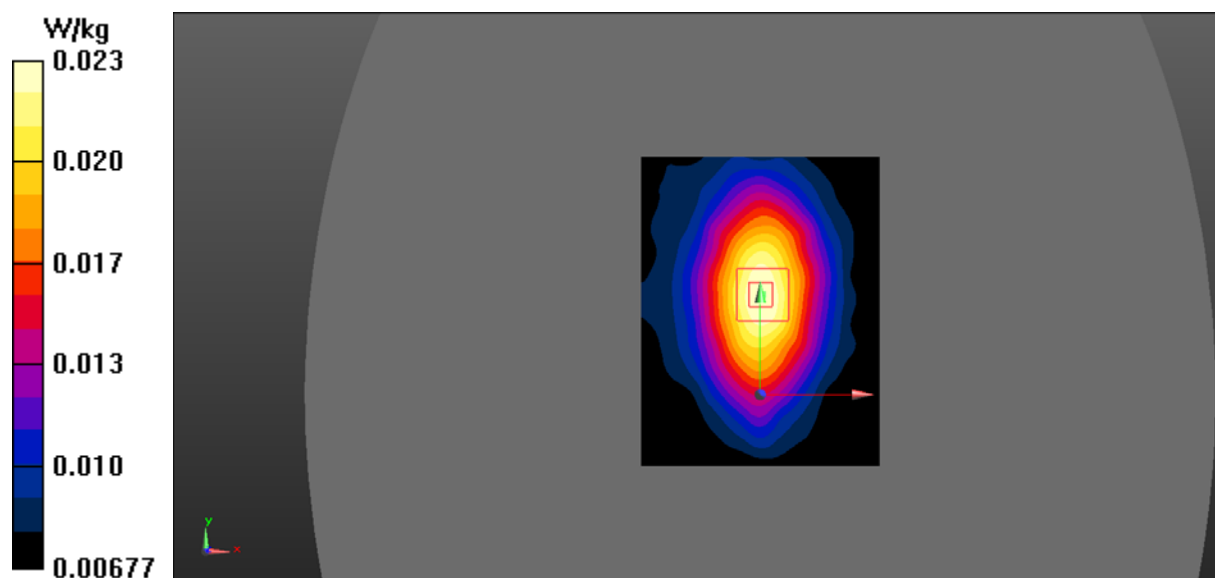



**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.891$  S/m;  $\epsilon_r = 42.262$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.46, 9.46, 9.46) @ 836.6 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Bottom/WCDMA Band 5 Mid/Area Scan (101x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.192 W/kg


**Body Bottom/WCDMA Band 5 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.019 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.338 W/kg

**SAR(1 g) = 0.173 W/kg; SAR(10 g) = 0.099 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.191 W/kg

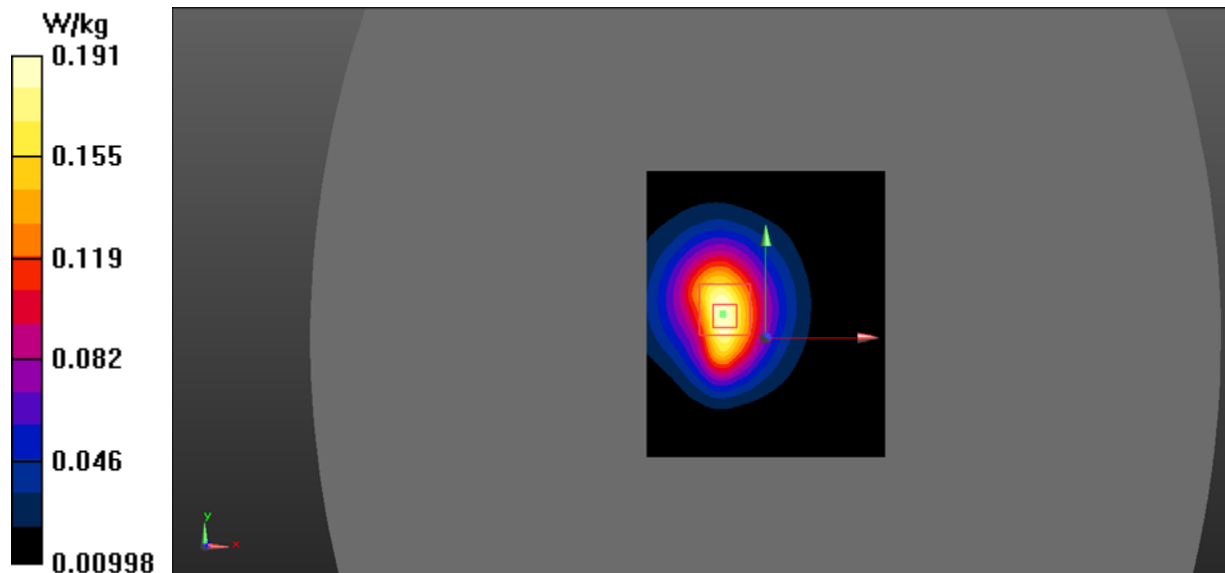

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.383$  S/m;  $\epsilon_r = 40.493$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.91, 7.91, 7.91) @ 1880 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Left Head Cheek/LTE Band 2 1RB Mid/Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.481 W/kg


**Left Head Cheek/LTE Band 2 1RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.310 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.615 W/kg

**SAR(1 g) = 0.411 W/kg; SAR(10 g) = 0.258 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.448 W/kg

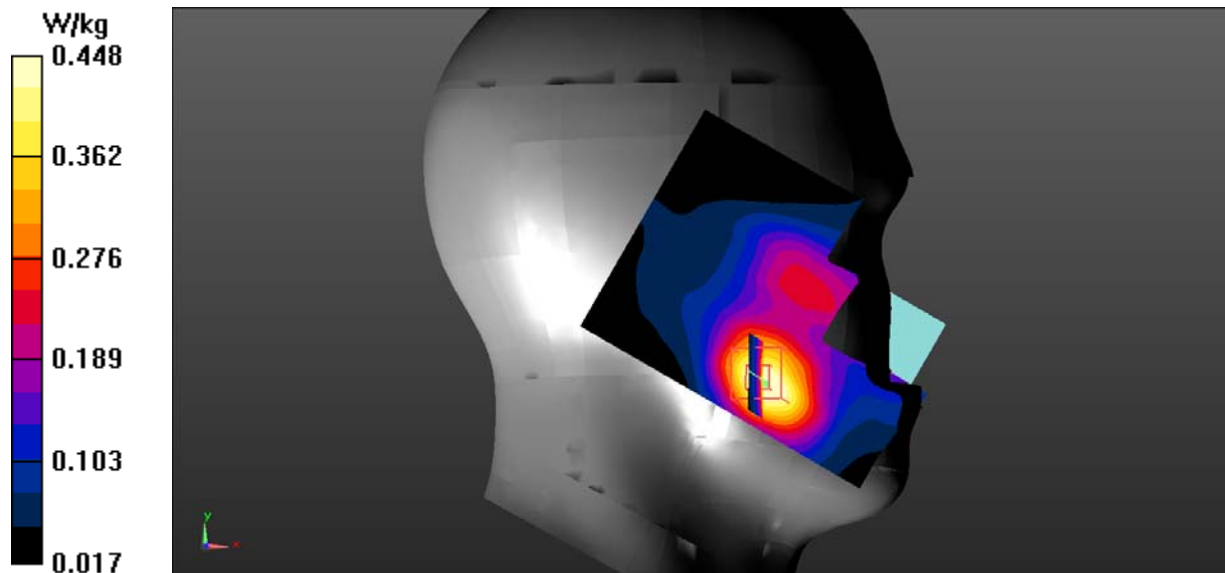

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.383$  S/m;  $\epsilon_r = 40.493$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.91, 7.91, 7.91) @ 1880 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Left Head Cheek/LTE Band 2 50%RB Mid/Area Scan (101x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.423 W/kg

**Left Head Cheek/LTE Band 2 50%RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.368 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.585 W/kg

**SAR(1 g) = 0.376 W/kg; SAR(10 g) = 0.197 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.404 W/kg

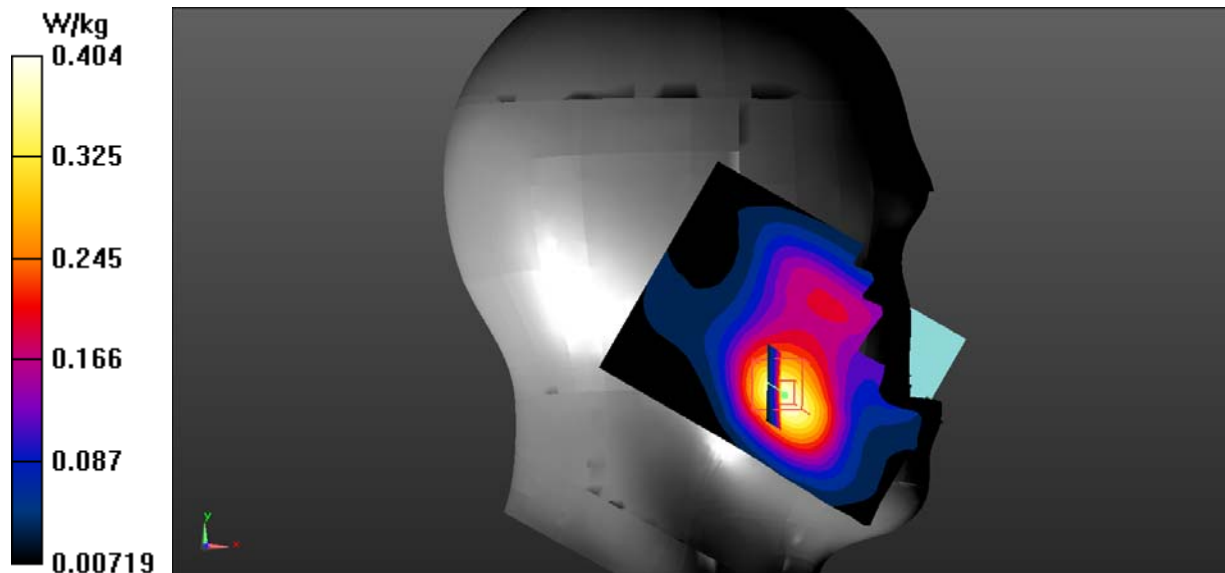

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.383$  S/m;  $\epsilon_r = 40.493$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.91, 7.91, 7.91) @ 1880 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Left Head Tilt/LTE Band 2 1RB Mid/Area Scan (101x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.172 W/kg


**Left Head Tilt/LTE Band 2 1RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.35 V/m; Power Drift = 0.032 dB

Peak SAR (extrapolated) = 0.252 W/kg

**SAR(1 g) = 0.158 W/kg; SAR(10 g) = 0.096 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.168 W/kg

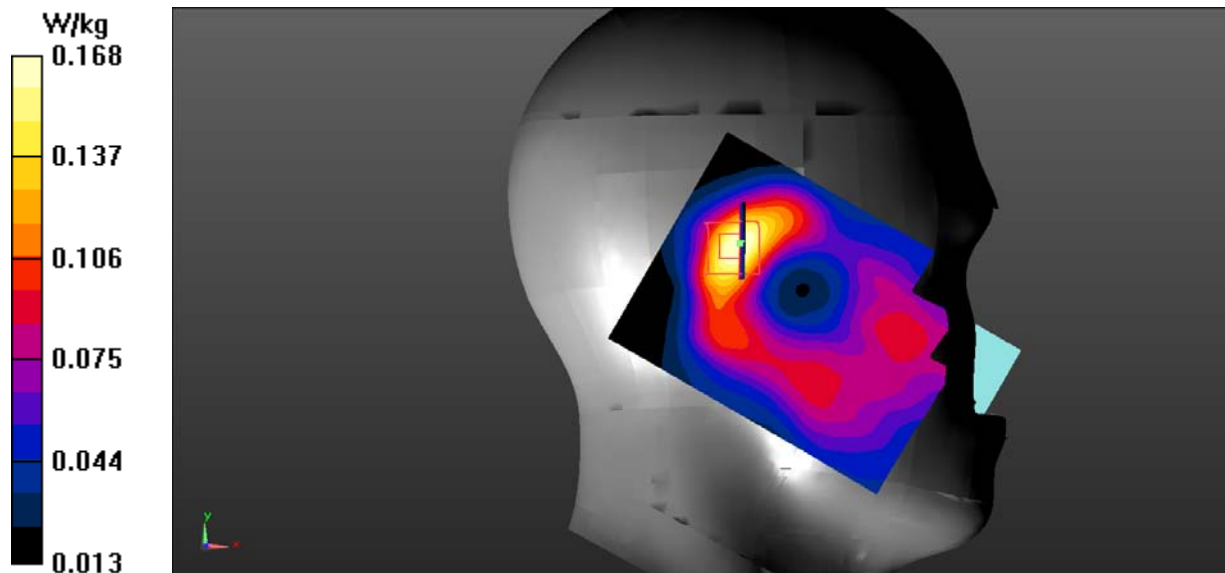

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.383$  S/m;  $\epsilon_r = 40.493$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.91, 7.91, 7.91) @ 1880 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Left Head Tilt/LTE Band 2 50%RB Mid/Area Scan (101x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.139 W/kg


**Left Head Tilt/LTE Band 2 50%RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.413 V/m; Power Drift = 0.038 dB

Peak SAR (extrapolated) = 0.208 W/kg

**SAR(1 g) = 0.130 W/kg; SAR(10 g) = 0.080 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.140 W/kg

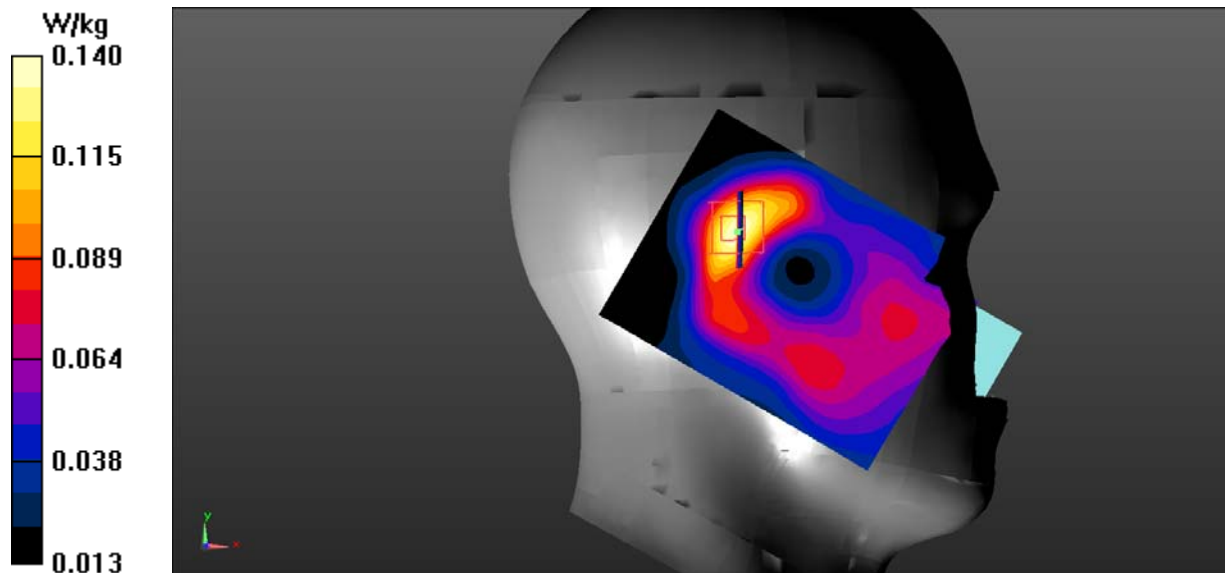

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.383$  S/m;  $\epsilon_r = 40.493$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.91, 7.91, 7.91) @ 1880 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Right Head Cheek/LTE Band 2 1RB Mid/Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.422 W/kg

**Right Head Cheek/LTE Band 2 1RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.616 V/m; Power Drift = 0.114 dB

Peak SAR (extrapolated) = 0.589 W/kg

**SAR(1 g) = 0.377 W/kg; SAR(10 g) = 0.234 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.412 W/kg

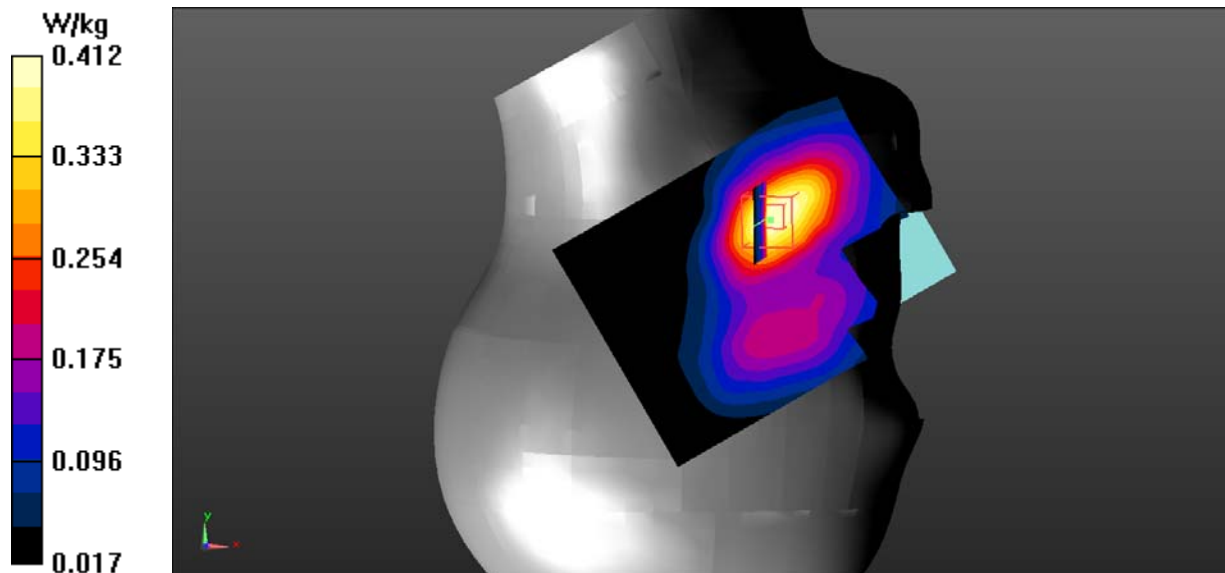

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.383$  S/m;  $\epsilon_r = 40.493$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.91, 7.91, 7.91) @ 1880 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Right Head Cheek/LTE Band 2 50%RB Mid/Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.416 W/kg


**Right Head Cheek/LTE Band 2 50%RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.278 V/m; Power Drift = 0.177 dB

Peak SAR (extrapolated) = 0.615 W/kg

**SAR(1 g) = 0.392 W/kg; SAR(10 g) = 0.241 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.431 W/kg

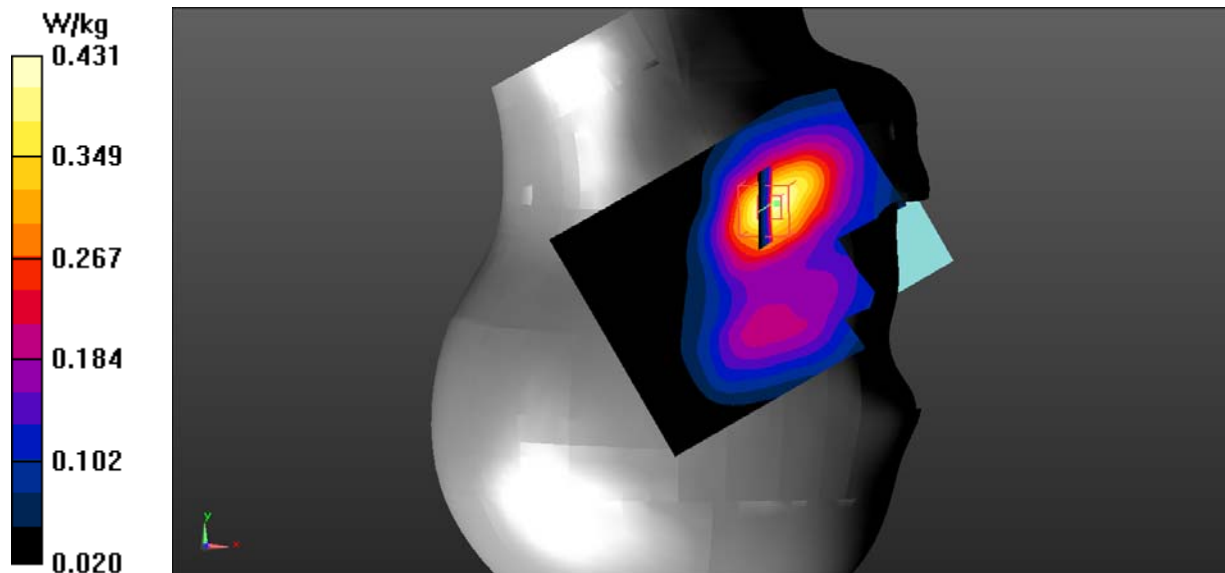

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.383$  S/m;  $\epsilon_r = 40.493$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.91, 7.91, 7.91) @ 1880 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Right Head Tilt/LTE Band 2 1RB Mid/Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.137 W/kg


**Right Head Tilt/LTE Band 2 1RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.468 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.197 W/kg

**SAR(1 g) = 0.124 W/kg; SAR(10 g) = 0.078 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.134 W/kg

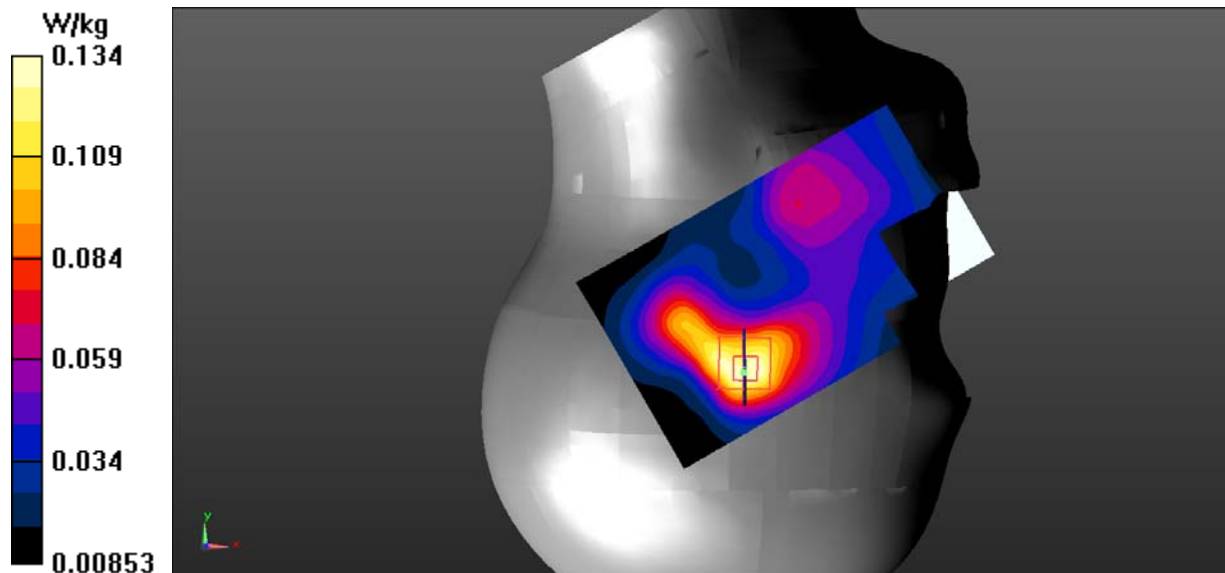



**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.383$  S/m;  $\epsilon_r = 40.493$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.91, 7.91, 7.91) @ 1880 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Right Head Tilt/LTE Band 2 50%RB Mid/Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.137 W/kg

**Right Head Tilt/LTE Band 2 50%RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.257 V/m; Power Drift = 0.056 dB

Peak SAR (extrapolated) = 0.200 W/kg

**SAR(1 g) = 0.126 W/kg; SAR(10 g) = 0.080 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.135 W/kg

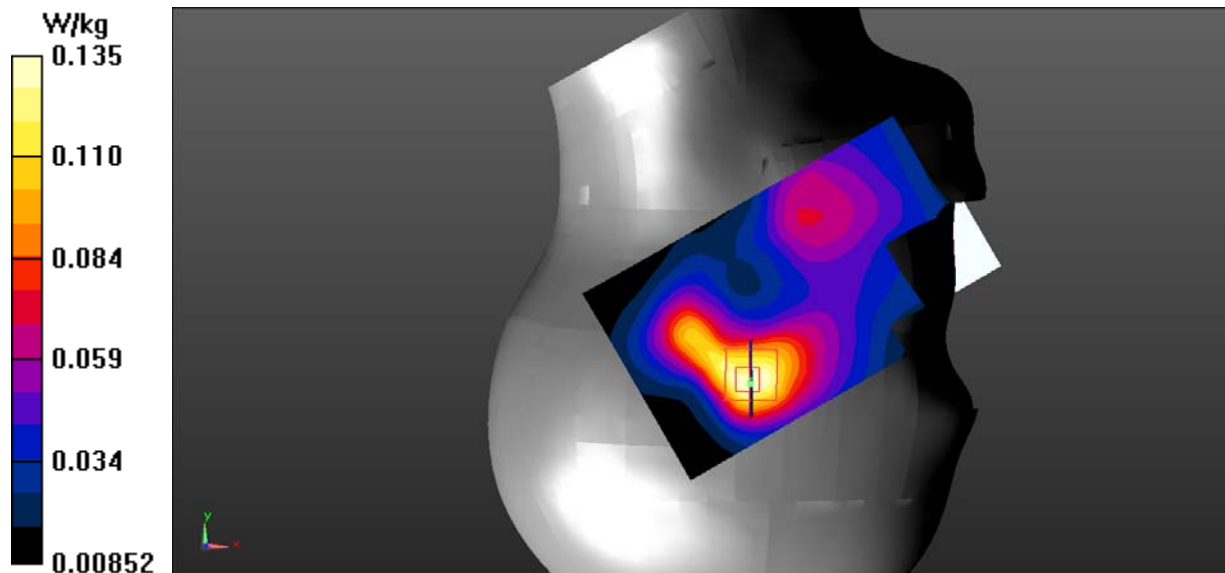

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1860 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1860$  MHz;  $\sigma = 1.488$  S/m;  $\epsilon_r = 54.668$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.48, 7.48, 7.48) @ 1860 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Back/LTE Band 2 1RB Low/Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.924 W/kg


**Body Back/LTE Band 2 1RB Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.86 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.48 W/kg

**SAR(1 g) = 0.862 W/kg; SAR(10 g) = 0.490 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.938 W/kg

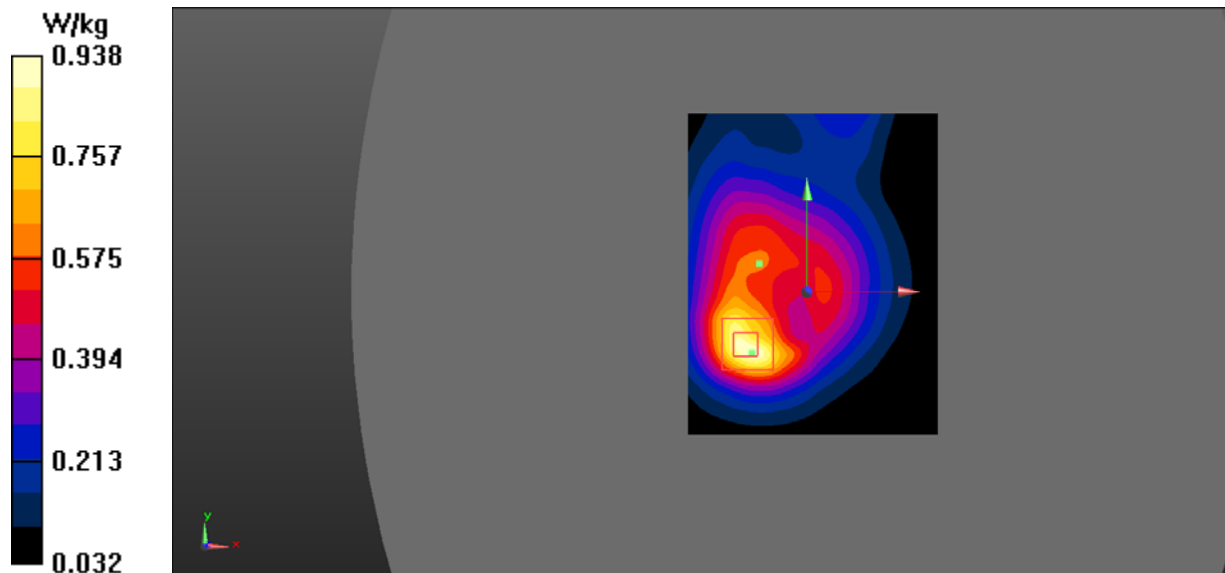

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.493$  S/m;  $\epsilon_r = 54.141$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.48, 7.48, 7.48) @ 1880 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Back/LTE Band 2 1RB Mid/Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.984 W/kg


**Body Back/LTE Band 2 1RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.48 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.56 W/kg

**SAR(1 g) = 0.902 W/kg; SAR(10 g) = 0.507 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.980 W/kg

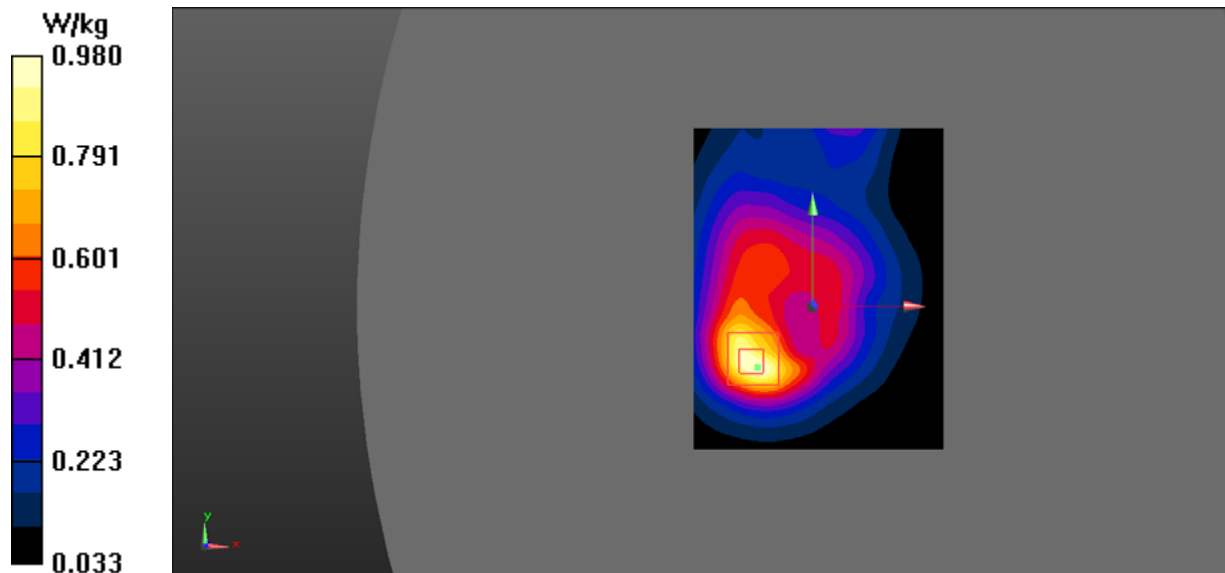

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1900 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.511$  S/m;  $\epsilon_r = 53.783$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.48, 7.48, 7.48) @ 1900 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Back/LTE Band 2 1RB High/Area Scan (61x91x1):** Interpolated grid: dx=1.500 mm,  
dy=1.500 mm

Maximum value of SAR (interpolated) = 1.08 W/kg


**Body Back/LTE Band 2 1RB High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm,  
dy=5mm, dz=5mm

Reference Value = 18.23 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.70 W/kg

**SAR(1 g) = 0.973 W/kg; SAR(10 g) = 0.542 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 1.07 W/kg

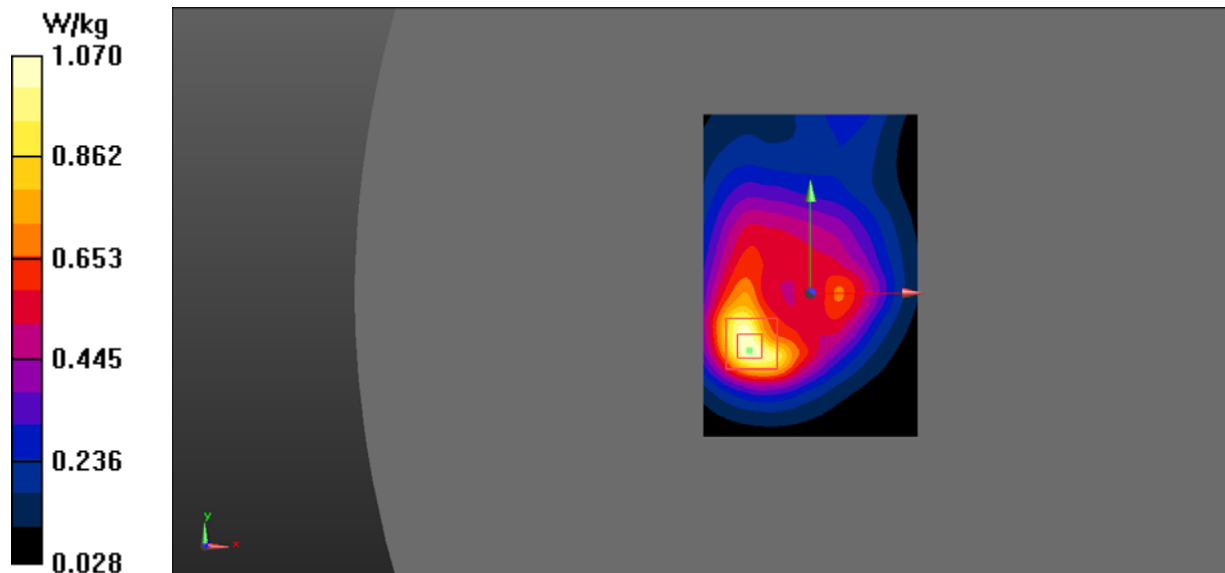

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.493$  S/m;  $\epsilon_r = 54.141$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.48, 7.48, 7.48) @ 1880 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Back/LTE Band 2 50%RB Mid/Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.820 W/kg


**Body Back/LTE Band 2 50%RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.92 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.33 W/kg

**SAR(1 g) = 0.762 W/kg; SAR(10 g) = 0.427 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.839 W/kg

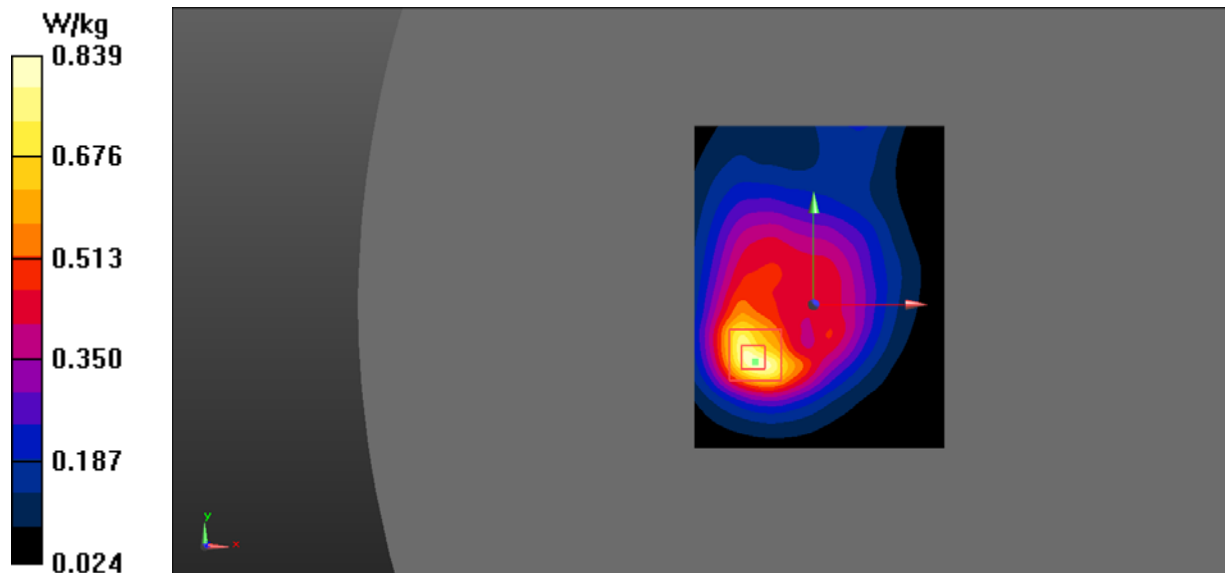

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.493$  S/m;  $\epsilon_r = 54.141$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.48, 7.48, 7.48) @ 1880 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Right/LTE Band 2 1RB Mid/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm,  
dy=1.500 mm

Maximum value of SAR (interpolated) = 0.412 W/kg


**Body Right/LTE Band 2 1RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm,  
dy=5mm, dz=5mm

Reference Value = 10.71 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.636 W/kg

**SAR(1 g) = 0.373 W/kg; SAR(10 g) = 0.218 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.409 W/kg

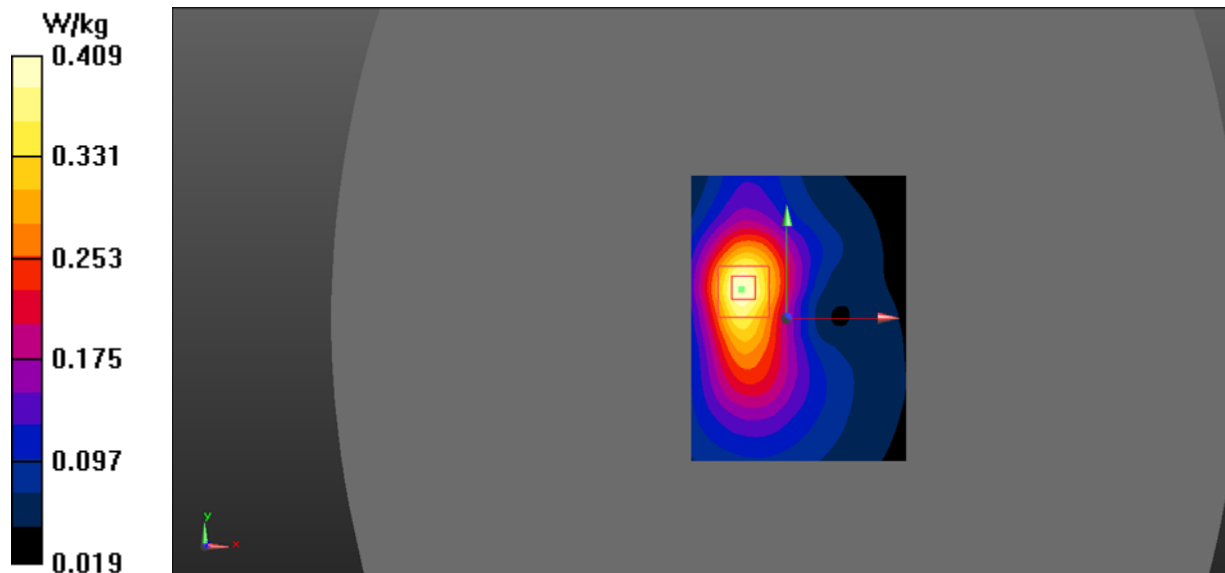

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.493$  S/m;  $\epsilon_r = 54.141$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.48, 7.48, 7.48) @ 1880 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Right/LTE Band 2 50%RB Mid/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.314 W/kg


**Body Right/LTE Band 2 50%RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.461 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.499 W/kg

**SAR(1 g) = 0.290 W/kg; SAR(10 g) = 0.170 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.315 W/kg

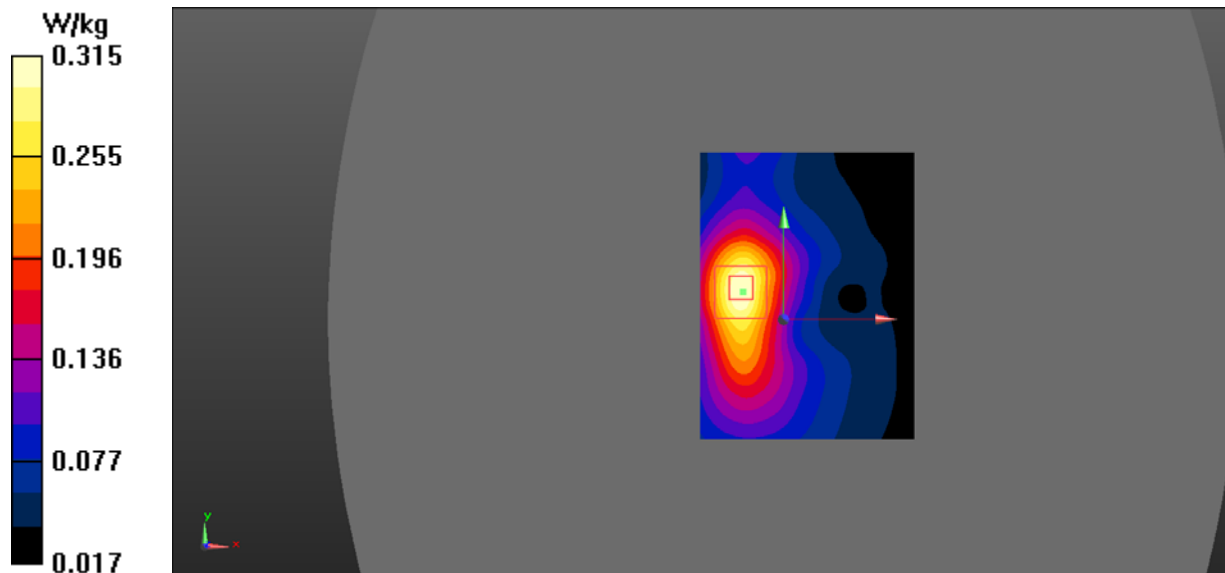

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1860 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1860$  MHz;  $\sigma = 1.488$  S/m;  $\epsilon_r = 54.668$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.48, 7.48, 7.48) @ 1860 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Bottom/LTE Band 2 1RB Low/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.12 W/kg


**Body Bottom/LTE Band 2 1RB Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.18 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.74 W/kg

**SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.548 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 1.13 W/kg

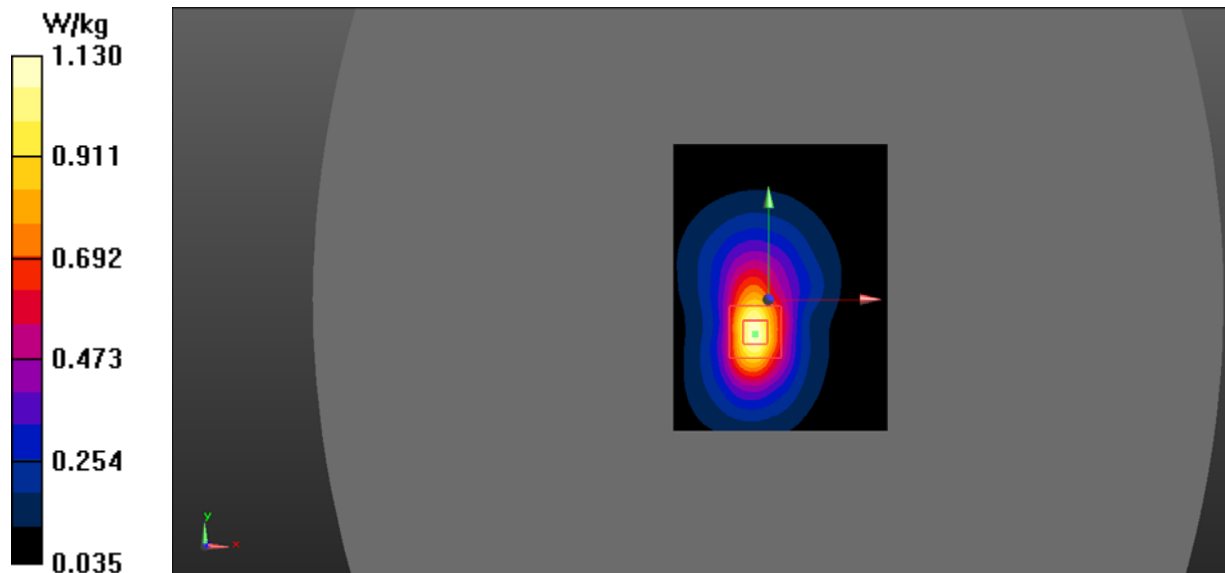



**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.493$  S/m;  $\epsilon_r = 54.141$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.48, 7.48, 7.48) @ 1880 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Bottom/LTE Band 2 1RB Mid/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.14 W/kg


**Body Bottom/LTE Band 2 1RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.35 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.82 W/kg

**SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.562 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 1.16 W/kg

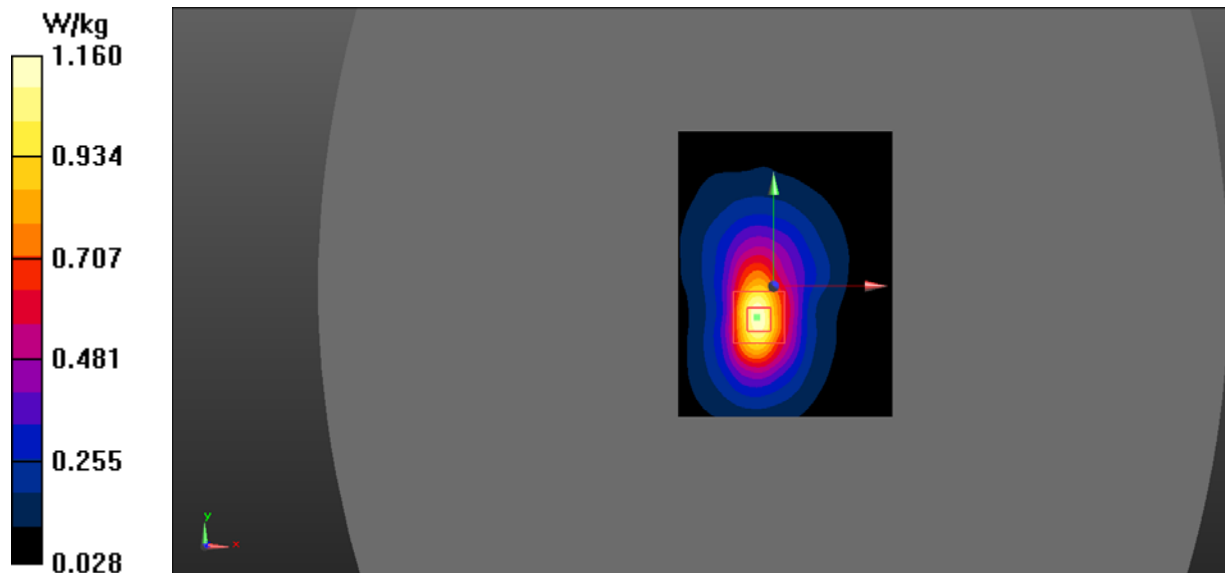

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1900 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.511$  S/m;  $\epsilon_r = 53.783$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.48, 7.48, 7.48) @ 1900 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Bottom/LTE Band 2 1RB High/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.16 W/kg


**Body Bottom/LTE Band 2 1RB High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.43 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.81 W/kg

**SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.555 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 1.16 W/kg

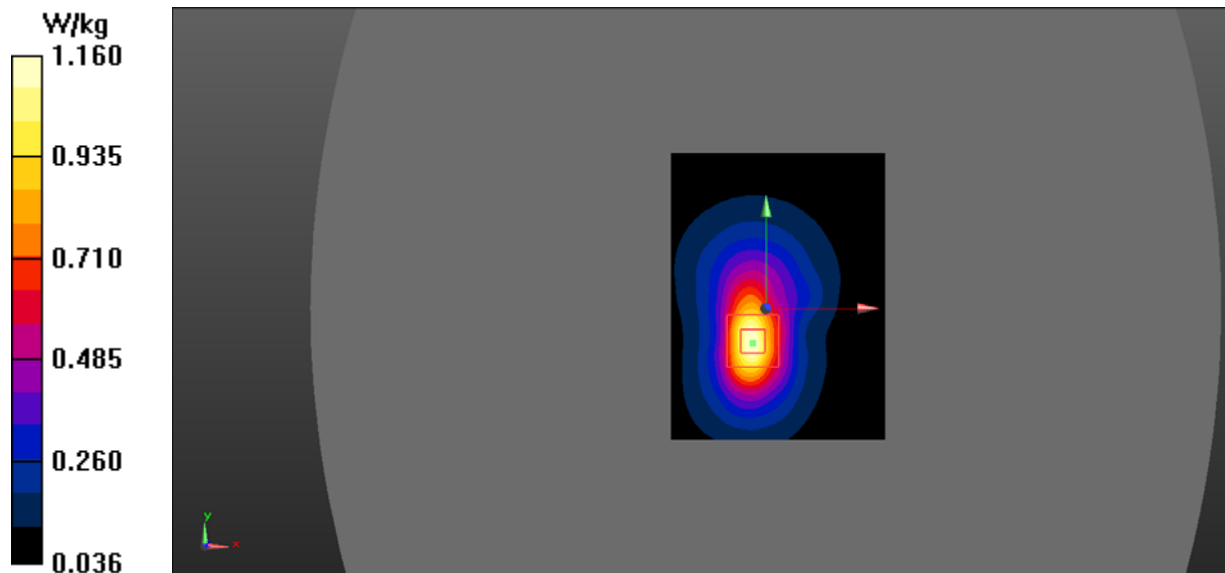

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1860 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1860$  MHz;  $\sigma = 1.488$  S/m;  $\epsilon_r = 54.668$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.48, 7.48, 7.48) @ 1860 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Bottom/LTE Band 2 50%RB Low/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.892 W/kg


**Body Bottom/LTE Band 2 50%RB Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.61 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.42 W/kg

**SAR(1 g) = 0.811 W/kg; SAR(10 g) = 0.436 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.907 W/kg

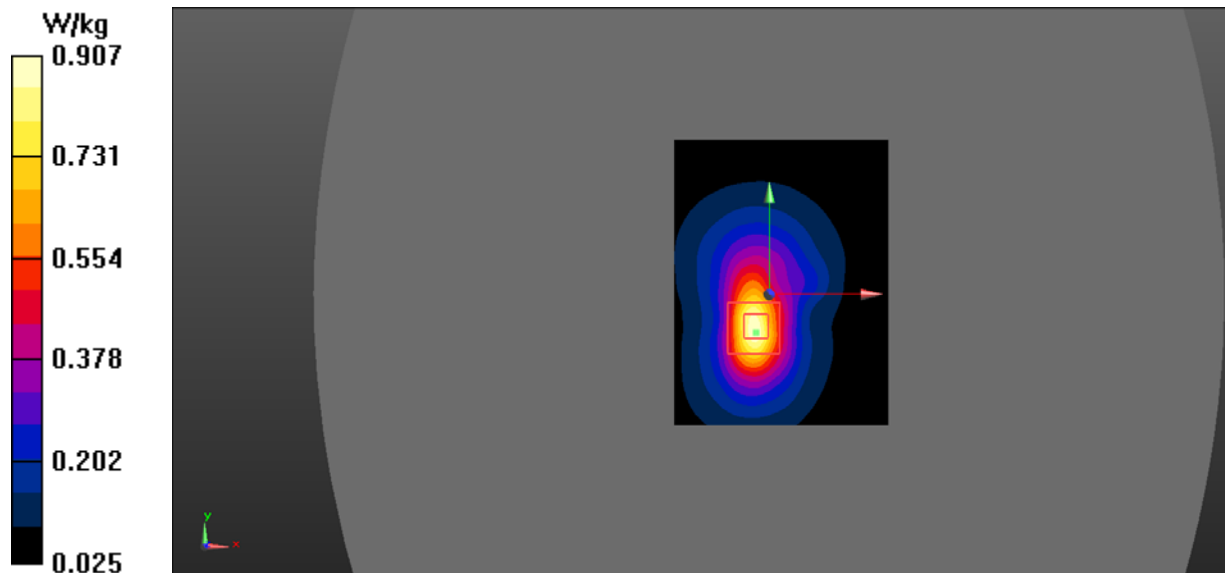

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.493$  S/m;  $\epsilon_r = 54.141$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.48, 7.48, 7.48) @ 1880 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Bottom/LTE Band 2 50%RB Mid/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.930 W/kg


**Body Bottom/LTE Band 2 50%RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.99 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.48 W/kg

**SAR(1 g) = 0.843 W/kg; SAR(10 g) = 0.454 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.941 W/kg

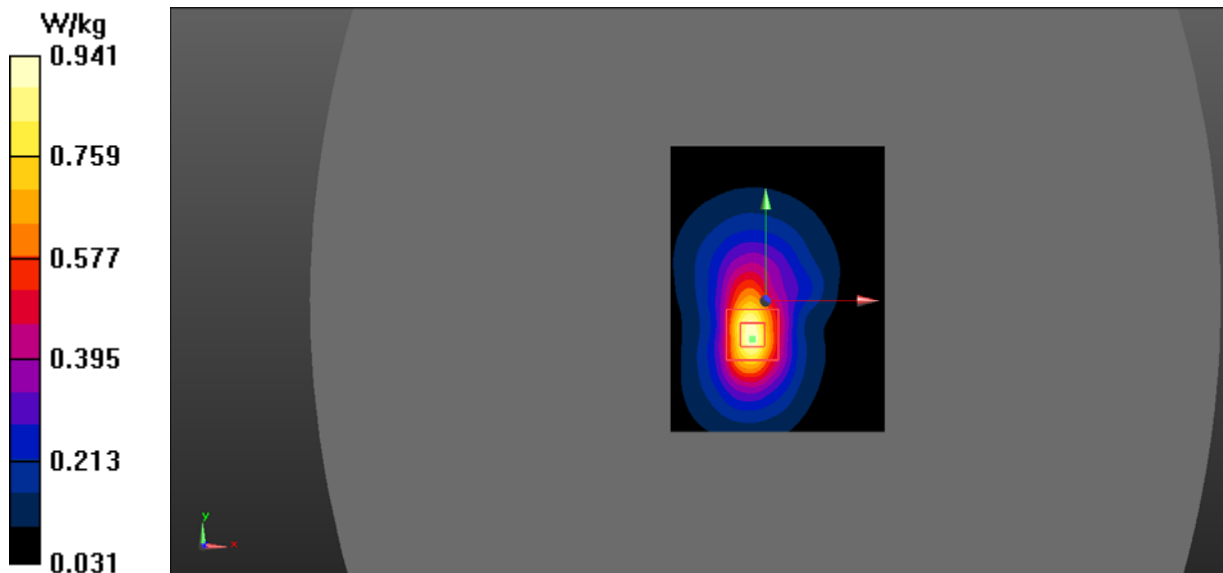

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1900 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.511$  S/m;  $\epsilon_r = 53.783$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.48, 7.48, 7.48) @ 1900 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Bottom/LTE Band 2 50%RB High/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.917 W/kg


**Body Bottom/LTE Band 2 50%RB High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.71 V/m; Power Drift = 0.27 dB

Peak SAR (extrapolated) = 1.45 W/kg

**SAR(1 g) = 0.839 W/kg; SAR(10 g) = 0.452 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.943 W/kg

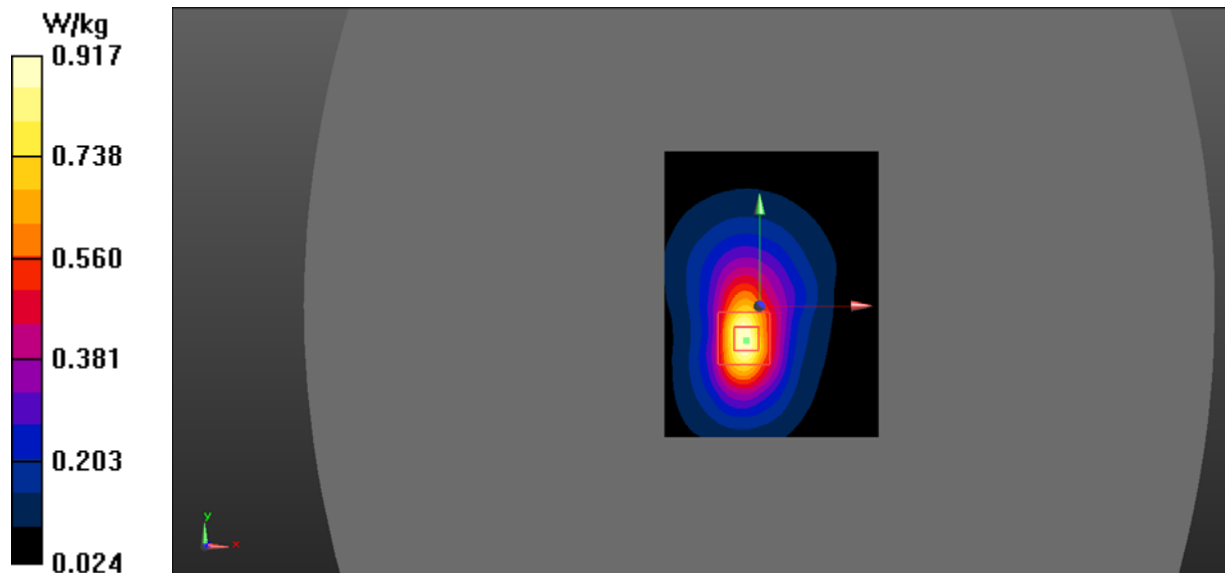

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1720$  MHz;  $\sigma = 1.367$  S/m;  $\epsilon_r = 41.342$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.2, 8.2, 8.2) @ 1720 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Left Head Cheek/LTE Band 4 1RB Low/Area Scan (101x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.748 W/kg


**Left Head Cheek/LTE Band 4 1RB Low/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.396 V/m; Power Drift = 0.042 dB

Peak SAR (extrapolated) = 0.969 W/kg

**SAR(1 g) = 0.700 W/kg; SAR(10 g) = 0.450 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.739 W/kg

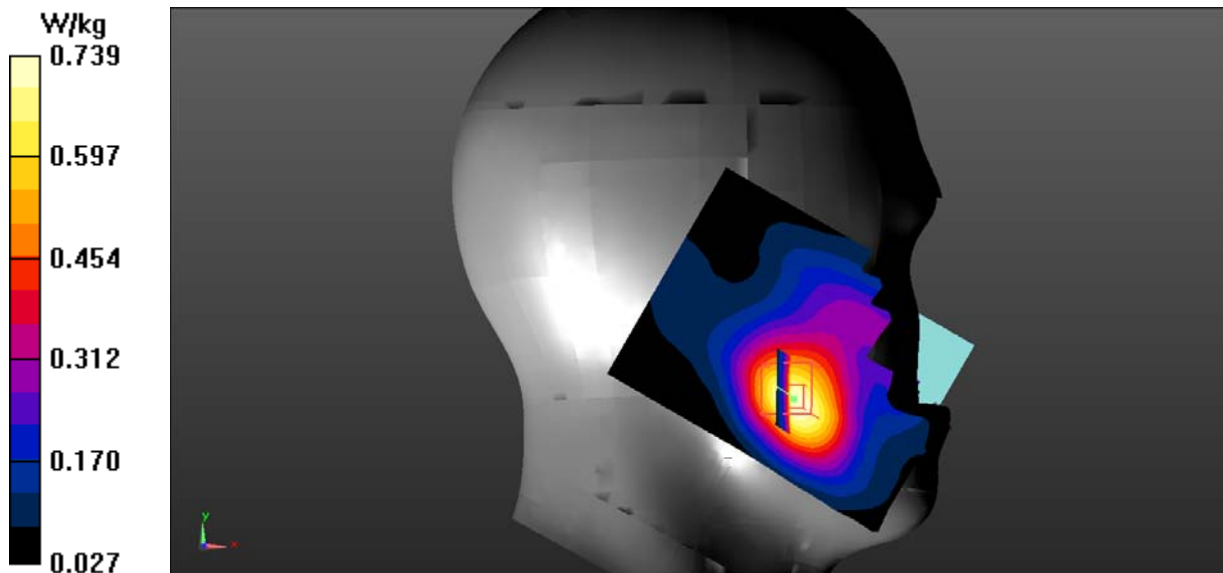

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1720$  MHz;  $\sigma = 1.367$  S/m;  $\epsilon_r = 41.342$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.2, 8.2, 8.2) @ 1720 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Left Head Cheek/LTE Band 4 50%RB Low/Area Scan (101x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.669 W/kg

**Left Head Cheek/LTE Band 4 50%RB Low/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.763 V/m; Power Drift = 0.047 dB

Peak SAR (extrapolated) = 0.866 W/kg

**SAR(1 g) = 0.613 W/kg; SAR(10 g) = 0.398 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.663 W/kg

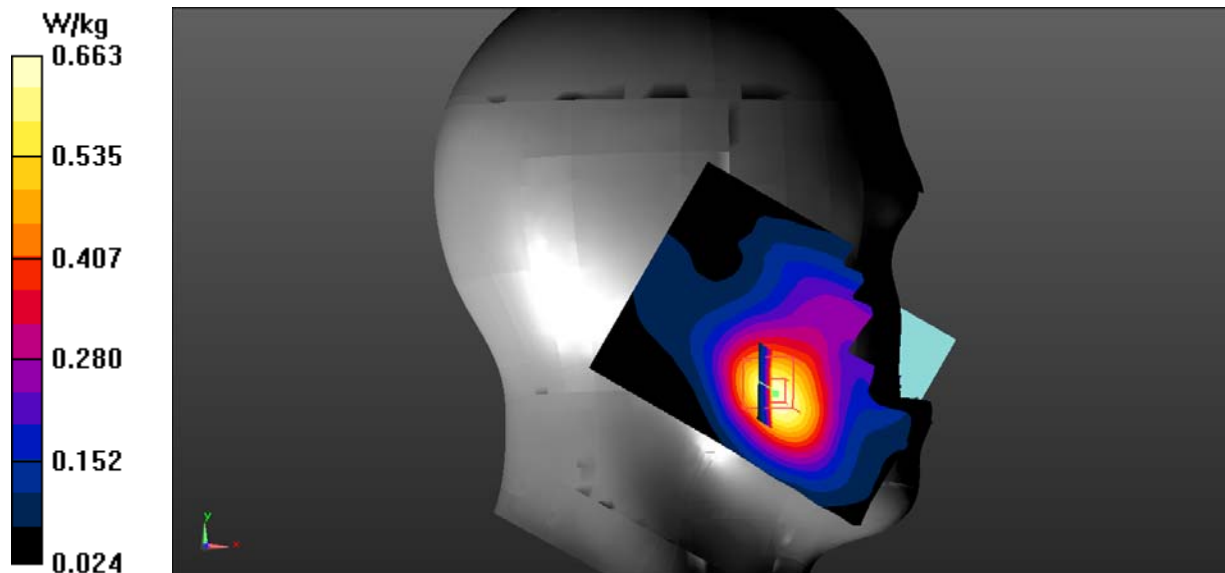

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1720$  MHz;  $\sigma = 1.367$  S/m;  $\epsilon_r = 41.342$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.2, 8.2, 8.2) @ 1720 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Left Head Tilt/LTE Band 4 1RB Low/Area Scan (101x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.197 W/kg


**Left Head Tilt/LTE Band 4 1RB Low/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.10 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.289 W/kg

**SAR(1 g) = 0.193 W/kg; SAR(10 g) = 0.119 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.197 W/kg

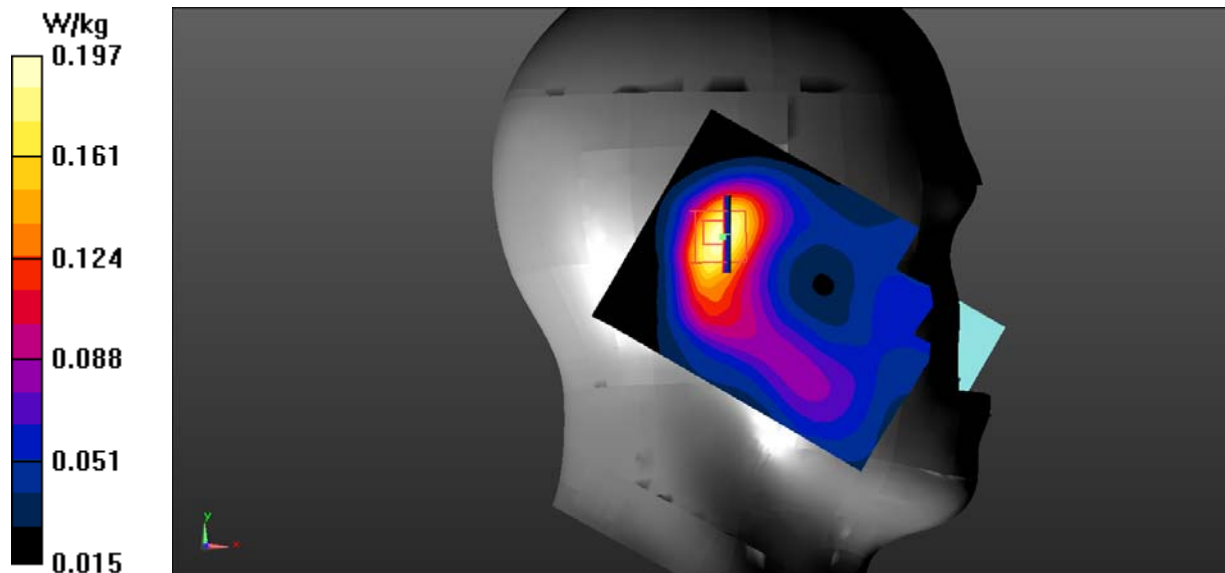



**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1720$  MHz;  $\sigma = 1.367$  S/m;  $\epsilon_r = 41.342$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.2, 8.2, 8.2) @ 1720 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Left Head Tilt/LTE Band 4 50%RB Low/Area Scan (101x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.166 W/kg


**Left Head Tilt/LTE Band 4 50%RB Low/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.20 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.241 W/kg

**SAR(1 g) = 0.162 W/kg; SAR(10 g) = 0.101 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.172 W/kg

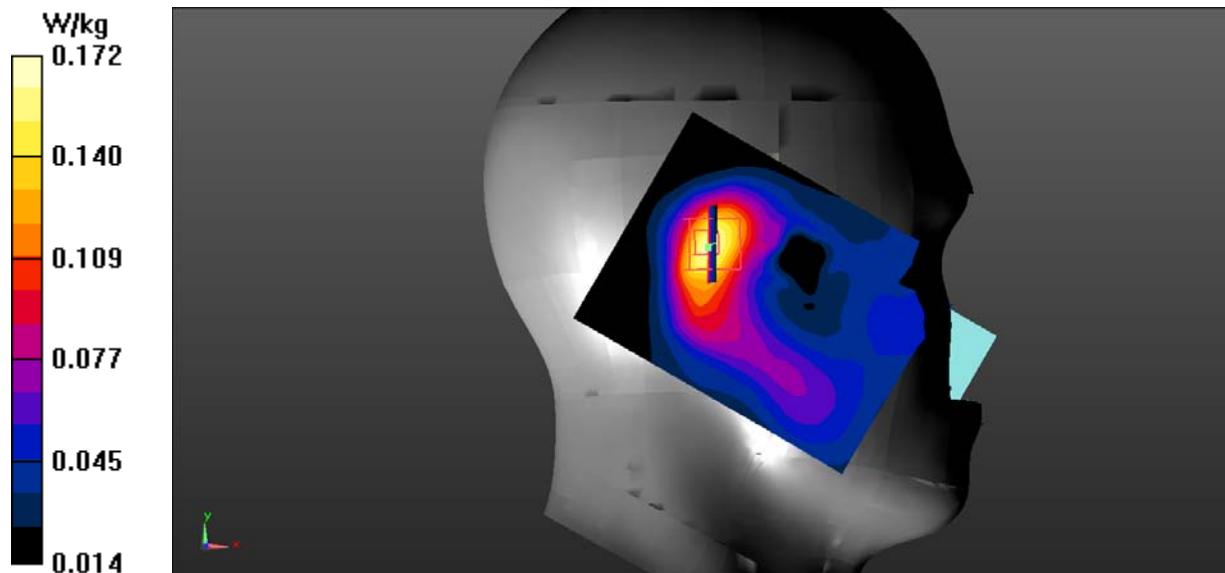

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1720$  MHz;  $\sigma = 1.367$  S/m;  $\epsilon_r = 41.342$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.2, 8.2, 8.2) @ 1720 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Right Head Cheek/LTE Band 4 1RB Low/Area Scan (101x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.552 W/kg

**Right Head Cheek/LTE Band 4 1RB Low/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.944 V/m; Power Drift = 0.031 dB

Peak SAR (extrapolated) = 0.773 W/kg

**SAR(1 g) = 0.536 W/kg; SAR(10 g) = 0.344 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.551 W/kg

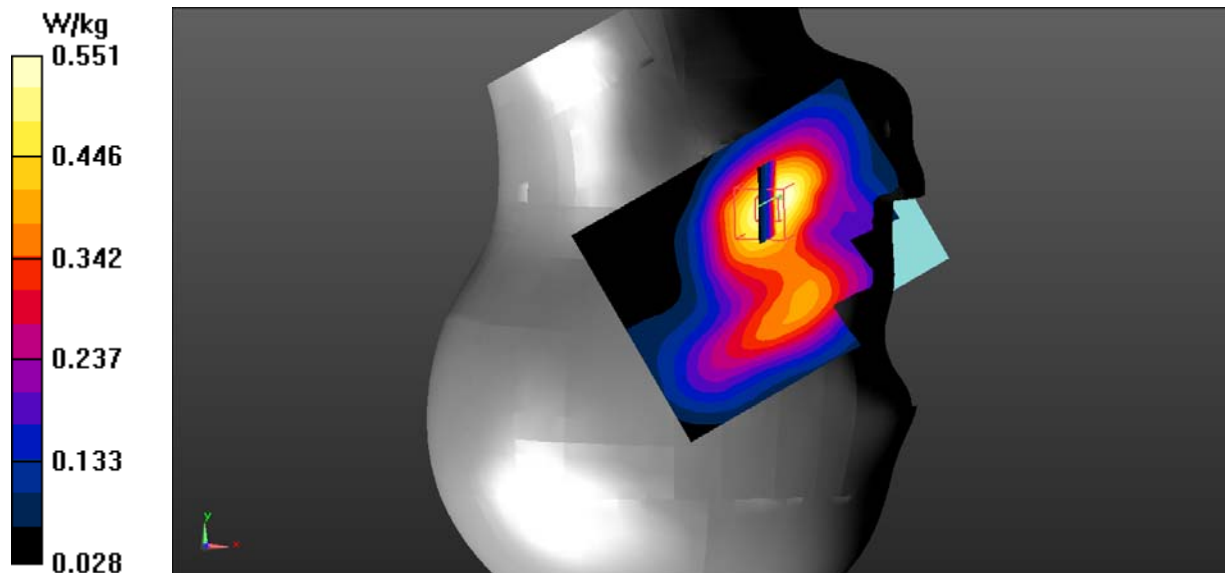

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1720$  MHz;  $\sigma = 1.367$  S/m;  $\epsilon_r = 41.342$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.2, 8.2, 8.2) @ 1720 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Right Head Cheek/LTE Band 4 50%RB Low/Area Scan (101x131x1):** Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 0.457 W/kg

**Right Head Cheek/LTE Band 4 50%RB Low/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:


$dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 6.911 V/m; Power Drift = 0.157 dB

Peak SAR (extrapolated) = 0.630 W/kg

**SAR(1 g) = 0.437 W/kg; SAR(10 g) = 0.281 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.456 W/kg

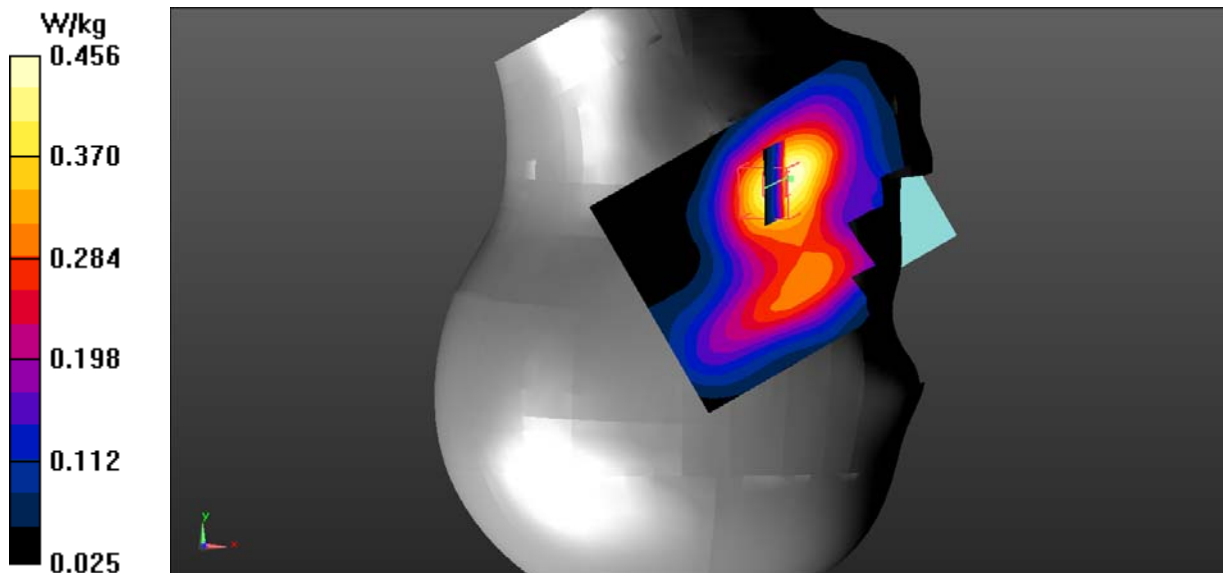

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1720$  MHz;  $\sigma = 1.367$  S/m;  $\epsilon_r = 41.342$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.2, 8.2, 8.2) @ 1720 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Right Head Tilt/LTE Band 4 1RB Low/Area Scan (101x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.200 W/kg


**Right Head Tilt/LTE Band 4 1RB Low/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.75 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.267 W/kg

**SAR(1 g) = 0.190 W/kg; SAR(10 g) = 0.126 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.196 W/kg

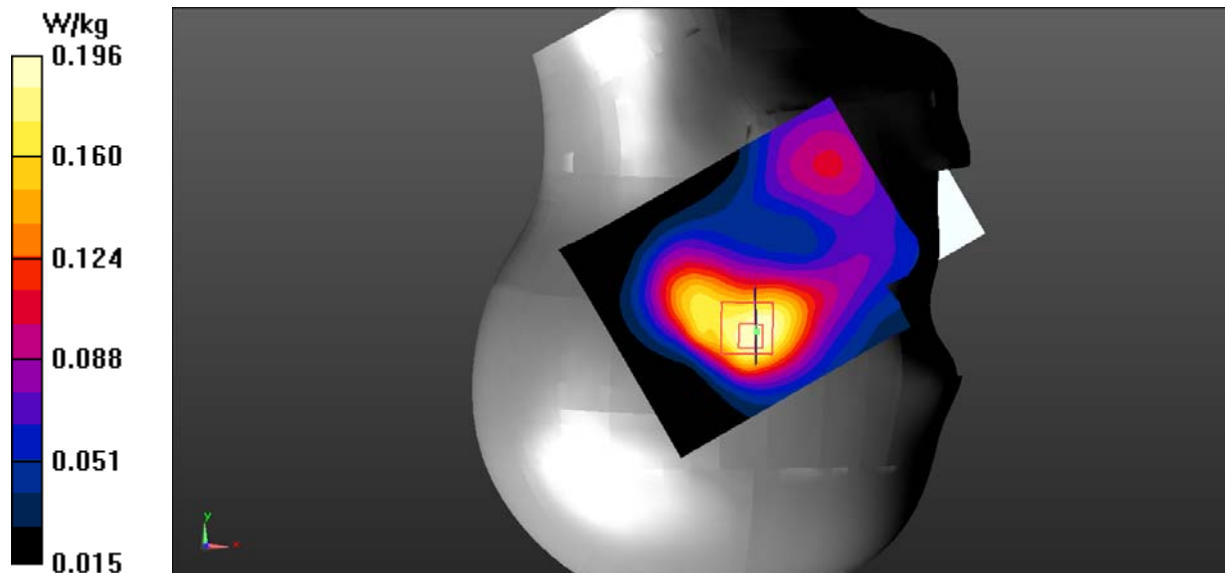

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1720$  MHz;  $\sigma = 1.367$  S/m;  $\epsilon_r = 41.342$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.2, 8.2, 8.2) @ 1720 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Right Head Tilt/LTE Band 4 50%RB Low/Area Scan (101x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.160 W/kg

**Right Head Tilt/LTE Band 4 50%RB Low/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.515 V/m; Power Drift = 0.031 dB

Peak SAR (extrapolated) = 0.216 W/kg

**SAR(1 g) = 0.153 W/kg; SAR(10 g) = 0.102 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.158 W/kg

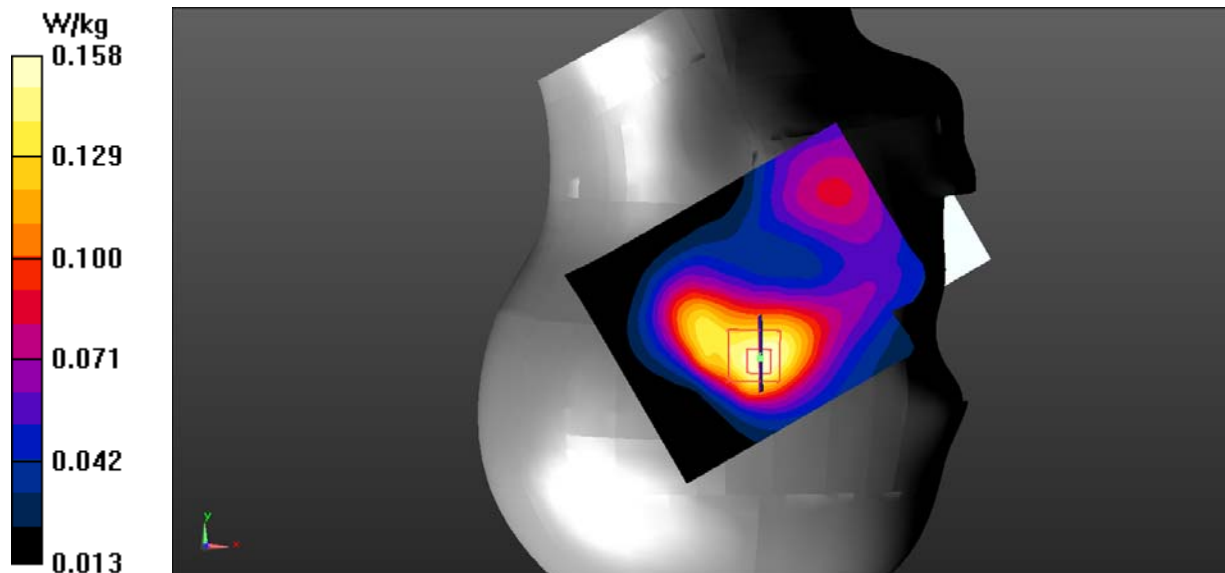

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1720$  MHz;  $\sigma = 1.469$  S/m;  $\epsilon_r = 54.811$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.88, 7.88, 7.88) @ 1720 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Back/LTE Band 4 1RB Low/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.846 W/kg


**Body Back/LTE Band 4 1RB Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.29 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.20 W/kg

**SAR(1 g) = 0.762 W/kg; SAR(10 g) = 0.476 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.813 W/kg

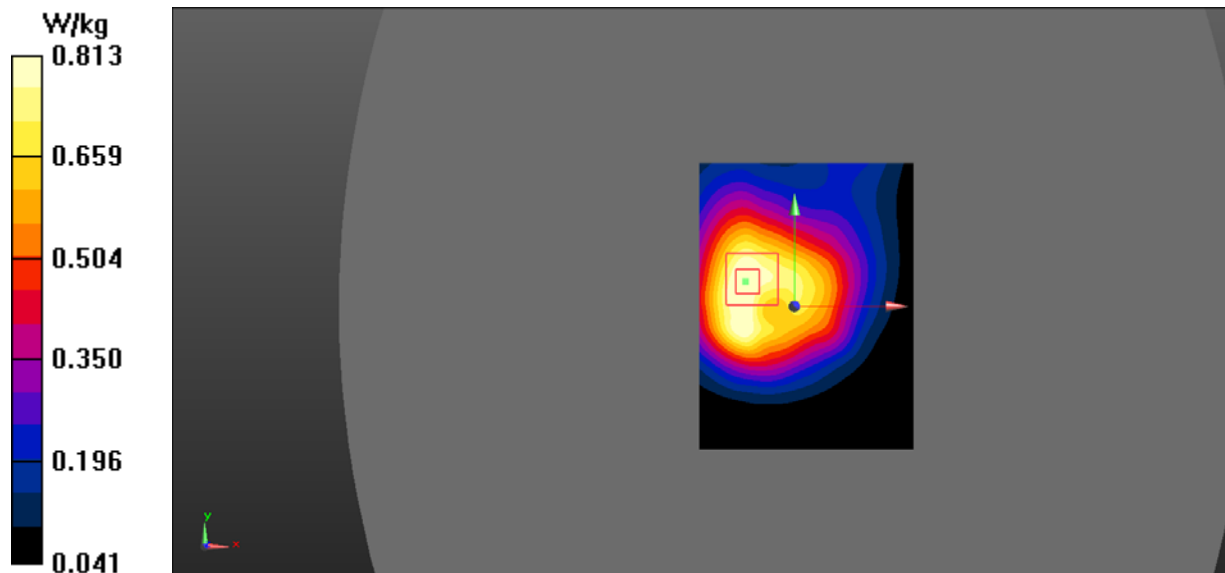

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1720$  MHz;  $\sigma = 1.469$  S/m;  $\epsilon_r = 54.811$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.88, 7.88, 7.88) @ 1720 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Back/LTE Band 4 50%RB Low/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.662 W/kg


**Body Back/LTE Band 4 50%RB Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.33 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.973 W/kg

**SAR(1 g) = 0.616 W/kg; SAR(10 g) = 0.384 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.654 W/kg

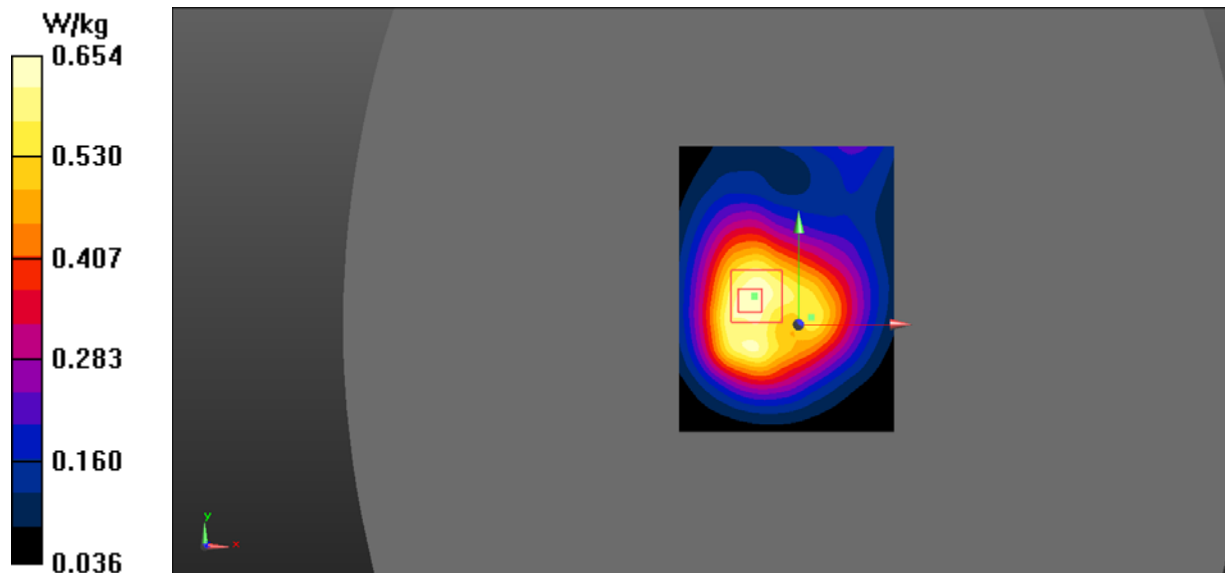

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1720$  MHz;  $\sigma = 1.469$  S/m;  $\epsilon_r = 54.811$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.88, 7.88, 7.88) @ 1720 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Right/LTE Band 4 1RB Low/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm,  
dy=1.500 mm

Maximum value of SAR (interpolated) = 0.340 W/kg


**Body Right/LTE Band 4 1RB Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm,  
dy=5mm, dz=5mm

Reference Value = 13.50 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.494 W/kg

**SAR(1 g) = 0.310 W/kg; SAR(10 g) = 0.185 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.332 W/kg

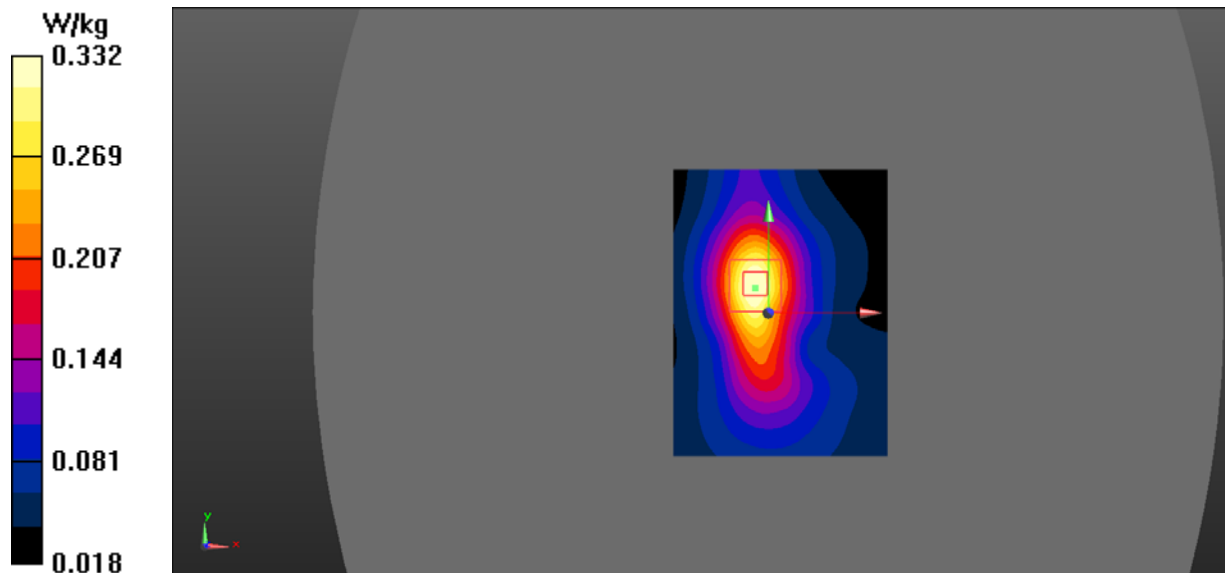



**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1720$  MHz;  $\sigma = 1.469$  S/m;  $\epsilon_r = 54.811$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.88, 7.88, 7.88) @ 1720 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Right/LTE Band 4 50%RB Low/Area Scan (61x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.280 W/kg


**Body Right/LTE Band 4 50%RB Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.21 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.407 W/kg

**SAR(1 g) = 0.254 W/kg; SAR(10 g) = 0.152 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.273 W/kg

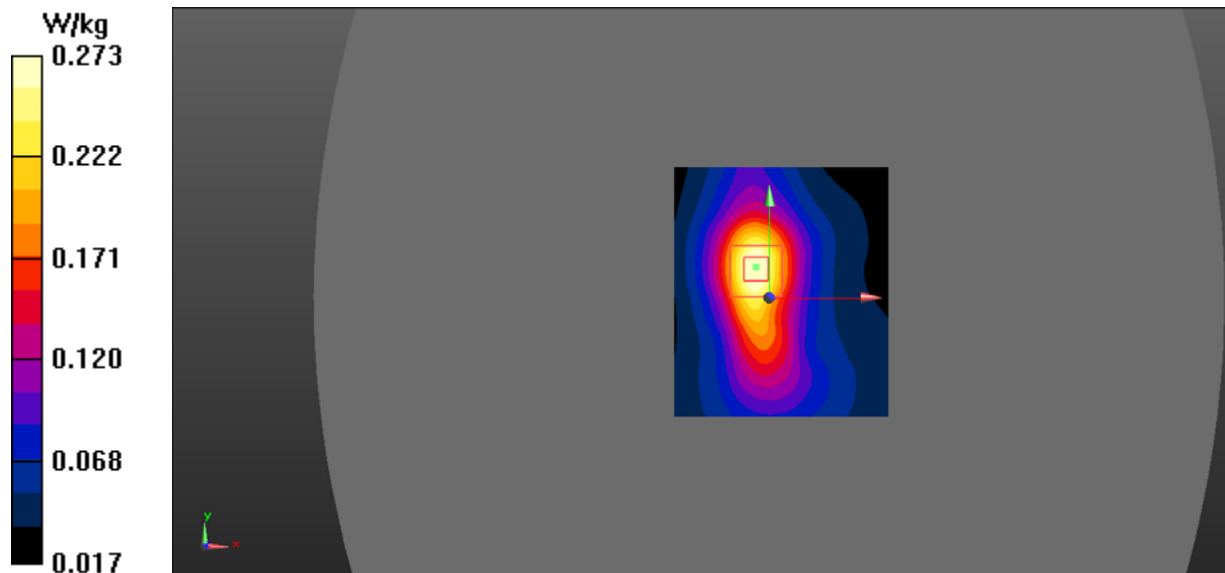

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1720$  MHz;  $\sigma = 1.469$  S/m;  $\epsilon_r = 54.811$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.88, 7.88, 7.88) @ 1720 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Bottom/LTE Band 4 1RB Low/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.665 W/kg


**Body Bottom/LTE Band 4 1RB Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.45 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.05 W/kg

**SAR(1 g) = 0.635 W/kg; SAR(10 g) = 0.360 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.697 W/kg

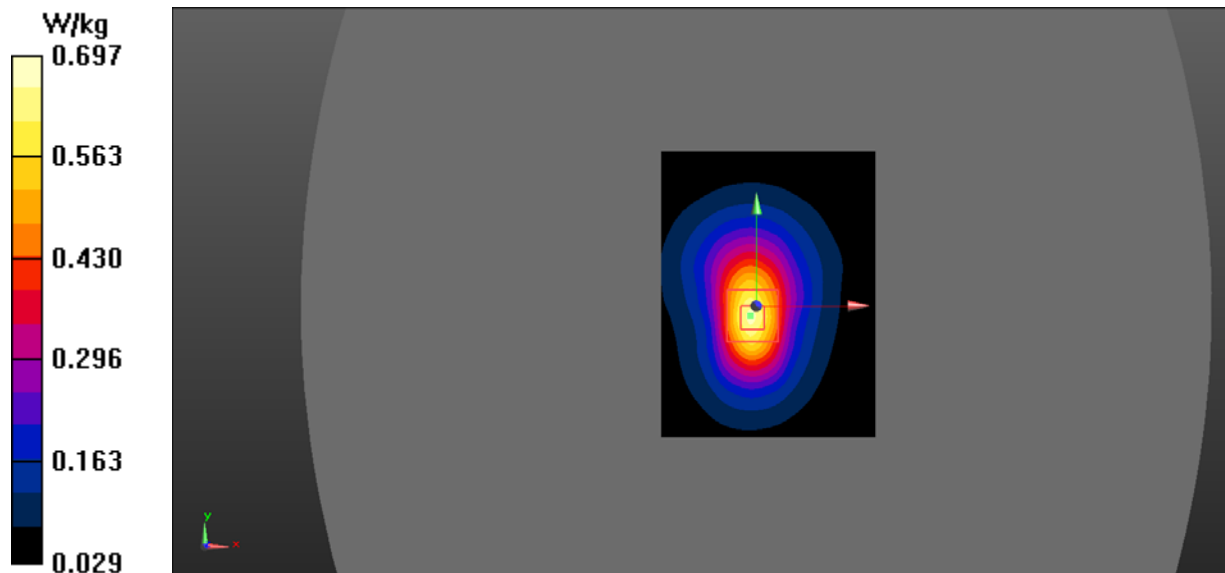

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1720$  MHz;  $\sigma = 1.469$  S/m;  $\epsilon_r = 54.811$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.88, 7.88, 7.88) @ 1720 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Bottom/LTE Band 4 50%RB Low/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.541 W/kg


**Body Bottom/LTE Band 4 50%RB Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.99 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.837 W/kg

**SAR(1 g) = 0.511 W/kg; SAR(10 g) = 0.290 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.559 W/kg

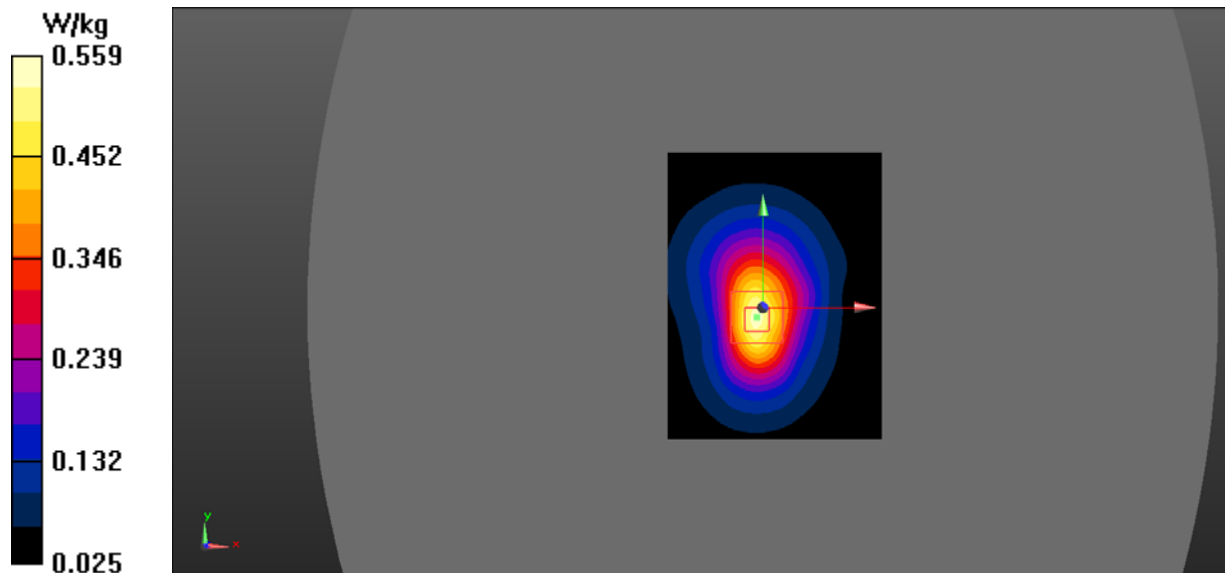

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.891$  S/m;  $\epsilon_r = 42.262$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.46, 9.46, 9.46) @ 836.5 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Left Head Cheek/LTE Band 5 1RB Mid/Area Scan (61x81x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.361 W/kg


**Left Head Cheek/LTE Band 5 1RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 10.91 V/m; Power Drift = 0.029 dB

Peak SAR (extrapolated) = 0.430 W/kg

**SAR(1 g) = 0.348 W/kg; SAR(10 g) = 0.265 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.360 W/kg

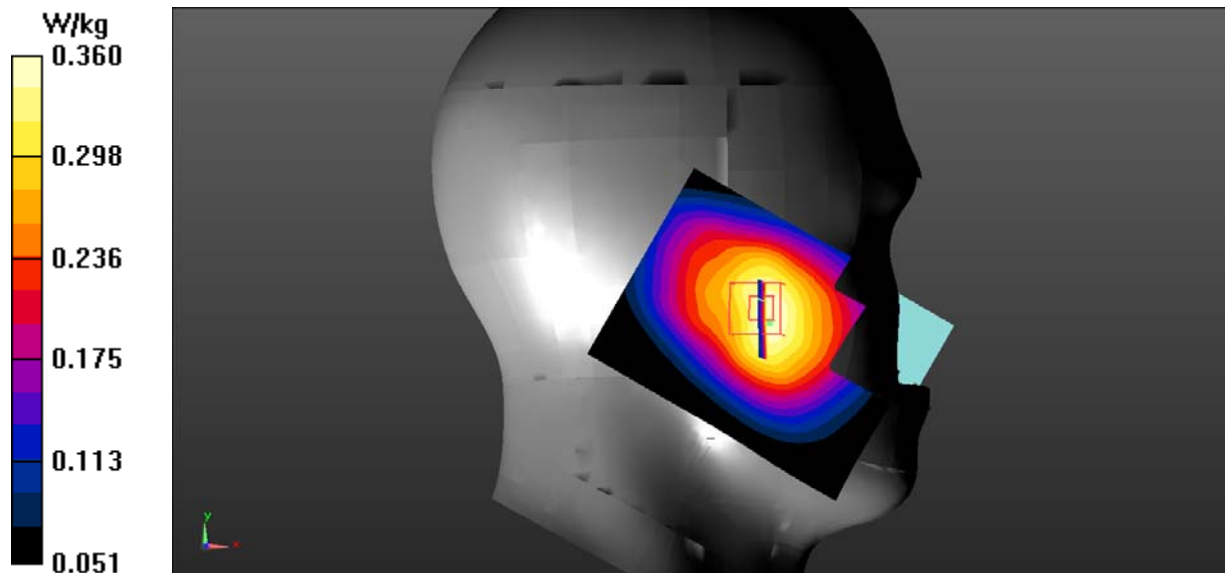

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.891$  S/m;  $\epsilon_r = 42.262$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.46, 9.46, 9.46) @ 836.5 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Left Head Cheek/LTE Band 5 50%RB Mid/Area Scan (61x81x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.298 W/kg

**Left Head Cheek/LTE Band 5 50%RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:


$dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 9.706 V/m; Power Drift = 0.134 dB

Peak SAR (extrapolated) = 0.356 W/kg

**SAR(1 g) = 0.284 W/kg; SAR(10 g) = 0.215 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.294 W/kg

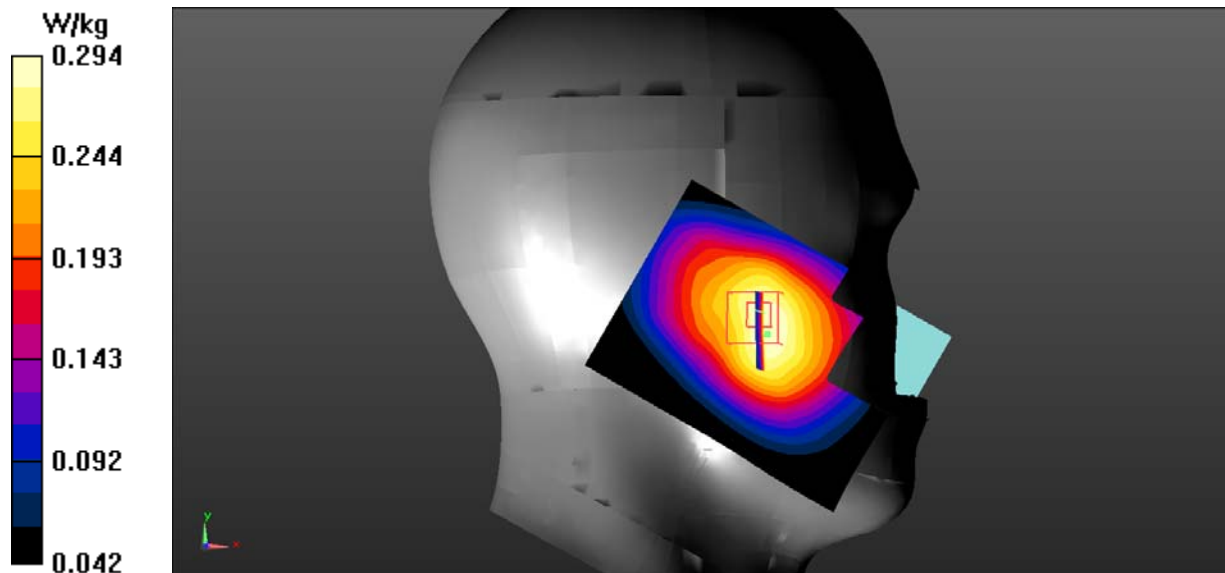

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.891$  S/m;  $\epsilon_r = 42.262$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.46, 9.46, 9.46) @ 836.5 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Left Head Tilt/LTE Band 5 1RB Mid/Area Scan (61x81x1):** Interpolated grid:  $dx=1.500$  mm,  
 $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.272 W/kg


**Left Head Tilt/LTE Band 5 1RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  
 $dy=8$ mm,  $dz=5$ mm

Reference Value = 9.701 V/m; Power Drift = 0.024 dB

Peak SAR (extrapolated) = 0.316 W/kg

**SAR(1 g) = 0.262 W/kg; SAR(10 g) = 0.204 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.271 W/kg

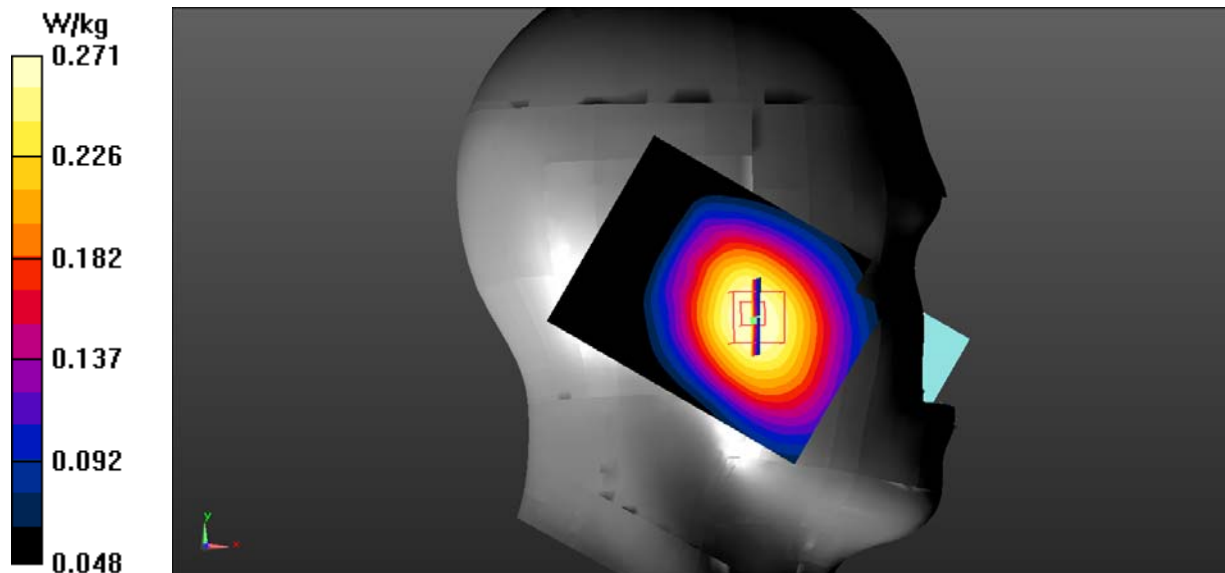

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.891$  S/m;  $\epsilon_r = 42.262$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.46, 9.46, 9.46) @ 836.5 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Left Head Tilt/LTE Band 5 50%RB Mid/Area Scan (61x81x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.219 W/kg


**Left Head Tilt/LTE Band 5 50%RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 8.762 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.251 W/kg

**SAR(1 g) = 0.209 W/kg; SAR(10 g) = 0.163 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.216 W/kg

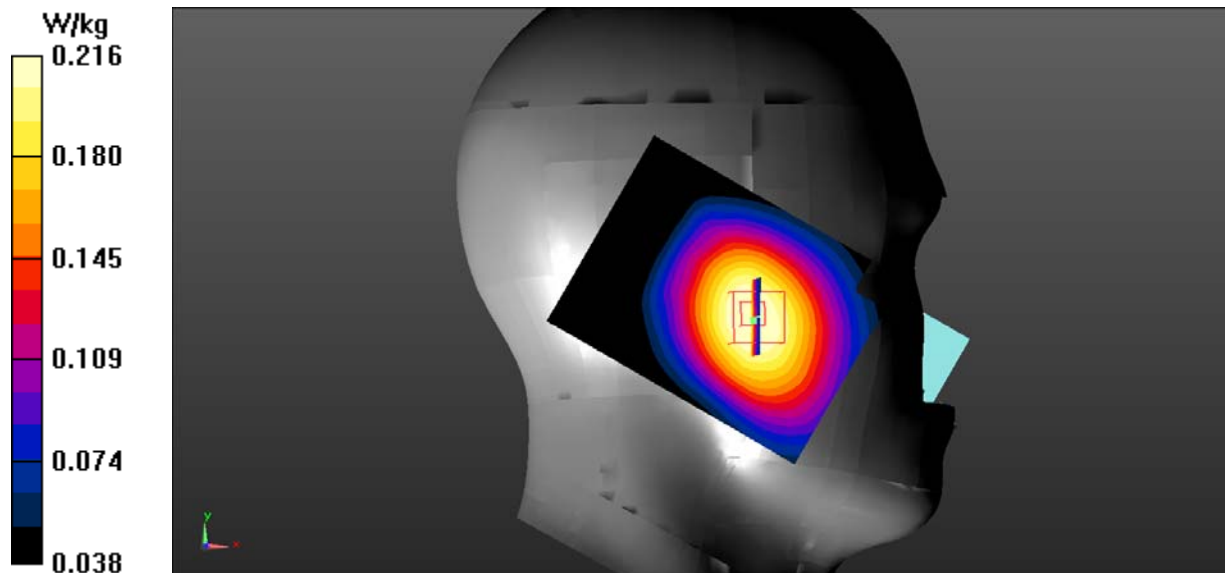

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.891$  S/m;  $\epsilon_r = 42.262$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.46, 9.46, 9.46) @ 836.5 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Right Head Cheek/LTE Band 5 1RB Mid/Area Scan (101x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.340 W/kg

**Right Head Cheek/LTE Band 5 1RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.03 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.410 W/kg

**SAR(1 g) = 0.326 W/kg; SAR(10 g) = 0.245 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.340 W/kg

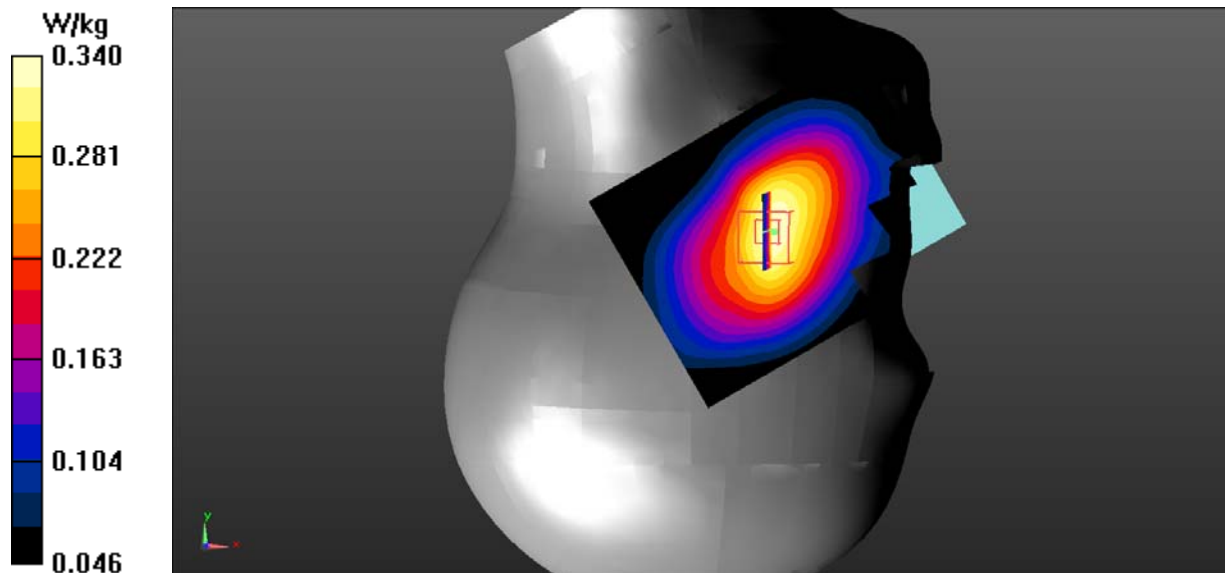



**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.891$  S/m;  $\epsilon_r = 42.262$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.46, 9.46, 9.46) @ 836.5 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Right Head Cheek/LTE Band 5 50%RB Mid/Area Scan (101x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.361 W/kg


**Right Head Cheek/LTE Band 5 50%RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.121 V/m; Power Drift = 0.60 dB

Peak SAR (extrapolated) = 0.444 W/kg

**SAR(1 g) = 0.345 W/kg; SAR(10 g) = 0.257 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.363 W/kg

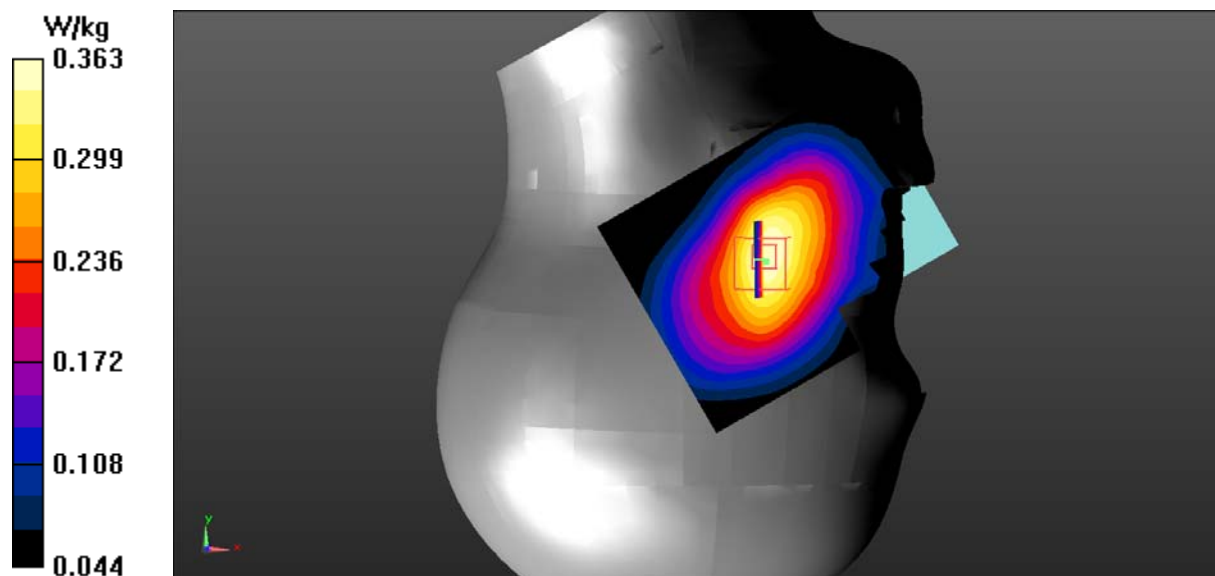

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.891$  S/m;  $\epsilon_r = 42.262$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.46, 9.46, 9.46) @ 836.5 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Right Head Tilt/LTE Band 5 1RB Mid/Area Scan (101x131x1):** Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 0.331 W/kg


**Right Head Tilt/LTE Band 5 1RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 13.14 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.394 W/kg

**SAR(1 g) = 0.325 W/kg; SAR(10 g) = 0.252 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.335 W/kg

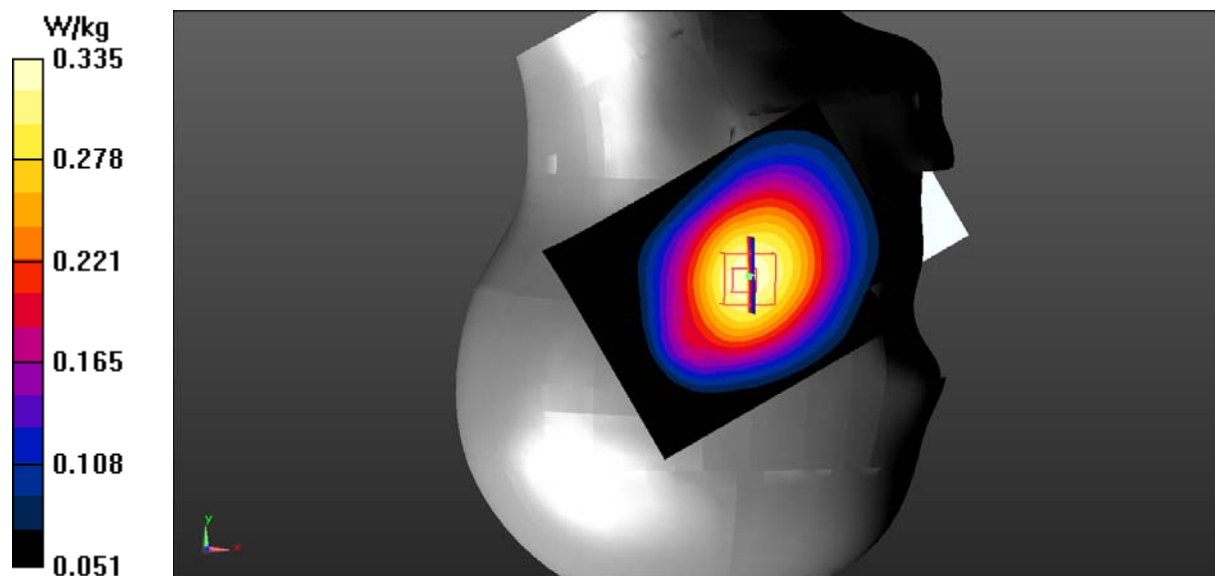

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.891$  S/m;  $\epsilon_r = 42.262$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.46, 9.46, 9.46) @ 836.5 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Right Head Tilt/LTE Band 5 50%RB Mid/Area Scan (101x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.270 W/kg

**Right Head Tilt/LTE Band 5 50%RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.86 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.326 W/kg

**SAR(1 g) = 0.268 W/kg; SAR(10 g) = 0.207 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.275 W/kg

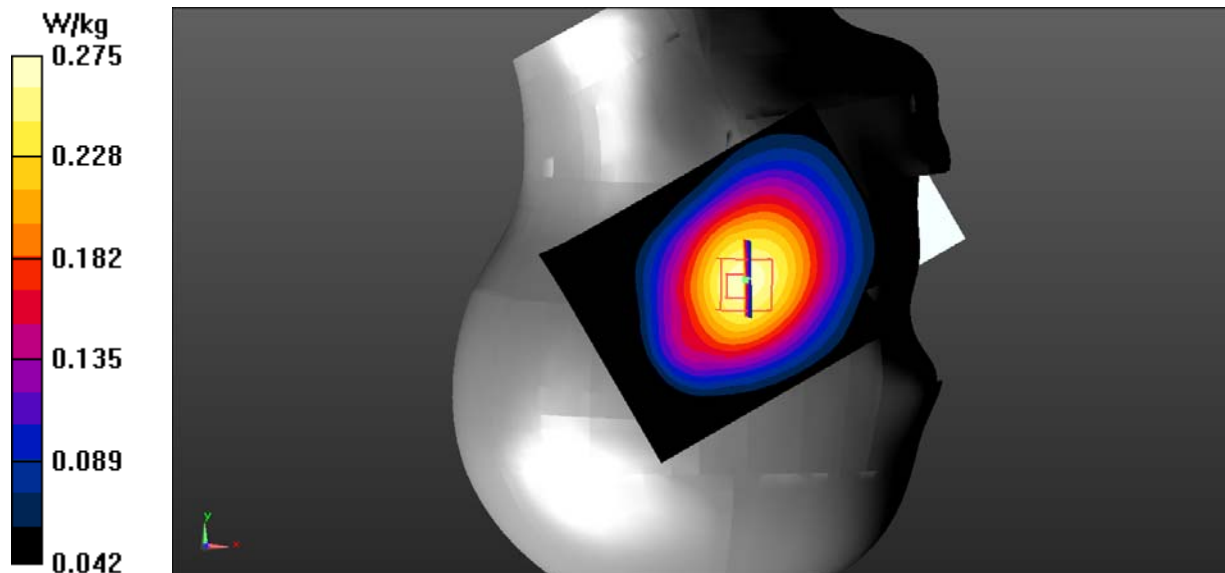

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.961$  S/m;  $\epsilon_r = 56.879$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.54, 9.54, 9.54) @ 836.5 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Back/LTE Band 5 1RB Mid/Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.474 W/kg


**Body Back/LTE Band 5 1RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.74 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.584 W/kg

**SAR(1 g) = 0.453 W/kg; SAR(10 g) = 0.340 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.476 W/kg

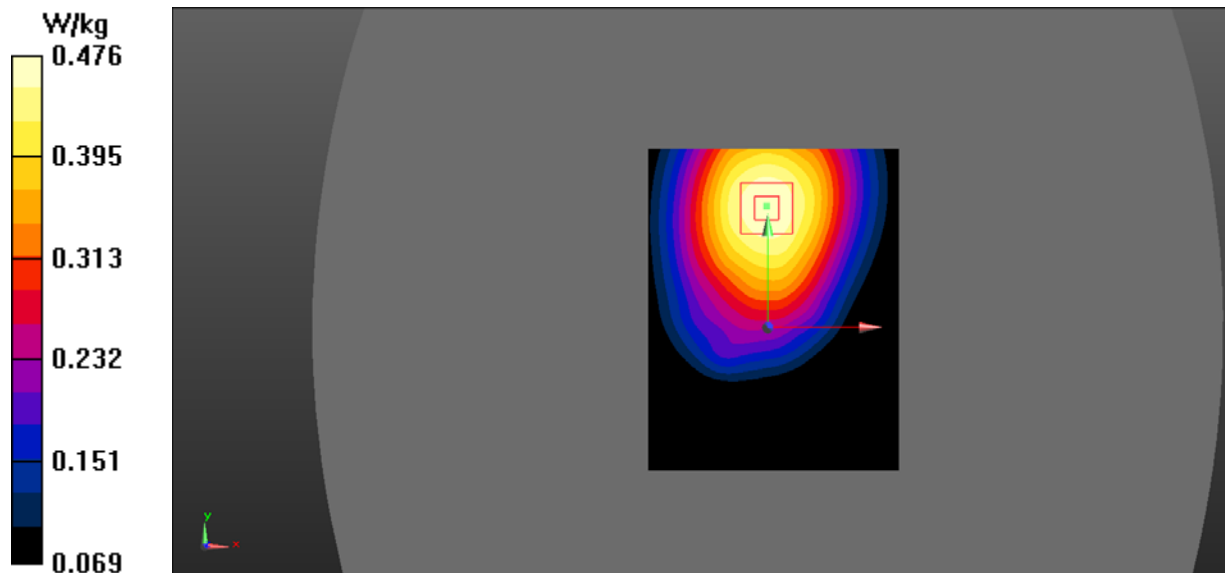

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.961$  S/m;  $\epsilon_r = 56.879$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.54, 9.54, 9.54) @ 836.5 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Back/LTE Band 5 50%RB Mid/Area Scan (61x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.377 W/kg


**Body Back/LTE Band 5 50%RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.99 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.467 W/kg

**SAR(1 g) = 0.361 W/kg; SAR(10 g) = 0.271 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.379 W/kg

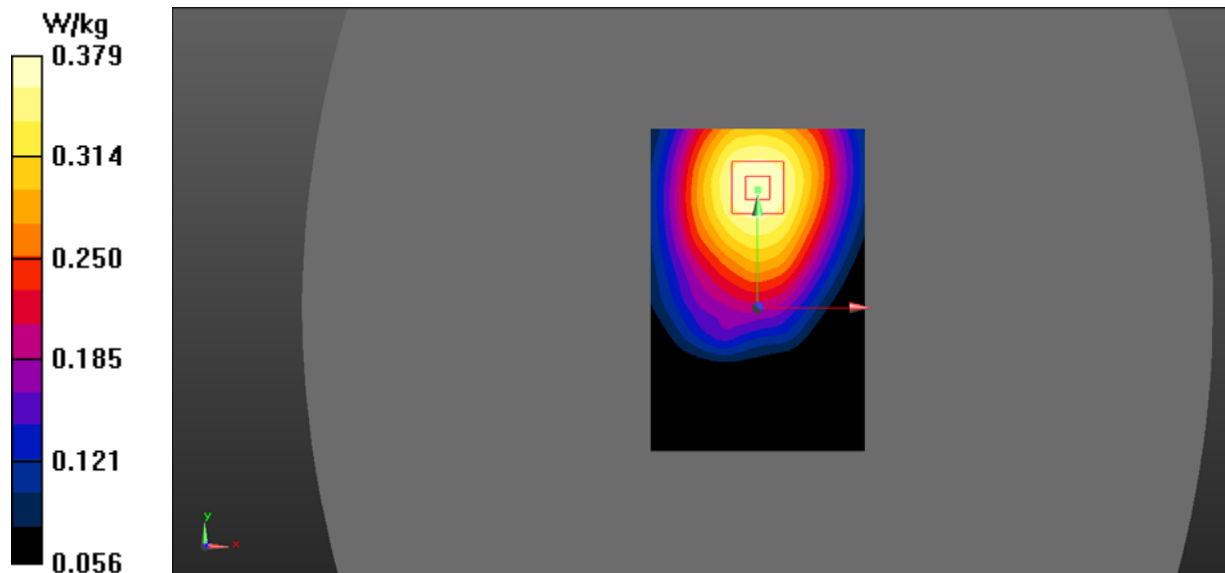

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.961$  S/m;  $\epsilon_r = 56.879$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.54, 9.54, 9.54) @ 836.5 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Right/LTE Band 5 1RB Mid/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.337 W/kg


**Body Right/LTE Band 5 1RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.77 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.441 W/kg

**SAR(1 g) = 0.316 W/kg; SAR(10 g) = 0.222 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.335 W/kg

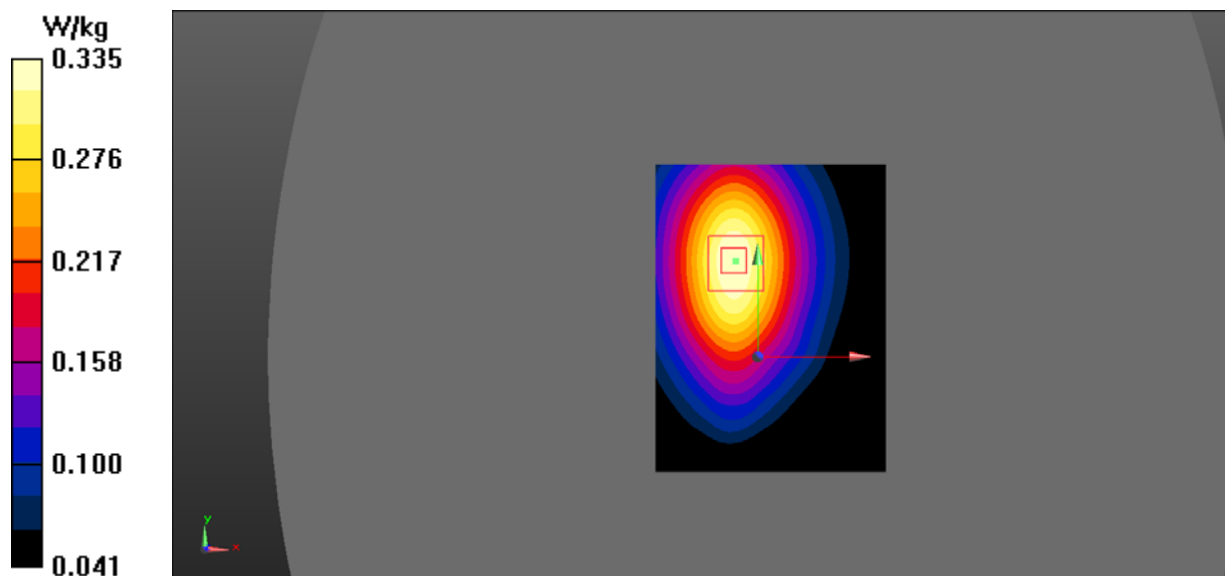

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.961$  S/m;  $\epsilon_r = 56.879$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.54, 9.54, 9.54) @ 836.5 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Right/LTE Band 5 50%RB Mid/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.278 W/kg


**Body Right/LTE Band 5 50%RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.23 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.365 W/kg

**SAR(1 g) = 0.260 W/kg; SAR(10 g) = 0.182 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.276 W/kg

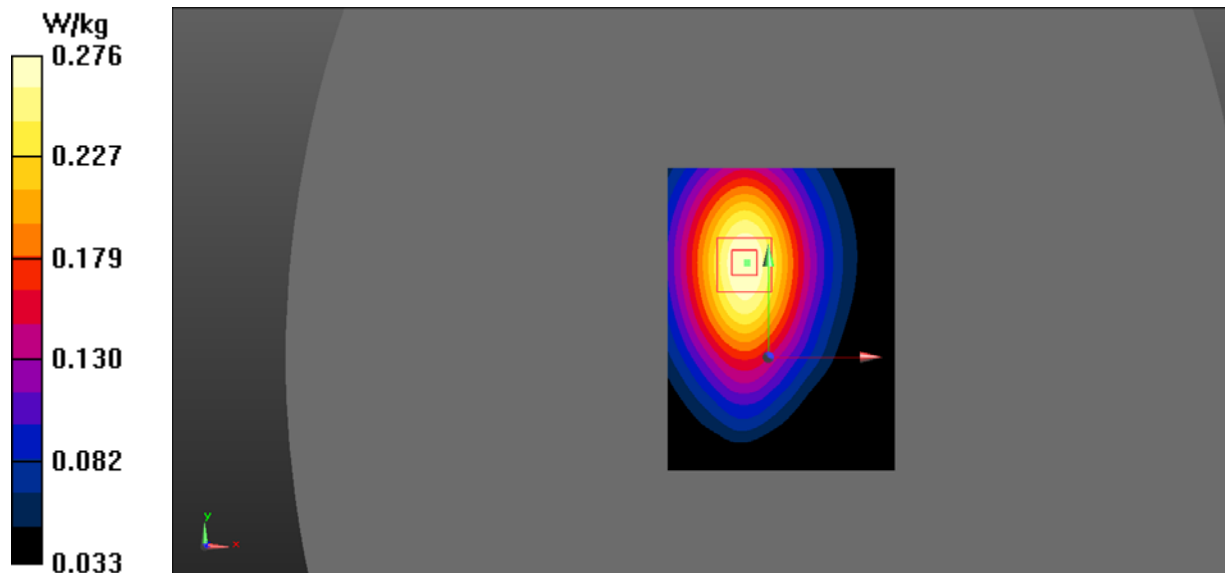

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.961$  S/m;  $\epsilon_r = 56.879$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.54, 9.54, 9.54) @ 836.5 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Bottom/LTE Band 5 1RB Mid/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.117 W/kg


**Body Bottom/LTE Band 5 1RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.70 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.174 W/kg

**SAR(1 g) = 0.108 W/kg; SAR(10 g) = 0.069 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.116 W/kg

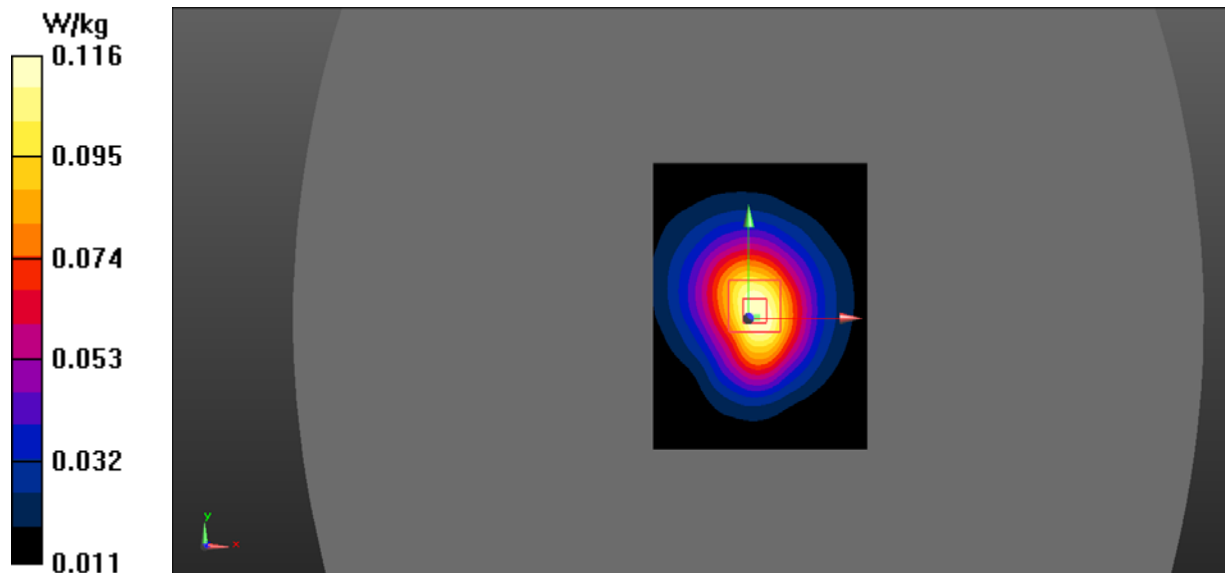



**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.961$  S/m;  $\epsilon_r = 56.879$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.54, 9.54, 9.54) @ 836.5 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Bottom/LTE Band 5 50%RB Mid/Area Scan (61x81x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.0961 W/kg


**Body Bottom/LTE Band 5 50%RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 9.706 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.142 W/kg

**SAR(1 g) = 0.089 W/kg; SAR(10 g) = 0.058 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.0956 W/kg

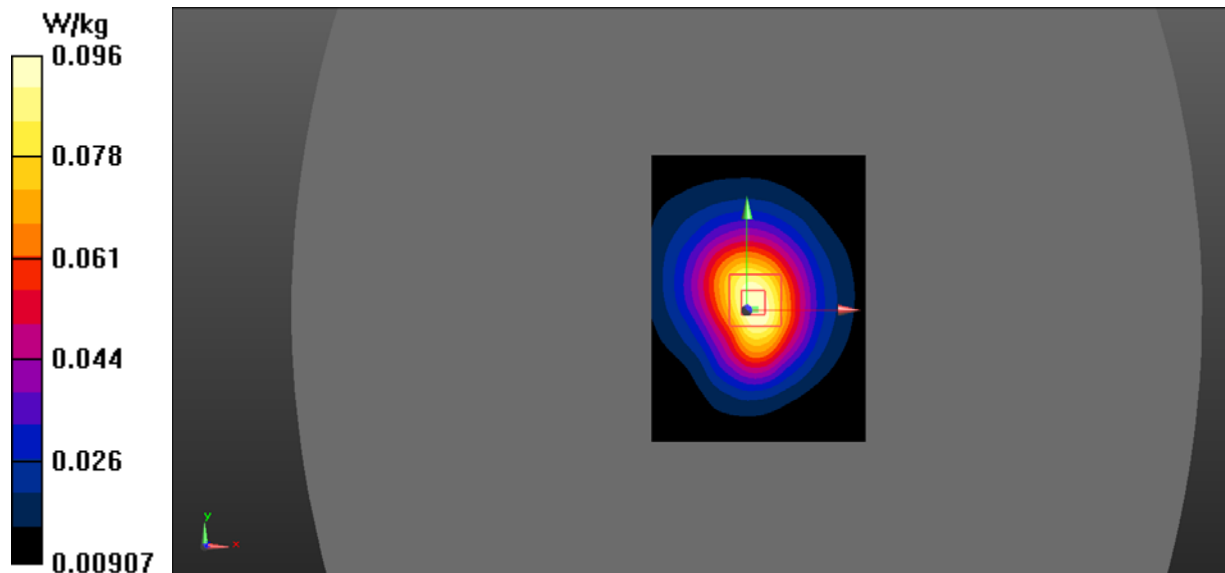

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 711 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 711$  MHz;  $\sigma = 0.867$  S/m;  $\epsilon_r = 43.29$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.78, 9.78, 9.78) @ 711 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Left Head Cheek/LTE Band 12 1RB High/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.218 W/kg

**Left Head Cheek/LTE Band 12 1RB High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.359 V/m; Power Drift = 0.045 dB

Peak SAR (extrapolated) = 0.250 W/kg

**SAR(1 g) = 0.209 W/kg; SAR(10 g) = 0.161 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.210 W/kg

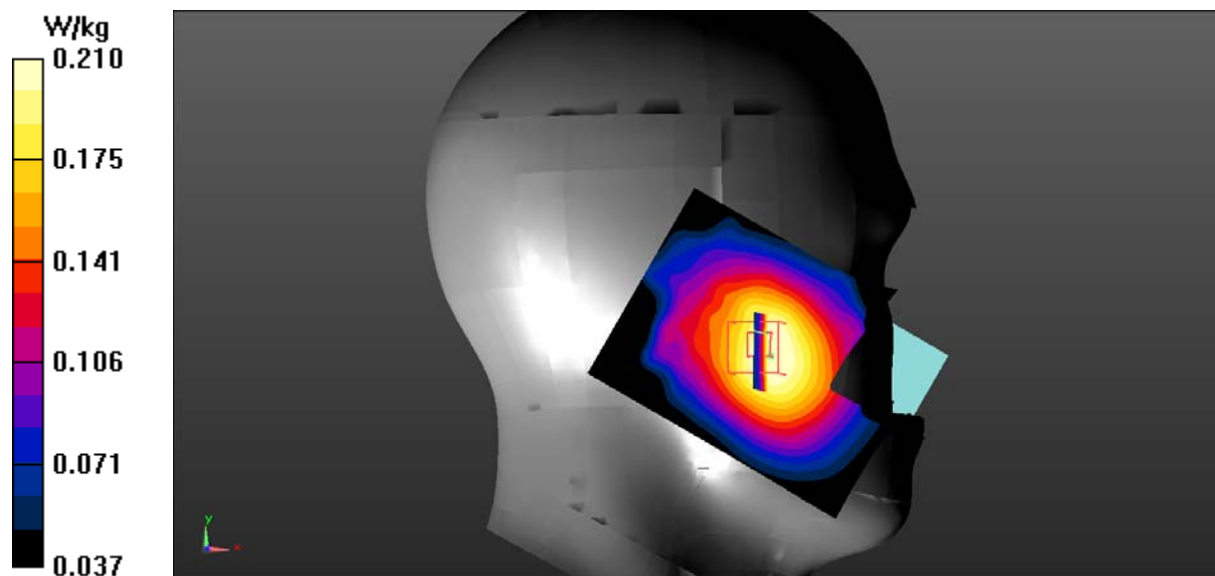

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 711 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 711$  MHz;  $\sigma = 0.867$  S/m;  $\epsilon_r = 43.29$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.78, 9.78, 9.78) @ 711 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Left Head Cheek/LTE Band 12 50%RB High/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.179 W/kg

**Left Head Cheek/LTE Band 12 50%RB High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.181 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.204 W/kg

**SAR(1 g) = 0.170 W/kg; SAR(10 g) = 0.130 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.173 W/kg

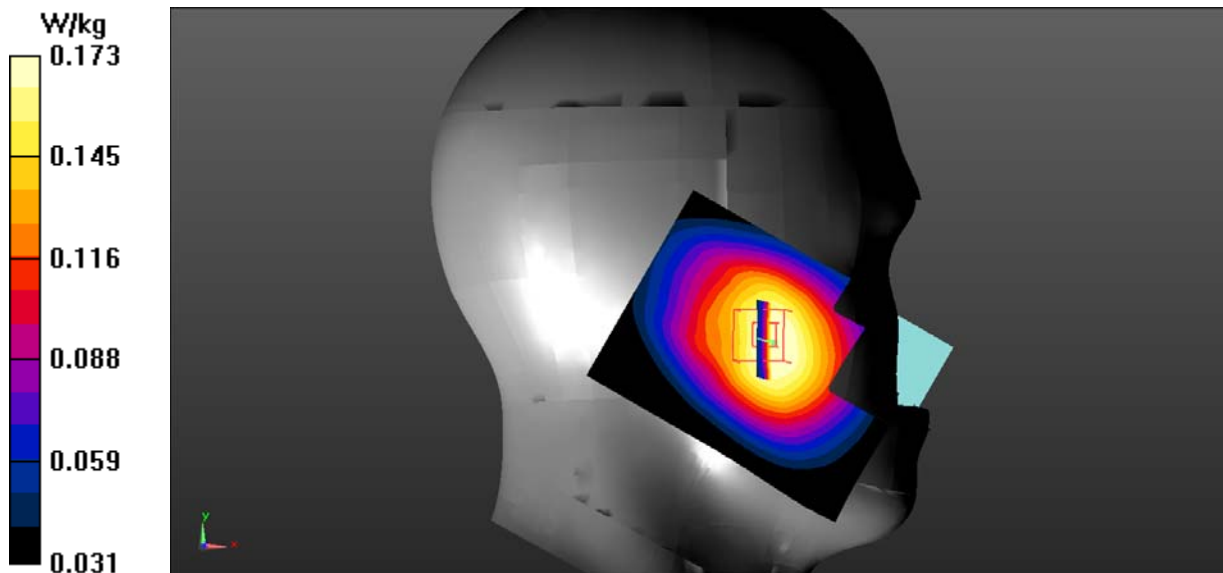

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 711 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 711$  MHz;  $\sigma = 0.867$  S/m;  $\epsilon_r = 43.29$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.78, 9.78, 9.78) @ 711 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Left Head Tilt/LTE Band 12 1RB High/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.170 W/kg


**Left Head Tilt/LTE Band 12 1RB High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.84 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.199 W/kg

**SAR(1 g) = 0.164 W/kg; SAR(10 g) = 0.127 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.167 W/kg

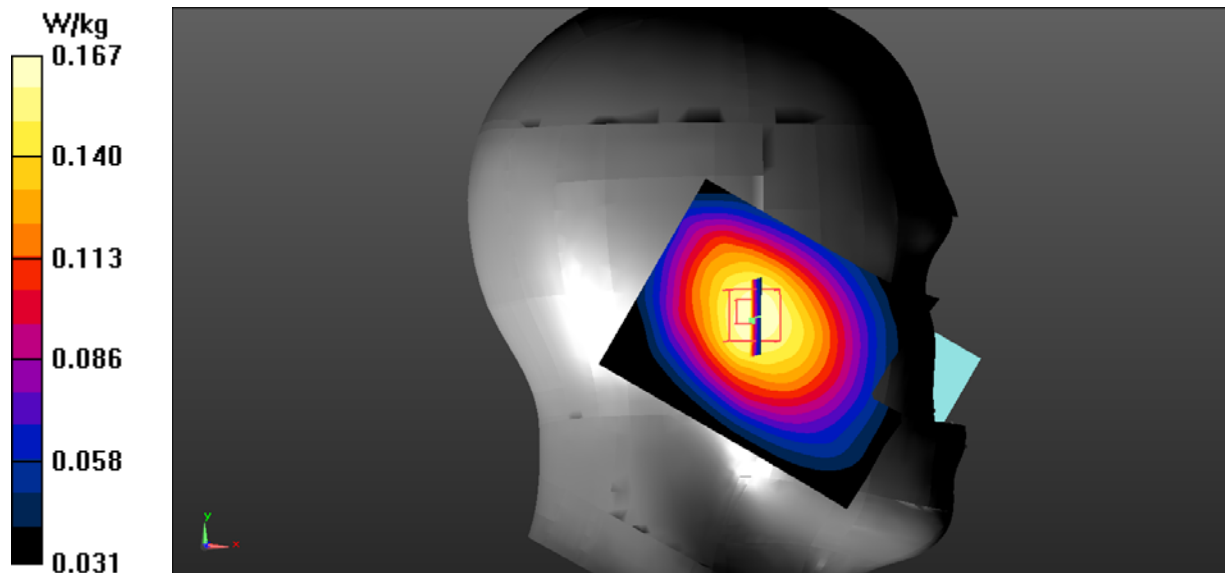

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 711 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 711$  MHz;  $\sigma = 0.867$  S/m;  $\epsilon_r = 43.29$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.78, 9.78, 9.78) @ 711 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Left Head Tilt/LTE Band 12 50%RB High/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.139 W/kg

**Left Head Tilt/LTE Band 12 50%RB High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.800 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.163 W/kg

**SAR(1 g) = 0.134 W/kg; SAR(10 g) = 0.104 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.137 W/kg

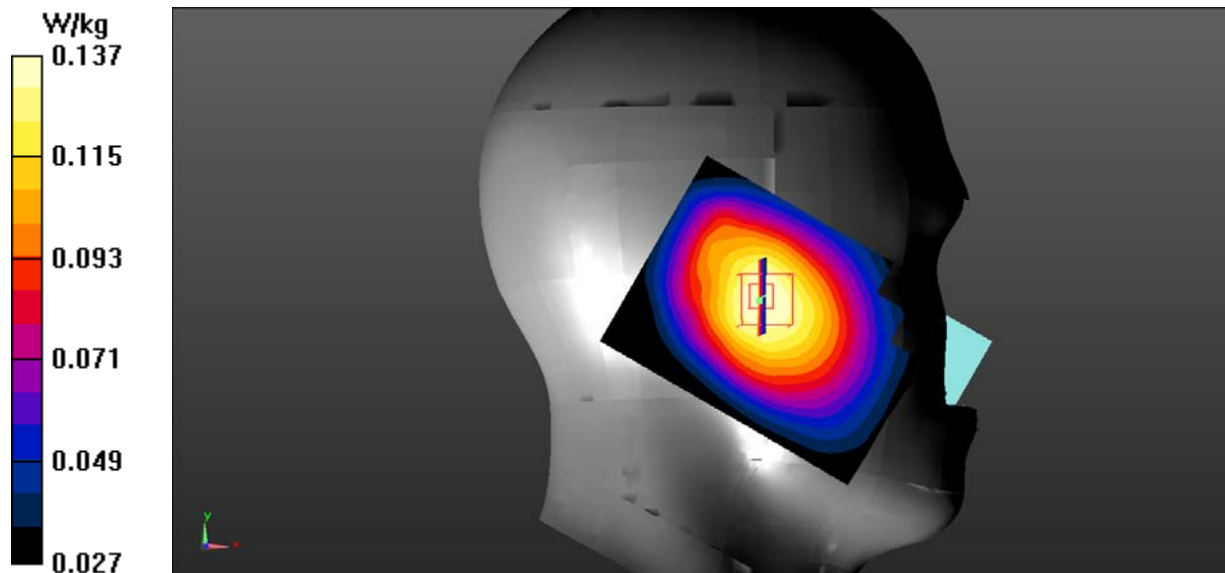

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 711 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 711$  MHz;  $\sigma = 0.867$  S/m;  $\epsilon_r = 43.29$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.78, 9.78, 9.78) @ 711 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Right Head Cheek/LTE Band 12 1RB High/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.247 W/kg

**Right Head Cheek/LTE Band 12 1RB High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.794 V/m; Power Drift = 0.065 dB

Peak SAR (extrapolated) = 0.302 W/kg

**SAR(1 g) = 0.246 W/kg; SAR(10 g) = 0.187 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.251 W/kg

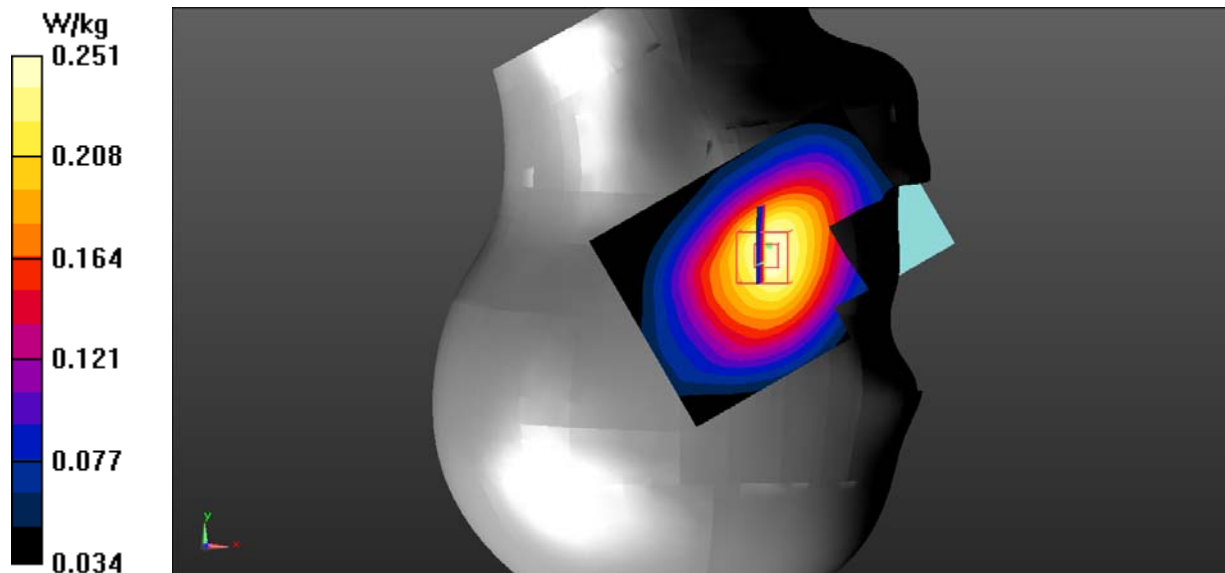

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 711 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 711$  MHz;  $\sigma = 0.867$  S/m;  $\epsilon_r = 43.29$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.78, 9.78, 9.78) @ 711 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Right Head Cheek/LTE Band 12 50%RB High/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.210 W/kg


**Right Head Cheek/LTE Band 12 50%RB High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.860 V/m; Power Drift = 0.094 dB

Peak SAR (extrapolated) = 0.252 W/kg

**SAR(1 g) = 0.206 W/kg; SAR(10 g) = 0.156 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.210 W/kg

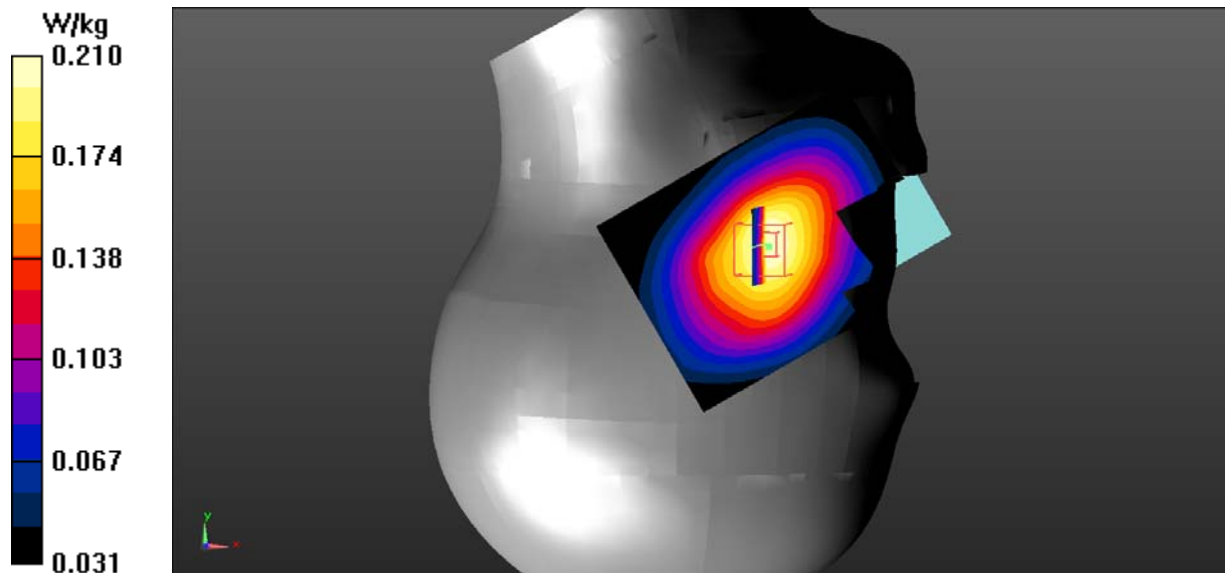

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 711 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 711$  MHz;  $\sigma = 0.867$  S/m;  $\epsilon_r = 43.29$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.78, 9.78, 9.78) @ 711 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Right Head Tilt/LTE Band 12 1RB High/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.155 W/kg


**Right Head Tilt/LTE Band 12 1RB High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.67 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.186 W/kg

**SAR(1 g) = 0.154 W/kg; SAR(10 g) = 0.119 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.158 W/kg

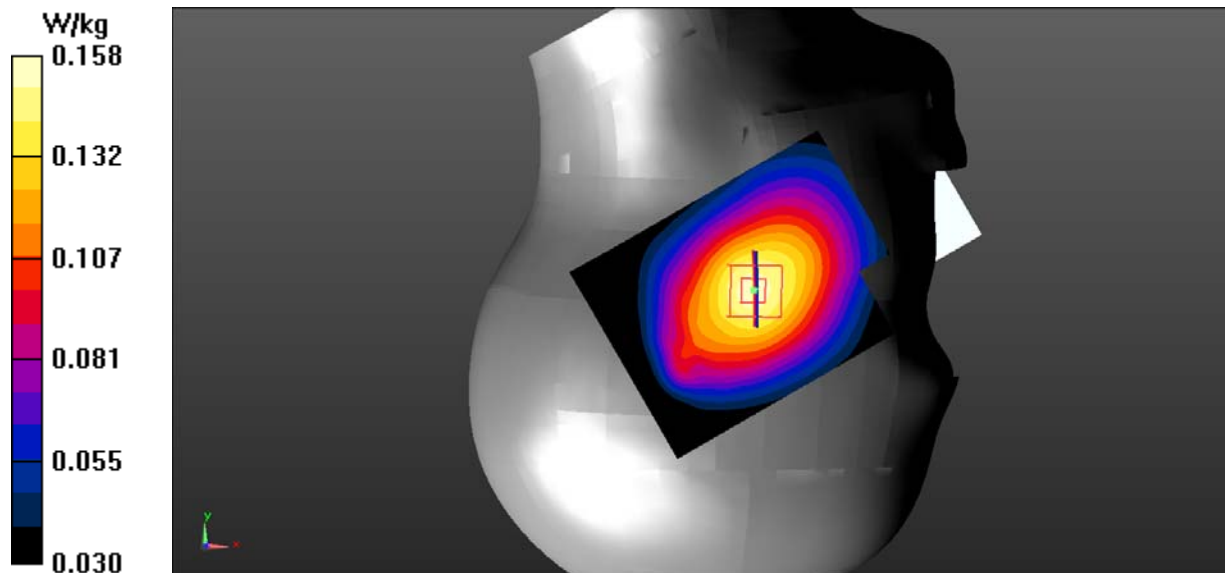



**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 711 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 711$  MHz;  $\sigma = 0.867$  S/m;  $\epsilon_r = 43.29$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.78, 9.78, 9.78) @ 711 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Right Head Tilt/LTE Band 12 50%RB High/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.156 W/kg

**Right Head Tilt/LTE Band 12 50%RB High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.71 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.190 W/kg

**SAR(1 g) = 0.156 W/kg; SAR(10 g) = 0.119 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.160 W/kg

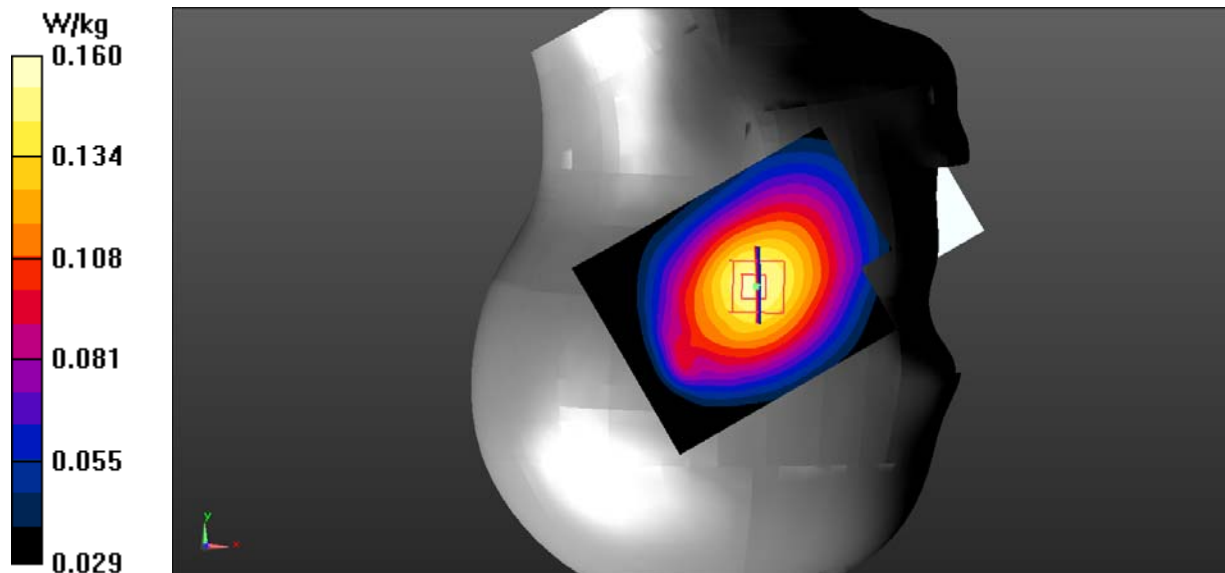

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 711 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 711$  MHz;  $\sigma = 0.942$  S/m;  $\epsilon_r = 57.998$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.8, 9.8, 9.8) @ 711 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Back/LTE Band 12 1RB High/Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.372 W/kg


**Body Back/LTE Band 12 1RB High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.39 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.458 W/kg

**SAR(1 g) = 0.365 W/kg; SAR(10 g) = 0.270 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.377 W/kg

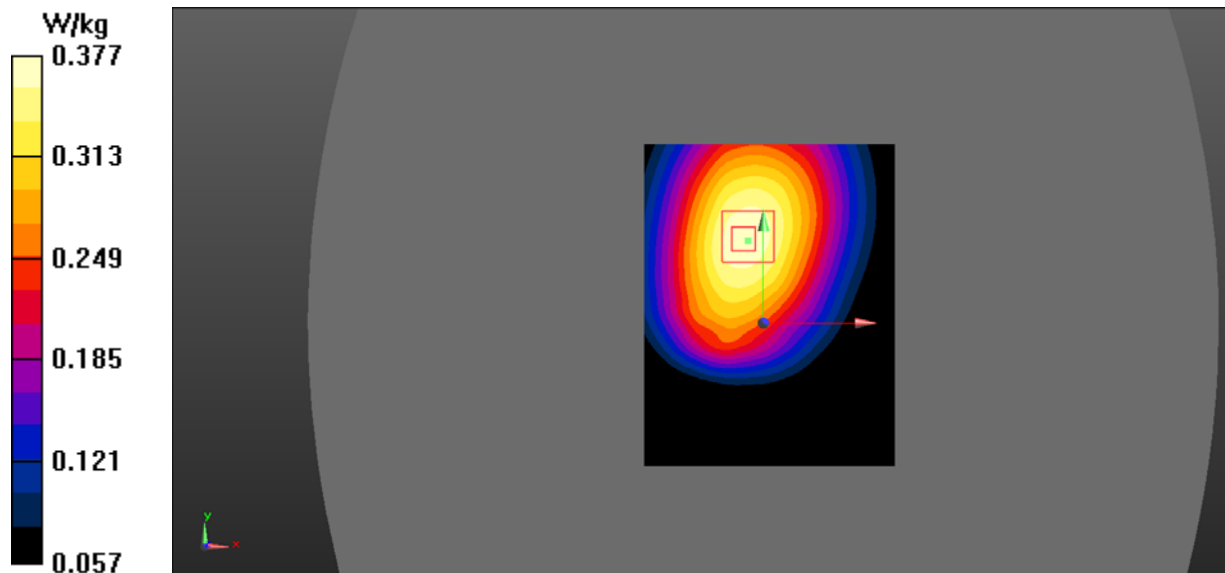

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 711 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 711$  MHz;  $\sigma = 0.942$  S/m;  $\epsilon_r = 57.998$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.8, 9.8, 9.8) @ 711 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Back/LTE Band 12 50%RB High/Area Scan (61x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.299 W/kg


**Body Back/LTE Band 12 50%RB High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.59 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.365 W/kg

**SAR(1 g) = 0.292 W/kg; SAR(10 g) = 0.216 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.301 W/kg

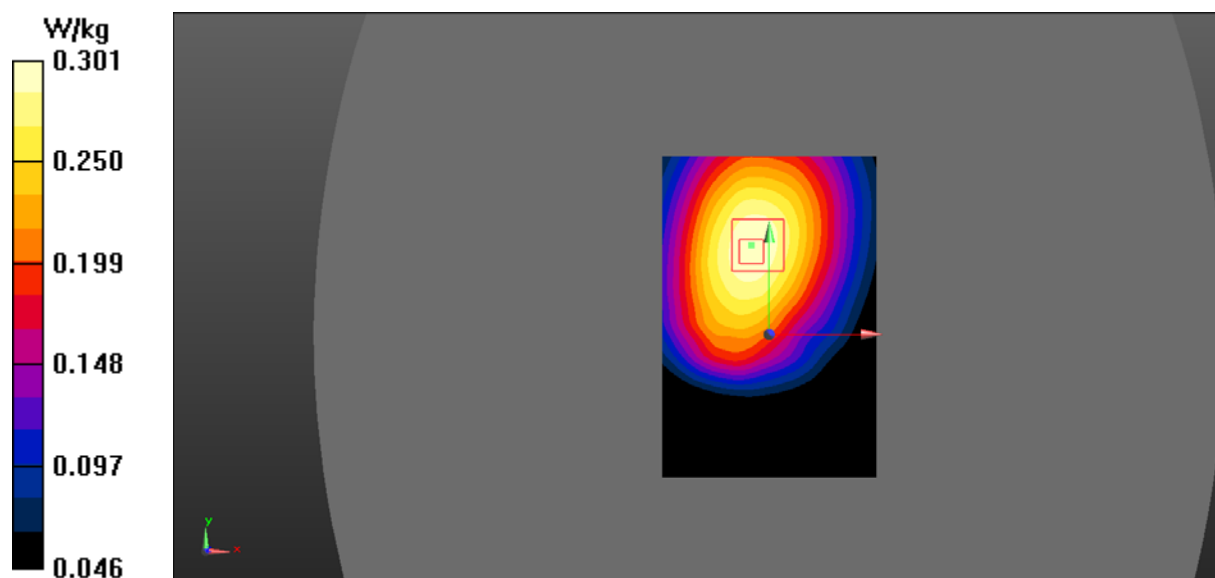

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 711 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 711$  MHz;  $\sigma = 0.942$  S/m;  $\epsilon_r = 57.998$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.8, 9.8, 9.8) @ 711 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Right/LTE Band 12 1RB High/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.319 W/kg


**Body Right/LTE Band 12 1RB High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.09 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.420 W/kg

**SAR(1 g) = 0.309 W/kg; SAR(10 g) = 0.216 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.322 W/kg

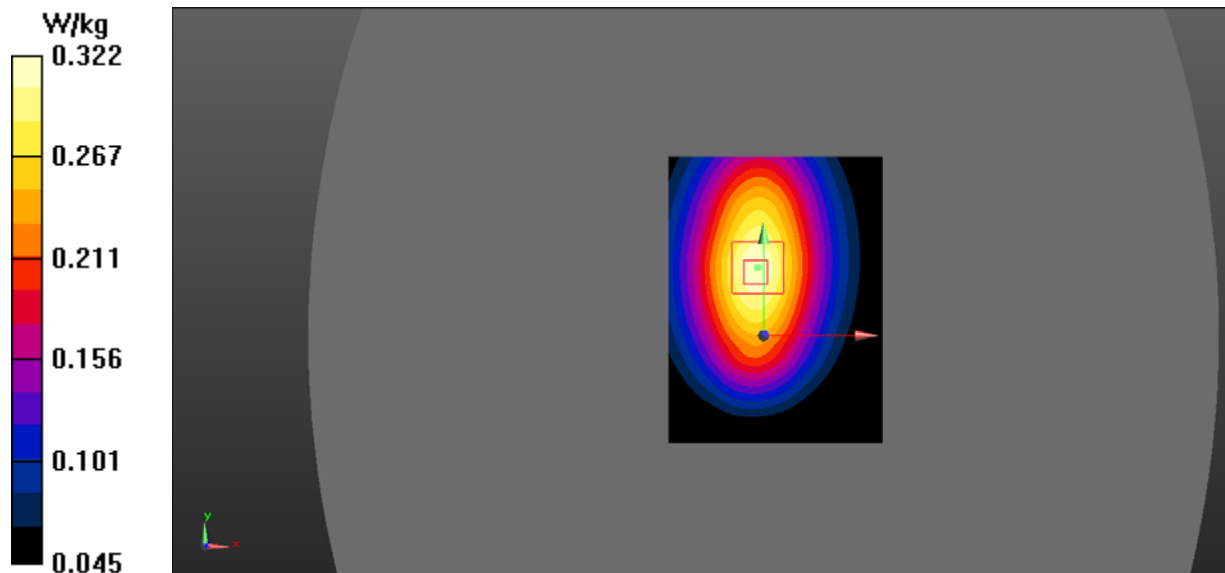

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 711 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 711$  MHz;  $\sigma = 0.942$  S/m;  $\epsilon_r = 57.998$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.8, 9.8, 9.8) @ 711 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Right/LTE Band 12 50%RB High/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.258 W/kg


**Body Right/LTE Band 12 50%RB High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.52 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.343 W/kg

**SAR(1 g) = 0.251 W/kg; SAR(10 g) = 0.176 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.262 W/kg

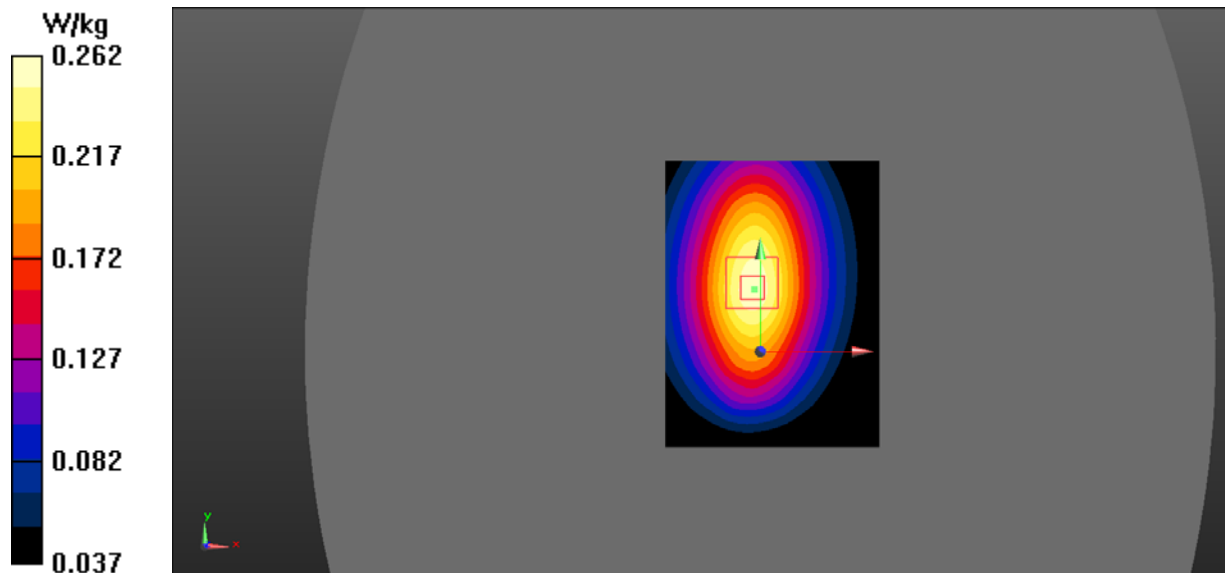

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 711 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 711$  MHz;  $\sigma = 0.942$  S/m;  $\epsilon_r = 57.998$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.8, 9.8, 9.8) @ 711 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Bottom/LTE Band 12 1RB High/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0559 W/kg


**Body Bottom/LTE Band 12 1RB High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.640 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.0830 W/kg

**SAR(1 g) = 0.051 W/kg; SAR(10 g) = 0.033 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.0539 W/kg

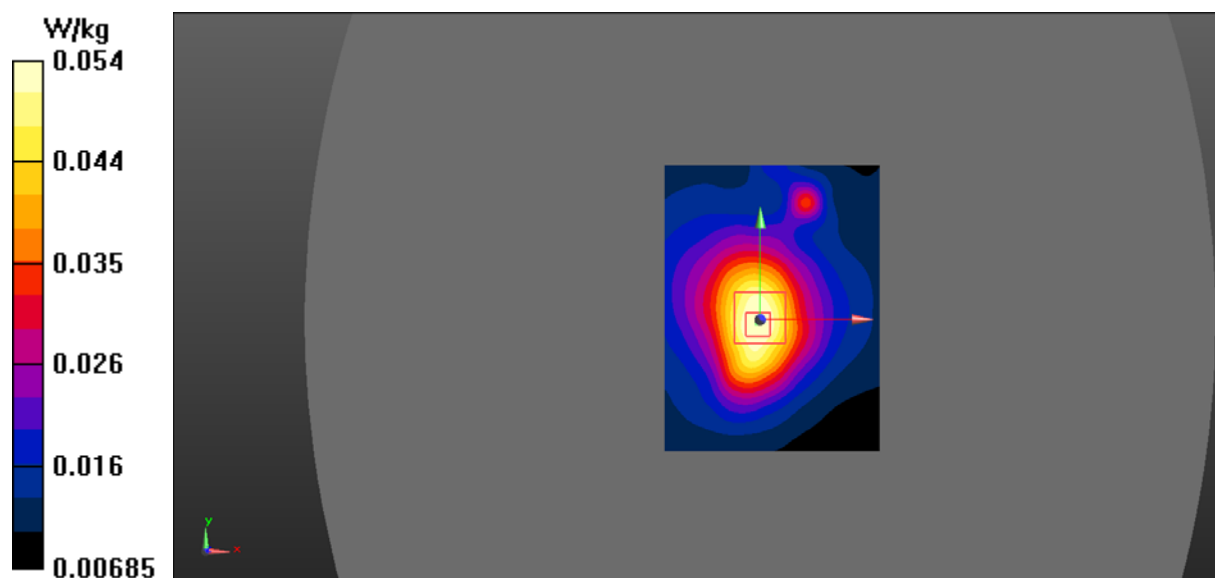

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 711 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 711$  MHz;  $\sigma = 0.942$  S/m;  $\epsilon_r = 57.998$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.8, 9.8, 9.8) @ 711 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Bottom/LTE Band 12 50%RB High/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0427 W/kg

**Body Bottom/LTE Band 12 50%RB High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.779 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.0670 W/kg

**SAR(1 g) = 0.042 W/kg; SAR(10 g) = 0.027 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.0439 W/kg

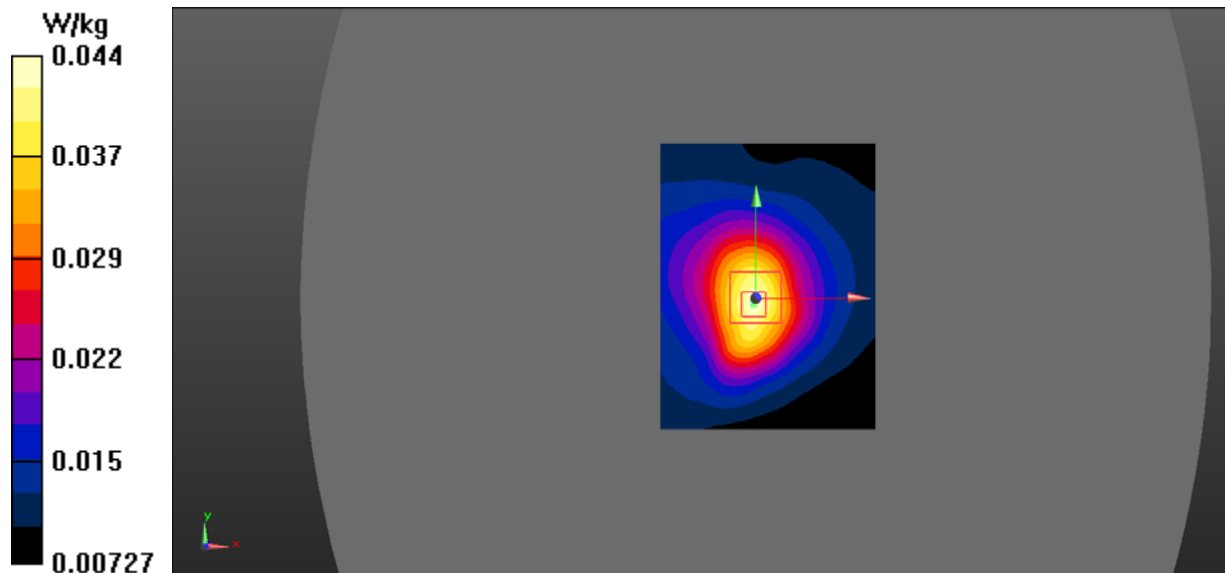

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 709 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 709$  MHz;  $\sigma = 0.855$  S/m;  $\epsilon_r = 43.595$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.78, 9.78, 9.78) @ 709 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Left Head Cheek/LTE Band 17 1RB Low/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.235 W/kg

**Left Head Cheek/LTE Band 17 1RB Low/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.701 V/m; Power Drift = 0.035 dB

Peak SAR (extrapolated) = 0.286 W/kg

**SAR(1 g) = 0.235 W/kg; SAR(10 g) = 0.178 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.237 W/kg

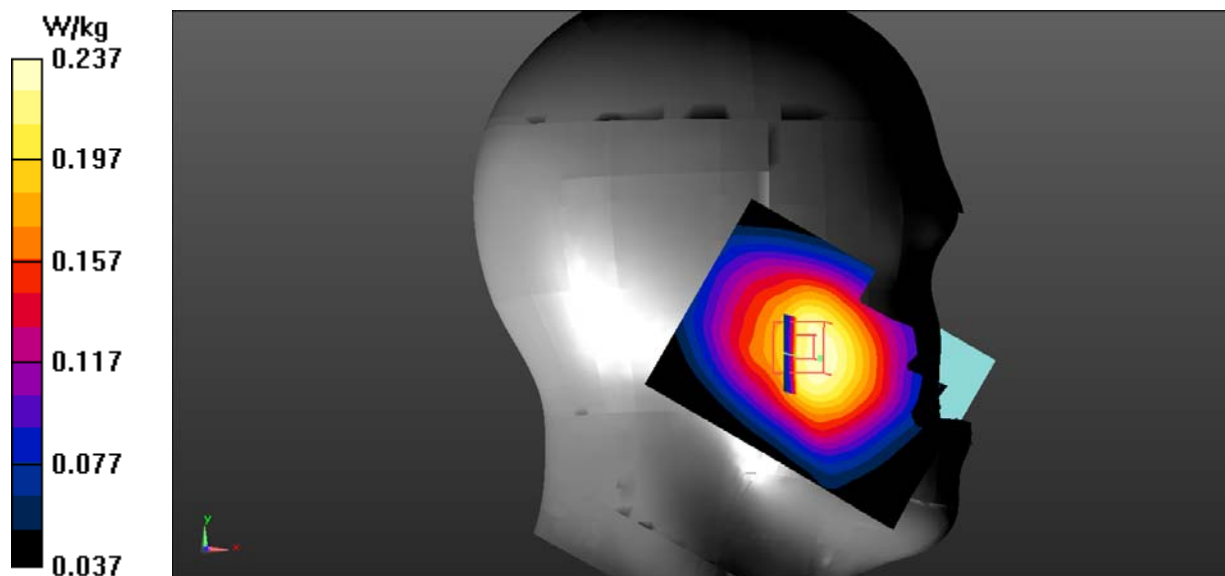



**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 709 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 709$  MHz;  $\sigma = 0.855$  S/m;  $\epsilon_r = 43.595$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.78, 9.78, 9.78) @ 709 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Left Head Cheek/LTE Band 17 50%RB Low/Area Scan (61x81x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.189 W/kg


**Left Head Cheek/LTE Band 17 50%RB Low/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 7.208 V/m; Power Drift = 0.168 dB

Peak SAR (extrapolated) = 0.230 W/kg

**SAR(1 g) = 0.182 W/kg; SAR(10 g) = 0.140 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.184 W/kg

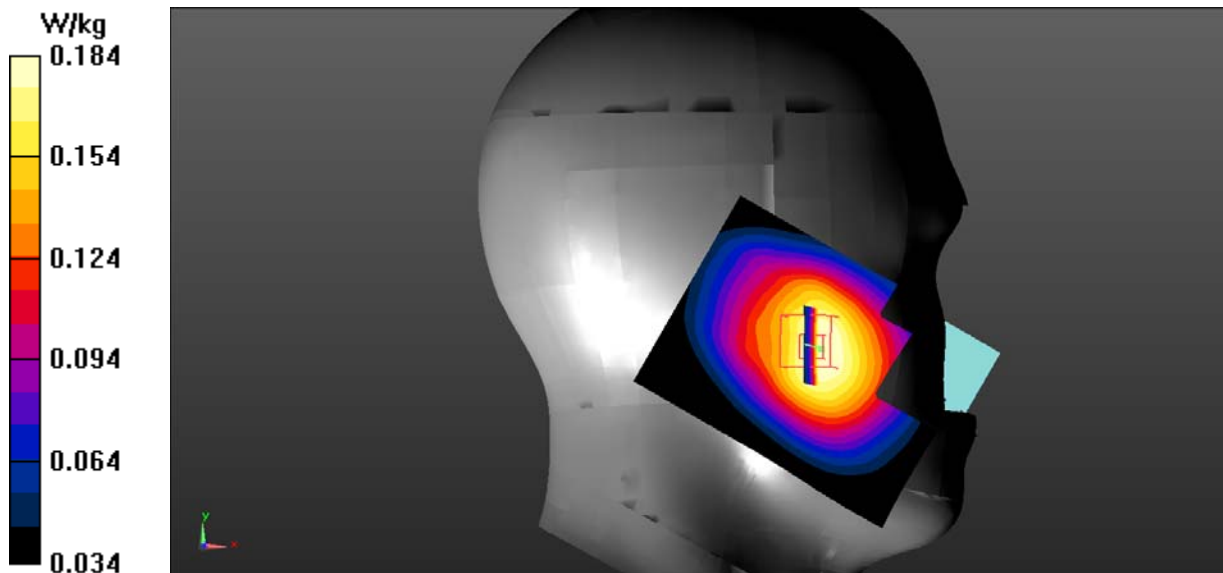

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 709 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 709$  MHz;  $\sigma = 0.855$  S/m;  $\epsilon_r = 43.595$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.78, 9.78, 9.78) @ 709 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Left Head Tilt/LTE Band 17 1RB Low/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.193 W/kg


**Left Head Tilt/LTE Band 17 1RB Low/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.35 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.224 W/kg

**SAR(1 g) = 0.186 W/kg; SAR(10 g) = 0.144 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.189 W/kg

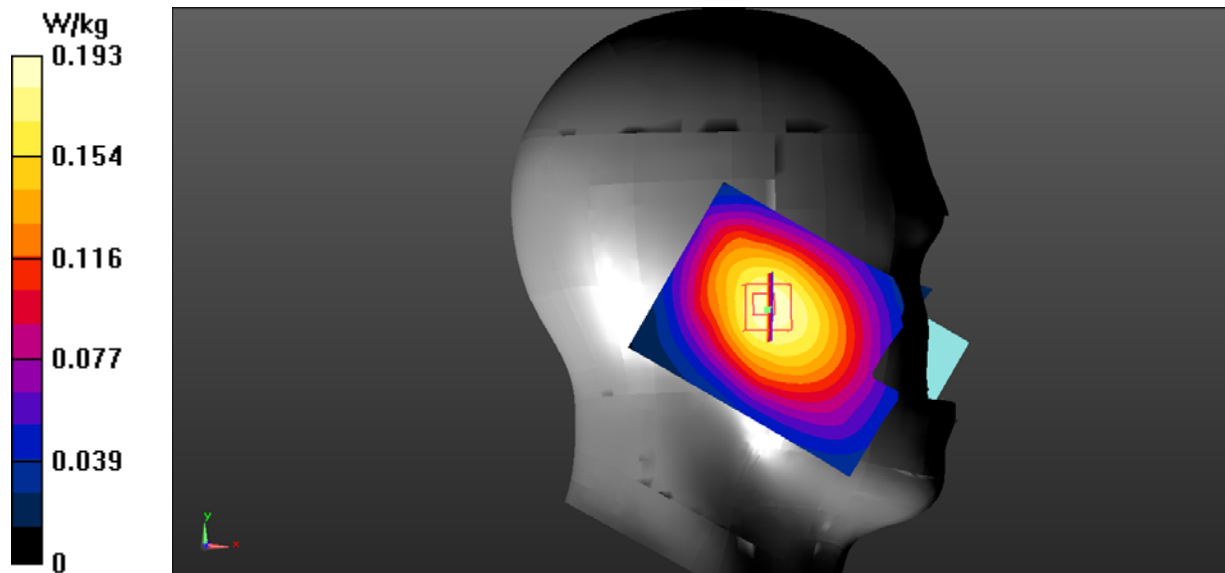

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 709 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 709$  MHz;  $\sigma = 0.855$  S/m;  $\epsilon_r = 43.595$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.78, 9.78, 9.78) @ 709 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Left Head Tilt/LTE Band 17 50%RB Low/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.151 W/kg

**Left Head Tilt/LTE Band 17 50%RB Low/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.987 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.177 W/kg

**SAR(1 g) = 0.146 W/kg; SAR(10 g) = 0.113 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.148 W/kg

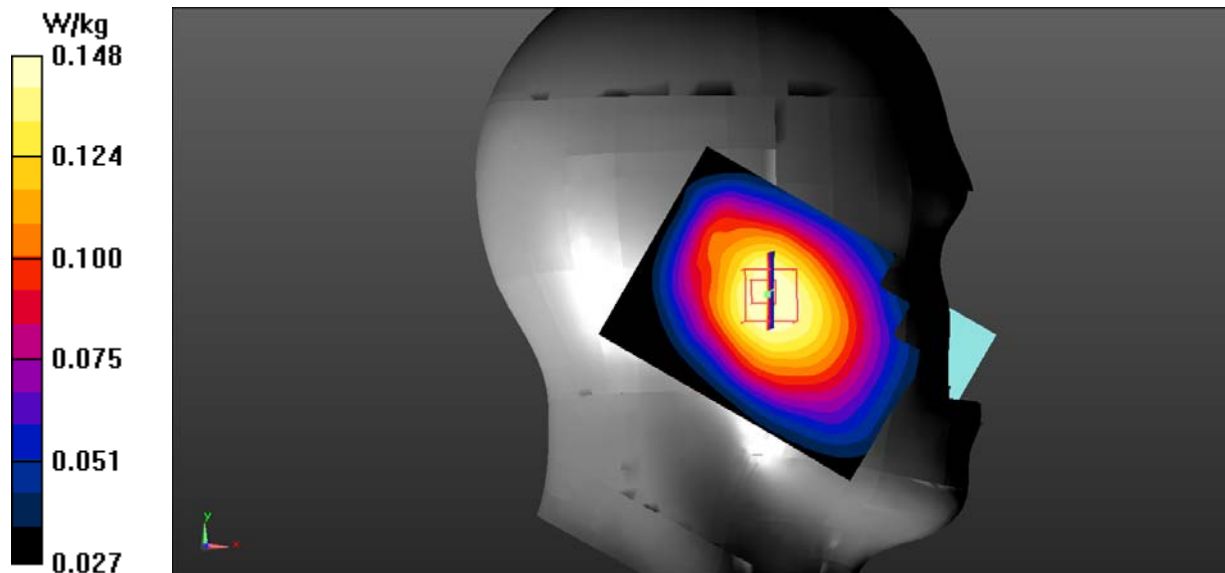

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 709 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 709$  MHz;  $\sigma = 0.855$  S/m;  $\epsilon_r = 43.595$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.78, 9.78, 9.78) @ 709 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Right Head Cheek/LTE Band 17 1RB Low/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.277 W/kg

**Right Head Cheek/LTE Band 17 1RB Low/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.537 V/m; Power Drift = 0.032 dB

Peak SAR (extrapolated) = 0.341 W/kg

**SAR(1 g) = 0.276 W/kg; SAR(10 g) = 0.209 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.285 W/kg

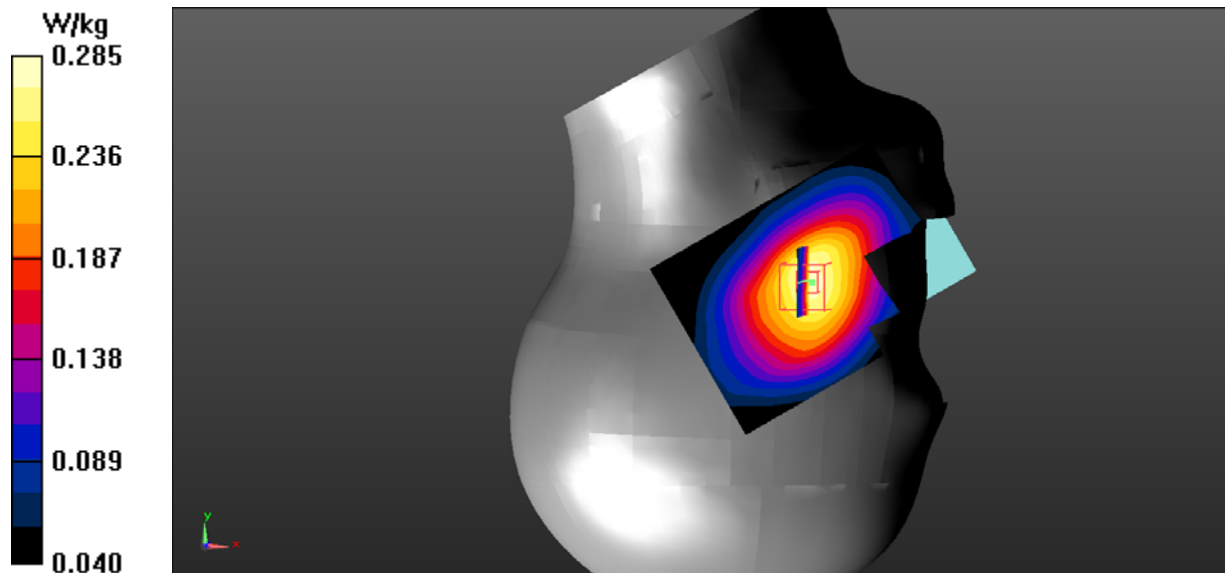

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 709 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 709$  MHz;  $\sigma = 0.855$  S/m;  $\epsilon_r = 43.595$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.78, 9.78, 9.78) @ 709 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Right Head Cheek/LTE Band 17 50%RB Low/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.217 W/kg


**Right Head Cheek/LTE Band 17 50%RB Low/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.557 V/m; Power Drift = 0.027 dB

Peak SAR (extrapolated) = 0.267 W/kg

**SAR(1 g) = 0.217 W/kg; SAR(10 g) = 0.164 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.222 W/kg

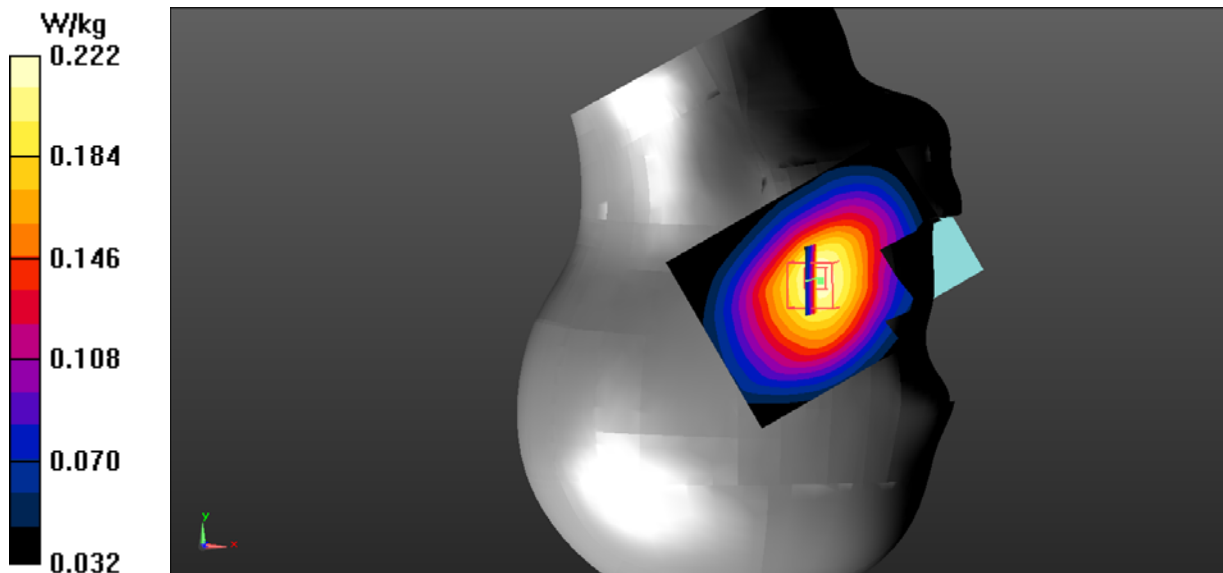

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 709 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 709$  MHz;  $\sigma = 0.855$  S/m;  $\epsilon_r = 43.595$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.78, 9.78, 9.78) @ 709 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Right Head Tilt/LTE Band 17 1RB Low/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.186 W/kg


**Right Head Tilt/LTE Band 17 1RB Low/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.89 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.228 W/kg

**SAR(1 g) = 0.189 W/kg; SAR(10 g) = 0.147 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.193 W/kg

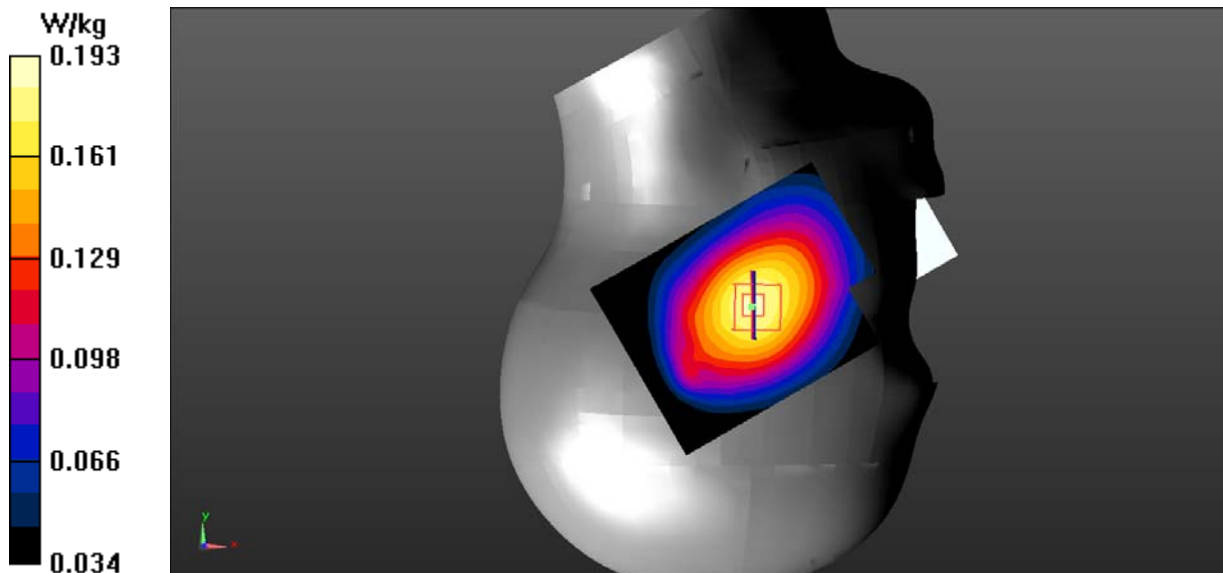

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 709 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 709$  MHz;  $\sigma = 0.855$  S/m;  $\epsilon_r = 43.595$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.78, 9.78, 9.78) @ 709 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Right Head Tilt/LTE Band 17 50%RB Low/Area Scan (61x81x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.149 W/kg

**Right Head Tilt/LTE Band 17 50%RB Low/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:


$dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 10.41 V/m; Power Drift = 0.125 dB

Peak SAR (extrapolated) = 0.182 W/kg

**SAR(1 g) = 0.149 W/kg; SAR(10 g) = 0.116 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.152 W/kg

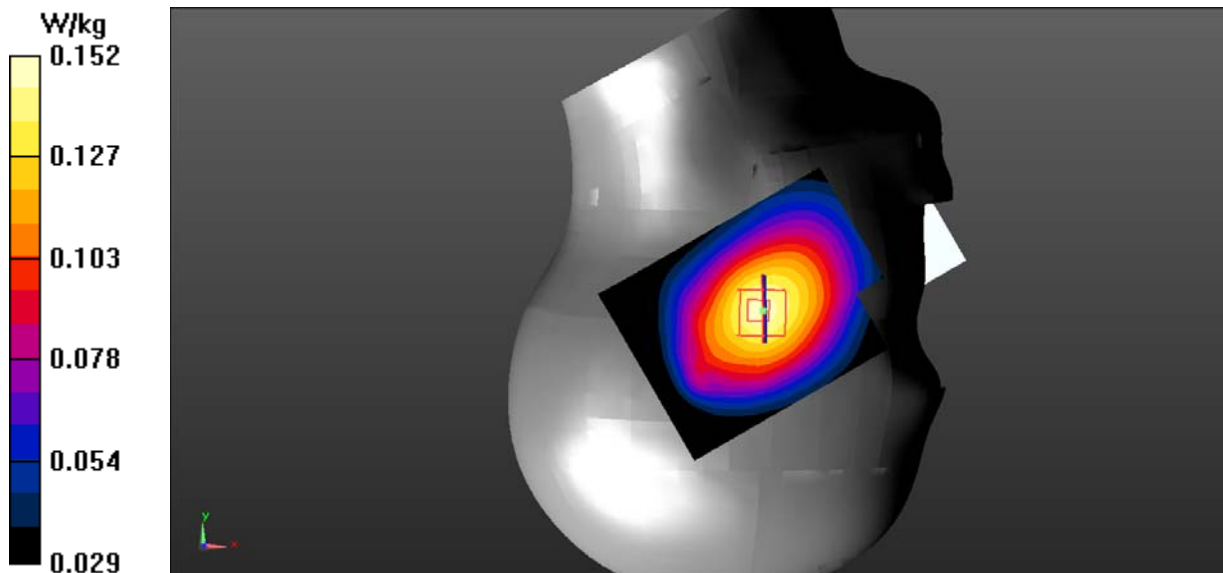

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 709 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 709$  MHz;  $\sigma = 0.943$  S/m;  $\epsilon_r = 57.995$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.8, 9.8, 9.8) @ 709 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Back/LTE Band 17 1RB Low/Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.368 W/kg


**Body Back/LTE Band 17 1RB Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.90 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.446 W/kg

**SAR(1 g) = 0.358 W/kg; SAR(10 g) = 0.267 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.369 W/kg

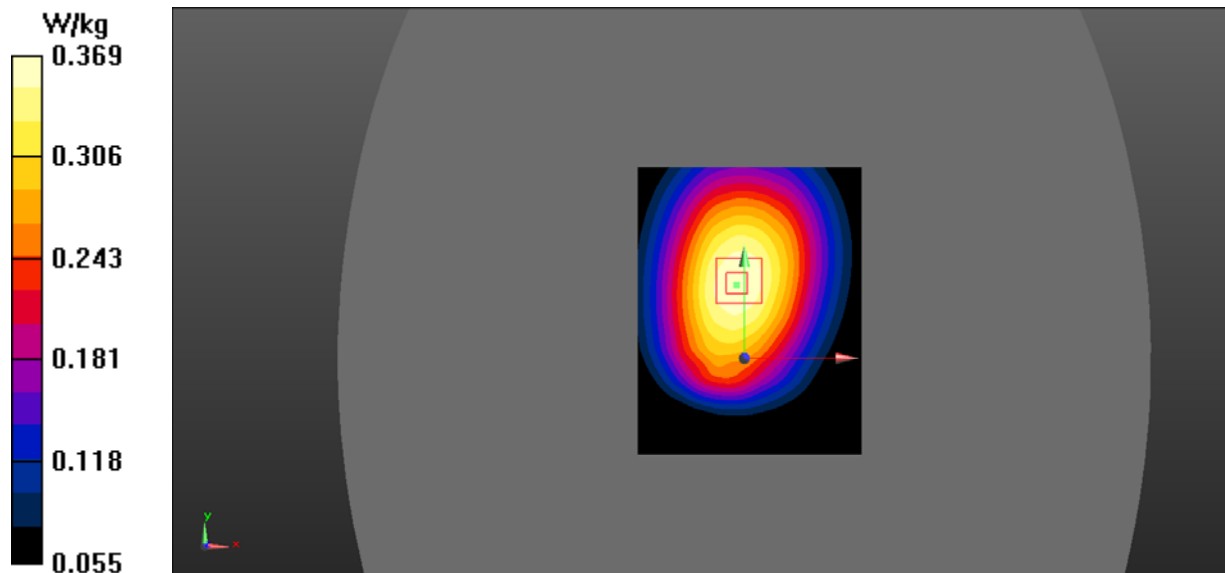



**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 709 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 709$  MHz;  $\sigma = 0.943$  S/m;  $\epsilon_r = 57.995$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.8, 9.8, 9.8) @ 709 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Back/LTE Band 17 50%RB Low/Area Scan (61x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.309 W/kg


**Body Back/LTE Band 17 50%RB Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.68 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.371 W/kg

**SAR(1 g) = 0.298 W/kg; SAR(10 g) = 0.222 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.307 W/kg

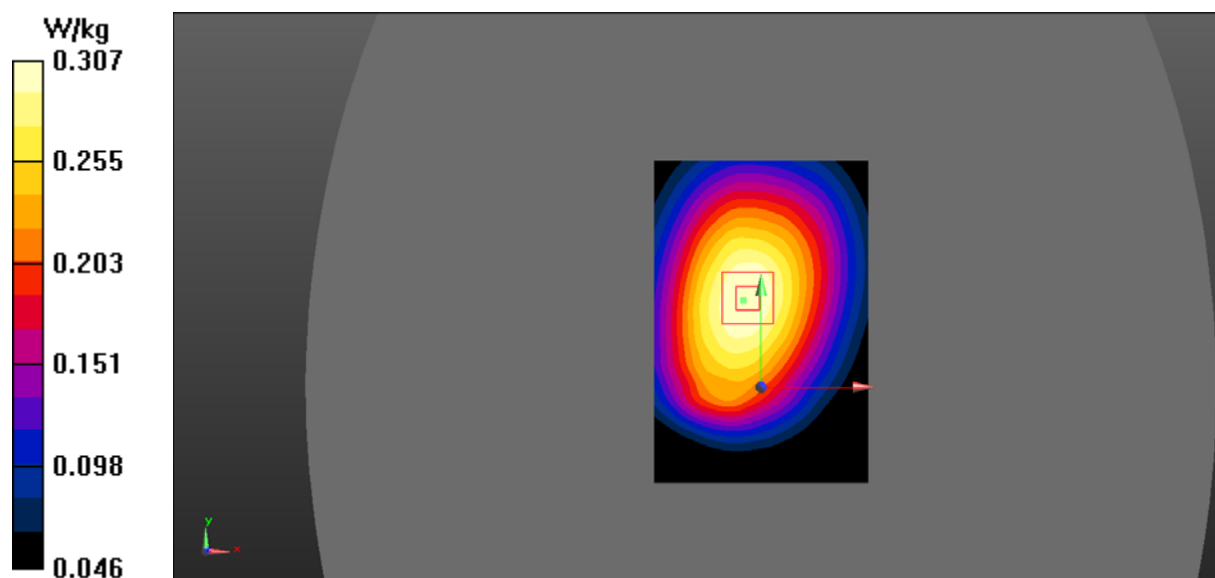

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 709 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 709$  MHz;  $\sigma = 0.943$  S/m;  $\epsilon_r = 57.995$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.8, 9.8, 9.8) @ 709 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Right/LTE Band 17 1RB Low/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.357 W/kg


**Body Right/LTE Band 17 1RB Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.97 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.470 W/kg

**SAR(1 g) = 0.346 W/kg; SAR(10 g) = 0.243 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.361 W/kg

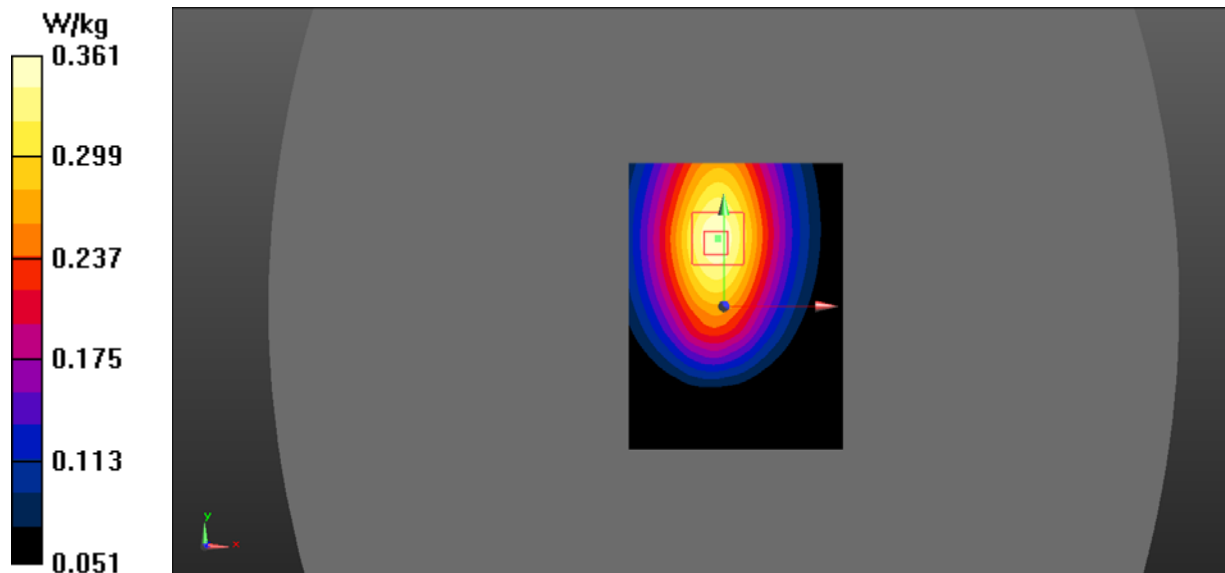

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 709 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 709$  MHz;  $\sigma = 0.943$  S/m;  $\epsilon_r = 57.995$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.8, 9.8, 9.8) @ 709 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Right/LTE Band 17 50%RB Low/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.278 W/kg


**Body Right/LTE Band 17 50%RB Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.00 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.366 W/kg

**SAR(1 g) = 0.270 W/kg; SAR(10 g) = 0.190 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.280 W/kg

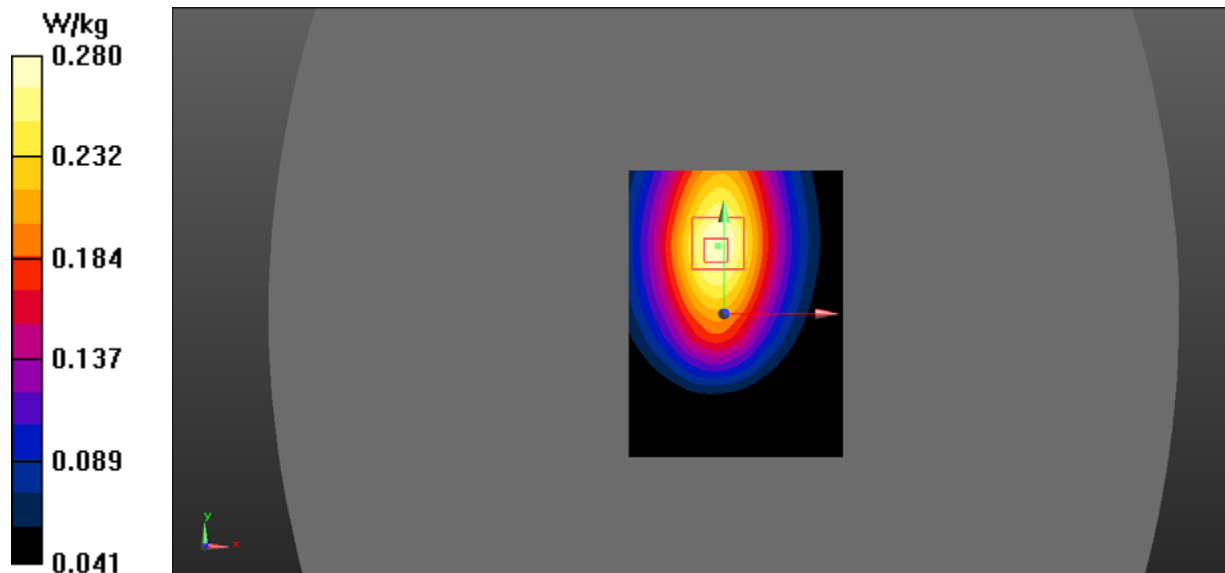

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 709 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 709$  MHz;  $\sigma = 0.943$  S/m;  $\epsilon_r = 57.995$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.8, 9.8, 9.8) @ 709 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Bottom/LTE Band 17 1RB Low/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0551 W/kg


**Body Bottom/LTE Band 17 1RB Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.674 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.0890 W/kg

**SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.034 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.0563 W/kg

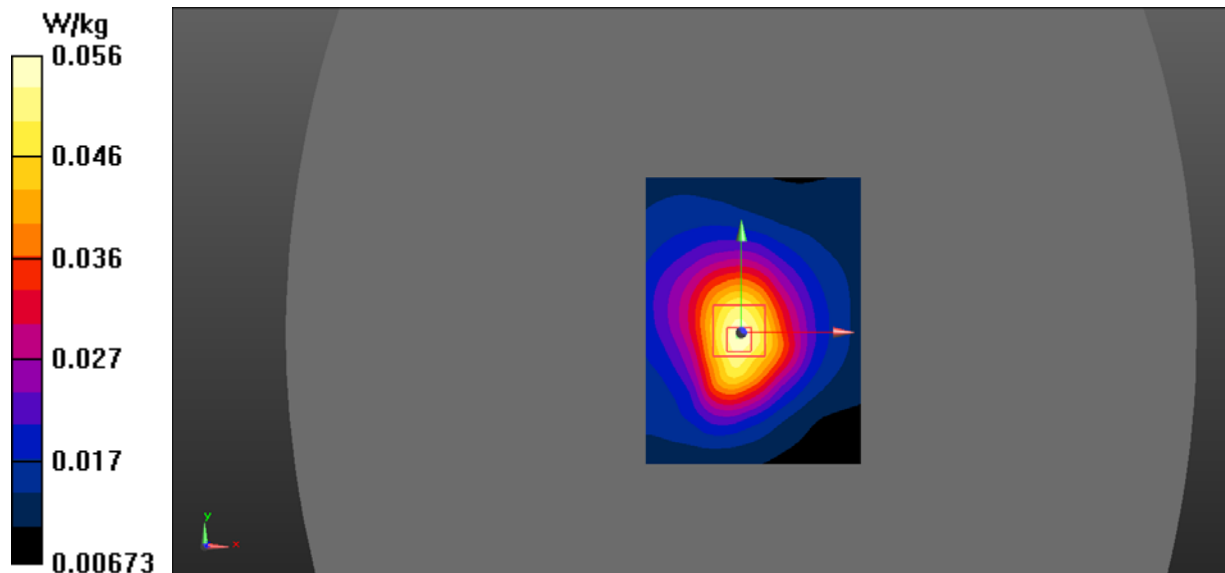

**DUT: Mobile phone; Type: C5L; Serial: 18122000407**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 709 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 709$  MHz;  $\sigma = 0.943$  S/m;  $\epsilon_r = 57.995$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.8, 9.8, 9.8) @ 709 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body Bottom/LTE Band 17 50%RB Low/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0450 W/kg

**Body Bottom/LTE Band 17 50%RB Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.912 V/m; Power Drift = 0.125 dB

Peak SAR (extrapolated) = 0.0730 W/kg

**SAR(1 g) = 0.043 W/kg; SAR(10 g) = 0.028 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.0455 W/kg

