

Antenna SPEC



Mobile antenna test report

HEYUAN XUNWEI MICROWAVE
COMMUNICATION CO.,LTD

RF: Chen chuan ming

Date: 2023.04.04

Office address: Zone M, 8/F, Building 1, Baisha New Industrial
Park, Nanshan District, Shenzhen

Test equipment

Wireless communications test set: CMW500

Network Analyzer: Agilent 5071B


Anechoic Chamber : SATIMO SG24



1. Antenna information

Customer	Boat of wealth	
Antenna Model	DIV: LTE-B GWB: XW-G/W/B Main: XW-WS572-MAIN	
Antenna Type	PIFA Antenna	
Frequency range	603-960MHz	1710-2690MHz
VSWR	<3.5	<3.5

Matching circuit (No modification)

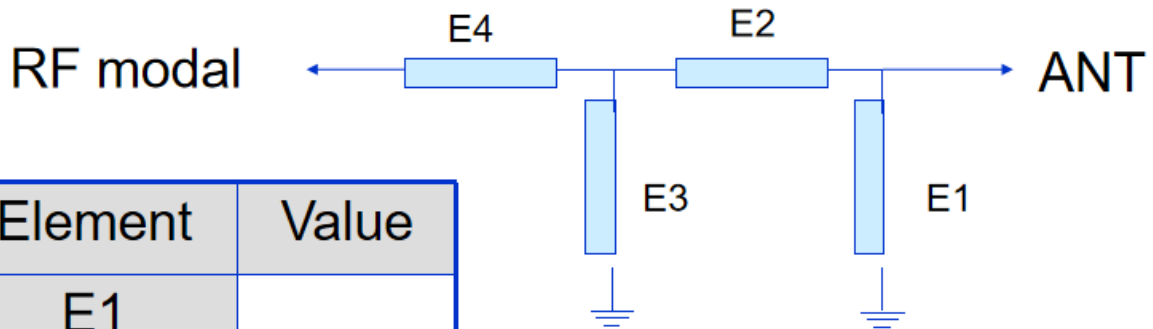


Element	Value
E1	
E2	
E3	
E4	

2. Antenna position diagram (reflecting the position of all antennas and the frequency band used)

DIV ANT(Rx only)

GWB ANT

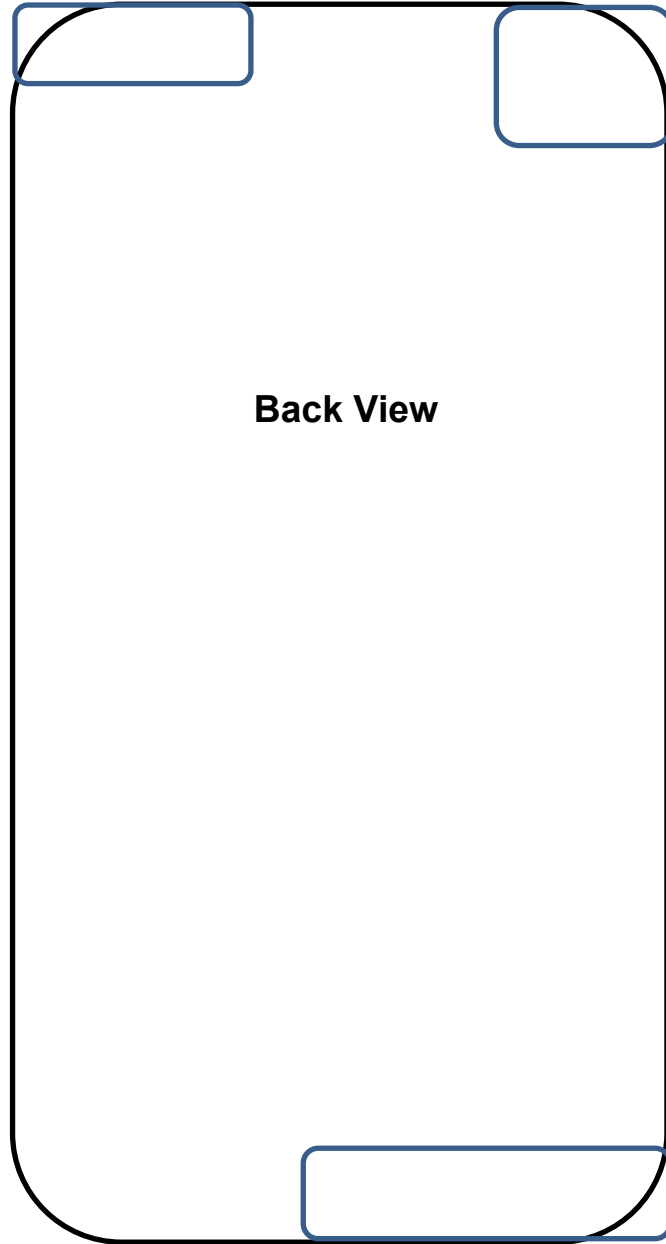

WWAN Main ANT

All of Implementation antenna

Main antenna(Antenna Label:A):

LTE B1/B2/B3/B4/B5/B7/B12/B17/B28/B66/B71 RX&TX

WCDMA B1/B2/B4/B5/B8 RX&TX

GSM B2/B3/B5/B8 RX&TX

DIV antenna(Antenna Label:B):

LTE B1/B2/B3/B4/B7/B66 RX

WCDMA B1/B2/B4 RX

GSM B2/B3 RX

WiFi/BT 2.4~2.5G/2412MHz~2472MHz& GPS: 1575.42 MHz ;

Antenna Max. Peak Gain:

EGSM900:-1.74dBi

GSM850: -1.52dBi

DCS1800: -1.10dBi

PCS1900: -0.90dBi

WCDMA2100: -1.10dBi

WCDMA1900: -0.90dBi

WCDMA1700: -0.97dBi

WCDMA900: -1.74dBi

WCDMA850: -1.52dBi

LTE-B1: -1.10dBi

LTE-B2: -0.90dBi

LTE-B3: -0.97dBi

LTE-B4: -0.61dBi

LTE-B5: -1.52dBi

LTE-B7: -0.77dBi

LTE-B12: -1.86dBi

LTE-B17:- 1.89dBi

LTE-B28: -1.82dBi

LTE-B66: -0.97dBi




LTE-B71:- 1.90dBi

WIFI/BT: -0.62dBi




GPS: -0.88dBi

3. Antenna apple pattern




603MHZ~960MHZ

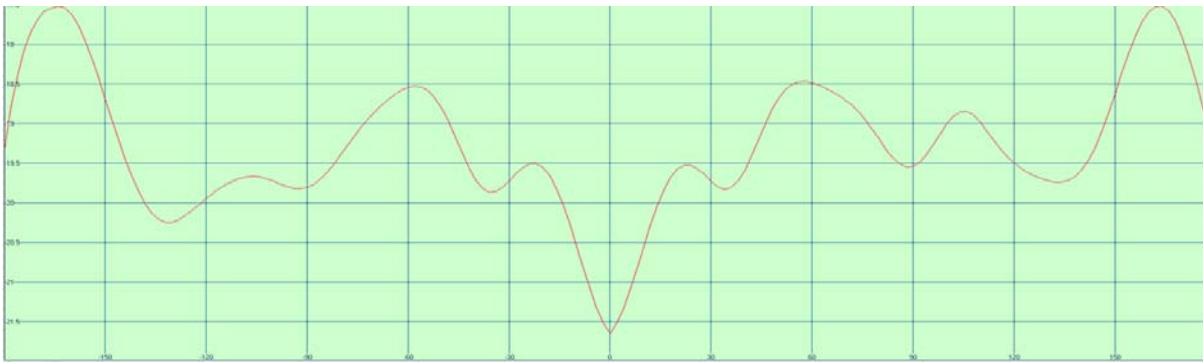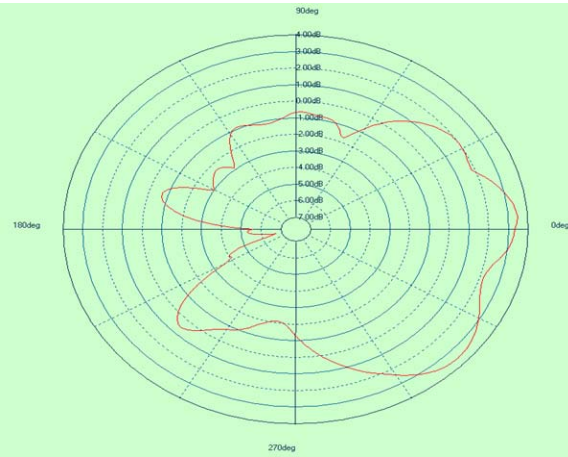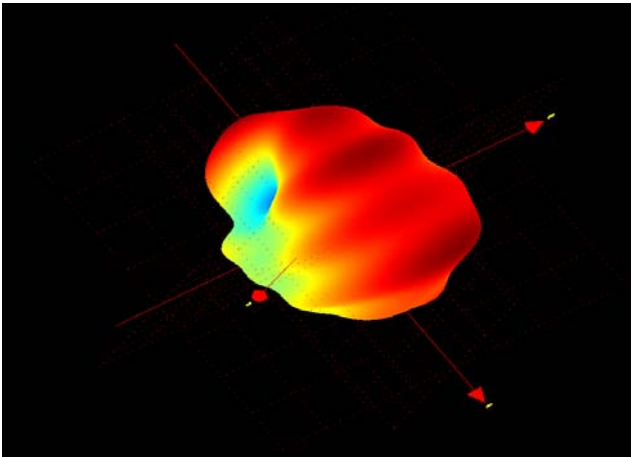




1710MHZ~2170MHZ

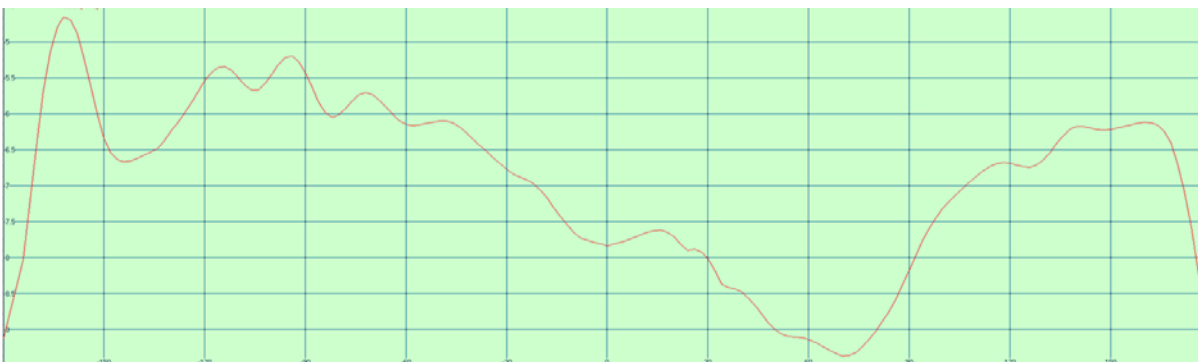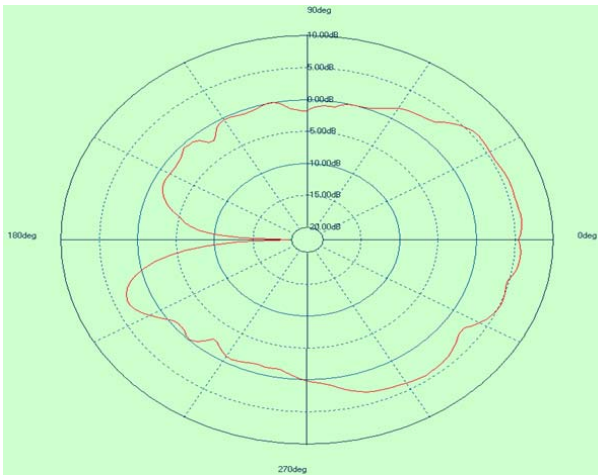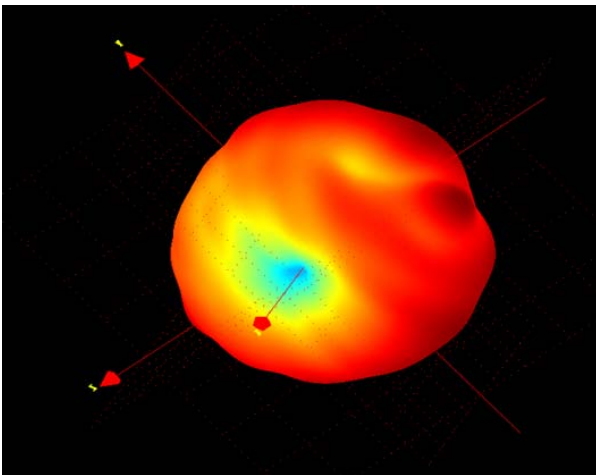

2500MHZ~2700MHZ

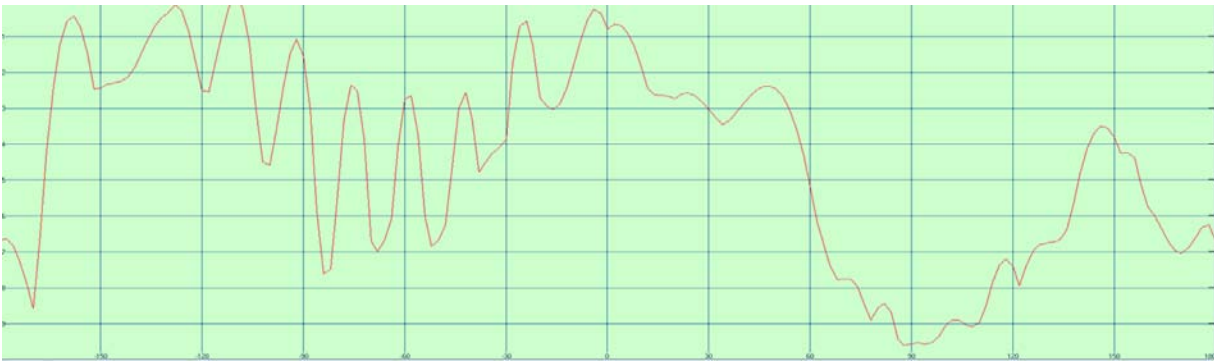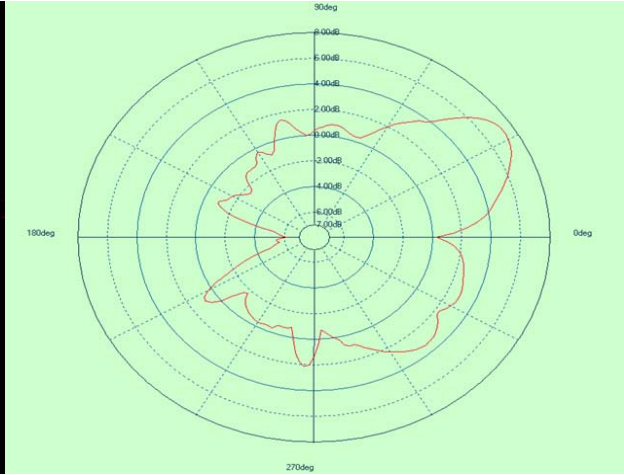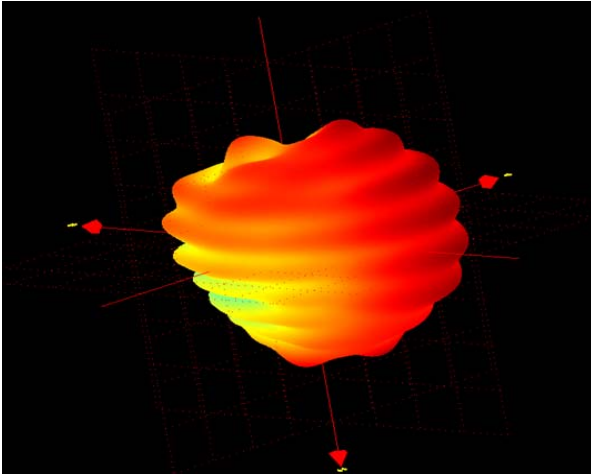

1550MHZ~1600MHZ(GPS)

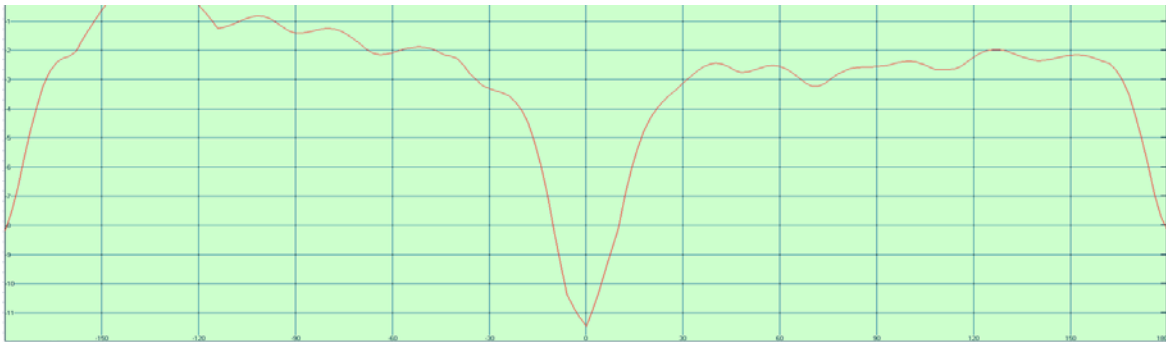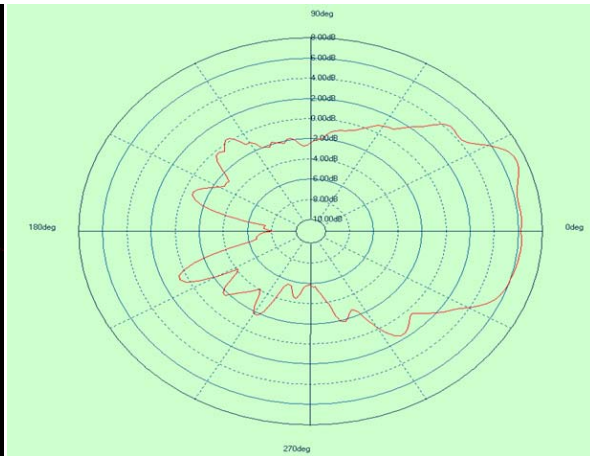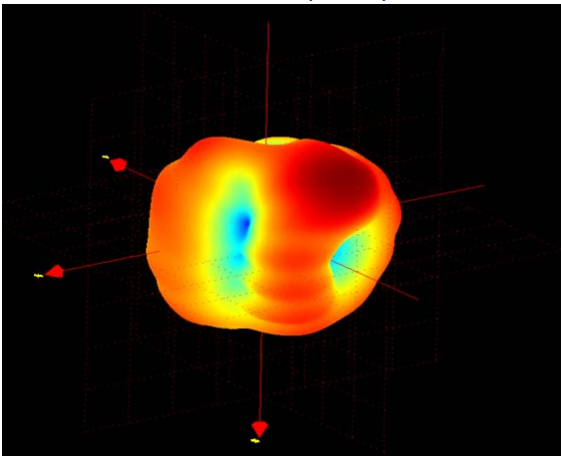

2400MHZ~2500MHZ(BT/WIFI 2.4G)

