



# TEST REPORT

**APPLICANT** : BLU Products, Inc.  
**PRODUCT NAME** : Smart Phone  
**MODEL NAME** : C5L MAX  
**BRAND NAME** : BLU  
**FCC ID** : YHLBLUC5LMX177  
**STANDARD(S)** : 47 CFR Part 2  
: 47 CFR Part 90, Subpart S  
**RECEIPT DATE** : 2023-12-26  
**TEST DATE** : 2023-12-29 to 2024-01-28  
**ISSUE DATE** : 2024-03-06



Edited by: Peng Mi  
Peng Mi (Rapporteur)  
Approved by: Shen Junsheng  
Shen Junsheng (Supervisor)

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





# DIRECTORY

- 1. Technical Information ..... 3**
- 1.1. Applicant and Manufacturer Information ..... 3**
- 1.2. Equipment Under Test (EUT) Description ..... 3**
- 1.3. Maximum E.R.P./E.I.R.P. and Emission Designator ..... 4**
- 1.4. Test Standards and Results ..... 5**
- 1.5. Environmental Conditions ..... 6**
- 2. 47 CFR Part 2, Part 90S Requirements ..... 7**
- 2.1. Transmitter Conducted Output Power and E.R.P./E.I.R.P. .... 7**
- 2.2. Occupied Bandwidth ..... 16**
- 2.3. Frequency Stability ..... 25**
- 2.4. Conducted Spurious Emissions ..... 27**
- 2.5. Band Edge ..... 30**
- 2.6. Radiated Spurious Emissions ..... 34**
- Annex A Test Uncertainty ..... 40**
- Annex B Testing Laboratory Information ..... 41**

<b>Change History</b>		
<b>Version</b>	<b>Date</b>	<b>Reason for change</b>
1.0	2024-03-06	First edition



# 1. Technical Information

Note: Provide by applicant.

## 1.1. Applicant and Manufacturer Information

<b>Applicant:</b>	BLU Products, Inc.
<b>Applicant Address:</b>	8600 NW 36th Street, Suite #300 Miami, FL 33166, USA
<b>Manufacturer:</b>	BLU Products, Inc.
<b>Manufacturer Address:</b>	8600 NW 36th Street, Suite #300 Miami, FL 33166, USA

## 1.2. Equipment Under Test (EUT) Description

<b>Product Name:</b>	Smart Phone	
<b>Sample No.:</b>	6#	
<b>Hardware Version:</b>	YK507-MB-V1.0	
<b>Software Version:</b>	BLU_C0176_V13.0.G.03.08_GENERIC_6-12-2023_1930	
<b>Modulation Type:</b>	QPSK, 16QAM, 64QAM	
<b>Operation Band:</b>	Band 26	
<b>Frequency Range:</b>	LTE Band 26	Tx: 814MHz–824MHz
		Rx: 859MHz–869MHz
<b>Channel Bandwidth</b>	LTE Band 26	1.4MHz, 3MHz, 5MHz, 10MHz
<b>Antenna Type:</b>	PIFA Antenna	
<b>Antenna Gain:</b>	LTE Band 26	-1.52dBi
<b>Accessory Information:</b>	Battery	
	Brand Name:	BLU
	Model No.:	C775444200L
	Serial No.:	N/A
	Capacity:	2000mAh
	Rated Voltage:	3.8V
	Charge Limit:	4.35V
	Manufacturer:	Shenzhen Aerospace Electronic Co.,Ltd



<b>Accessory Information:</b>	AC Adapter	
	Brand Name:	BLU
	Model No.:	US-TY-1000
	Serial No.:	N/A
	Rated Output:	5V=1000A
	Rated Input:	100-240V~50/60Hz, 0.15A
	Manufacturer:	SHENZHEN TIANYIN ELECTRONICS CO., LTD.

**Note 1:** For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

### 1.3. Maximum E.R.P./E.I.R.P. and Emission Designator

LTE Band 26	Maximum E.R.P./E.I.R.P. (W)			Emission Designator (99%OBW)		
	BW(MHz)	QPSK	16QAM	64QAM	QPSK	16QAM
10	0.078	0.078	0.075	9M01G7D	8M97W7D	8M99W7D
5	0.078	0.086	0.079	4M50G7D	4M50W7D	4M51W7D
3	0.078	0.077	0.078	2M69G7D	2M70W7D	2M70W7D
1.4	0.078	0.079	0.079	1M09G7D	1M10W7D	1M10W7D



## 1.4. Test Standards and Results

The objective of the report is to perform testing according to Part 2 and Part 90 for the EUT FCC ID Certification:

No	Identity	Document Title
1	47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	47 CFR Part 90	Miscellaneous Wireless Communications Services

Test detailed items/section required by FCC rules and results are as below:

Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
2.1046, 90.635(b)	Transmitter Conducted Output Power and ERP/EIRP	Jan. 24, 2024	Chen Hao	PASS	No deviation
90.209	Occupied Bandwidth	Jan. 10, 2024	Gan Jing	PASS	No deviation
2.1055, 90.213	Frequency Stability	Jan. 24, 2024	Gan Jing	PASS	No deviation
2.1051, 90.691	Conducted Spurious Emissions	Jan. 10, 2024	Gan Jing	PASS	No deviation
2.1051, 90.691	Band Edge	Jan. 09, 2024	Gan Jing	PASS	No deviation
2.1053, 90.691	Radiated Spurious Emissions	Nov. 29, 2023 to Jan. 28, 2024	Gao Jianrou	PASS	No deviation

**Note 1:** The tests were performed according to the method of measurements prescribed in KDB971168 D01 v03 and ANSI/TIA-603-E-2016.

**Note 2:** Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

**Note 3:** When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.



## 1.5. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106

## 2.47 CFR Part 2, Part 90S Requirements


### 2.1. Transmitter Conducted Output Power and E.R.P./E.I.R.P.

#### 2.1.1. Requirement

According to FCC section 2.1046(a), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in FCC section 2.1033(c)(8).

According to FCC section 90.635(b) for LTE Band 26, the maximum output power of the transmitter for mobile stations is 100 watts.

#### 2.1.2. Test Description

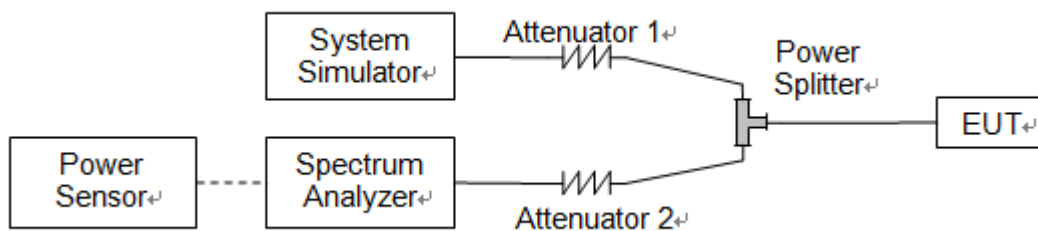

The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power. A call is established between the EUT and the SS.

#### 2.1.3. Test procedure

KDB 971168 D01v03 Section 5.2 and ANSI/TIA-603-E-2016.

$EIRP \text{ (dBm)} = \text{Conducted Output Power (dBm)} + \text{Antenna Gain (dBi)}$

$ERP \text{ (dBm)} = EIPR \text{ (dBm)} - 2.15$



## 2.1.4. Result

## Conducted Output Power

LTE Band 26						
BW [MHz]	Modulation	RB Size	RB Offset	Average Power Low Ch. / Freq.	Average Power Middle Ch. / Freq.	Average Power High Ch. / Freq.
Channel				/	26740	/
Frequency (MHz)				/	819.0	/
10	QPSK	1	0	/	22.35	/
10	QPSK	1	25	/	22.59	/
10	QPSK	1	49	/	22.45	/
10	QPSK	25	0	/	22.59	/
10	QPSK	25	12	/	22.52	/
10	QPSK	25	25	/	22.45	/
10	QPSK	50	0	/	22.48	/
10	16QAM	1	0	/	22.31	/
10	16QAM	1	25	/	22.32	/
10	16QAM	1	49	/	22.19	/
10	16QAM	25	0	/	22.60	/
10	16QAM	25	12	/	22.22	/
10	16QAM	25	25	/	22.13	/
10	16QAM	50	0	/	22.31	/
10	64QAM	1	0	/	21.98	/
10	64QAM	1	25	/	22.03	/
10	64QAM	1	49	/	21.89	/
10	64QAM	25	0	/	22.40	/
10	64QAM	25	12	/	22.42	/
10	64QAM	25	25	/	22.28	/
10	64QAM	50	0	/	22.40	/





LTE Band 26						
BW [MHz]	Modulation	RB Size	RB Offset	Average Power Low Ch. / Freq.	Average Power Middle Ch. / Freq.	Average Power High Ch. / Freq.
Channel				26715	26740	26765
Frequency (MHz)				816.5	819.0	821.5
5	QPSK	1	0	22.29	22.37	22.36
5	QPSK	1	12	22.36	22.18	22.52
5	QPSK	1	24	22.27	22.12	22.28
5	QPSK	12	0	22.44	22.50	22.13
5	QPSK	12	7	22.55	22.58	22.47
5	QPSK	12	13	22.47	22.45	22.39
5	QPSK	25	0	22.46	22.16	22.23
5	16QAM	1	0	22.19	22.36	22.76
5	16QAM	1	12	22.57	22.52	22.99
5	16QAM	1	24	22.24	22.22	22.55
5	16QAM	12	0	22.46	22.34	22.31
5	16QAM	12	7	22.60	22.35	22.54
5	16QAM	12	13	22.37	22.18	22.50
5	16QAM	25	0	22.36	22.26	22.53
5	64QAM	1	0	22.03	22.07	22.19
5	64QAM	1	12	22.59	22.35	22.36
5	64QAM	1	24	22.19	22.08	22.33
5	64QAM	12	0	22.40	22.42	22.48
5	64QAM	12	7	22.64	22.25	22.57
5	64QAM	12	13	22.47	22.25	22.27
5	64QAM	25	0	22.54	22.37	22.52



LTE Band 26						
BW [MHz]	Modulation	RB Size	RB Offset	Average Power Low Ch. / Freq.	Average Power Middle Ch. / Freq.	Average Power High Ch. / Freq.
Channel				26705	26740	26775
Frequency (MHz)				815.5	819.0	822.5
3	QPSK	1	0	22.31	22.52	22.46
3	QPSK	1	8	22.47	22.53	22.16
3	QPSK	1	14	22.30	22.48	22.19
3	QPSK	8	0	22.41	22.38	22.46
3	QPSK	8	4	22.26	22.57	22.24
3	QPSK	8	7	22.28	22.52	21.96
3	QPSK	15	0	22.39	22.38	22.45
3	16QAM	1	0	22.45	22.33	22.53
3	16QAM	1	8	22.54	22.21	22.49
3	16QAM	1	14	22.47	22.38	22.39
3	16QAM	8	0	22.51	22.28	22.40
3	16QAM	8	4	22.55	22.24	22.25
3	16QAM	8	7	22.51	22.29	22.27
3	16QAM	15	0	22.52	22.26	22.46
3	64QAM	1	0	22.17	22.17	21.90
3	64QAM	1	8	22.36	21.89	21.95
3	64QAM	1	14	22.23	22.12	22.21
3	64QAM	8	0	22.28	22.42	22.18
3	64QAM	8	4	22.11	22.57	22.40
3	64QAM	8	7	22.39	22.32	22.15
3	64QAM	15	0	22.51	22.53	22.28



LTE Band 26						
BW [MHz]	Modulation	RB Size	RB Offset	Average Power Low Ch. / Freq.	Average Power Middle Ch. / Freq.	Average Power High Ch. / Freq.
Channel				26697	26740	26783
Frequency (MHz)				814.7	819.0	823.3
1.4	QPSK	1	0	22.36	22.48	22.37
1.4	QPSK	1	3	22.46	22.58	22.45
1.4	QPSK	1	5	22.39	22.38	22.37
1.4	QPSK	3	0	22.46	22.14	22.50
1.4	QPSK	3	1	22.52	22.43	22.60
1.4	QPSK	3	3	22.48	22.51	22.43
1.4	QPSK	6	0	22.50	22.47	22.31
1.4	16QAM	1	0	22.28	22.09	22.34
1.4	16QAM	1	3	22.39	22.56	22.20
1.4	16QAM	1	5	22.35	22.20	22.36
1.4	16QAM	3	0	22.16	22.53	22.27
1.4	16QAM	3	1	22.02	22.60	22.36
1.4	16QAM	3	3	22.30	22.58	22.39
1.4	16QAM	6	0	22.08	22.63	22.25
1.4	64QAM	1	0	22.12	22.28	22.23
1.4	64QAM	1	3	22.26	22.38	22.30
1.4	64QAM	1	5	22.16	22.23	22.06
1.4	64QAM	3	0	22.29	22.62	22.39
1.4	64QAM	3	1	22.17	22.64	22.35
1.4	64QAM	3	3	22.17	22.64	22.26
1.4	64QAM	6	0	22.29	22.57	22.35



**Effective Radiated Power and Effective Isotropic Radiated Power**

LTE Band 26				Measured E.R.P.			
BW [MHz]	Modulation	RB Size	RB Offset	Low Ch. / Freq.	Middle Ch. / Freq.	High Ch. / Freq.	
Channel				/	26740	/	
Frequency (MHz)				/	819	/	
				/	dBm	W	/
10	QPSK	1	0	/	18.68	0.074	/
10	QPSK	1	25	/	18.92	0.078	/
10	QPSK	1	49	/	18.78	0.076	/
10	QPSK	25	0	/	18.92	0.078	/
10	QPSK	25	12	/	18.85	0.077	/
10	QPSK	25	25	/	18.78	0.076	/
10	QPSK	50	0	/	18.81	0.076	/
10	16QAM	1	0	/	18.64	0.073	/
10	16QAM	1	25	/	18.65	0.073	/
10	16QAM	1	49	/	18.52	0.071	/
10	16QAM	25	0	/	18.93	0.078	/
10	16QAM	25	12	/	18.55	0.072	/
10	16QAM	25	25	/	18.46	0.070	/
10	16QAM	50	0	/	18.64	0.073	/
10	64QAM	1	0	/	18.31	0.068	/
10	64QAM	1	25	/	18.36	0.069	/
10	64QAM	1	49	/	18.22	0.066	/
10	64QAM	25	0	/	18.73	0.075	/
10	64QAM	25	12	/	18.75	0.075	/
10	64QAM	25	25	/	18.61	0.073	/
10	64QAM	50	0	/	18.73	0.075	/



LTE Band 26				Measured E.R.P.					
BW [MHz]	Modulation	RB Size	RB Offset	Low Ch. / Freq.		Middle Ch. / Freq.		High Ch. / Freq.	
Channel				26715		26740		26765	
Frequency (MHz)				816.5		819.0		821.5	
				dBm	W	dBm	W	dBm	W
5	QPSK	1	0	18.62	0.073	18.70	0.074	18.69	0.074
5	QPSK	1	12	18.69	0.074	18.51	0.071	18.85	0.077
5	QPSK	1	24	18.60	0.072	18.45	0.070	18.61	0.073
5	QPSK	12	0	18.77	0.075	18.83	0.076	18.46	0.070
5	QPSK	12	7	18.88	0.077	18.91	0.078	18.80	0.076
5	QPSK	12	13	18.80	0.076	18.78	0.076	18.72	0.074
5	QPSK	25	0	18.79	0.076	18.49	0.071	18.56	0.072
5	16QAM	1	0	18.52	0.071	18.69	0.074	19.09	0.081
5	16QAM	1	12	18.90	0.078	18.85	0.077	19.32	0.086
5	16QAM	1	24	18.57	0.072	18.55	0.072	18.88	0.077
5	16QAM	12	0	18.79	0.076	18.67	0.074	18.64	0.073
5	16QAM	12	7	18.93	0.078	18.68	0.074	18.87	0.077
5	16QAM	12	13	18.70	0.074	18.51	0.071	18.83	0.076
5	16QAM	25	0	18.69	0.074	18.59	0.072	18.86	0.077
5	64QAM	1	0	18.36	0.069	18.40	0.069	18.52	0.071
5	64QAM	1	12	18.92	0.078	18.68	0.074	18.69	0.074
5	64QAM	1	24	18.52	0.071	18.41	0.069	18.66	0.073
5	64QAM	12	0	18.73	0.075	18.75	0.075	18.81	0.076
5	64QAM	12	7	18.97	0.079	18.58	0.072	18.90	0.078
5	64QAM	12	13	18.80	0.076	18.58	0.072	18.60	0.072
5	64QAM	25	0	18.87	0.077	18.70	0.074	18.85	0.077



LTE Band 26				Measured E.R.P.					
BW [MHz]	Modulation	RB Size	RB Offset	Low Ch. / Freq.		Middle Ch. / Freq.		High Ch. / Freq.	
Channel				26705		26740		26775	
Frequency (MHz)				815.5		819.0		822.5	
				dBm	W	dBm	W	dBm	W
3	QPSK	1	0	18.64	0.073	18.85	0.077	18.79	0.076
3	QPSK	1	8	18.80	0.076	18.86	0.077	18.49	0.071
3	QPSK	1	14	18.63	0.073	18.81	0.076	18.52	0.071
3	QPSK	8	0	18.74	0.075	18.71	0.074	18.79	0.076
3	QPSK	8	4	18.59	0.072	18.90	0.078	18.57	0.072
3	QPSK	8	7	18.61	0.073	18.85	0.077	18.29	0.067
3	QPSK	15	0	18.72	0.074	18.71	0.074	18.78	0.076
3	16QAM	1	0	18.78	0.076	18.66	0.073	18.86	0.077
3	16QAM	1	8	18.87	0.077	18.54	0.071	18.82	0.076
3	16QAM	1	14	18.80	0.076	18.71	0.074	18.72	0.074
3	16QAM	8	0	18.84	0.077	18.61	0.073	18.73	0.075
3	16QAM	8	4	18.88	0.077	18.57	0.072	18.58	0.072
3	16QAM	8	7	18.84	0.077	18.62	0.073	18.60	0.072
3	16QAM	15	0	18.85	0.077	18.59	0.072	18.79	0.076
3	64QAM	1	0	18.50	0.071	18.50	0.071	18.23	0.067
3	64QAM	1	8	18.69	0.074	18.22	0.066	18.28	0.067
3	64QAM	1	14	18.56	0.072	18.45	0.070	18.54	0.071
3	64QAM	8	0	18.61	0.073	18.75	0.075	18.51	0.071
3	64QAM	8	4	18.44	0.070	18.90	0.078	18.73	0.075
3	64QAM	8	7	18.72	0.074	18.65	0.073	18.48	0.070
3	64QAM	15	0	18.84	0.077	18.86	0.077	18.61	0.073




LTE Band 26				Measured E.R.P.					
BW [MHz]	Modulation	RB Size	RB Offset	Low Ch. / Freq.		Middle Ch. / Freq.		High Ch. / Freq.	
Channel				26697		26740		26783	
Frequency (MHz)				814.7		819.0		823.3	
				dBm	W	dBm	W	dBm	W
1.4	QPSK	1	0	18.69	0.074	18.81	0.076	18.70	0.074
1.4	QPSK	1	3	18.79	0.076	18.91	0.078	18.78	0.076
1.4	QPSK	1	5	18.72	0.074	18.71	0.074	18.70	0.074
1.4	QPSK	3	0	18.79	0.076	18.47	0.070	18.83	0.076
1.4	QPSK	3	1	18.85	0.077	18.76	0.075	18.93	0.078
1.4	QPSK	3	3	18.81	0.076	18.84	0.077	18.76	0.075
1.4	QPSK	6	0	18.83	0.076	18.80	0.076	18.64	0.073
1.4	16QAM	1	0	18.61	0.073	18.42	0.070	18.67	0.074
1.4	16QAM	1	3	18.72	0.074	18.89	0.077	18.53	0.071
1.4	16QAM	1	5	18.68	0.074	18.53	0.071	18.69	0.074
1.4	16QAM	3	0	18.49	0.071	18.86	0.077	18.60	0.072
1.4	16QAM	3	1	18.35	0.068	18.93	0.078	18.69	0.074
1.4	16QAM	3	3	18.63	0.073	18.91	0.078	18.72	0.074
1.4	16QAM	6	0	18.41	0.069	18.96	0.079	18.58	0.072
1.4	64QAM	1	0	18.45	0.070	18.61	0.073	18.56	0.072
1.4	64QAM	1	3	18.59	0.072	18.71	0.074	18.63	0.073
1.4	64QAM	1	5	18.49	0.071	18.56	0.072	18.39	0.069
1.4	64QAM	3	0	18.62	0.073	18.95	0.079	18.72	0.074
1.4	64QAM	3	1	18.50	0.071	18.97	0.079	18.68	0.074
1.4	64QAM	3	3	18.50	0.071	18.97	0.079	18.59	0.072
1.4	64QAM	6	0	18.62	0.073	18.90	0.078	18.68	0.074

## 2.2. Occupied Bandwidth

### 2.2.1. Requirement

According to FCC section 2.1049, the occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission. Occupied bandwidth is also known as the 99% emission bandwidth.

### 2.2.2. Test Description

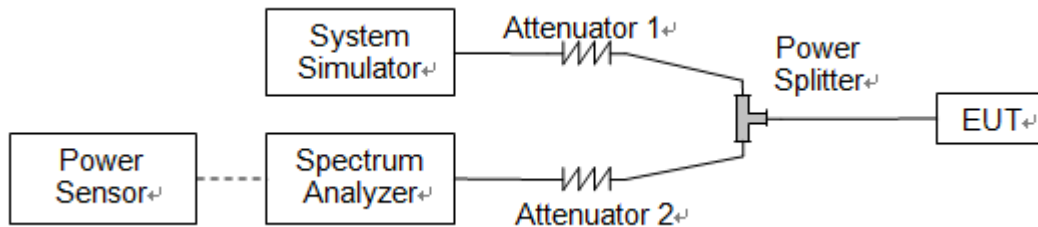

The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power. A call is established between the EUT and the SS.

### 2.2.3. Test procedure

KDB 971168 D01v03 Section 4.1 and ANSI/TIA-603-E-2016.

### 2.2.4. Test Result






LTE Band	BW(MHz)	Channel Level	Channel	Frequency (MHz)	Modulation	99% BW (MHz)	26dB BW (MHz)	Verdict
B26 Part90	1.4	Low	26697	814.7	QPSK	1.0880	1.2866	PASS
B26 Part90	1.4	Low	26697	814.7	16QAM	1.0996	1.2970	PASS
B26 Part90	1.4	Low	26697	814.7	64QAM	1.0972	1.2958	PASS
B26 Part90	1.4	Mid	26740	819	QPSK	1.0928	1.2588	PASS
B26 Part90	1.4	Mid	26740	819	16QAM	1.0960	1.2754	PASS
B26 Part90	1.4	Mid	26740	819	64QAM	1.0975	1.2845	PASS
B26 Part90	1.4	High	26783	823.3	QPSK	1.0926	1.2660	PASS
B26 Part90	1.4	High	26783	823.3	16QAM	1.0938	1.2827	PASS
B26 Part90	1.4	High	26783	823.3	64QAM	1.0981	1.2844	PASS
B26 Part90	3	Low	26705	815.5	QPSK	2.6879	2.9291	PASS
B26 Part90	3	Low	26705	815.5	16QAM	2.6977	2.9304	PASS
B26 Part90	3	Low	26705	815.5	64QAM	2.6959	2.9179	PASS
B26 Part90	3	Mid	26740	819	QPSK	2.6925	2.9236	PASS
B26 Part90	3	Mid	26740	819	16QAM	2.6943	2.9212	PASS
B26 Part90	3	Mid	26740	819	64QAM	2.6881	2.9147	PASS
B26 Part90	3	High	26775	822.5	QPSK	2.6908	2.9234	PASS
B26 Part90	3	High	26775	822.5	16QAM	2.6929	2.9321	PASS
B26	3	High	26775	822.5	64QAM	2.6949	2.9230	PASS




Part90								
B26 Part90	5	Low	26715	816.5	QPSK	4.5013	4.9258	PASS
B26 Part90	5	Low	26715	816.5	16QAM	4.5011	4.8863	PASS
B26 Part90	5	Low	26715	816.5	64QAM	4.5081	4.9104	PASS
B26 Part90	5	Mid	26740	819	QPSK	4.4983	4.9174	PASS
B26 Part90	5	Mid	26740	819	16QAM	4.5028	4.9011	PASS
B26 Part90	5	Mid	26740	819	64QAM	4.5052	4.9430	PASS
B26 Part90	5	High	26765	821.5	QPSK	4.4953	4.9179	PASS
B26 Part90	5	High	26765	821.5	16QAM	4.4985	4.8845	PASS
B26 Part90	5	High	26765	821.5	64QAM	4.4973	4.9094	PASS
B26 Part90	10	Low	26740	819	QPSK	8.9986	9.7361	PASS
B26 Part90	10	Low	26740	819	16QAM	8.9654	9.6996	PASS
B26 Part90	10	Low	26740	819	64QAM	8.9925	9.7536	PASS
B26 Part90	10	Mid	26740	819	QPSK	8.9859	9.7592	PASS
B26 Part90	10	Mid	26740	819	16QAM	8.9715	9.7255	PASS
B26 Part90	10	Mid	26740	819	64QAM	8.9824	9.7523	PASS
B26 Part90	10	High	26740	819	QPSK	9.0086	9.7326	PASS
B26 Part90	10	High	26740	819	16QAM	8.9624	9.7194	PASS
B26 Part90	10	High	26740	819	64QAM	8.9896	9.7882	PASS

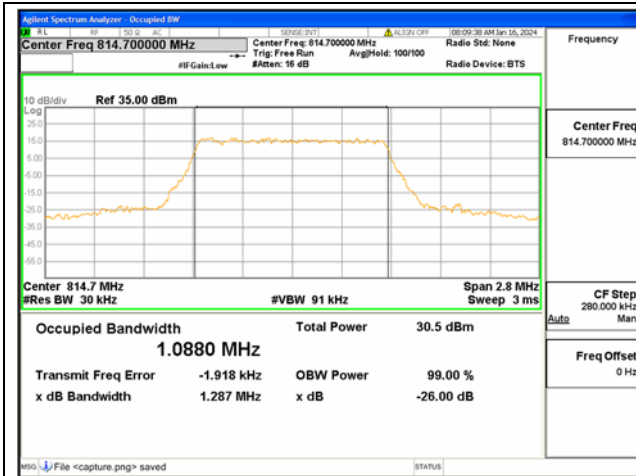


B26 Part90 / 1.4MHz / QPSK/ Low CH




B26 Part90 / 1.4MHz / 16QAM/ Low CH

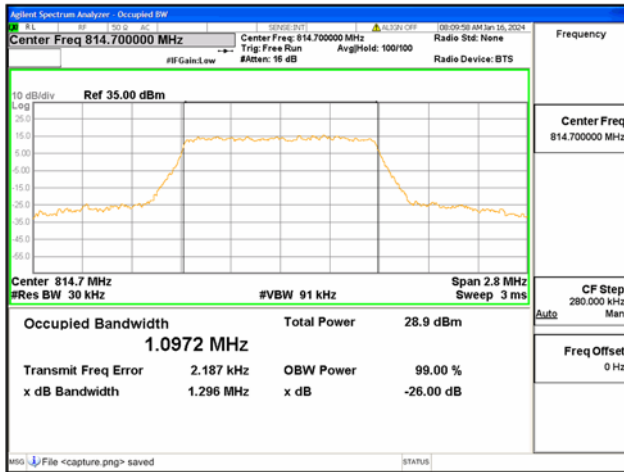


B26 Part90 / 1.4MHz / 64QAM/ Low CH

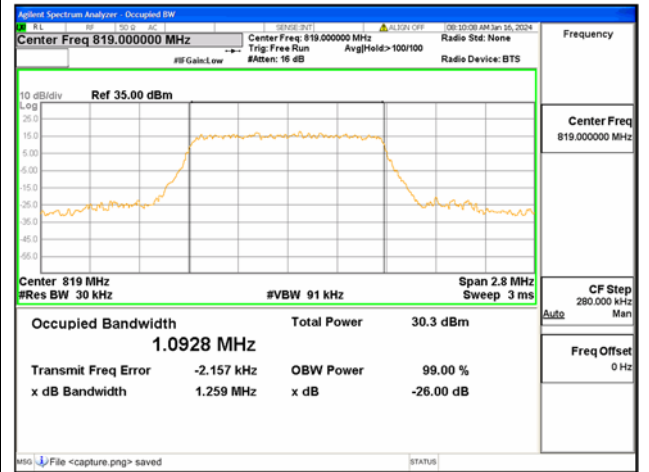


B26 Part90 / 1.4MHz / QPSK/ Mid CH

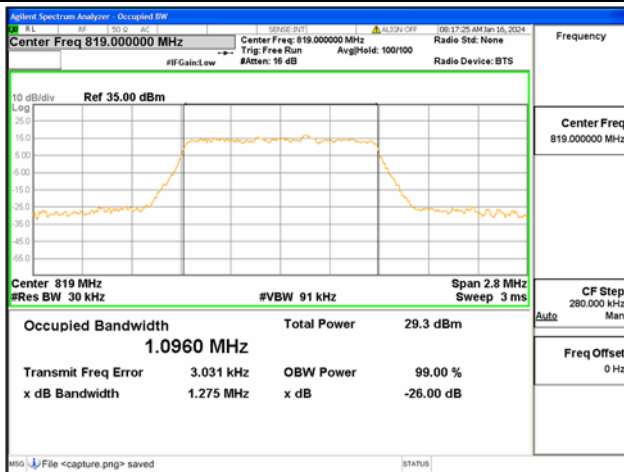


B26 Part90 / 1.4MHz / 16QAM/ Mid CH

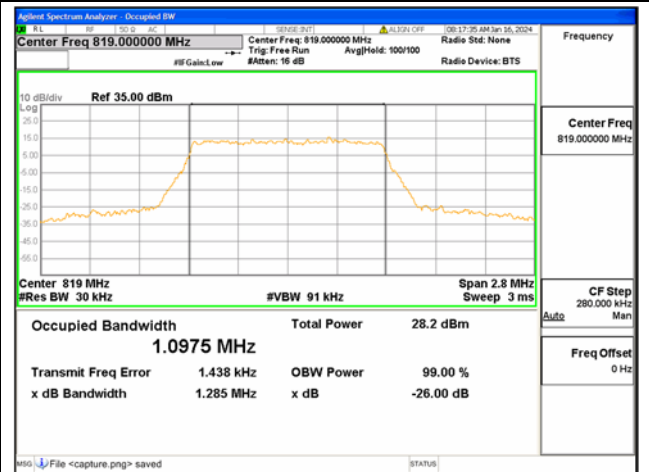


B26 Part90 / 1.4MHz / 64QAM/ Mid CH

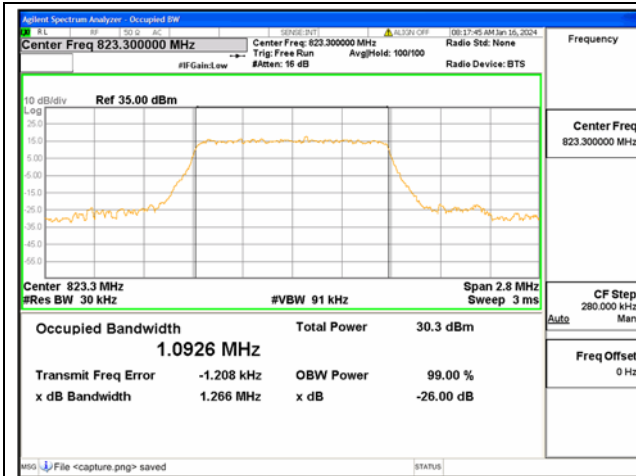


B26 Part90 / 1.4MHz / QPSK/ High CH

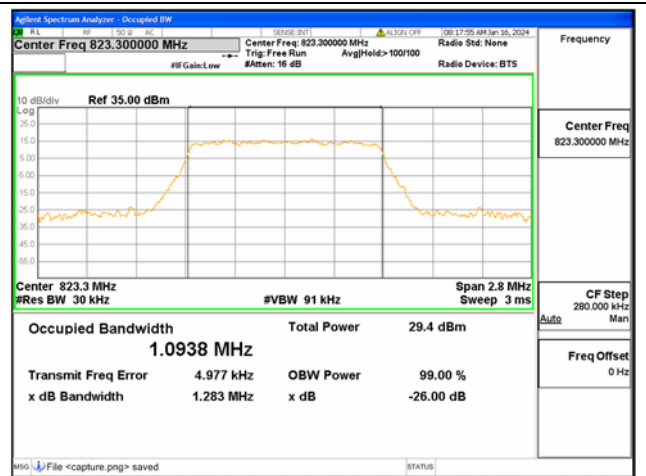


B26 Part90 / 1.4MHz / 16QAM/ High CH

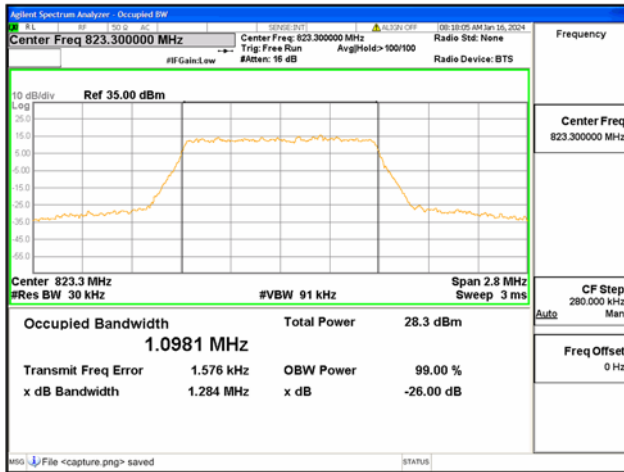


B26 Part90 / 1.4MHz / 64QAM/ High CH

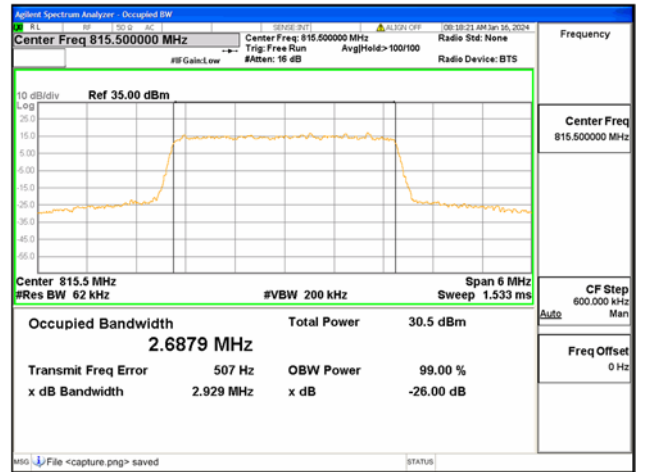


B26 Part90 / 3MHz / QPSK/ Low CH

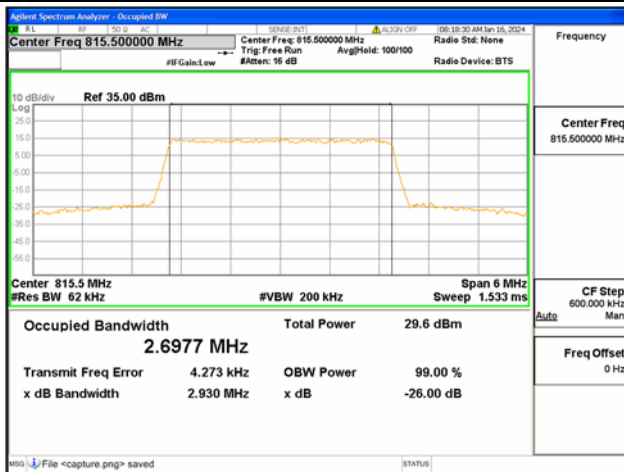

B26 Part90 / 3MHz / 16QAM/ Low CH

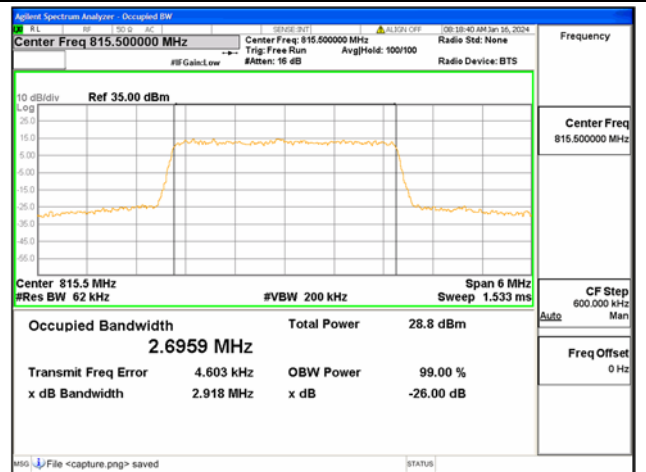


B26 Part90 / 3MHz / 64QAM/ Low CH

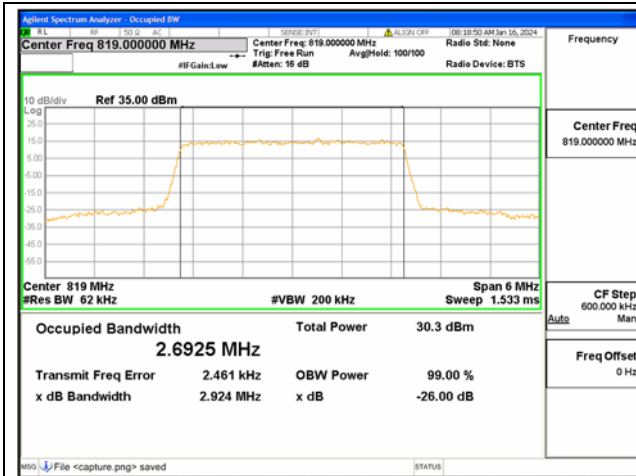


B26 Part90 / 3MHz / QPSK/ Mid CH




B26 Part90 / 3MHz / 16QAM/ Mid CH

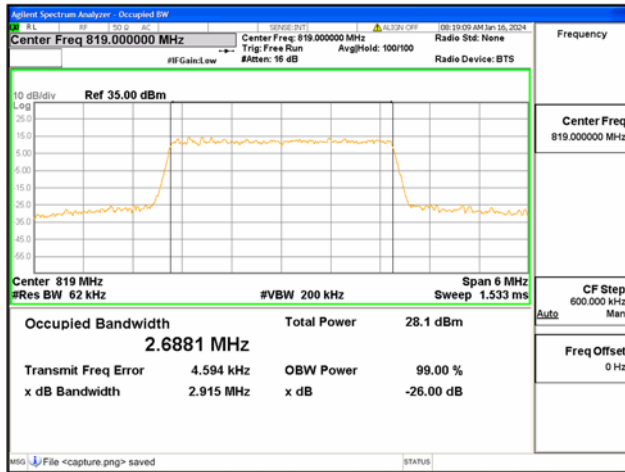


B26 Part90 / 3MHz / 64QAM/ Mid CH

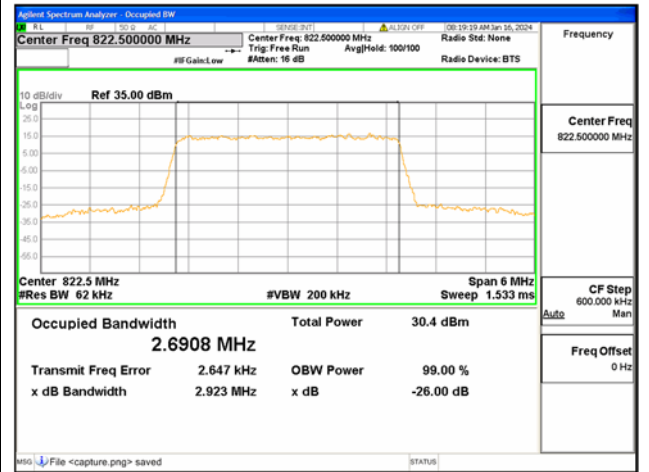

B26 Part90 / 3MHz / QPSK/ High CH

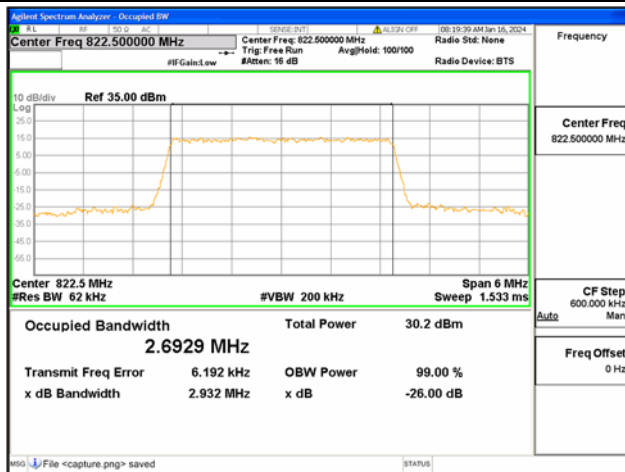


B26 Part90 / 3MHz / 16QAM/ High CH

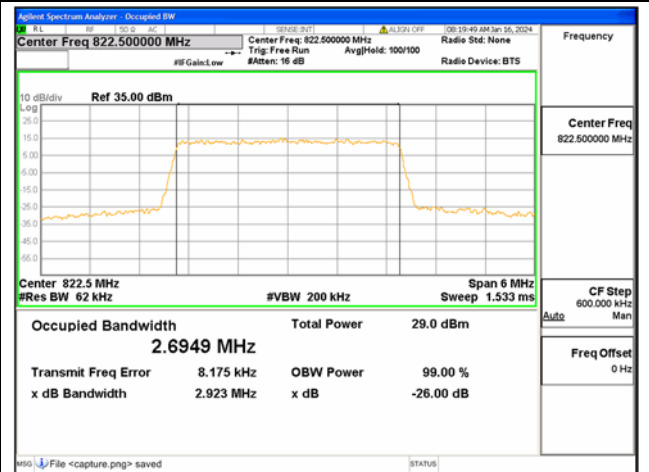


B26 Part90 / 3MHz / 64QAM/ High CH




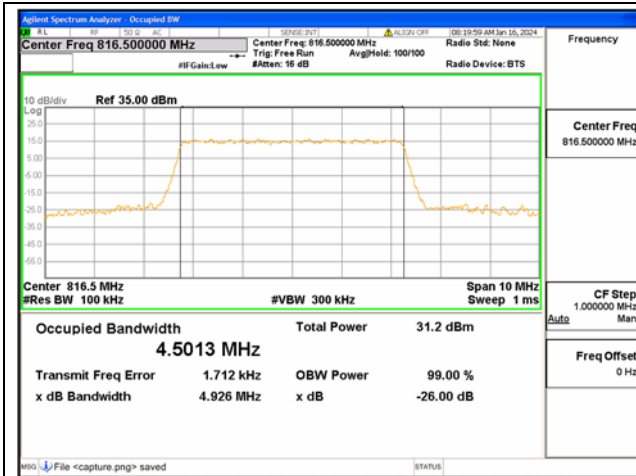


B26 Part90 / 5MHz / QPSK/ Low CH

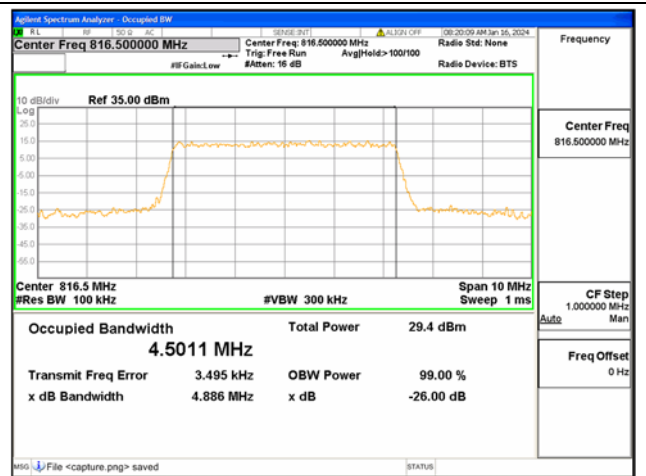


B26 Part90 / 5MHz / 16QAM/ Low CH

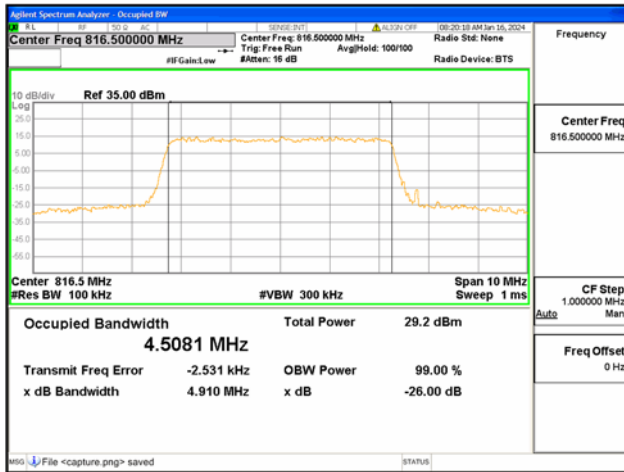


B26 Part90 / 5MHz / 64QAM/ Low CH

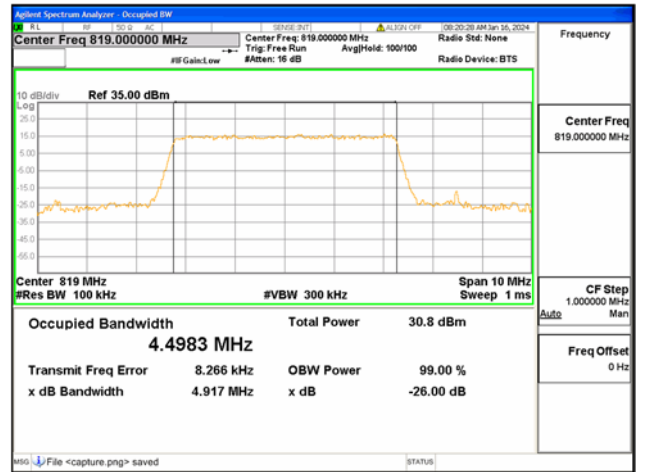


B26 Part90 / 5MHz / QPSK/ Mid CH

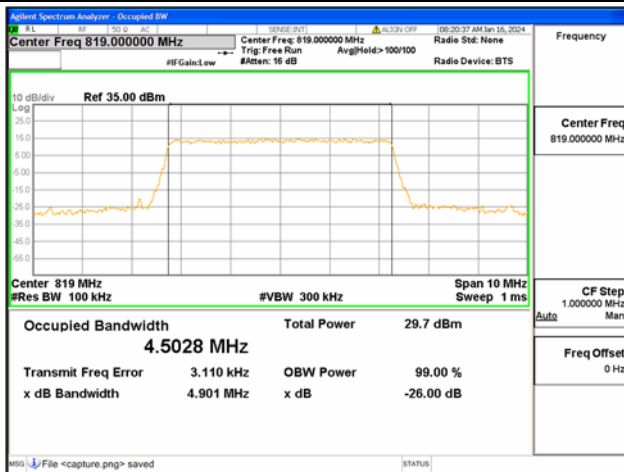

B26 Part90 / 5MHz / 16QAM/ Mid CH

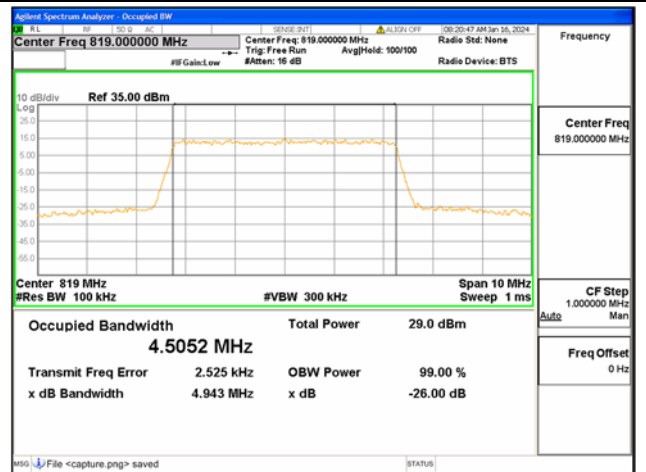


B26 Part90 / 5MHz / 64QAM/ Mid CH

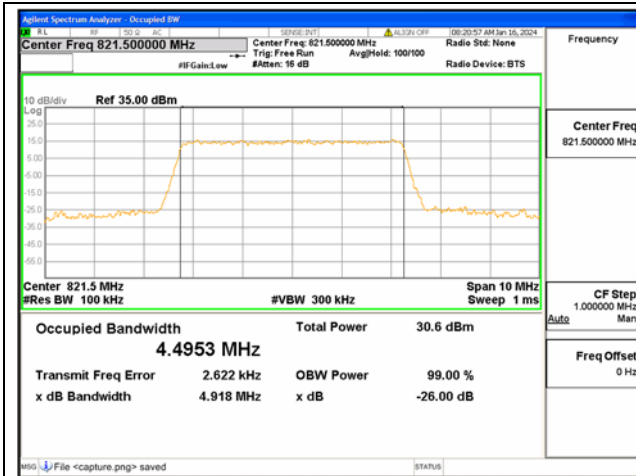


B26 Part90 / 5MHz / QPSK / High CH




B26 Part90 / 5MHz / 16QAM / High CH

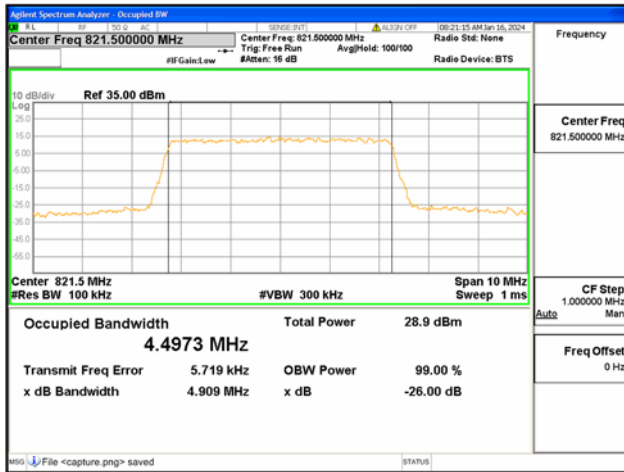


B26 Part90 / 5MHz / 64QAM / High CH

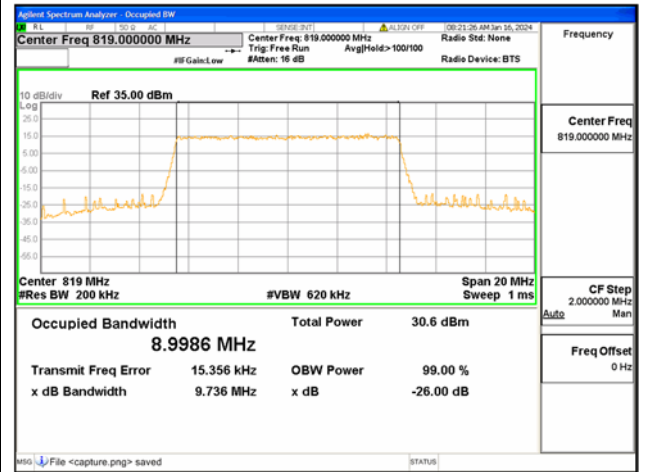


B26 Part90 / 10MHz / QPSK / Low CH

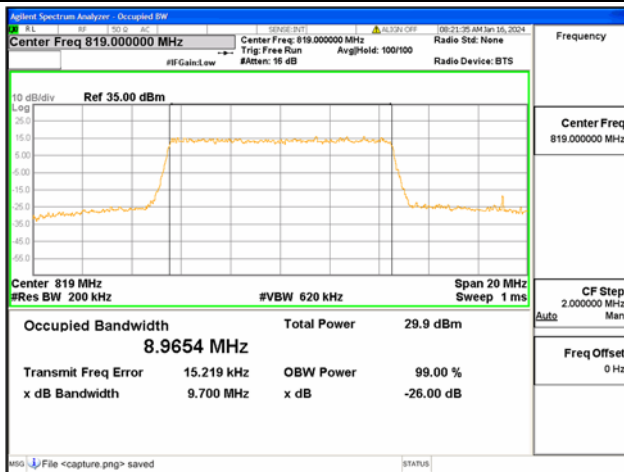


B26 Part90 / 10MHz / 16QAM / Low CH

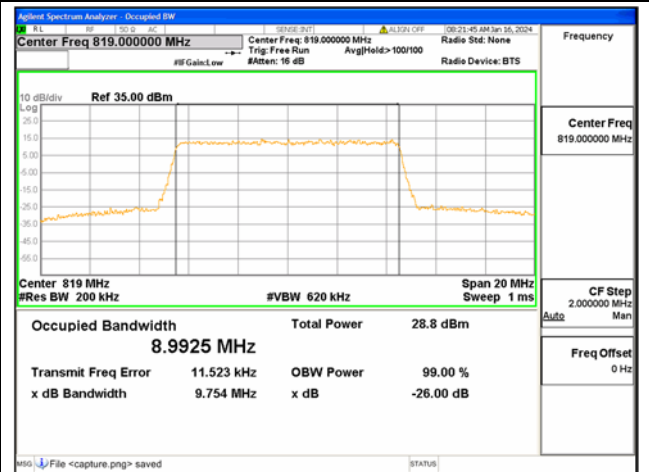


B26 Part90 / 10MHz / 64QAM / Low CH

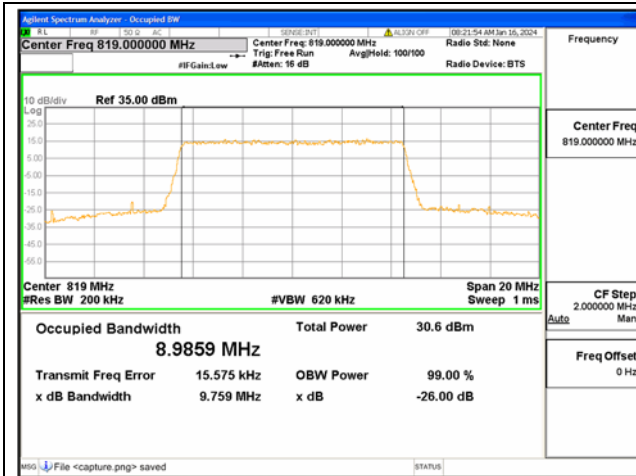


B26 Part90 / 10MHz / QPSK/ Mid CH

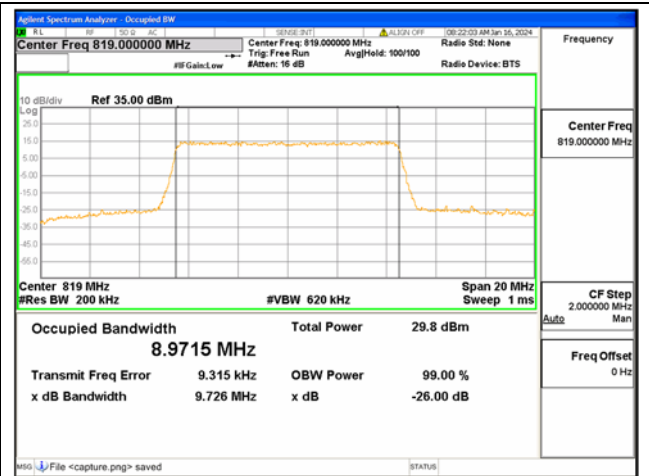


B26 Part90 / 10MHz / 16QAM/ Mid CH

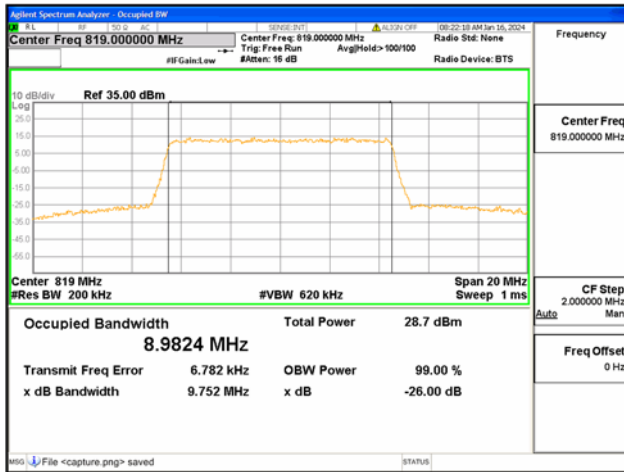


B26 Part90 / 10MHz / 64QAM/ Mid CH

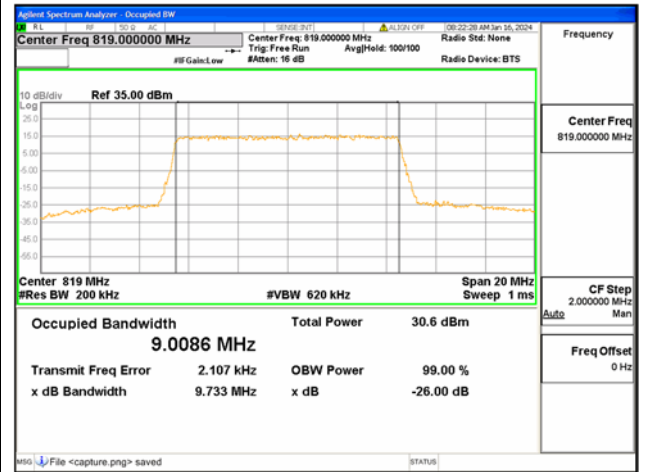

B26 Part90 / 10MHz / QPSK/ High CH

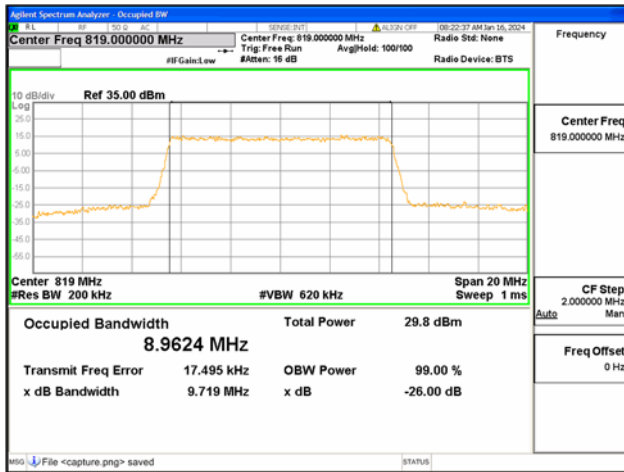

B26 Part90 / 10MHz / 16QAM/ High CH

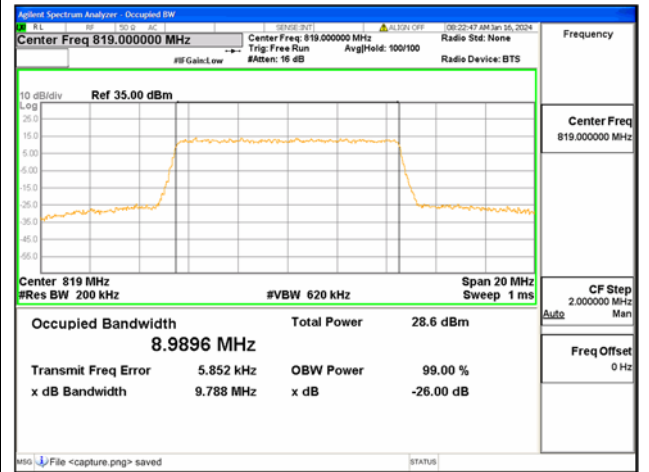

B26 Part90 / 10MHz / 64QAM/ High CH



## 2.3. Frequency Stability


### 2.3.1. Requirement

According to FCC section 2.1055 & 90.213, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. According to FCC section 2.1055, the test conditions are:

- (a) The temperature is varied from  $-30^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$  at intervals of not more than  $10^{\circ}\text{C}$ .
- (b) For hand carried battery powered equipment, the primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacture. The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

**Note:** The operating temperature of EUT is from  $-10^{\circ}\text{C}$  to  $55^{\circ}\text{C}$ , which are specified by the applicant.

### 2.3.2. Test Description

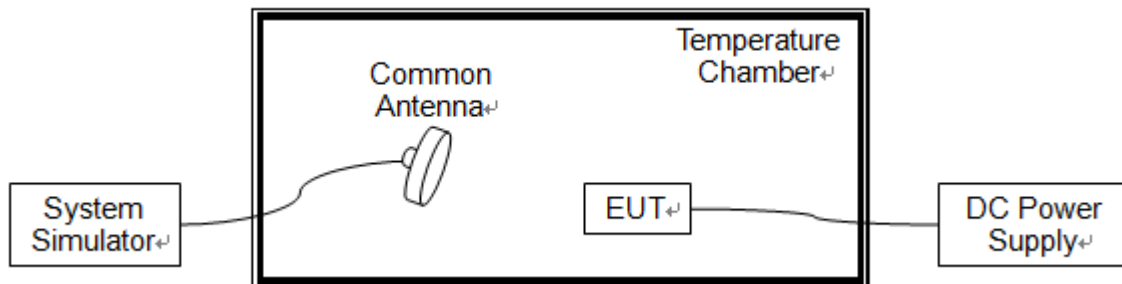

The EUT which is powered by the DC Power Supply directly, is located in the Temperature Chamber. The EUT is commanded by the System Simulator (SS) to operate at the maximum output power. A call is established between the EUT and the SS via a Common Antenna.

### 2.3.3. Test procedure

KDB 971168 D01v03 Section 9.0 and ANSI/TIA-603-E-2016.



**2.3.4. Test Result**

The nominal, highest and lowest extreme voltages are separately 3.80V, 4.35V and 3.50V, which are specified by the applicant; the normal temperature here used is 20°C.


LTE Band 26, 64QAM, Channel 26740, Frequency 819MHz					
Limit =±2.5ppm					
Voltage (%)	Power (VDC)	Temp (°C)	Fre. Dev. (Hz)	Deviation (ppm)	Result
Normal	3.85	+20(Ref)	20	0.024	PASS
Normal		-10	16	0.020	
Normal		0	15	0.018	
Normal		+10	17	0.021	
Normal		+20	15	0.018	
Normal		+30	-15	-0.018	
Normal		+40	22	<b>0.027</b>	
Normal		+50	-6	-0.007	
Normal		+55	14	0.017	
High		4.40	+20	19	
BATT.ENDPOINT	3.60	+20	13	0.016	

## 2.4. Conducted Spurious Emissions

### 2.4.1. Requirement

According to FCC section 2.1051, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43+10*\log(P)$ dB. This calculated to be -13dBm.

### 2.4.2. Test Description

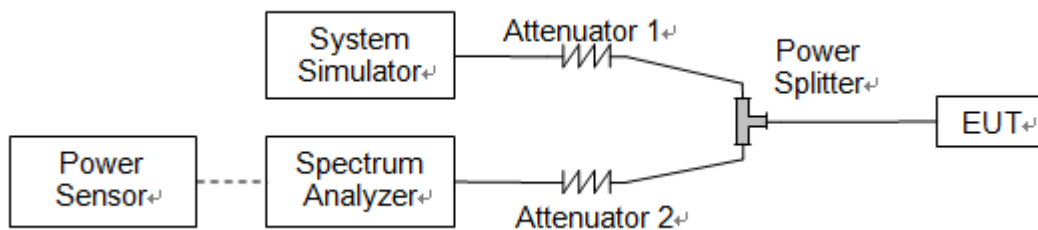

The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power. A call is established between the EUT and the SS.

### 2.4.3. Test procedure


KDB 971168 D01v03 Section 6.0 and ANSI/TIA-603-E-2016.



2.4.4. Test Result




B26 Part90 / 1.4MHz / Low CH / QPSK

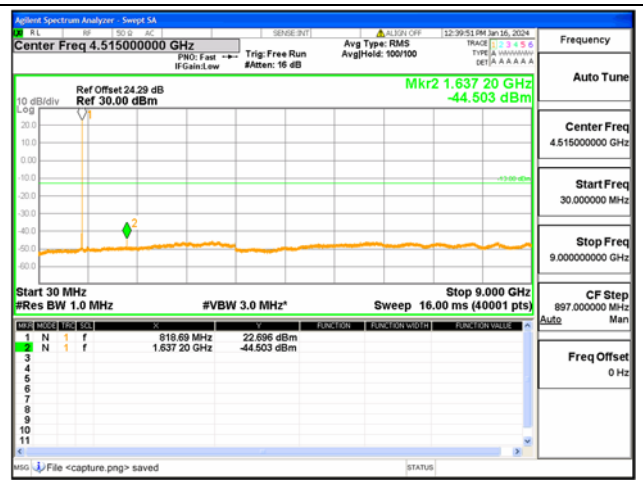


B26 Part90 / 1.4MHz / Mid CH / QPSK




B26 Part90 / 1.4MHz / High CH / QPSK

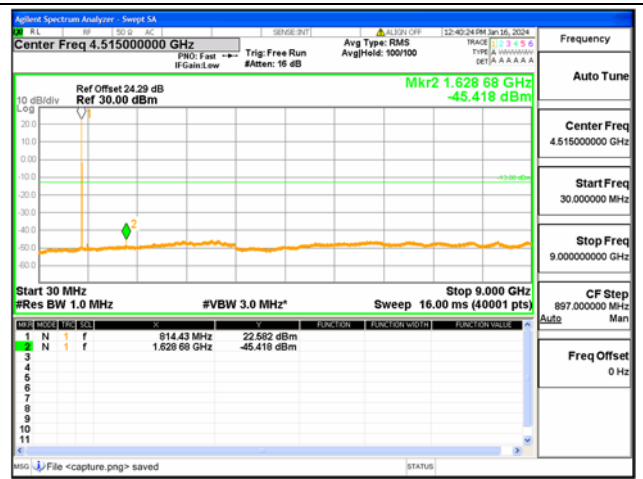


B26 Part90 / 3MHz / Low CH / QPSK

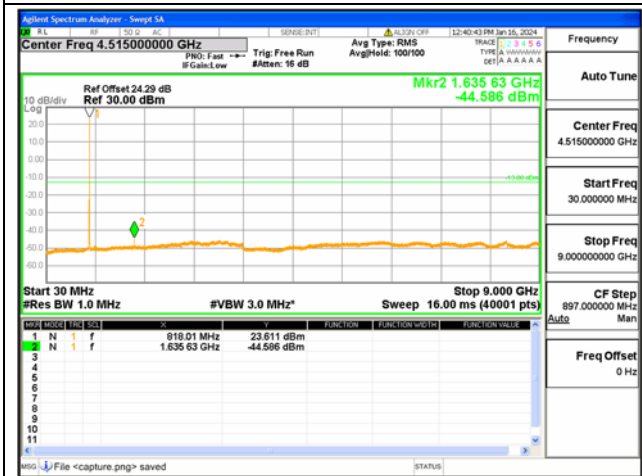


B26 Part90 / 3MHz / Mid CH / QPSK

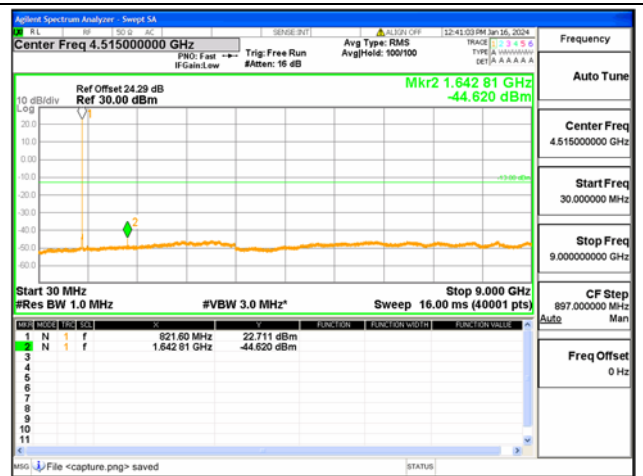


B26 Part90 / 3MHz / High CH / QPSK

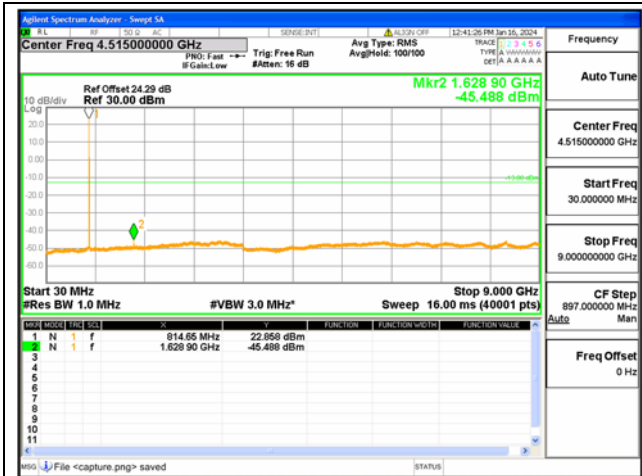


B26 Part90 / 5MHz / Low CH / QPSK

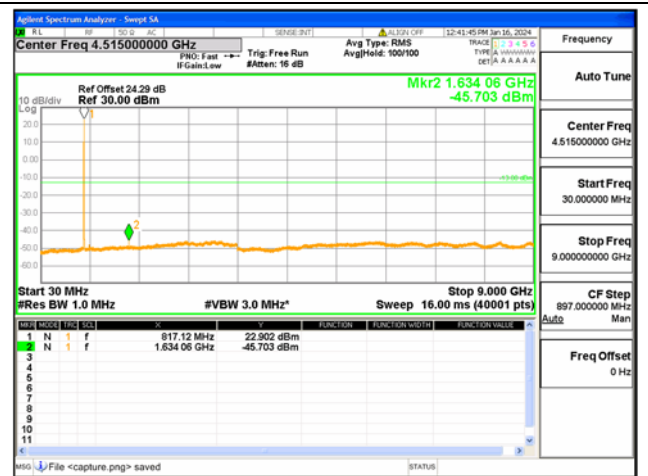


B26 Part90 / 5MHz / Mid CH / QPSK

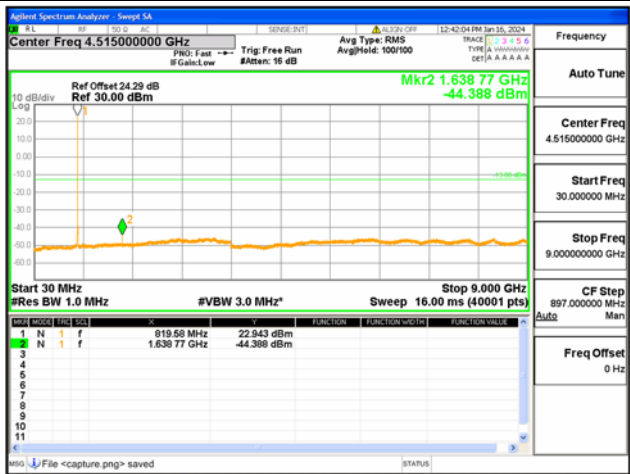


B26 Part90 / 5MHz / High CH / QPSK

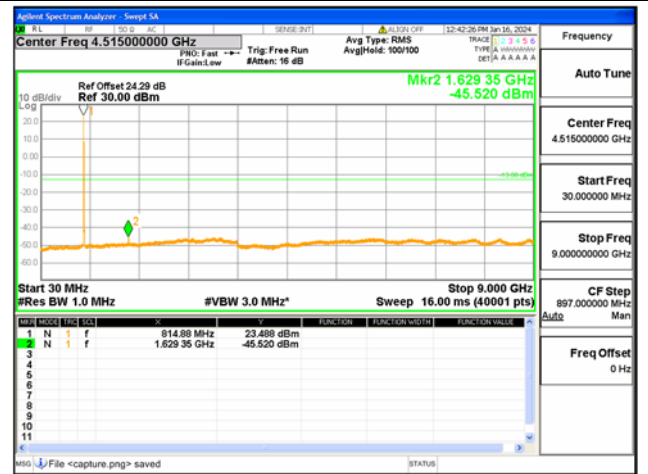

B26 Part90 / 10MHz / Low CH / QPSK

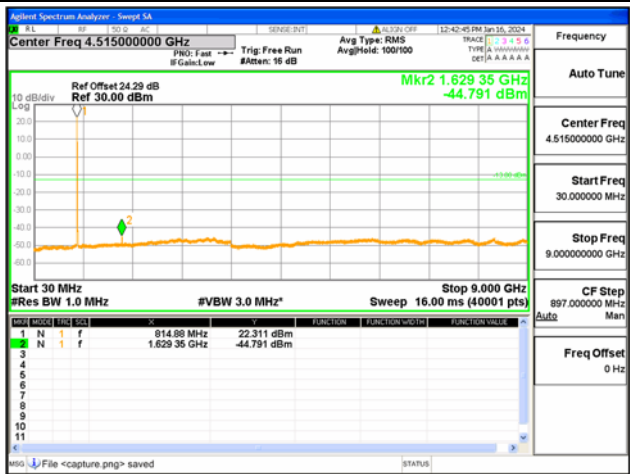

B26 Part90 / 10MHz / Mid CH / QPSK

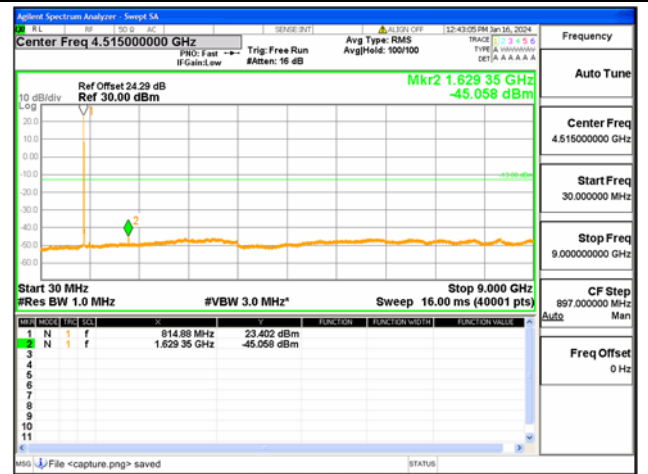

B26 Part90 / 10MHz / High CH / QPSK


## 2.5. Band Edge

### 2.5.1. Requirement

Band26

According to FCC section 90.961(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

### 2.5.2. Test Description

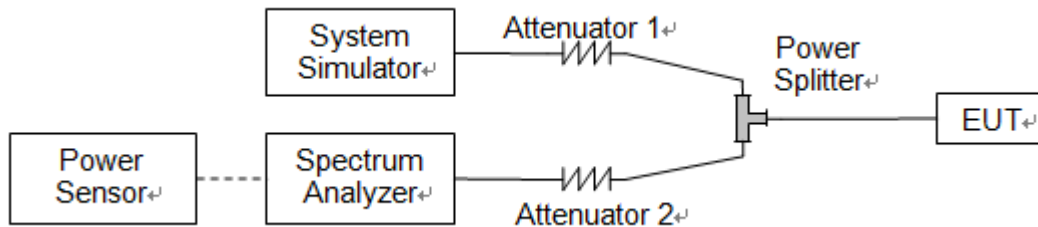


The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power. A call is established between the EUT and the SS.

### 2.5.3. Test procedure


KDB 971168 D01v03 Section 6.0 and ANSI/TIA-603-E-2016.




2.5.4. Test Result

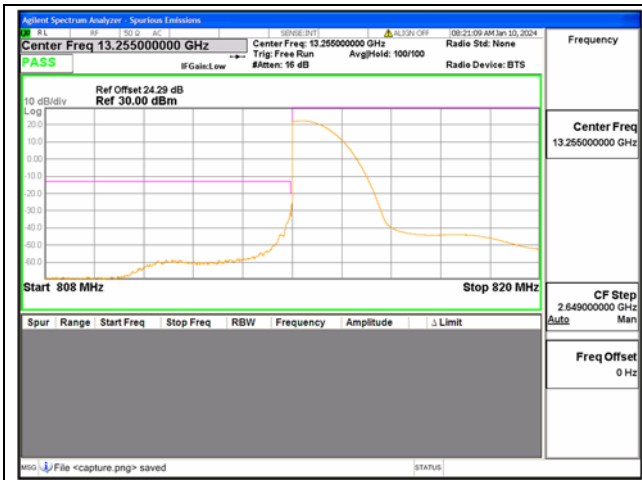


B26 Part90 / 1.4MHz / Low CH / QPSK / 1 RB

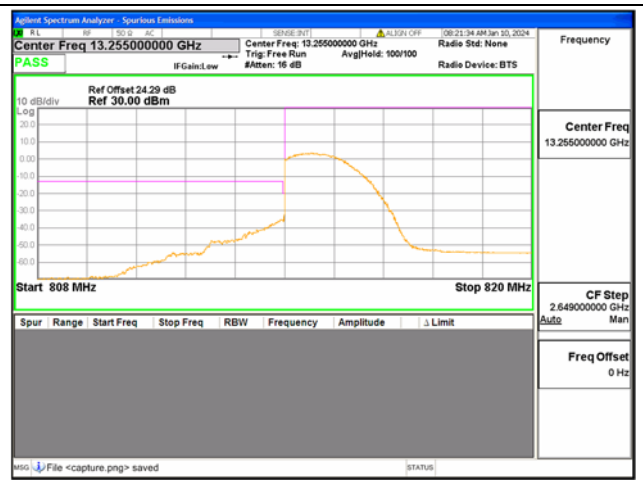


B26 Part90 / 1.4MHz / Low CH / QPSK / FULL RB

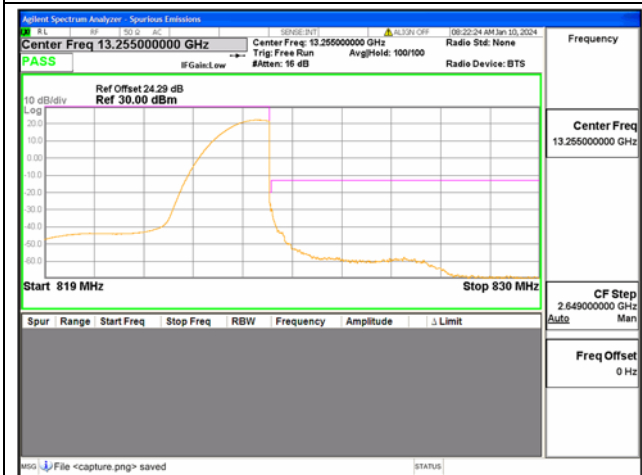


B26 Part90 / 1.4MHz / High CH / QPSK / 1 RB

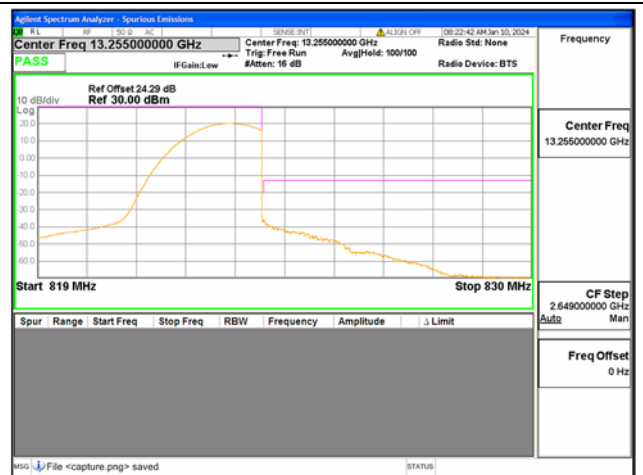

B26 Part90 / 1.4MHz / High CH / QPSK / FULL RB

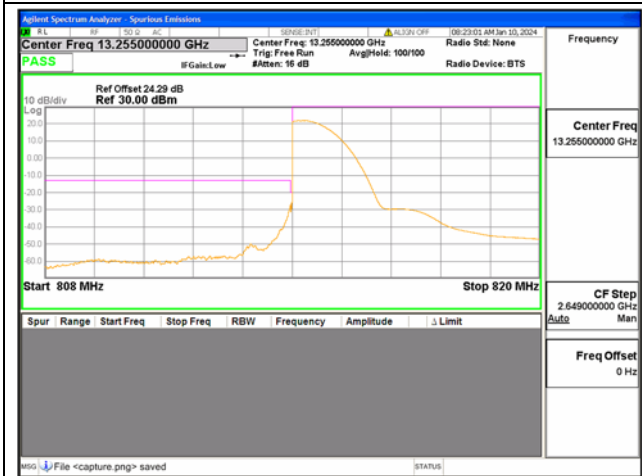

B26 Part90 / 3MHz / Low CH / QPSK / 1 RB

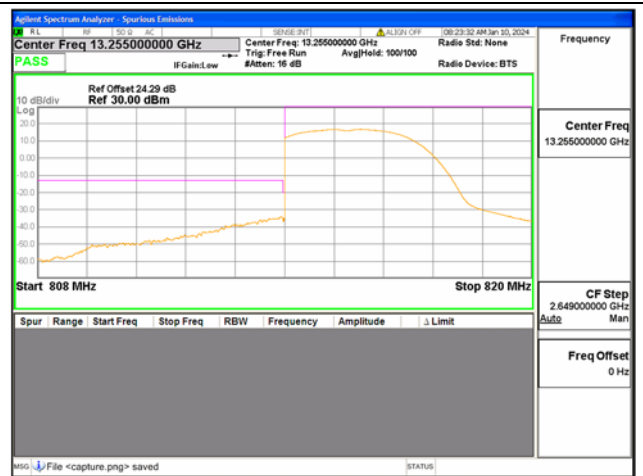

B26 Part90 / 3MHz / Low CH / QPSK / FULL RB







B26 Part90 / 3MHz / High CH / QPSK / 1 RB




B26 Part90 / 3MHz / High CH / QPSK / FULL RB

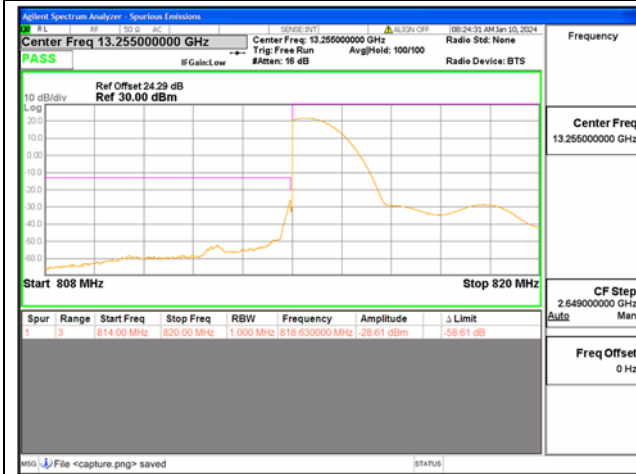


B26 Part90 / 5MHz / Low CH / QPSK / 1 RB

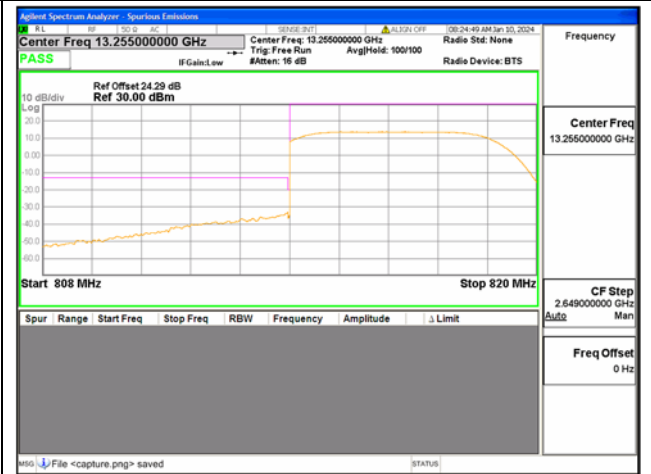

B26 Part90 / 5MHz / Low CH / QPSK / FULL RB

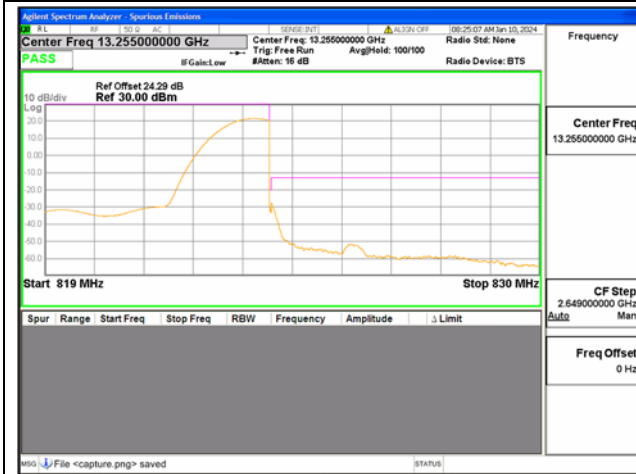


B26 Part90 / 5MHz / High CH / QPSK / 1 RB

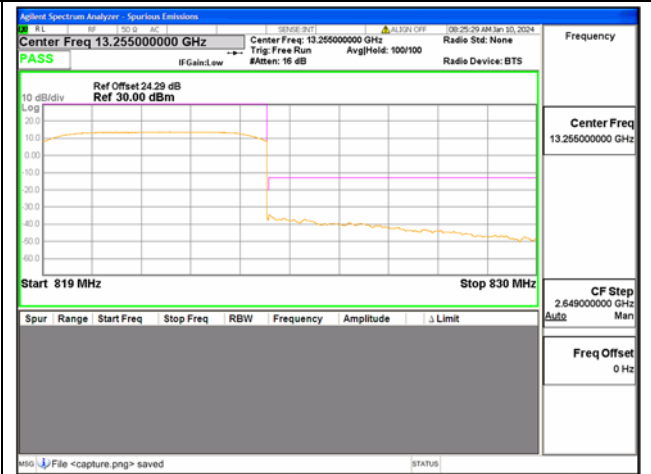


B26 Part90 / 5MHz / High CH / QPSK / FULL RB




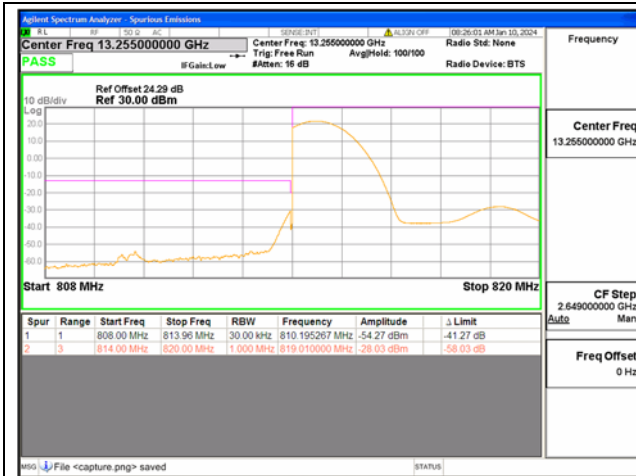


B26 Part90 / 10MHz / Low CH / QPSK / 1 RB

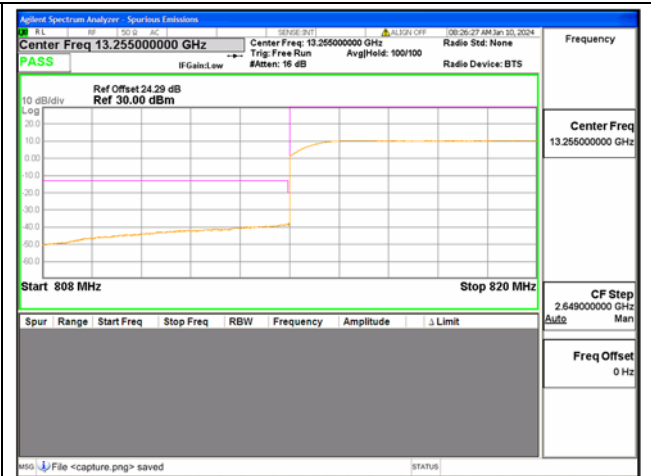

B26 Part90 / 10MHz / Low CH / QPSK / FULL RB

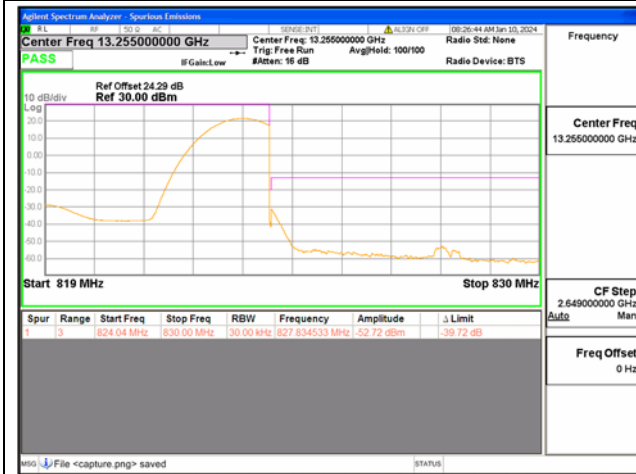

B26 Part90 / 10MHz / High CH / QPSK / 1 RB

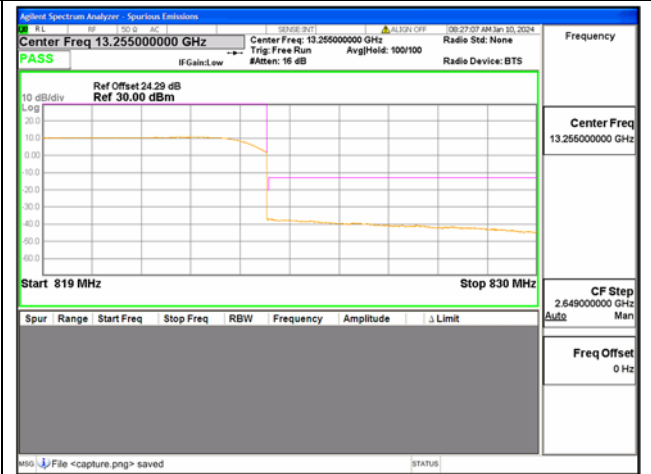


B26 Part90 / 10MHz / High CH / QPSK / FULL RB


## 2.6. Radiated Spurious Emissions

### 2.6.1. Requirement

According to FCC section 2.1051, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43+10*\log(P)$ dB. This calculated to be -13dBm.

### 2.6.2. Test Description

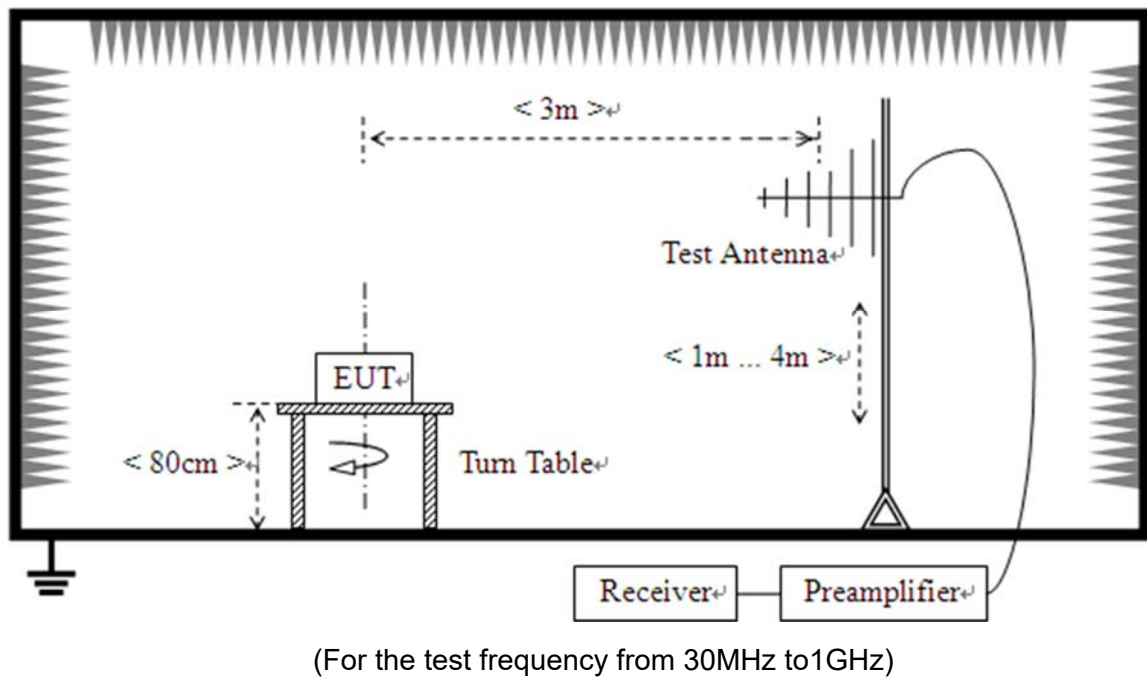

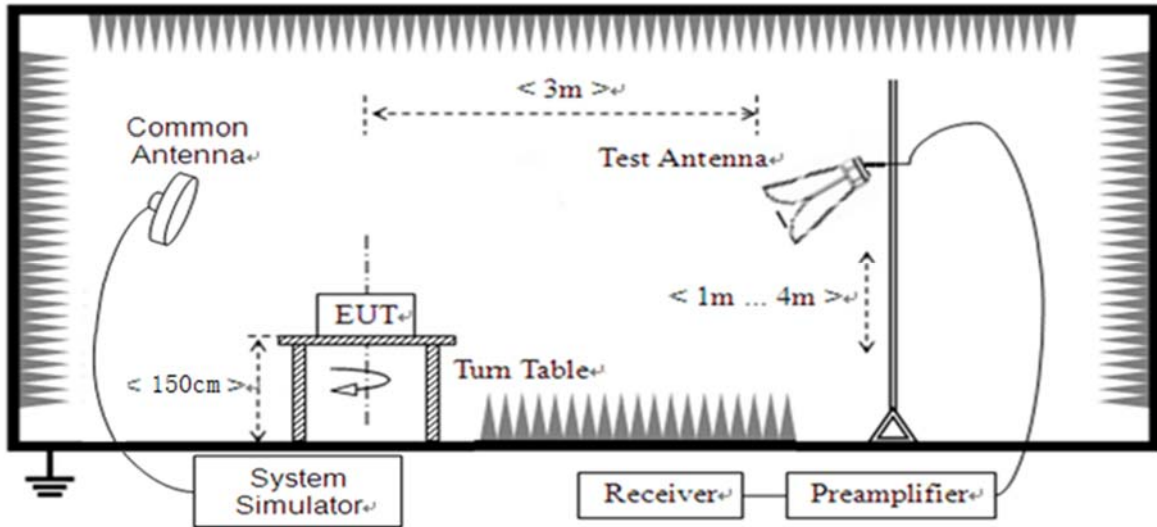

(For the test frequency above 1GHz)

The EUT is located in a 3m Full-Anechoic Chamber, the cable loss, air loss and so on of the site as factors are pre-calibrated using the "Substitution" method, and calculated to correct the reading. A call is established between the EUT and the SS via a Common Antenna. The EUT is commanded by the SS to operate at the maximum and minimum output power, and only the test result of the maximum output power was recorded.

In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground and the Turn Table is actuated to turn from 0° to 360° to determine the maximum value of the radiated power. The emission levels at both horizontal and vertical polarizations should be tested. The Filters consists of Notch Filters and High Pass Filter.

**Note:** when doing measurements above 1GHz, the EUT has been within the 3dB cone width of the horn antenna during horizontal antenna.

### 2.6.3. Test procedure

KDB 971168 D01v03 Section 5.8 and ANSI/TIA-603-E-2016.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements.



#### 2.6.4. Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. The lowest, middle and highest channels are tested to verify the out of band emissions.

The substitution corrections are obtained as described below:

$$A_{\text{SUBST}} = P_{\text{SUBST\_TX}} - P_{\text{SUBST\_RX}} - L_{\text{SUBST\_CABLES}} + G_{\text{SUBST\_TX\_ANT}}$$

$$A_{\text{TOT}} = L_{\text{CABLES}} + A_{\text{SUBST}}$$

Where  $A_{\text{SUBST}}$  is the final substitution correction including receive antenna gain.

$P_{\text{SUBST\_TX}}$  is signal generator level,

$P_{\text{SUBST\_RX}}$  is receiver level,

$L_{\text{SUBST\_CABLES}}$  is cable losses including TX cable,

$G_{\text{SUBST\_TX\_ANT}}$  is substitution antenna gain.

$A_{\text{TOT}}$  is total correction factor including cable loss and substitution correction

During the test, the data of  $A_{\text{TOT}}$  was added in the test spectrum analyze, so spectrum analyze reading is the final values which contain the data of  $A_{\text{TOT}}$ .

**Note1:** The power of the EUT transmitting frequency should be ignored.


**Note2:** All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

**Note3:** All bandwidth and modulation were considered and evaluated respectively by performing full test for each band, only the worst cases (Max Bandwidth and QPSK mode) were recorded in this test report.


**Note 4:** N/A means the frequency is the basic frequency or the base station frequency, they are no need to verdict.

**Note 5:** The amplitude of emissions(18GHz to 10th harmonics) which are attenuated more than 20 dB below the limit are not be reported.

LTE Band 26, 5MHz BW, Low Channel, QPSK

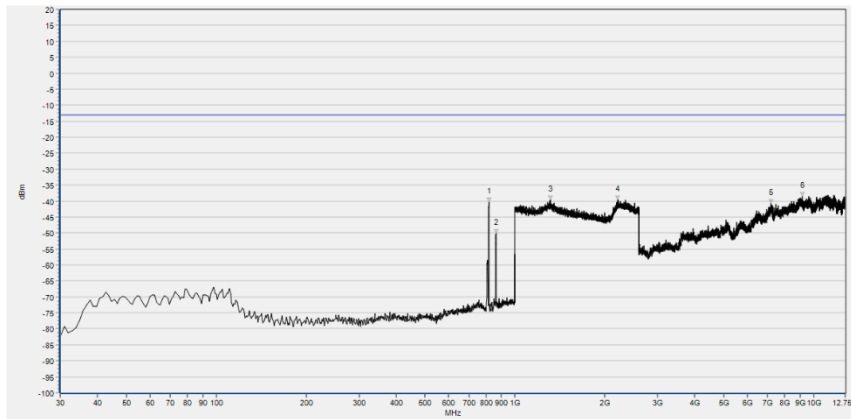


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	816.670	-40.41	-13.00	Horizontal	N/A
2	863.230	-50.16	-13.00	Horizontal	N/A
3	1313.085	-39.71	-13.00	Horizontal	PASS
4	2210.084	-39.62	-13.00	Horizontal	PASS
5	7186.789	-40.89	-13.00	Horizontal	PASS
6	9148.863	-38.58	-13.00	Horizontal	PASS

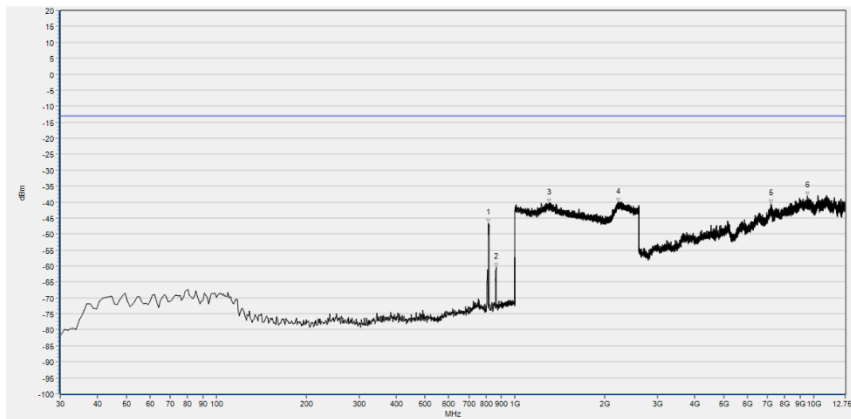


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	814.730	-46.60	-13.00	Vertical	N/A
2	863.230	-60.38	-13.00	Vertical	N/A
3	1298.359	-40.34	-13.00	Vertical	PASS
4	2219.048	-40.22	-13.00	Vertical	PASS
5	7190.480	-40.63	-13.00	Vertical	PASS
6	9501.409	-38.12	-13.00	Vertical	PASS

LTE Band 26, 5MHz BW, Mid Channel, QPSK

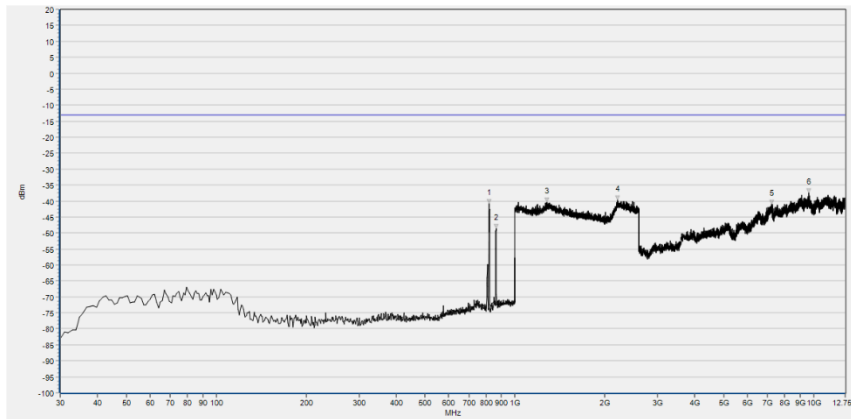


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	816.670	-40.68	-13.00	Horizontal	N/A
2	865.170	-48.54	-13.00	Horizontal	N/A
3	1275.950	-40.25	-13.00	Horizontal	PASS
4	2198.559	-39.62	-13.00	Horizontal	PASS
5	7240.316	-41.03	-13.00	Horizontal	PASS
6	9634.306	-37.47	-13.00	Horizontal	PASS

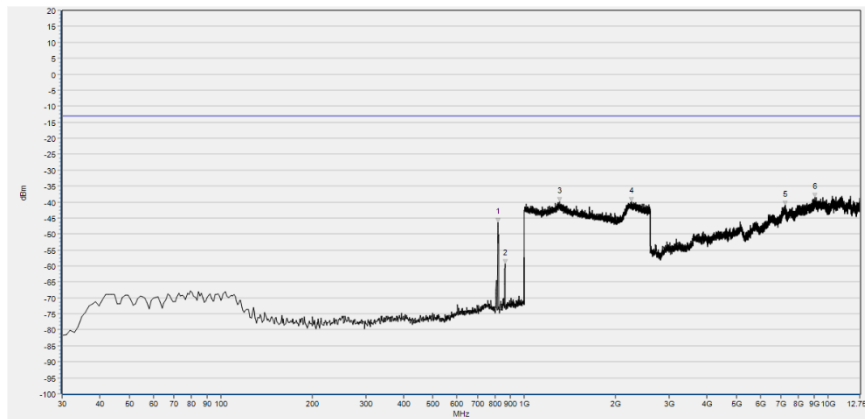


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	816.670	-46.38	-13.00	Vertical	N/A
2	866.140	-59.28	-13.00	Vertical	N/A
3	1308.603	-39.92	-13.00	Vertical	PASS
4	2249.780	-39.80	-13.00	Vertical	PASS
5	7227.396	-40.91	-13.00	Vertical	PASS
6	9054.728	-38.64	-13.00	Vertical	PASS

LTE Band 26, 5MHz BW, High Channel, QPSK

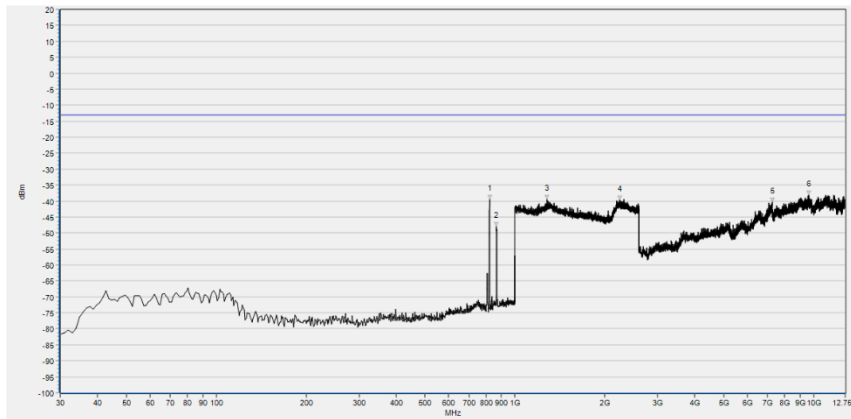

No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	822.490	-39.49	-13.00	Horizontal	N/A
2	865.170	-47.91	-13.00	Horizontal	N/A
3	1276.591	-39.54	-13.00	Horizontal	PASS
4	2243.377	-39.58	-13.00	Horizontal	PASS
5	7255.083	-40.24	-13.00	Horizontal	PASS
6	9623.231	-38.01	-13.00	Horizontal	PASS

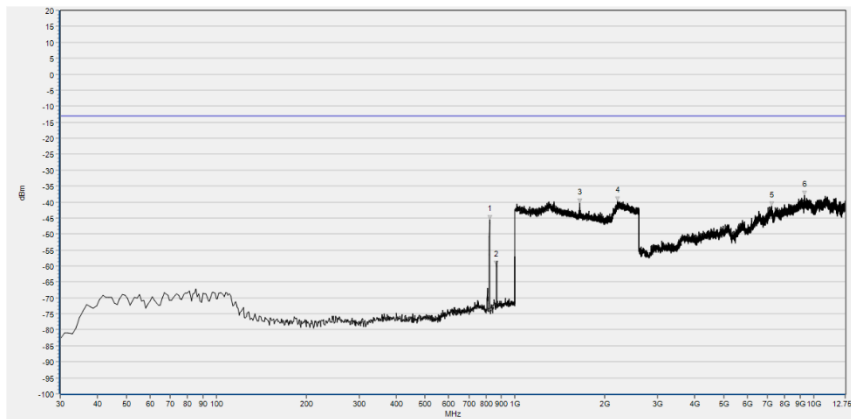

No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	823.460	-45.44	-13.00	Vertical	N/A
2	865.170	-59.72	-13.00	Vertical	N/A
3	1644.738	-40.42	-13.00	Vertical	PASS
4	2202.401	-39.60	-13.00	Vertical	PASS
5	7236.625	-41.12	-13.00	Vertical	PASS
6	9303.910	-37.98	-13.00	Vertical	PASS



## Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Output Power	$\pm 2.22$ dB
Bandwidth	$\pm 5\%$
Conducted Spurious Emission	$\pm 2.77$ dB
Band Edge	$\pm 2.77$ dB
Equivalent Isotropic Radiated Power	$\pm 2.22$ dB
Radiated Spurious Emissions	$\pm 6$ dB

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .





## Annex B Testing Laboratory Information

### 1. Identification of the Responsible Testing Laboratory

<b>Laboratory Name:</b>	Shenzhen Morlab Communications Technology Co., Ltd.
<b>Laboratory Address:</b>	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
<b>Telephone:</b>	+86 755 36698555
<b>Facsimile:</b>	+86 755 36698525

### 2. Identification of the Responsible Testing Location

<b>Name:</b>	Shenzhen Morlab Communications Technology Co., Ltd.
<b>Address:</b>	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

### 3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



#### 4. Test Equipments Utilized

##### 4.1 Conducted Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
EXA Signal Analyzer	MY51511149	N9020A	Agilent	2023.06.21	2024.06.20
Communication Test Station	6200995016	MT8820C	Anritsu	2023.09.19	2024.09.18
Temperature Chamber	S022177101 00089002	KMT-36LF 1A0	KOMEG	2023.09.19	2024.09.18

##### 4.2 List of Software Used

Description	Manufacturer	Software Version
Morlab FCC LTE Test System	MORLAB	V6.45
MORLAB EMCR	MORLAB	V1.2

**4.3 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
System Simulator	152038	CMW500	R&S	2023.10.17	2024.10.16
Receiver	MY54130016	N9038A	Agilent	2023.06.21	2024.06.20
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2023.07.01	2024.06.30
Test Antenna - Horn	9120D-963	BBHA 9120D	Schwarzbeck	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-KK-0.5	Qualwave	2023.07.04	2024.07.03
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-KK F-2	Qualwave	2023.07.04	2024.07.03
Preamplifier (10MHz-6GHz)	46732	S10M100L380 2	LUCIX CORP.	2023.07.04	2024.07.03
Preamplifier (2GHz-18GHz)	61171/61172	S020180L320 3	LUCIX CORP.	2023.06.27	2024.06.26
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118-4 0C-S	Decentest	2023.06.27	2024.06.26
Notch Filter	N/A	WRCGV -LTE 26	Wainwright	N/A	N/A
Anechoic Chamber	N/A	9m*6m*6m	CRT	2022.05.10	2025.05.09

END OF REPORT