

FCC TEST REPORT

Product Name: Smart Phone
Trade Mark: BLU
Model No.: C7x
Add. Model No.: N/A
Report Number: 220422007RFM-1
Test Standards: FCC 47 CFR Part 22 Subpart H
FCC 47 CFR Part 24 Subpart E
FCC ID: YHLBLUC7X
Test Result: PASS
Date of Issue: May 30, 2022


Prepared for:

BLU Products, Inc.
10814 NW 33rd St # 100 Doral, FL 33172 ,USA

Prepared by:

Shenzhen UnionTrust Quality and Technology Co., Ltd.
**Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and
technology park, Longhua district, Shenzhen, China**
TEL: +86-755-2823 0888
FAX: +86-755-2823 0886

Prepared by:



Calvin Chen
Senior Project Engineer

Reviewed by:



Eric Yu
Project Supervisor

Approved by:



Kevin Liang
Assistant Manager

Date:

May 30, 2022

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China
Tel: +86-755-28230888 Fax: +86-755-28230886 E-mail: info@uttlab.com <http://www.uttlab.com>
UTTR-RF-FCC23G-V1.1

Version

Version No.	Date	Description
V1.0	May 30, 2022	Original

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China
Tel: +86-755-28230888 Fax: +86-755-28230886 E-mail: info@uttlab.com <http://www.uttlab.com>
UTTR-RF-FCC23G-V1.1

CONTENTS

1. GENERAL INFORMATION	4
1.1 CLIENT INFORMATION	4
1.2 EUT INFORMATION	4
1.2.1 GENERAL DESCRIPTION OF EUT	4
1.2.2 DESCRIPTION OF ACCESSORIES	4
1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	5
1.4 DESCRIPTION OF SUPPORT UNITS	6
1.5 TEST LOCATION	6
1.6 TEST FACILITY	6
1.7 DEVIATION FROM STANDARDS	6
1.8 ABNORMALITIES FROM STANDARD CONDITIONS	6
1.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER	6
1.10 MEASUREMENT UNCERTAINTY	7
2. TEST SUMMARY	8
3. EQUIPMENT LIST	9
4. TEST CONFIGURATION	10
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING	10
4.2 TEST SETUP	10
4.2.1 FOR RADIATED EMISSIONS TEST SETUP	11
4.2.2 FOR CONDUCTED RF TEST SETUP	12
4.3 TEST CHANNELS	13
4.4 SYSTEM TEST CONFIGURATION	14
4.5 PRE-SCAN	14
5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION	16
5.1 REFERENCE DOCUMENTS FOR TESTING	16
5.2 MAXIMUM ERP/EIRP	16
5.3 CONDUCTED OUTPUT POWER	18
5.4 PEAK-TO-AVERAGE RATIO	19
5.5 99%&26dB BANDWIDTH	22
5.6 BAND EDGE AT ANTENNA TERMINALS	26
5.7 SPURIOUS EMISSIONS AT ANTENNA TERMINALS	28
5.8 FIELD STRENGTH OF SPURIOUS RADIATION	32
5.9 FREQUENCY STABILITY	36
APPENDIX 1 PHOTOS OF TEST SETUP	39
APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS	39

1. GENERAL INFORMATION

1.1 CLIENT INFORMATION

Applicant:	BLU Products, Inc.
Address of Applicant:	10814 NW 33rd St # 100 Doral, FL 33172 ,USA
Manufacturer:	BLU Products, Inc.
Address of Manufacturer:	10814 NW 33rd St # 100 Doral, FL 33172 ,USA

1.2 EUT INFORMATION

1.2.1 General Description of EUT

Product Name:	Smart Phone		
Model No.:	C7x		
Add. Model No.:	N/A		
Trade Mark:	BLU		
DUT Stage:	Production Unit		
EUT Supports Function: (Provided by the customer)	GSM Bands:	GSM850/ PCS 1900	
	UTRA Bands:	Band II/ Band VI	
	2.4 GHz ISM Band:	IEEE 802.11b/g/n	
		Bluetooth V4.2	
	RNSS Bands:	1559 MHz to 1610 MHz	GPS/ GLONASS
BSR:	VHF Band II	FM	
Software Version:	BLU_C290EQ_V11.0.G.03.01_GENERIC 30-03-2022 (Provided by the customer)		
Hardware Version:	FS288-MB-V0.2C (Provided by the customer)		
Sample Received Date:	April 24, 2022		
Sample Tested Date:	February 24, 2022 to May 19, 2022		

1.2.2 Description of Accessories

Adapter	
Model No.:	US-HY-2000
Input:	100-240 V~50/60 Hz 0.3 A
Output:	5.0 V = 2000 mA
Manufacturer:	Shenzhen Zhongfuxin technology Co., Ltd

Battery	
Model No.:	C916647400P
Battery Type:	Lithium-ion Polymer Rechargeable Battery
Rated Voltage:	3.85 Vdc
Limited Charge Voltage:	4.4 Vdc
Rated Capacity:	4000 mAh
Manufacturer:	Shenzhen jiliyuan electronic technology Co., Ltd

Cable (1)	
Description:	USB Micro-B Plug Cable
Cable Type:	Unshielded without ferrite
Length:	1.20 Meter

Shenzhen UnionTrust Quality and Technology Co., Ltd.

1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

Support Networks:	GSM, GPRS, EDGE, WCDMA, HSDPA, HSUPA	
Type of Modulation:	GSM/GPRS:	GMSK
	WCDMA	BPSK
	HSDPA/DC-HSDPA:	QPSK
	HSUPA:	QPSK
Frequency Range:	GSM/GPRS 850:	824.2-848.8 MHz
	GSM/GPRS 1900:	1850.2-1909.8 MHz
	WCDMA Band II:	1852.4-1907.6 MHz
	WCDMA Band V:	826.4-846.6 MHz
Max RF Output Power:	GSM/GPRS 850:	32.60dBm
	GSM/GPRS 1900:	29.12dBm
	WCDMA Band II:	22.76dBm
	WCDMA Band V:	22.69dBm
Emission Designator:	GSM/GPRS 850:	246KGXW
	GSM/GPRS 1900:	248KGXW
	WCDMA Band II:	4M15F9W
	WCDMA Band V:	4M17F9W
IEMI:	Radiation: 354085074857080, 354085074857098	
	Conducted: 354085074857148, 354085074857155	
Antenna Type:	PIFA Antenna	
Antenna Gain: (Provided by the customer)	GSM 850:	-0.6 dBi
	PCS 1900:	-0.7 dBi
	WCDMA Band II:	-0.7 dBi
	WCDMA Band V:	-0.6 dBi
GPRS/EDGE Class:	Class 12	
Normal Test Voltage:	3.85 Vdc	
Extreme Test Voltage:	3.5 to 4.4Vdc	
Extreme Test Temperature:	-20 °C to +50 °C	

1.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

1) Support Cable

Cable No.	Description	Connector	Length	Supplied by
1	Antenna Cable	SMA	0.30 Meter	UnionTrust

1.5 TEST LOCATION

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China, China 518109
 Telephone: +86 (0) 755 2823 0888
 Fax: +86 (0) 755 2823 0886

1.6 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

ISED Wireless Device Testing Laboratories

CAB identifier: CN0032

FCC Accredited Lab.

Designation Number: CN1194

Test Firm Registration Number: 259480

1.7 DEVIATION FROM STANDARDS

None.

1.8 ABNORMALITIES FROM STANDARD CONDITIONS

None.

1.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China
 Tel: +86-755-28230888 Fax: +86-755-28230886 E-mail: info@uttlab.com <http://www.uttlab.com>
 UTTR-RF-FCC23G-V1.1

1.10 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted emission 9kHz-150kHz	±3.2 dB
2	Conducted emission 150kHz-30MHz	±2.7 dB
3	Radiated spurious emissions 30MHz-1GHz	± 4.9 dB
4	Radiated spurious emissions 1GHz-18GHz	± 4.8 dB
5	Radiated spurious emissions 18GHz-40GHz	± 5.1 dB
6	Occupied Bandwidth	± 1.86 %
7	DC Supply Voltages	± 0.68 %
8	Temperature	± 0.62 °C
9	Humidity	± 3.9 %
10	Conducted spurious emissions	± 2.7 dB
11	DC Supply Voltages	± 0.68 %
12	AC Supply Voltages	± 1.2 %
13	Radio Frequency	± 6.5 x 10 ⁻⁸
14	RF Power, Conducted	± 0.9 dB

Shenzhen UnionTrust Quality and Technology Co., Ltd.

2. TEST SUMMARY

FCC 47 CFR Part 22 Subpart H Test Cases			
Test Item	Test Requirement	Test Method	Result
Effective Radiated Power (ERP)	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 22.913(a)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Conducted Output Power	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 22.913(a)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Peak-to-average ratio	FCC 47 CFR Part 22.913(a)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
99%&26dB Bandwidth	FCC 47 CFR Part 2.1049(h)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Band Edge at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 22.917(a)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Spurious emissions at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 22.917(a)(b)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Field strength of spurious radiation	FCC 47 CFR Part 2.1053 & FCC 47 CFR Part 22.917(a)(b)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Frequency stability	FCC 47 CFR Part 2.1055 & FCC 47 CFR Part 22.355	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS

FCC 47 CFR Part 24 Subpart E Test Cases			
Test Item	Test Requirement	Test Method	Result
Equivalent Isotropic Radiated Power (EIRP)	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 24.232(c)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Conducted Output Power	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 24.232(c)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Peak-to-average ratio	FCC 47 CFR Part 24.232(d)	KDB 971168 D01v03r01	PASS
99%&26dB Bandwidth	FCC 47 CFR Part 2.1049(h) & FCC 47 CFR Part 24.238(b)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Band Edge at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 24.238(a)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Spurious emissions at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 24.238(a)(b)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Field strength of spurious radiation	FCC 47 CFR Part 2.1053 & FCC 47 CFR Part 24.238(a)(b)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Frequency stability	FCC 47 CFR Part 2.1055 & FCC 47 CFR Part 24.235	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS

3. EQUIPMENT LIST

Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
<input checked="" type="checkbox"/>	3M Chamber & Accessory Equipment	ETS-LINDGREN	3M	Euroshiedpn-CT001270-1317	22-Jan-2021	21-Jan-2024
<input checked="" type="checkbox"/>	Receiver	R&S	ESIB26	100114	5-Nov-2021	4-Nov-2022
<input type="checkbox"/>	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	15-Apr-2022	14-Apr-2023
<input type="checkbox"/>	Loop Antenna	ETS-LINDGREN	6502	00202525	11-Nov-2021	10-Nov-2023
<input checked="" type="checkbox"/>	Broadband Antenna	ETS-LINDGREN	3142E	00201566	11-Nov-2021	10-Nov-2023
<input type="checkbox"/>	6dB Attenuator	Talent	RA6A5-N-18	18103001	11-Nov-2021	10-Nov-2023
<input checked="" type="checkbox"/>	Preamplifier	HP	8447F	2805A02960	5-Nov-2021	4-Nov-2022
<input type="checkbox"/>	Broadband Antenna (Pre-amplifier)	ETS-LINDGREN	3142E-PA	00201891	30-Apr-2021	29-Apr-2023
<input type="checkbox"/>	6dB Attenuator	Talent	RA6A5-N-18	18103002	5-Nov-2021	4-Nov-2022
<input type="checkbox"/>	Horn Antenna	ETS-LINDGREN	3117	00164202	11-Nov-2021	10-Nov-2023
<input checked="" type="checkbox"/>	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201874	6-Nov-2021	5-Nov-2022
<input type="checkbox"/>	Horn Antenna	ETS-LINDGREN	3116C	00200180	19-Jun-2020	18-Jun-2022
<input checked="" type="checkbox"/>	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3116C-PA	00202652	14-Nov-2020	13-Nov-2022
<input checked="" type="checkbox"/>	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A
<input checked="" type="checkbox"/>	Test Software	Audix	e3	Software Version: 9.160323		

Conducted RF test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
<input checked="" type="checkbox"/>	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	15-Apr-2022	14-Apr-2023
<input checked="" type="checkbox"/>	Receiver	R&S	ESR7	101181	5-Nov-2021	4-Nov-2022
<input checked="" type="checkbox"/>	USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY55430035	5-Nov-2021	4-Nov-2022
<input checked="" type="checkbox"/>	USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY55430023	5-Nov-2021	4-Nov-2022
<input type="checkbox"/>	EXG-B RF Analog Signal Generator	KEYSIGHT	N5171B	MY53051777	5-Nov-2021	4-Nov-2022
<input checked="" type="checkbox"/>	MXG X-Series RF Vector Signal Generator	KEYSIGHT	N5182B	MY51350267	5-Nov-2021	4-Nov-2022
<input checked="" type="checkbox"/>	Analog Signal Generator	R&S	SMF 100A	100691	22-Apr-2021	21-Apr-2022
<input checked="" type="checkbox"/>	DC Source	KIKUSUI	PWR400L	LK003024	20-Aug-2021	19-Aug-2022
<input checked="" type="checkbox"/>	Digital multimeter	FLUKE	15B+	30701460WS15	12-Nov-2021	11-Nov-2022
<input checked="" type="checkbox"/>	Temp & Humidity chamber	Votisch	VT4002	58566133290020	21-Apr-2021	20-Apr-2022
<input type="checkbox"/>	Wideband Radio Communication Tester	R&S	CMW500	120932	15-Apr-2022	14-Apr-2023
<input type="checkbox"/>	Wideband Radio Communication Tester	R&S	CMW500	119583	15-Apr-2022	14-Apr-2023

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China
 Tel: +86-755-28230888 Fax: +86-755-28230886 E-mail: info@uttlab.com <http://www.uttlab.com>
 UTTR-RF-FCC23G-V1.1

4. TEST CONFIGURATION

4.1 ENVIRONMENTAL CONDITIONS FOR TESTING


Test Environment	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage (V)	Relative Humidity (%)
TN/VN	+15 to +35	3.85	20 to 75
TL/VL	-20	3.5	20 to 75
TH/VL	+50	3.5	20 to 75
TL/VH	-20	4.4	20 to 75
TH/VH	+50	4.4	20 to 75

Remark:


- 1) The EUT just work in such extreme temperature of -20 °C to +50 °C and the extreme voltage of 3.5 V to 4.4 V, so here the EUT is tested in the temperature of -20 °C to +50 °C and the voltage of 3.5 V to 4.4 V.
- 2) VN: Normal Voltage; TN: Normal Temperature;
 TL: Low Extreme Test Temperature; TH: High Extreme Test Temperature;
 VL: Low Extreme Test Voltage; VH: High Extreme Test Voltage.

4.2 TEST SETUP

4.2.1 For Radiated Emissions test setup

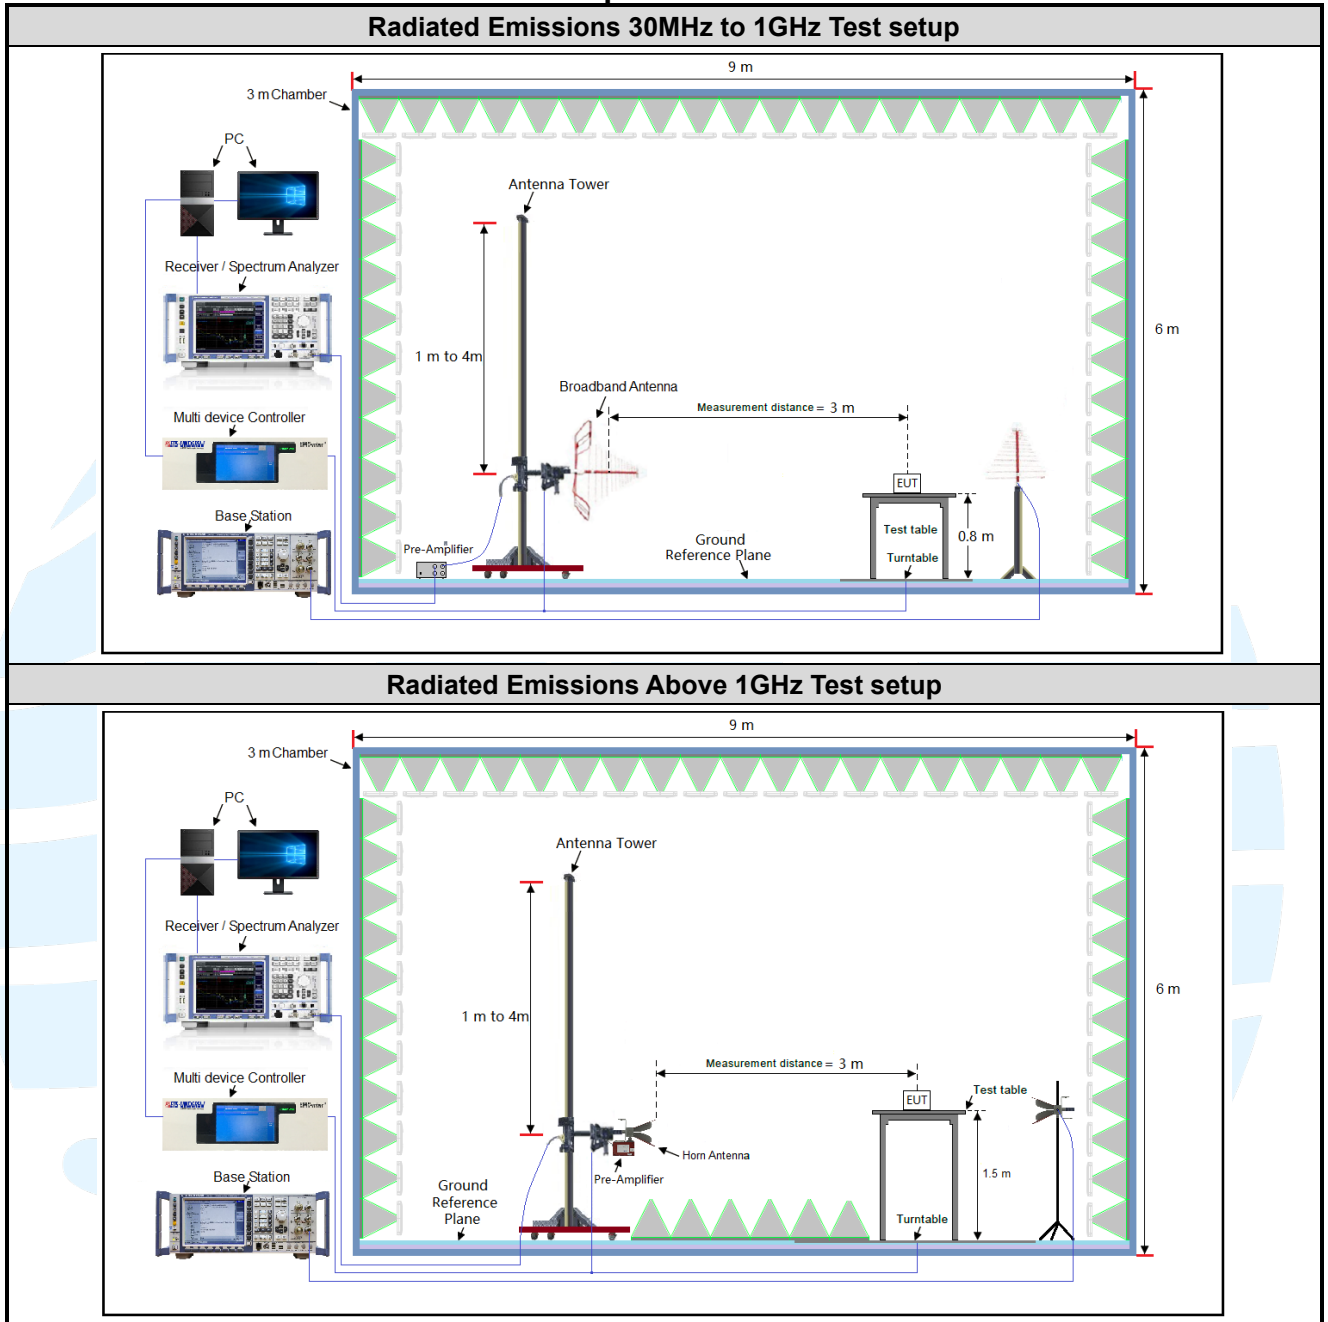

4.2.2 For Conducted RF test setup

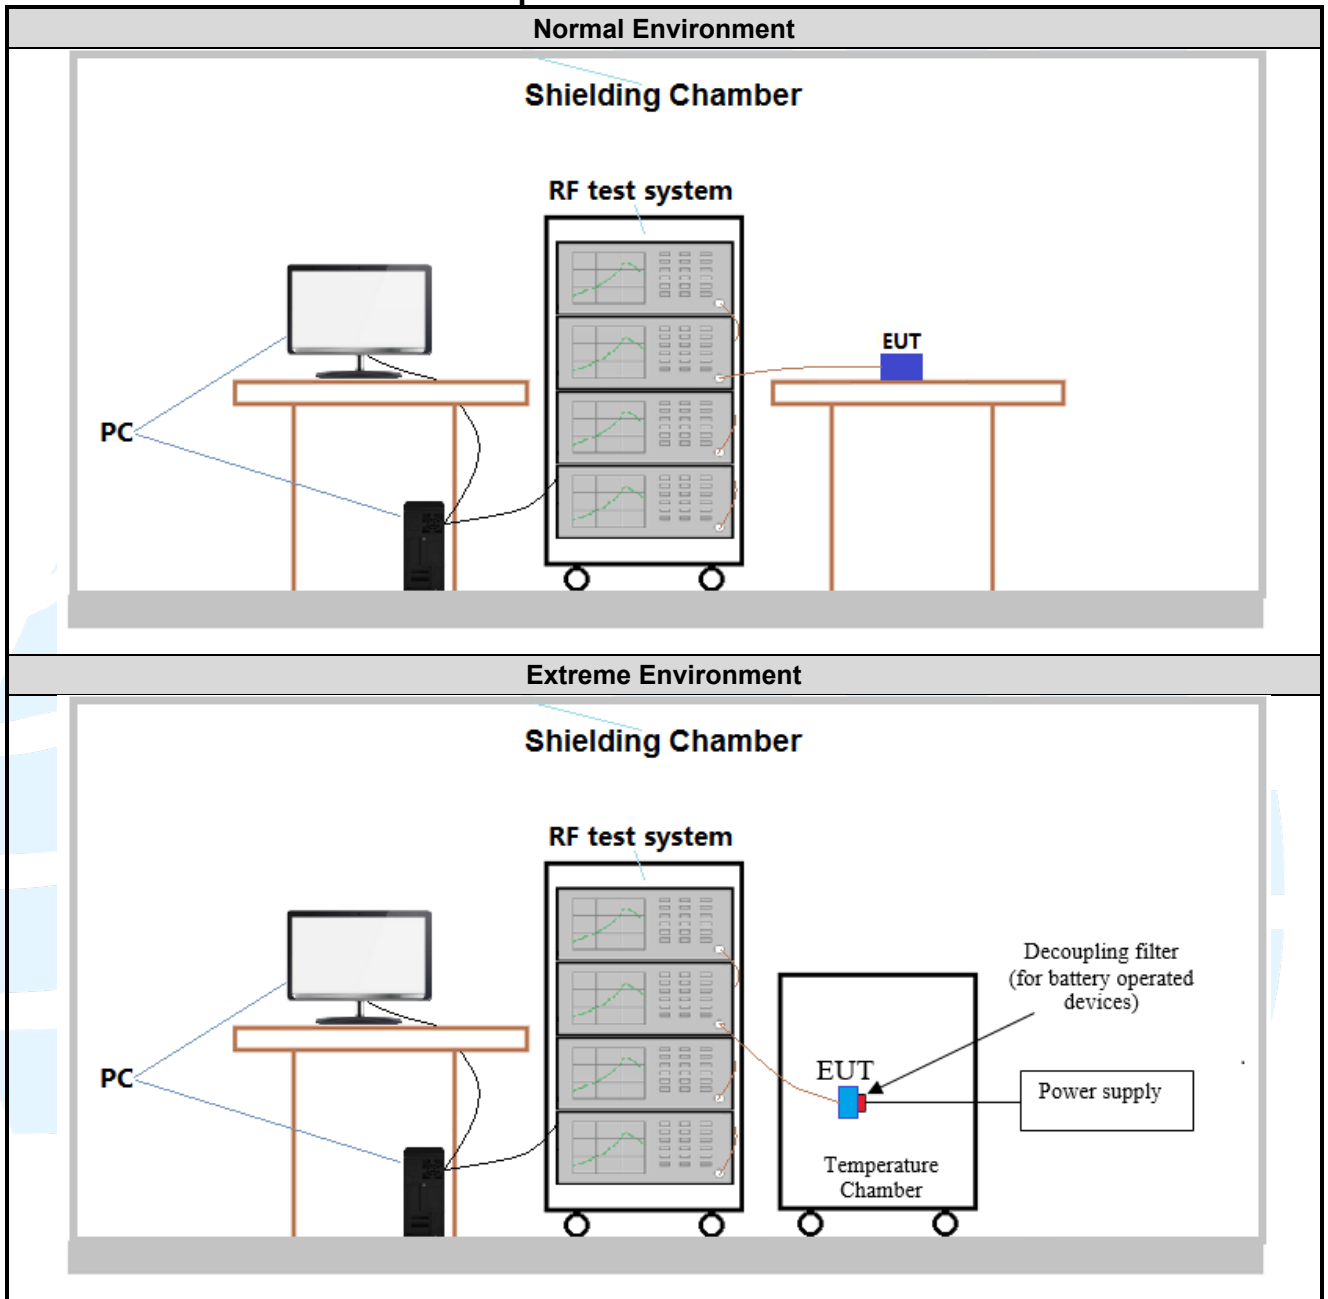

4.3 TEST CHANNELS

Bands	Tx/Rx Frequency	RF Channel		
		Low(L)	Middle(M)	High(H)
GSM/GPRS/ EDGE850	Tx (824 MHz ~ 849 MHz)	Channel 128	Channel 189	Channel 251
		824.2 MHz	836.4 MHz	848.8 MHz
WCDMA band V	Tx (824 MHz ~ 849 MHz)	Channel 4132	Channel 4182	Channel 4233
		826.4 MHz	836.4 MHz	846.6 MHz

Bands	Tx/Rx Frequency	RF Channel		
		Low(L)	Middle(M)	High(H)
GSM/GPRS/ EDGE1900	Tx (1850 MHz-1910 MHz)	Channel 512	Channel 661	Channel 810
		1850.2 MHz	1880.0 MHz	1909.8 MHz
WCDMA Band II	Tx (1850 MHz-1910 MHz)	Channel 9262	Channel 9400	Channel 9538
		1852.4 MHz	1880.0 MHz	1907.6 MHz

4.4 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. It was powered by a 3.85Vdc rechargeable Li-on battery. Only the worst-case data were recorded in this test report.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, X/Y/Z axis, and antenna ports. The worst case was found when positioned as the table below.

Bands	Mode	Antenna Port	Worst-case axis positioning
GSM 850	1TX	Chain 0	Y axis
PCS 1900	1TX	Chain 0	Y axis
WCDMA Band II	1TX	Chain 0	Y axis
WCDMA Band IV	1TX	Chain 0	Y axis
WCDMA Band V	1TX	Chain 0	Y axis

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000MHz. The resolution is 1 MHz or greater for frequencies above 1000MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

4.5 PRE-SCAN

Pre-scan under all rate at lowest middle and highest channel, find the transmitter power as below:
SIM 1 Card Conducted transmitter power measurement result.

GSM 850 Maximum Average Power (dBm)			
Channel	128	190	251
Frequency (MHz)	824.2 MHz	836.6 MHz	848.8 MHz
GSM (GMSK, 1Tx-slot)	32.60	32.48	32.32
GPRS (GMSK, 1Tx-slot)	32.57	32.51	32.35
GPRS (GMSK, 2Tx-slot)	31.01	30.91	30.40
GPRS (GMSK, 3Tx-slot)	29.63	29.52	29.42
GPRS (GMSK, 4Tx-slot)	28.09	27.97	27.85

PCS 1900 Maximum Average Power (dBm)			
Channel	512	661	810
Frequency (MHz)	1850.2 MHz	1880.0 MHz	1909.8 MHz
GSM (GMSK, 1Tx-slot)	28.75	28.99	29.12
GPRS (GMSK, 1Tx-slot)	28.82	29.00	29.11
GPRS (GMSK, 2Tx-slot)	27.09	27.04	26.89
GPRS (GMSK, 3Tx-slot)	25.71	25.61	25.45
GPRS (GMSK, 4Tx-slot)	23.88	23.76	23.64

WCDMA Band II Maximum Average Power (dBm)			
Channel	9262	9400	9538
Frequency (MHz)	1852.4 MHz	1880.0 MHz	1907.6 MHz
RMC 12.2kbps	22.73	22.76	22.52
HSDPA Subtest-1	22.72	22.74	22.54
HSDPA Subtest-2	21.93	21.84	21.72
HSDPA Subtest-3	21.35	21.29	21.17
HSDPA Subtest-4	21.42	21.33	21.19
HSUPA Subtest-1	21.76	21.69	21.60
HSUPA Subtest-2	21.71	21.66	21.55
HSUPA Subtest-3	21.83	21.73	21.62
HSUPA Subtest-4	21.73	21.65	21.51
HSUPA Subtest-5	21.80	21.68	21.55

WCDMA Band V Maximum Average Power (dBm)			
Channel	4132	4182	4233
Frequency (MHz)	826.4 MHz	836.4 MHz	846.6 MHz
RMC 12.2kbps	22.37	22.69	22.49
HSDPA Subtest-1	22.57	22.67	22.68
HSDPA Subtest-2	21.95	22.04	21.96
HSDPA Subtest-3	21.12	21.25	21.13
HSDPA Subtest-4	21.14	21.28	21.16
HSUPA Subtest-1	21.43	21.60	21.53
HSUPA Subtest-2	21.35	21.56	21.47
HSUPA Subtest-3	20.92	21.00	20.89
HSUPA Subtest-4	21.35	21.53	21.44
HSUPA Subtest-5	21.43	21.52	21.43

Pre-scan all bandwidth and RB, find worse case mode are chosen to the report, the worse mode applicability and tested channel detail as below:

Band	Radiated	Conducted
GSM/GPRS/EDGE 850/1900	1) GSM (GMSK, 1Tx-slot) Link 2) GPRS (GMSK, 1Tx-slot) Link	1) GSM (GMSK, 1Tx-slot) Link 2) GPRS (GMSK, 1Tx-slot) Link
WCDMA Band II/IVV	RMC 12.2kbps Link	RMC 12.2kbps Link

5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 22	Public Mobile Services
3	FCC 47 CFR Part 27	Miscellaneous Wireless Communications Services
4	FCC 47 CFR Part 24	Personal Communications Services
5	ANSI C63.26-2015	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services
6	KDB 971168 D01	KDB 971168 D01 Power Meas License Digital Systems v03r01

5.2 MAXIMUM ERP/EIRP

Test Requirement: FCC 47 CFR Part 2.1046(a),
 FCC 47 CFR Part 22.913(a),
 FCC 47 CFR Part 24.232(c),
 FCC 47 CFR Part 27.50(d)(4)

Test Method: KDB 971168 D01v03r01 Section 5.6 & ANSI C63.26-2015

Limit:

FCC 47 CFR Part 22.913(a)

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

FCC 47 CFR Part 24.232(c)

Mobile and portable stations are limited to 2 watts EIRP.

FCC 47 CFR Part 27.50(d)(4)

Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

Test Procedure:

$$ERP \text{ or } EIRP = P_{Meas} + G_T - L_c$$

where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively
 (Expressed in the same units as P_{Meas}, typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

G_T = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

L_c = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

Test Setup: Refer to section 4.2.1 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode

Test Results: Pass

Test Data: See table below

Bands	Modulation	Max. Conducted Avg. Power	Ant. Gain	Limit	ERP		Result
		(dBm)	(dBi)	(W)	(dBm)	(W)	
GSM 850 (824-849 MHz)	GPRS	32.60	-0.60	7.0	29.85	0.966051	Pass
WCDMA Band V (824-849 MHz)	RMC	22.69	-0.60	7.0	19.94	0.098628	Pass
	HSUPA	22.68	-0.60		19.93	0.098401	Pass
	HSDPA	21.60	-0.60		18.85	0.076736	Pass

Bands	Modulation	Max. Conducted Avg. Power	Ant. Gain	Limit	EIRP		Result
		(dBm)	(dBi)	(W)	(dBm)	(W)	
PCS 1900 (1850-1910 MHz)	GPRS	29.12	-0.70	2.0	28.42	0.695024	Pass
WCDMA Band II (1850-1910 MHz)	RMC	22.76	-0.70	2.0	22.06	0.160694	Pass
	HSUPA	22.68	-0.70		21.98	0.157761	Pass
	HSDPA	21.56	-0.70		20.86	0.121899	Pass

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China
 Tel: +86-755-28230888 Fax: +86-755-28230886 E-mail: info@uttlab.com <http://www.uttlab.com>
 UTTR-RF-FCC23G-V1.1

5.3 CONDUCTED OUTPUT POWER

Test Requirement: FCC 47 CFR Part 2.1046(a),
 FCC 47 CFR Part 22.913(a),
 FCC 47 CFR Part 24.232(c),
 FCC 47 CFR Part 27.50(d)(4)

Test Method: KDB 971168 D01v03r01 & ANSI C63.26-2015

Limit:

FCC 47 CFR Part 22.913(a)

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

FCC 47 CFR Part 24.232(c)

Mobile and portable stations are limited to 2 watts EIRP.

FCC 47 CFR Part 27.50(d)(4)

Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

Test Procedure:

The EUT was set up for the maximum power with GSM, GPRS, EDGE, WCDMA, CDMA2000, and LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.2.2 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode

Test Results: Pass

Test Data: The full result refers to section 4.5 for details.

5.4 PEAK-TO-AVERAGE RATIO

Test Requirement: FCC 47 CFR Part 22.913(a),
 FCC 47 CFR Part 24.232(c),
 FCC 47 CFR Part 27.50(d)(5)

Test Method: KDB 971168 D01v03r01 Section 5.7

Limit: In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB

Test Procedure:
 The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer.

- a) Set resolution/measurement bandwidth \geq signal's occupied bandwidth
- b) Set the number of counts to a value that stabilizes the measured CCDF curve
- c) Record the maximum PAPR level associated with a probability of 0.1 %

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.2.2 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode

Test Results: Pass

Test Data: See table below


Bands	Modulation	Peak-to-average ratio (dB)			Limit (dBm)	Result
		Lowest	Middle	Highest		
GSM 850	GPRS	0.29	0.29	0.30	13	Pass
PCS 1900	GPRS	0.31	0.32	0.32	13	Pass
WCDMA Band II	RMC 12.2kbps	2.98	2.60	2.55	13	Pass
WCDMA Band V	RMC 12.2kbps	2.63	3.13	2.46	13	Pass

The test plots as follows:



Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China
 Tel: +86-755-28230888 Fax: +86-755-28230886 E-mail: info@uttlab.com <http://www.uttlab.com>
 UTTR-RF-FCC23G-V1.1

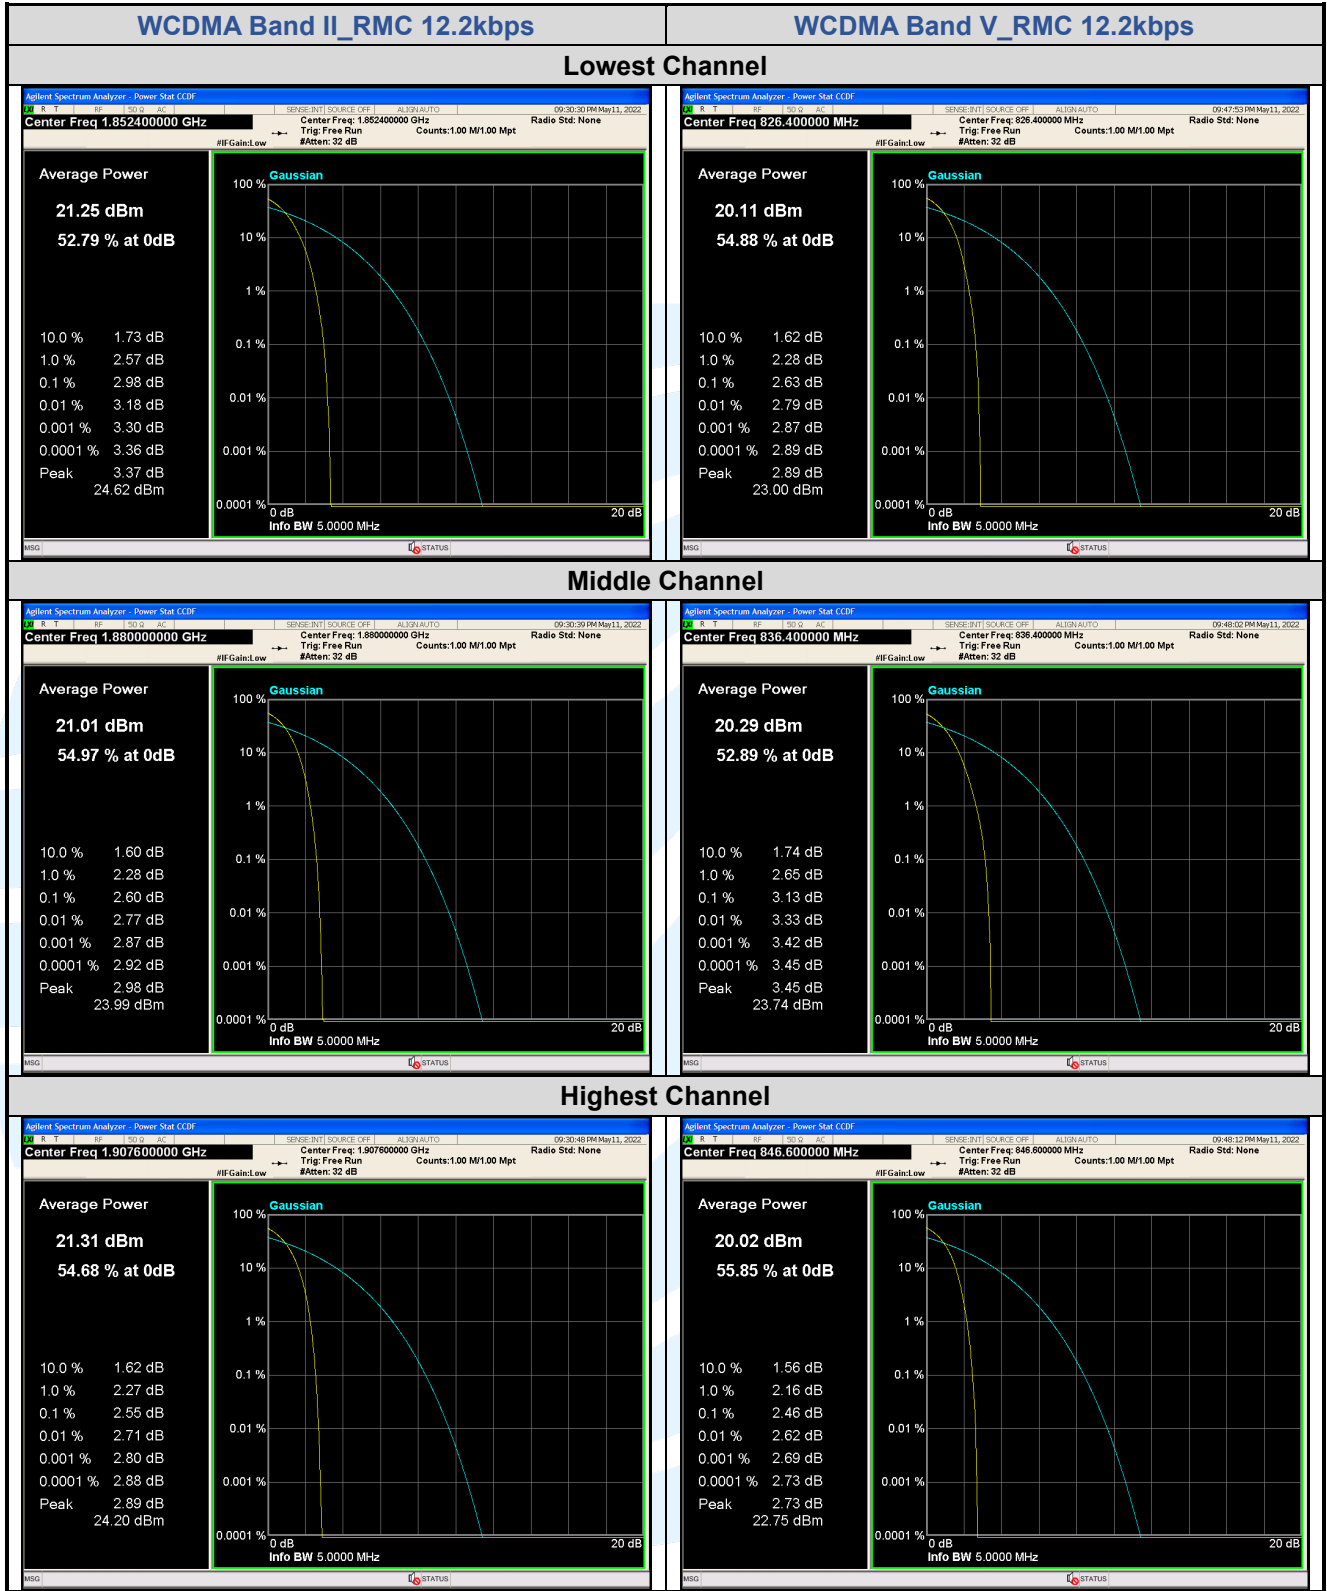

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China
 Tel: +86-755-28230888 Fax: +86-755-28230886 E-mail: info@uttlab.com <http://www.uttlab.com>
 UTTR-RF-FCC23G-V1.1

5.599%&26DB BANDWIDTH

Test Requirement: FCC 47 CFR Part 2.1049(h),
 FCC 47 CFR Part 22.917(b),
 FCC 47 CFR Part 24.238(b),
 FCC 47 CFR Part 27.53(h)

Test Method: ANSI C63.26-2015 & KDB 971168 D01v03r01 Section 4

Limit: No Limit, for reporting purposes only.

Test Procedure:

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The 99% and -26dB bandwidths was also measured and recorded.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.2.2 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode


Test Results: Pass


Test Data: See table below

Bands	Modulation	Channel	Frequency (MHz)	99% BW (kHz)	26 dB BW (kHz)
GSM 850	GSM	128	824.2	243.95	312.7
		190	836.6	246.13	312.5
		251	848.8	245.46	312.6
	GPRS	128	824.2	242.85	312.2
		190	836.6	243.60	310.1
		251	848.8	243.61	312.9
PCS 1900	GSM	512	1850.2	246.27	311.5
		661	1880.0	245.94	315.9
		810	1909.8	248.17	313.6
	GPRS	512	1850.2	243.56	312.3
		661	1880.0	242.99	313.4
		810	1909.8	245.18	312.7

Bands	Modulation	Channel	Frequency (MHz)	99% BW (MHz)	26 dB BW (MHz)
WCDMA Band II	RMC 12.2kbps	9262	1852.4	4.1484	4.672
		9400	1880.0	4.1497	4.676
		9538	1907.6	4.1526	4.683
WCDMA Band V	RMC 12.2kbps	4132	826.4	4.1689	4.672
		4182	836.4	4.1470	4.649
		4233	846.6	4.1633	4.684


The test plots as follows:

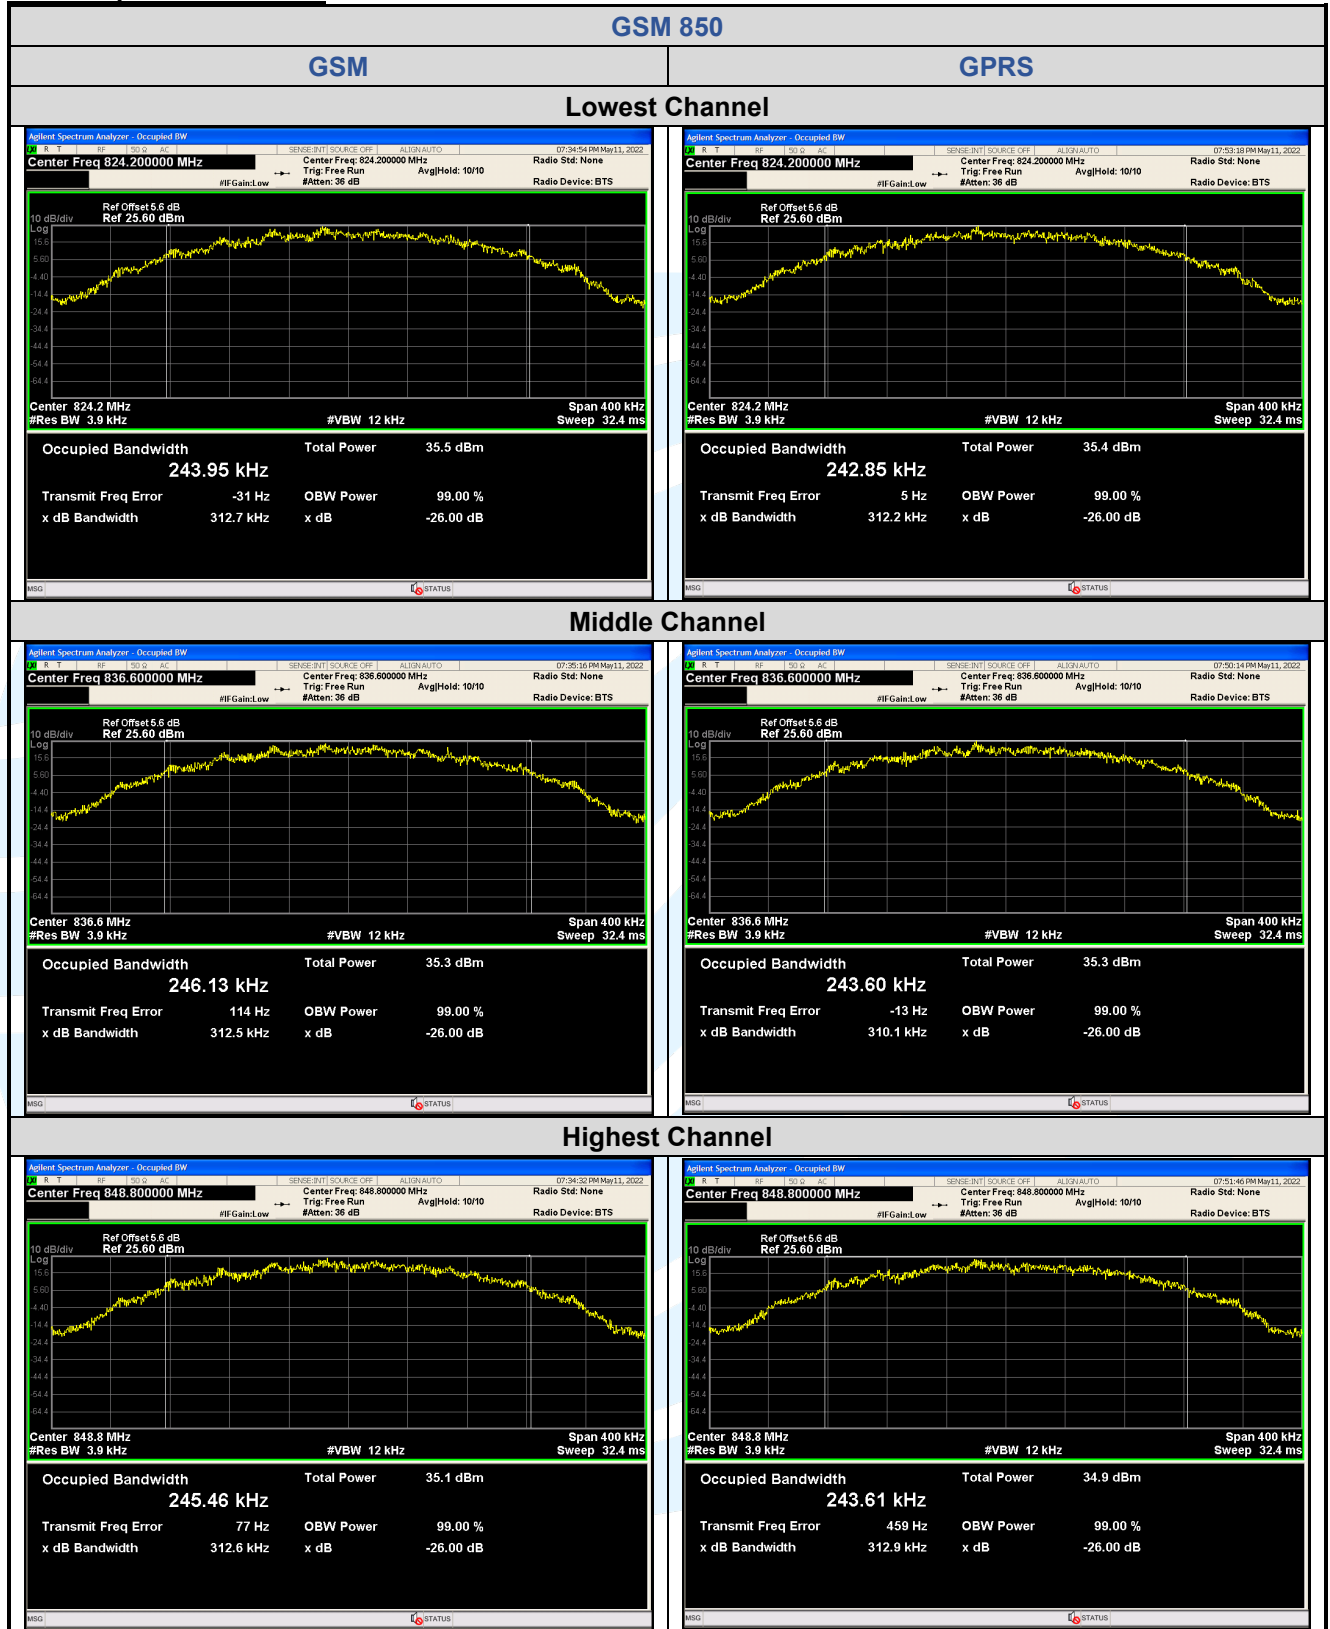

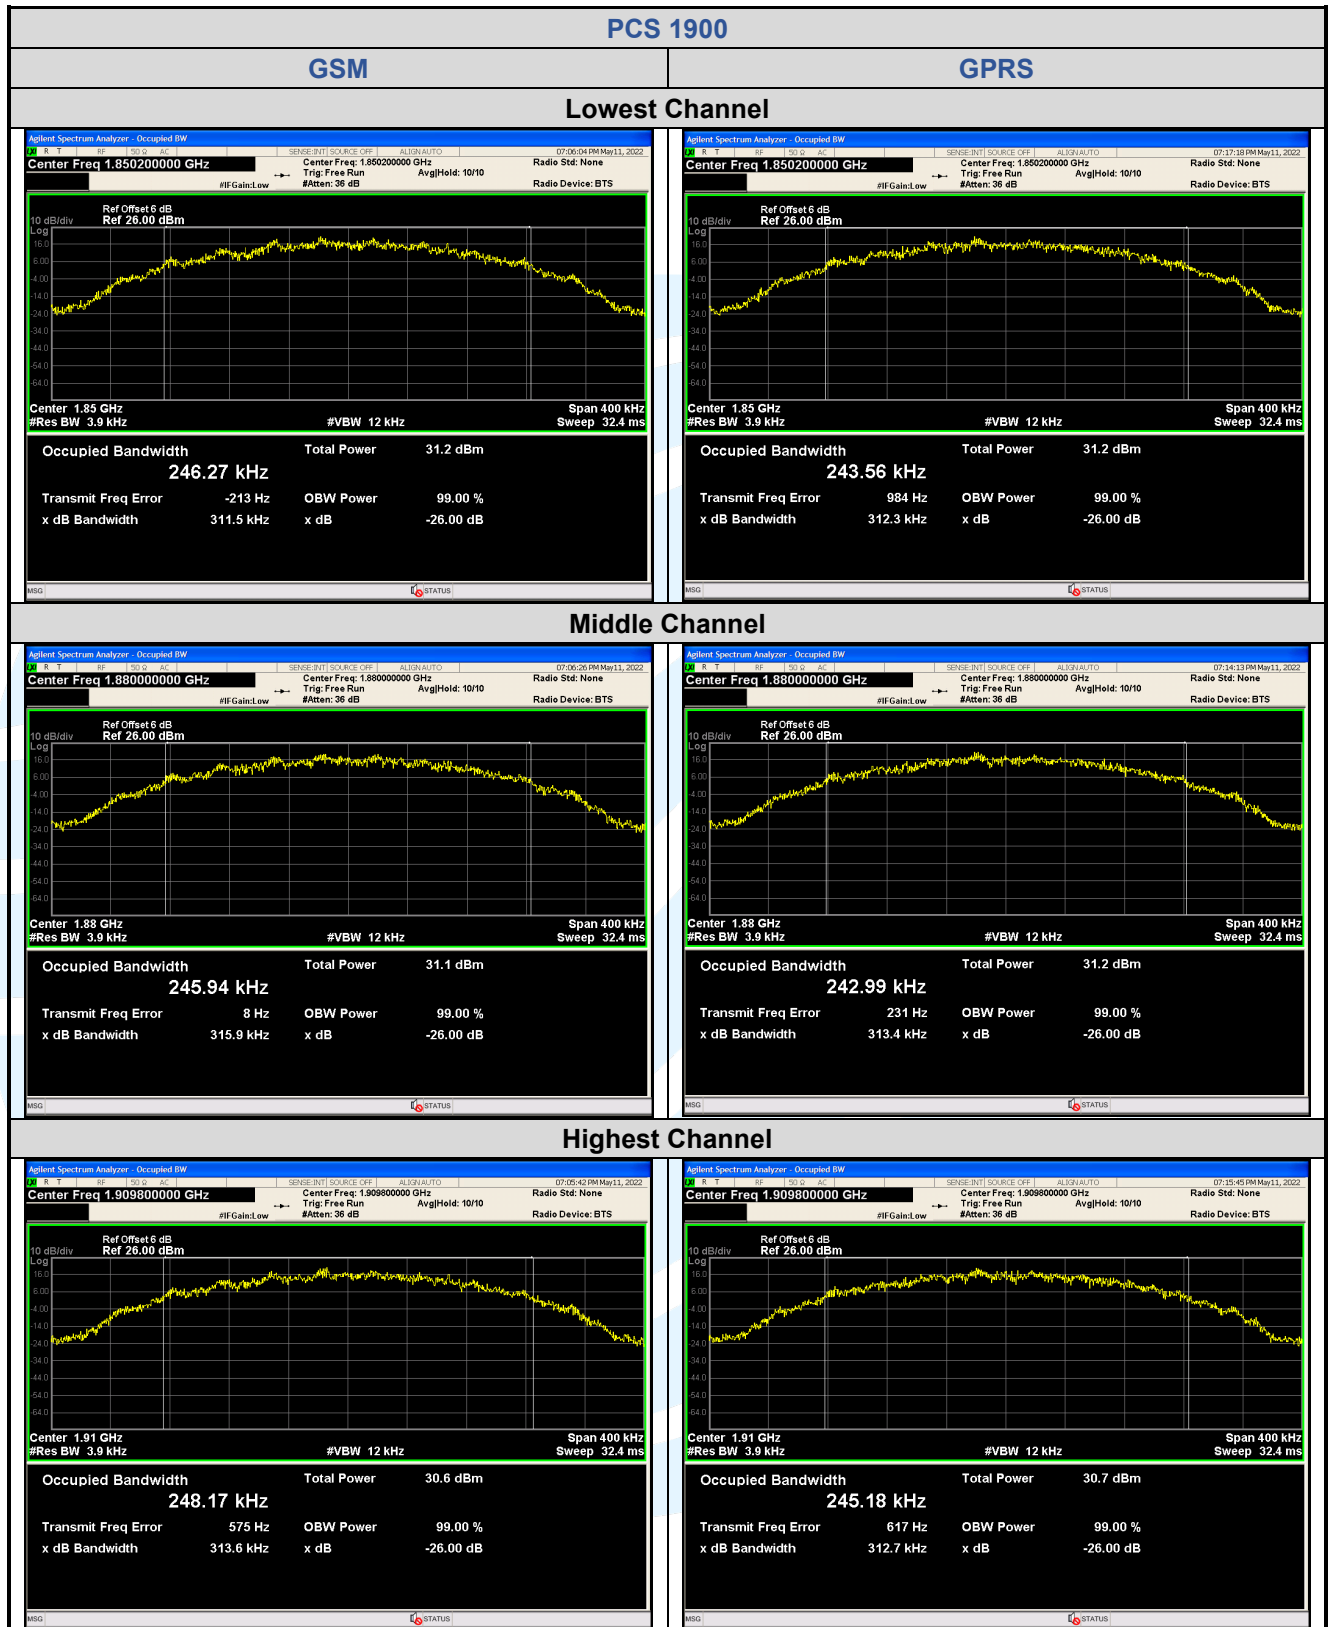

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China
 Tel: +86-755-28230888 Fax: +86-755-28230886 E-mail: info@uttlab.com <http://www.uttlab.com>
 UTTR-RF-FCC23G-V1.1

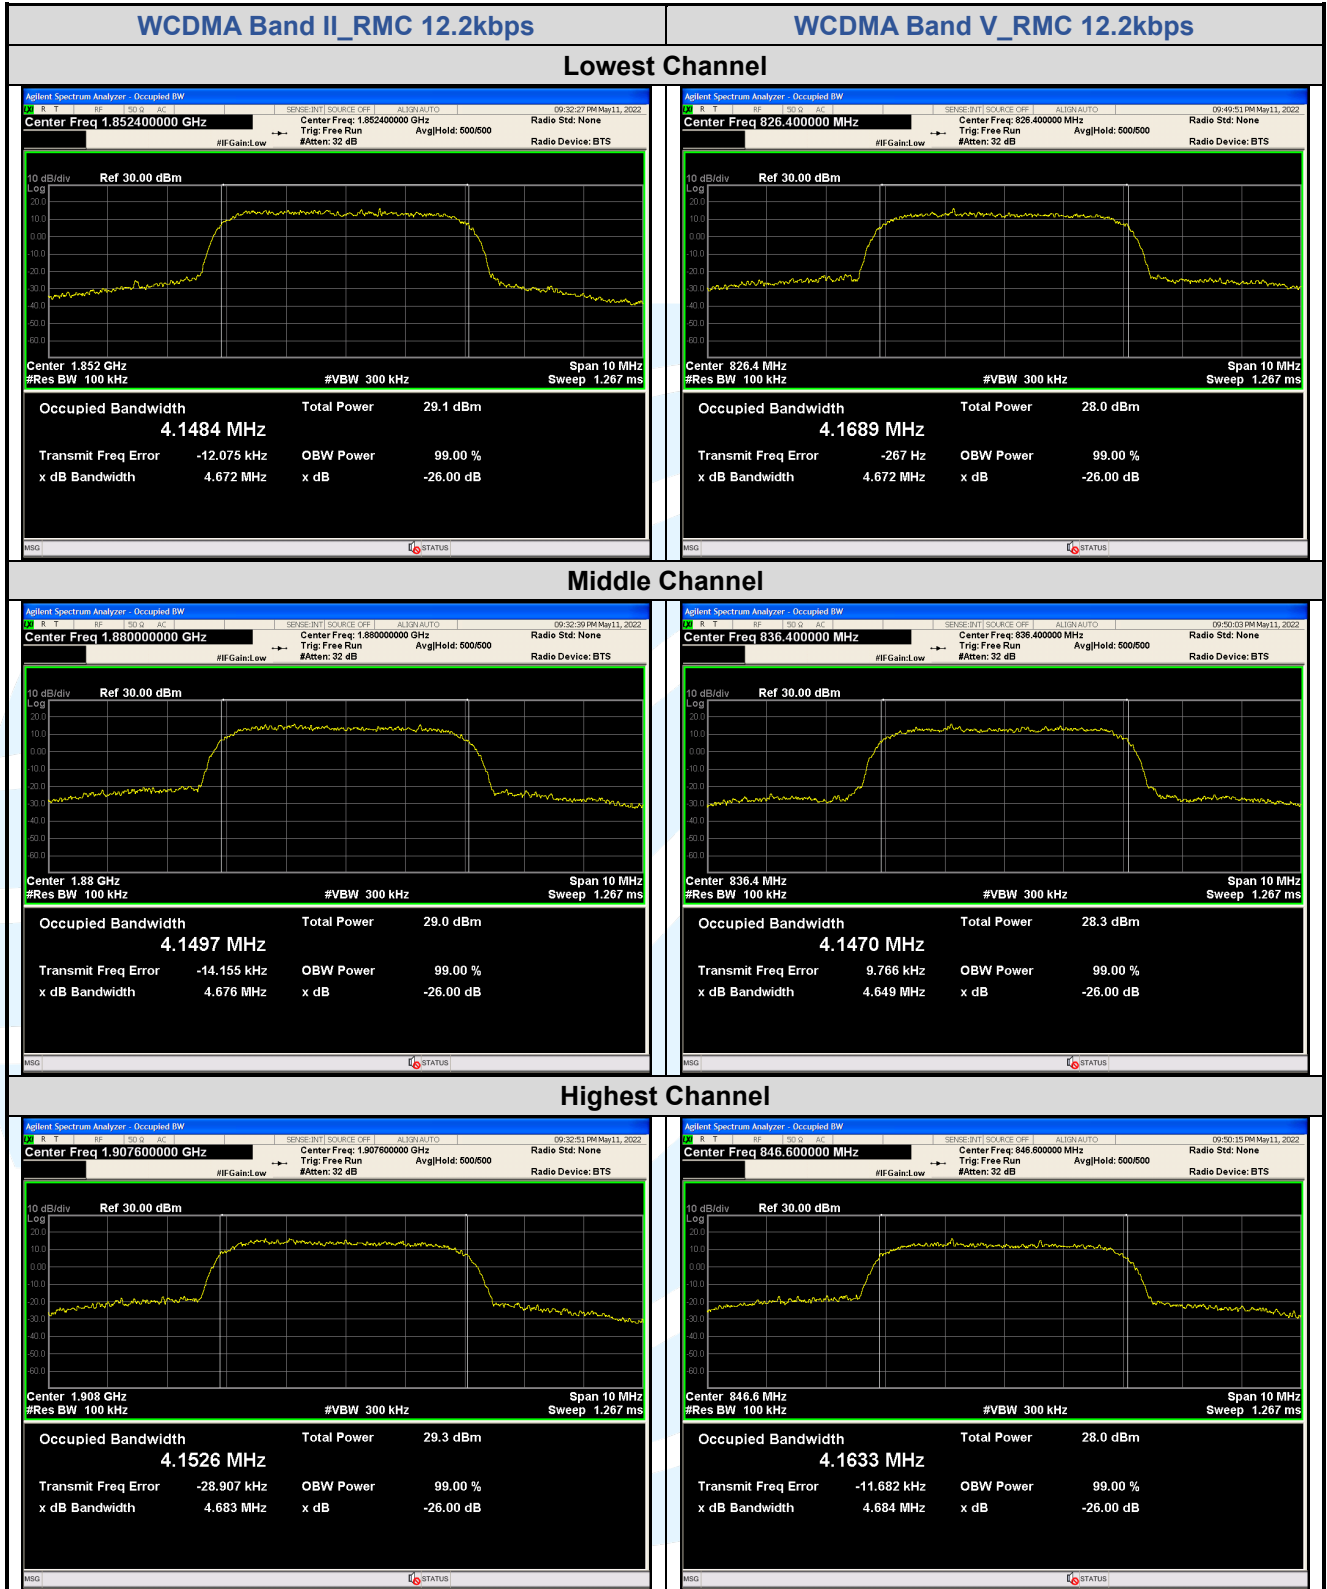

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China
 Tel: +86-755-28230888 Fax: +86-755-28230886 E-mail: info@uttlab.com <http://www.uttlab.com>
 UTR-RF-FCC23G-V1.1

5.6 BAND EDGE AT ANTENNA TERMINALS

Test Requirement: FCC 47 CFR Part 2.1051,
FCC 47 CFR Part 22.917(a),
FCC 47 CFR Part 24.238(a),
FCC 47 CFR Part 27.53(h)(1)

Test Method: ANSI C63.26-2015 & KDB 971168 D01v03r01

Limit:

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13 dBm.

Test Procedure:

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer.

For each band edge measurement:

- 1) Set the spectrum analyzer span to include the block edge frequency.
- 2) Set a marker to point the corresponding band edge frequency in each test case.
- 3) Set display line at -13 dBm
- 4) Set resolution bandwidth to at least 1% of emission bandwidth.
- 5) Set spectrum analyzer with RMS detector.
- 6) Record the max trace plot into the test report

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.


Test Setup: Refer to section 4.2.2 for details.



Instruments Used: Refer to section 3 for details

Test Mode: Link mode

Test Results: Pass

The test plots as follows:

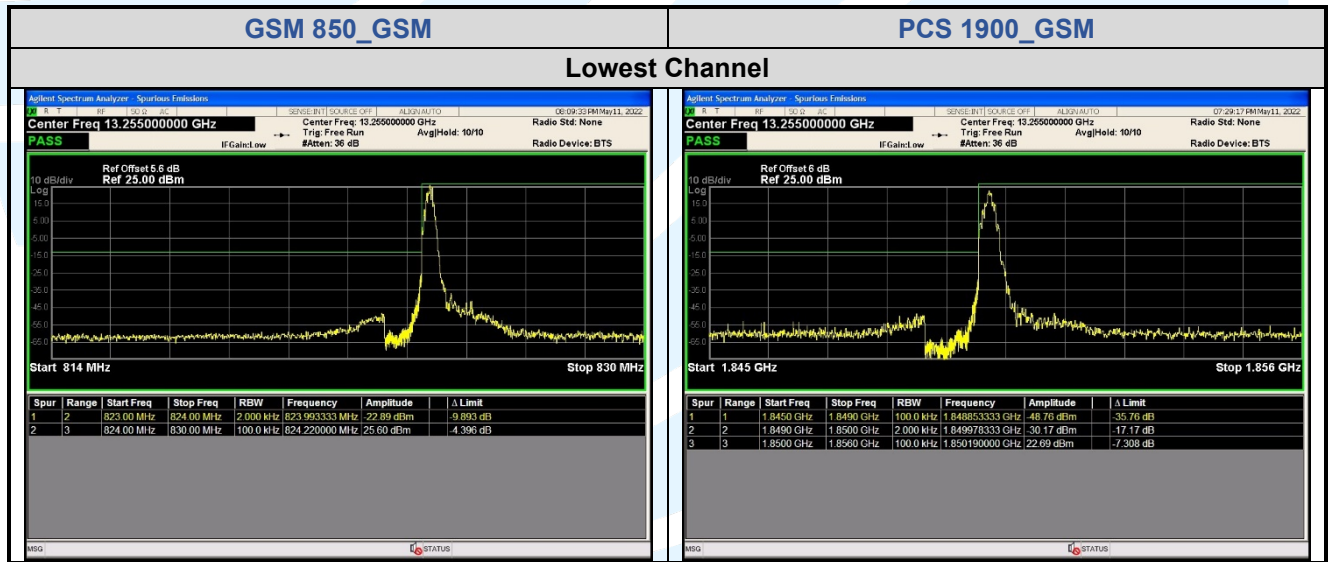

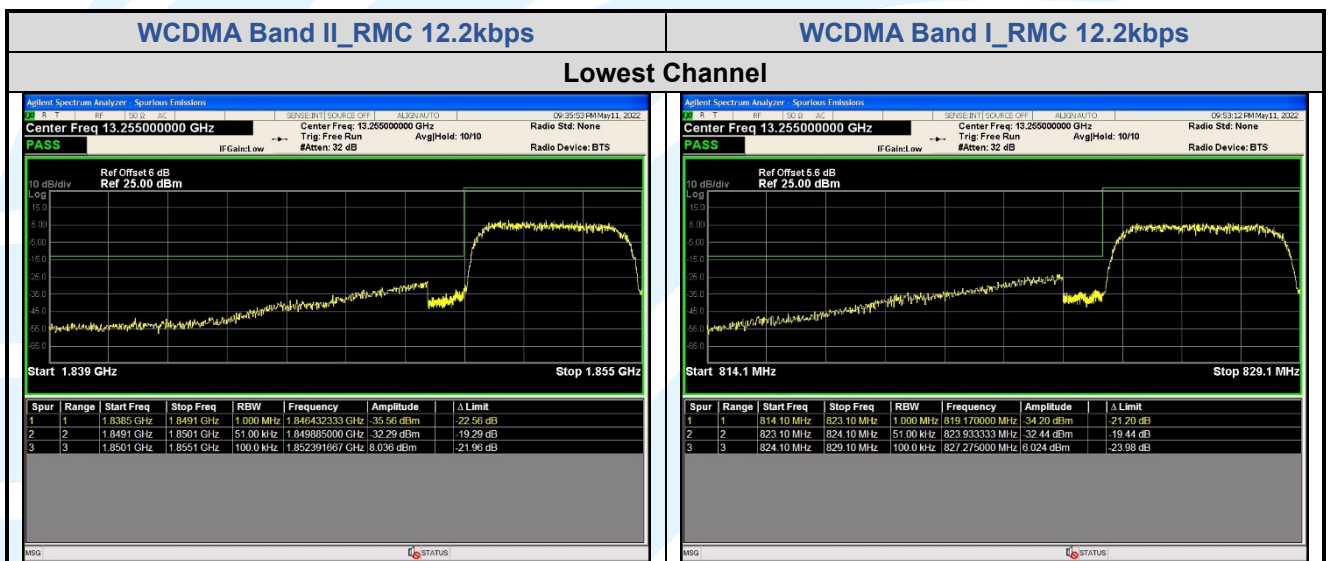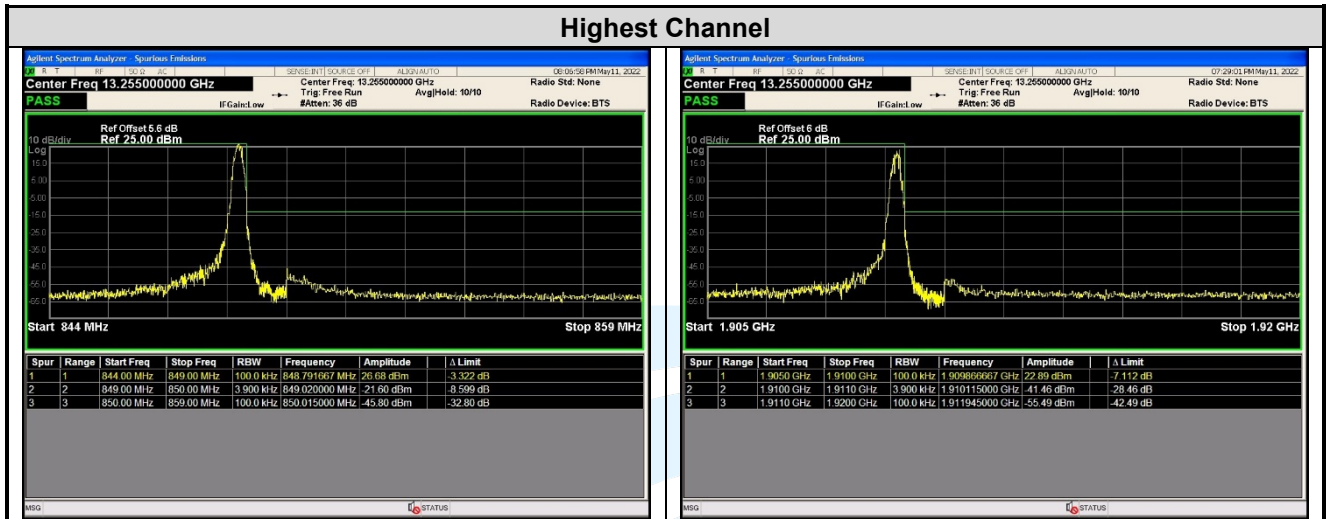

5.7 SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Test Requirement: FCC 47 CFR Part 2.1051,
FCC 47 CFR Part 22.917(a)(b),
FCC 47 CFR Part 24.238(a)(b),
FCC 47 CFR Part 27.53(h)(1)

Test Method: ANSI C63.26-2015 & KDB 971168 D01v03r01

Limit:

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13 dBm.

Test Procedure:

The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range. b. Measuring frequency range is from 30 MHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower. Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.


Test Setup: Refer to section 4.2.2 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode

Test Results: Pass

The test plots as follows:

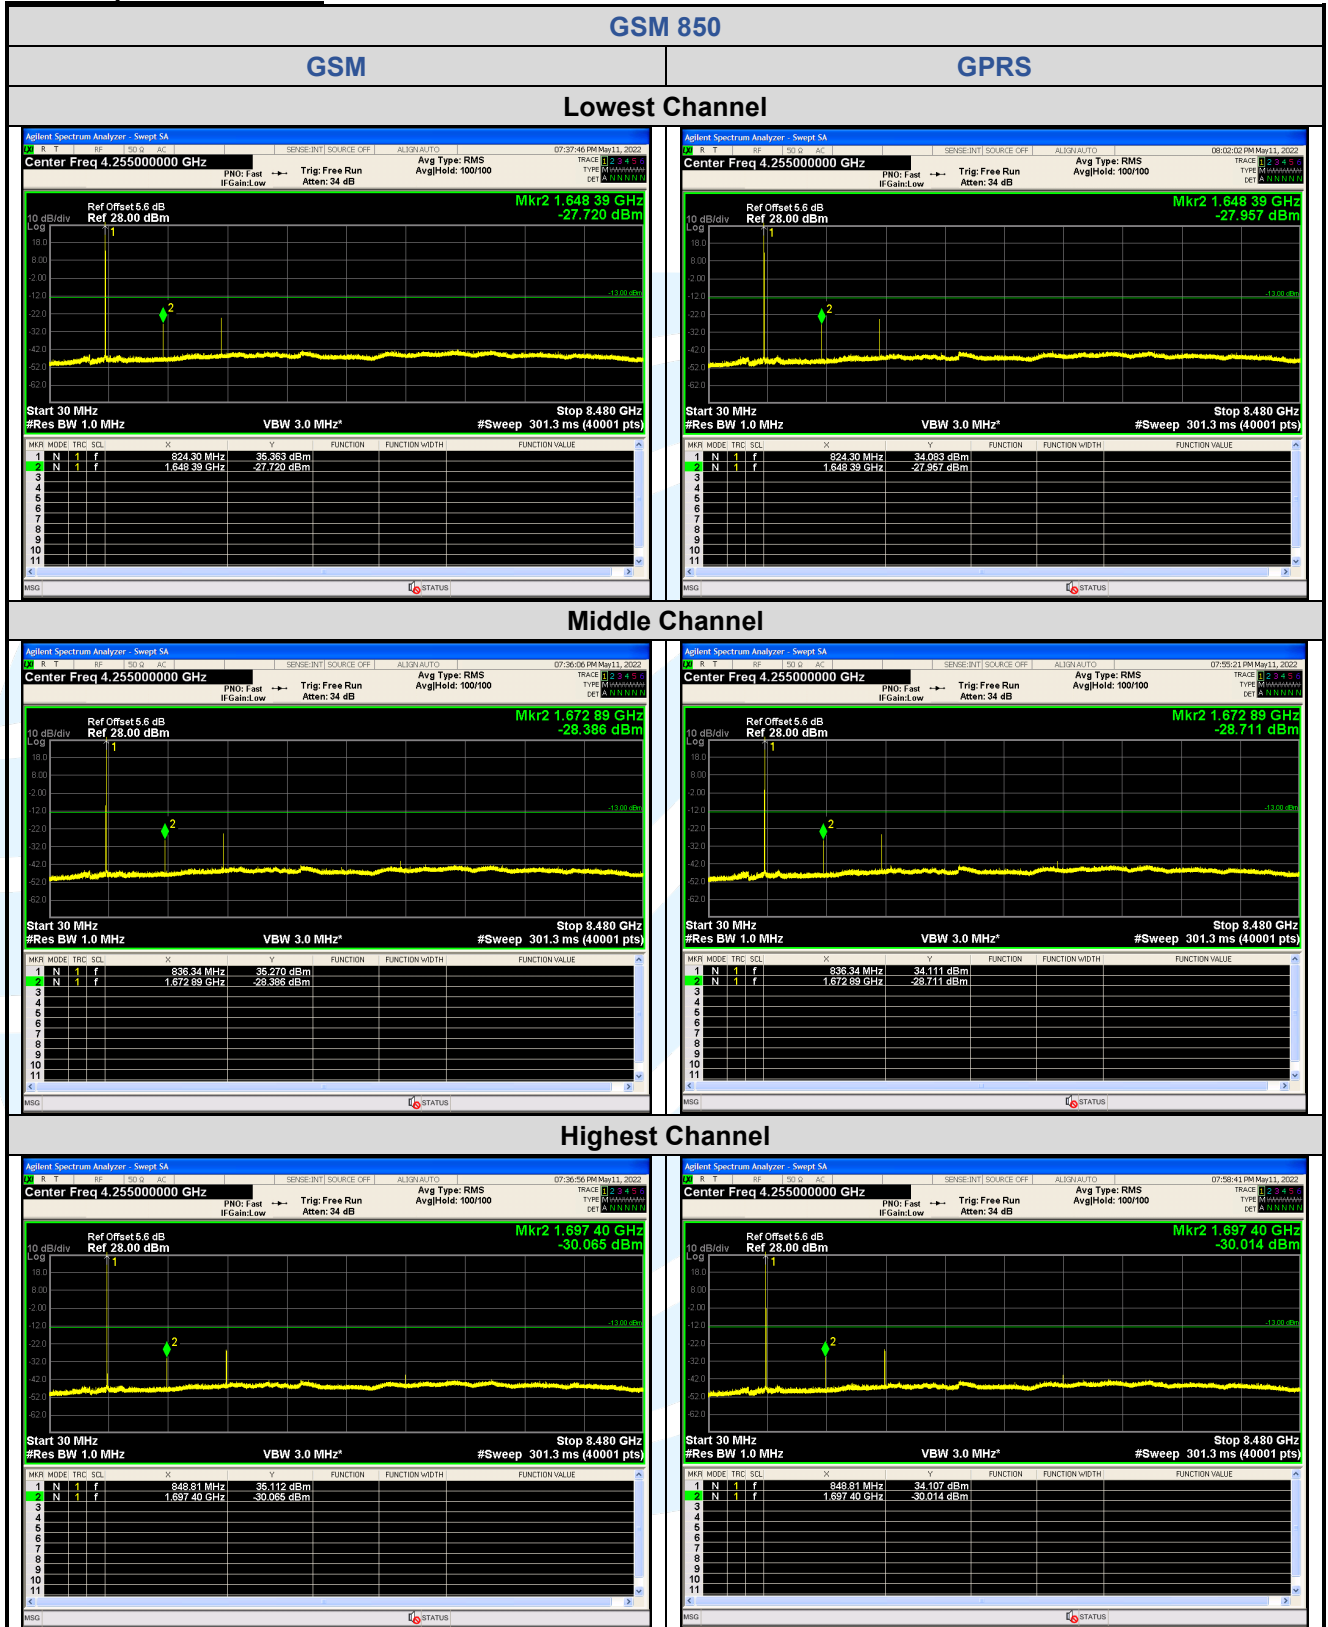

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC23G-V1.1

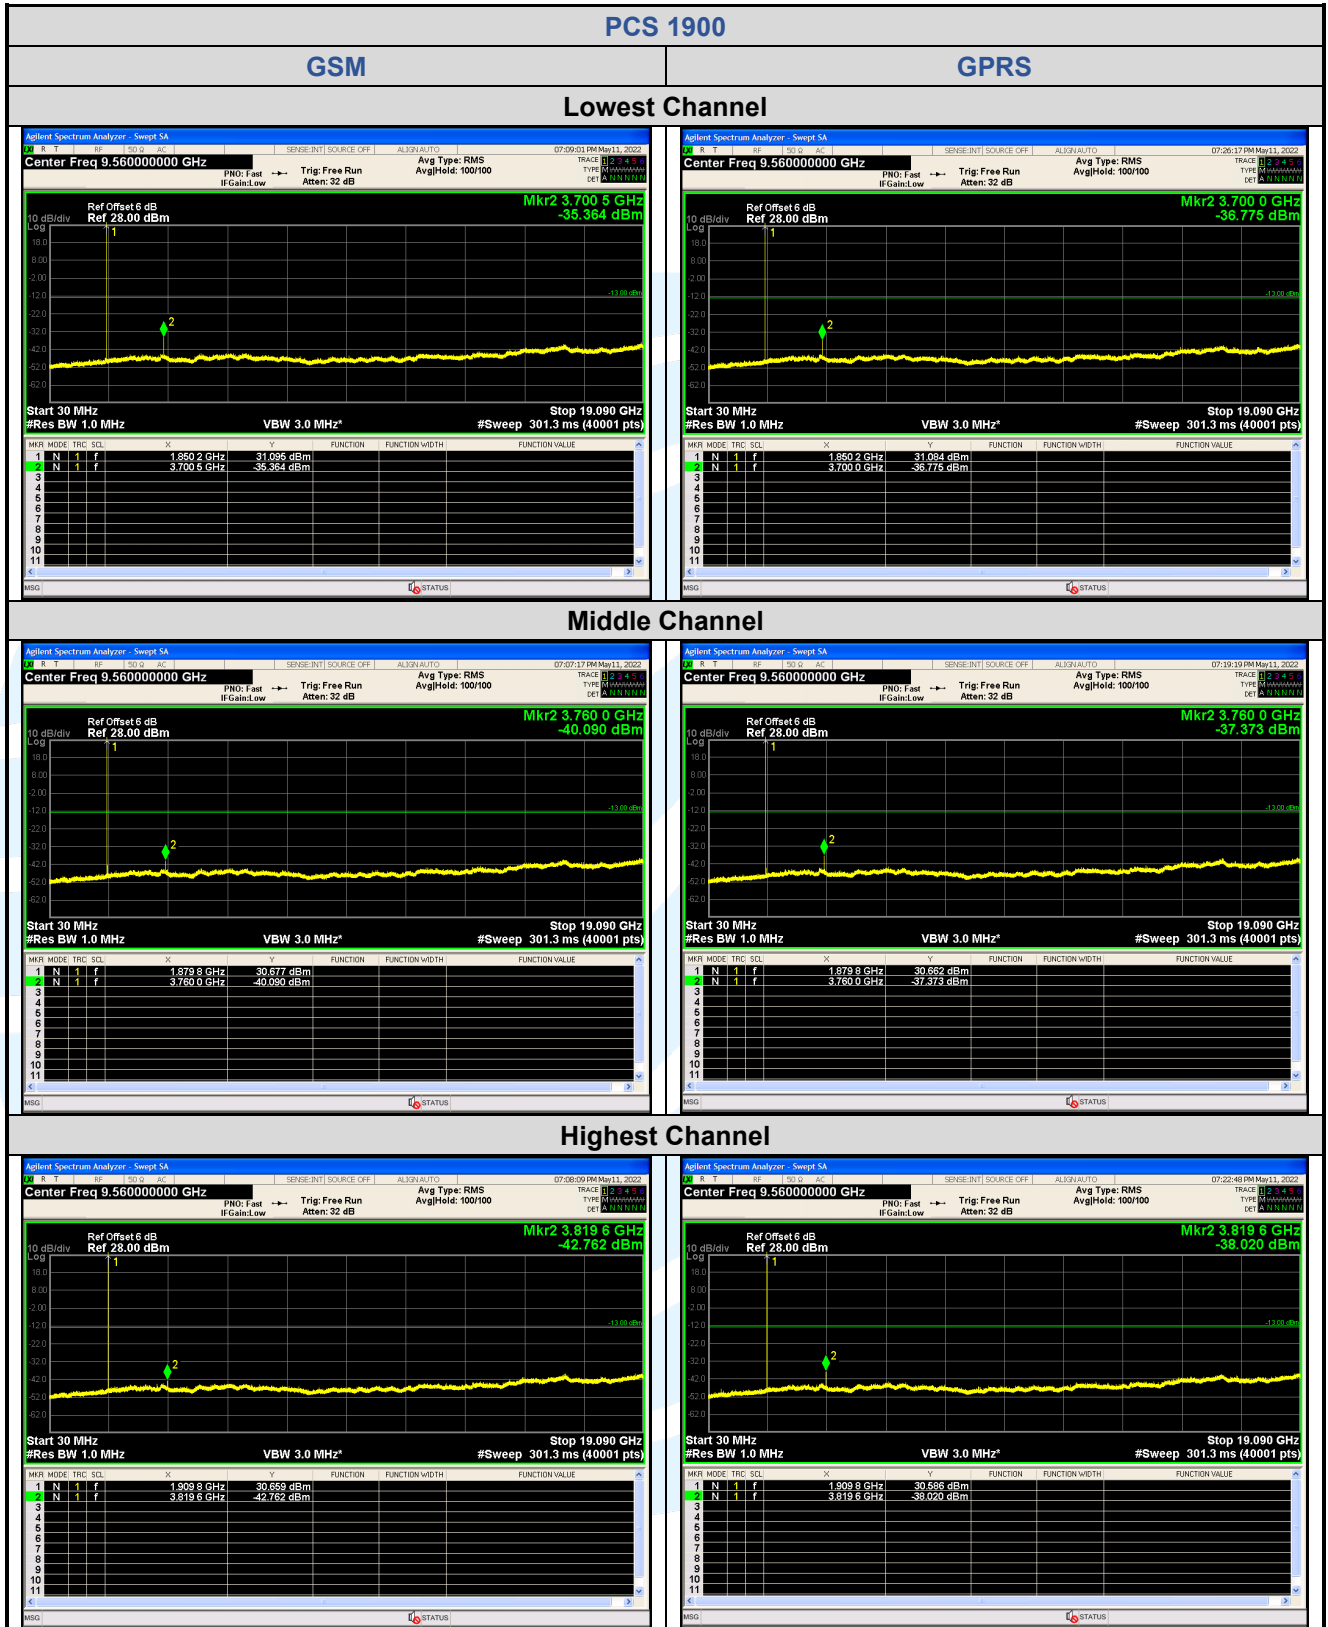

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC23G-V1.1

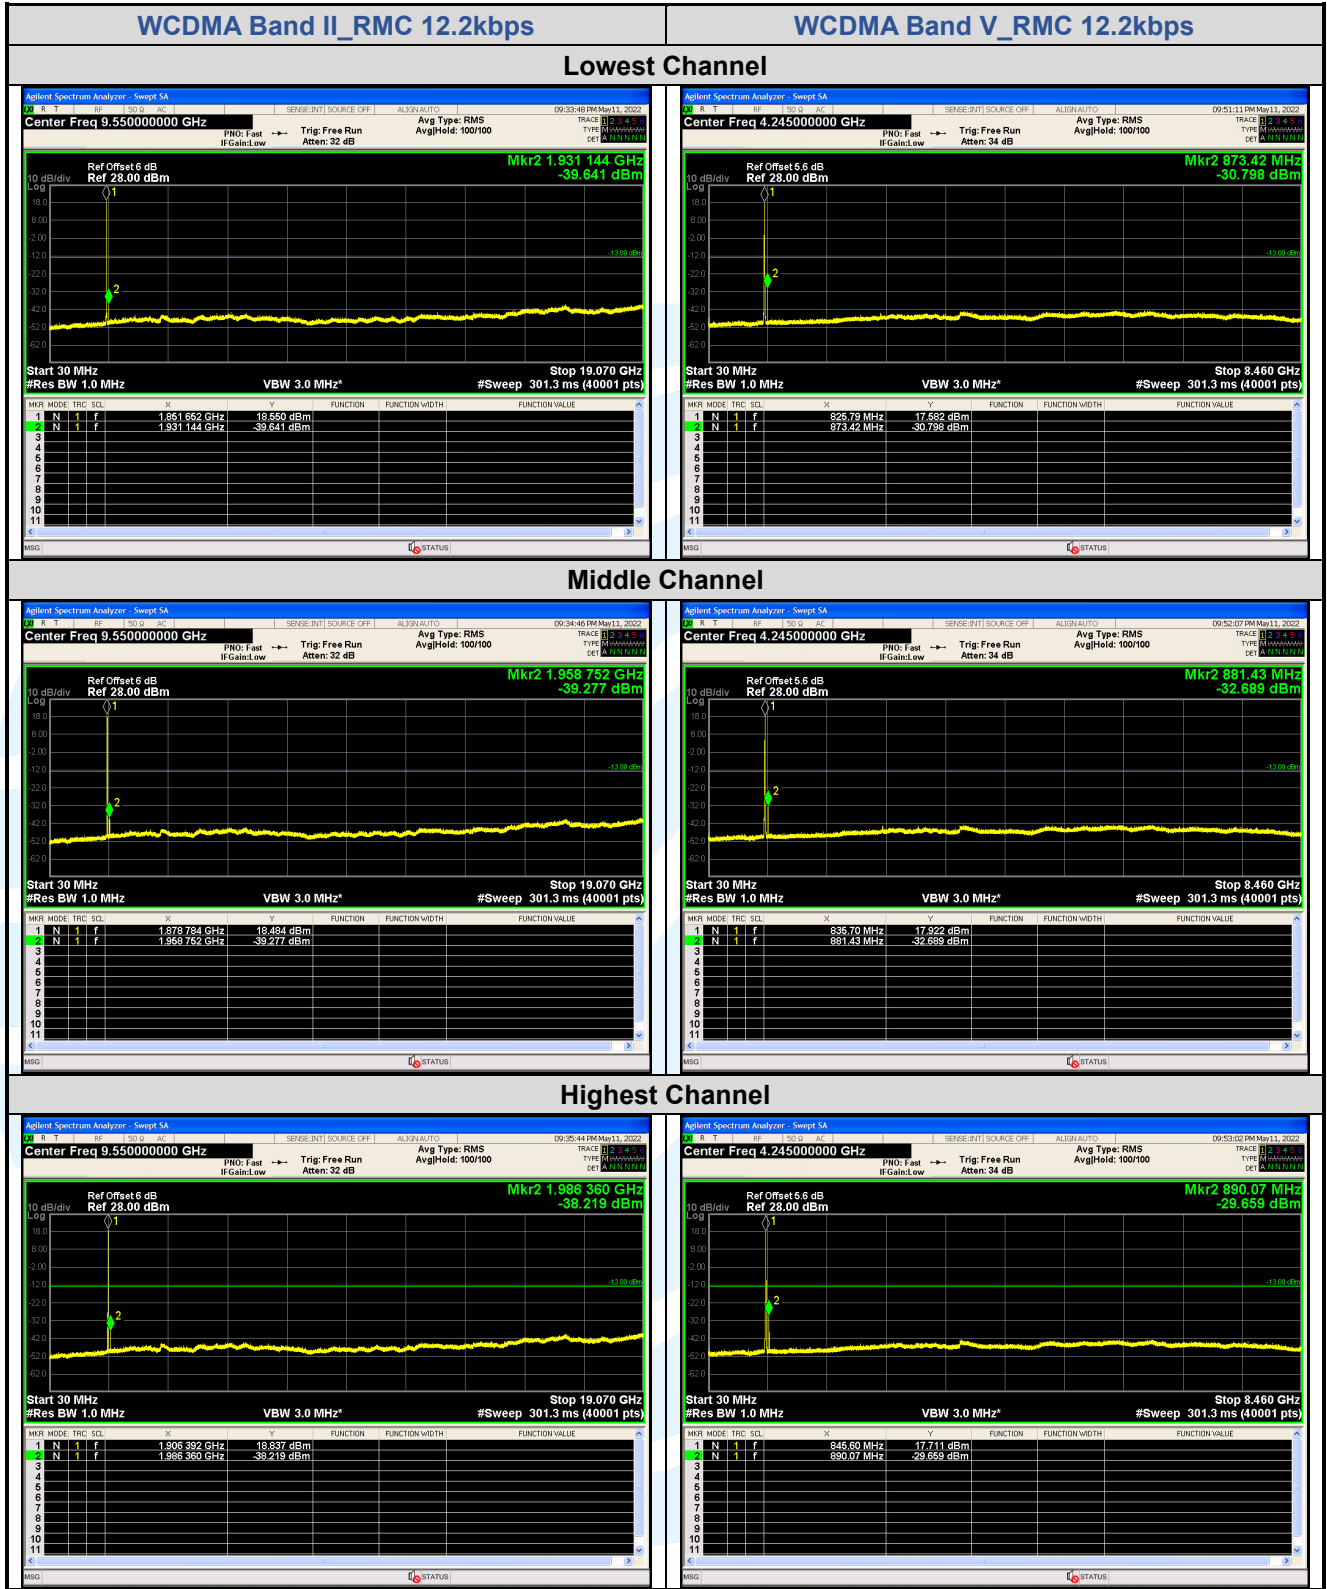

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China
 Tel: +86-755-28230888 Fax: +86-755-28230886 E-mail: info@uttlab.com <http://www.uttlab.com>
 UTT-RF-FCC23G-V1.1

5.8 FIELD STRENGTH OF SPURIOUS RADIATION

Test Requirement: FCC 47 CFR Part 2.1053,
 FCC 47 CFR Part 22.917(a)(b),
 FCC 47 CFR Part 24.238(a)(b),
 FCC 47 CFR Part 27.53(h)(1)

Test Method: ANSI C63.26-2015 & KDB 971168 D01v03r01 Section 7

Limits:

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB. The emission limit equal to -13 dBm.

Test Setup: Refer to section 4.2.1 for details.

Test Procedures: KDB 971168 D01v03r01 Section 7

Equipment Used: Refer to section 3 for details.

Test Result: Pass

The measurement data as follows:

GSM 850							
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
GPRS_ Lowest Channel							
1	554.171	-89.69	37.04	-52.65	-13.00	-39.65	Horizontal
2	689.051	-89.31	40.05	-49.26	-13.00	-36.26	Horizontal
3	965.474	-87.30	42.57	-44.73	-13.00	-31.73	Horizontal
4	1648.400	-65.30	0.20	-65.10	-13.00	-52.10	Horizontal
5	2472.600	-66.92	3.59	-63.33	-13.00	-50.33	Horizontal
6	542.610	-87.91	36.84	-51.07	-13.00	-38.07	Vertical
7	713.692	-88.76	40.41	-48.35	-13.00	-35.35	Vertical
8	919.132	-87.60	42.67	-44.93	-13.00	-31.93	Vertical
9	1648.400	-66.76	0.20	-66.56	-13.00	-53.56	Vertical
10	2472.600	-66.21	3.59	-62.62	-13.00	-49.62	Vertical
GPRS_ Middle Channel							
1	546.437	-89.50	36.95	-52.55	-13.00	-39.55	Horizontal
2	684.226	-89.12	40.01	-49.11	-13.00	-36.11	Horizontal
3	932.141	-87.60	42.65	-44.95	-13.00	-31.95	Horizontal
4	1673.200	-67.01	0.36	-66.65	-13.00	-53.65	Horizontal
5	2509.800	-66.87	3.71	-63.16	-13.00	-50.16	Horizontal
6	607.181	-88.59	38.31	-50.28	-13.00	-37.28	Vertical
7	744.427	-88.58	40.58	-48.00	-13.00	-35.00	Vertical
8	938.714	-87.61	42.67	-44.94	-13.00	-31.94	Vertical
9	1673.200	-66.53	0.36	-66.17	-13.00	-53.17	Vertical
10	2509.800	-66.98	3.71	-63.27	-13.00	-50.27	Vertical
GPRS_ Highest Channel							
1	546.437	-88.94	36.95	-51.99	-13.00	-38.99	Horizontal
2	771.047	-88.59	40.84	-47.75	-13.00	-34.75	Horizontal
3	893.656	-88.59	42.73	-45.86	-13.00	-32.86	Horizontal
4	1697.600	-66.53	0.52	-66.01	-13.00	-53.01	Horizontal
5	2546.400	-66.52	3.80	-62.72	-13.00	-49.72	Horizontal

Shenzhen UnionTrust Quality and Technology Co., Ltd.

6	586.217	-89.31	37.58	-51.73	-13.00	-38.73	Vertical
7	684.226	-88.94	40.01	-48.93	-13.00	-35.93	Vertical
8	906.304	-87.00	42.75	-44.25	-13.00	-31.25	Vertical
9	1697.600	-67.26	0.52	-66.74	-13.00	-53.74	Vertical
10	2546.400	-65.52	3.80	-61.72	-13.00	-48.72	Vertical

PCS 1900							
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
GPRS_ Lowest Channel							
1	620.117	-79.41	9.04	-70.37	-13.00	-57.37	Horizontal
2	723.793	-80.16	11.23	-68.93	-13.00	-55.93	Horizontal
3	881.184	-81.20	13.51	-67.69	-13.00	-54.69	Horizontal
4	3700.400	-64.52	7.58	-56.94	-13.00	-43.94	Horizontal
5	5550.600	-66.44	11.77	-54.67	-13.00	-41.67	Horizontal
6	713.692	-81.36	11.06	-70.30	-13.00	-57.30	Vertical
7	925.613	-81.58	13.76	-67.82	-13.00	-54.82	Vertical
8	979.139	-81.28	14.16	-67.12	-13.00	-54.12	Vertical
9	3700.400	-64.88	7.58	-57.30	-13.00	-44.30	Vertical
10	5550.600	-68.93	11.77	-57.16	-13.00	-44.16	Vertical
GPRS_ Middle Channel							
1	684.226	-81.27	10.62	-70.65	-13.00	-57.65	Horizontal
2	893.656	-81.98	13.82	-68.16	-13.00	-55.16	Horizontal
3	965.474	-81.97	13.86	-68.11	-13.00	-55.11	Horizontal
4	3760.000	-65.12	7.79	-57.33	-13.00	-44.33	Horizontal
5	5640.000	-68.80	11.56	-57.24	-13.00	-44.24	Horizontal
6	713.692	-81.66	11.06	-70.60	-13.00	-57.60	Vertical
7	844.803	-81.43	12.61	-68.82	-13.00	-55.82	Vertical
8	887.398	-81.97	13.66	-68.31	-13.00	-55.31	Vertical
9	3760.000	-66.77	7.79	-58.98	-13.00	-45.98	Vertical
10	5640.000	-67.38	11.56	-55.82	-13.00	-42.82	Vertical
GPRS_ Highest Channel							
1	684.226	-81.74	10.62	-71.12	-13.00	-58.12	Horizontal
2	815.635	-81.35	12.07	-69.28	-13.00	-56.28	Horizontal
3	938.714	-81.75	13.89	-67.86	-13.00	-54.86	Horizontal
4	3819.600	-66.08	8.01	-58.07	-13.00	-45.07	Horizontal
5	5729.400	-70.43	11.36	-59.07	-13.00	-46.07	Horizontal
6	734.037	-81.20	11.38	-69.82	-13.00	-56.82	Vertical
7	868.886	-81.50	13.10	-68.40	-13.00	-55.40	Vertical
8	912.695	-81.50	13.96	-67.54	-13.00	-54.54	Vertical
9	3819.600	-64.05	8.01	-56.04	-13.00	-43.04	Vertical
10	5729.400	-67.69	11.36	-56.33	-13.00	-43.33	Vertical

Shenzhen UnionTrust Quality and Technology Co., Ltd.

WCDMA Band II							
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
RMC 12.2kbps_ Lowest Channel							
1	509.356	-81.13	7.03	-74.10	-13.00	-61.10	Horizontal
2	713.692	-81.74	11.06	-70.68	-13.00	-57.68	Horizontal
3	906.304	-82.66	13.88	-68.78	-13.00	-55.78	Horizontal
4	3704.800	-65.30	7.59	-57.71	-13.00	-44.71	Horizontal
5	5557.200	-70.09	11.75	-58.34	-13.00	-45.34	Horizontal
6	693.910	-80.84	10.75	-70.09	-13.00	-57.09	Vertical
7	728.897	-80.98	11.22	-69.76	-13.00	-56.76	Vertical
8	932.141	-81.98	13.85	-68.13	-13.00	-55.13	Vertical
9	3704.800	-65.72	7.59	-58.13	-13.00	-45.13	Vertical
10	5557.200	-68.13	11.75	-56.38	-13.00	-43.38	Vertical
RMC 12.2kbps_ Middle Channel							
1	646.822	-81.31	9.66	-71.65	-13.00	-58.65	Horizontal
2	850.760	-81.36	12.79	-68.57	-13.00	-55.57	Horizontal
3	899.958	-81.98	13.78	-68.20	-13.00	-55.20	Horizontal
4	3760.000	-64.57	7.79	-56.78	-13.00	-43.78	Vertical
5	5640.000	-65.44	11.56	-53.88	-13.00	-40.88	Vertical
6	693.910	-81.35	10.75	-70.60	-13.00	-57.60	Vertical
7	887.398	-82.39	13.66	-68.73	-13.00	-55.73	Vertical
8	992.997	-82.57	14.68	-67.89	-13.00	-54.89	Vertical
9	3760.000	-64.79	7.79	-57.00	-13.00	-44.00	Vertical
10	5640.000	-66.92	11.56	-55.36	-13.00	-42.36	Vertical
RMC 12.2kbps_ Highest Channel							
1	498.730	-80.43	6.61	-73.82	-13.00	-60.82	Horizontal
2	665.261	-81.98	10.31	-71.67	-13.00	-58.67	Horizontal
3	932.141	-81.58	13.85	-67.73	-13.00	-54.73	Horizontal
4	3815.200	-64.68	7.99	-56.69	-13.00	-43.69	Horizontal
5	5722.800	-67.76	11.38	-56.38	-13.00	-43.38	Horizontal
6	679.435	-79.71	10.42	-69.29	-13.00	-56.29	Vertical
7	881.184	-82.39	13.51	-68.88	-13.00	-55.88	Vertical
8	965.474	-82.06	13.86	-68.20	-13.00	-55.20	Vertical
9	3815.200	-63.71	7.99	-55.72	-13.00	-42.72	Vertical
10	5722.800	-68.93	11.38	-57.55	-13.00	-44.55	Vertical

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China
 Tel: +86-755-28230888 Fax: +86-755-28230886 E-mail: info@uttlab.com <http://www.uttlab.com>
 UTTR-RF-FCC23G-V1.1

WCDMA Band V							
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
RMC 12.2kbps_ Lowest Channel							
1	669.952	-89.12	39.43	-49.69	-13.00	-36.69	Horizontal
2	787.475	-88.41	40.98	-47.43	-13.00	-34.43	Horizontal
3	979.139	-87.60	42.83	-44.77	-13.00	-31.77	Horizontal
4	1652.800	-64.56	0.23	-64.33	-13.00	-51.33	Horizontal
5	2479.200	-68.59	3.61	-64.98	-13.00	-51.98	Horizontal
6	468.165	-89.70	35.13	-54.57	-13.00	-41.57	Vertical
7	637.795	-88.94	38.91	-50.03	-13.00	-37.03	Vertical
8	972.283	-88.08	42.83	-45.25	-13.00	-32.25	Vertical
9	1652.800	-63.74	0.23	-63.51	-13.00	-50.51	Vertical
10	2479.200	-66.78	3.61	-63.17	-13.00	-50.17	Vertical
RMC 12.2kbps_ Middle Channel							
1	523.876	-88.76	36.38	-52.38	-13.00	-39.38	Horizontal
2	689.051	-88.59	40.05	-48.54	-13.00	-35.54	Horizontal
3	938.714	-87.93	42.67	-45.26	-13.00	-32.26	Horizontal
4	1672.800	-65.75	0.36	-65.39	-13.00	-52.39	Horizontal
5	2509.200	-67.83	3.71	-64.12	-13.00	-51.12	Horizontal
6	491.770	-88.42	35.61	-52.81	-13.00	-39.81	Vertical
7	642.292	-89.12	39.00	-50.12	-13.00	-37.12	Vertical
8	1000.000	-88.08	43.50	-44.58	-13.00	-31.58	Vertical
9	1672.800	-65.39	0.36	-65.03	-13.00	-52.03	Vertical
10	2509.200	-68.61	3.71	-64.90	-13.00	-51.90	Vertical
RMC 12.2kbps_ Highest Channel							
1	360.977	-89.31	32.71	-56.60	-13.00	-43.60	Horizontal
2	703.731	-89.32	40.30	-49.02	-13.00	-36.02	Horizontal
3	938.714	-87.77	42.67	-45.10	-13.00	-32.10	Horizontal
4	1693.200	-63.88	0.50	-63.38	-13.00	-50.38	Horizontal
5	2539.800	-66.10	3.78	-62.32	-13.00	-49.32	Horizontal
6	578.036	-89.50	37.49	-52.01	-13.00	-39.01	Vertical
7	765.648	-88.58	40.80	-47.78	-13.00	-34.78	Vertical
8	912.695	-87.44	42.81	-44.63	-13.00	-31.63	Vertical
9	1693.200	-65.74	0.50	-65.24	-13.00	-52.24	Vertical
10	2539.800	-66.50	3.78	-62.72	-13.00	-49.72	Vertical

Remark:

1. Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result – Limit

Shenzhen UnionTrust Quality and Technology Co., Ltd.

5.9 FREQUENCY STABILITY

Test Requirement: FCC 47 CFR Part 2.1055 &
 FCC 47 CFR Part 22.355 &
 FCC 47 CFR Part 24.235 &
 FCC 47 CFR Part 27.54

Test Method: ANSI C63.26-2015 & KDB 971168 D01v03r01

Limits:

FCC 47 CFR Part 22.355,

The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

FCC 47 CFR Part 24.235, FCC 47 CFR Part 27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Setup: Refer to section 4.2.2 for details.

Test Procedures:

- 1) Use CMW 500 with Frequency Error measurement capability.
 - a) Temp. = -30° to $+50^{\circ}$ C
 - b) Voltage =low voltage, 3.6 Vdc, Normal, 3.85 Vdc and High voltage, 4.4 Vdc.

2) Frequency Stability vs Temperature:

The EUT is place inside a temperature chamber. The temperature is set to 20° C and allowed to stabilize.

After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until $+50^{\circ}$ C is reached.

3) Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

Equipment Used: Refer to section 3 for details.

Test Result: Pass

Modulation	Channel/ Frequency (MHz)	Voltage (Vdc)	Temperature ($^{\circ}$ C)	Deviation	Deviation	Limit	Result
				(Hz)	(ppm)	(ppm)	
GSM 850							
GMSK	190 / 836.6	VL	TN	21	0.0251	± 2.5	Pass
		VN		19	0.0227	± 2.5	Pass
		VH		22	0.0263	± 2.5	Pass
		VN	50	9	0.0108	± 2.5	Pass
			40	18	0.0215	± 2.5	Pass
			30	-18	-0.0215	± 2.5	Pass
			20	-21	-0.0251	± 2.5	Pass
			10	-9	-0.0108	± 2.5	Pass
			0	-12	-0.0143	± 2.5	Pass
			-10	-32	-0.0383	± 2.5	Pass
			-20	-12	-0.0143	± 2.5	Pass
			-30	9	0.0108	± 2.5	Pass

Modulation	Channel/ Frequency	Voltage	Temperature	Deviation	Deviation	Limit	Result
	(MHz)	(Vdc)	(°C)	(Hz)	(ppm)	(ppm)	
PCS 1900							
GMSK	661 / 1880.0	VL	TN	32	0.0170	N/A	Pass
		VN		24	0.0128		Pass
		VH		19	0.0101		Pass
		VN	50	22	0.0117		Pass
			40	12	0.0064		Pass
			30	12	0.0064		Pass
			20	43	0.0229		Pass
			10	19	0.0101		Pass
			0	8	0.0043		Pass
			-10	22	0.0117		Pass
			-20	13	0.0069		Pass
			-30	14	0.0074		Pass

Modulation	Channel/ Frequency	Voltage	Temperature	Deviation	Deviation	Limit	Result
	(MHz)	(Vdc)	(°C)	(Hz)	(ppm)	(ppm)	
WCDMA Band II							
RMC 12.2kbps	9400 / 1880.0	VL	TN	21	0.0112	N/A	Pass
		VN		76	0.0404		Pass
		VH		12	0.0064		Pass
		VN	50	33	0.0176		Pass
			40	33	0.0176		Pass
			30	12	0.0064		Pass
			20	87	0.0463		Pass
			10	22	0.0117		Pass
			0	1	0.0005		Pass
			-10	33	0.0176		Pass
			-20	74	0.0394		Pass
			-30	24	0.0128		Pass

Modulation	Channel/ Frequency (MHz)	Voltage	Temperature	Deviation	Deviation	Limit	Result	
		(Vdc)	(°C)	(Hz)	(ppm)	(ppm)		
WCDMA Band V								
RMC 12.2kbps	4182 / 836.4	VL	TN	19	0.0227	± 2.5	Pass	
		VN		21	0.0251	± 2.5	Pass	
		VH		21	0.0251	± 2.5	Pass	
				50	32	0.0383	± 2.5	Pass
				40	12	0.0143	± 2.5	Pass
				30	16	0.0191	± 2.5	Pass
				20	32	0.0383	± 2.5	Pass
				10	33	0.0395	± 2.5	Pass
				0	13	0.0155	± 2.5	Pass
				-10	19	0.0227	± 2.5	Pass
				-20	53	0.0634	± 2.5	Pass
				-30	32	0.0383	± 2.5	Pass

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China
 Tel: +86-755-28230888 Fax: +86-755-28230886 E-mail: info@uttlab.com <http://www.uttlab.com>
 UTTR-RF-FCC23G-V1.1

APPENDIX 1 PHOTOS OF TEST SETUP

See test photos attached in Appendix 1 for the actual connections between Product and support equipment.

APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS

Refer to Appendix 2 for EUT external and internal photos.

*** End of Report ***

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of UnionTrust, this report can't be reproduced except in full.
