



REPORT No.: SZ22100112S01

Annex D Plots of Maximum SAR Test Results

LTE Band 71_20MHz_QPSK_1RB_0Offset_Bottom Face_0mm_Ch133322


Communication System: UID 0, LTE (0); Frequency: 683 MHz; Duty Cycle: 1:1
Medium: HSL_750 Medium parameters used: $f = 683$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 42.292$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(10.2, 10.2, 10.2) @ 683 MHz; Calibrated: 2022.01.12
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2021.12.30
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch133322/Area Scan (101x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.373 W/kg

Ch133322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 5.672 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.744 W/kg
SAR(1 g) = 0.351 W/kg; SAR(10 g) = 0.184 W/kg
Maximum value of SAR (measured) = 0.567 W/kg

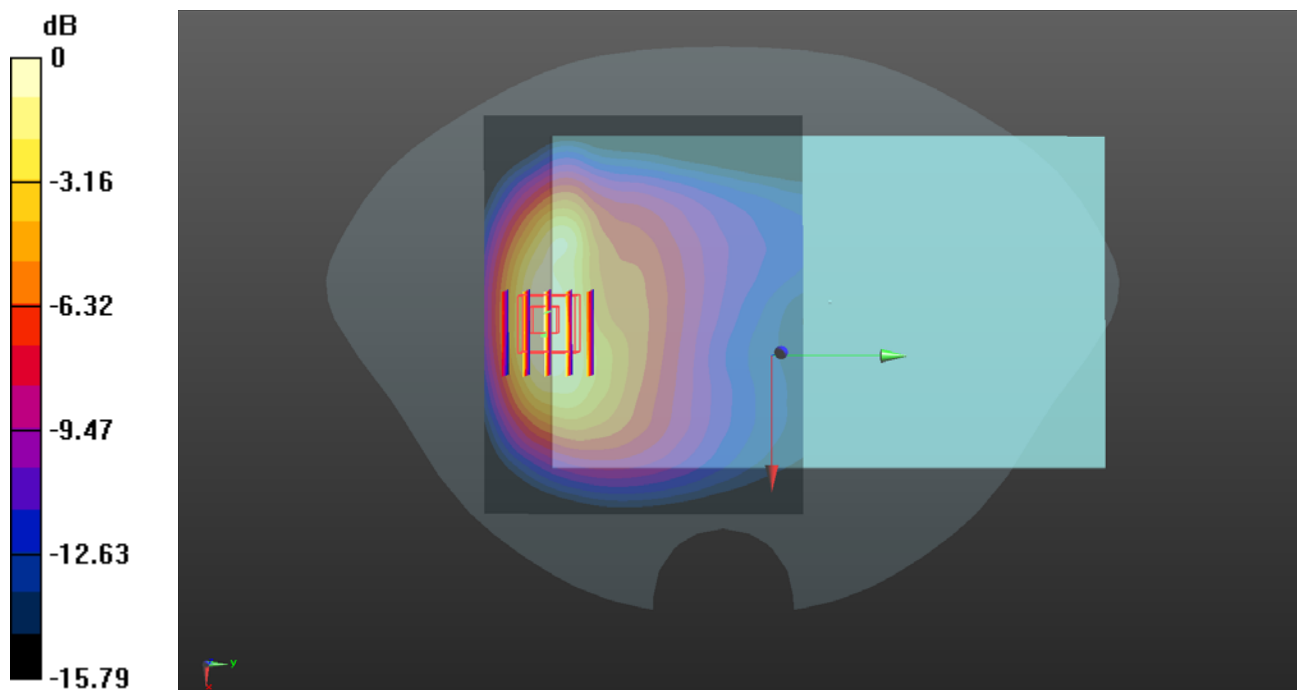

0 dB = 0.373 W/kg