

TEST REPORT

Reference No..... : WTX21X12136503W-11
FCC ID..... : YHLBLUF91
Applicant..... : BLU Products Inc.
Address..... : 10814 NW 33rd St # 100 Doral, FL 33172,USA
Product Name..... : Smart Phone
Test Model..... : F91 5G
Standards..... : **FCC PART15 SUBPART B**
Date of Receipt sample : Dec. 08, 2021
Date of Test..... : Dec. 08, 2021 to Jan.19, 2022
Date of Issue..... : Jan.19, 2022
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China


Tel.: +86-755-33663308

Fax.: +86-755-33663309


Tested by:

Reviewed By:

Approved & Authorized By:

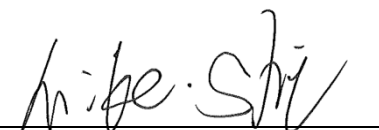

Mike Shi / Project Engineer

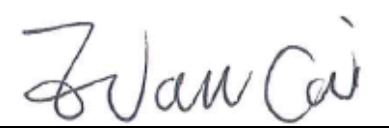

Evan Cai /EMC Manager



Silin Chen / Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 TEST STANDARDS	5
1.3 TEST METHODOLOGY	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND OPERATION MODE	6
1.6 MEASUREMENT UNCERTAINTY	7
1.7 TEST EQUIPMENT LIST AND DETAILS	8
2. SUMMARY OF TEST RESULTS	9
3. CONDUCTED EMISSIONS	10
3.1 TEST PROCEDURE	10
3.2 BASIC TEST SETUP BLOCK DIAGRAM	10
3.3 ENVIRONMENTAL CONDITIONS	10
3.4 SUMMARY OF TEST RESULTS	10
4. RADIATED EMISSION	13
4.1 TEST PROCEDURE	13
4.2 BLOCK DIAGRAM OF TEST SETUP	13
4.3 TEST RECEIVER SETUP	14
4.4 CORRECTED AMPLITUDE & MARGIN CALCULATION	14
4.5 ENVIRONMENTAL CONDITIONS	14
4.6 SUMMARY OF TEST RESULTS	14

Report version

Version No.	Date of issue	Description
Rev.00	Jan.19, 2022	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: BLU Products Inc.
 Address of applicant: 10814 NW 33rd St # 100 Doral, FL 33172,USA

Manufacturer: BLU Products Inc.
 Address of manufacturer: 10814 NW 33rd St # 100 Doral, FL 33172,USA

General Description of EUT	
Product Name:	Smart Phone
Trade Name:	BLU
Model No.:	F91 5G
Adding Model(s):	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model YS3060, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Rated Voltage:	DC3.85V
Rated Current:	/
Rated Power:	/
Power Adapter Model:	US-KB-2009 INPUT:AC100-240V, 50/60Hz, 0.6A Output:DC9V, 2000mA
Lowest Internal Frequency:	/
Highest Internal Frequency:	Above 108MHz
Classification of ITE:	Class B

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15 Subpart B:Unintentional Radiators.

ANSI C63.4-2014:American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List			
Test Mode	Description	Remark	Power Supply Mode
TM1	Charging And Playing	Connect to the Adapter;	AC120V 60Hz for adapter
TM2	Downloading	Connect to the Notebook;	AC120V 60Hz for PC
TM3	Camera	Camera On	DC3.85V
TM4	FM	Worst case FM 98MHz	DC3.85V
TM5	GPS	Receive 1575.42MHz	DC3.85V
TM6	2G	Receiver	DC3.85V
TM7	3G	Receiver	DC3.85V
TM8	4G	Receiver	DC3.85V
TM9	5G	Receiver	DC3.85V
TM10	WIFI	Receiver	DC3.85V
TM11	BT	Receiver	DC3.85V

Remark: Only show the worst case(TM1-TM5) in the test report.

EUT Cable List and Details				
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite	With / Without Chip
USB Cable	1.04	Shielded	Without Ferrite	/
DC Cable	1.2	Unshielded	Without Ferrite	/

Special Cable List and Details				
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite	With / Without Chip
/	/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Conducted Emissions	Conducted	9-150kHz ± 3.74 dB
		0.15-30MHz ± 3.34 dB
Radiated Emissions	Radiated	30-200MHz ± 4.52 dB
		0.2-1GHz ± 5.56 dB
		1-6GHz ± 3.84 dB
		6-18GHz ± 3.92 dB

1.7 Test Equipment List and Details

Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
<input checked="" type="checkbox"/> Chamber A: Below 1GHz					
Spectrum Analyzer	Rohde & Schwarz	FSP	836079/035	2021-03-30	2022-03-29
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2021-04-12	2022-04-11
Amplifier	Agilent	8447F	3113A06717	2022-01-07	2023-01-06
Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2023-03-19
Trilog Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-20	2023-03-19
<input type="checkbox"/> Chamber A: Above 1GHz					
Amplifier	C&D	PAP-1G18	2002	2021-04-12	2022-04-11
Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
<input type="checkbox"/> Chamber B: Below 1GHz					
EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2021-05-06	2022-05-05
Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2023-04-08
Amplifier	Agilent	8447D	2944A10179	2021-04-12	2022-04-11
<input type="checkbox"/> Chamber C: Below 1GHz					
EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2022-01-07	2023-01-06
Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2021-05-28	2023-05-27
Amplifier	HP	8447F	2944A03869	2021-04-15	2022-04-14
<input checked="" type="checkbox"/> Conducted Room 1#					
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2021-04-15	2022-04-14
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2021-04-12	2022-04-11
AC LISN	Schwarz beck	NSLK8126	8126-224	2021-04-12	2022-04-11
<input type="checkbox"/> Conducted Room 2#					
EMI Test Receiver	Rohde & Schwarz	ESPI	10129	2021-04-12	2022-04-11
LISN	Rohde & Schwarz	ENV 216	100097	2021-04-12	2022-04-11

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

Description of Test	Result
§15.107(a) Conducted Emission	Compliant
§15.109(a) Radiated Emission	Compliant


N/A: not applicable

3. Conducted Emissions

3.1 Test Procedure

Test is conducting under the description of ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

3.2 Basic Test Setup Block Diagram

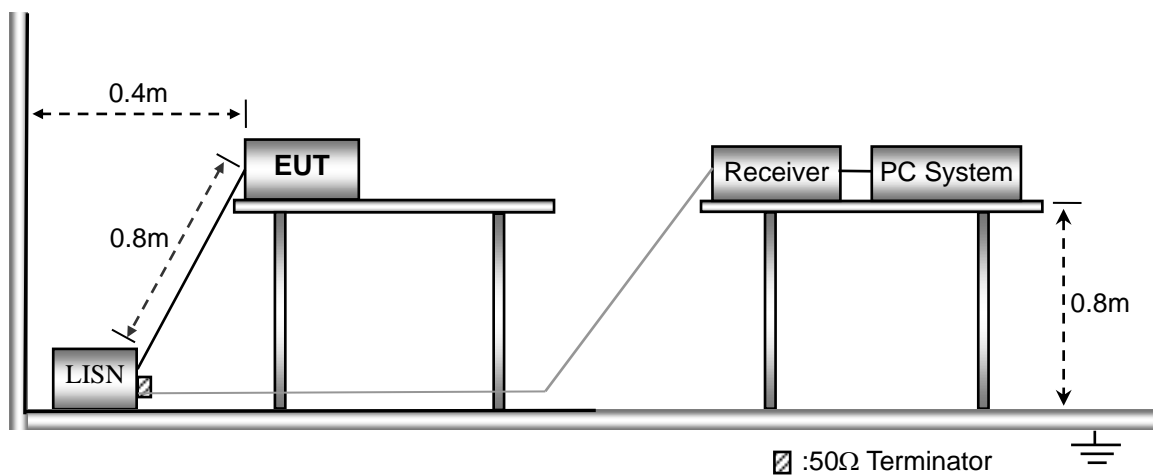


3.3 Environmental Conditions

Temperature:	23.5 °C
Relative Humidity:	54 %
ATM Pressure:	1014 mbar

3.4 Summary of Test Results


Please find the results below:

Test mode:	TM1	Polarity:	Line
------------	-----	-----------	------

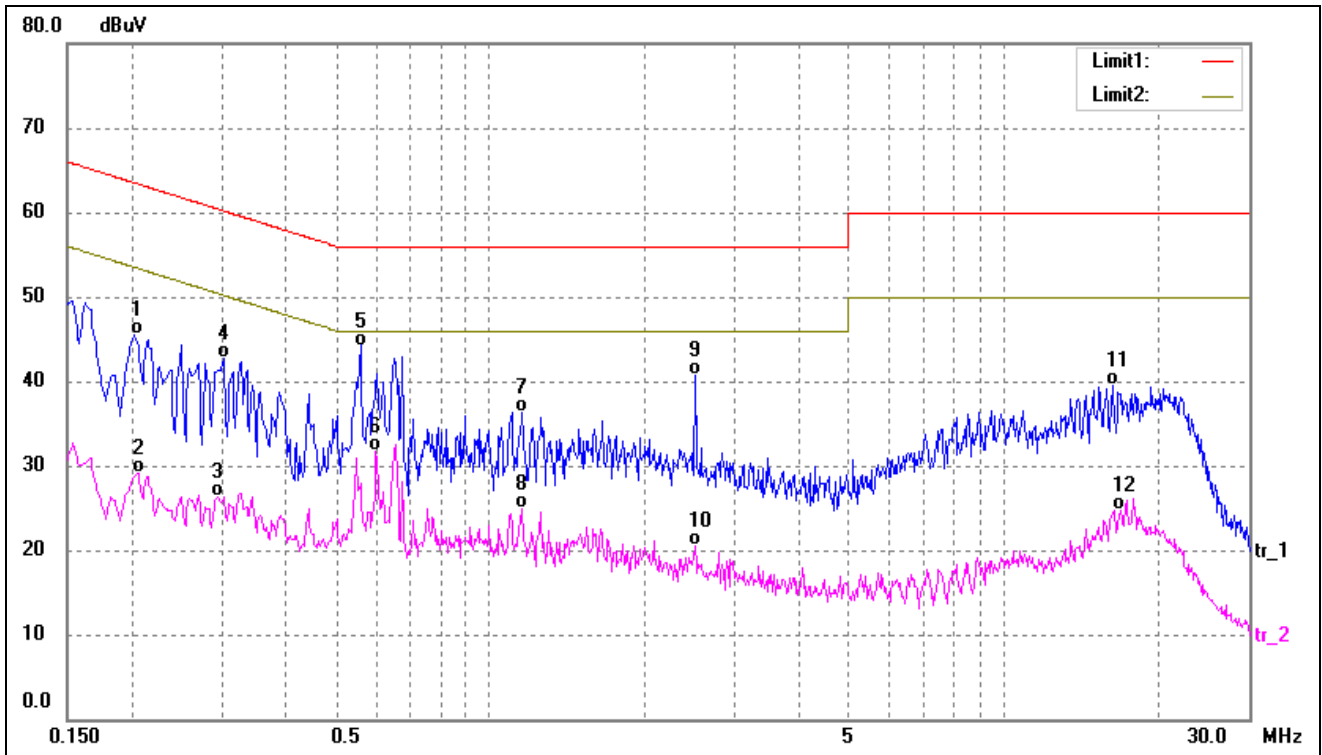

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2020	35.15	10.37	45.52	63.53	-18.01	QP
2	0.2060	18.78	10.37	29.15	53.37	-24.22	AVG
3	0.2940	16.01	10.34	26.35	50.41	-24.06	AVG
4	0.3020	32.44	10.34	42.78	60.19	-17.41	QP
5*	0.5580	33.91	10.29	44.20	56.00	-11.80	QP
6	0.5980	21.34	10.32	31.66	46.00	-14.34	AVG
7	1.1580	25.82	10.50	36.32	56.00	-19.68	QP
8	1.1580	14.36	10.50	24.86	46.00	-21.14	AVG
9	2.5100	30.66	10.11	40.77	56.00	-15.23	QP
10	2.5100	10.33	10.11	20.44	46.00	-25.56	AVG
11	16.2660	29.23	10.18	39.41	60.00	-20.59	QP
12	16.8660	14.58	10.19	24.77	50.00	-25.23	AVG

Test mode:	TM1	Polarity:	Neutral
------------	-----	-----------	---------

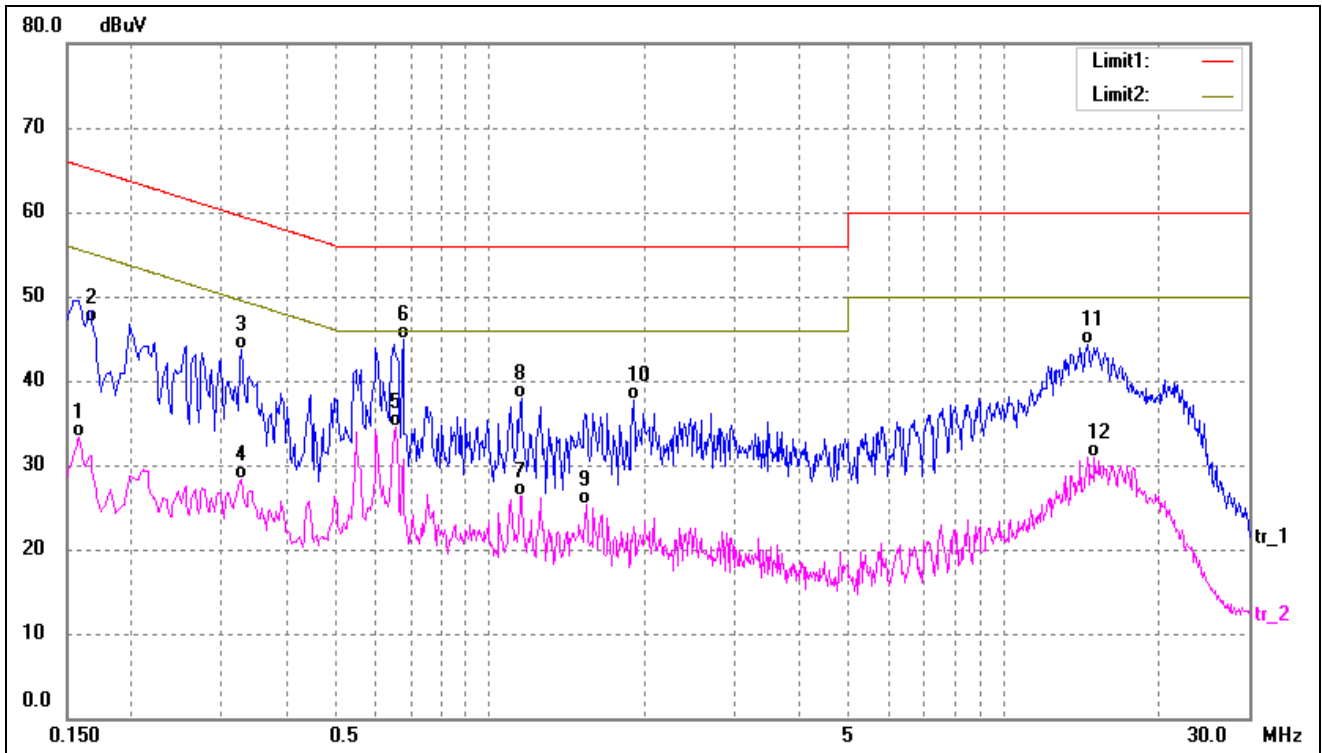

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1580	22.86	10.37	33.23	55.57	-22.34	AVG
2	0.1677	36.55	10.37	46.92	65.07	-18.15	QP
3	0.3260	33.40	10.33	43.73	59.55	-15.82	QP
4	0.3260	18.00	10.33	28.33	49.55	-21.22	AVG
5	0.6540	24.12	10.35	34.47	46.00	-11.53	AVG
6*	0.6780	34.56	10.37	44.93	56.00	-11.07	QP
7	1.1460	15.89	10.50	26.39	46.00	-19.61	AVG
8	1.1500	27.45	10.50	37.95	56.00	-18.05	QP
9	1.5380	15.01	10.32	25.33	46.00	-20.67	AVG
10	1.8980	27.47	10.17	37.64	56.00	-18.36	QP
11	14.5260	34.24	10.12	44.36	60.00	-15.64	QP
12	15.0220	20.73	10.15	30.88	50.00	-19.12	AVG

4. RADIATED EMISSION


4.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.109 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

4.2 Block Diagram of Test Setup

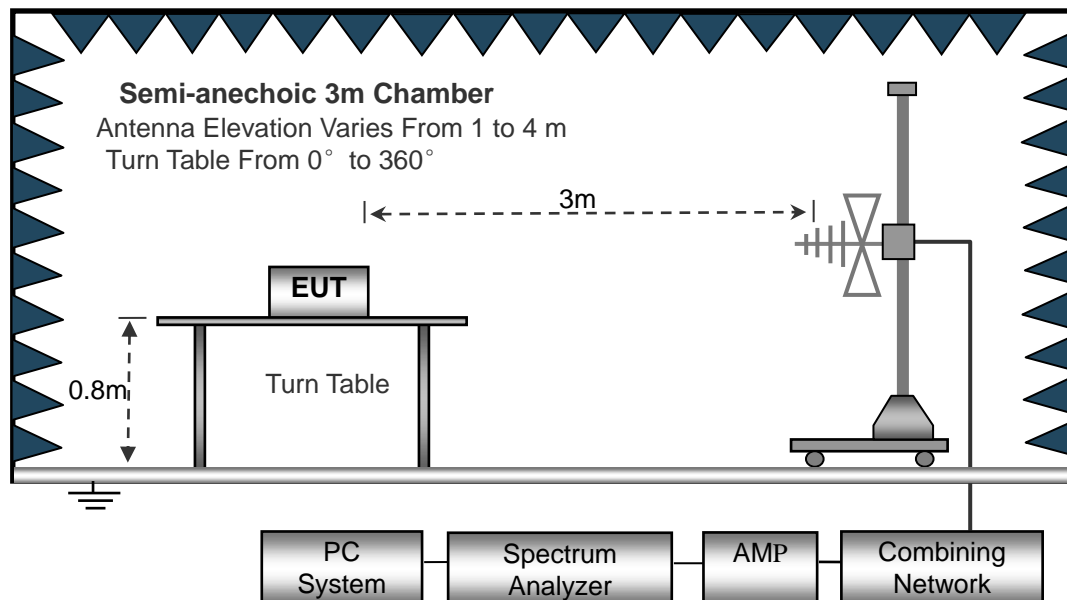

4.3 Test Receiver Setup

Frequency :9kHz-30MHz
 RBW=10KHz,
 VBW =30KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak

Frequency :30MHz-1GHz
 RBW=120KHz,
 VBW=300KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, QP

Frequency :Above 1GHz
 RBW=1MHz,
 VBW=3MHz(Peak), 10Hz(AV)
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, AV

4.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Correct}$$

$$\text{Correct} = \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for a Class B device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15.109(a) Limit}$$

4.5 Environmental Conditions


Temperature:	22.5 °C
Relative Humidity:	54 %
ATM Pressure:	1011 mbar

4.6 Summary of Test Results

Please find the results below:


Below 1GHz

Test mode:	TM1	Polarity:	Horizontal
------------	-----	-----------	------------

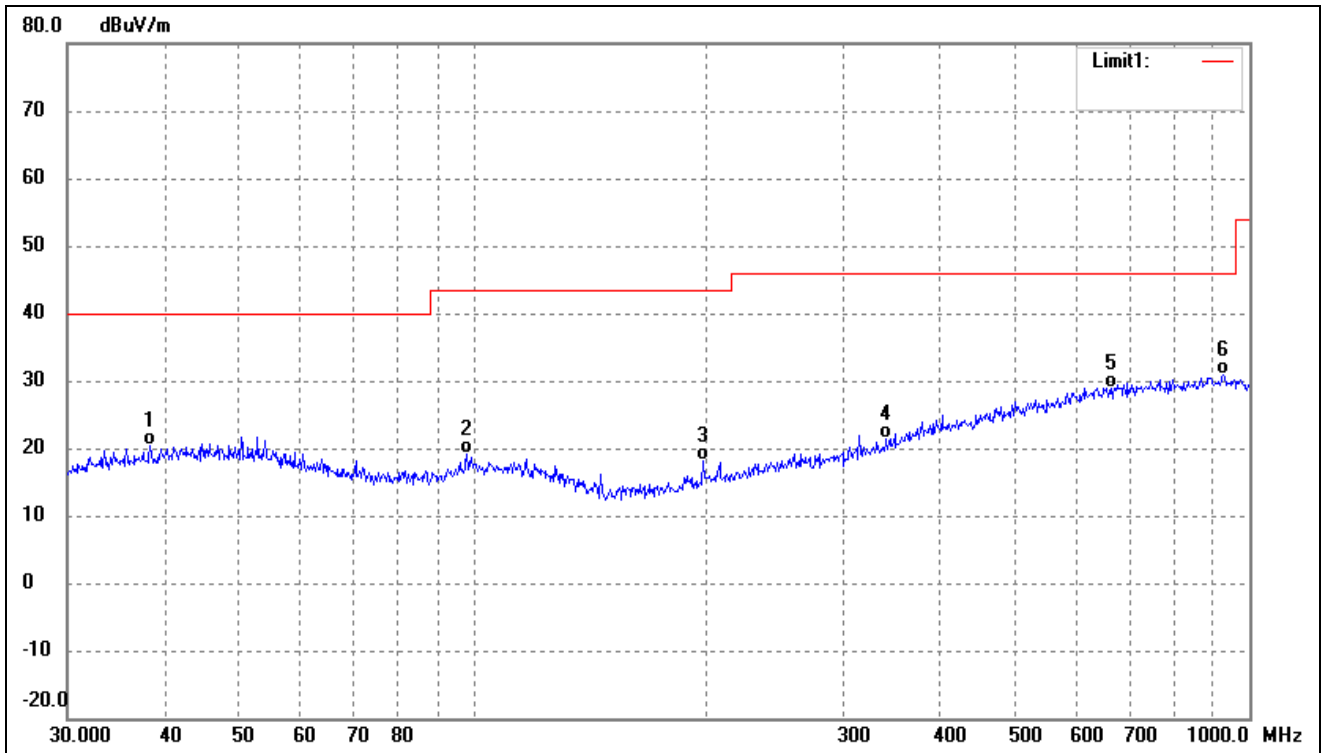


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	38.3462	27.67	-7.40	20.27	40.00	-19.73	-	-	QP
2	98.1419	28.14	-9.07	19.07	43.50	-24.43	-	-	QP
3	197.8928	27.94	-9.76	18.18	43.50	-25.32	-	-	QP
4	340.7817	27.14	-5.69	21.45	46.00	-24.55	-	-	QP
5	663.4729	27.91	1.06	28.97	46.00	-17.03	-	-	QP
6	925.7563	28.18	2.66	30.84	46.00	-15.16	-	-	QP

Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

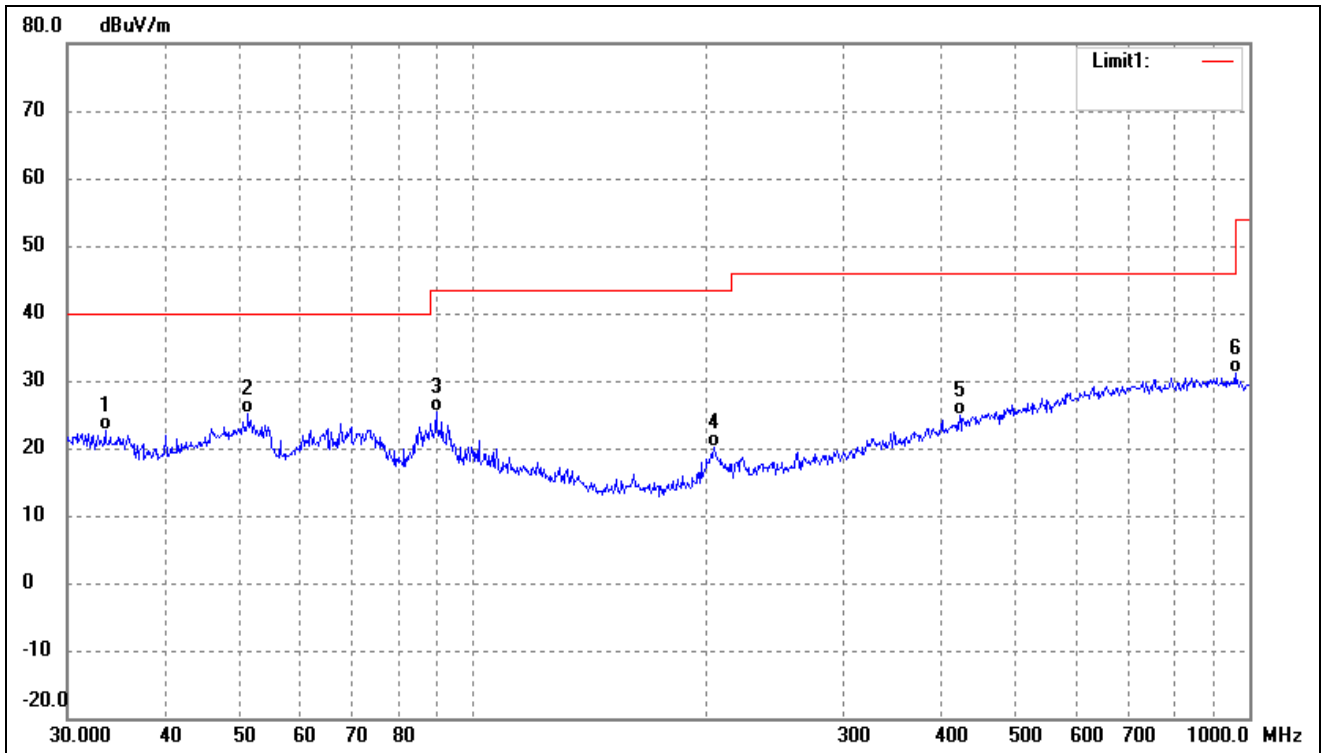


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	33.5623	31.19	-8.58	22.61	40.00	-17.39	-	-	QP
2	51.3004	32.34	-7.15	25.19	40.00	-14.81	-	-	QP
3	89.5900	35.92	-10.59	25.33	43.50	-18.17	-	-	QP
4	204.2376	29.61	-9.58	20.03	43.50	-23.47	-	-	QP
5	423.5403	28.23	-3.27	24.96	46.00	-21.04	-	-	QP
6	958.7943	28.68	2.55	31.23	46.00	-14.77	-	-	QP

Test mode:	TM2	Polarity:	Horizontal
------------	-----	-----------	------------

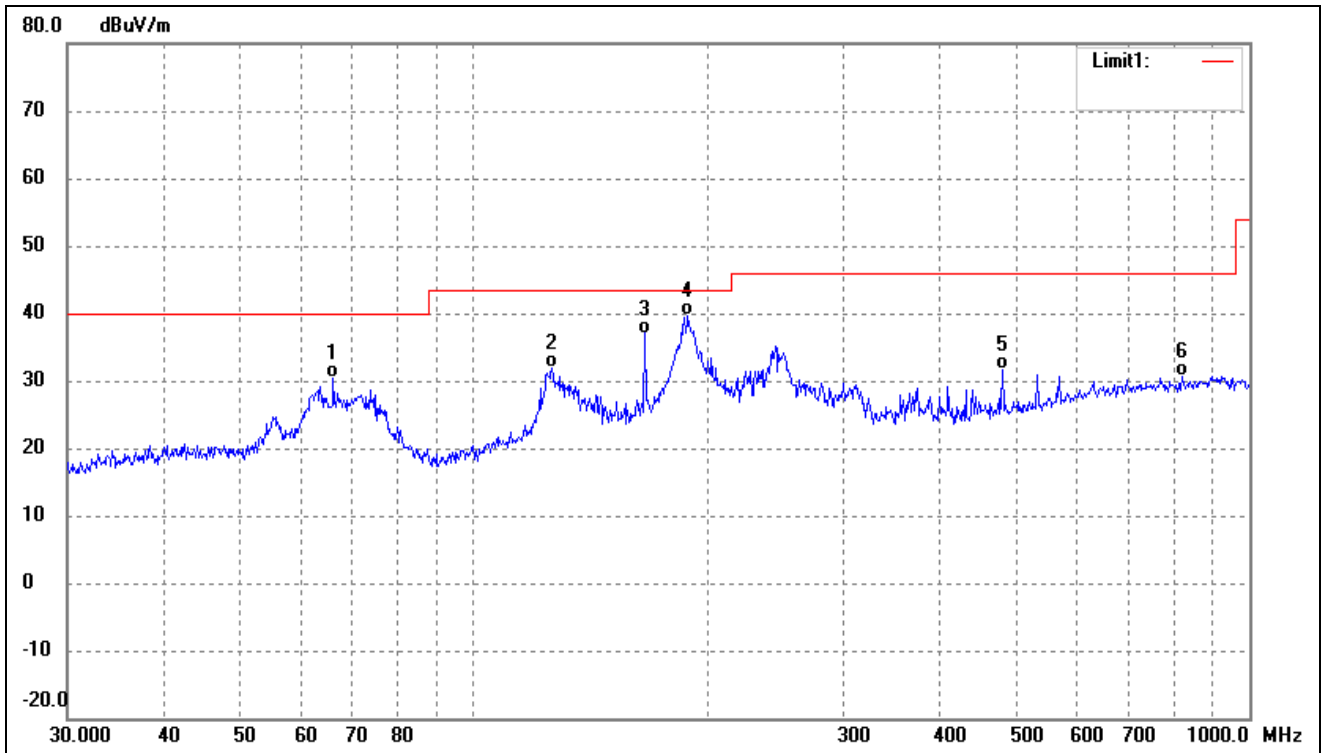


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	66.0342	39.84	-9.49	30.35	40.00	-9.65	-	-	QP
2	126.3286	42.63	-10.76	31.87	43.50	-11.63	-	-	QP
3	166.0680	48.90	-11.90	37.00	43.50	-6.50	-	-	QP
4	189.0743	49.66	-10.15	39.51	43.50	-3.99	-	-	QP
5	480.5276	33.42	-1.79	31.63	46.00	-14.37	-	-	QP
6	818.8341	28.53	2.20	30.73	46.00	-15.27	-	-	QP

Test mode:	TM2	Polarity:	Vertical
------------	-----	-----------	----------

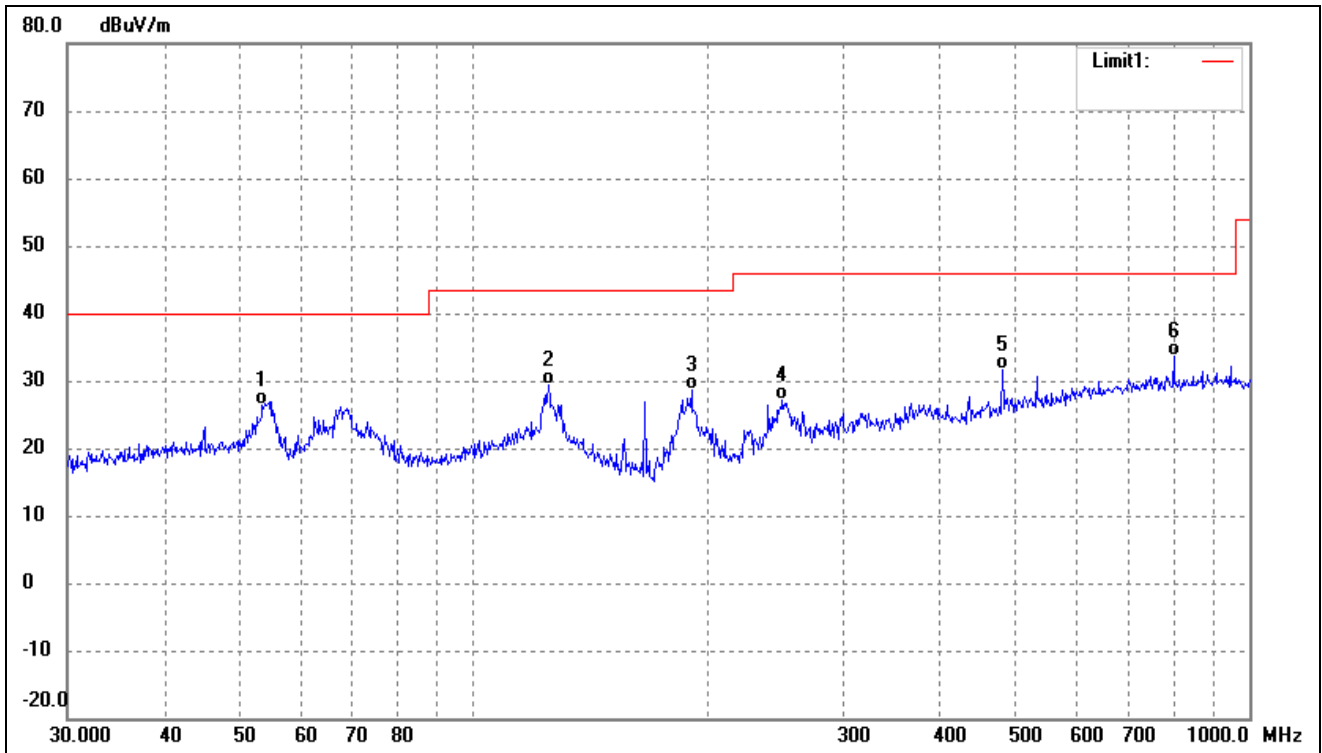


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	53.5052	33.91	-7.47	26.44	40.00	-13.56	-	-	QP
2	125.0066	39.85	-10.51	29.34	43.50	-14.16	-	-	QP
3	191.0738	38.60	-10.01	28.59	43.50	-14.91	-	-	QP
4	250.3012	35.43	-8.31	27.12	46.00	-18.88	-	-	QP
5	480.5276	33.50	-1.79	31.71	46.00	-14.29	-	-	QP
6	798.9797	31.61	2.09	33.70	46.00	-12.30	-	-	QP

Test mode:	TM3	Polarity:	Horizontal
------------	-----	-----------	------------

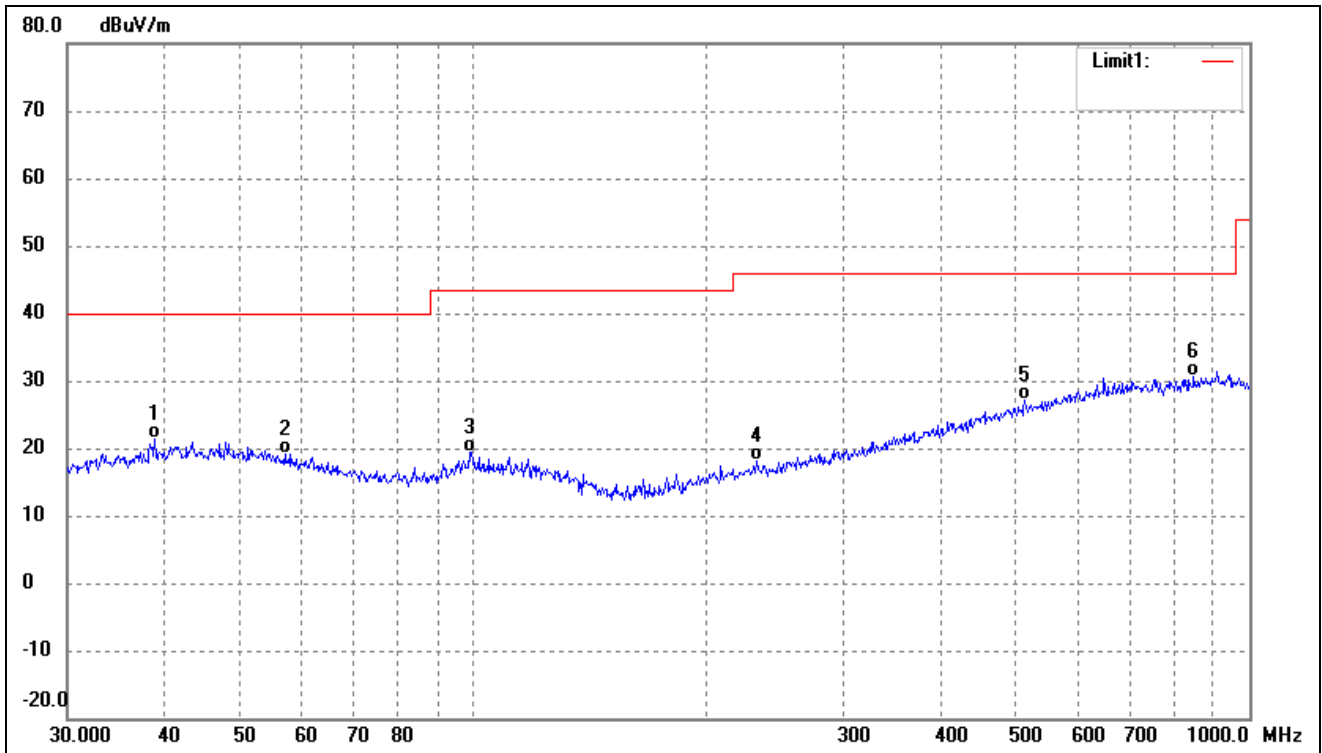


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	38.8878	28.59	-7.27	21.32	40.00	-18.68	-	-	QP
2	57.1914	27.04	-8.01	19.03	40.00	-20.97	-	-	QP
3	98.8326	28.44	-8.94	19.50	43.50	-24.00	-	-	QP
4	231.7179	26.93	-8.83	18.10	46.00	-27.90	-	-	QP
5	513.6331	28.30	-1.07	27.23	46.00	-18.77	-	-	QP
6	848.0563	28.39	2.36	30.75	46.00	-15.25	-	-	QP

Test mode:	TM3	Polarity:	Vertical
------------	-----	-----------	----------

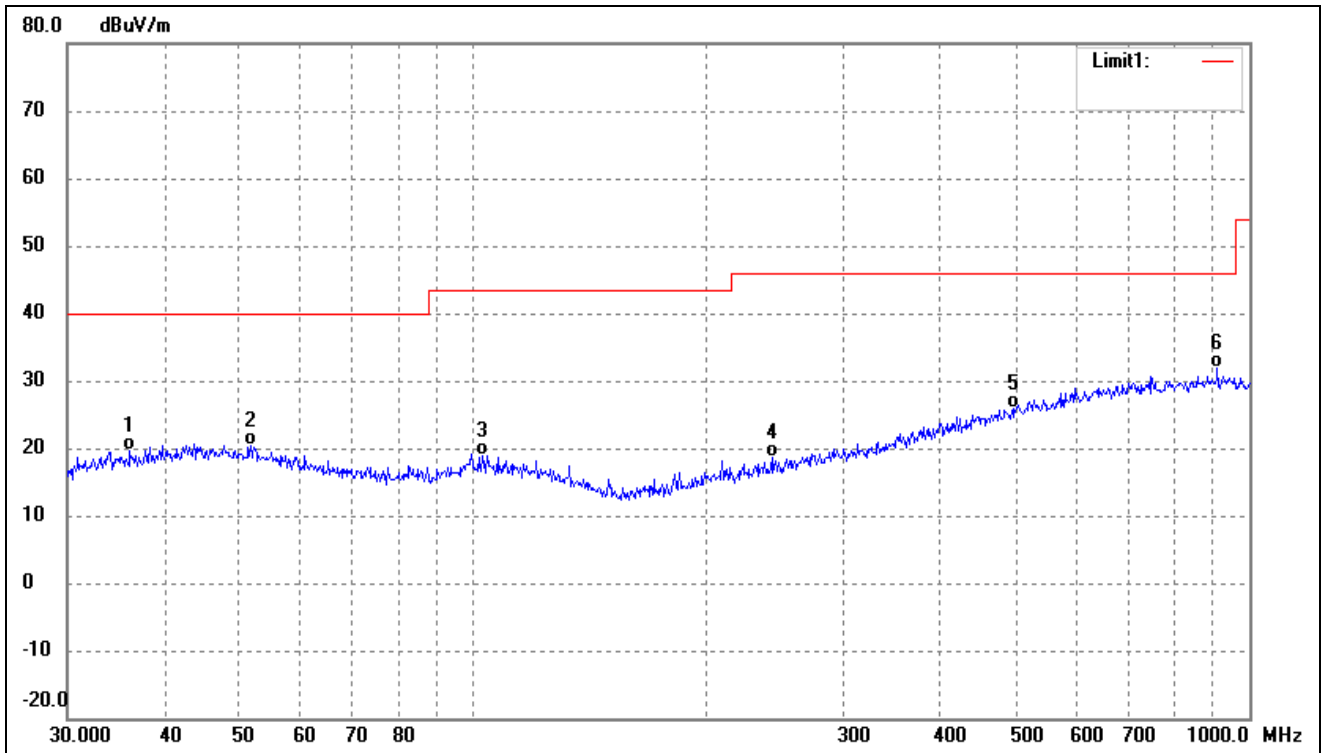


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	36.1272	27.68	-7.95	19.73	40.00	-20.27	-	-	QP
2	51.6616	27.49	-7.20	20.29	40.00	-19.71	-	-	QP
3	102.7192	27.61	-8.77	18.84	43.50	-24.66	-	-	QP
4	242.5253	27.17	-8.53	18.64	46.00	-27.36	-	-	QP
5	497.6765	27.19	-1.35	25.84	46.00	-20.16	-	-	QP
6	909.6667	29.08	2.72	31.80	46.00	-14.20	-	-	QP

Test mode:	TM4	Polarity:	Horizontal
------------	-----	-----------	------------

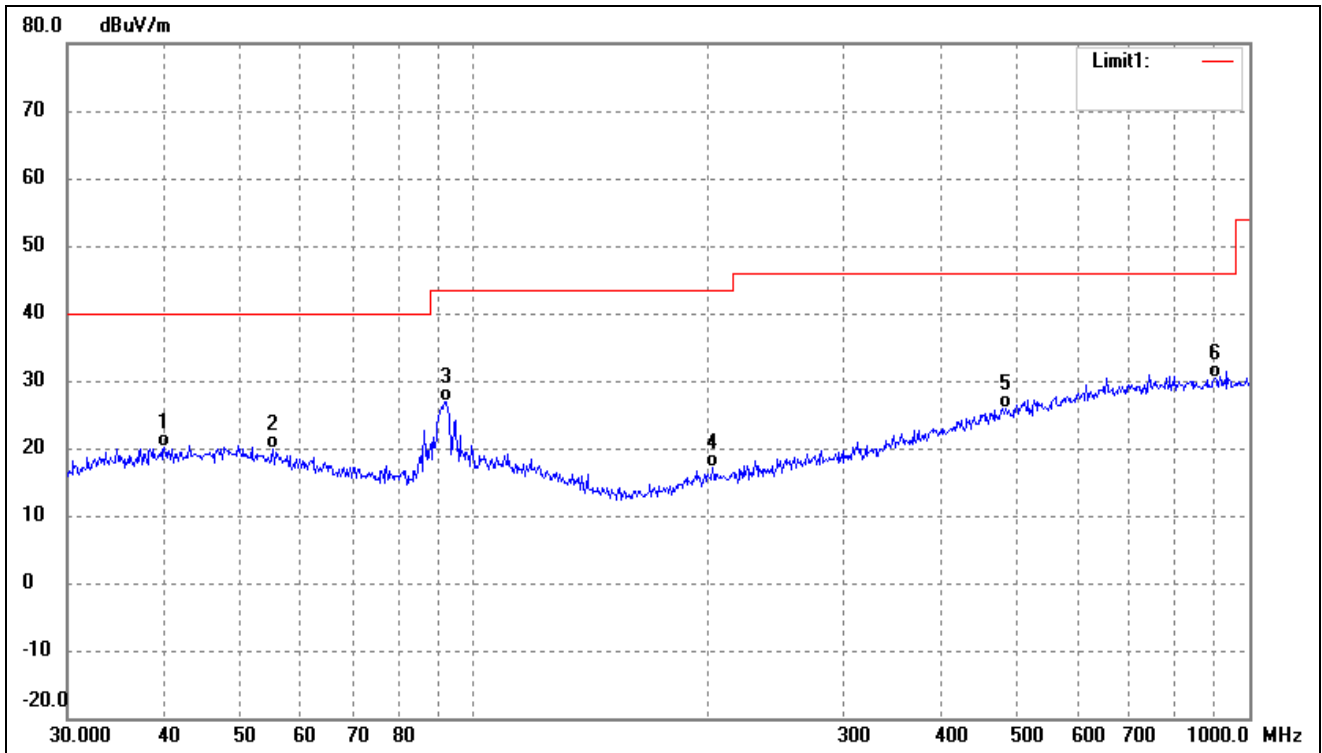


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	39.9942	27.15	-7.00	20.15	40.00	-19.85	-	-	QP
2	55.2207	27.68	-7.73	19.95	40.00	-20.05	-	-	QP
3	92.4624	37.11	-10.13	26.98	43.50	-16.52	-	-	QP
4	203.5228	26.85	-9.61	17.24	43.50	-26.26	-	-	QP
5	485.6093	27.51	-1.67	25.84	46.00	-20.16	-	-	QP
6	903.3094	27.61	2.74	30.35	46.00	-15.65	-	-	QP

Test mode:	TM4	Polarity:	Vertical
------------	-----	-----------	----------

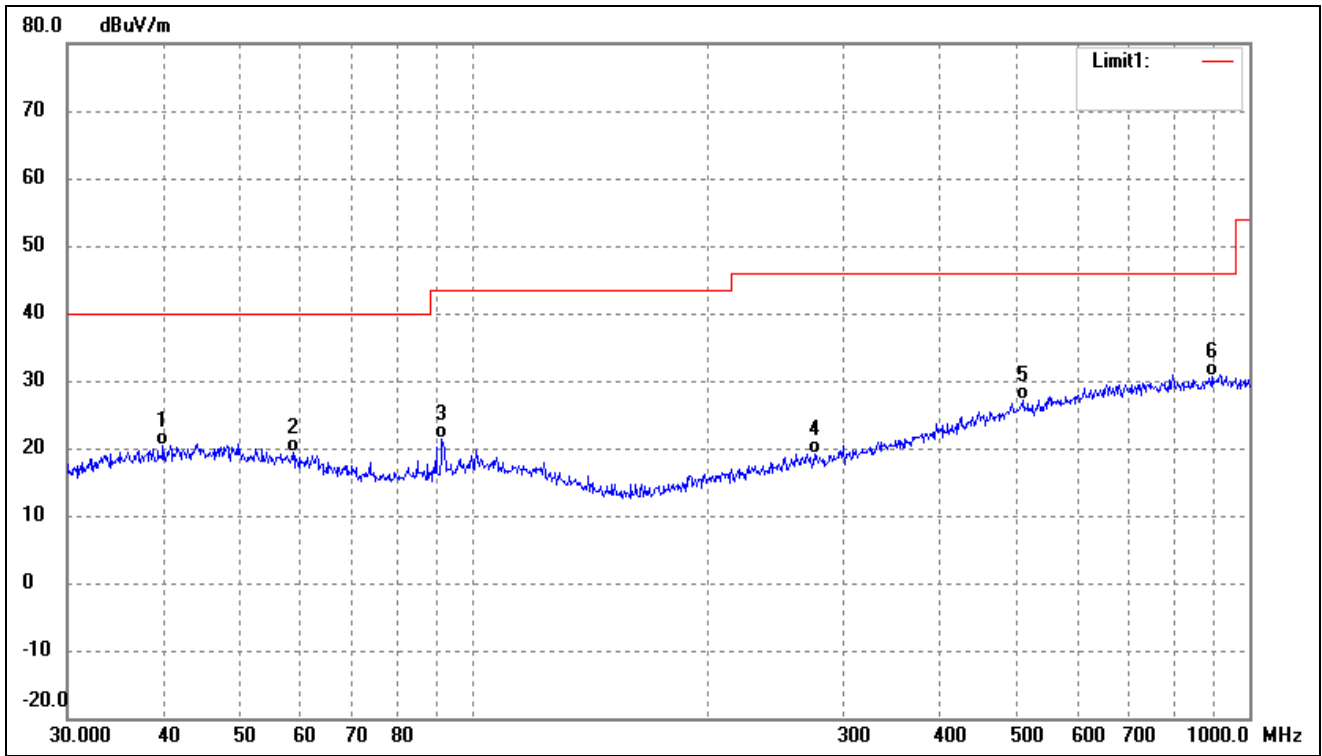


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	39.8542	27.44	-7.03	20.41	40.00	-19.59	-	-	QP
2	58.6126	27.58	-8.22	19.36	40.00	-20.64	-	-	QP
3	91.1746	31.77	-10.36	21.41	43.50	-22.09	-	-	QP
4	275.1570	26.85	-7.63	19.22	46.00	-26.78	-	-	QP
5	511.8352	28.15	-1.11	27.04	46.00	-18.96	-	-	QP
6	893.8567	27.98	2.70	30.68	46.00	-15.32	-	-	QP

Test mode:	TM5	Polarity:	Horizontal
------------	-----	-----------	------------

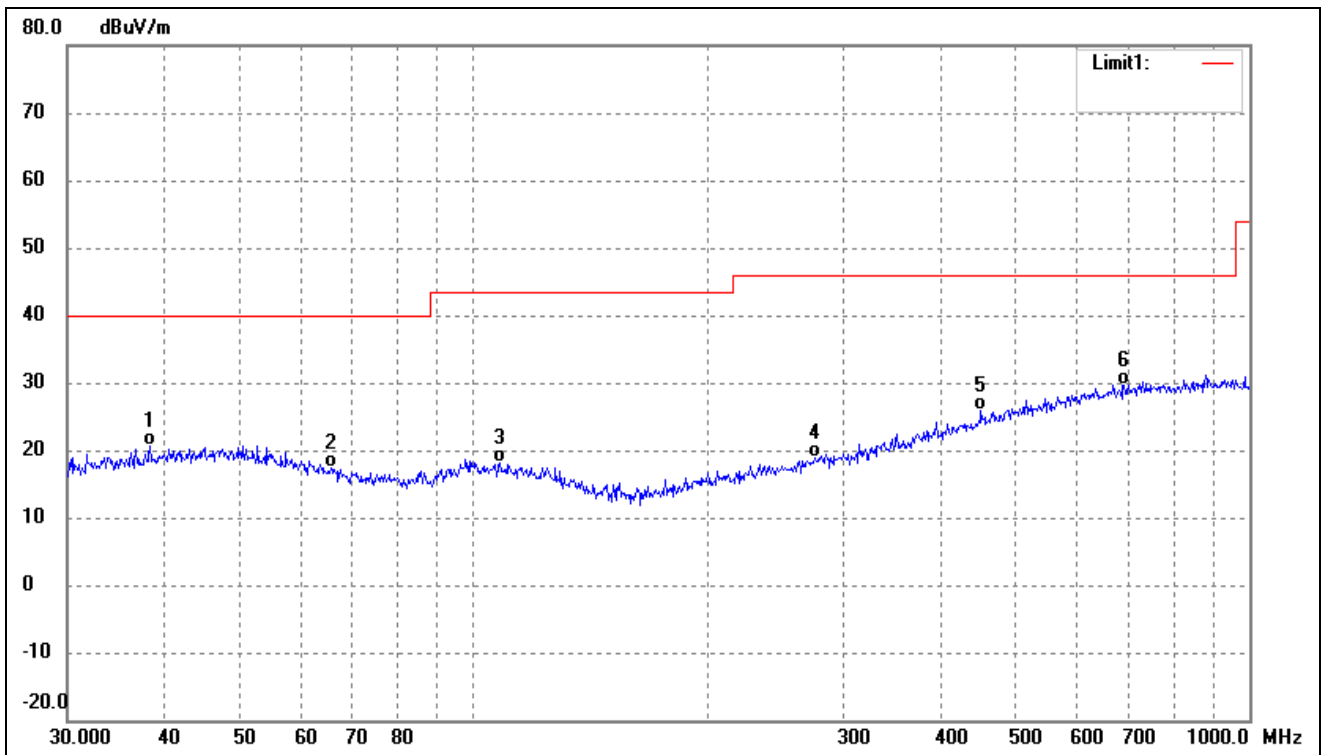

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	38.3462	27.99	-7.40	20.59	40.00	-19.41	-	-	QP
2	65.5727	26.77	-9.40	17.37	40.00	-22.63	-	-	QP
3	108.2667	26.86	-8.85	18.01	43.50	-25.49	-	-	QP
4	276.1236	26.42	-7.59	18.83	46.00	-27.17	-	-	QP
5	451.1350	28.43	-2.53	25.90	46.00	-20.10	-	-	QP
6	689.5644	28.26	1.33	29.59	46.00	-16.41	-	-	QP


Test mode:	TM5	Polarity:	Vertical
------------	-----	-----------	----------

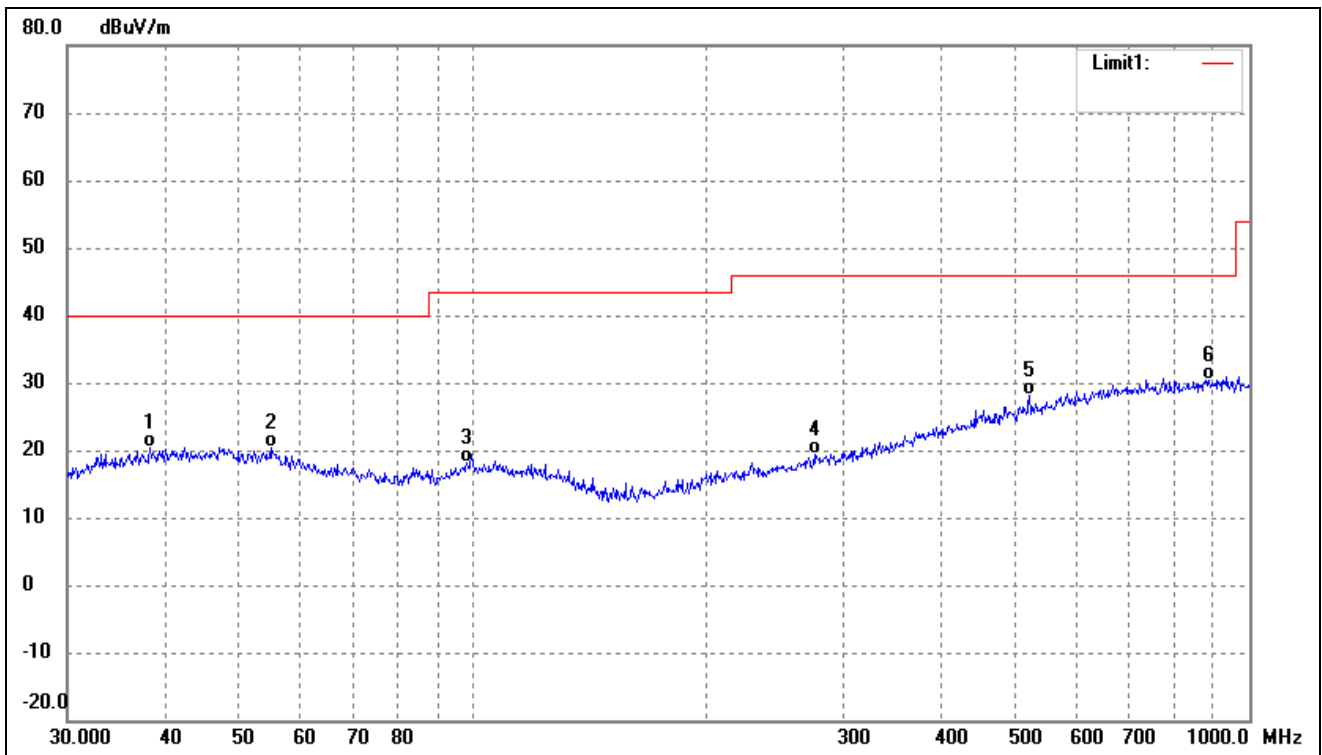

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	38.3462	27.73	-7.40	20.33	40.00	-19.67	-	-	QP
2	54.8348	28.04	-7.67	20.37	40.00	-19.63	-	-	QP
3	98.1419	27.32	-9.07	18.25	43.50	-25.25	-	-	QP
4	275.1570	26.98	-7.63	19.35	46.00	-26.65	-	-	QP
5	520.8882	28.98	-0.94	28.04	46.00	-17.96	-	-	QP
6	887.6099	27.83	2.66	30.49	46.00	-15.51	-	-	QP


Above 1GHz

Test mode:	TM1(worst case)	Polarity:	Horizontal
------------	-----------------	-----------	------------

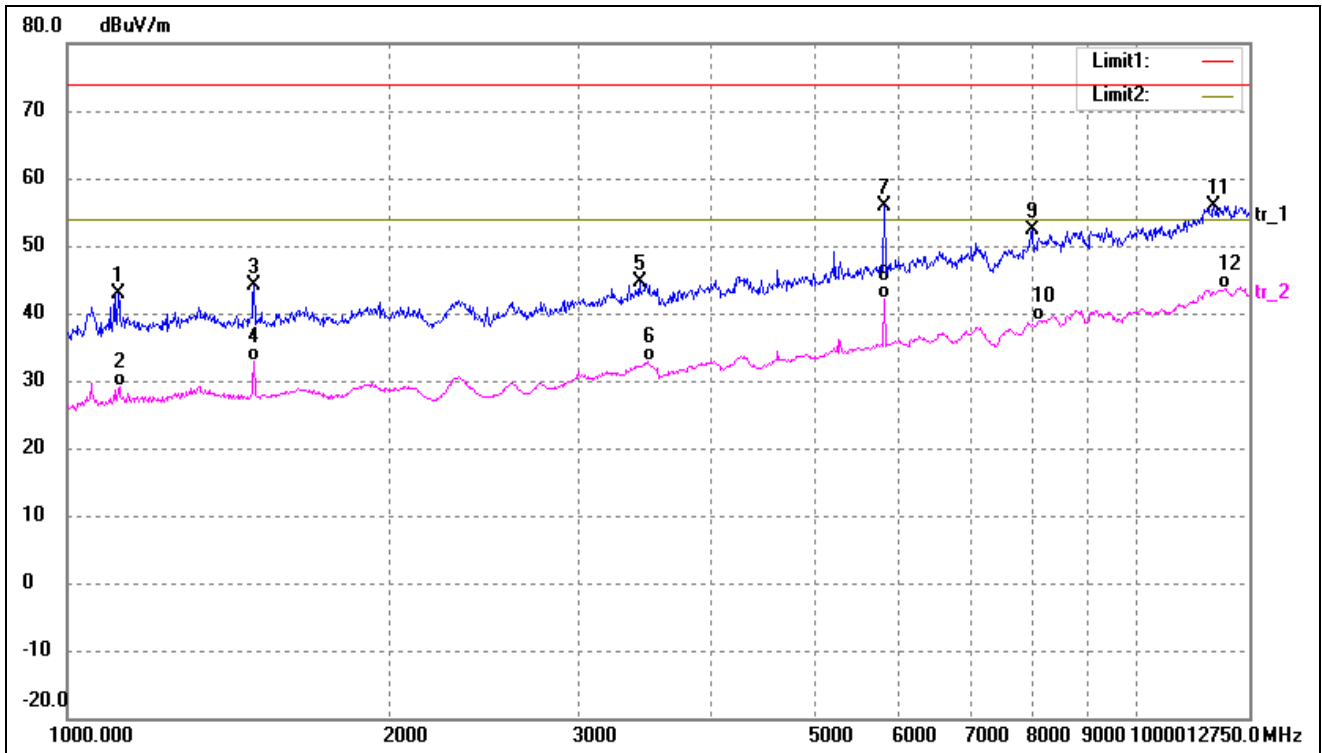

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	1115.673	57.58	-14.61	42.97	74.00	-31.03	-	-	peak
2	1118.517	43.64	-14.59	29.05	54.00	-24.95	-	-	AVG
3	1495.101	56.77	-12.69	44.08	74.00	-29.92	-	-	peak
4	1495.101	45.61	-12.69	32.92	54.00	-21.08	-	-	AVG
5	3428.206	52.98	-8.46	44.52	74.00	-29.48	-	-	peak
6	3489.840	41.25	-8.36	32.89	54.00	-21.11	-	-	AVG
7	5806.408	59.82	-4.03	55.79	74.00	-18.21	-	-	peak
8	5806.408	46.23	-4.03	42.20	54.00	-11.80	-	-	AVG
9	7981.717	52.80	-0.33	52.47	74.00	-21.53	-	-	peak
10	8125.215	39.00	-0.06	38.94	54.00	-15.06	-	-	AVG
11	11812.583	50.10	5.66	55.76	74.00	-18.24	-	-	peak
12	12086.331	37.53	6.15	43.68	54.00	-10.32	-	-	AVG

Test mode:	TM1(worst case)	Polarity:	Vertical
------------	-----------------	-----------	----------

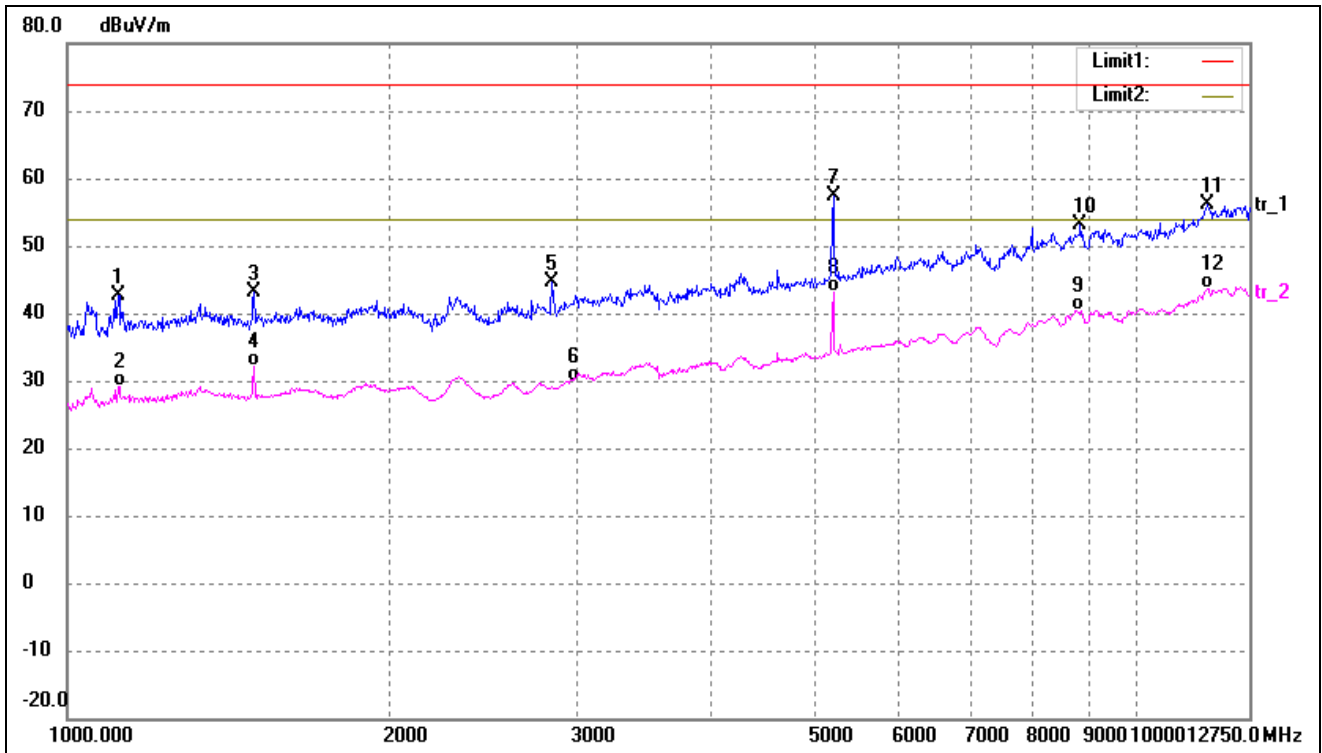

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	1115.673	57.20	-14.61	42.59	74.00	-31.41	-	-	peak
2	1118.517	43.76	-14.59	29.17	54.00	-24.83	-	-	AVG
3	1495.101	55.78	-12.69	43.09	74.00	-30.91	-	-	peak
4	1495.101	44.84	-12.69	32.15	54.00	-21.85	-	-	AVG
5	2839.613	54.24	-9.59	44.65	74.00	-29.35	-	-	peak
6	2950.135	39.19	-9.28	29.91	54.00	-24.09	-	-	AVG
7	5204.399	62.68	-5.23	57.45	74.00	-16.55	-	-	peak
8	5204.399	48.47	-5.23	43.24	54.00	-10.76	-	-	AVG
9	8792.365	39.34	1.15	40.49	54.00	-13.51	-	-	AVG
10	8859.765	51.91	1.27	53.18	74.00	-20.82	-	-	peak
11	11663.189	50.72	5.34	56.06	74.00	-17.94	-	-	peak
12	11663.189	38.26	5.34	43.60	54.00	-10.40	-	-	AVG

Remark: ‘-’Means’ the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

***** END OF REPORT *****