


SAR Peak: 0.02 W/kg

SAR 10g (W/Kg)	0.006743
SAR 1g (W/Kg)	0.011855

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0208	0.0127	0.0069	0.0041	0.0030

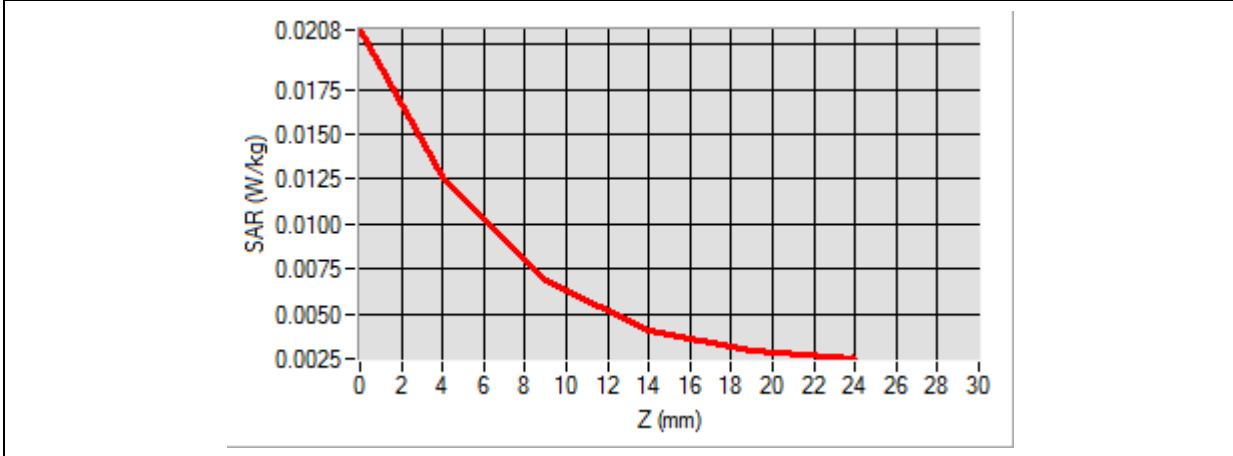

3D screen shot	Hot spot position
<p>A 3D perspective view of a device's internal structure. A grid of blue dots is overlaid on the device, with a localized area of high SAR (hot spot) highlighted in green and red colors.</p>	<p>A small 3D visualization of the hot spot position, showing a localized area of high SAR (hot spot) in green and red colors.</p>

MEASUREMENT 22


Type: Phone measurement (Complete)
 Date of measurement: 2022-01-11
 Measurement duration: 12 minutes 3 seconds

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	NR n71
Channels	DFT-s-OFDM PI/2 BPSK, 20MHz, 1RB,High
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	688.000000
Relative Permittivity (real part)	41.314129
Conductivity (S/m)	0.853301
Power Variation (%)	-0.500541
Ambient Temperature	21.1
Liquid Temperature	21.2

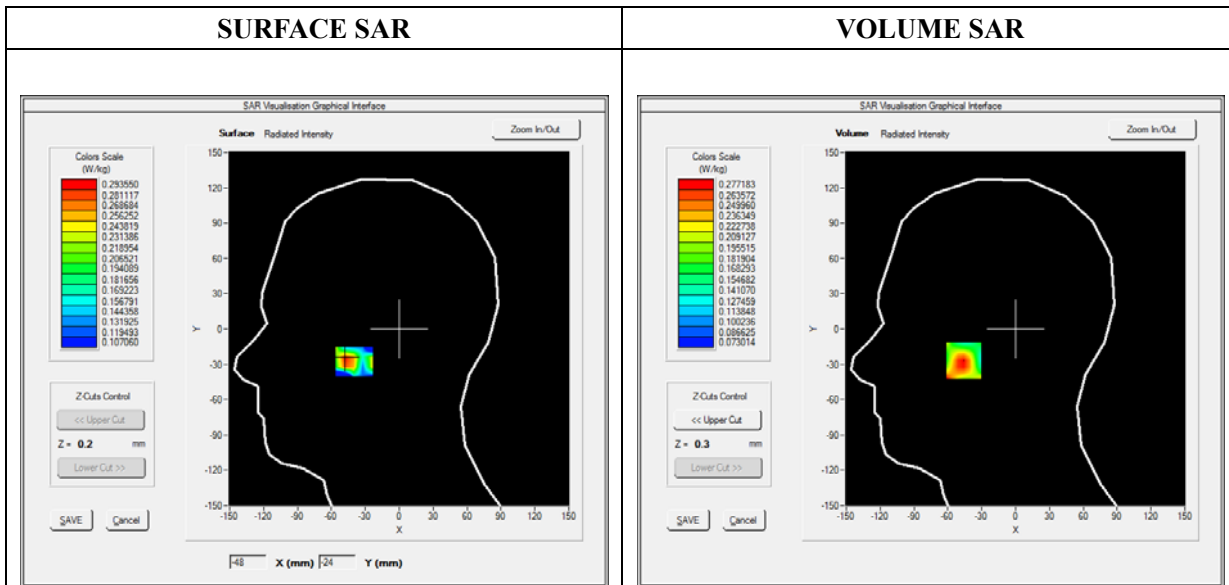


Maximum location: X=-46.00, Y=-27.00

SAR Peak: 0.46 W/kg

SAR 10g (W/Kg)	0.190464
SAR 1g (W/Kg)	0.278574

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.4492	0.2772	0.1560	0.1034	0.0888

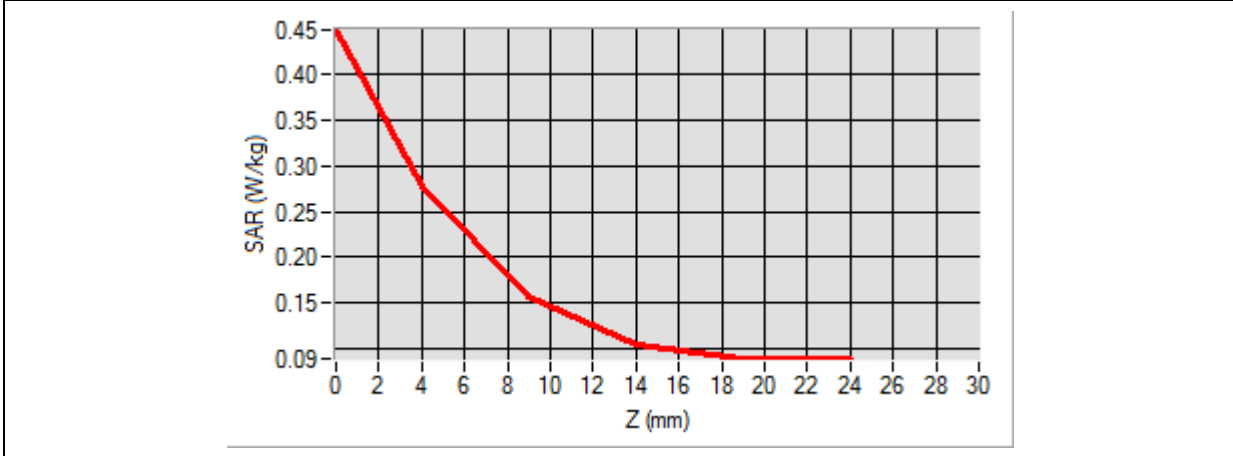

3D screen shot	Hot spot position

MEASUREMENT 23

Type: Phone measurement (Complete)

Date of measurement: 2021-12-18

Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	WiFi(5.2GHz)_802.11a
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5240.000000
Relative Permittivity (real part)	35.642911
Conductivity (S/m)	4.761483
Power Variation (%)	1.542660
Ambient Temperature	22.0
Liquid Temperature	22.3

C. SAR Surface and Volume

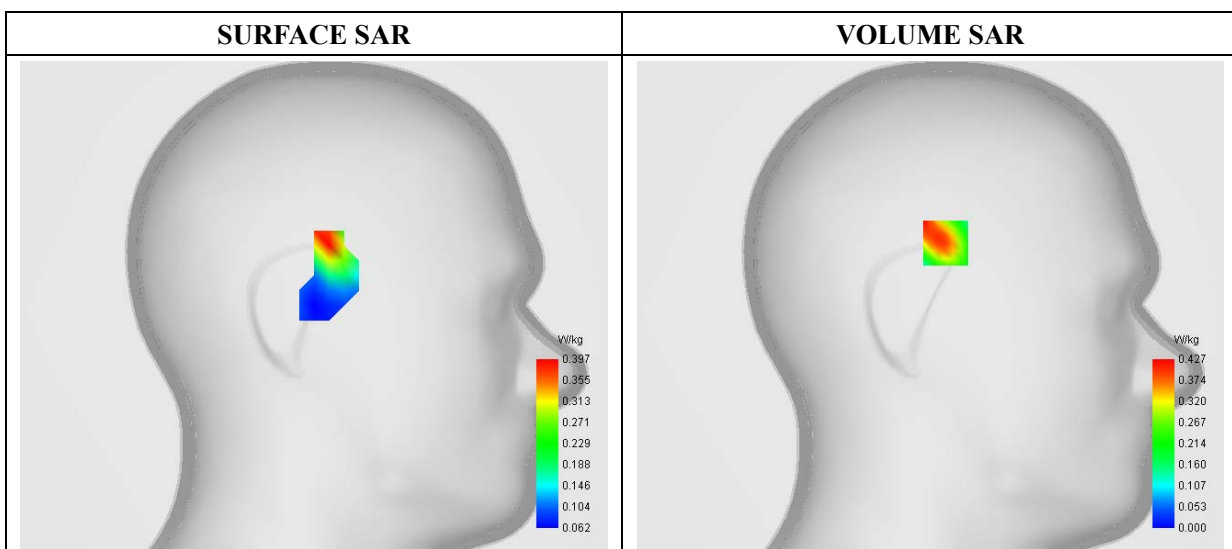


Maximum location: X=-8.00, Y=33.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.217520
SAR 1g (W/Kg)	0.407491

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.7587	0.4272	0.1661	0.2042	0.1269	0.1184	0.1034	0.0916	0.0836

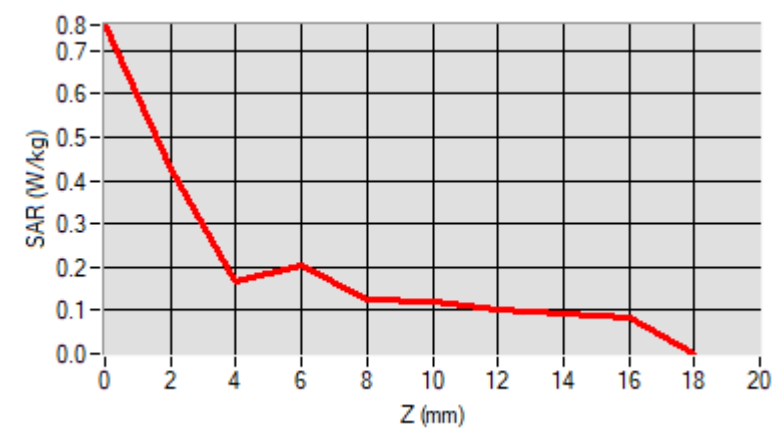

F. 3D Image

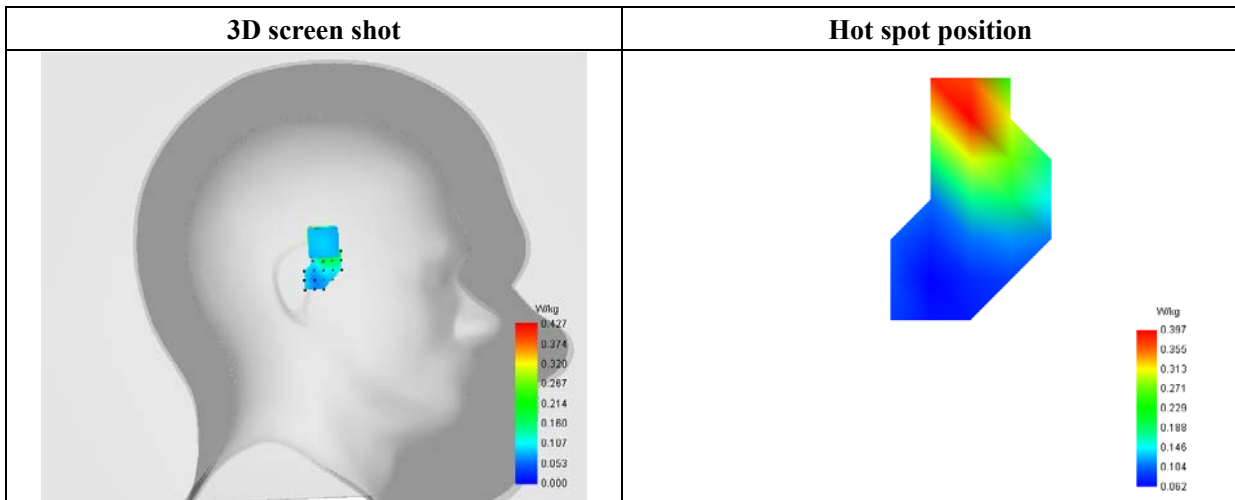

MEASUREMENT 24

Type: Phone measurement (Complete)

Date of measurement: 2021-12-18

Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	WiFi(5.3GHz)_802.11a
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5320.000000
Relative Permittivity (real part)	35.604129
Conductivity (S/m)	4.812694
Power Variation (%)	2.545421
Ambient Temperature	22.0
Liquid Temperature	22.3

C. SAR Surface and Volume

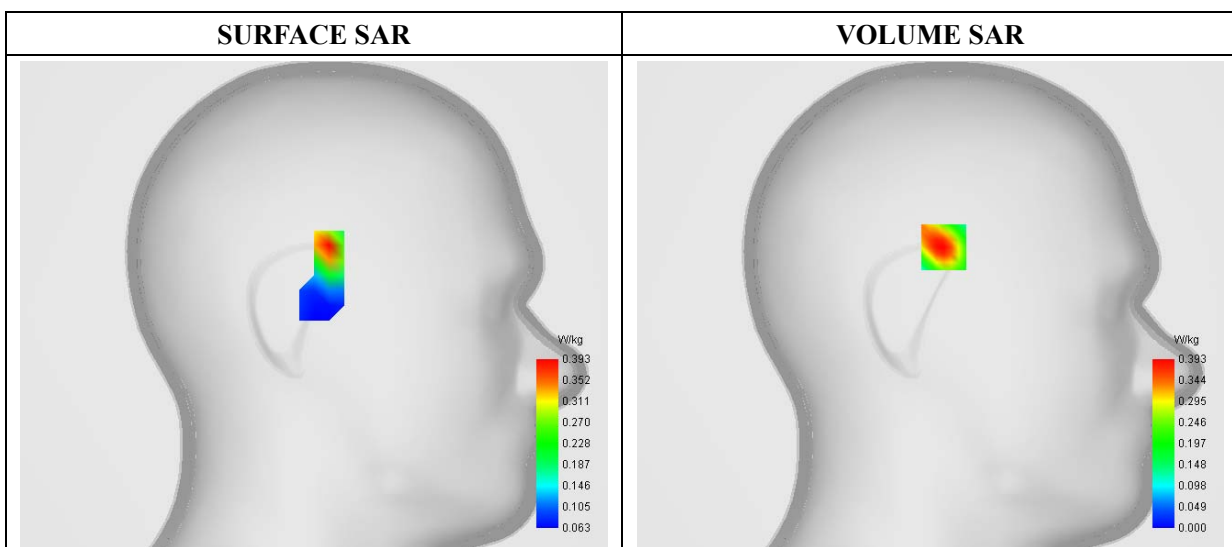


Maximum location: X=-7.00, Y=31.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.187472
SAR 1g (W/Kg)	0.373602

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	0.5631	0.3934	0.2760	0.1966	0.1462	0.1149	0.0958	0.0844	0.0678	0.0678

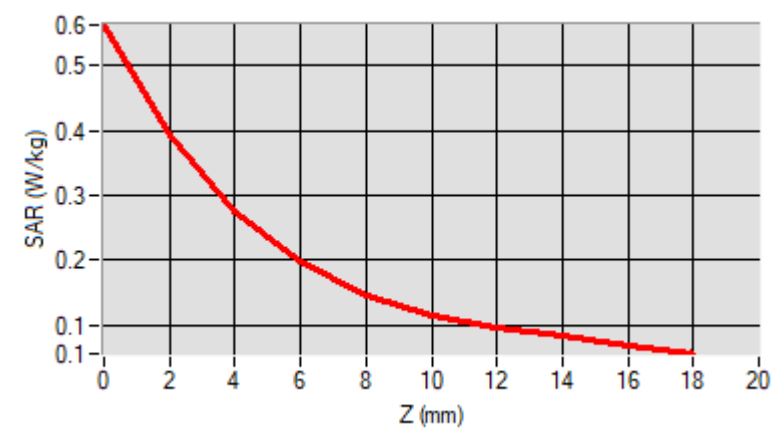

F. 3D Image

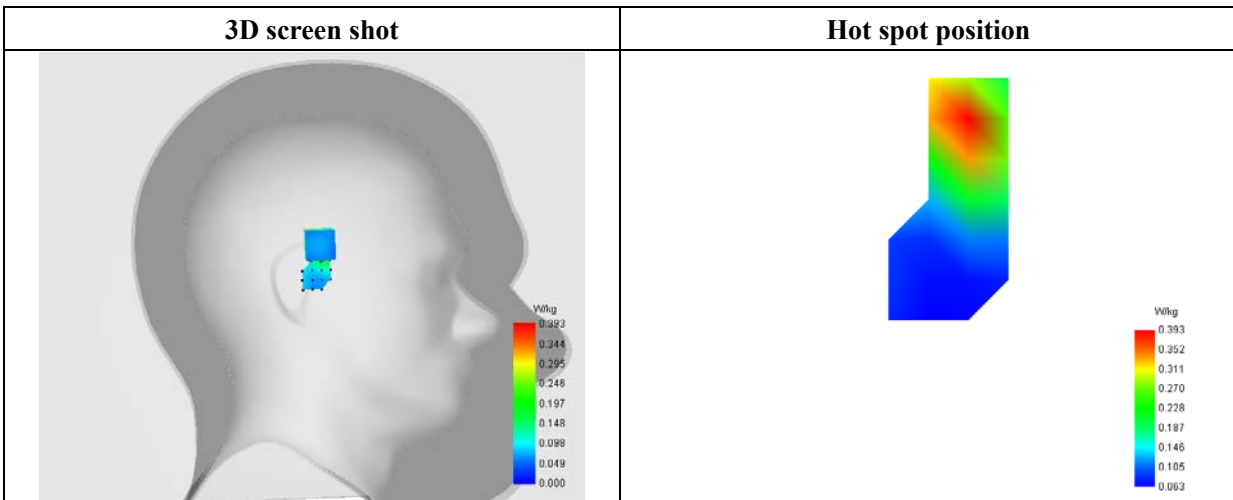

MEASUREMENT 25

Type: Phone measurement (Complete)

Date of measurement: 2021-12-18

Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	WiFi(5.6GHz)_802.11a
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5500.000000
Relative Permittivity (real part)	35.612918
Conductivity (S/m)	5.121523
Power Variation (%)	1.542510
Ambient Temperature	22.0
Liquid Temperature	22.3

C. SAR Surface and Volume

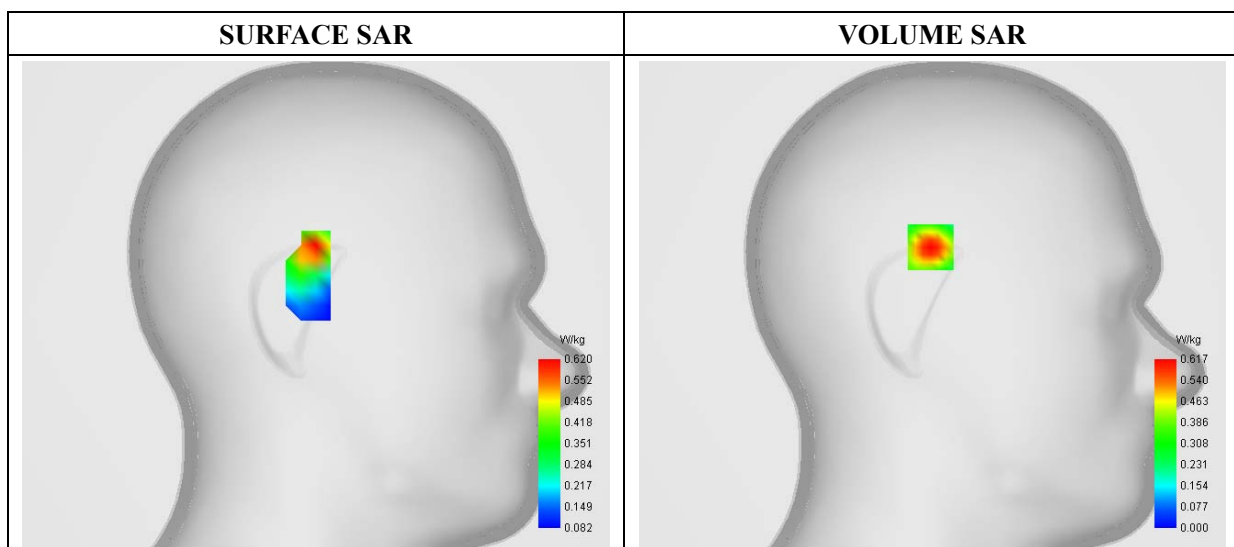


Maximum location: X=1.00, Y=31.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.281031
SAR 1g (W/Kg)	0.581400

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.8991	0.6170	0.4208	0.2895	0.2071	0.1561	0.1250	0.1061	0.0955

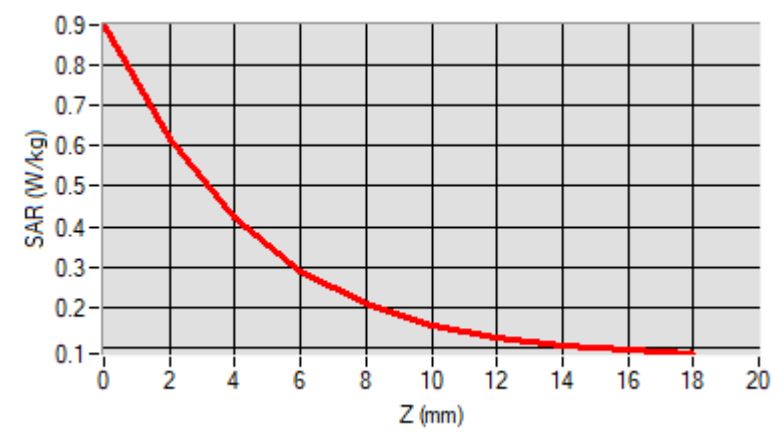

F. 3D Image

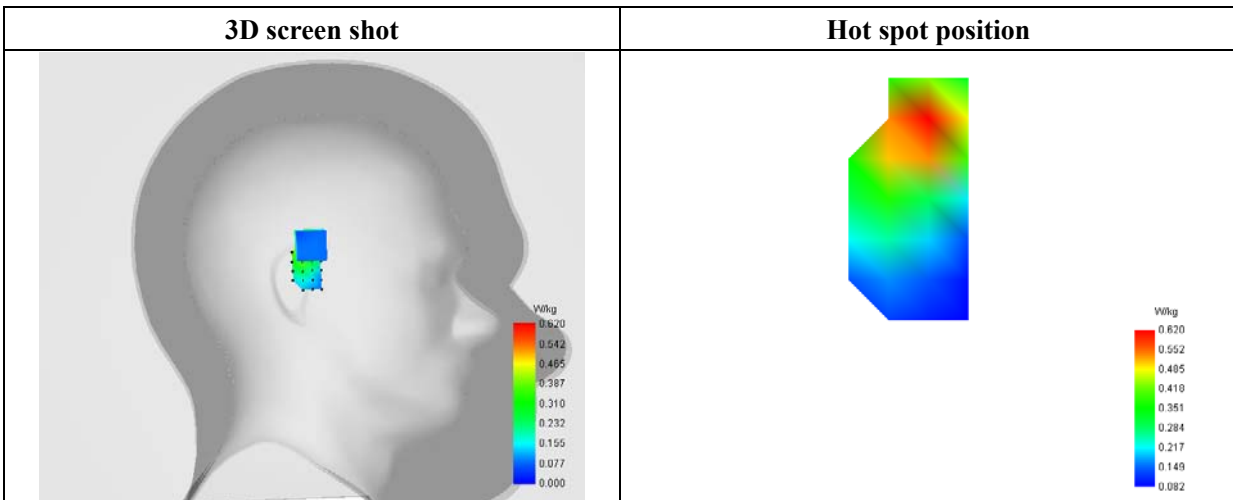

MEASUREMENT 26

Type: Phone measurement (Complete)

Date of measurement: 2021-12-18

Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left Head
Device Position	Cheek
Band	WiFi(5.8GHz)_ 802.11a
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5745.000000
Relative Permittivity (real part)	35.320841
Conductivity (S/m)	5.210854
Power Variation (%)	1.214512
Ambient Temperature	22.0
Liquid Temperature	22.3

C. SAR Surface and Volume

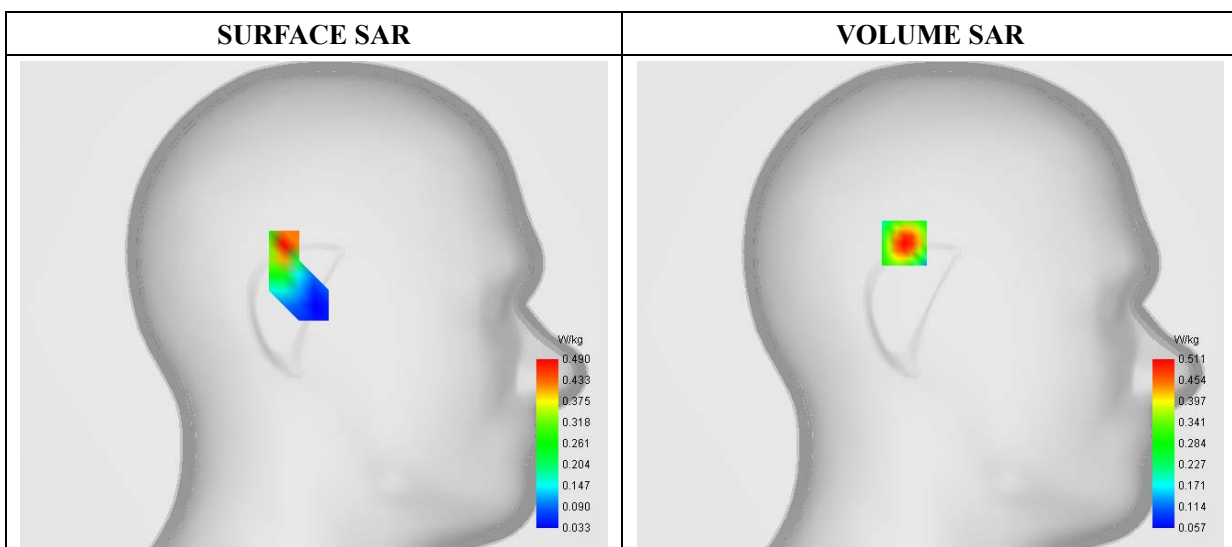


Maximum location: X=14.00, Y=33.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.235291
SAR 1g (W/Kg)	0.486061

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.7557	0.5108	0.3434	0.2331	0.1654	0.1247	0.1009	0.0874	0.0798

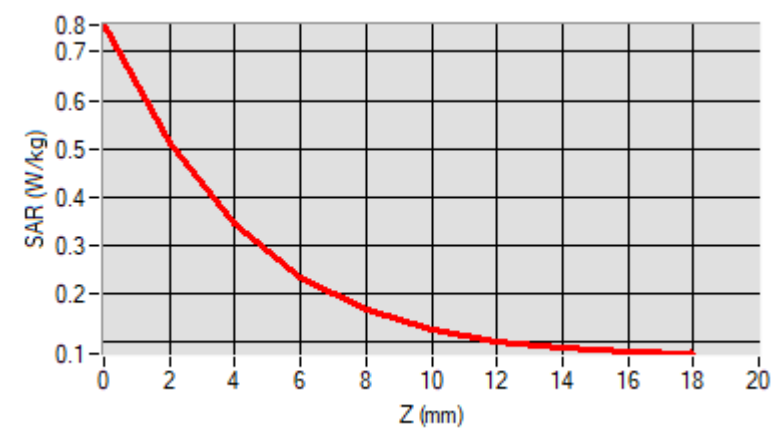

F. 3D Image

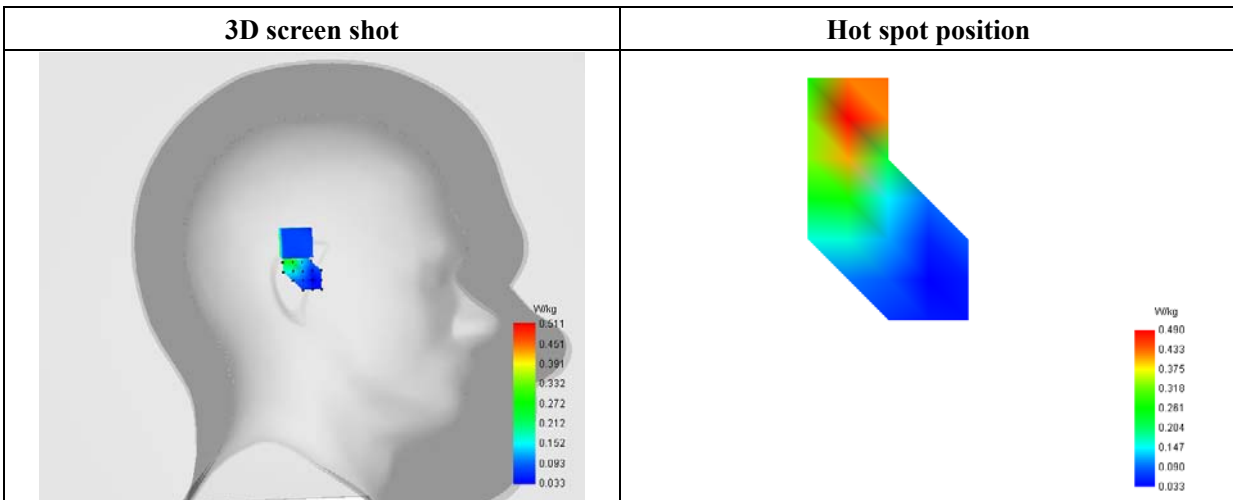

MEASUREMENT 27

Type: Phone measurement (Complete)

Date of measurement: 2021-12-22


Measurement duration: 12 minutes 3 seconds

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left Head
Device Position	Cheek
Band	WiFi(2.4GHz)_ 802.11b
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results


Frequency (MHz)	2437.000000
Relative Permittivity (real part)	38.201835
Conductivity (S/m)	1.734129
Power Variation (%)	1.101512
Ambient Temperature	22.0
Liquid Temperature	22.3

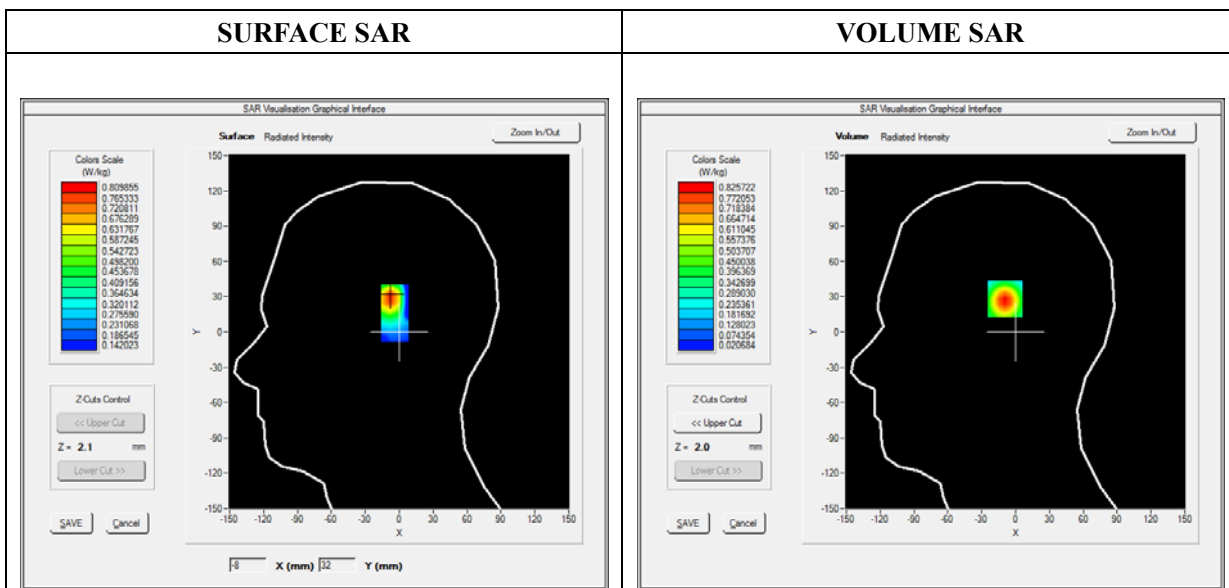

SAR Peak: 1.34 W/kg

SAR 10g (W/Kg)	0.387808
SAR 1g (W/Kg)	0.755325

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.3380	0.8257	0.4342	0.2260	0.1214

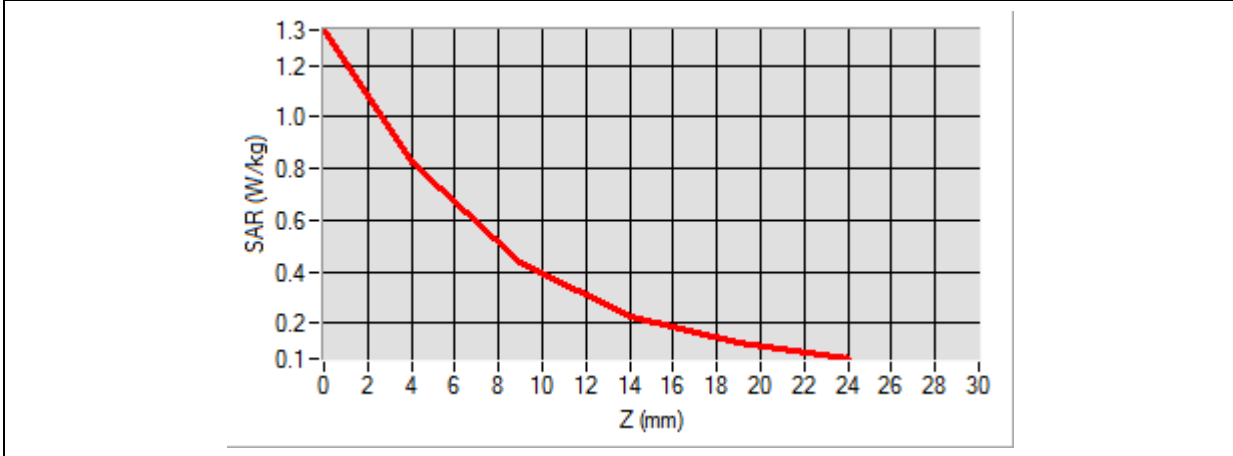

3D screen shot	Hot spot position
<p>A 3D model of a human head and neck. A grid of blue dots is overlaid on the head, with a small area highlighted in green and yellow, indicating the hot spot location.</p>	<p>A 3D visualization of the hot spot position, showing a small rectangular volume with a color gradient from green to red, indicating the highest SAR exposure area.</p>

MEASUREMENT 28

Type: Phone measurement (Complete)

Date of measurement: 2021-12-22


Measurement duration: 12 minutes 3 seconds

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left Head
Device Position	Cheek
Band	Bluetooth
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results


Frequency (MHz)	2480.000000
Relative Permittivity (real part)	38.201881
Conductivity (S/m)	1.734621
Power Variation (%)	0.590512
Ambient Temperature	22.0
Liquid Temperature	22.3

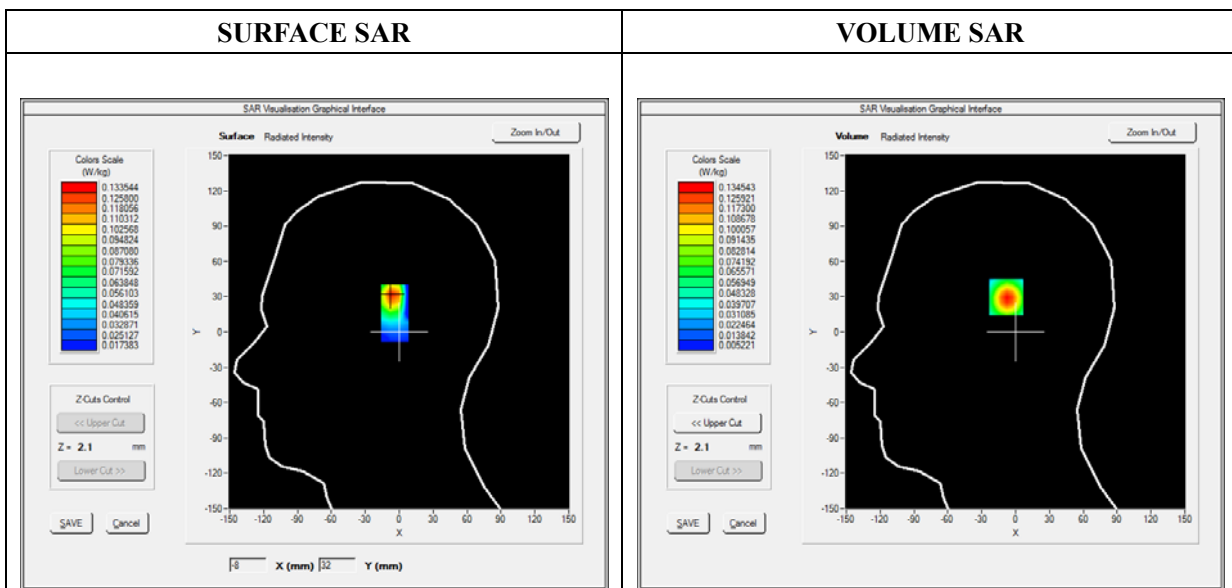

SAR Peak: 0.22 W/kg

SAR 10g (W/Kg)	0.062104
SAR 1g (W/Kg)	0.122531

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.2178	0.1345	0.0707	0.0366	0.0194

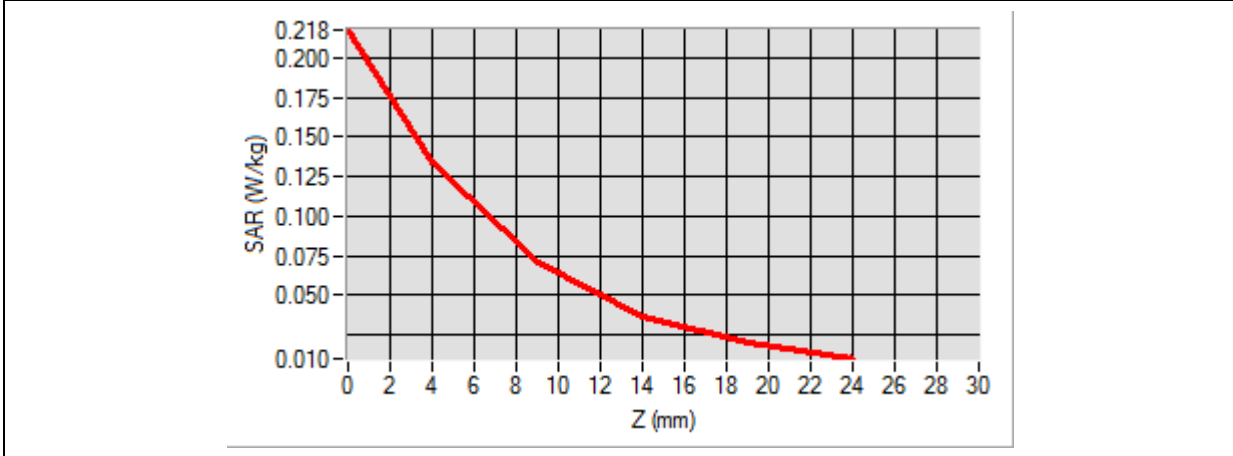

3D screen shot	Hot spot position

MEASUREMENT 29


Type: Phone measurement (Complete)
 Date of measurement: 2021-12-18
 Measurement duration: 11 minutes 48 seconds

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	GSM850
Channels	Low
Signal	TDMA (Crest factor: 8.0)

B. SAR Measurement Results

Frequency (MHz)	824.200000
Relative Permittivity (real part)	41.164612
Conductivity (S/m)	0.881321
Power Variation (%)	1.650546
Ambient Temperature	21.1
Liquid Temperature	21.3

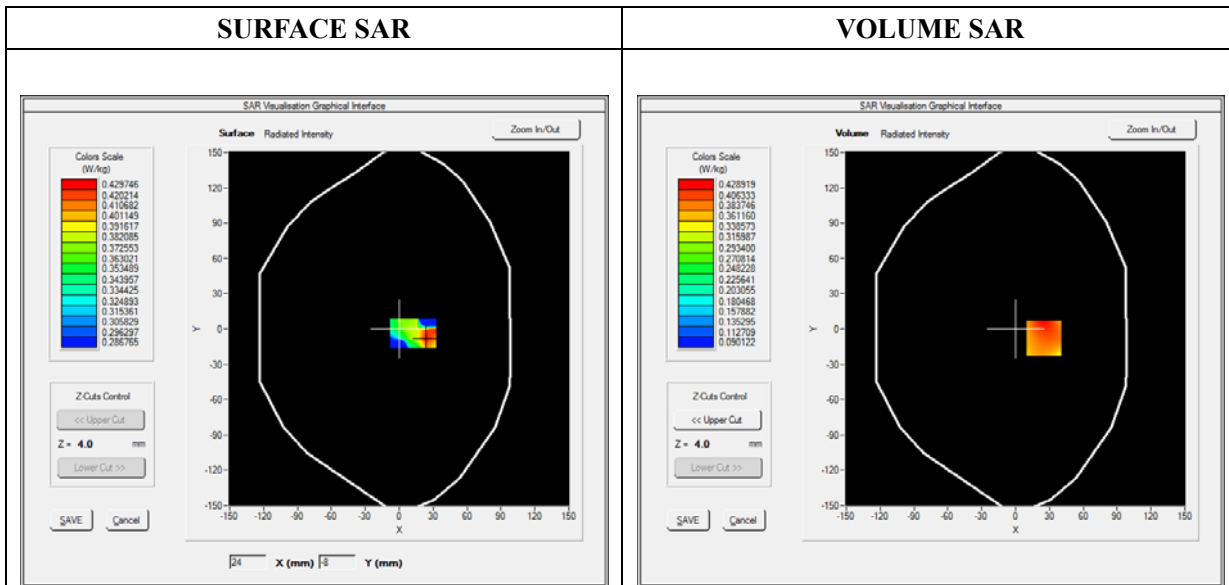


Maximum location: X=25.00, Y=-8.00

SAR Peak: 0.60 W/kg

SAR 10g (W/Kg)	0.297914
SAR 1g (W/Kg)	0.409445

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.3659	0.4289	0.2990	0.2016	0.1977

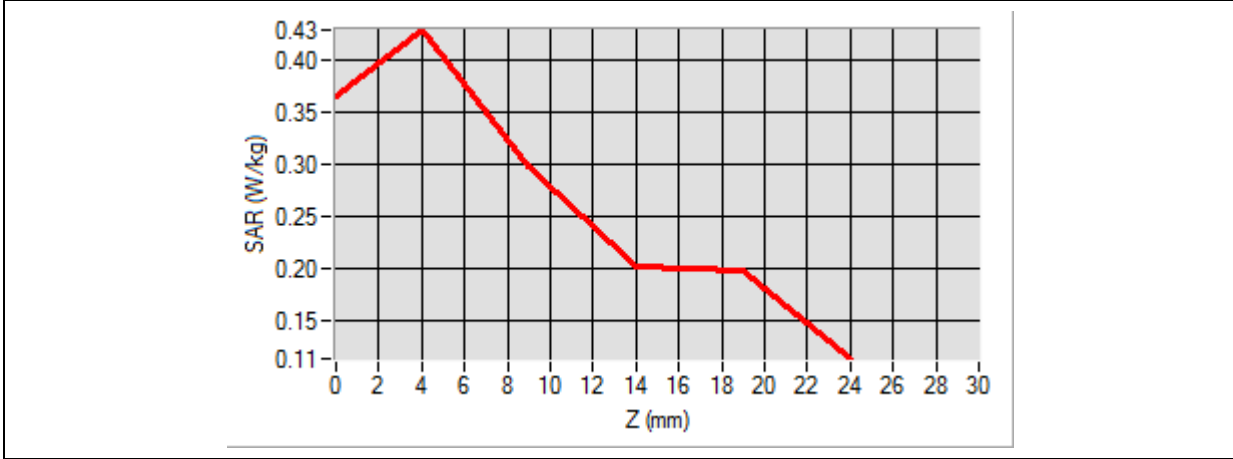

3D screen shot	Hot spot position

MEASUREMENT 30


Type: Phone measurement (Complete)
 Date of measurement: 2021-12-18
 Measurement duration: 11 minutes 48 seconds

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	GSM1900
Channels	Low
Signal	TDMA (Crest factor: 8.0)

B. SAR Measurement Results

Frequency (MHz)	1850.200000
Relative Permittivity (real part)	38.602641
Conductivity (S/m)	1.360216
Power Variation (%)	1.1304590
Ambient Temperature	21.1
Liquid Temperature	21.3

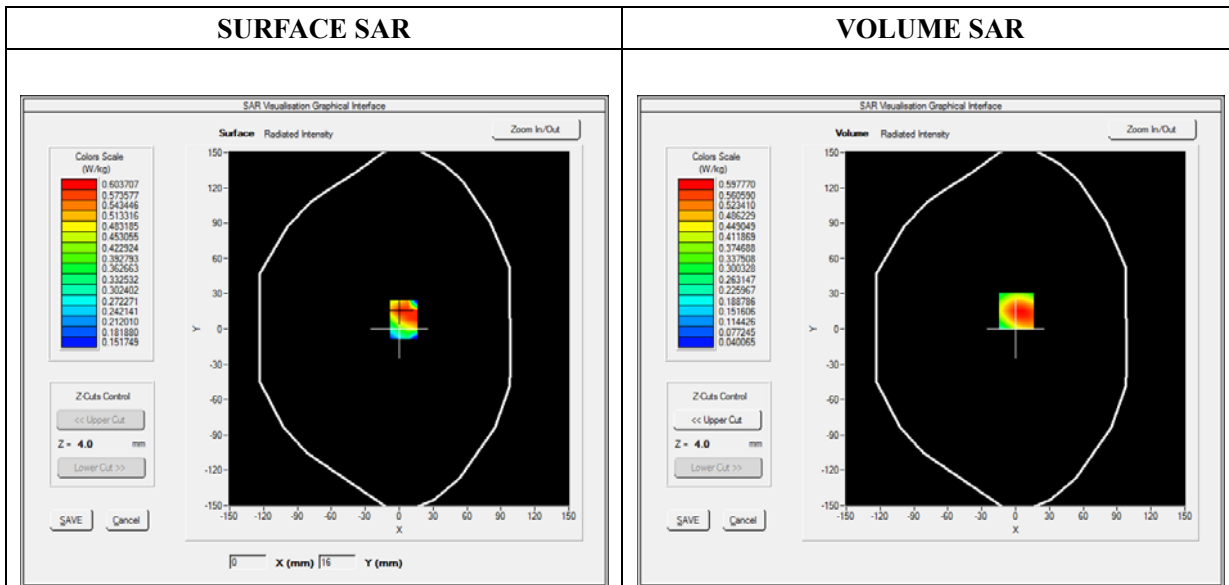


Maximum location: X=1.00, Y=15.00

SAR Peak: 0.87 W/kg

SAR 10g (W/Kg)	0.346939
SAR 1g (W/Kg)	0.564944

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.1885	0.5978	0.3383	0.2404	0.1380

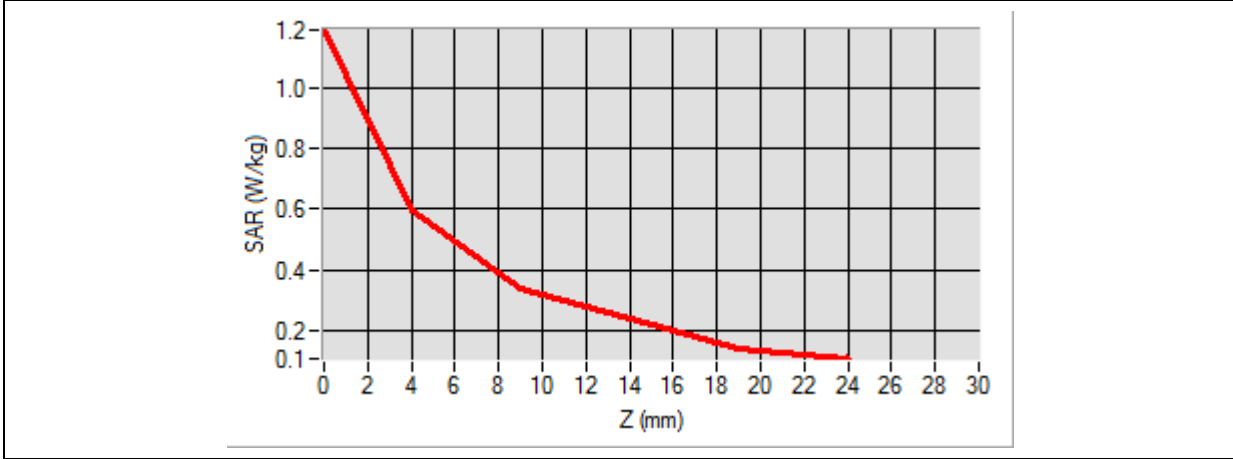

3D screen shot	Hot spot position

MEASUREMENT 31

Type: Phone measurement (Complete)

Date of measurement: 2021-12-18


Measurement duration: 12 minutes 3 seconds

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WCDMA1900_RMC
Channels	Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	1852.400000
Relative Permittivity (real part)	38.580124
Conductivity (S/m)	1.369949
Power Variation (%)	-1.550081
Ambient Temperature	21.1
Liquid Temperature	21.3

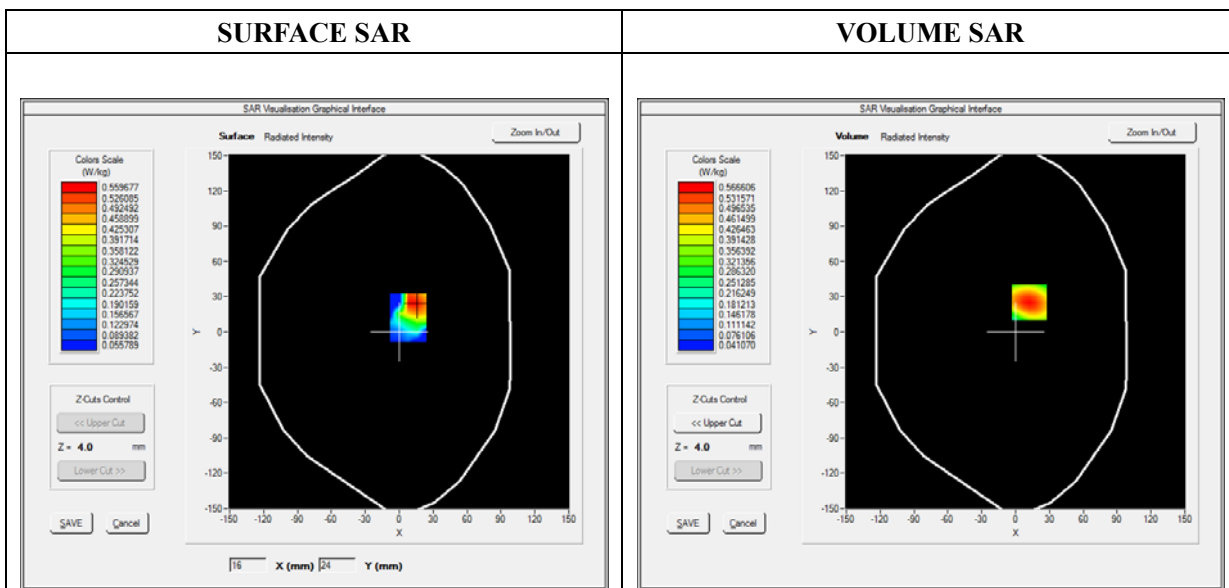


Maximum location: X=12.00, Y=25.00

SAR Peak: 0.80 W/kg

SAR 10g (W/Kg)	0.327179
SAR 1g (W/Kg)	0.530431

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.7967	0.5666	0.3653	0.2355	0.1531

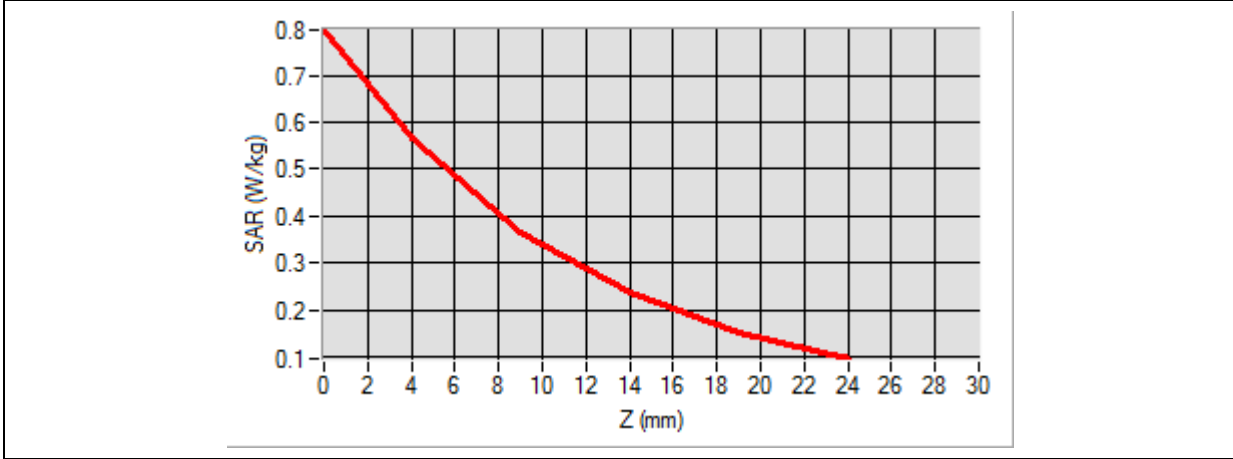

3D screen shot	Hot spot position

MEASUREMENT 32

Type: Phone measurement (Complete)

Date of measurement: 2021-12-18


Measurement duration: 12 minutes 3 seconds

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WCDMA1700_RMC
Channels	Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	1712.400000
Relative Permittivity (real part)	39.08951
Conductivity (S/m)	1.361654
Power Variation (%)	0.965461
Ambient Temperature	21.1
Liquid Temperature	21.3

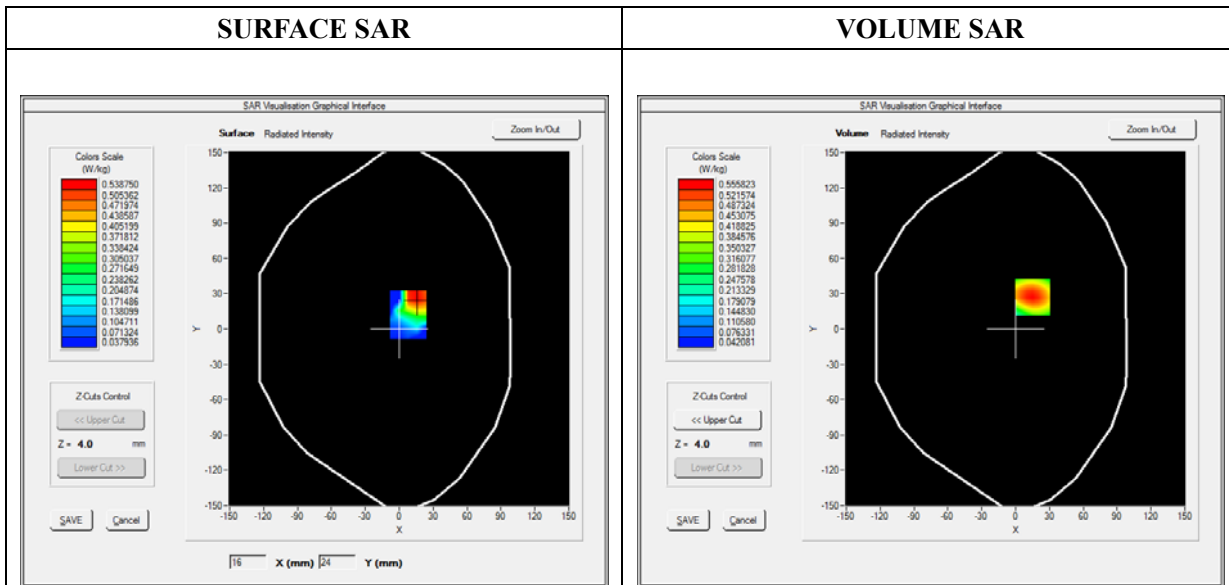


Maximum location: X=15.00, Y=27.00

SAR Peak: 0.78 W/kg

SAR 10g (W/Kg)	0.323889
SAR 1g (W/Kg)	0.520527

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.7732	0.5558	0.3642	0.2393	0.1590

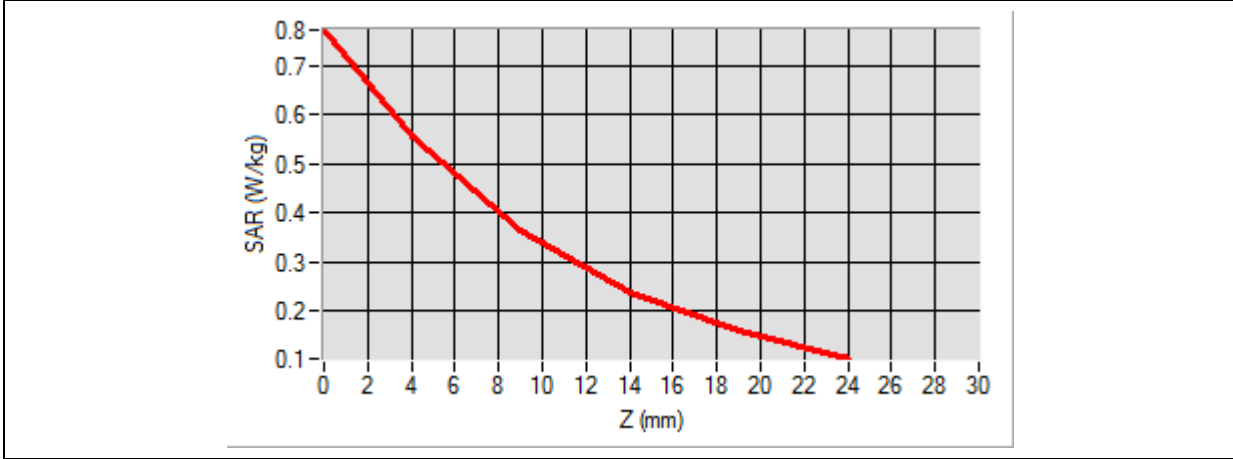

3D screen shot	Hot spot position

MEASUREMENT 33/59


Type: Phone measurement (Complete)
 Date of measurement: 2021-12-18
 Measurement duration: 12 minutes 3 seconds

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WCDMA850_RMC
Channels	Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	826.400000
Relative Permittivity (real part)	41.164872
Conductivity (S/m)	0.886495
Power Variation (%)	0.608456
Ambient Temperature	21.1
Liquid Temperature	21.3

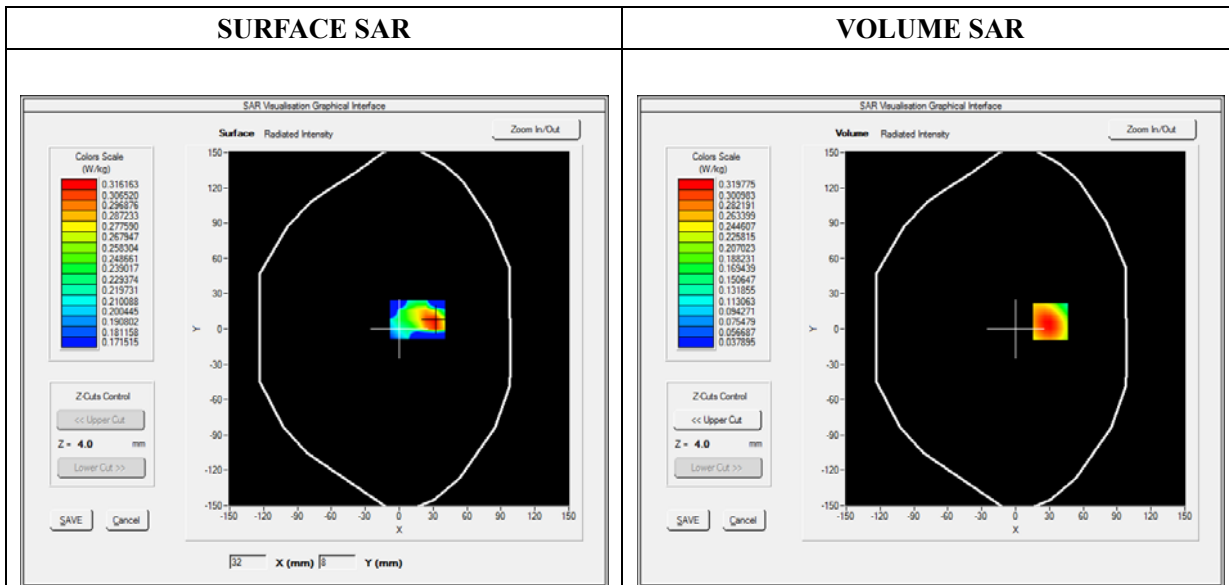


Maximum location: X=31.00, Y=6.00

SAR Peak: 0.45 W/kg

SAR 10g (W/Kg)	0.202496
SAR 1g (W/Kg)	0.305817

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.4518	0.3198	0.2084	0.1406	0.1005

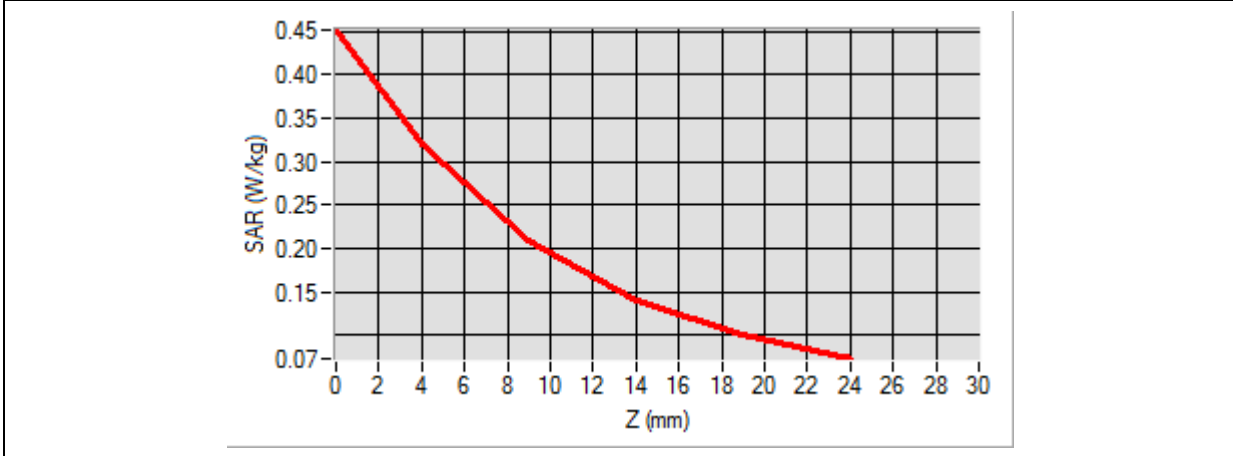

3D screen shot	Hot spot position

MEASUREMENT 34/60


Type: Phone measurement (Complete)
 Date of measurement: 2021-12-20
 Measurement duration: 12 minutes 3 seconds

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 2
Channels	QPSK, 20MHz, 1RB,Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	1860.000000
Relative Permittivity (real part)	38.584216
Conductivity (S/m)	1.371368
Power Variation (%)	-1.54856
Ambient Temperature	21.1
Liquid Temperature	21.3

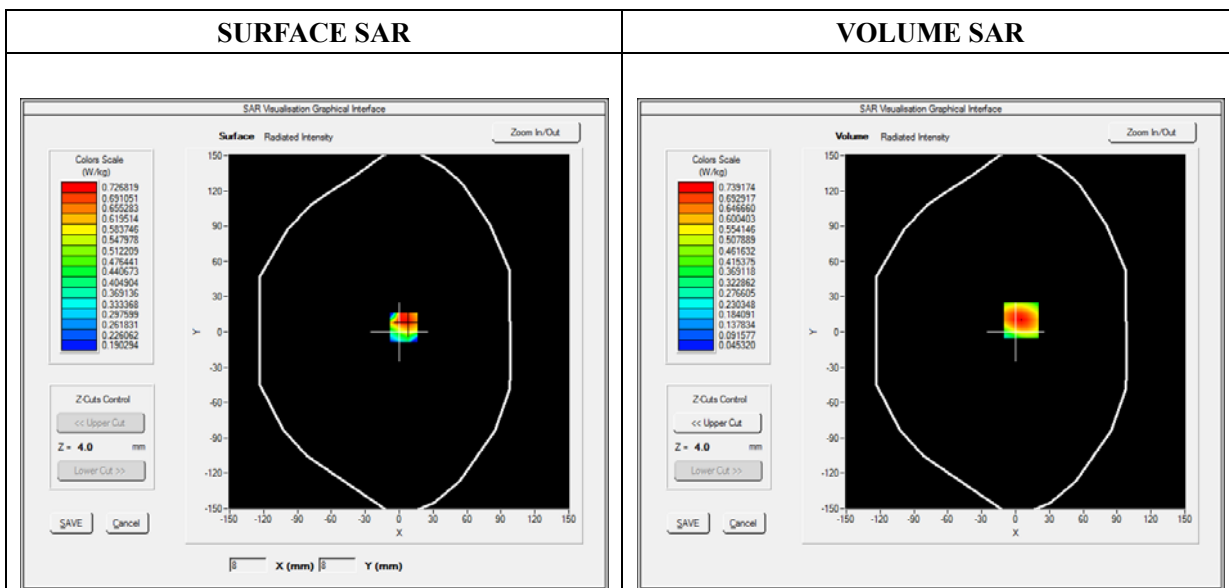


Maximum location: X=5.00, Y=10.00

SAR Peak: 1.05 W/kg

SAR 10g (W/Kg)	0.423588
SAR 1g (W/Kg)	0.692573

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.0452	0.7392	0.4734	0.3037	0.1972

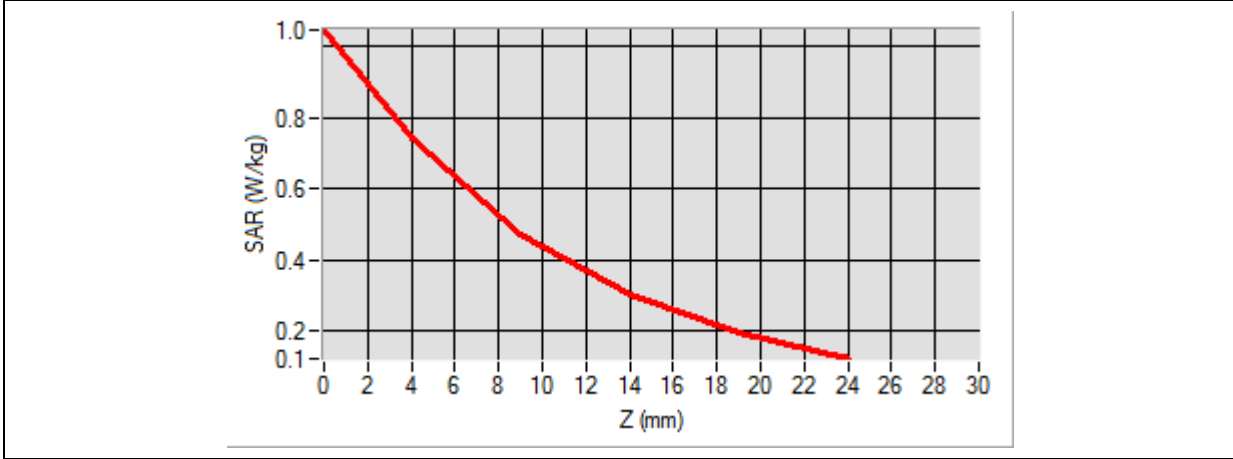

3D screen shot	Hot spot position

MEASUREMENT 35/61


Type: Phone measurement (Complete)
 Date of measurement: 2021-12-20
 Measurement duration: 12 minutes 3 seconds

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 4
Channels	QPSK, 20MHz, 1RB,High
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	1745.000000
Relative Permittivity (real part)	39.094890
Conductivity (S/m)	1.361250
Power Variation (%)	1.374100
Ambient Temperature	21.1
Liquid Temperature	21.2

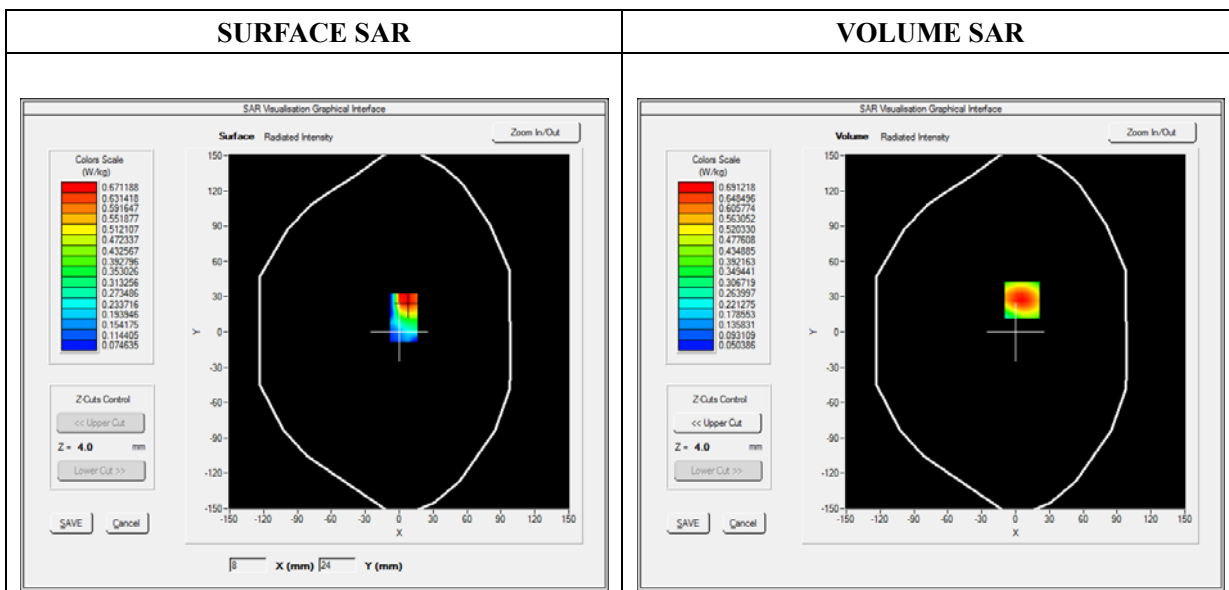


Maximum location: X=6.00, Y=27.00

SAR Peak: 0.96 W/kg

SAR 10g (W/Kg)	0.403336
SAR 1g (W/Kg)	0.647240

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.9596	0.6912	0.4540	0.2991	0.1991

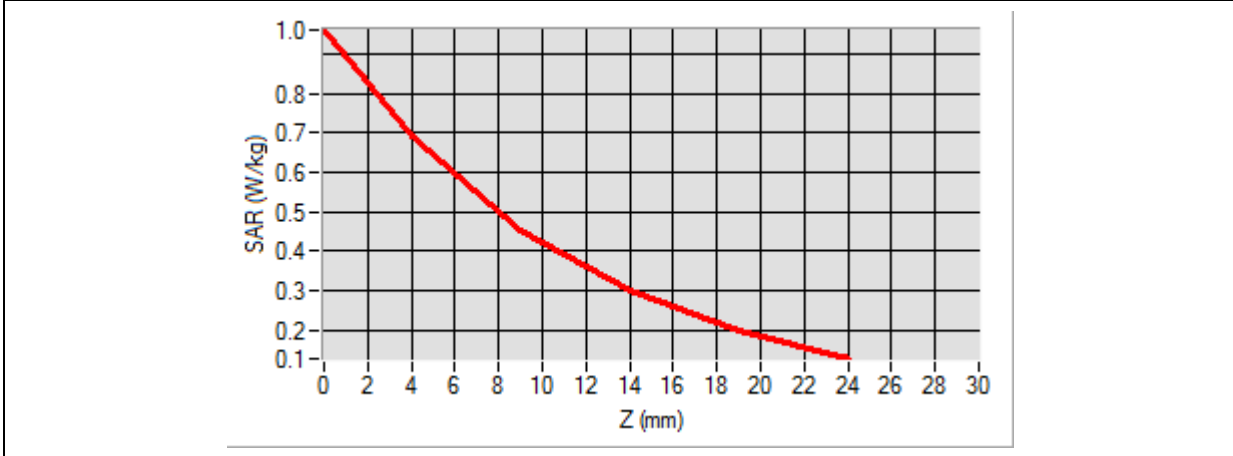

3D screen shot	Hot spot position

MEASUREMENT 36

Type: Phone measurement (Complete)

Date of measurement: 2021-12-20


Measurement duration: 12 minutes 3 seconds

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 5
Channels	QPSK, 10MHz, 1RB, High
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	844.000000
Relative Permittivity (real part)	41.161692
Conductivity (S/m)	0.883182
Power Variation (%)	-0.420081
Ambient Temperature	21.1
Liquid Temperature	21.2

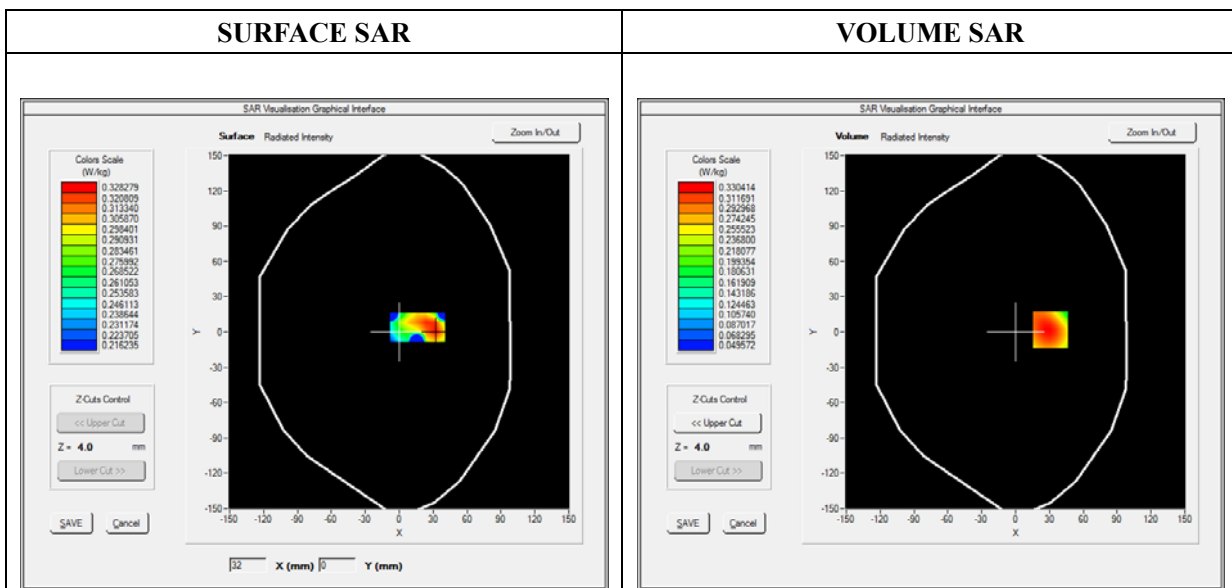


Maximum location: X=31.00, Y=2.00

SAR Peak: 0.45 W/kg

SAR 10g (W/Kg)	0.219083
SAR 1g (W/Kg)	0.316729

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.4463	0.3304	0.2275	0.1602	0.1167

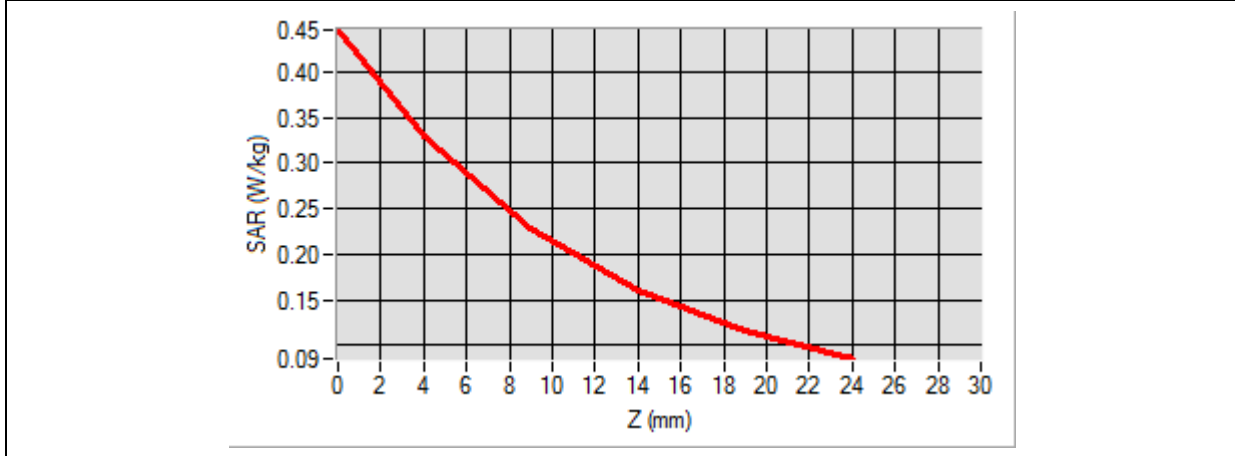

3D screen shot	Hot spot position
<p>A 3D perspective view of a grey device with a grid of blue dots on its surface. A localized area of the grid is highlighted with a color gradient from green to red, indicating the hot spot position.</p>	<p>A 2D heatmap showing the hot spot position. The color gradient ranges from yellow (low SAR) to red (high SAR), with the highest intensity (red) concentrated in a central area.</p>

MEASUREMENT 37/63

Type: Phone measurement (Complete)

Date of measurement: 2021-12-20


Measurement duration: 12 minutes 3 seconds

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 12
Channels	QPSK, 10MHz, 1RB, Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	704.000000
Relative Permittivity (real part)	41.312941
Conductivity (S/m)	0.851023
Power Variation (%)	0.919535
Ambient Temperature	21.1
Liquid Temperature	21.2

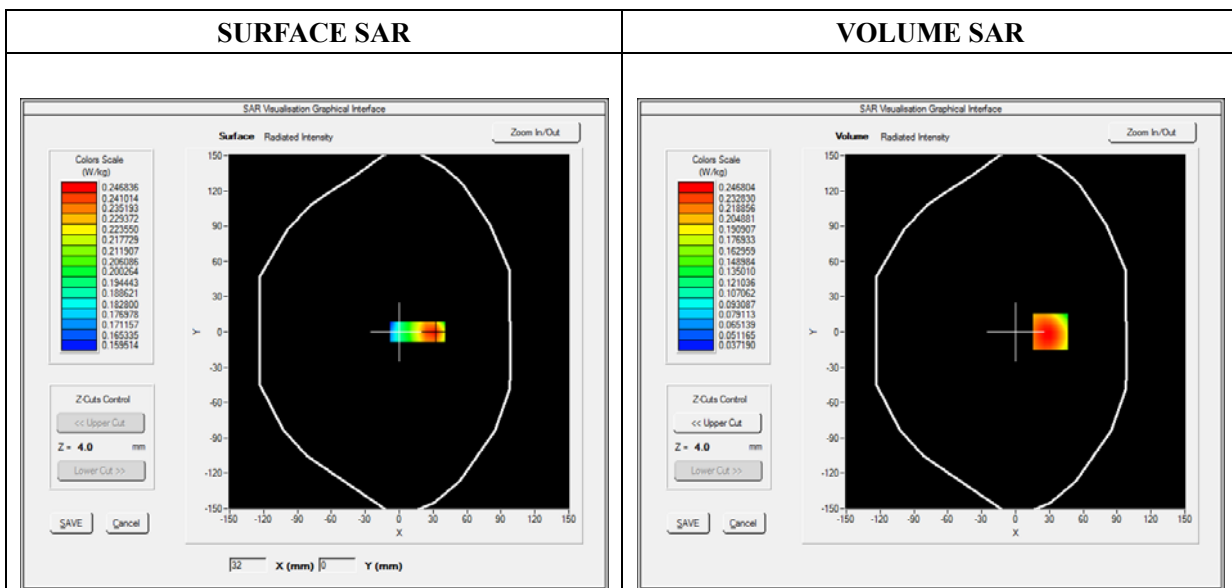


Maximum location: X=31.00, Y=0.00

SAR Peak: 0.33 W/kg

SAR 10g (W/Kg)	0.172385
SAR 1g (W/Kg)	0.243844

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.3299	0.2468	0.1727	0.1239	0.0923

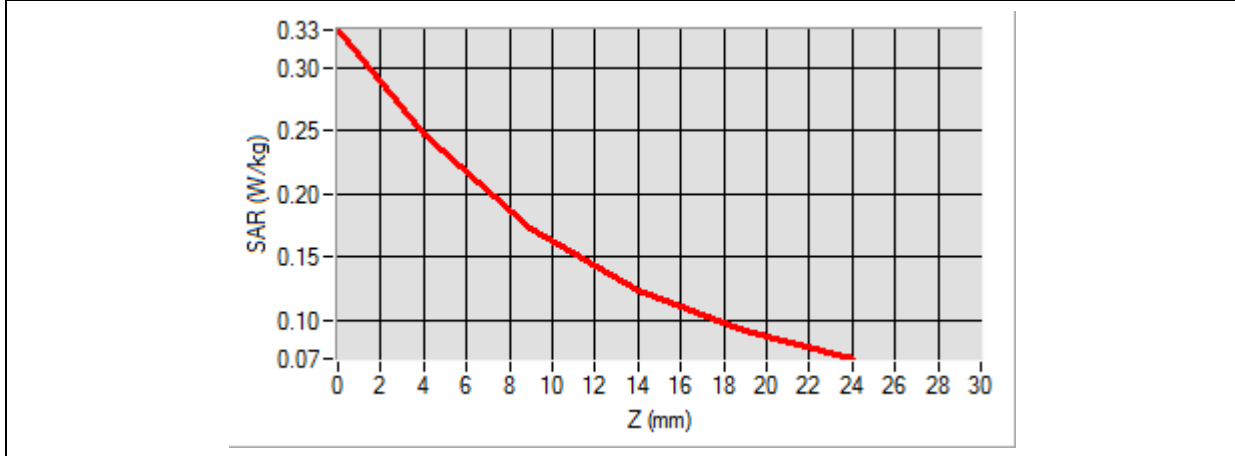

3D screen shot	Hot spot position

MEASUREMENT 38/64

Type: Phone measurement (Complete)

Date of measurement: 2021-12-20


Measurement duration: 12 minutes 3 seconds

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 13
Channels	QPSK, 10MHz, 1RB, High
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	782.000000
Relative Permittivity (real part)	41.309245
Conductivity (S/m)	0.846245
Power Variation (%)	0.364535
Ambient Temperature	21.1
Liquid Temperature	21.2

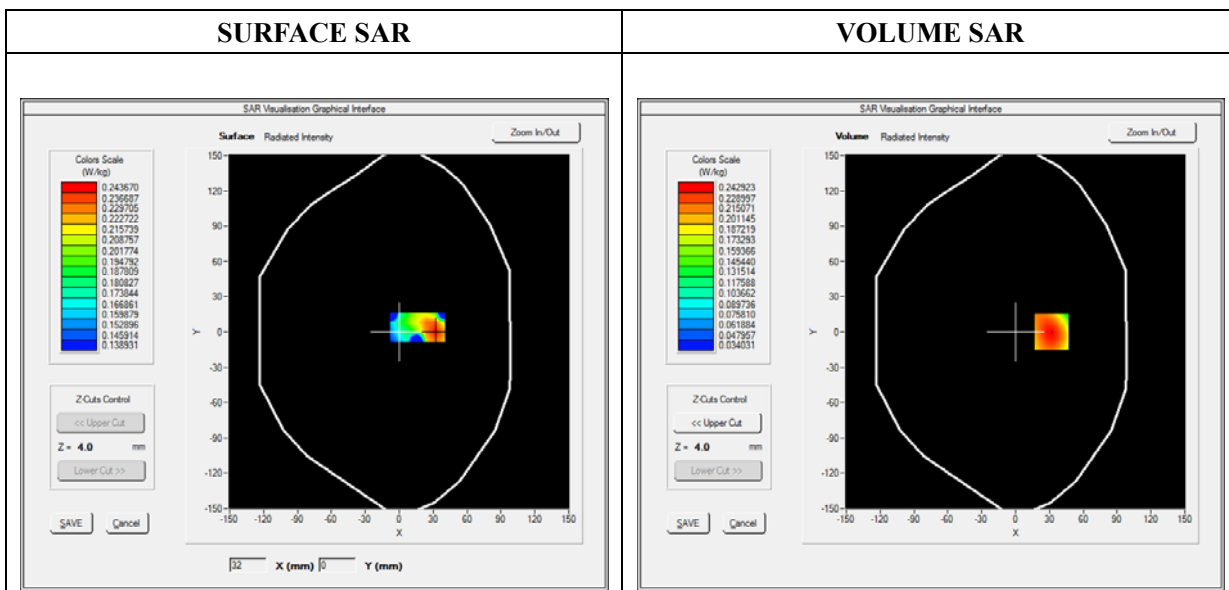


Maximum location: X=32.00, Y=0.00

SAR Peak: 0.33 W/kg

SAR 10g (W/Kg)	0.162964
SAR 1g (W/Kg)	0.236947

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.3285	0.2429	0.1667	0.1166	0.0839

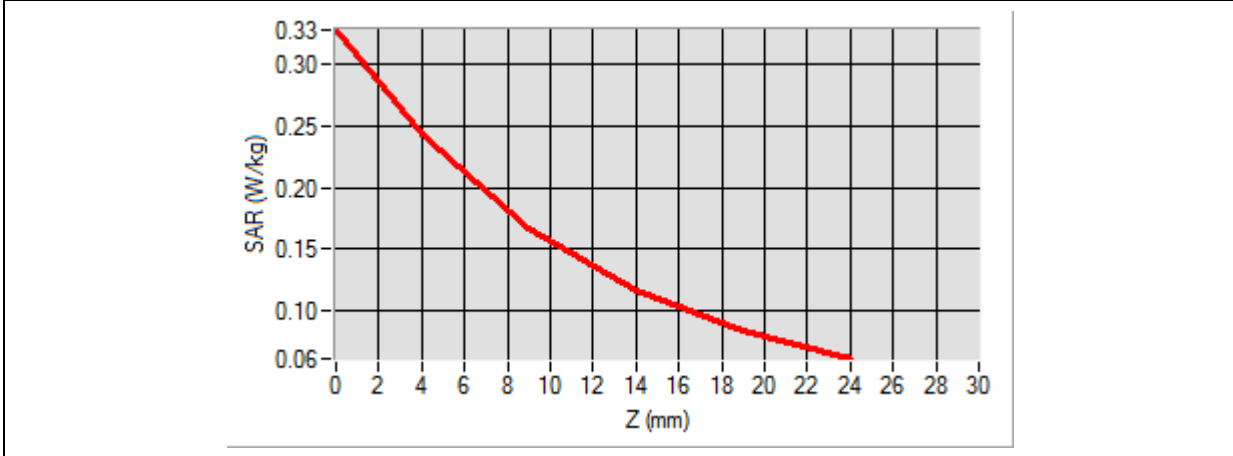

3D screen shot	Hot spot position
<p>A 3D perspective view of a grey device. A grid of small blue dots is overlaid on the top surface. A localized area of the grid is highlighted with a color gradient from green to red, indicating the hot spot location.</p>	<p>A 2D heatmap showing the spatial distribution of the hot spot. The color scale ranges from yellow (low SAR) to red (high SAR). The hot spot is concentrated in the center of the device's top surface.</p>

MEASUREMENT 39/65

Type: Phone measurement (Complete)

Date of measurement: 2021-12-20


Measurement duration: 12 minutes 3 seconds

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 17
Channels	QPSK, 10MHz, 1RB, Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	709.000000
Relative Permittivity (real part)	41.308663
Conductivity (S/m)	0.853645
Power Variation (%)	1.650810
Ambient Temperature	21.1
Liquid Temperature	21.2

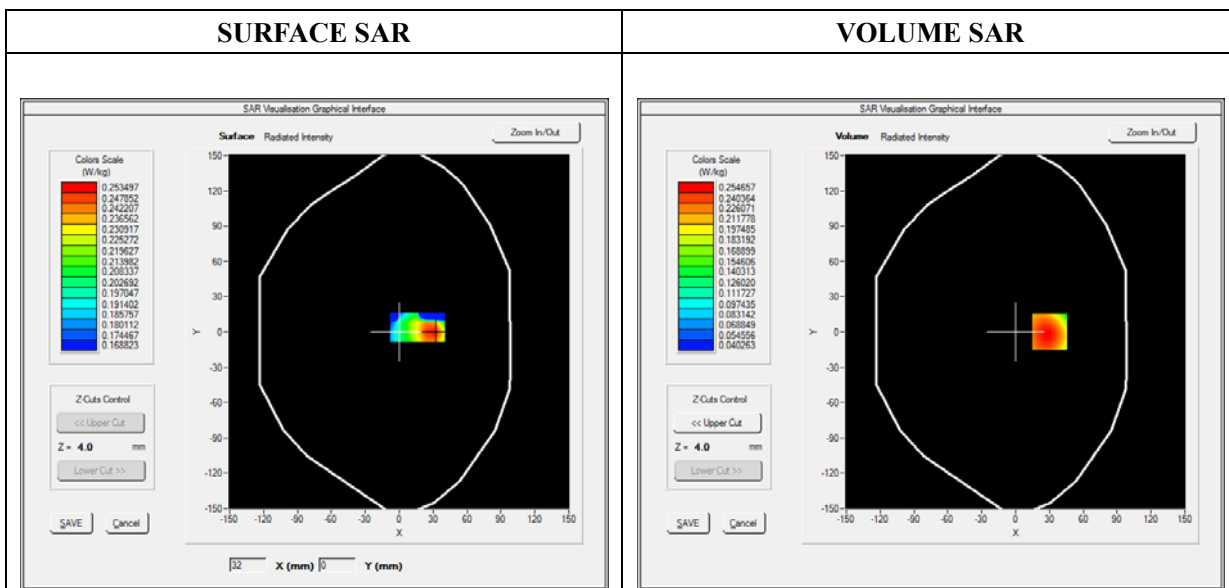


Maximum location: X=30.00, Y=0.00

SAR Peak: 0.34 W/kg

SAR 10g (W/Kg)	0.177940
SAR 1g (W/Kg)	0.251077

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.3400	0.2547	0.1786	0.1287	0.0963

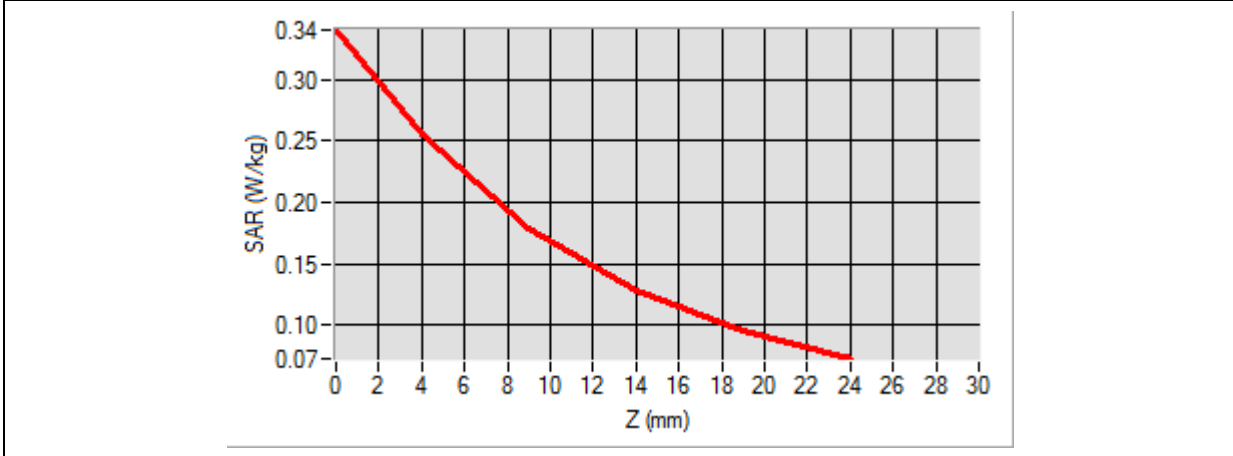

3D screen shot	Hot spot position
<p>A 3D perspective view of a grey device with a grid of green dots on its surface. A localized area of the grid is highlighted with a color gradient from green to red, indicating the hot spot position.</p>	<p>A 2D heatmap showing the hot spot position. The color gradient transitions from green at the edges to red in the center, representing the intensity of the SAR exposure.</p>

MEASUREMENT 40

Type: Phone measurement (Complete)

Date of measurement: 2021-12-21


Measurement duration: 12 minutes 3 seconds

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 25
Channels	QPSK, 20MHz, 1RB, High
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	1905.000000
Relative Permittivity (real part)	38.578631
Conductivity (S/m)	1.373625
Power Variation (%)	1.866100
Ambient Temperature	21.1
Liquid Temperature	21.2

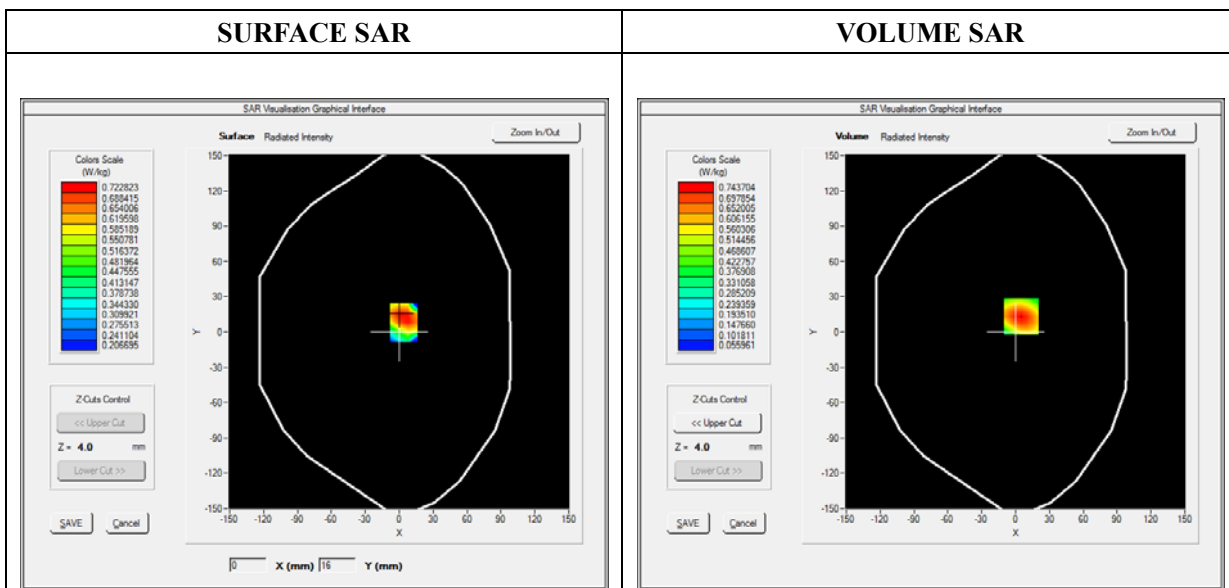


Maximum location: X=5.00, Y=13.00

SAR Peak: 1.04 W/kg

SAR 10g (W/Kg)	0.430851
SAR 1g (W/Kg)	0.696261

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.0399	0.7437	0.4829	0.3132	0.2042

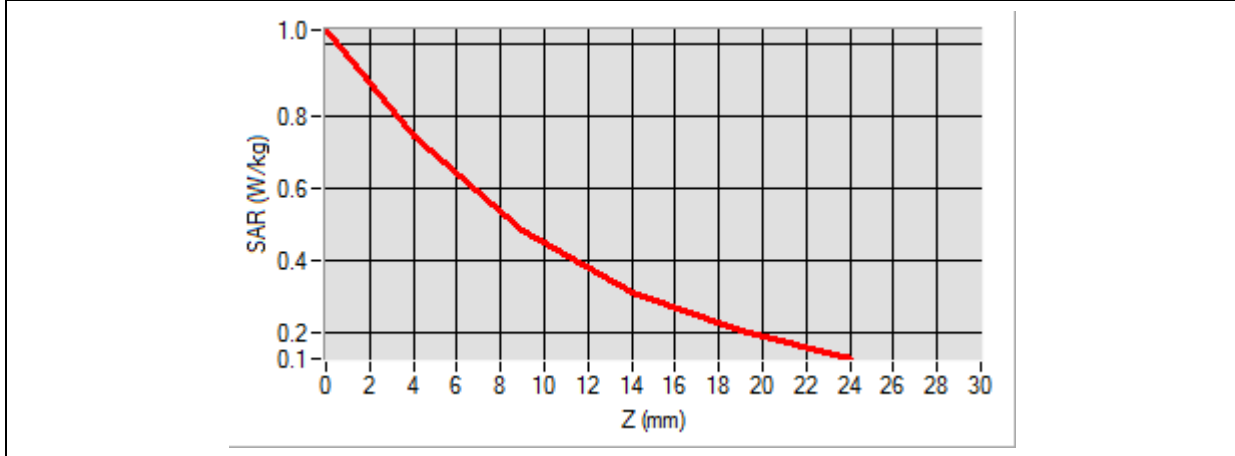

3D screen shot	Hot spot position

MEASUREMENT 41/67

Type: Phone measurement (Complete)

Date of measurement: 2021-12-21


Measurement duration: 12 minutes 3 seconds

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 26(814-824MHz)
Channels	QPSK, 10MHz, 1RB, Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	819.000000
Relative Permittivity (real part)	41.163512
Conductivity (S/m)	0.884026
Power Variation (%)	1.582310
Ambient Temperature	21.1
Liquid Temperature	21.2

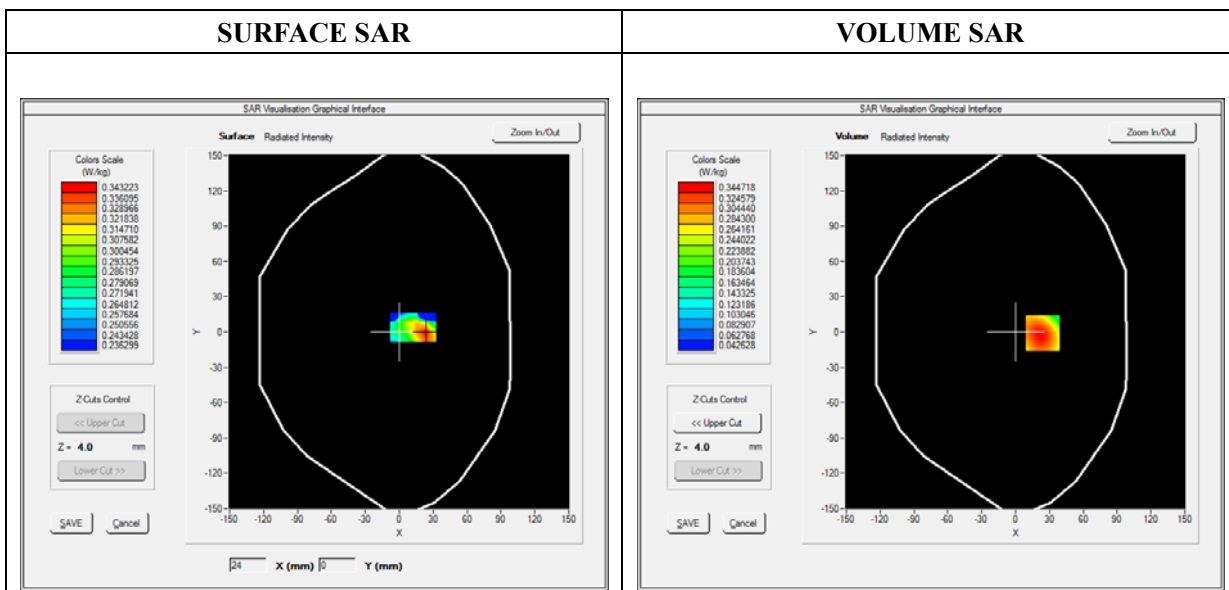


Maximum location: X=24.00, Y=-1.00

SAR Peak: 0.48 W/kg

SAR 10g (W/Kg)	0.222203
SAR 1g (W/Kg)	0.330908

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.4818	0.3447	0.2275	0.1547	0.1104

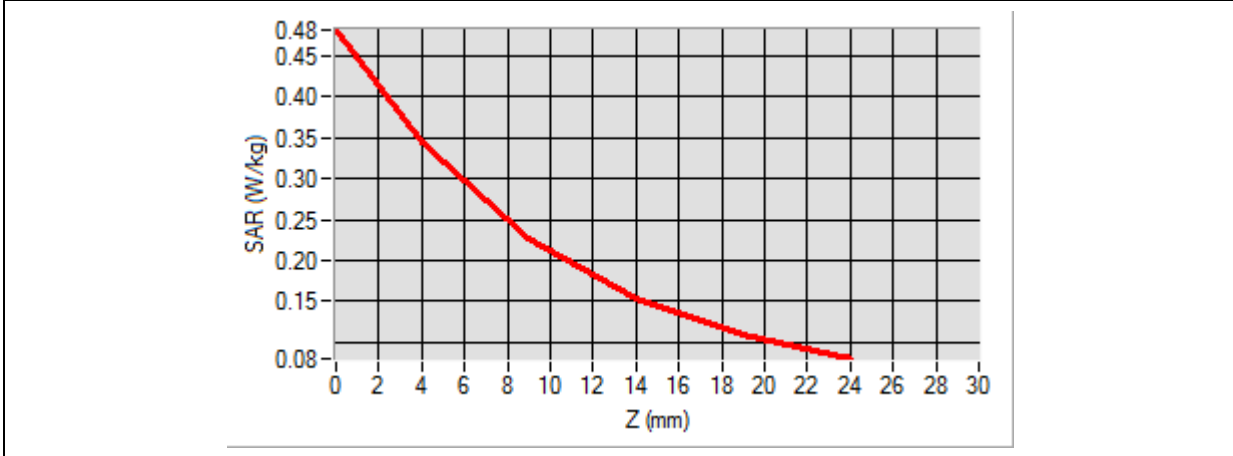

3D screen shot	Hot spot position
<p>A 3D perspective view of a grey device with a grid of green dots on its top surface. A small area of the grid is highlighted with a color gradient from red to green, indicating the location of the SAR hot spot.</p>	<p>A 2D heatmap showing the spatial distribution of the SAR hot spot. The color scale ranges from red (high SAR) to yellow (low SAR), with the highest intensity concentrated in the center of the device's top surface.</p>

MEASUREMENT 42/68

Type: Phone measurement (Complete)

Date of measurement: 2021-12-21


Measurement duration: 12 minutes 3 seconds

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 26(824-849MHz)
Channels	QPSK, 15MHz, 1%RB, High
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	841.500000
Relative Permittivity (real part)	41.160754
Conductivity (S/m)	0.881529
Power Variation (%)	-1.861300
Ambient Temperature	21.1
Liquid Temperature	21.2

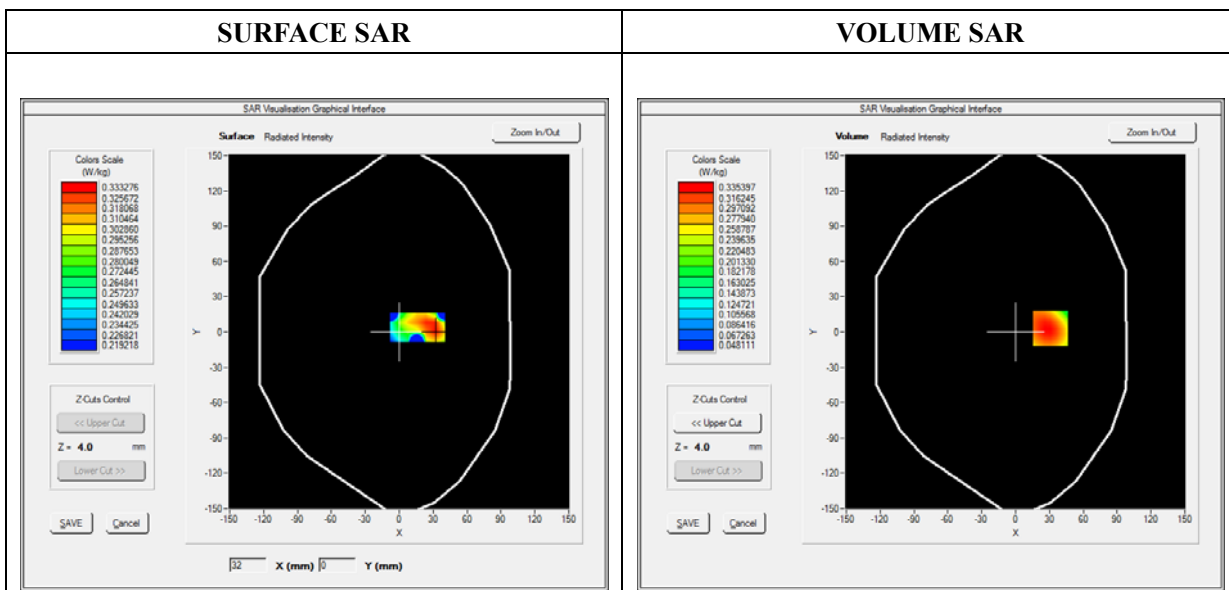


Maximum location: X=31.00, Y=3.00

SAR Peak: 0.45 W/kg

SAR 10g (W/Kg)	0.222949
SAR 1g (W/Kg)	0.322286

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.5777	0.3354	0.2187	0.1653	0.1113

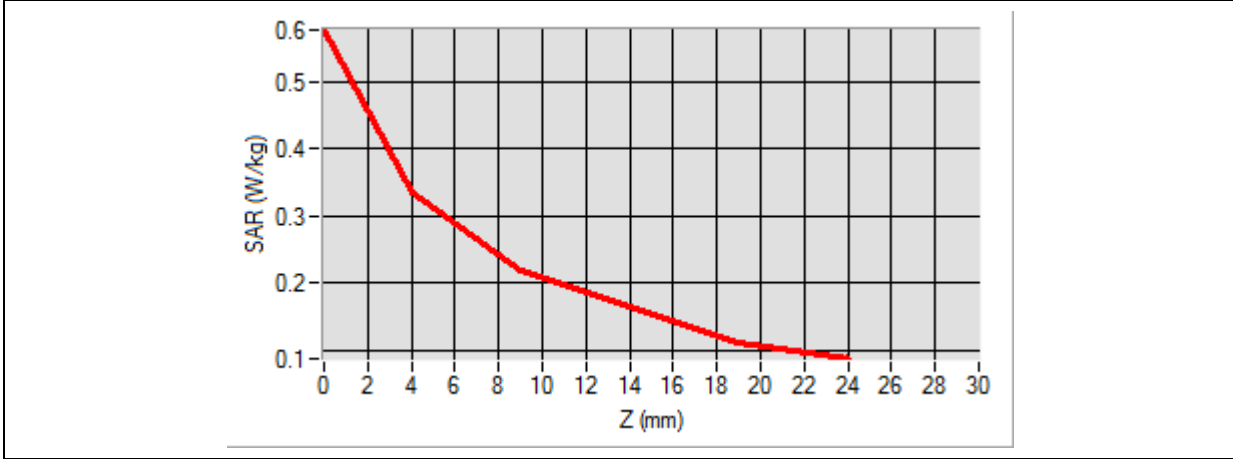

3D screen shot	Hot spot position
<p>A 3D perspective view of a grey device with a grid of blue dots on its surface. A localized area of the grid is highlighted with a color gradient from green to red, indicating the hot spot position.</p>	<p>A 2D heatmap showing the hot spot position. The color scale ranges from yellow (low SAR) to red (high SAR). The hot spot is concentrated in the center of the device's top surface.</p>

MEASUREMENT 43/69


Type: Phone measurement (Complete)
 Date of measurement: 2021-12-21
 Measurement duration: 12 minutes 3 seconds

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 41
Channels	QPSK, 20MHz,1RB,High
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2680.000000
Relative Permittivity (real part)	38.650561
Conductivity (S/m)	1.947301
Power Variation (%)	1.520089
Ambient Temperature	21.1
Liquid Temperature	21.2

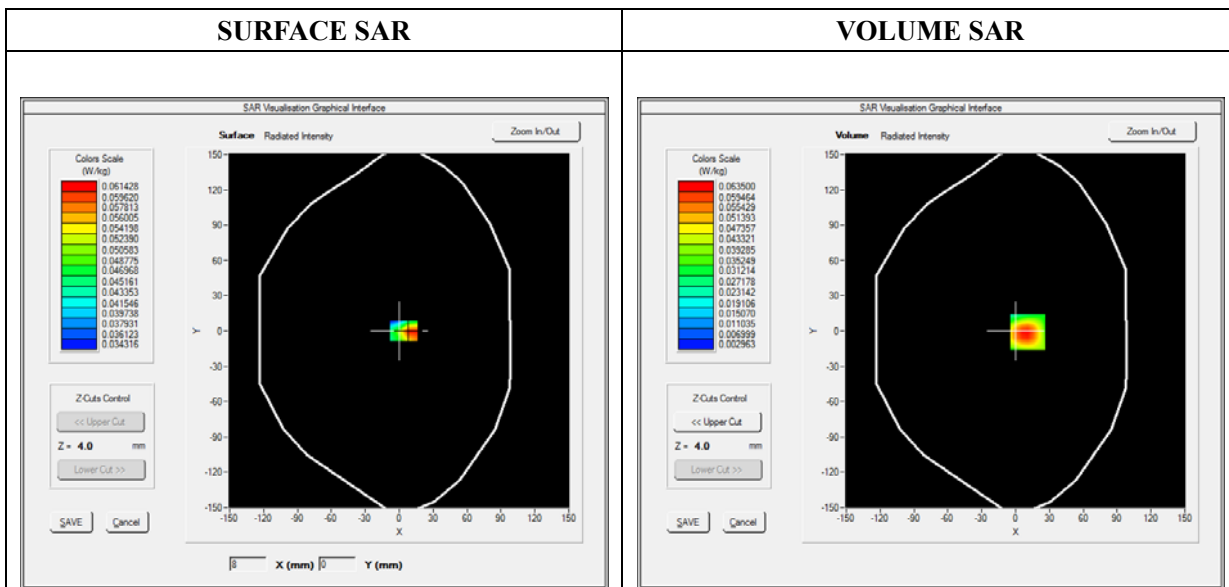


Maximum location: X=11.00, Y=-1.00

SAR Peak: 0.10 W/kg

SAR 10g (W/Kg)	0.032075
SAR 1g (W/Kg)	0.059175

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0999	0.0635	0.0349	0.0190	0.0106

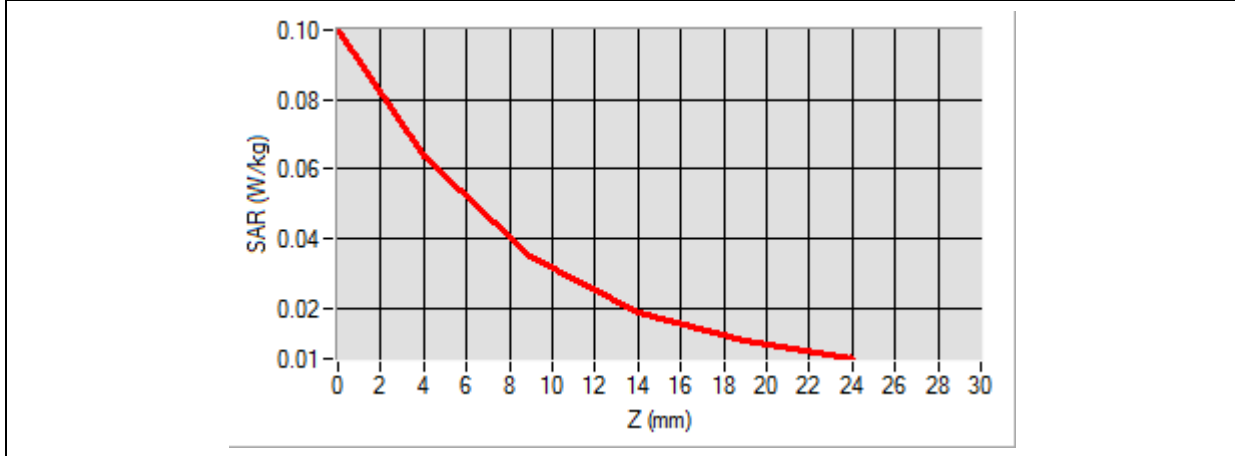

3D screen shot	Hot spot position

MEASUREMENT 44/70


Type: Phone measurement (Complete)
 Date of measurement: 2021-12-21
 Measurement duration: 12 minutes 3 seconds

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 66
Channels	QPSK, 20MHz, 1RB,High
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	1770.000000
Relative Permittivity (real part)	39.090654
Conductivity (S/m)	1.361301
Power Variation (%)	1.256941
Ambient Temperature	21.1
Liquid Temperature	21.2

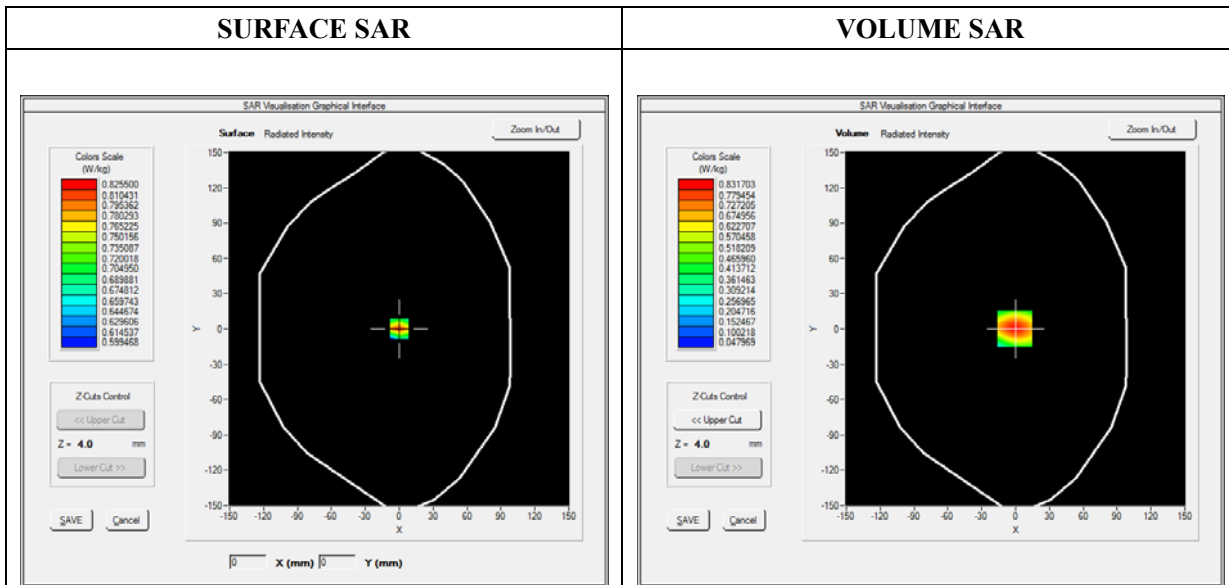


Maximum location: X=-1.00, Y=0.00

SAR Peak: 1.19 W/kg

SAR 10g (W/Kg)	0.469782
SAR 1g (W/Kg)	0.775545

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.1814	0.8317	0.5298	0.3388	0.2199

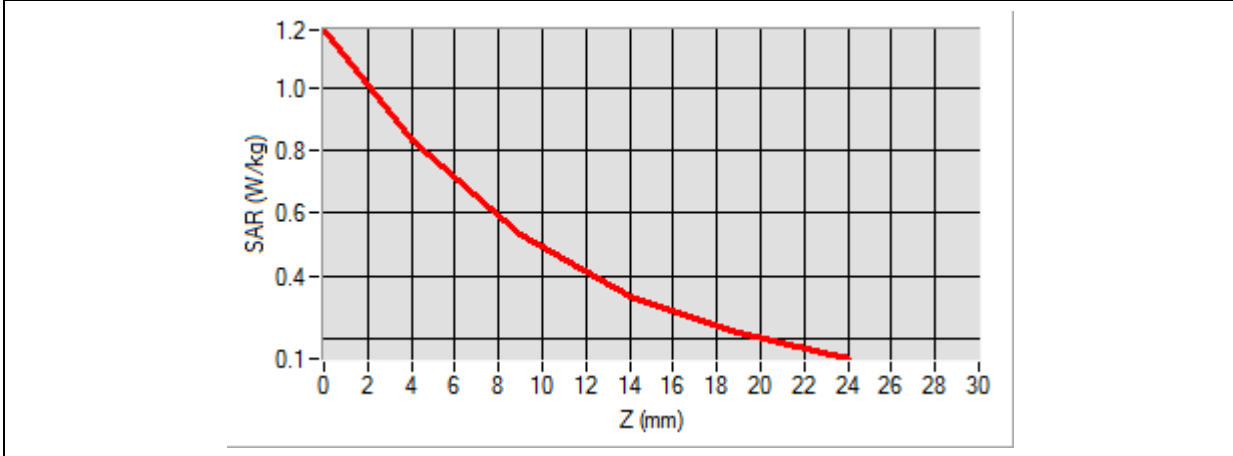

3D screen shot	Hot spot position

MEASUREMENT 45/71


Type: Phone measurement (Complete)
 Date of measurement: 2021-12-21
 Measurement duration: 12 minutes 3 seconds

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 71
Channels	QPSK, 20MHz, 1RB,Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	673.000000
Relative Permittivity (real part)	41.314951
Conductivity (S/m)	0.847301
Power Variation (%)	1.158601
Ambient Temperature	21.1
Liquid Temperature	21.2

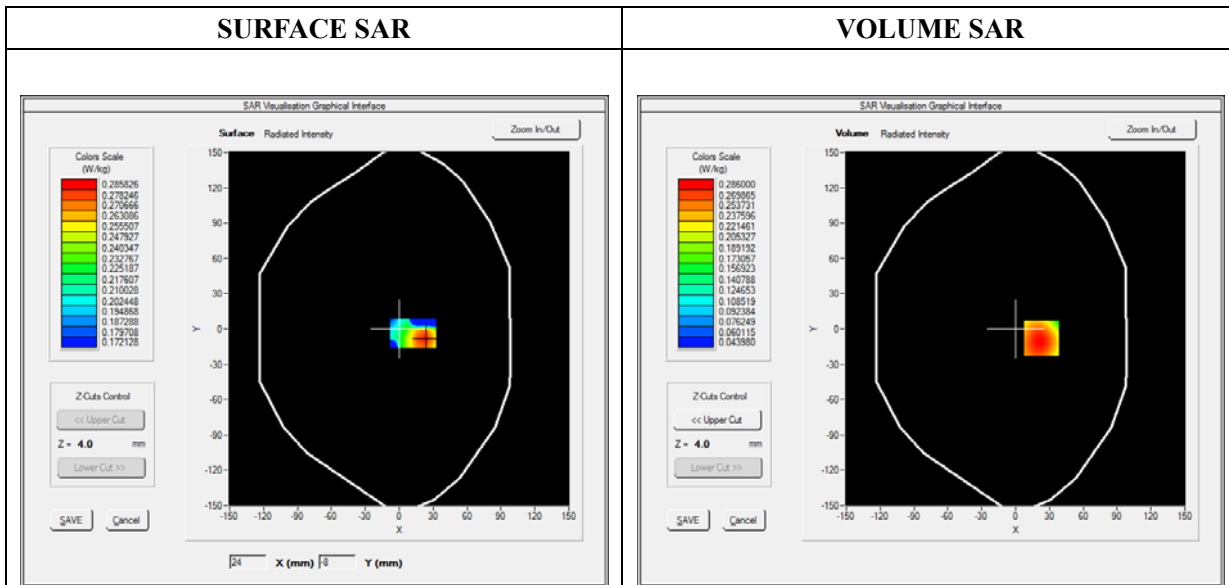


Maximum location: X=23.00, Y=-8.00

SAR Peak: 0.38 W/kg

SAR 10g (W/Kg)	0.200688
SAR 1g (W/Kg)	0.281979

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.3747	0.2860	0.2046	0.1488	0.1108

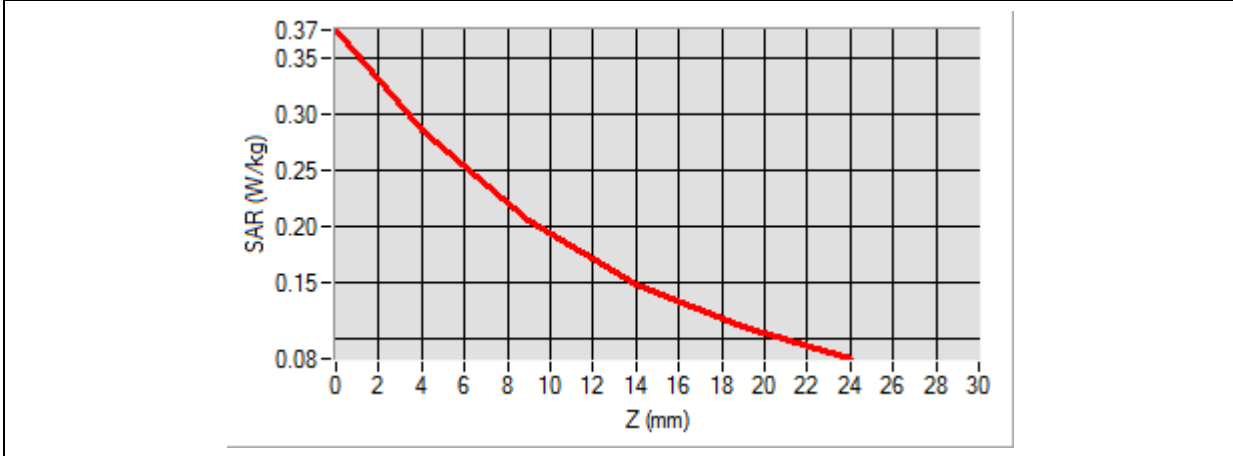

3D screen shot	Hot spot position

MEASUREMENT 46/72


Type: Phone measurement (Complete)
 Date of measurement: 2022-01-11
 Measurement duration: 12 minutes 3 seconds

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	NR n5
Channels	DFT-s-OFDM PI/2 BPSK, 20MHz, 1RB, High
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	844.000000
Relative Permittivity (real part)	41.164591
Conductivity (S/m)	0.884782
Power Variation (%)	2.589412
Ambient Temperature	21.1
Liquid Temperature	21.2

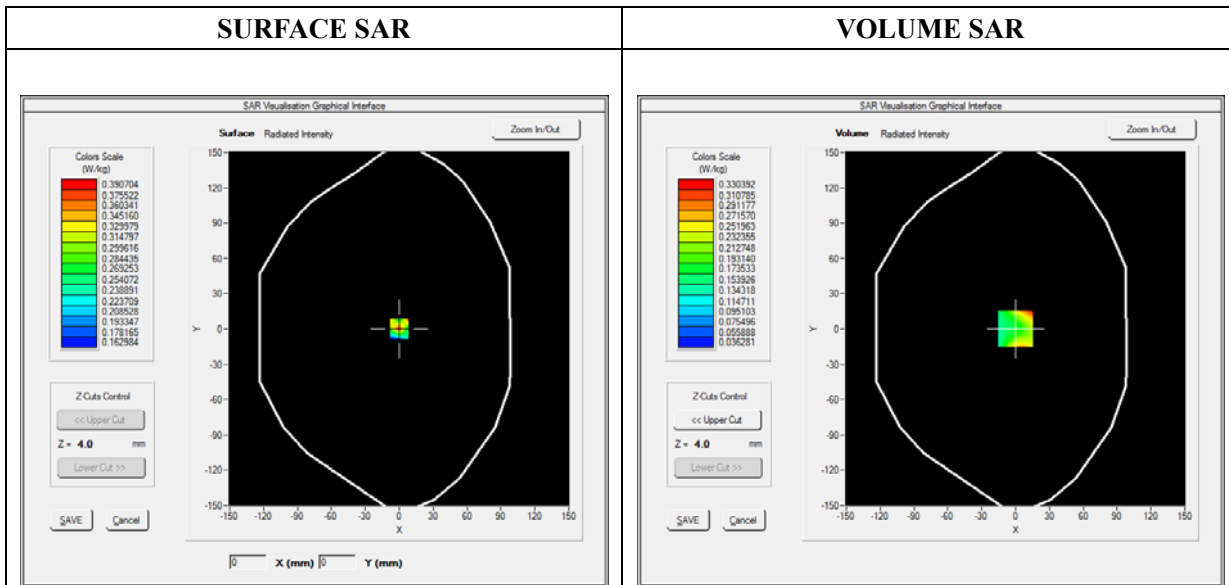


Maximum location: X=0.00, Y=0.00

SAR Peak: 0.51 W/kg

SAR 10g (W/Kg)	0.172601
SAR 1g (W/Kg)	0.262148

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.1553	0.3304	0.1008	0.1392	0.1124

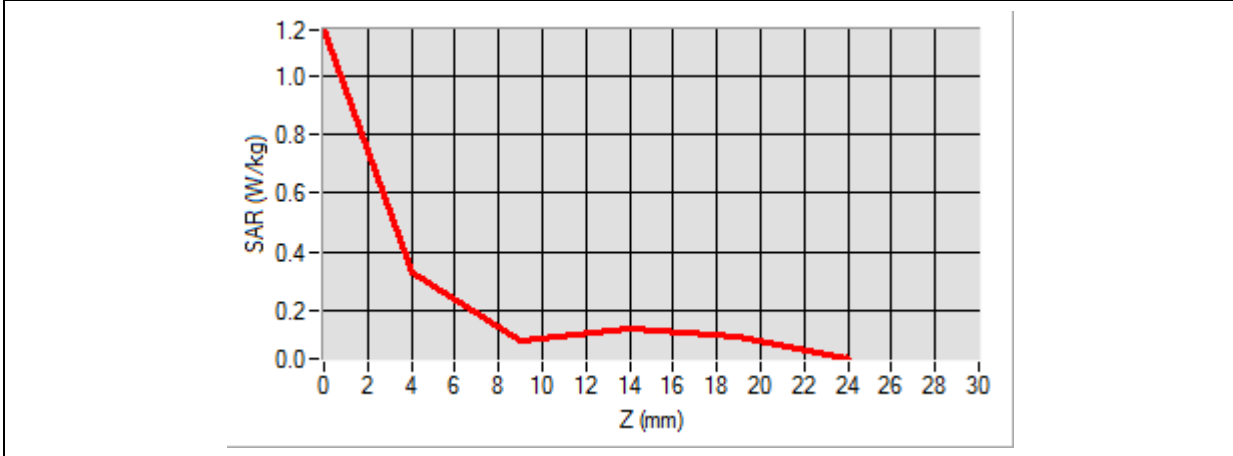

3D screen shot	Hot spot position

MEASUREMENT 47


Type: Phone measurement (Complete)
 Date of measurement: 2022-01-11
 Measurement duration: 12 minutes 3 seconds

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	NR n41
Channels	DFT-s-OFDM QPSK, 100MHz, 1RB,Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2593.000000
Relative Permittivity (real part)	38.654295
Conductivity (S/m)	1.937356
Power Variation (%)	1.589412
Ambient Temperature	21.1
Liquid Temperature	21.2

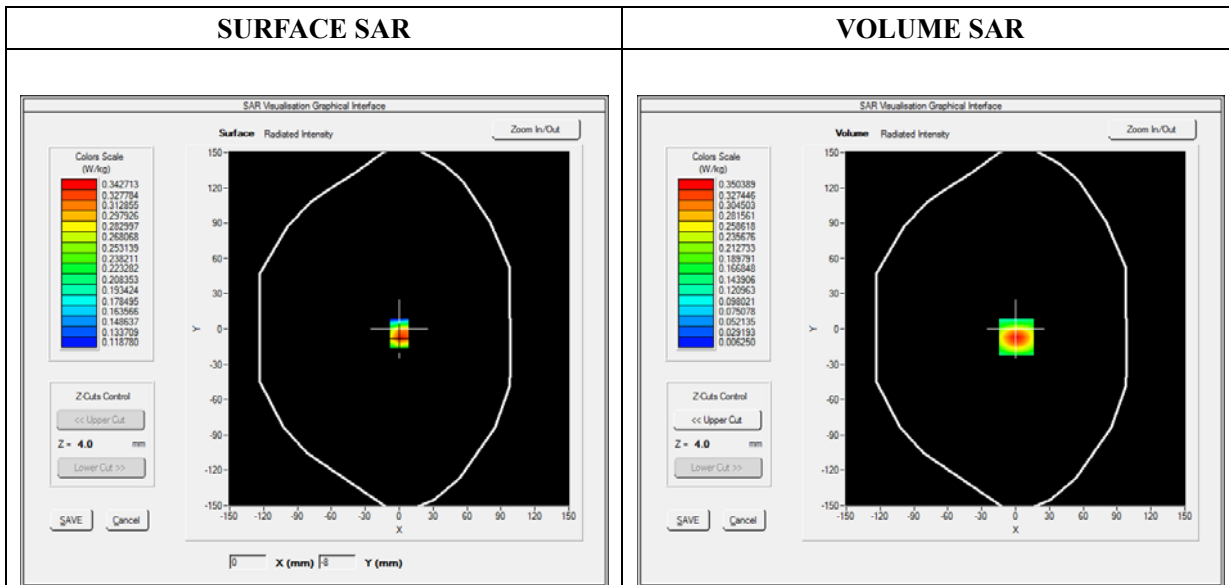


Maximum location: X=1.00, Y=-7.00

SAR Peak: 0.56 W/kg

SAR 10g (W/Kg)	0.167290
SAR 1g (W/Kg)	0.320763

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.5604	0.3504	0.1876	0.0992	0.0536

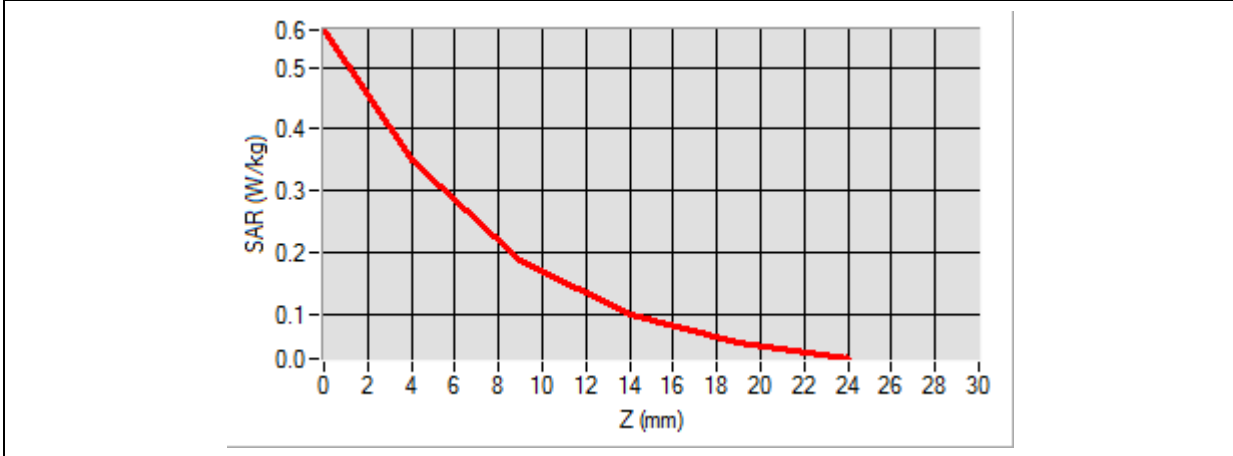

3D screen shot	Hot spot position

MEASUREMENT 48/74


Type: Phone measurement (Complete)
 Date of measurement: 2022-01-11
 Measurement duration: 12 minutes 3 seconds

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	NR n71
Channels	DFT-s-OFDM PI/2 BPSK, 20MHz, 1RB,High
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	688.000000
Relative Permittivity (real part)	41.314129
Conductivity (S/m)	0.853301
Power Variation (%)	0.856123
Ambient Temperature	21.1
Liquid Temperature	21.2

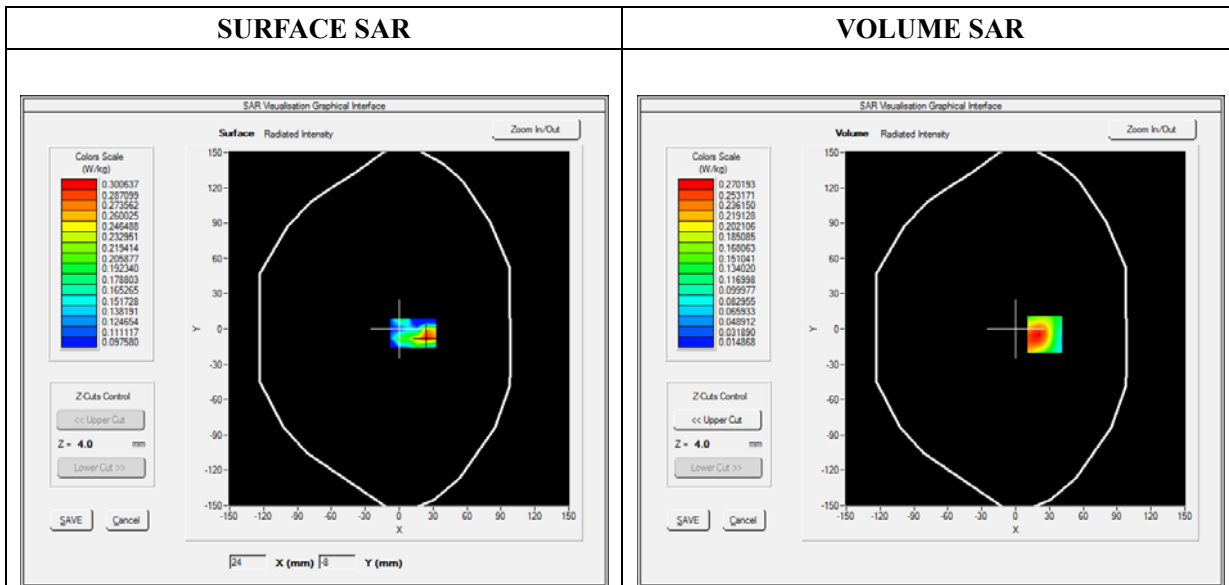


Maximum location: X=26.00, Y=-5.00

SAR Peak: 0.44 W/kg

SAR 10g (W/Kg)	0.176416
SAR 1g (W/Kg)	0.266243

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.3855	0.2702	0.1504	0.1079	0.1233

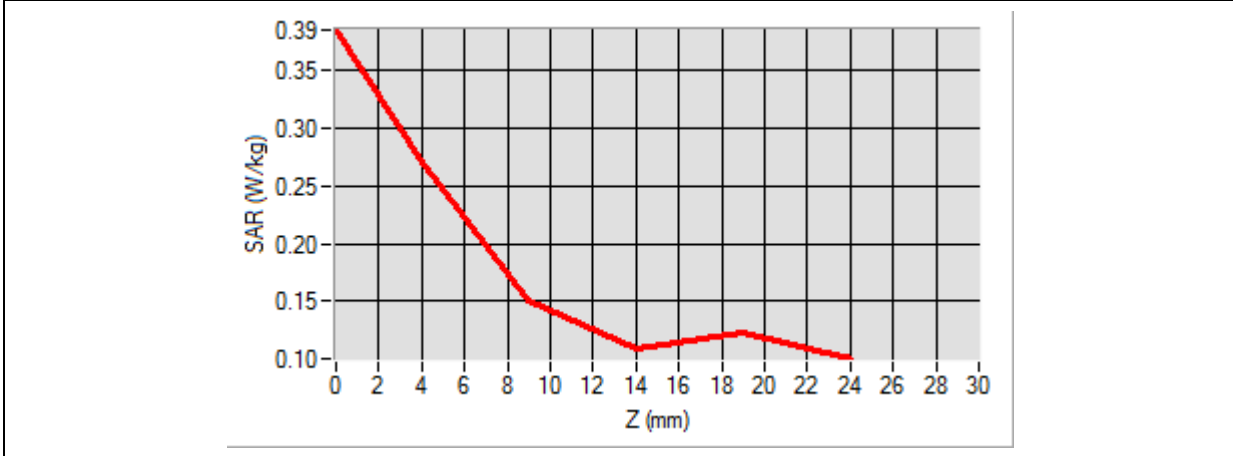

3D screen shot	Hot spot position

MEASUREMENT 49

Type: Phone measurement (Complete)

Date of measurement: 2021-12-18

Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WiFi(5.2GHz)_802.11a
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5240.000000
Relative Permittivity (real part)	35.642911
Conductivity (S/m)	4.761483
Power Variation (%)	0.342685
Ambient Temperature	22.0
Liquid Temperature	22.3

C. SAR Surface and Volume

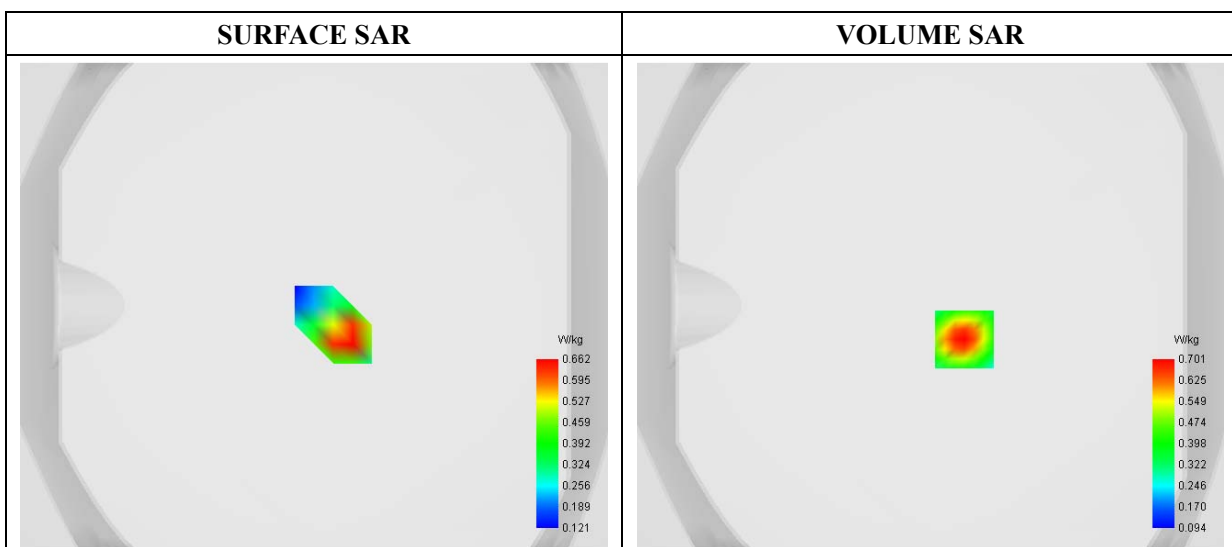

Maximum location: X=14.00, Y=-14.00

Waltek Testing Group (Shenzhen) Co., Ltd.


[Http://www.waltek.com.cn](http://www.waltek.com.cn)

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.250724
SAR 1g (W/Kg)	0.479891

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.9640	0.7011	0.5116	0.3770	0.2858	0.2241	0.1823	0.1532	0.1319

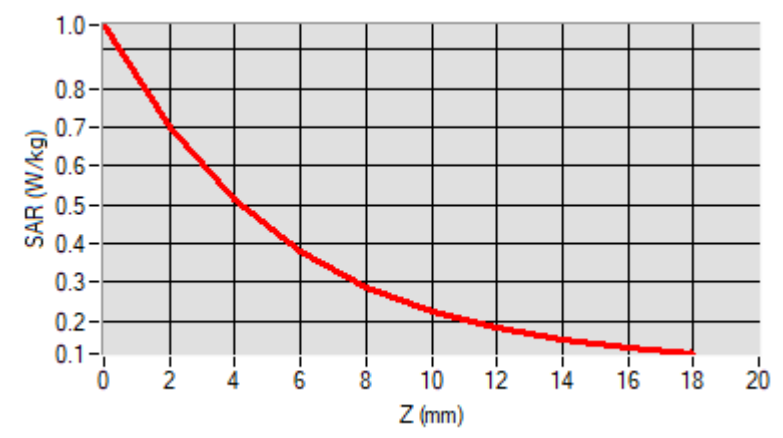

F. 3D Image

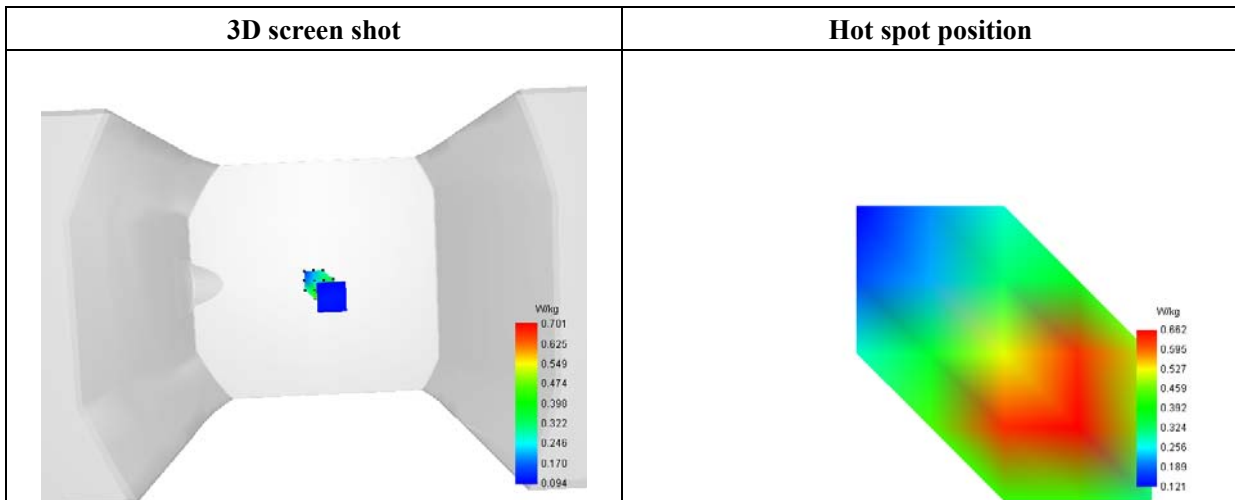

MEASUREMENT 50

Type: Phone measurement (Complete)

Date of measurement: 2021-12-18

Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	WiFi(5.3GHz)_802.11a
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5320.000000
Relative Permittivity (real part)	35.604129
Conductivity (S/m)	4.812694
Power Variation (%)	0.551589
Ambient Temperature	22.0
Liquid Temperature	22.3

C. SAR Surface and Volume

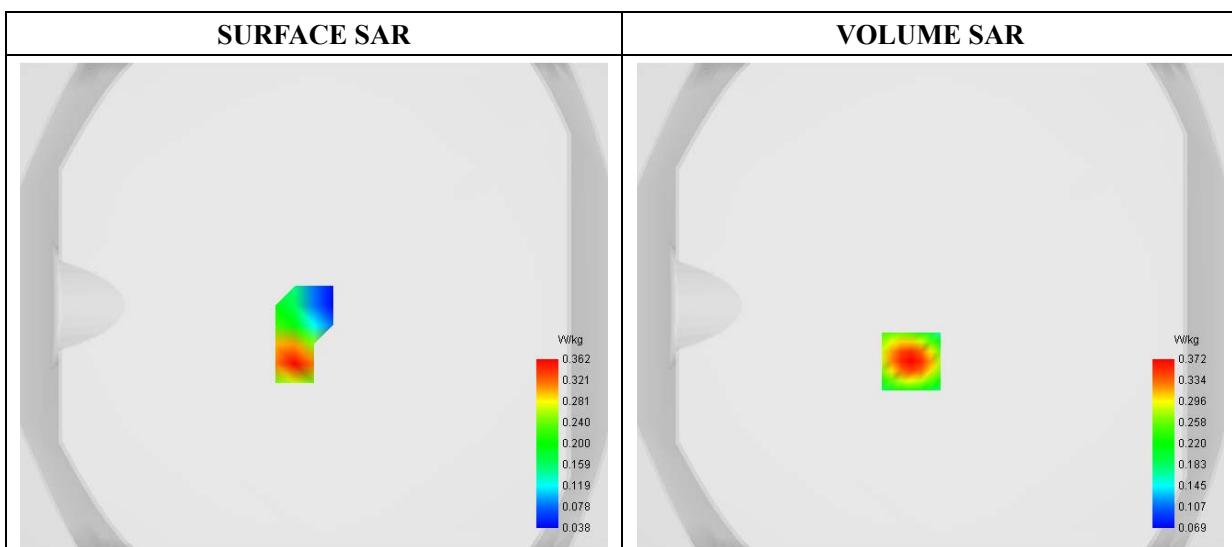


Maximum location: X=-8.00, Y=-23.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.151210
SAR 1g (W/Kg)	0.263207

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	0.5015	0.3715	0.2772	0.2095	0.1633	0.1318	0.1103	0.0954	0.0844	

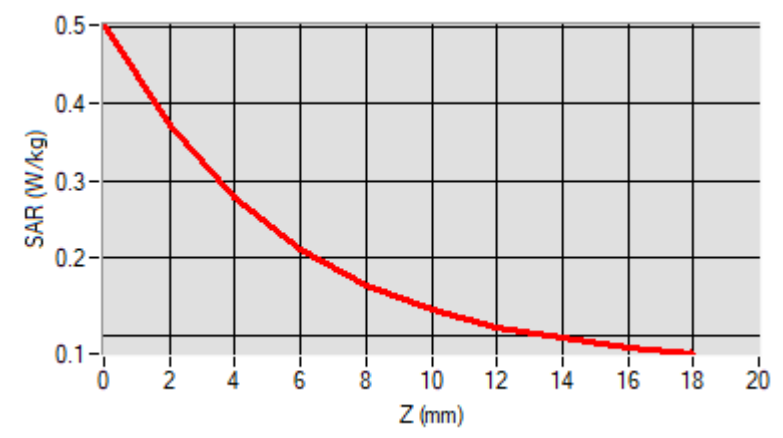

F. 3D Image

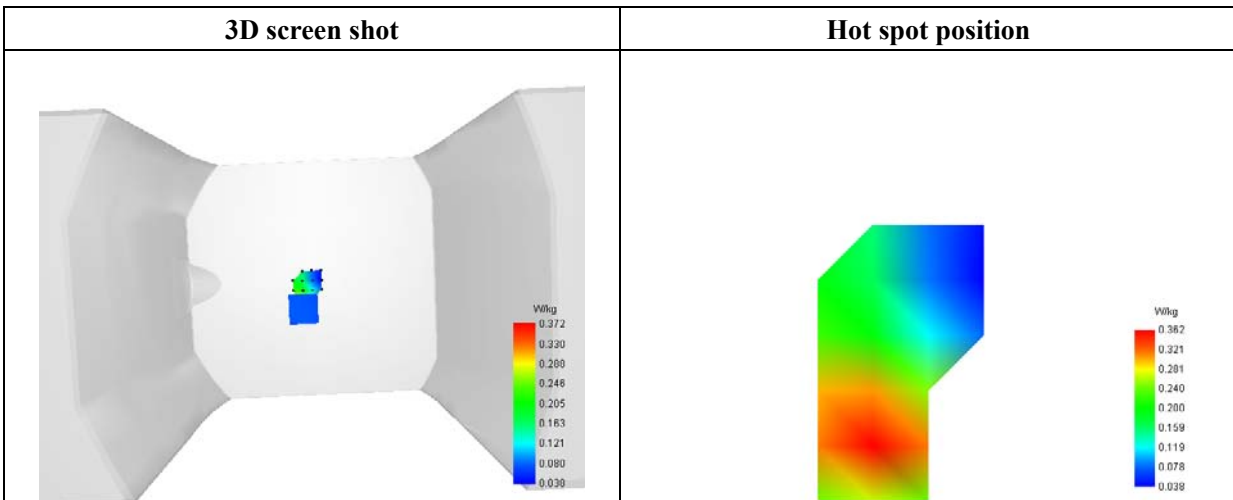

MEASUREMENT 51

Type: Phone measurement (Complete)

Date of measurement: 2021-12-18

Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WiFi(5.3GHz)_802.11a
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5500.000000
Relative Permittivity (real part)	35.612918
Conductivity (S/m)	5.121523
Power Variation (%)	1.544581
Ambient Temperature	22.0
Liquid Temperature	22.3

C. SAR Surface and Volume

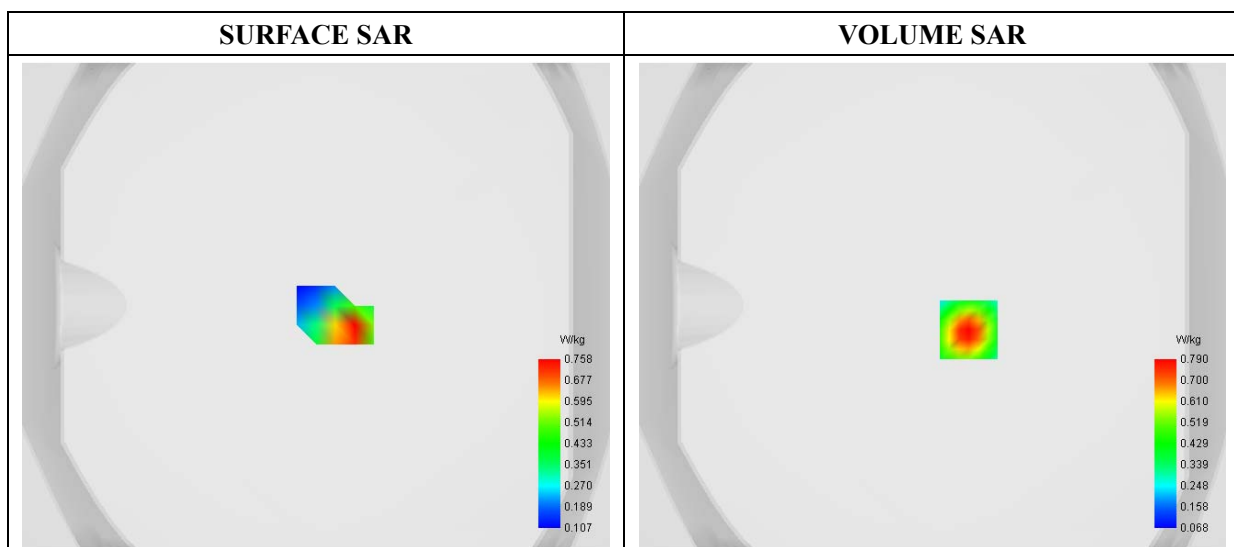

Maximum location: X=15.00, Y=-10.00

Waltek Testing Group (Shenzhen) Co., Ltd.


[Http://www.waltek.com.cn](http://www.waltek.com.cn)

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.253613
SAR 1g (W/Kg)	0.524463

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	1.1055	0.7900	0.5637	0.4038	0.2960	0.2233	0.1740	0.1396	0.1143	

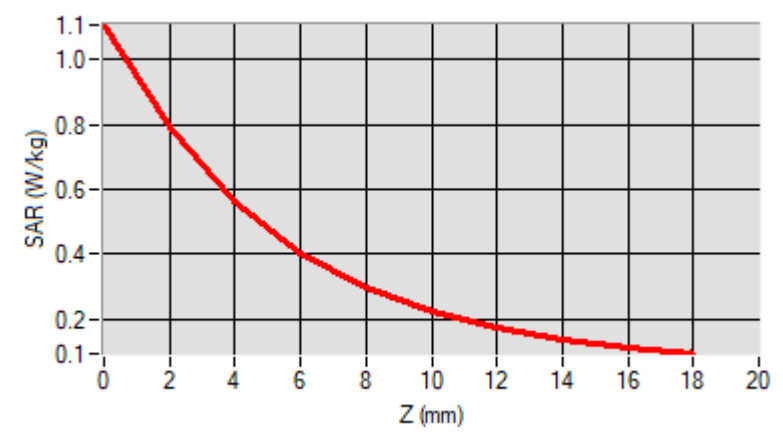

F. 3D Image

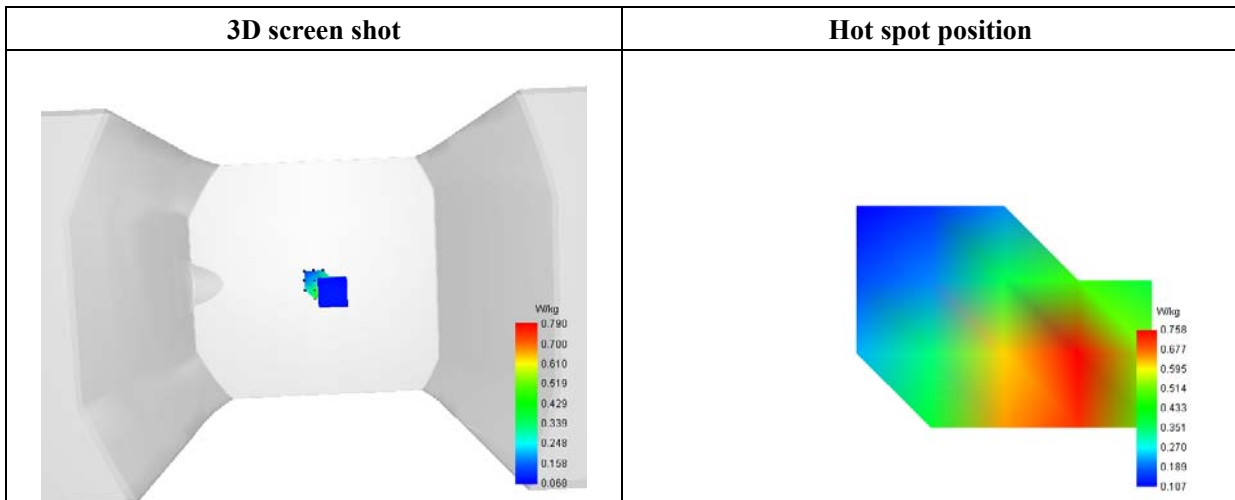

MEASUREMENT 52

Type: Phone measurement (Complete)

Date of measurement: 2021-12-18

Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WiFi(5.8GHz)_802.11a
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5745.000000
Relative Permittivity (real part)	35.320841
Conductivity (S/m)	5.210854
Power Variation (%)	3.297814
Ambient Temperature	22.0
Liquid Temperature	22.3

C. SAR Surface and Volume

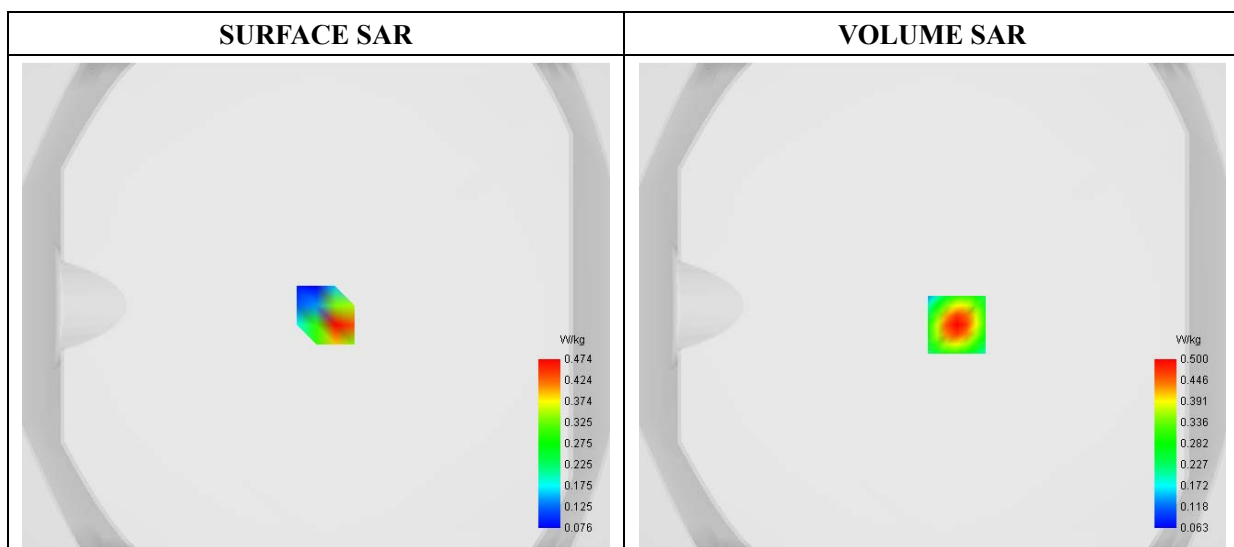


Maximum location: X=10.00, Y=-8.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.176156
SAR 1g (W/Kg)	0.338718

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.6943	0.5003	0.3617	0.2644	0.1996	0.1566	0.1281	0.1089	0.0952

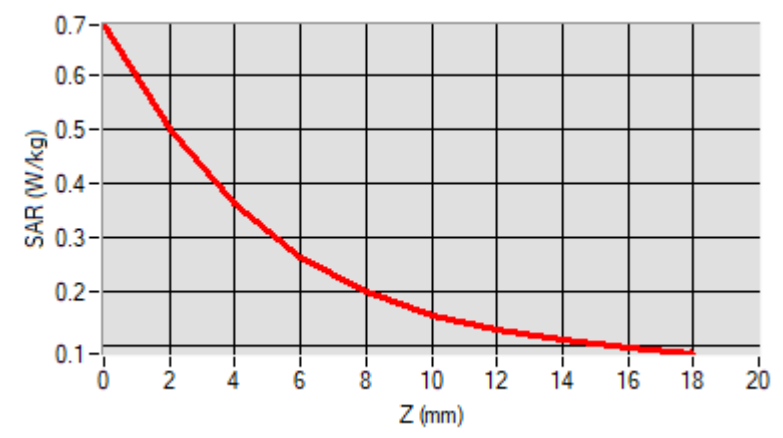

F. 3D Image

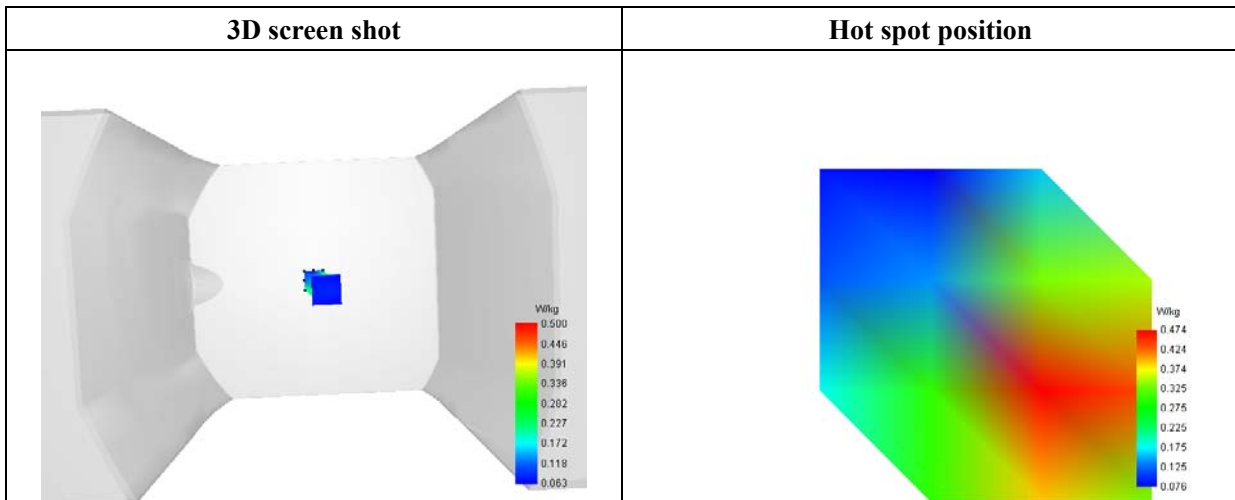

MEASUREMENT 53/79

Type: Phone measurement (Complete)

Date of measurement: 2021-12-22


Measurement duration: 12 minutes 3 seconds

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WiFi(2.4GHz)_802.11b
Channels	Middle
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	2437.000000
Relative Permittivity (real part)	38.201835
Conductivity (S/m)	1.734129
Power Variation (%)	3.200514
Ambient Temperature	22.0
Liquid Temperature	22.3

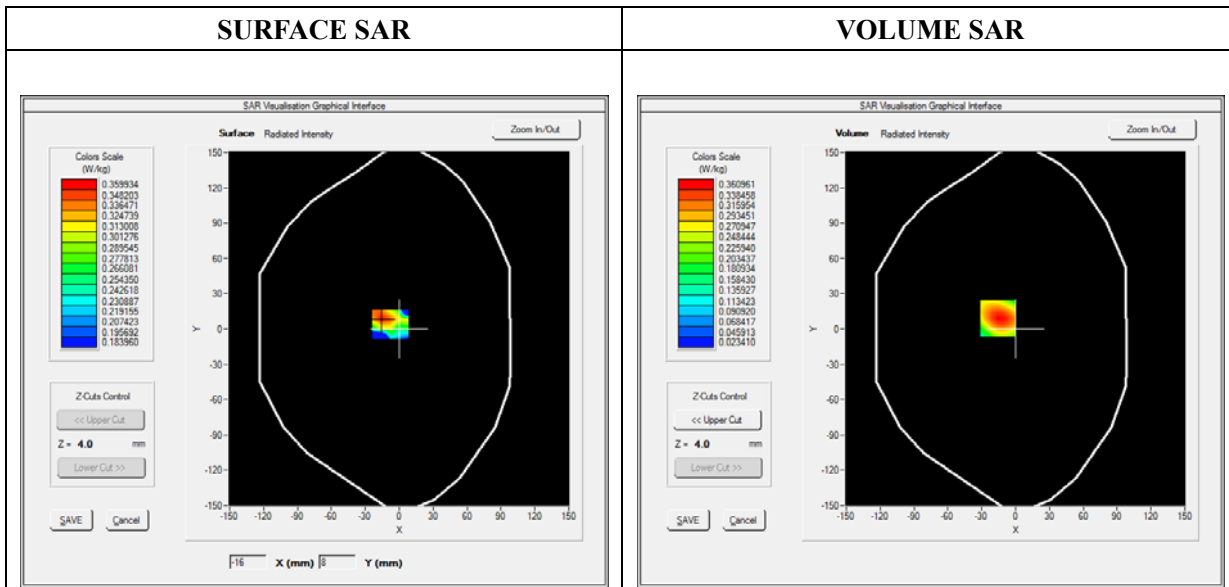


Maximum location: X=-16.00, Y=9.00

SAR Peak: 0.53 W/kg

SAR 10g (W/Kg)	0.202828
SAR 1g (W/Kg)	0.339661

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.5275	0.3610	0.2211	0.1358	0.0851

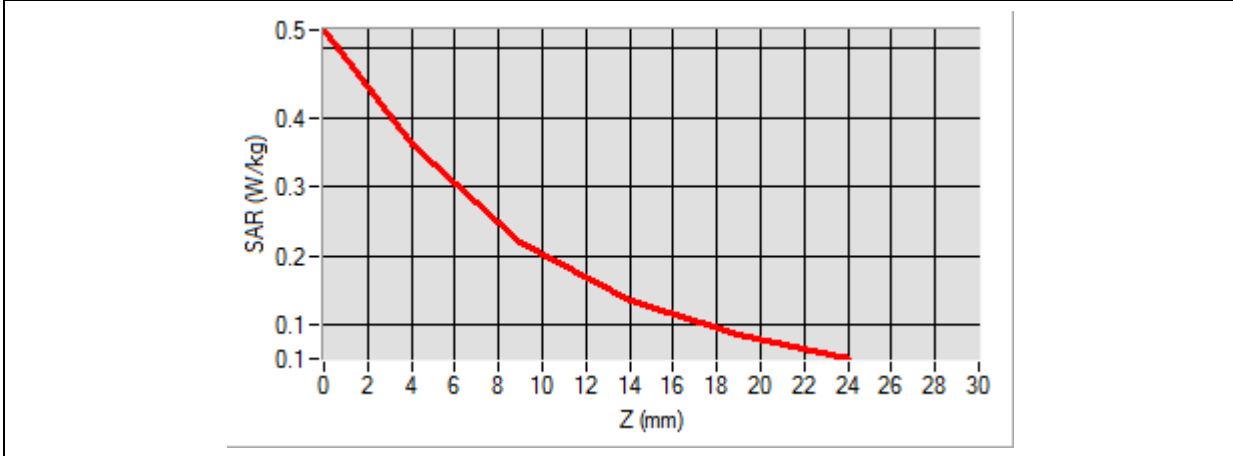

3D screen shot	Hot spot position

MEASUREMENT 54/80

Type: Phone measurement (Complete)

Date of measurement: 2021-12-22


Measurement duration: 12 minutes 3 seconds

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	Bluetooth
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	2480.000000
Relative Permittivity (real part)	38.201881
Conductivity (S/m)	1.734621
Power Variation (%)	3.117514
Ambient Temperature	22.0
Liquid Temperature	22.3

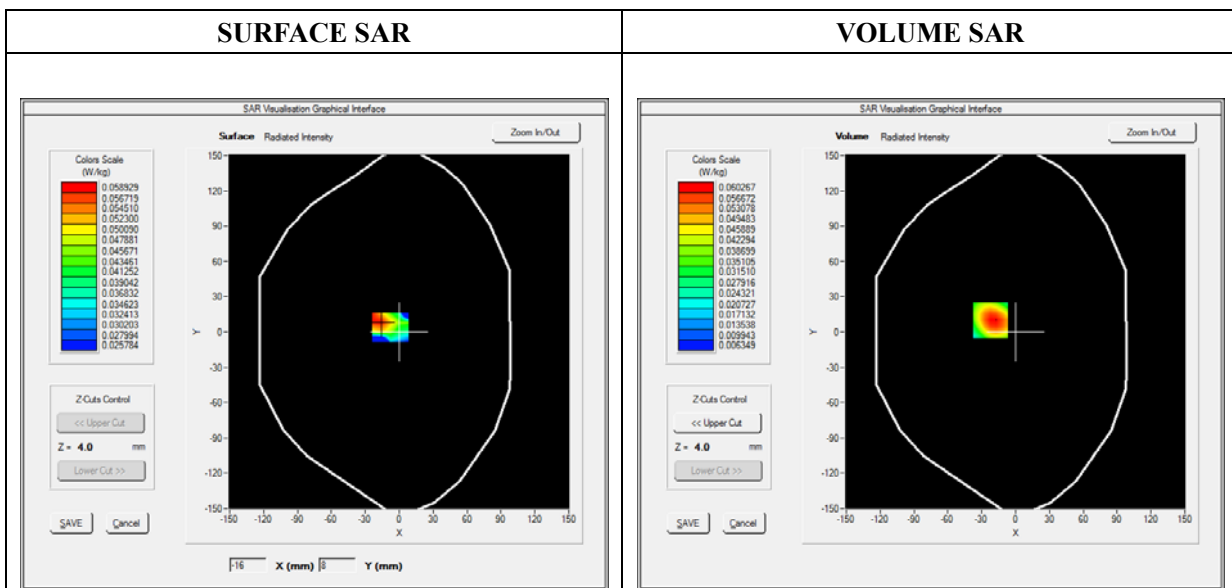


Maximum location: X=-22.00, Y=10.00

SAR Peak: 0.09 W/kg

SAR 10g (W/Kg)	0.033844
SAR 1g (W/Kg)	0.057010

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.1076	0.0603	0.0339	0.0226	0.0147

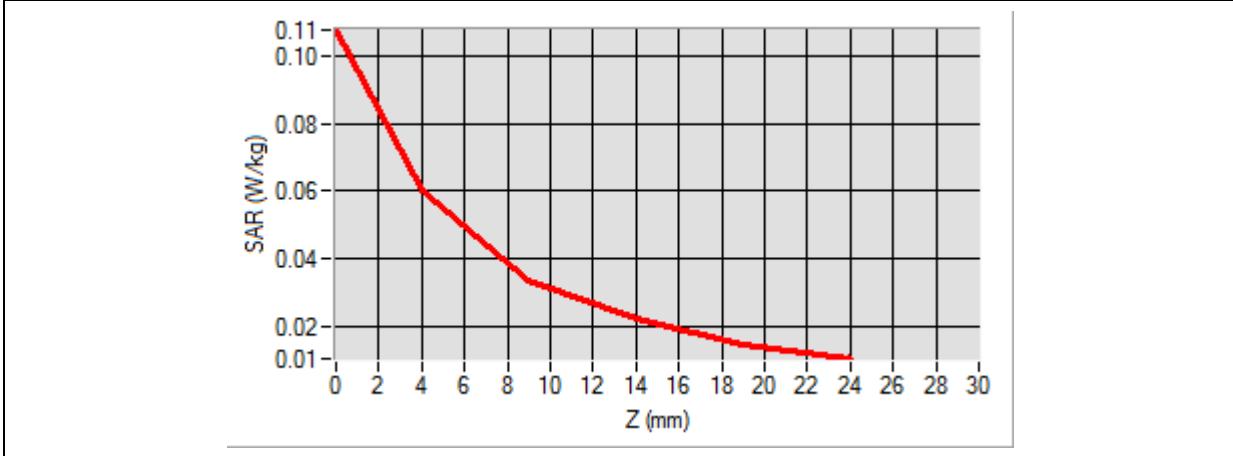

3D screen shot	Hot spot position

MEASUREMENT 55

Type: Phone measurement (Complete)

Date of measurement: 2021-12-18


Measurement duration: 11 minutes 48 seconds

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	GPRS850_2TX
Channels	Middle
Signal	Duty Cycle: 1:4

B. SAR Measurement Results

Frequency (MHz)	836.60000
Relative Permittivity (real part)	41.160249
Conductivity (S/m)	0.881241
Power Variation (%)	3.141020
Ambient Temperature	21.1
Liquid Temperature	21.3

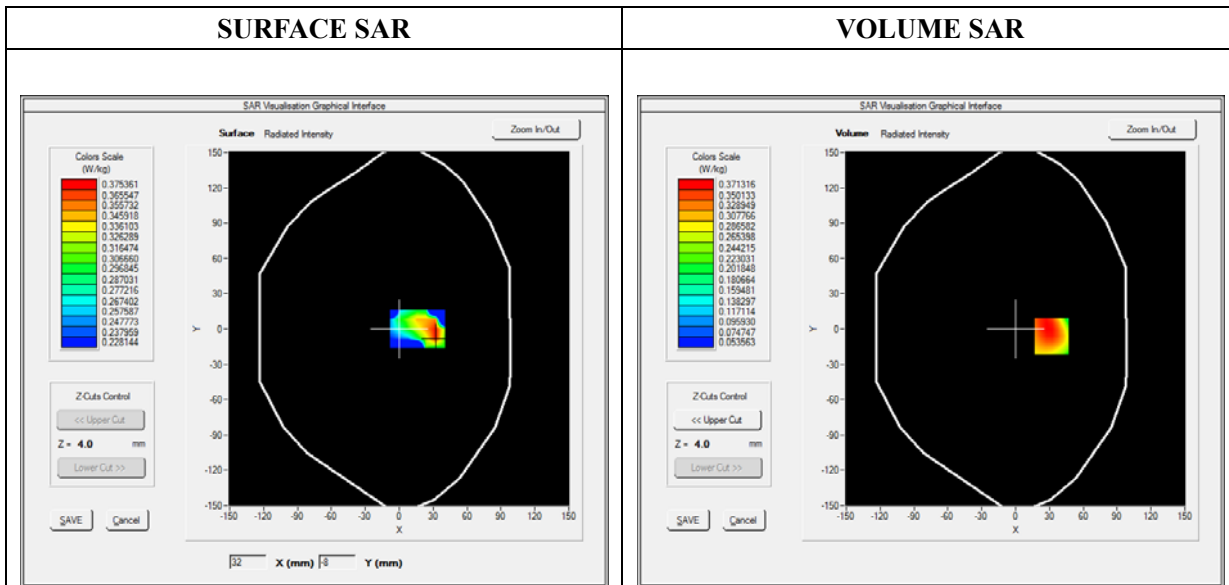


Maximum location: X=32.00, Y=-6.00

SAR Peak: 0.56 W/kg

SAR 10g (W/Kg)	0.244201
SAR 1g (W/Kg)	0.362317

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.4259	0.3713	0.2353	0.1516	0.1369

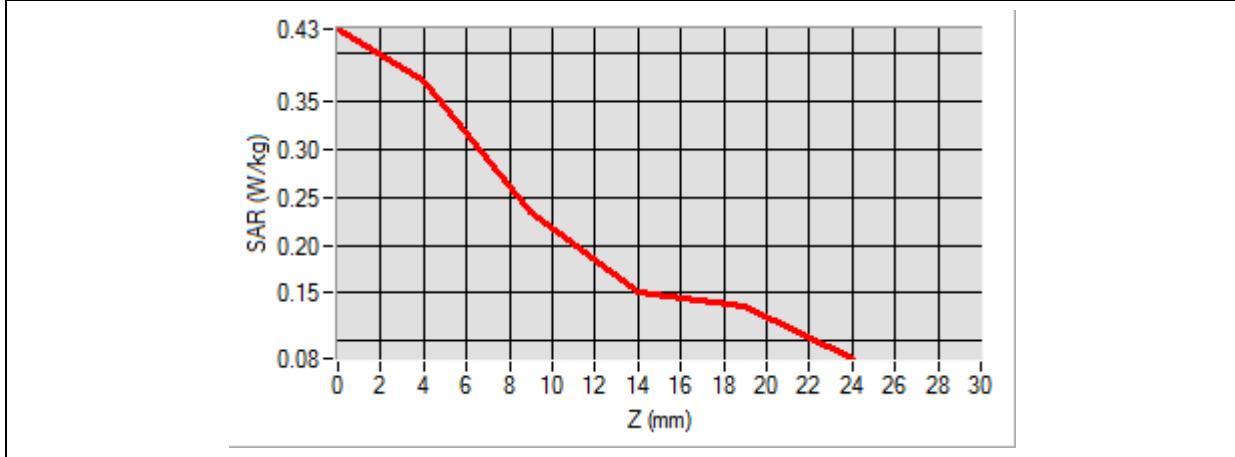

3D screen shot	Hot spot position
<p>A 3D perspective view of a grey mobile phone handset. A grid of small blue dots is overlaid on the front face of the phone. A small area in the center of the grid is highlighted with a color gradient from green to red, indicating the location of the maximum SAR value.</p>	<p>A 2D heatmap representing the SAR distribution on the front face of the phone. The color scale ranges from yellow (low SAR) to red (high SAR). The highest intensity (red) is concentrated in the center-right area, corresponding to the hot spot location shown in the 3D view.</p>

MEASUREMENT 56


Type: Phone measurement (Complete)
 Date of measurement: 2021-12-18
 Measurement duration: 11 minutes 48 seconds

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	GPRS1900_4TX
Channels	Low
Signal	Duty Cycle: 1:2

B. SAR Measurement Results

Frequency (MHz)	1850.200000
Relative Permittivity (real part)	38.584029
Conductivity (S/m)	1.371223
Power Variation (%)	1.088611
Ambient Temperature	21.1
Liquid Temperature	21.3

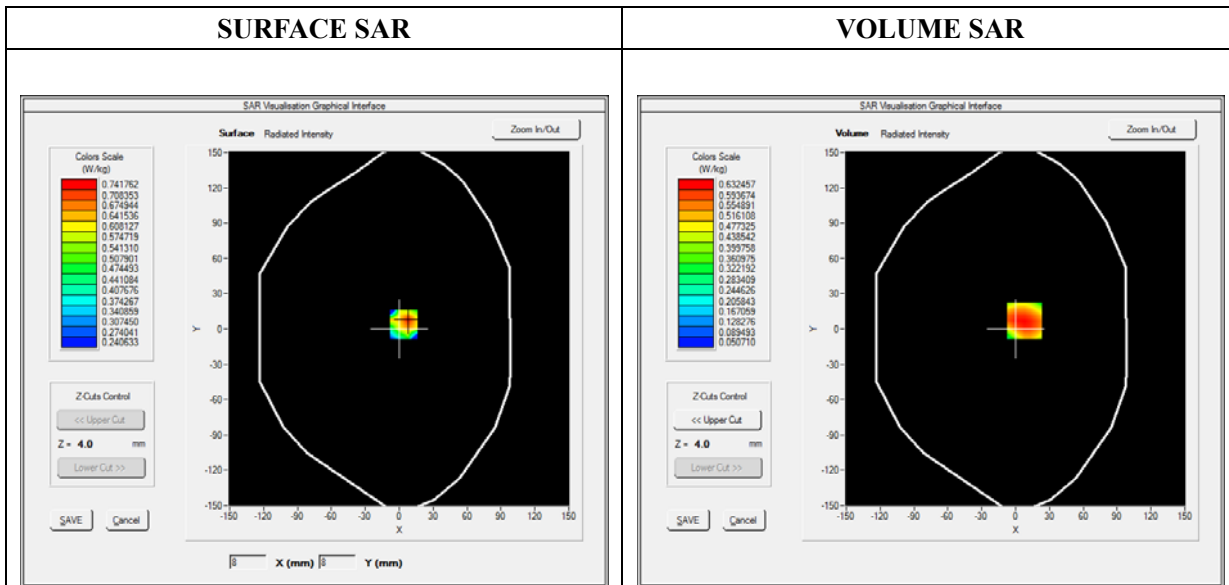


Maximum location: X=8.00, Y=7.00

SAR Peak: 0.82 W/kg

SAR 10g (W/Kg)	0.395305
SAR 1g (W/Kg)	0.599970

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.7767	0.6325	0.4693	0.3272	0.2085

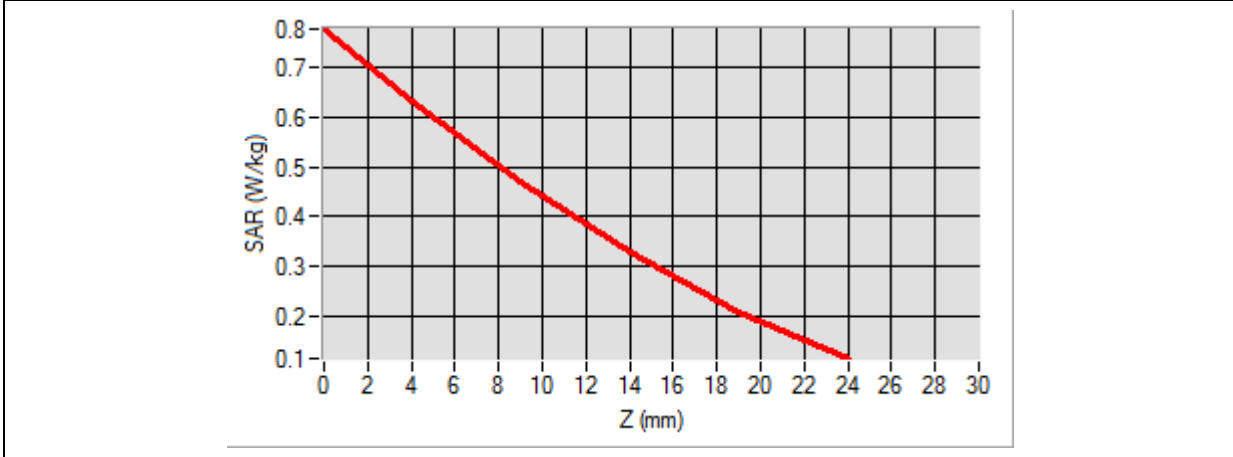

3D screen shot	Hot spot position

MEASUREMENT 57

Type: Phone measurement (Complete)

Date of measurement: 2021-12-18


Measurement duration: 12 minutes 3 seconds

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Bottom
Band	WCDMA1900_RMC
Channels	Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results


Frequency (MHz)	1852.400000
Relative Permittivity (real part)	38.580124
Conductivity (S/m)	1.369949
Power Variation (%)	1.210081
Ambient Temperature	21.1
Liquid Temperature	21.3

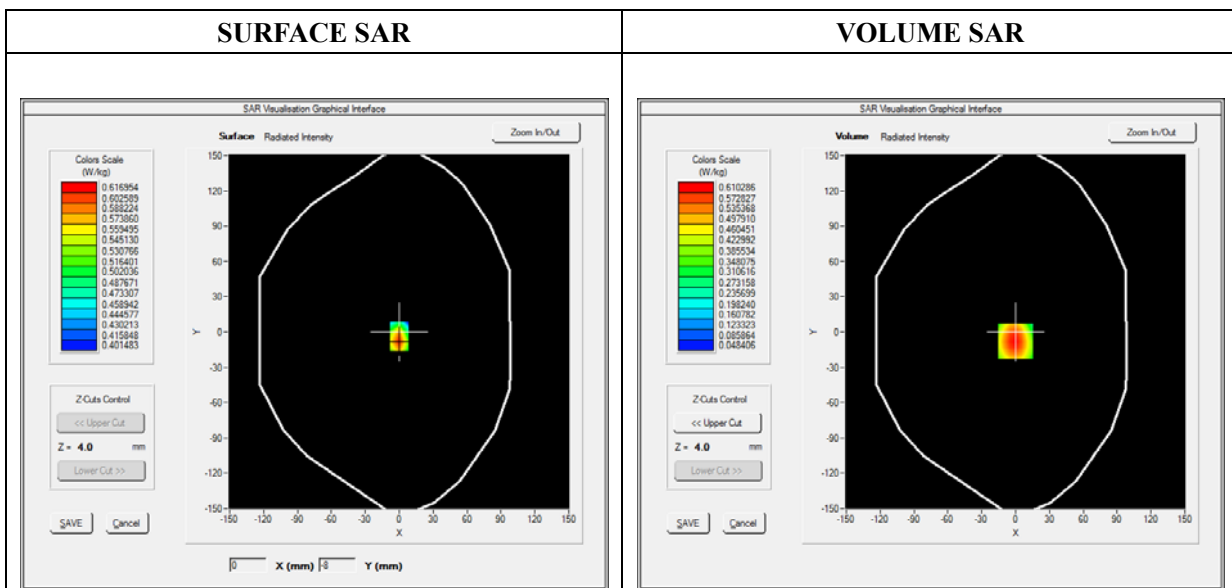

SAR Peak: 0.87 W/kg

SAR 10g (W/Kg)	0.352012
SAR 1g (W/Kg)	0.572438

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.8696	0.6103	0.3879	0.2485	0.1627

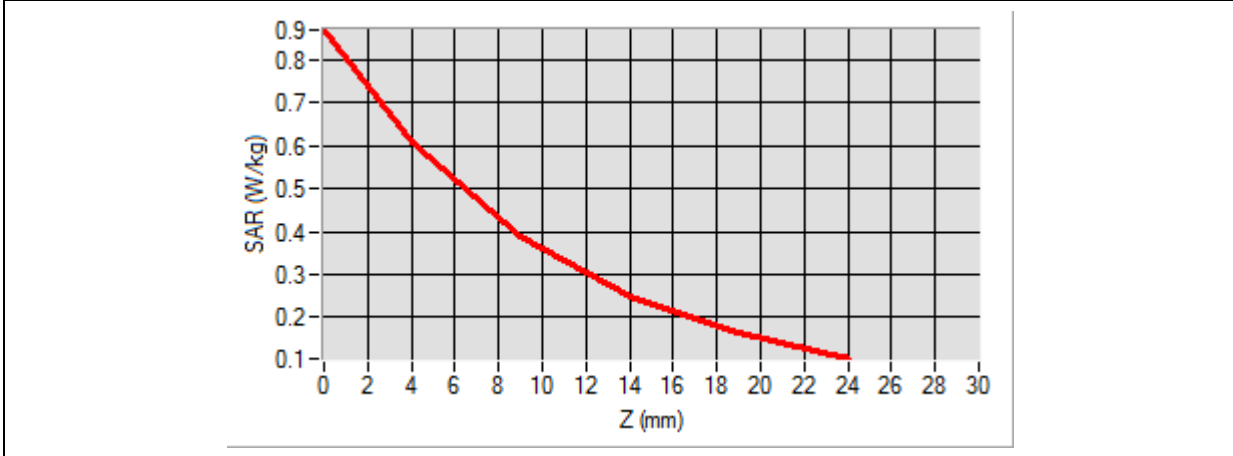

3D screen shot	Hot spot position

MEASUREMENT 58

Type: Phone measurement (Complete)

Date of measurement: 2021-12-18


Measurement duration: 12 minutes 3 seconds

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Bottom
Band	WCDMA1700_RMC
Channels	Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	1712.400000
Relative Permittivity (real part)	39.091524
Conductivity (S/m)	1.360949
Power Variation (%)	0.598741
Ambient Temperature	21.1
Liquid Temperature	21.3

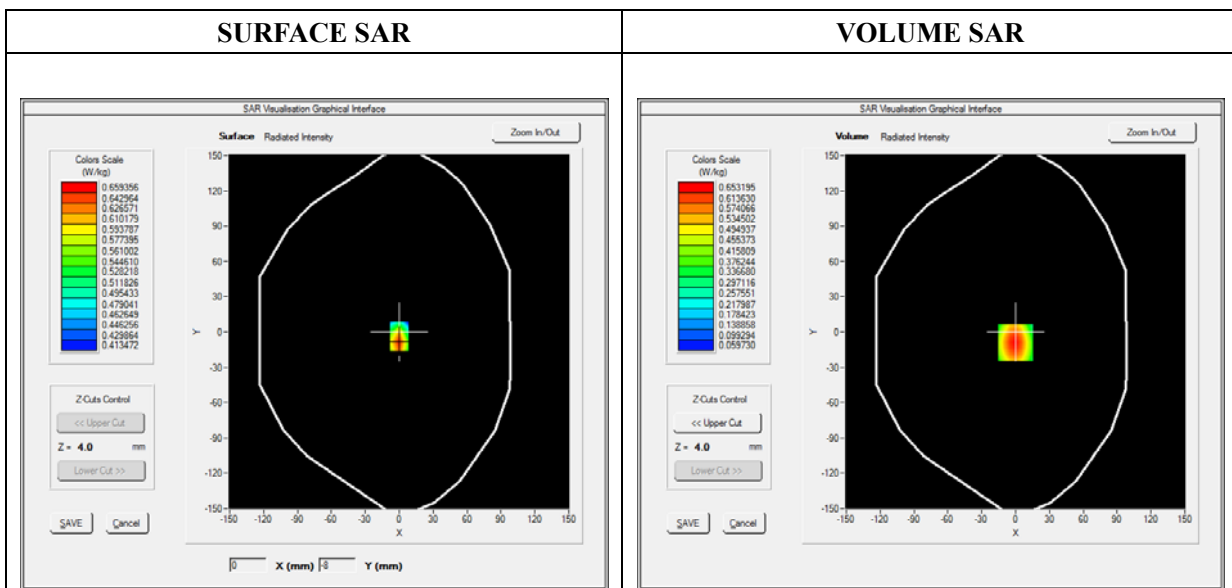


Maximum location: X=0.00, Y=-9.00

SAR Peak: 0.92 W/kg

SAR 10g (W/Kg)	0.379865
SAR 1g (W/Kg)	0.610853

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.9179	0.6532	0.4237	0.2779	0.1866

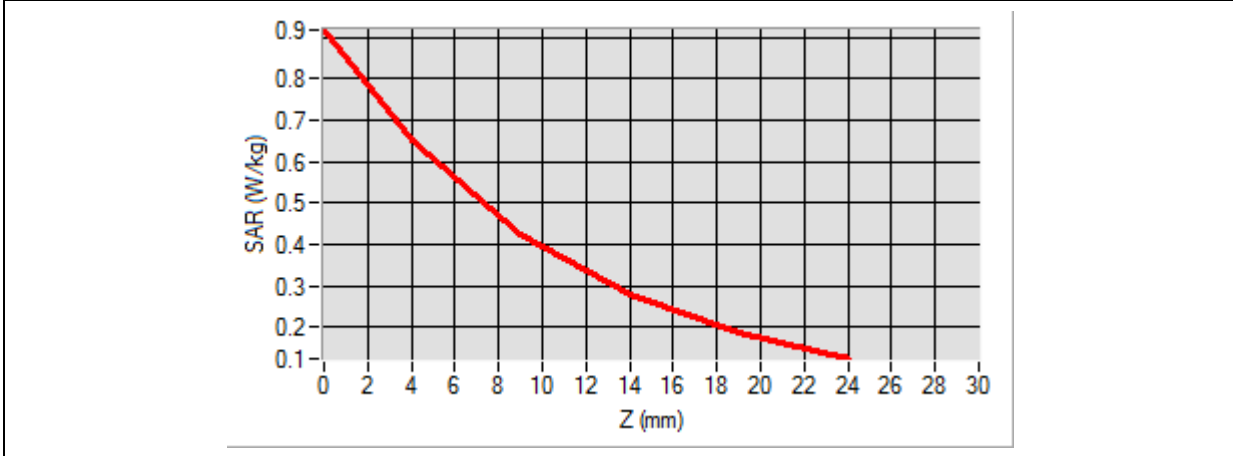

3D screen shot	Hot spot position
<p>A 3D perspective view of a mobile phone. A grid of small blue dots is overlaid on the back of the phone. A small, localized area in the center of the grid is highlighted with a color gradient from green to yellow to red, indicating the location of the maximum SAR exposure (hot spot).</p>	<p>A 2D rectangular color gradient representing the hot spot. The color transitions from red at the top to orange at the bottom, indicating the intensity of the SAR exposure across the vertical axis of the hot spot.</p>

MEASUREMENT 62

Type: Phone measurement (Complete)

Date of measurement: 2021-12-20


Measurement duration: 12 minutes 3 seconds

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Bottom
Band	LTE Band 5
Channels	QPSK, 10MHz, 1RB,High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	844.000000
Relative Permittivity (real part)	41.161586
Conductivity (S/m)	0.883839
Power Variation (%)	1.256984
Ambient Temperature	21.1
Liquid Temperature	21.3

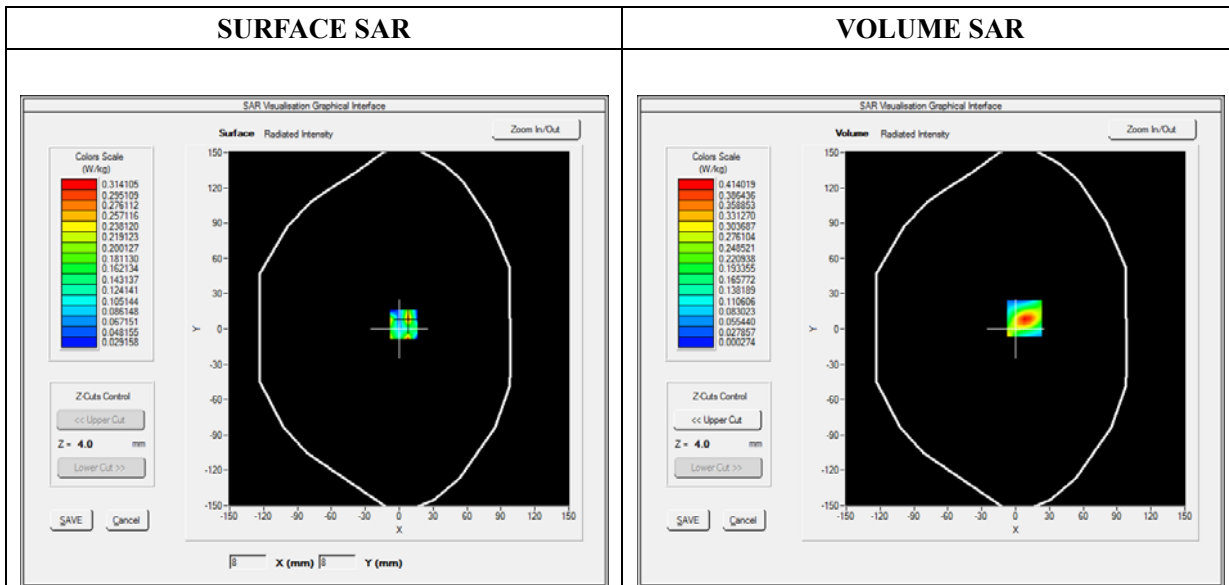


Maximum location: X=8.00, Y=9.00

SAR Peak: 0.65 W/kg

SAR 10g (W/Kg)	0.245505
SAR 1g (W/Kg)	0.390979

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.6282	0.4140	0.2659	0.2152	0.2278

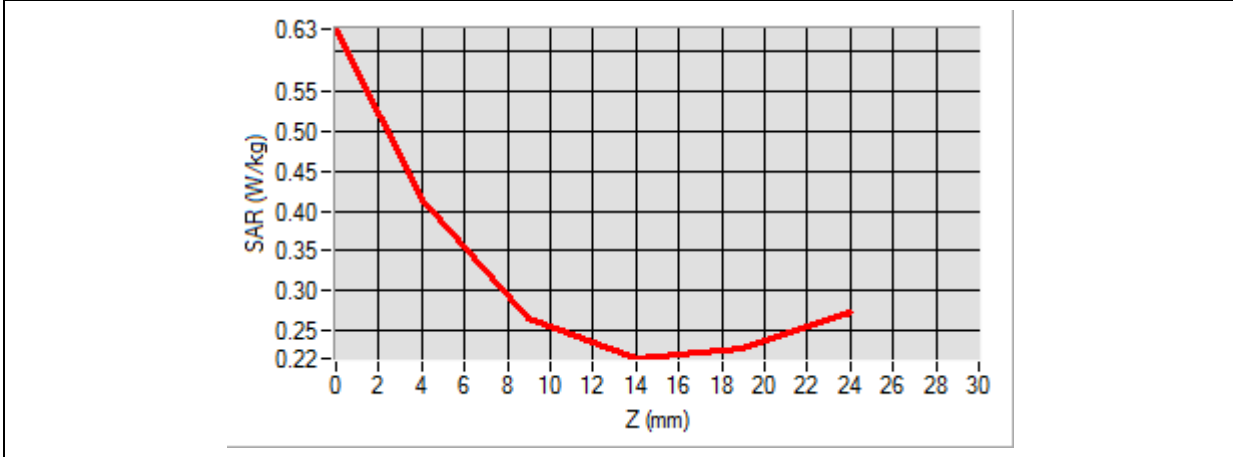

3D screen shot	Hot spot position

MEASUREMENT 66


Type: Phone measurement (Complete)
 Date of measurement: 2021-12-21
 Measurement duration: 12 minutes 3 seconds

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Bottom
Band	LTE Band 25
Channels	QPSK, 20MHz, 1RB,High
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	1905.000000
Relative Permittivity (real part)	38.584881
Conductivity (S/m)	1.371294
Power Variation (%)	1.375412
Ambient Temperature	21.1
Liquid Temperature	21.2

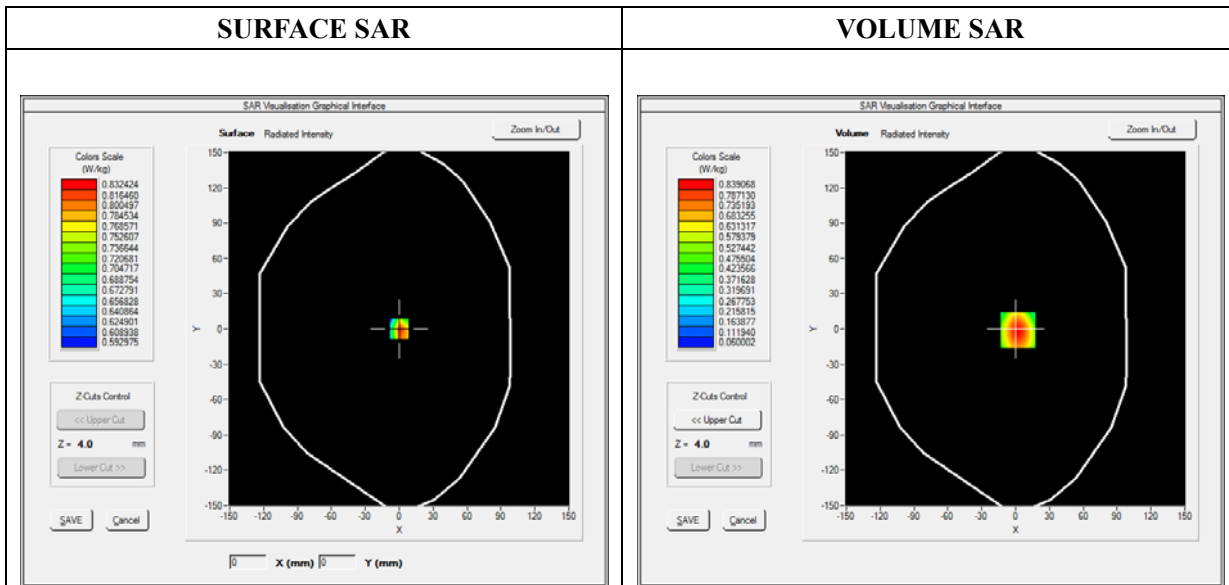


Maximum location: X=2.00, Y=-1.00

SAR Peak: 1.21 W/kg

SAR 10g (W/Kg)	0.473502
SAR 1g (W/Kg)	0.784547

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.2130	0.8391	0.5228	0.3283	0.2112

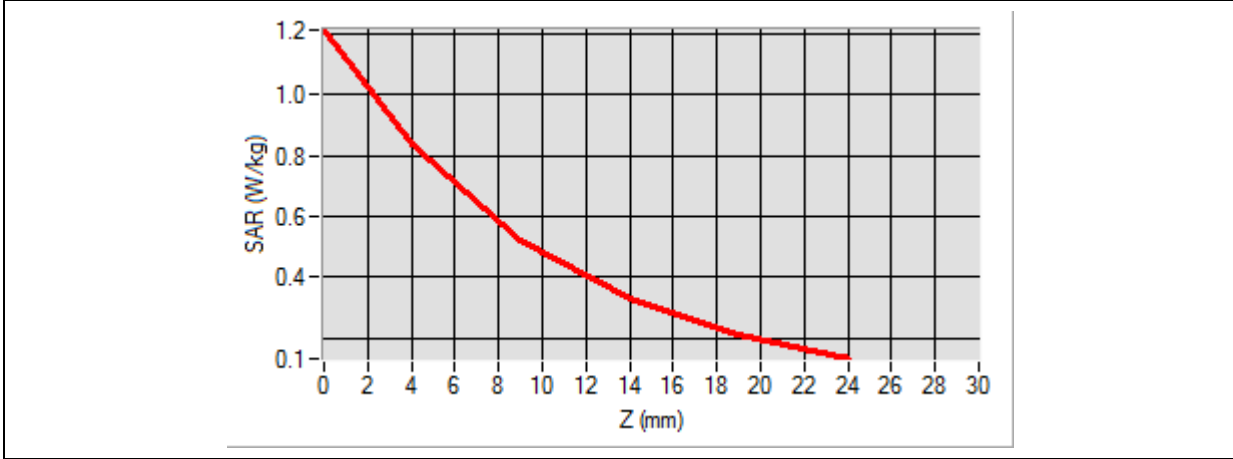

3D screen shot	Hot spot position

MEASUREMENT 73

Type: Phone measurement (Complete)

Date of measurement: 2022-01-11


Measurement duration: 12 minutes 3 seconds

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	NR n41
Channels	DFT-s-OFDM QPSK, 100MHz, 1RB,Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2593.000000
Relative Permittivity (real part)	38.652697
Conductivity (S/m)	1.940987
Power Variation (%)	0.854123
Ambient Temperature	21.1
Liquid Temperature	21.2

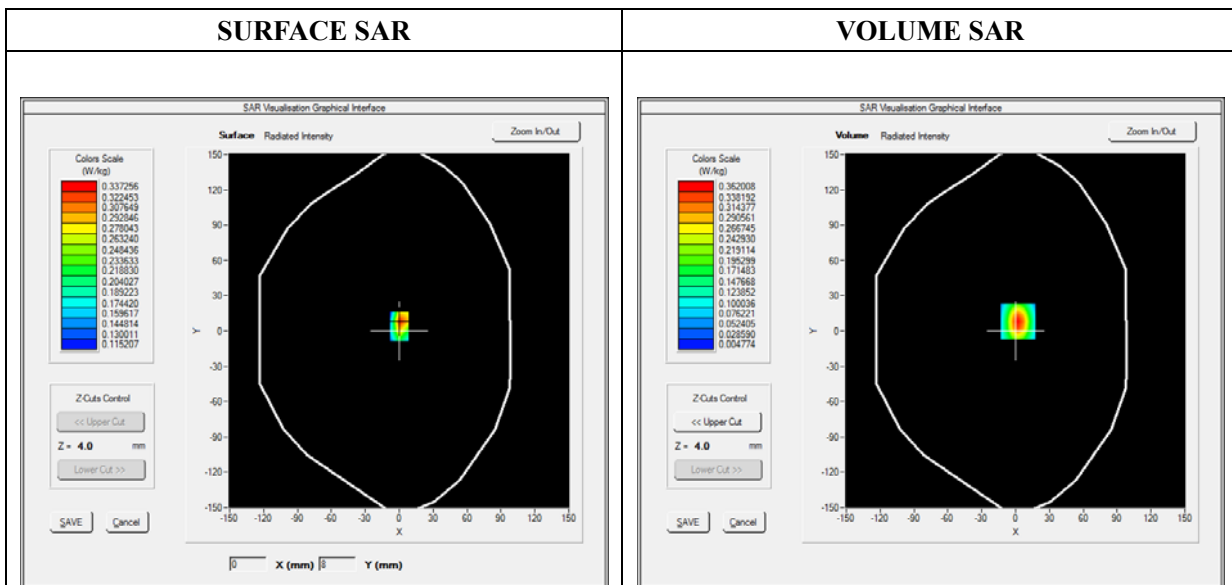


Maximum location: X=2.00, Y=8.00

SAR Peak: 0.69 W/kg

SAR 10g (W/Kg)	0.145545
SAR 1g (W/Kg)	0.328549

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.6900	0.3620	0.1469	0.0580	0.0267

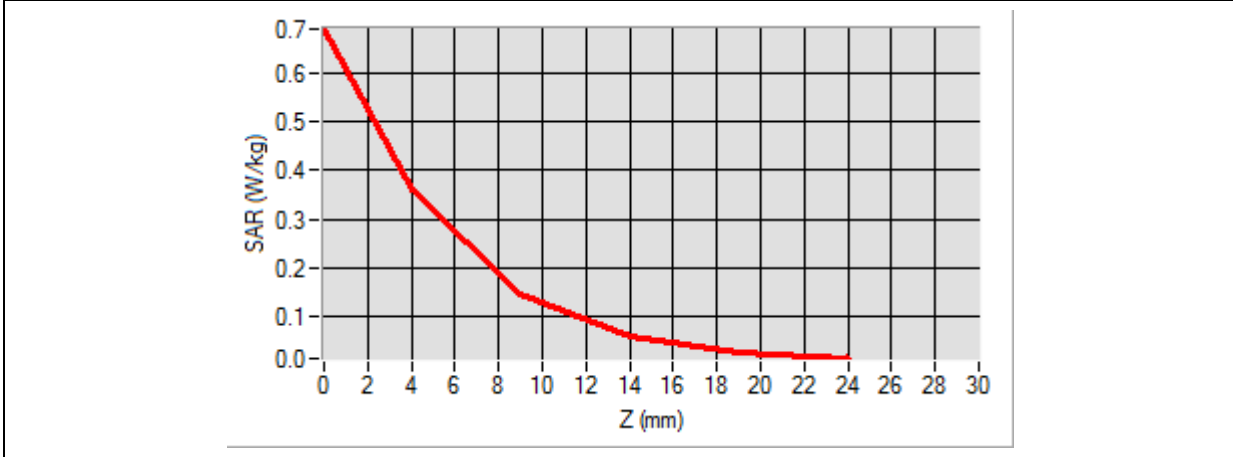

3D screen shot	Hot spot position
<p>A 3D perspective view of a grey device with a grid of blue dots on its surface. A small area of the grid is highlighted with a color gradient from yellow to red, indicating the hot spot position.</p>	<p>A 2D rectangular heatmap showing a color gradient from yellow to red, representing the hot spot position. The red area is centered, indicating the highest SAR value.</p>

MEASUREMENT 75

Type: Phone measurement (Complete)

Date of measurement: 2021-12-18

Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Top
Band	WiFi(5.2GHz)_802.11a
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5240.000000
Relative Permittivity (real part)	35.642911
Conductivity (S/m)	4.761483
Power Variation (%)	0.851236
Ambient Temperature	22.0
Liquid Temperature	22.3

C. SAR Surface and Volume

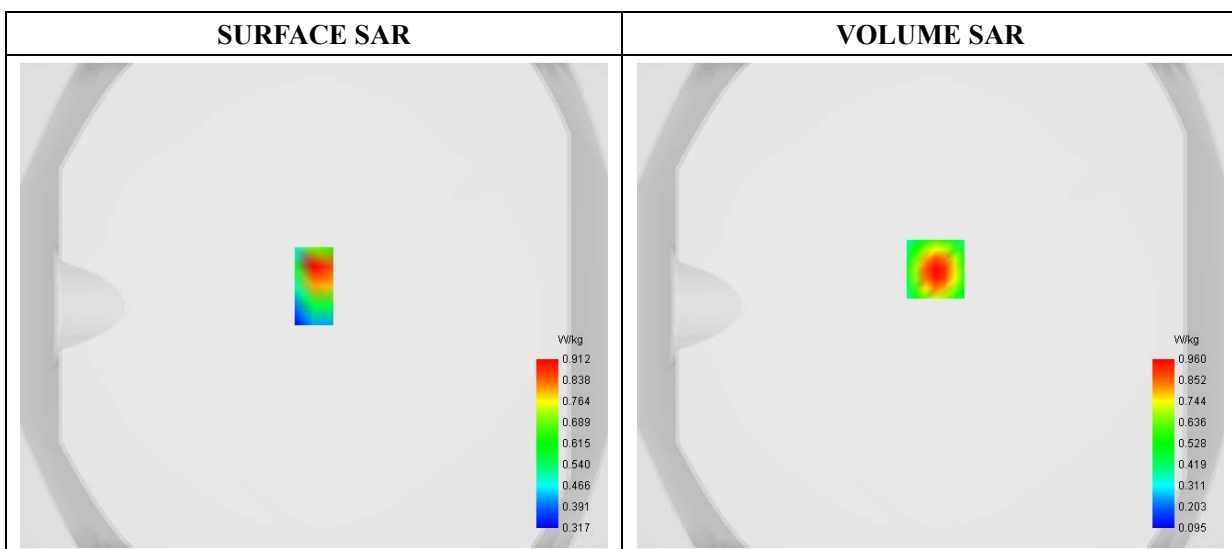


Maximum location: X=2.00, Y=15.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.325291
SAR 1g (W/Kg)	0.649313

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	1.3337	0.9604	0.6918	0.5013	0.3724	0.2853	0.2259	0.1844	0.1538	0.1538

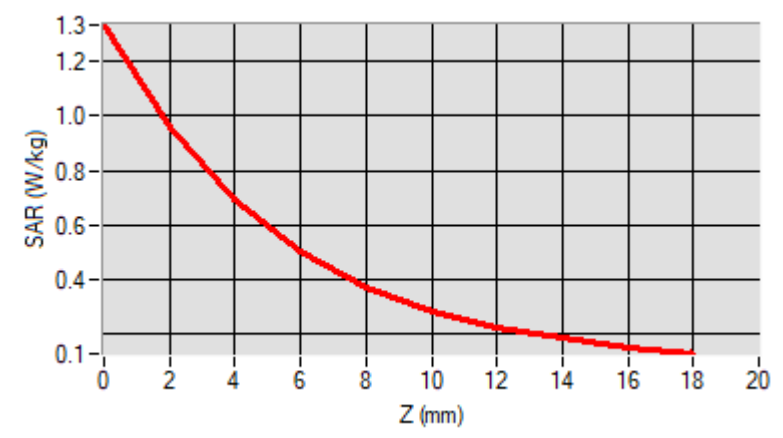

F. 3D Image

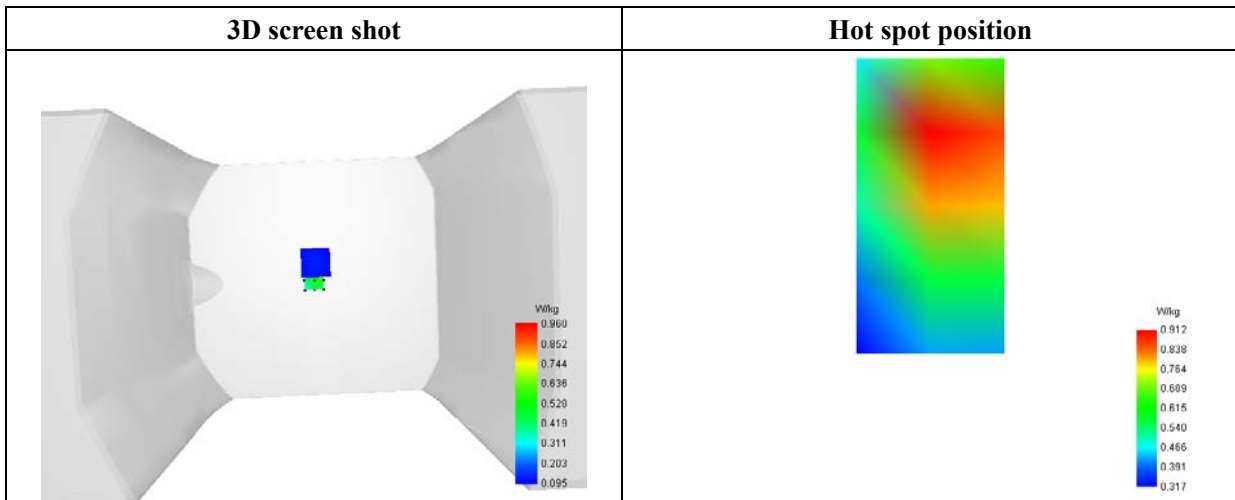

MEASUREMENT 76

Type: Phone measurement (Complete)

Date of measurement: 2021-12-18

Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Top
Band	WiFi(5.3GHz)_802.11a
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5320.000000
Relative Permittivity (real part)	35.604129
Conductivity (S/m)	4.812694
Power Variation (%)	1.500560
Ambient Temperature	22.0
Liquid Temperature	22.3

C. SAR Surface and Volume

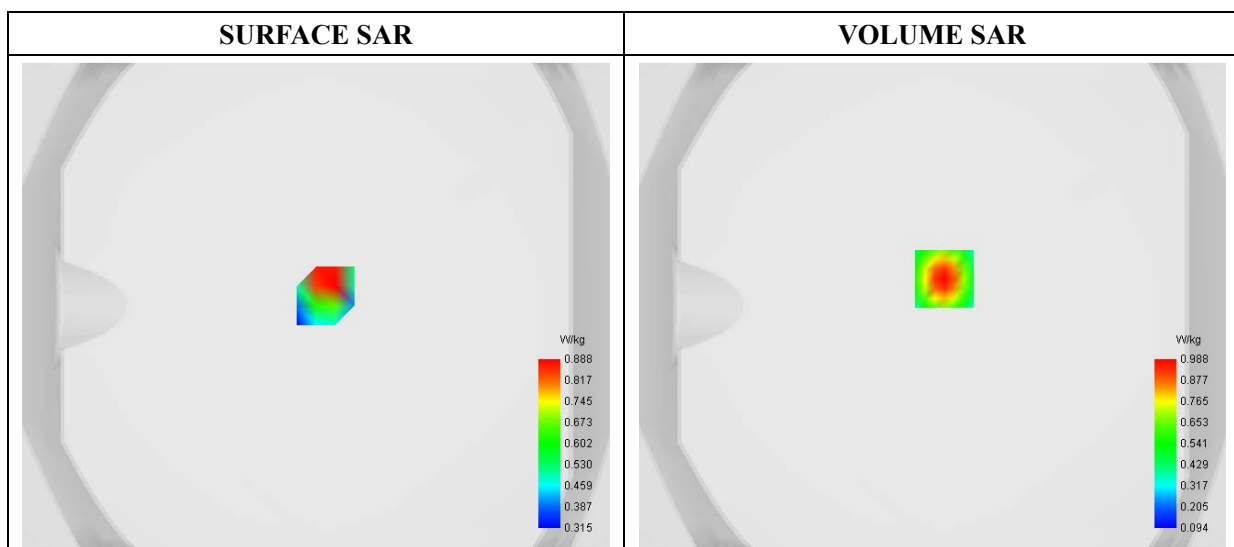

Maximum location: X=5.00, Y=11.00

Waltek Testing Group (Shenzhen) Co., Ltd.


[Http://www.waltek.com.cn](http://www.waltek.com.cn)

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.326689
SAR 1g (W/Kg)	0.662263

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	1.3742	0.9884	0.7104	0.5129	0.3787	0.2877	0.2253	0.1814	0.1489	

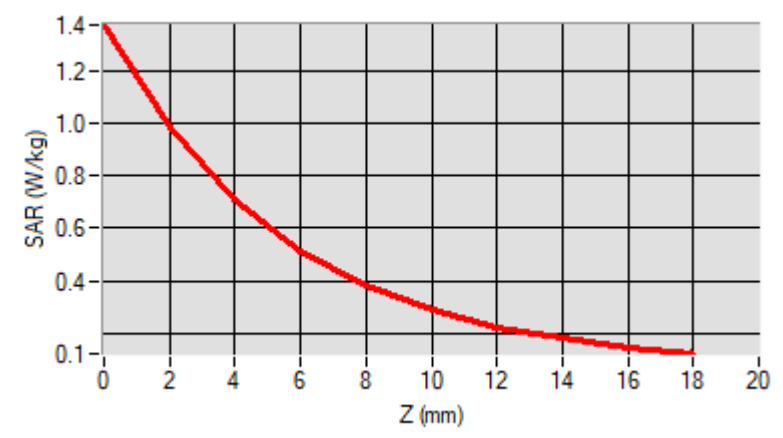

F. 3D Image

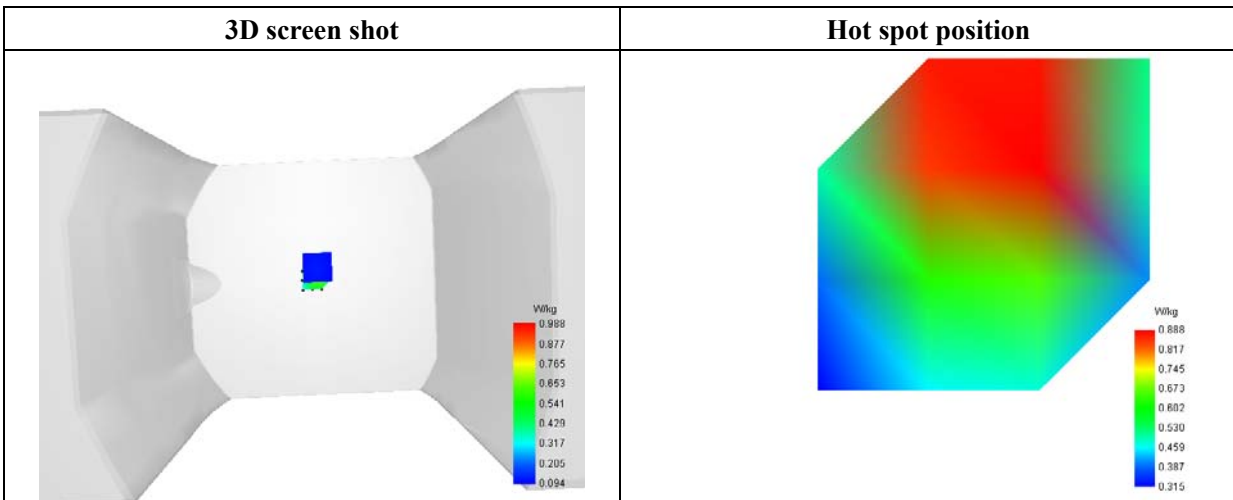

MEASUREMENT 77

Type: Phone measurement (Complete)

Date of measurement: 2021-12-18

Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Top
Band	WiFi(5.3GHz)_802.11a
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5500.000000
Relative Permittivity (real part)	35.612918
Conductivity (S/m)	5.121523
Power Variation (%)	0.545413
Ambient Temperature	22.0
Liquid Temperature	22.3

C. SAR Surface and Volume

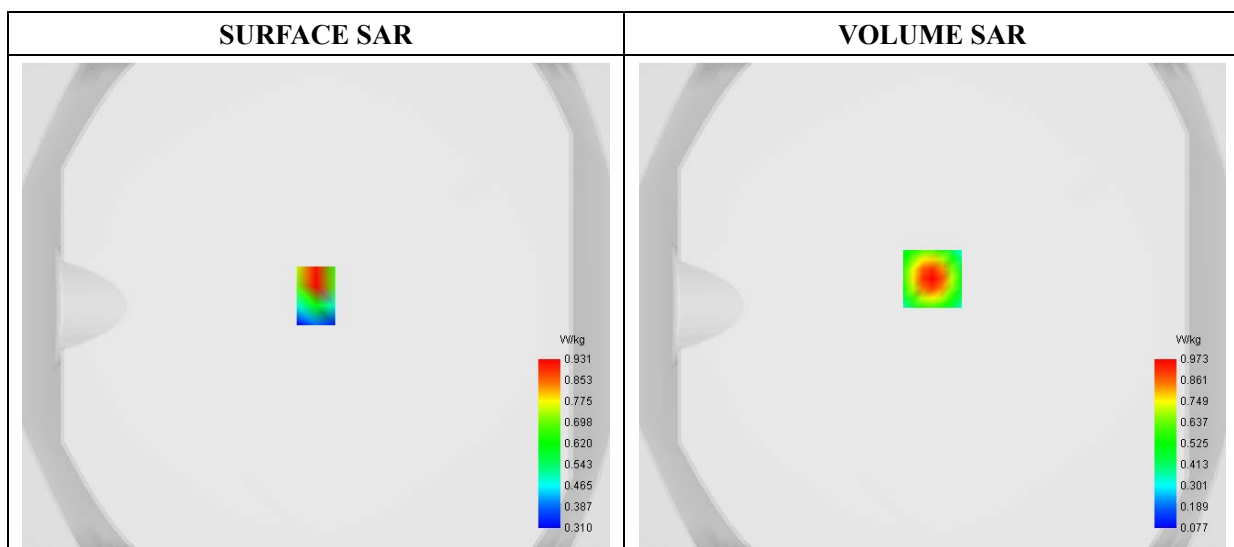

Maximum location: X=0.00, Y=11.00

Waltek Testing Group (Shenzhen) Co., Ltd.


[Http://www.waltek.com.cn](http://www.waltek.com.cn)

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.310380
SAR 1g (W/Kg)	0.646187

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	1.3639	0.9728	0.6921	0.4936	0.3597	0.2694	0.2078	0.1649	0.1333	

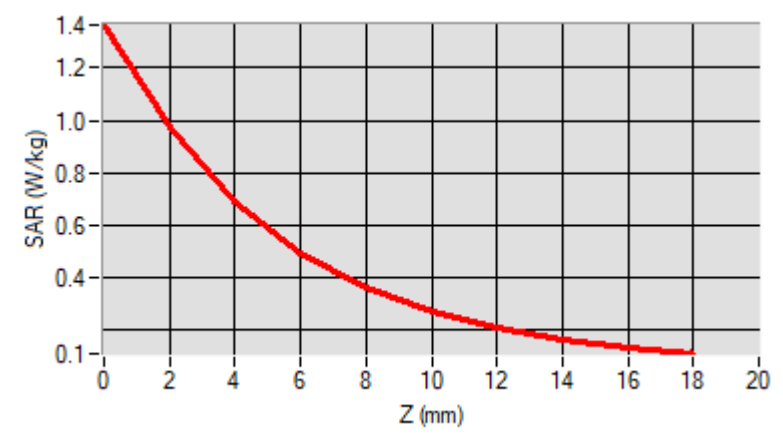

F. 3D Image

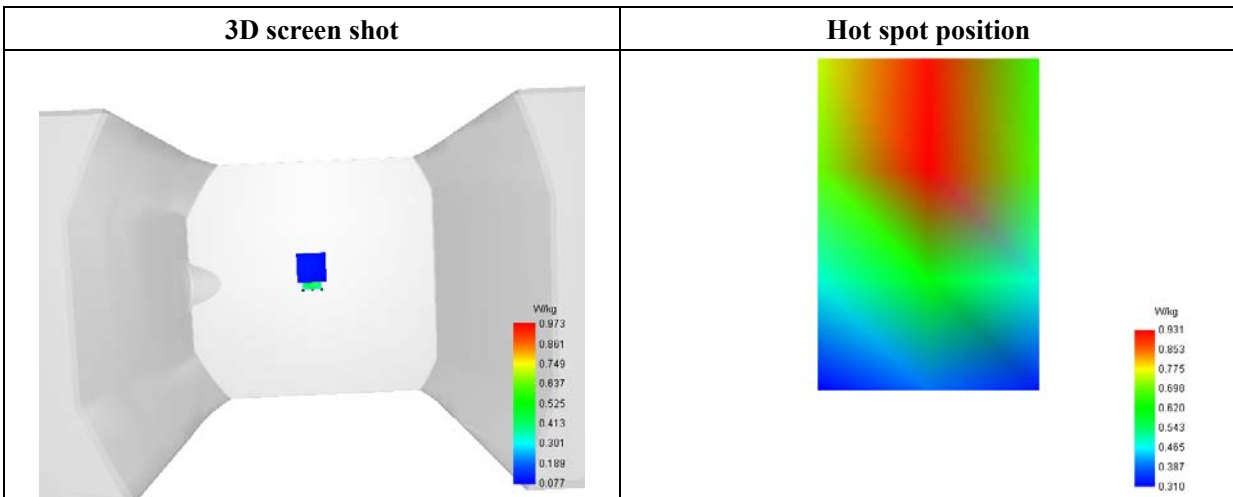

MEASUREMENT 78

Type: Phone measurement (Complete)

Date of measurement: 2021-12-18

Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WiFi(5.8GHz)_802.11a
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5745.000000
Relative Permittivity (real part)	35.320841
Conductivity (S/m)	5.210854
Power Variation (%)	1.297151
Ambient Temperature	22.0
Liquid Temperature	22.3

C. SAR Surface and Volume

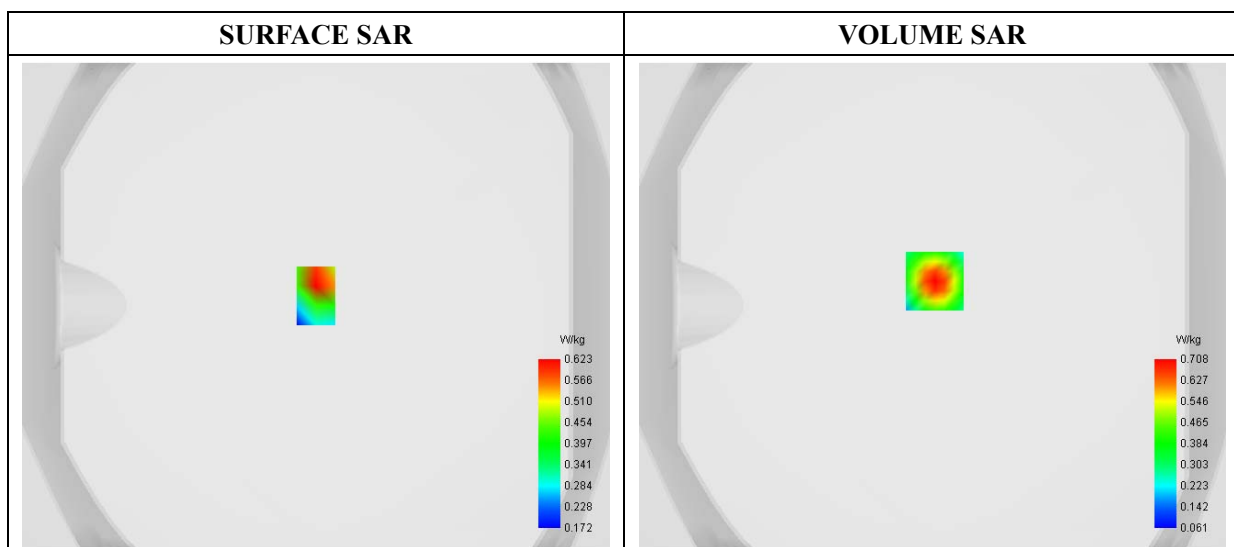


Maximum location: X=1.00, Y=10.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.222681
SAR 1g (W/Kg)	0.466103

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.9972	0.7078	0.5016	0.3573	0.2613	0.1975	0.1550	0.1259	0.1050

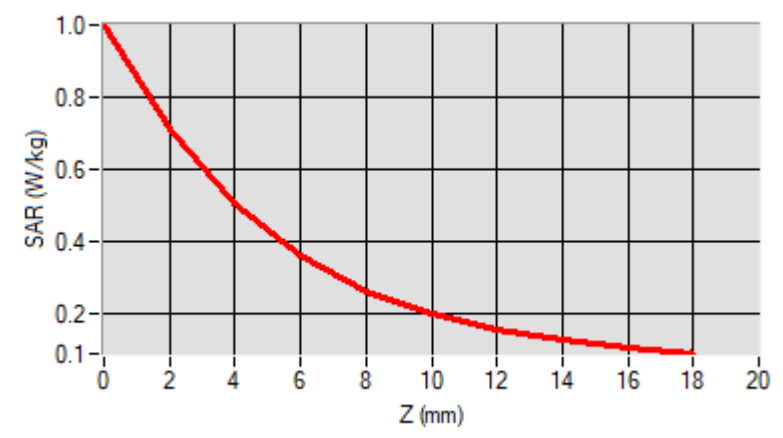

F. 3D Image

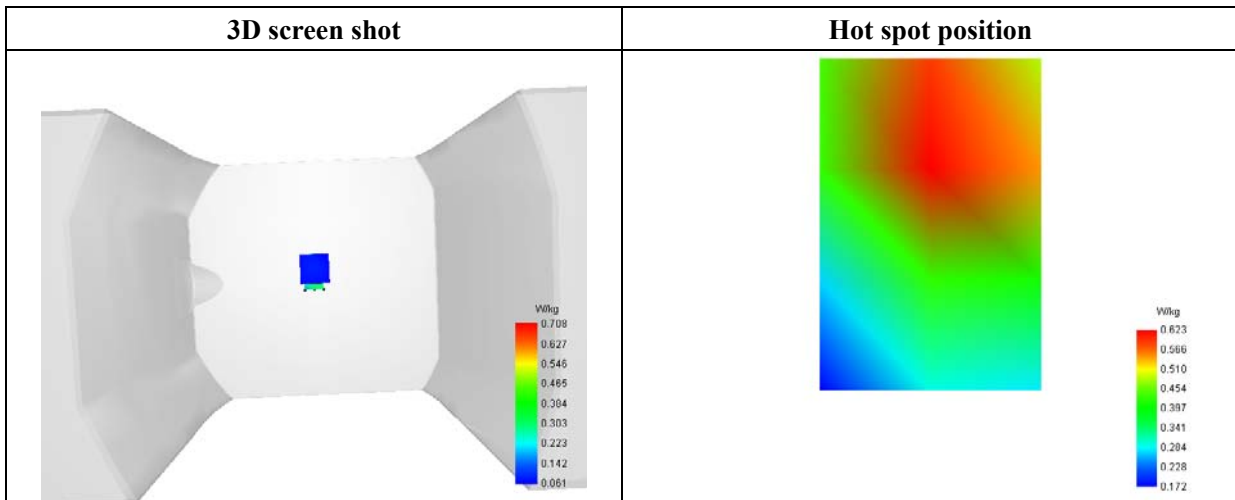

MEASUREMENT 81

Type: Phone measurement (Complete)

Date of measurement: 2022-01-11


Measurement duration: 12 minutes 3 seconds

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	EN-DC_n41A
Channels	DFT-s-OFDM PI/2 QPSK, 20MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2593.000000
Relative Permittivity (real part)	38.654295
Conductivity (S/m)	1.937356
Power Variation (%)	-0.459361
Ambient Temperature	21.1
Liquid Temperature	21.2

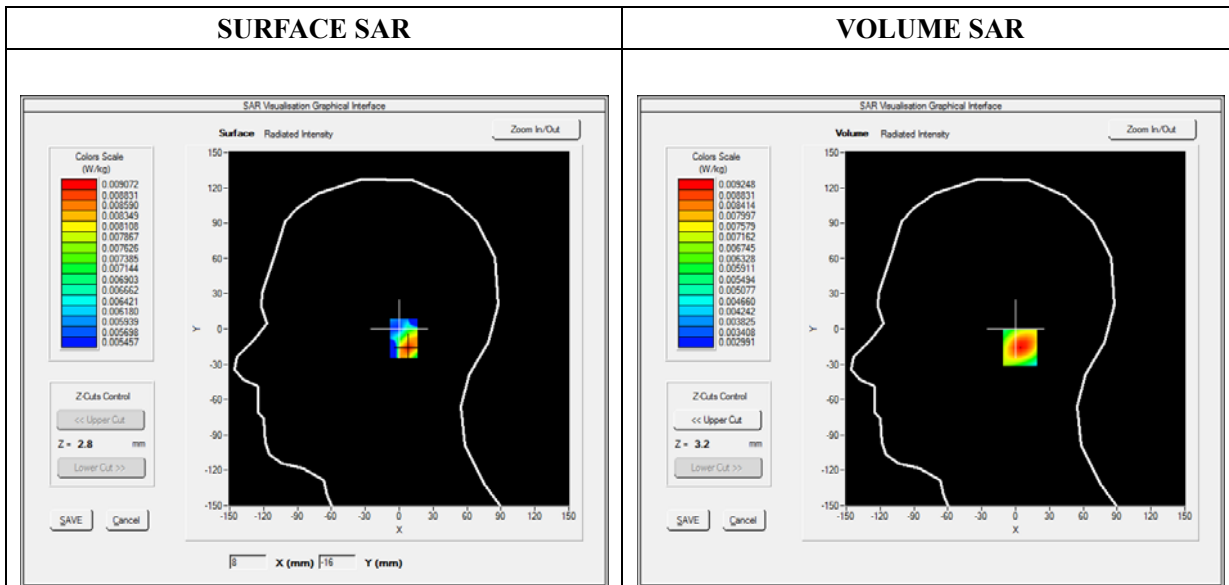


Maximum location: X=8.00, Y=-16.00

SAR Peak: 0.01 W/kg

SAR 10g (W/Kg)	0.006706
SAR 1g (W/Kg)	0.008829

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0111	0.0092	0.0074	0.0061	0.0051

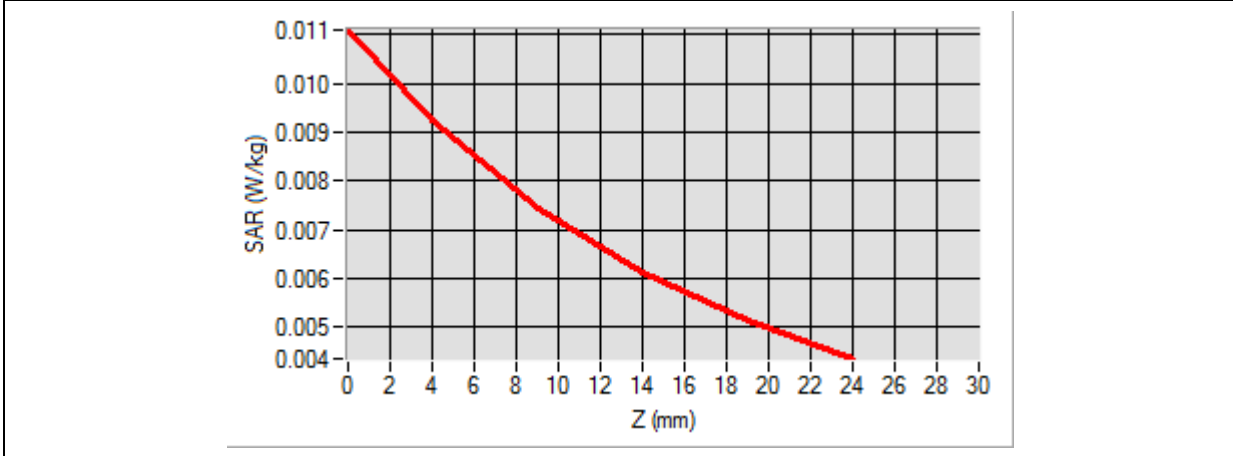

3D screen shot	Hot spot position

MEASUREMENT 82/83

Type: Phone measurement (Complete)

Date of measurement: 2022-01-11


Measurement duration: 12 minutes 3 seconds

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	EN-DC_n41A
Channels	DFT-s-OFDM QPSK, 100MHz, 1RB,Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2593.000000
Relative Permittivity (real part)	38.654295
Conductivity (S/m)	1.937356
Power Variation (%)	1.589412
Ambient Temperature	21.1
Liquid Temperature	21.2

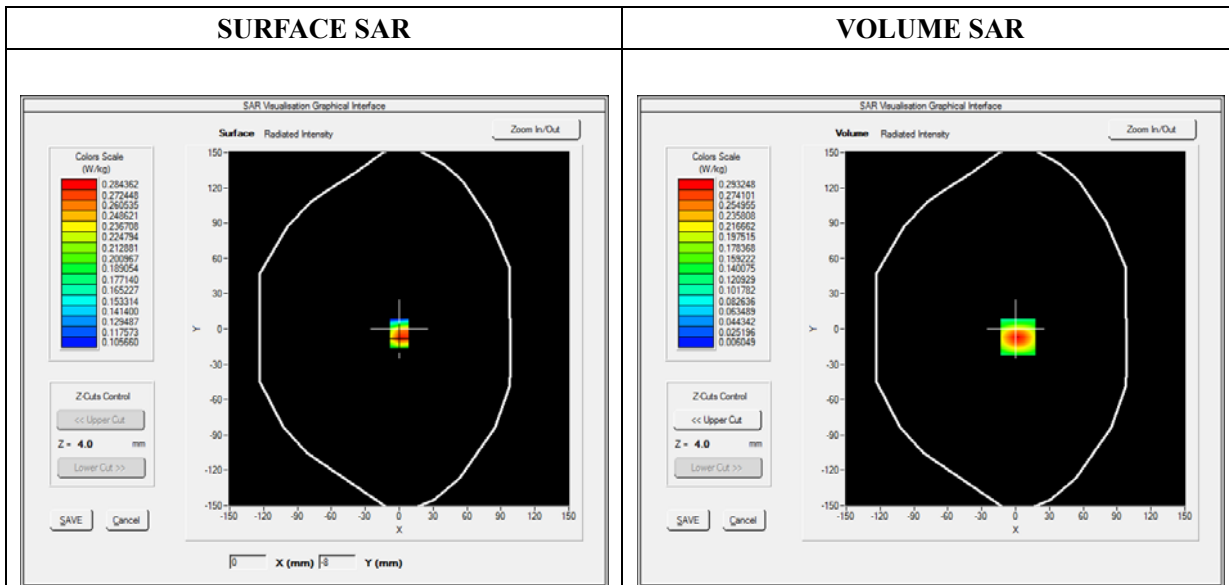




Maximum location: X=2.00, Y=-7.00

SAR Peak: 0.47 W/kg

SAR 10g (W/Kg)	0.142105
SAR 1g (W/Kg)	0.268822

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.4658	0.2932	0.1588	0.0851	0.0467

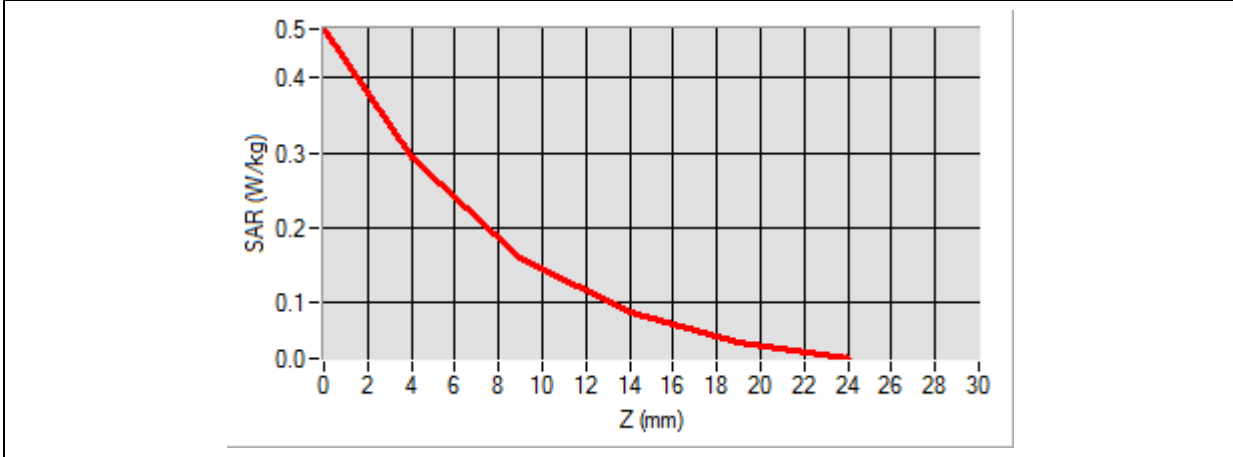

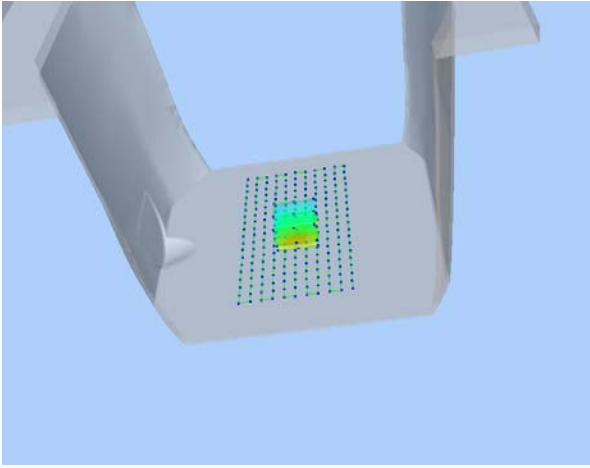3D screen shot	Hot spot position
	

Annex C. EUT Photos


EUT View Front



EUT View Back




Antenna View

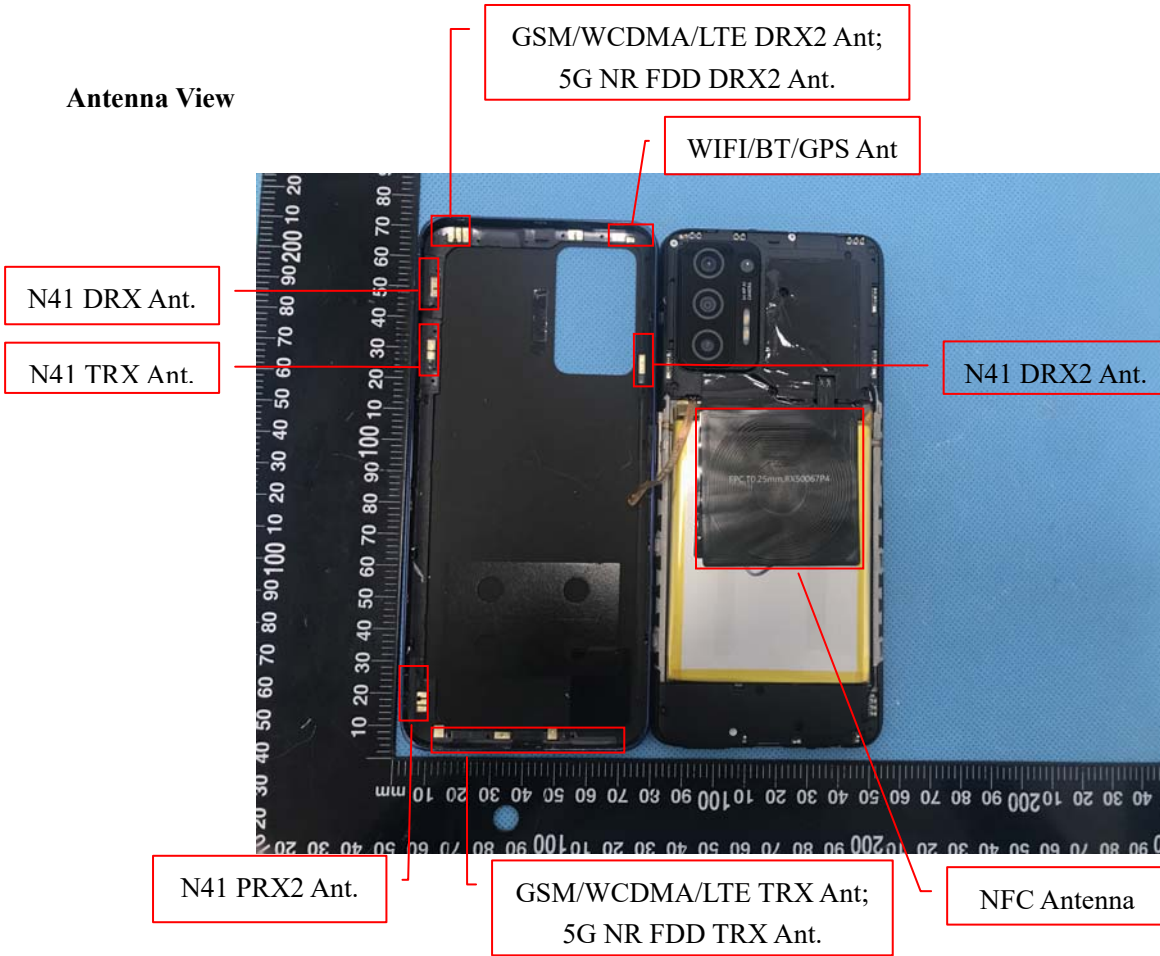

Annex D. Test Setup Photos

Head Exposure Conditions


Right Cheek

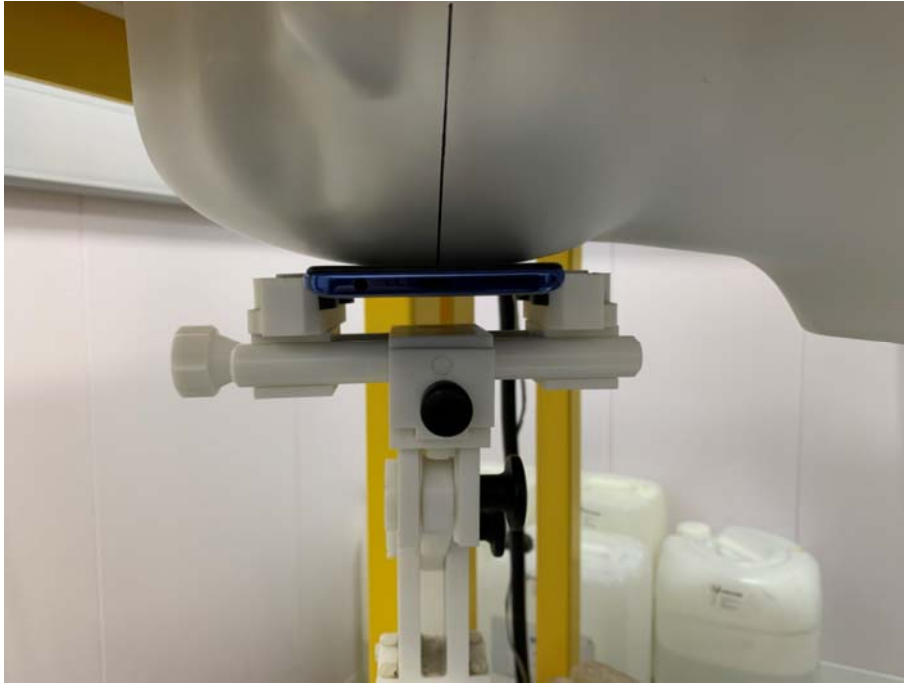


Right Tilt



Left Cheek

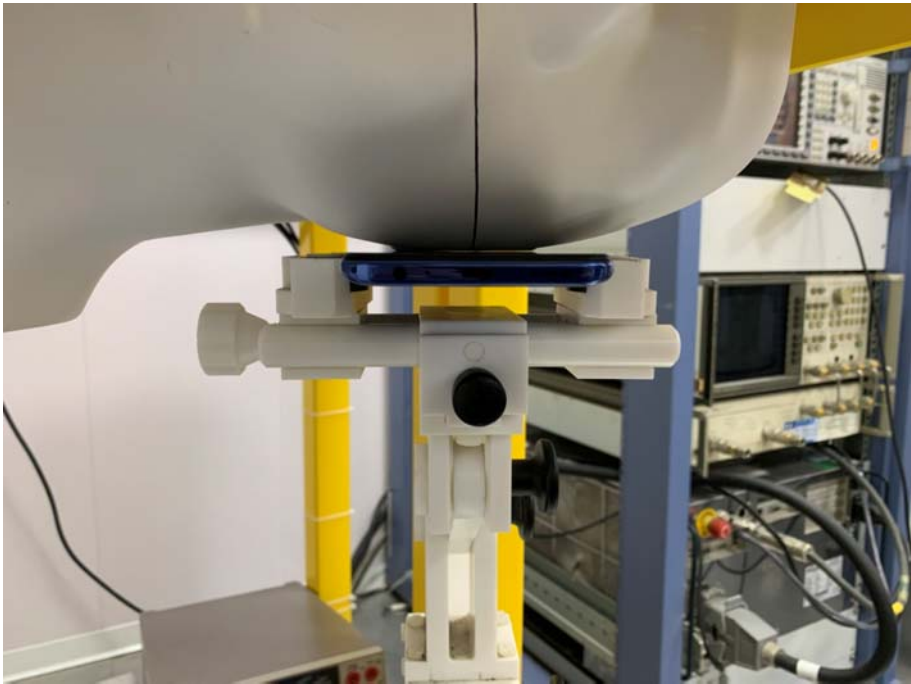

Left Tilt

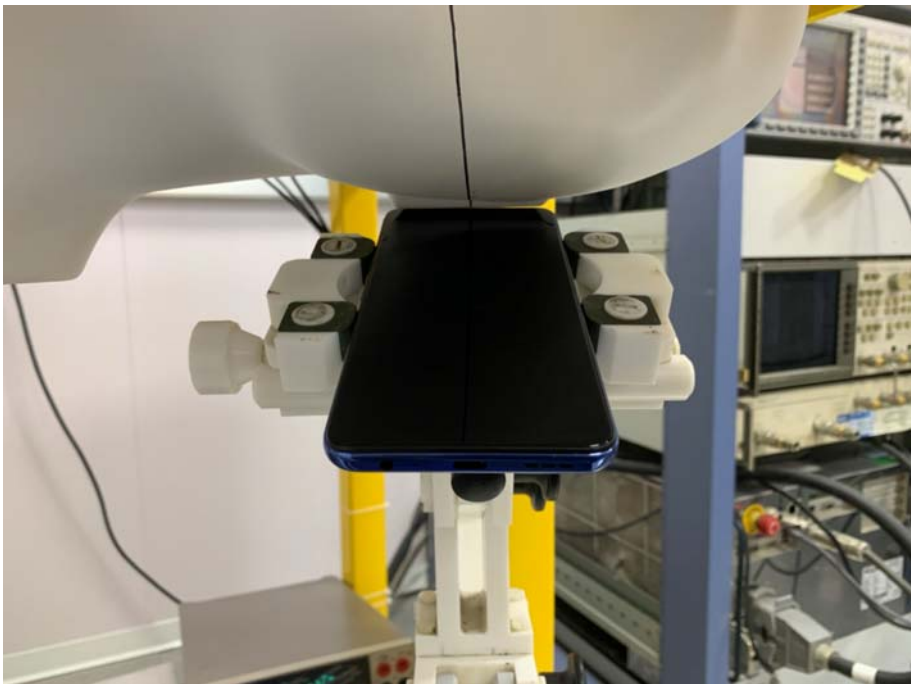


Body mode Exposure Conditions
Test distance: 10mm


Body Front



Body Back

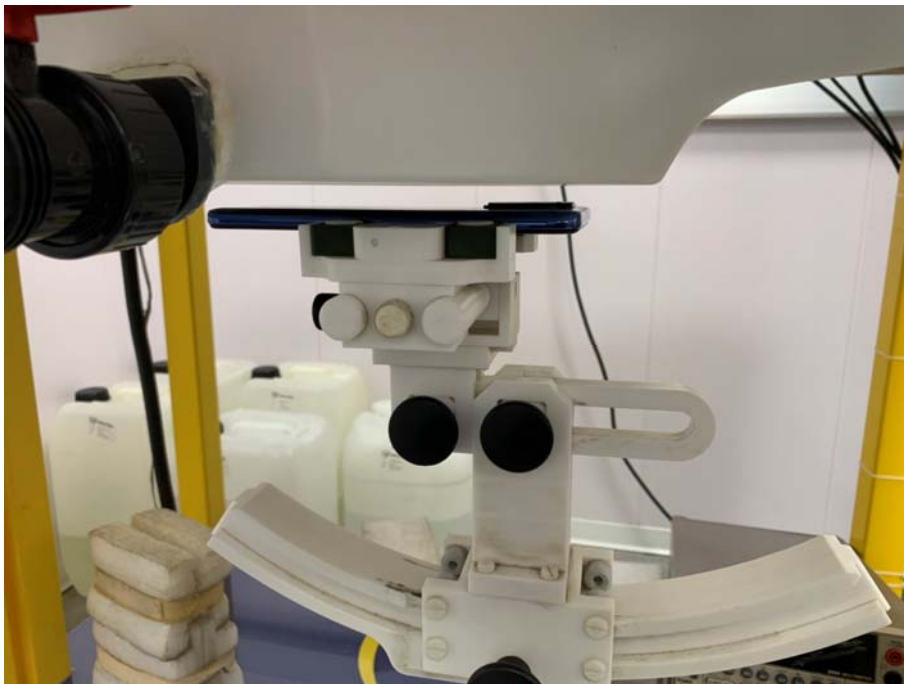

Body Right

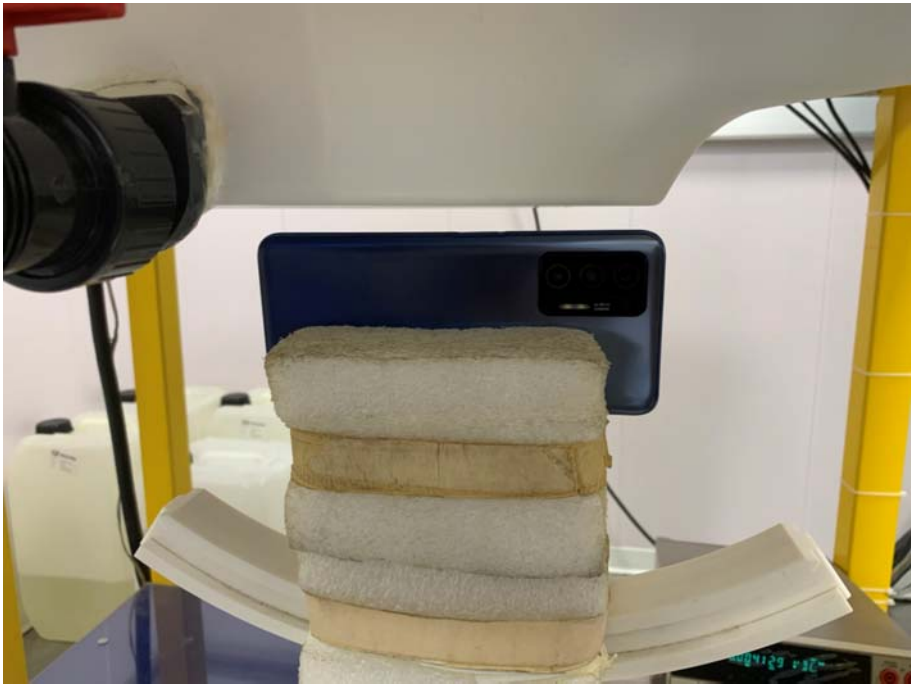


Body Left



Body Top



Body Bottom

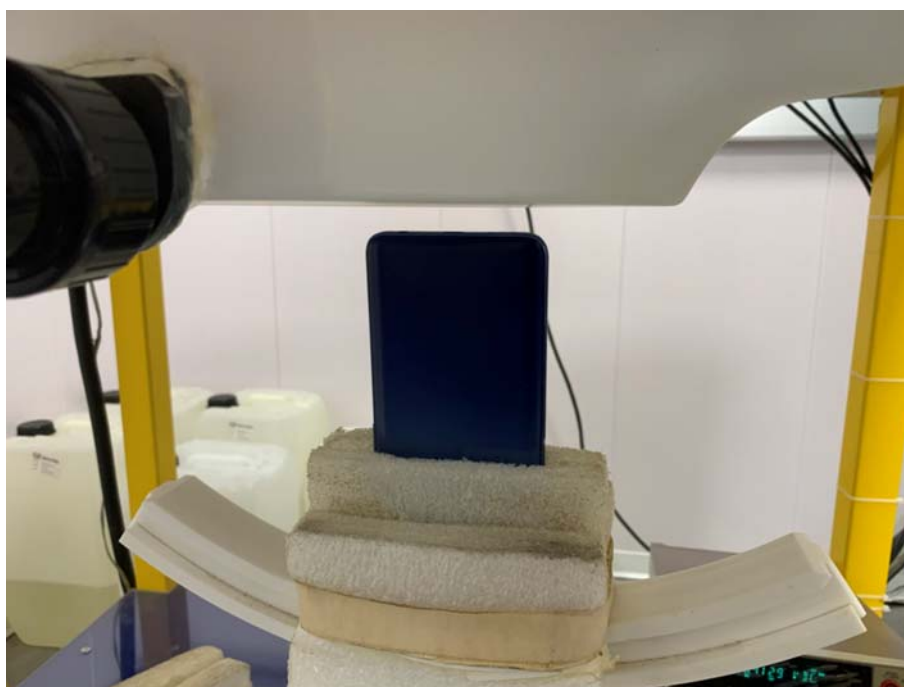

Annex E. Calibration Certificate

Please refer to the exhibit for the calibration certificate

******* END OF REPORT *******