



TEST REPORT

APPLICANT : BLU Products, Inc.
PRODUCT NAME : Smart Phone
MODEL NAME : G51S
BRAND NAME : BLU
FCC ID : YHLBLUG51S591
STANDARD(S) : 47 CFR Part 15 Subpart C
RECEIPT DATE : 2022-01-05
TEST DATE : 2022-01-18 to 2022-02-03
ISSUE DATE : 2022-04-19

Edited by:

Zeng Xiaoying
Zeng Xiaoying (Rappoteur)

Approved by:

Shen Junsheng
Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





DIRECTORY

- 1. Technical Information 3
- 1.1. Applicant and Manufacturer Information 3
- 1.2. Equipment Under Test (EUT) Description 3
- 1.3. The Channel Number and Frequency 4
- 1.4. Test Standards and Results 5
- 1.5. Environmental Conditions 6
- 2. 47 CFR Part 15C Requirements 7
- 2.1. Antenna Requirement 7
- 2.2. Hopping Mechanism 7
- 2.3. Number of Hopping Frequency 8
- 2.4. Duty Cycle of Test Signal 11
- 2.5. Maximum Peak Conducted Output Power 12
- 2.6. Maximum Average Conducted Output Power 19
- 2.7. 20 dB Bandwidth 21
- 2.8. Carried Frequency Separation 28
- 2.9. Time of Occupancy (Dwell time) 31
- 2.10. Conducted Spurious Emissions 38
- 2.11. Conducted Emission 51
- 2.12. Restricted Frequency Bands 55
- 2.13. Radiated Emission 65
- Annex A Test Uncertainty 96
- Annex B Testing Laboratory Information 97

Change History		
Version	Date	Reason for change
1.0	2022-04-19	First edition



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	BLU Products, Inc.
Applicant Address:	10814 NW 33rd St # 100 Doral, FL 33172,USA
Manufacturer:	BLU Products, Inc.
Manufacturer Address:	10814 NW 33rd St # 100 Doral, FL 33172,USA

1.2. Equipment Under Test (EUT) Description

Product Name:	Smart Phone	
Sample No.:	6#	
Hardware Version:	FS185-MB-V2.1	
Software Version:	BLU_G0591WW_V11.0.G.04.00_GENERIC_18-03-2022_1703	
Equipment Type:	Bluetooth classic	
Bluetooth Version:	4.2	
Modulation Type:	FHSS (GFSK(1Mbps), $\pi/4$ -DQPSK(EDR 2Mbps), 8-DPSK(EDR 3Mbps))	
Operating Frequency Range:	2402MHz-2480MHz	
Antenna Type:	PIFA Antenna	
Antenna Gain:	0.80dBi	
Accessory Information:	Battery	
	Brand Name:	BLU
	Model No.:	C856343400P
	Serial No.:	N/A
	Capacity:	4000mAh
	Rated Voltage:	3.85V
	Charge Limit:	4.40V
	Manufacturer:	Shenzhen jiuliyuan electronic technology Co.,Ltd

Accessory Information:	AC Adapter	
	Brand Name:	BLU
	Model No.:	US-HY-2000
	Serial No.:	N/A
	Rated Output:	5.0V \pm 2.0A
	Rated Input:	100-240V \sim 50/60Hz, 0.3A
	Manufacturer:	SHENZHEN ZHONGFUXIN TECHNOLOGY CO.,LTD.

Note 1: We use the dedicated software to control the EUT continuous transmission.

Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

1.3. The Channel Number and Frequency

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

Note 1: The black bold channels were selected for test.



1.4. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	15.247(a) 15.247(h)	Hopping Mechanism	N/A	N/A	PASS	No deviation
3	15.247(a)	Number of Hopping Frequency	Jan. 18, 2022	Su Xiaoxian	PASS	No deviation
4	ANSI C63.10	Duty Cycle	Jan. 18, 2022	Su Xiaoxian	PASS	No deviation
5	15.247(b)	Maximum Peak Conducted Output Power	Jan. 18, 2022	Su Xiaoxian	PASS	No deviation
6	15.247(b)	Maximum Average Conducted Output Power	Jan. 18, 2022	Su Xiaoxian	PASS	No deviation
7	15.247(a)	20dB Bandwidth	Feb. 03, 2022	Su Xiaoxian	PASS	No deviation
8	15.247(a)	Carrier Frequency Separation	Feb. 03, 2022	Su Xiaoxian	PASS	No deviation
9	15.247(a)	Time of Occupancy (Dwell time)	Feb. 03, 2022	Su Xiaoxian	PASS	No deviation
10	15.247(d)	Conducted Spurious Emission	Feb. 03, 2022	Su Xiaoxian	PASS	No deviation
11	15.207	Conducted Emission	Jan. 18, 2022	Yang Lian	PASS	No deviation
12	15.247(d)	Restricted Frequency Bands	Jan. 25, 2022	Lin Jiayong	PASS	No deviation
13	15.209, 15.247(d)	Radiated Emission	Jan. 19&23, 2022	Lin Jiayong	PASS	No deviation



Note 1: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013, KDB558074 D01 v05r02 and DA 00-075.

Note 2: The path loss during the RF test is calibrated to correct the results by the offset setting in the test equipments. The Ref offset 1.5dB means the cable loss is 1.5dB.

Note 3: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 4: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.

1.5. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106



2.47 CFR Part 15C Requirements

2.1. Antenna Requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Test Result: Compliant

Inside of the EUT has a PIFA antenna coupled with the metal shrapnel. Please refer to the EUT internal photos.

2.2. Hopping Mechanism

2.2.1. Requirement

According to FCC §15.247(a)(1), a frequency hopping spread spectrum system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

According to FCC §15.247(h), the incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hop sets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

2.2.2. Result: Compliant

The hopping mechanism of the EUT is in compliance with the document "**Bluetooth core specification v5.1**".

2.3. Number of Hopping Frequency

2.3.1. Requirement

According to FCC §15.247(a)(1)(iii), frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 15 hopping frequencies.

2.3.2. Test Description

Test Setup:



The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

2.3.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize



2.3.4. Test Result


A. Test Verdict:

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	79	15	PASS
$\pi/4$ -DQPSK	2400 - 2483.5	79	15	PASS
8-DPSK	2400 - 2483.5	79	15	PASS


B. Test Plot:



(GFSK)

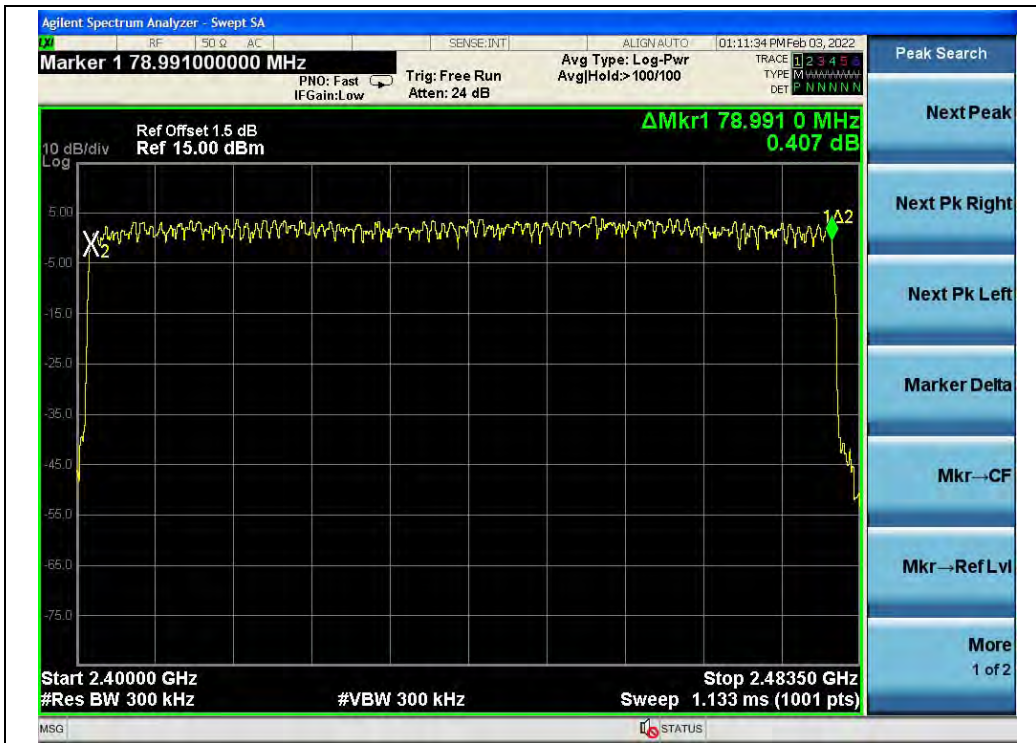

($\pi/4$ -DQPSK)

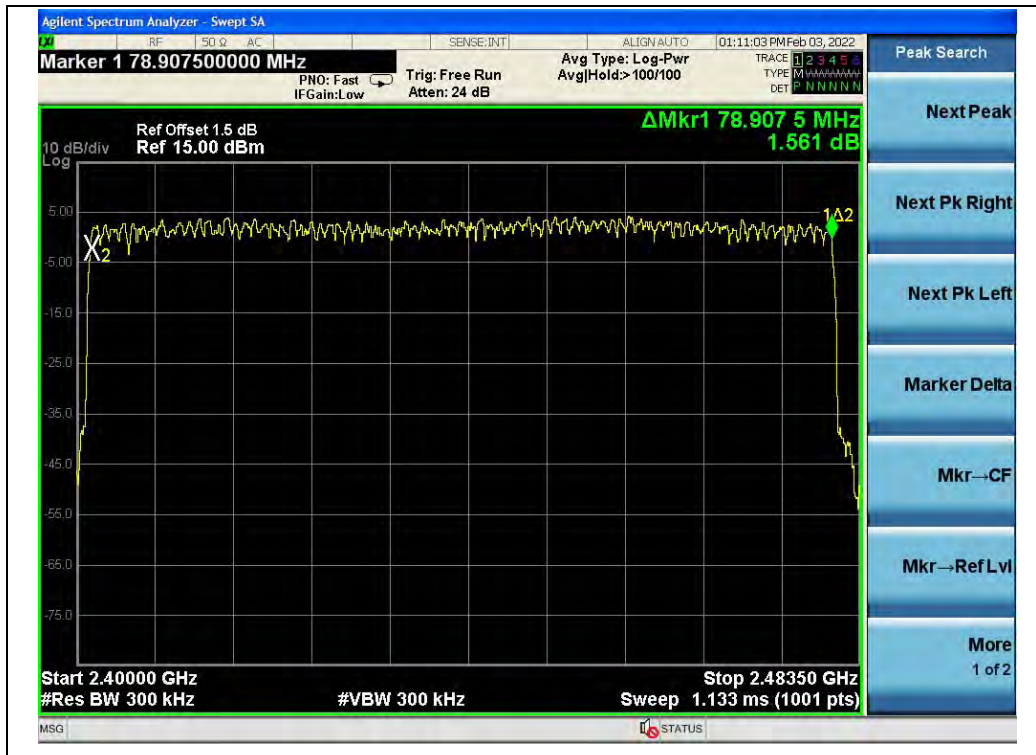

(8-DPSK)

2.4. Duty Cycle of Test Signal


2.4.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be nonconstant.

2.4.2. Test Description

Test Setup:

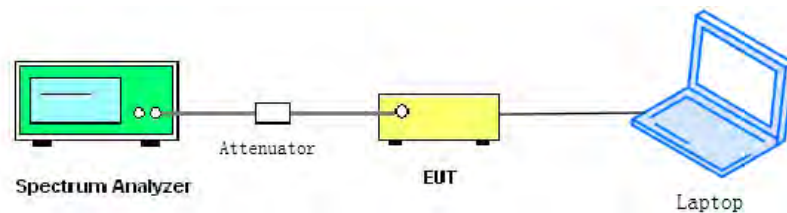

ANSI C63.10 2013 Clause 11.6 was used in order to prove compliance.

2.4.3. Test Result

Test Mode	Duty Cycle (%) (D)	Duty Factor ($10 \cdot \lg[1/D]$)
GFSK	77.33	1.12
$\pi/4$ -DQPSK	76.53	1.16
8-DPSK	76.53	1.16


2.5. Maximum Peak Conducted Output Power

2.5.1. Requirement

According to FCC §15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

2.5.2. Test Description

Test Setup:

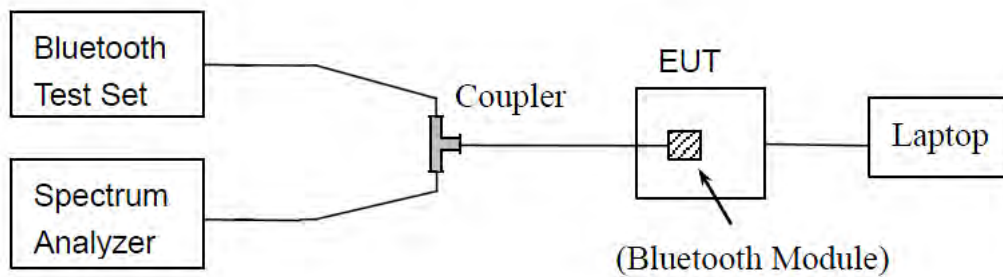

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.




2.5.3. Test Result

GFSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	2.33	0.002	20.96	0.125	PASS
39	2441	3.63	0.002			
78	2480	2.48	0.002			

B. Test Plot:

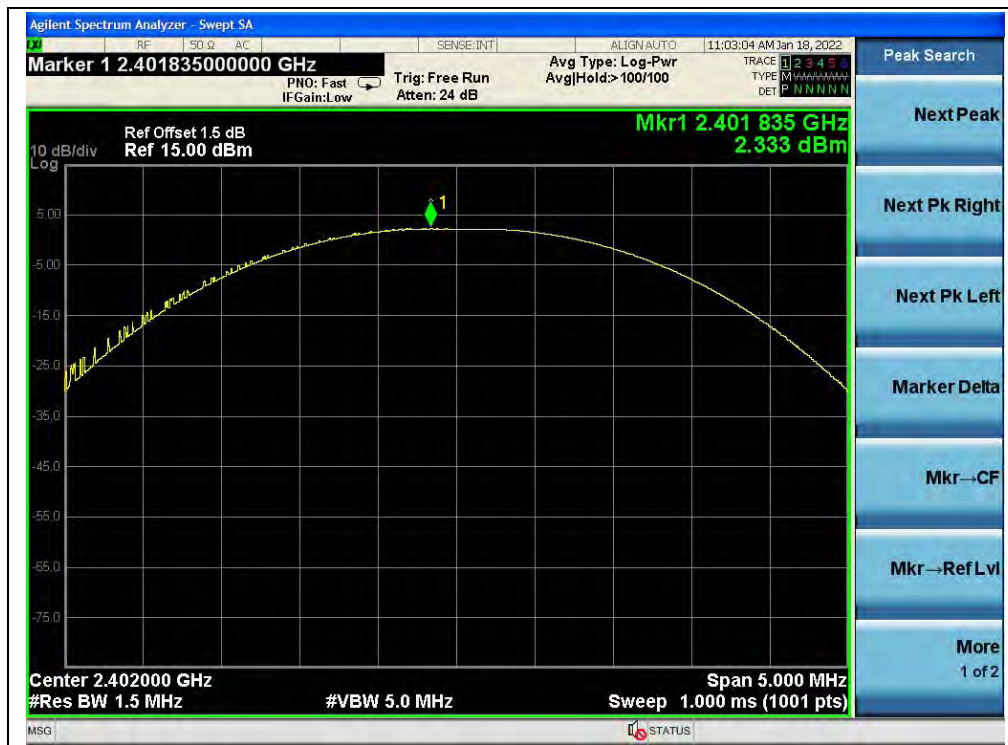

(Channel 0, GFSK)



(Channel 39, GFSK)



(Channel 78, GFSK)




$\pi/4$ -DQPSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	4.10	0.003	20.96	0.125	PASS
39	2441	5.22	0.003			PASS
78	2480	3.93	0.002			PASS

B. Test Plot:

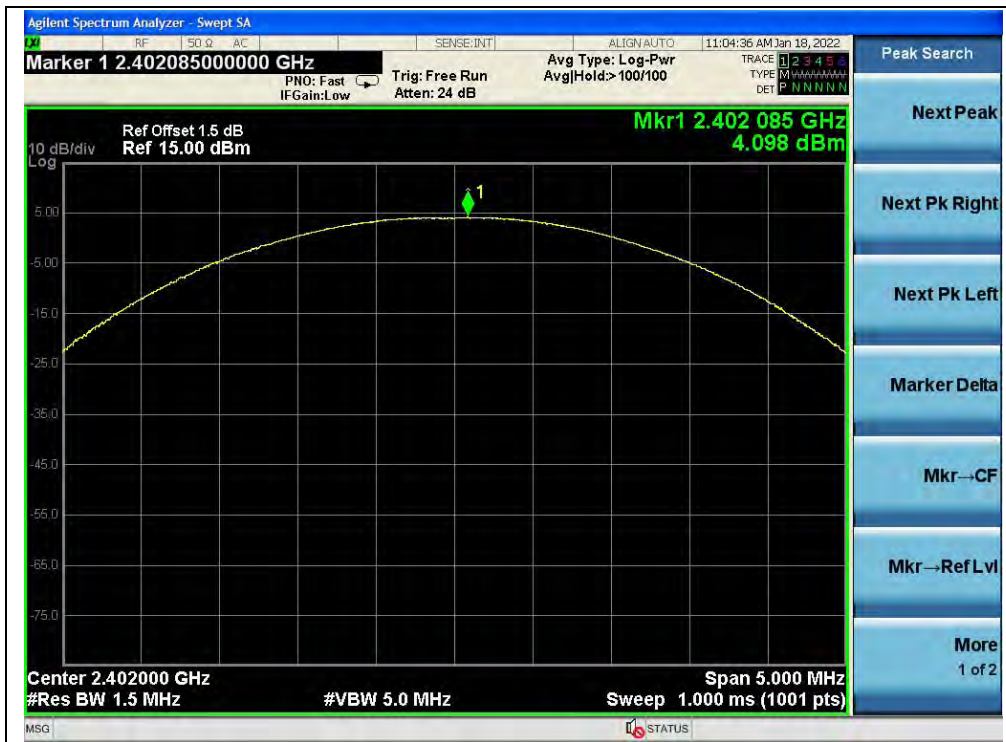

(Channel 0, $\pi/4$ -DQPSK)

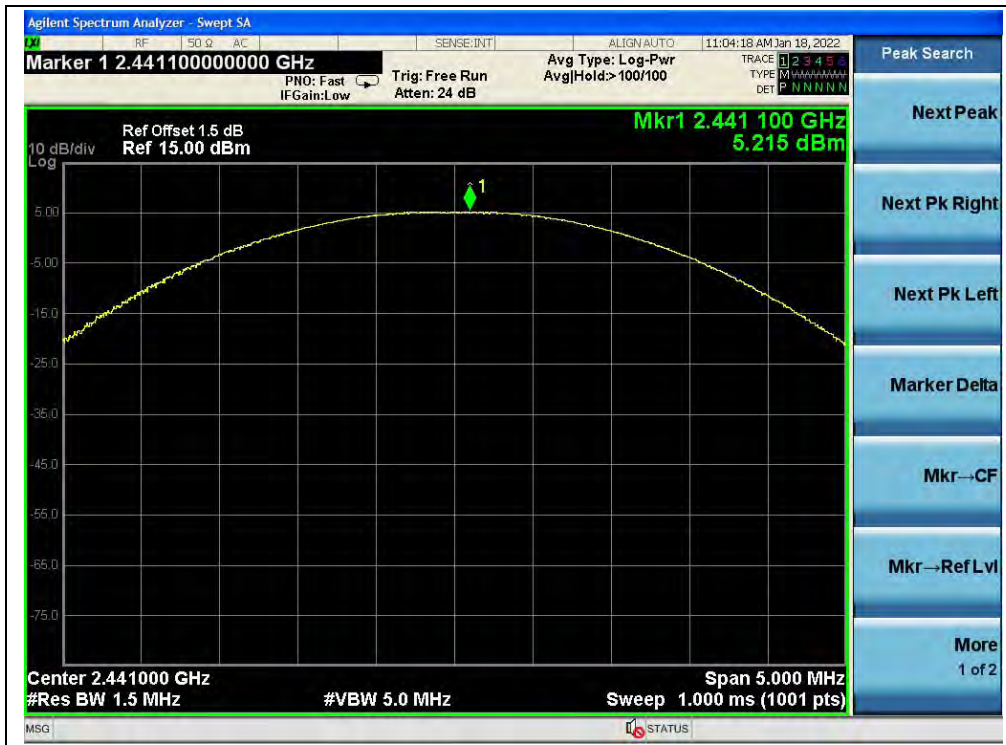

(Channel 39, $\pi/4$ -DQPSK)



(Channel 78, $\pi/4$ -DQPSK)




8-DPSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	4.46	0.003	20.96	0.125	PASS
39	2441	5.55	0.004			PASS
78	2480	4.20	0.003			PASS

B. Test Plot:

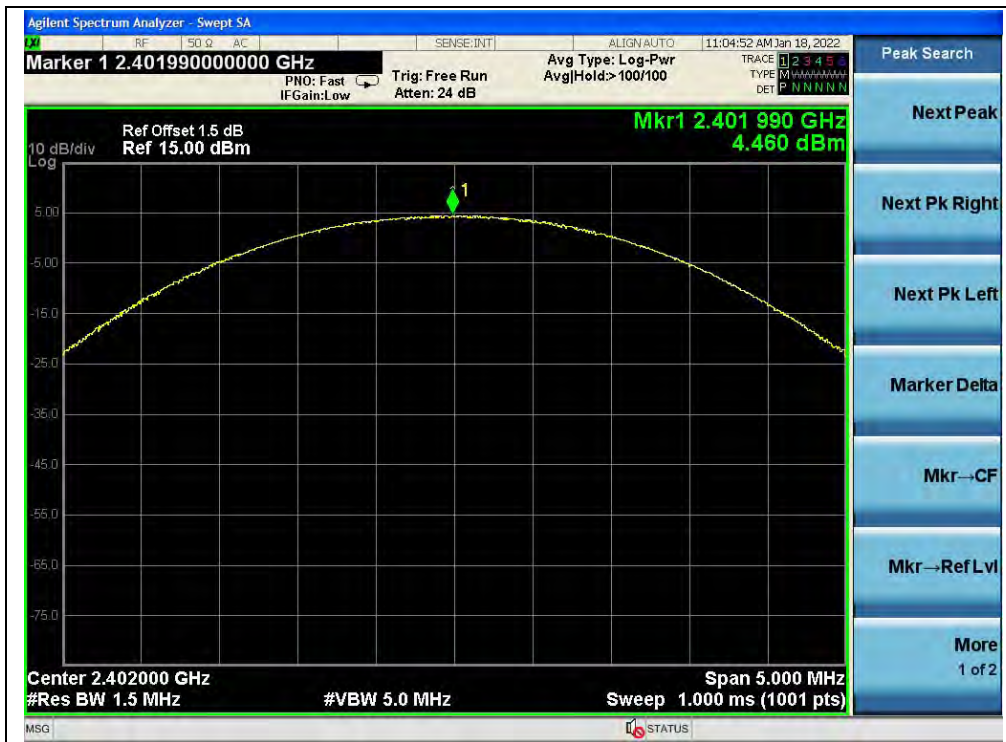

(Channel 0, 8-DPSK)



(Channel 39, 8-DPSK)



(Channel 78, 8-DPSK)

2.6. Maximum Average Conducted Output Power


2.6.1. Requirement

According to FCC §15.247(b), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum average output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

2.6.2. Test Description

The measured output power was calculated by the reading of the USB Wideband Power Sensor and calibration.

Test Setup:

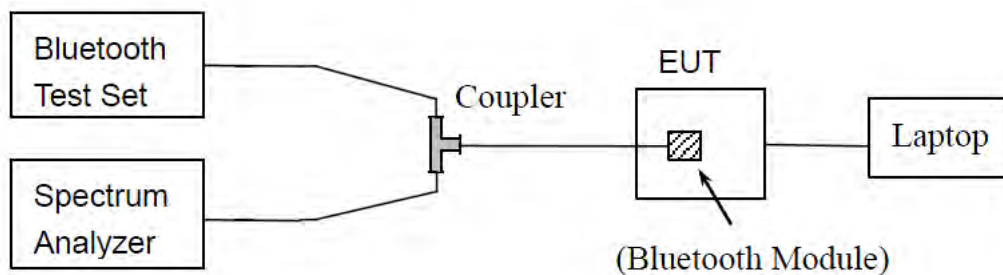

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.



2.6.3. Test Result

GFSK Mode

Channel	Frequency (MHz)	Measured	Average Power			Limit		Verdict
			Duty Factor	Duty Factor Calculated		dBm	W	
		dBm	dBm	W				
0	2402	0.78	1.10	1.88	0.002	20.96	0.125	PASS
39	2441	2.15		3.25	0.002			PASS
78	2480	1.01		2.11	0.002			PASS

$\pi/4$ -DQPSK Mode

Channel	Frequency (MHz)	Measured	Average Power			Limit		Verdict
			Duty Factor	Duty Factor Calculated		dBm	W	
		dBm	dBm	W				
0	2402	0.07	1.13	1.20	0.001	20.96	0.125	PASS
39	2441	1.26		2.39	0.002			PASS
78	2480	0.09		1.22	0.001			PASS

8-DPSK Mode

Channel	Frequency (MHz)	Measured	Average Power			Limit		Verdict
			Duty Factor	Duty Factor Calculated		dBm	W	
		dBm	dBm	W				
0	2402	0.03	1.13	1.16	0.001	20.96	0.125	PASS
39	2441	1.31		2.44	0.002			PASS
78	2480	0.14		1.27	0.001			PASS


2.7. 20 dB Bandwidth

2.7.1. Definition

According to FCC §15.247(a)(1), the 20 dB bandwidth is known as the 99% emission bandwidth, or 20 dB bandwidth ($10 \cdot \log 1\% = 20$ dB) taking the total RF output power.

2.7.2. Test Description

Test Setup:

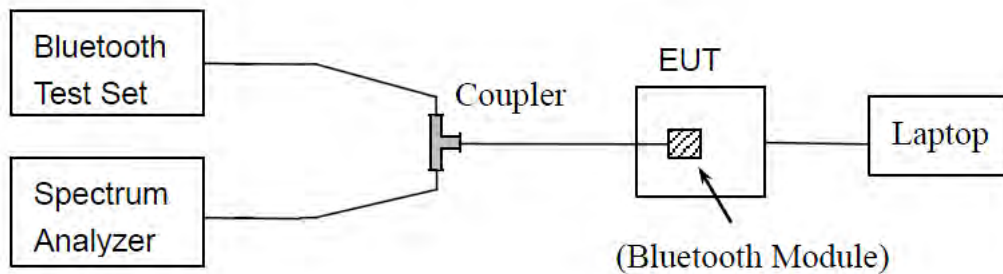

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

2.7.3. Test Procedure

Use the following spectrum analyzer settings:

Span = between 2 to 5 times the OBW, centered on the test channel

RBW= 1% to 5% of the OBW

VBW $\geq 3 \times$ RBW

Sweep = auto

Detector function = peak

Trace = max hold



2.7.4. Test Result

GFSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	Result
0	2402	0.962	PASS
39	2441	0.939	PASS
78	2480	0.953	PASS

B. Test Plot:



(Channel 0, GFSK)



(Channel 39, GFSK)



(Channel 78, GFSK)




$\pi/4$ -DQPSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
0	2402	1.306	PASS
39	2441	1.285	PASS
78	2480	1.284	PASS

B. Test Plot:

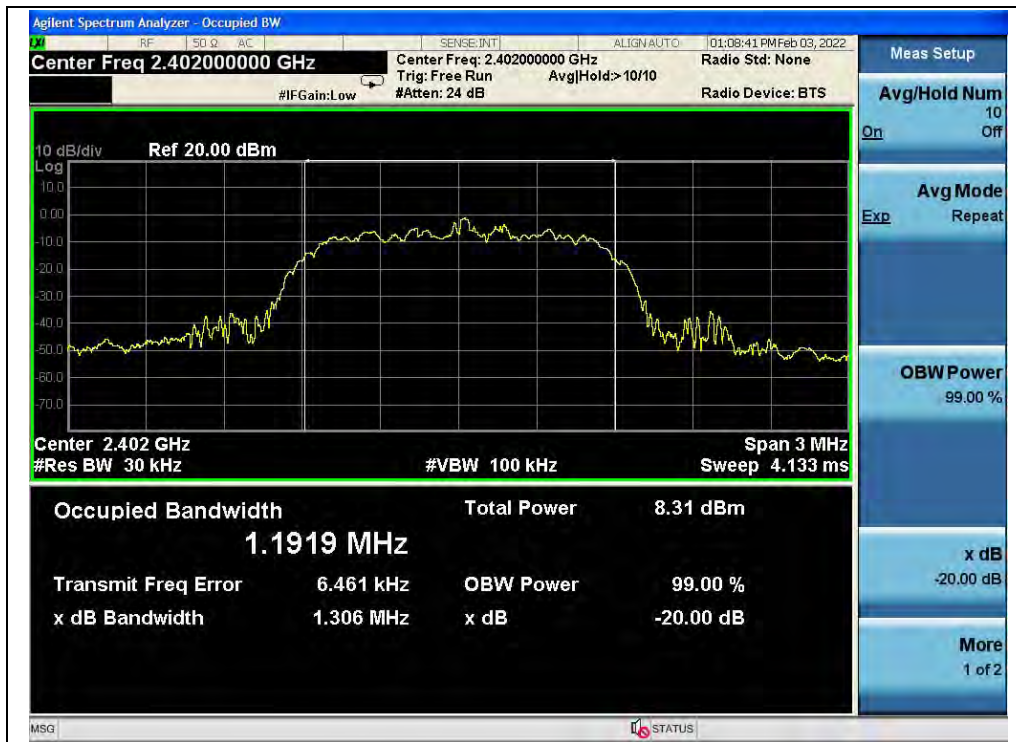

(Channel 0, $\pi/4$ -DQPSK)



(Channel 39, $\pi/4$ -DQPSK)



(Channel 78, $\pi/4$ -DQPSK)



8-DPSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
0	2402	1.295	PASS
39	2441	1.293	PASS
78	2480	1.303	PASS

B. Test Plot:



(Channel 0, 8-DPSK)



(Channel 39, 8-DPSK)



(Channel 78, 8-DPSK)


2.8. Carried Frequency Separation

2.8.1. Definition

According to FCC §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

2.8.2. Test Description

Test Setup:

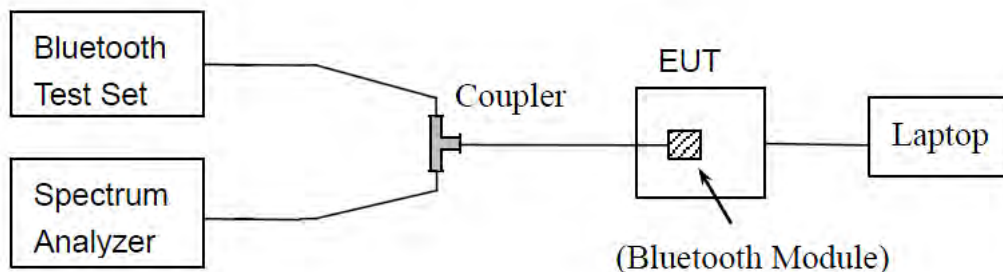

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

2.8.3. Test Procedure

The EUT must have its hopping function enabled. According to DA 00-705, use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) \geq 1% of the span

Video (or Average) Bandwidth (VBW) \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.



2.8.4. Test Result

A. Test Verdict:

Test Mode	Measured Channel Numbers	Carried Frequency Separation (MHz)	20 dB Bandwidth (MHz)	Min. Limit	Verdict
GFSK	39 and 40	1.002	0.962	two-thirds of the 20dBbandwidth	PASS
$\pi/4$ -DQPSK	39 and 40	1.062	1.306		PASS
8-DPSK	39 and 40	1.131	1.303		PASS

B. Test Plot:



(GFSK)



($\pi/4$ -DQPSK)



(8-DPSK)


2.9. Time of Occupancy (Dwell time)

2.9.1. Requirement

According to FCC §15.247(a) (1) (iii), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

2.9.2. Test Description

Test Setup:

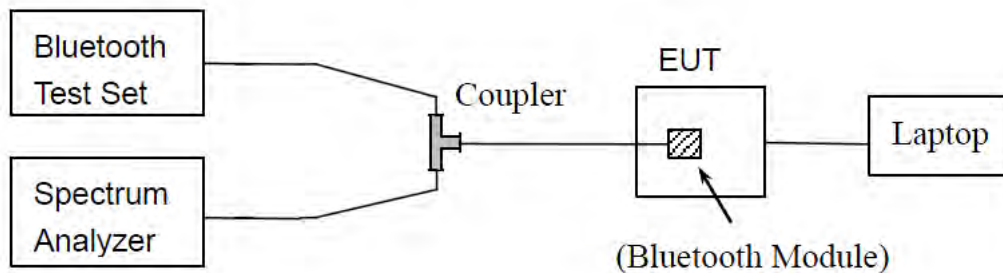

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

2.9.3. Test Procedure

Normal Mode:

DH1: Dwell time equal to Pulse time (ms) * (1600 / 2 / 79) * 31.6 Millisecond
DH3: Dwell time equal to Pulse time (ms) * (1600 / 4 / 79) * 31.6 Millisecond
DH5: Dwell time equal to Pulse Time (ms) * (1600 / 6 / 79) * 31.6 Millisecond

AFH Mode:

DH1: Dwell time equal to Pulse time (ms) * (800 / 2 / 20) * (0.4 * 20) Millisecond
DH3: Dwell time equal to Pulse time (ms) * (800 / 4 / 20) * (0.4 * 20) Millisecond
DH5: Dwell time equal to Pulse Time (ms) * (800 / 6 / 20) * (0.4 * 20) Millisecond.




2.9.4. Test Result

GFSK Mode

A. Test Verdict:

DH Packet	Pulse Width (ms)	Dwell Time (ms)		Limit (sec)	Verdict
		Normal Mode	AFH Mode		
DH1	0.40	128.00	64.00	0.4	PASS
DH3	1.66	265.60	132.80		PASS
DH5	2.91	310.40	155.20		PASS


B. Test Plot:

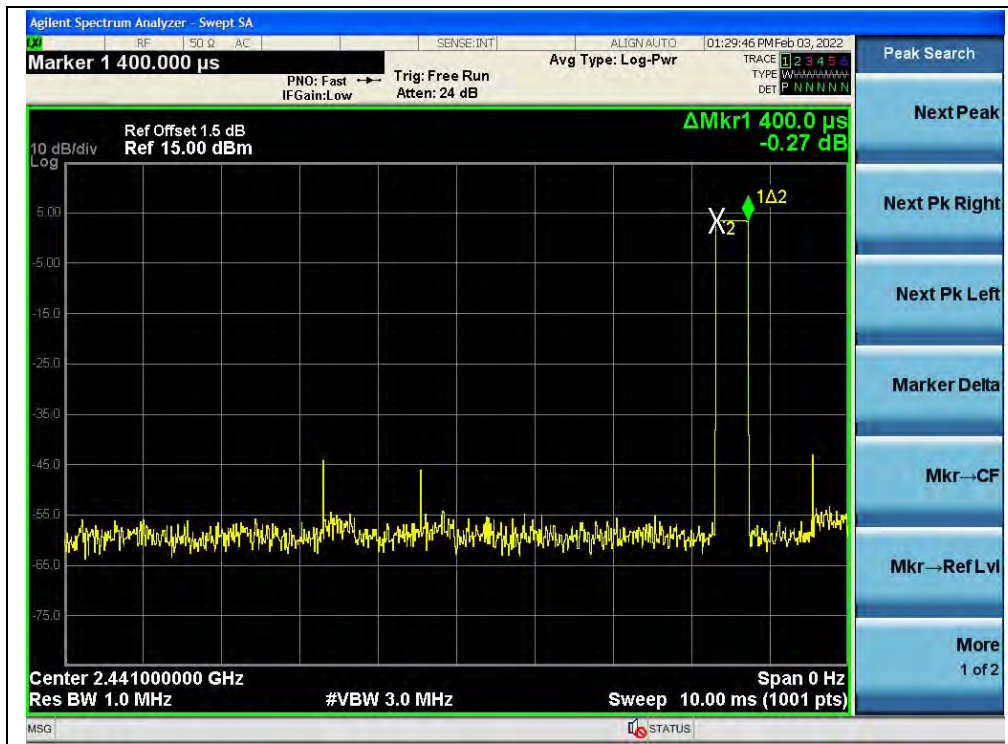

(DH1, GFSK)



(DH3, GFSK)

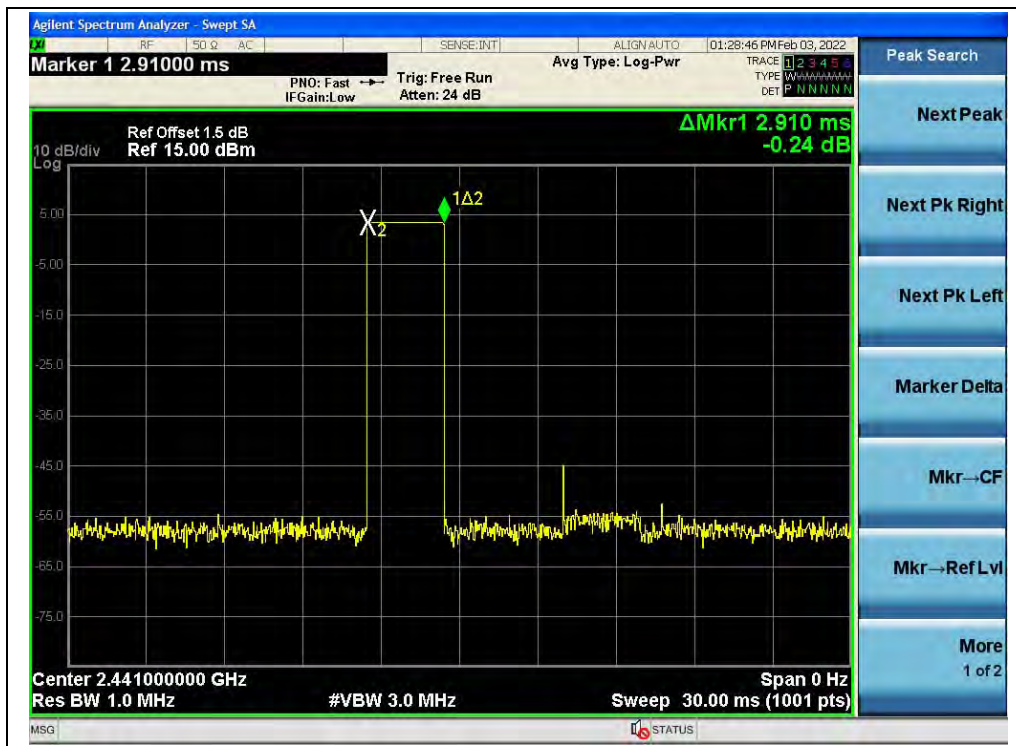

(DH5, GFSK)




$\pi/4$ -DQPSK Mode


A. Test Verdict:

DH Packet	Pulse Width (ms)	Dwell Time (ms)		Limit (sec)	Verdict
		Normal Mode	AFH Mode		
DH1	0.39	124.80	62.40	0.4	PASS
DH3	1.64	262.40	131.20		PASS
DH5	2.88	307.20	153.60		PASS


B. Test Plot:

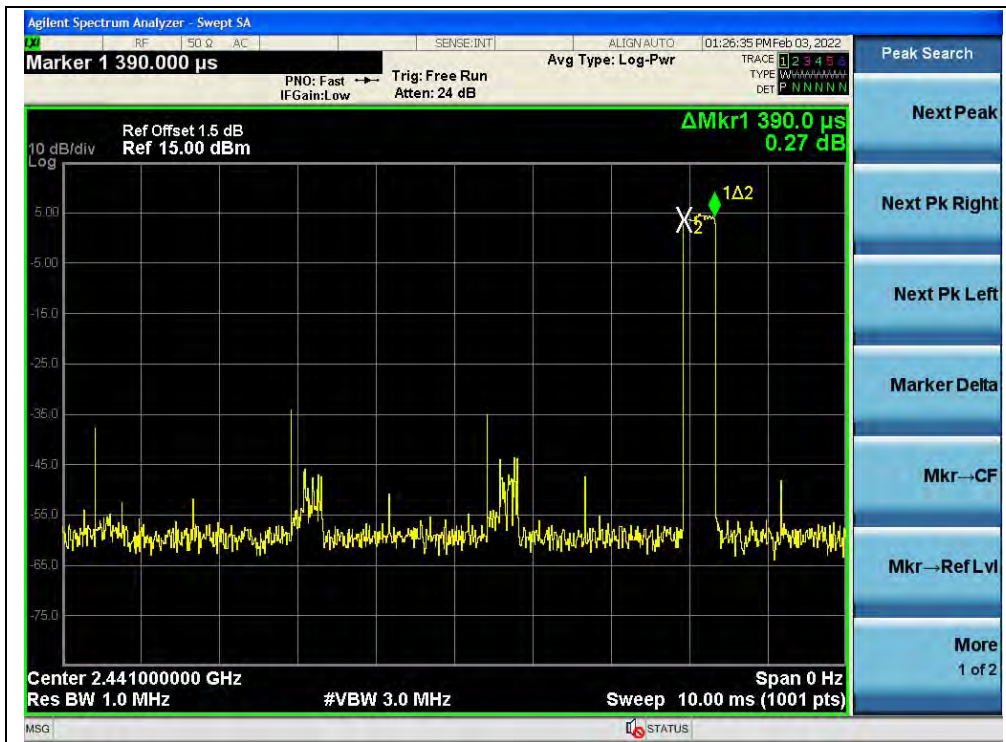

(DH1, $\pi/4$ -DQPSK)

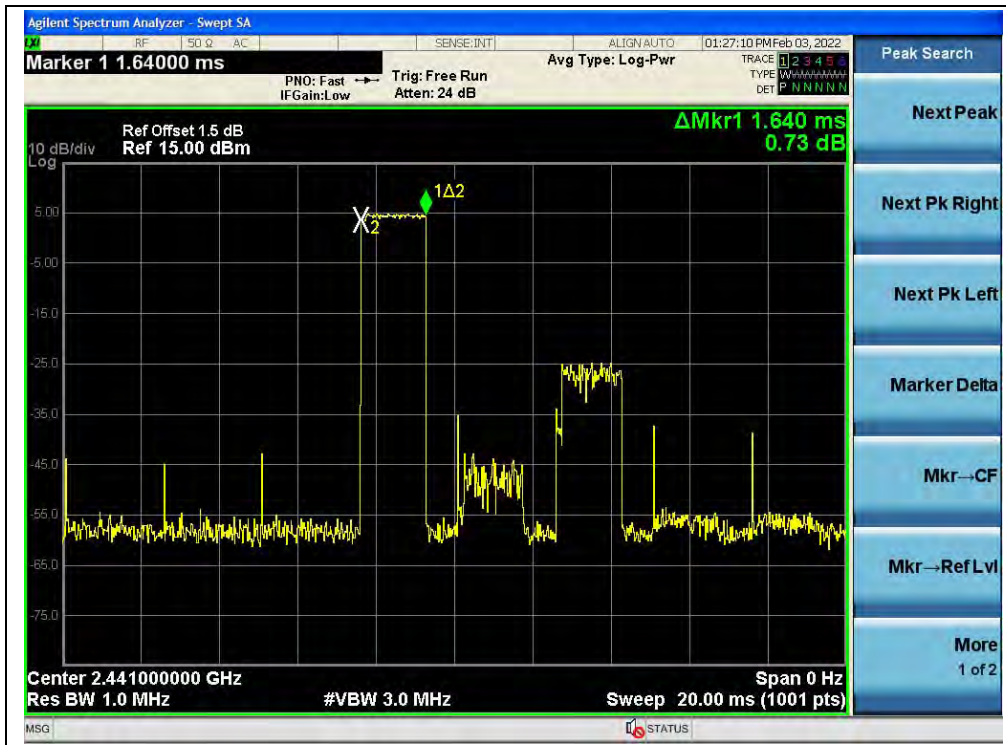

(DH3, $\pi/4$ -DQPSK)

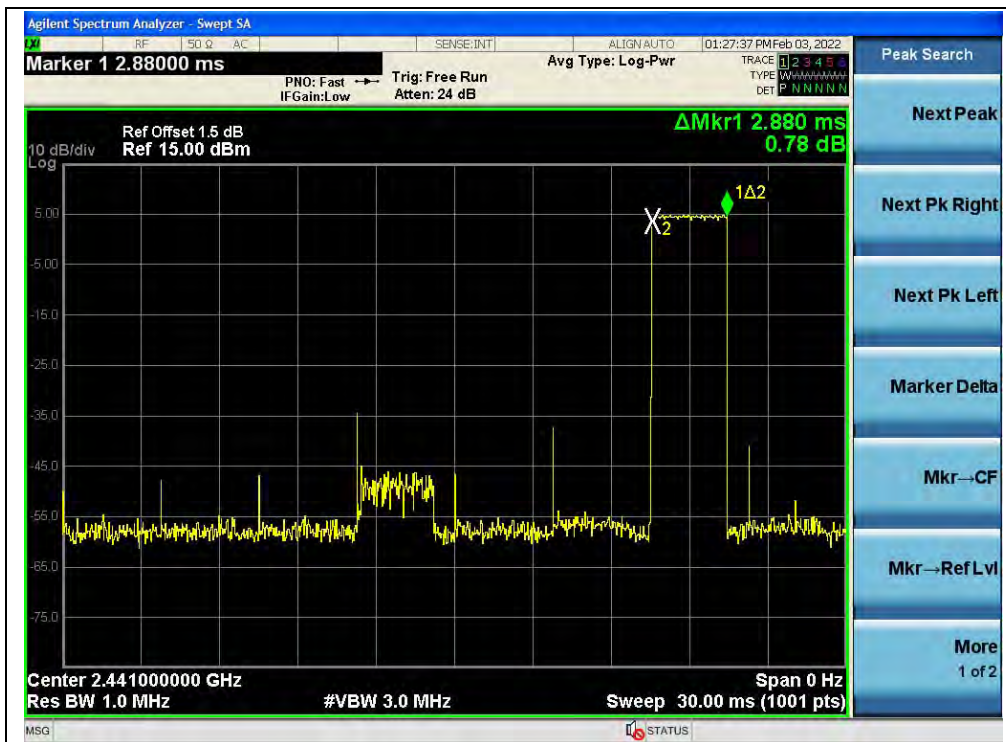

(DH5, $\pi/4$ -DQPSK)



8-DPSK mode


A. Test Verdict:

DH Packet	Pulse Width (ms)	Dwell Time (ms)		Limit (sec)	Verdict
		Normal Mode	AFH Mode		
DH1	0.39	124.80	62.40	0.4	PASS
DH3	1.66	265.60	132.80		PASS
DH5	2.88	307.20	153.60		PASS


B. Test Plot:



(DH1, 8-DPSK)

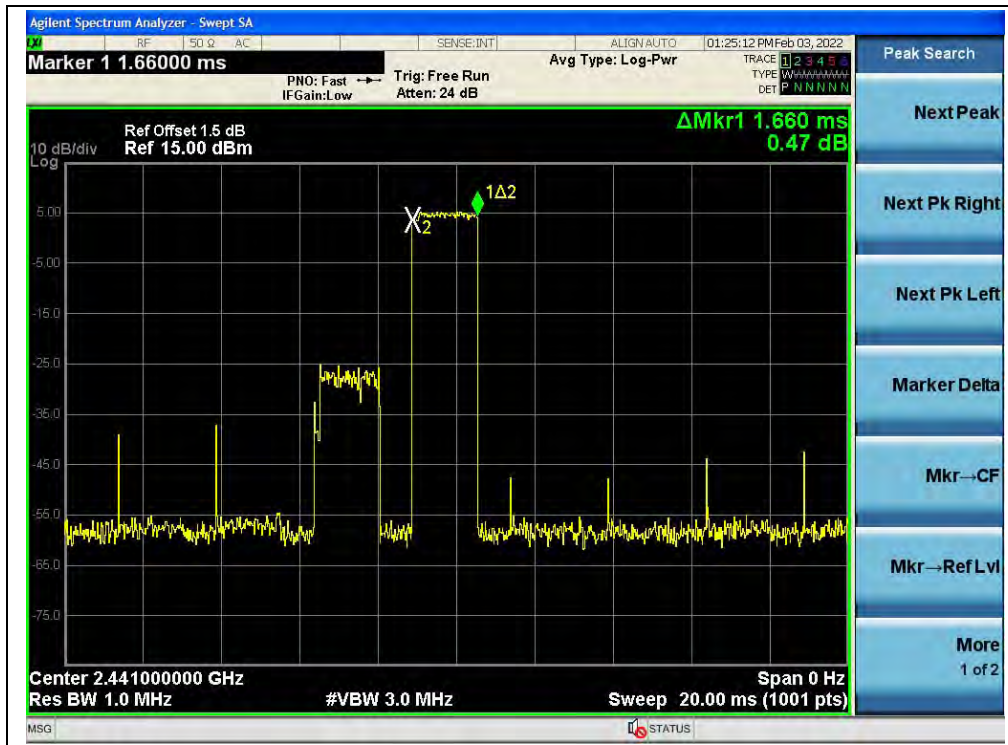

(DH3, 8-DPSK)

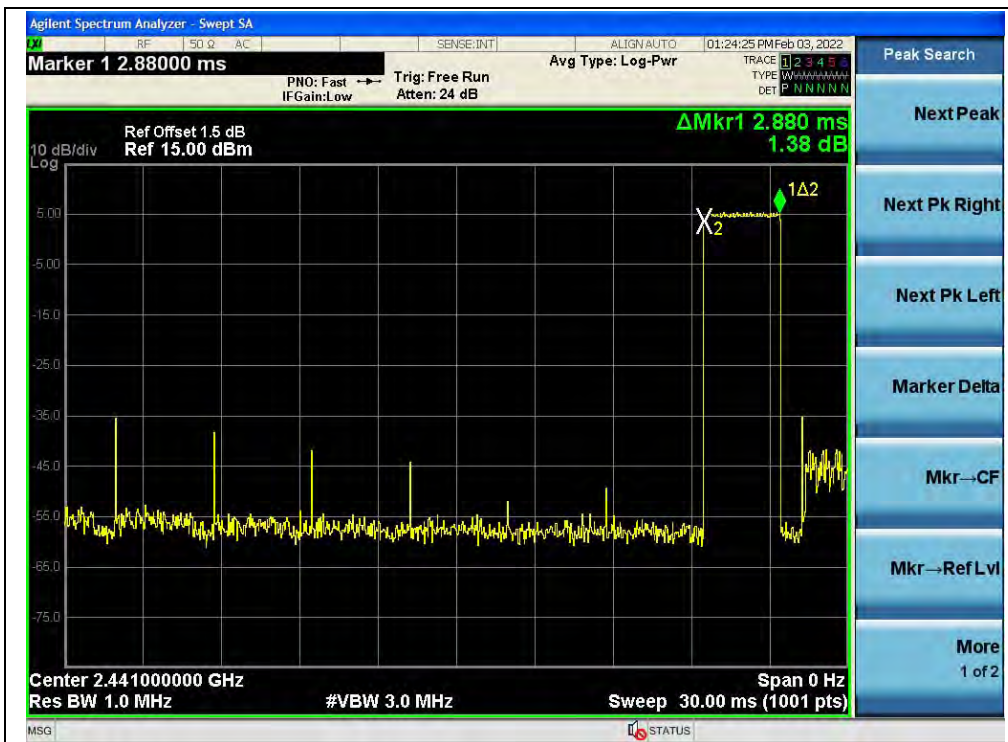

(DH5, 8-DPSK)


2.10. Conducted Spurious Emissions

2.10.1. Requirement

According to FCC §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.10.2. Test Description

Test Setup:

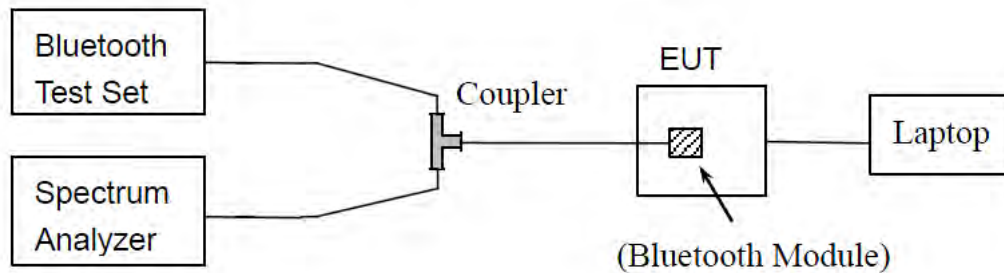

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

2.10.3. Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.




2.10.4. Test Result

GFSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
0	2402	-47.45	1.05	-18.95	PASS
39	2441	-48.12	2.81	-17.19	PASS
78	2480	-47.32	1.96	-18.04	PASS


B. Test Plot:

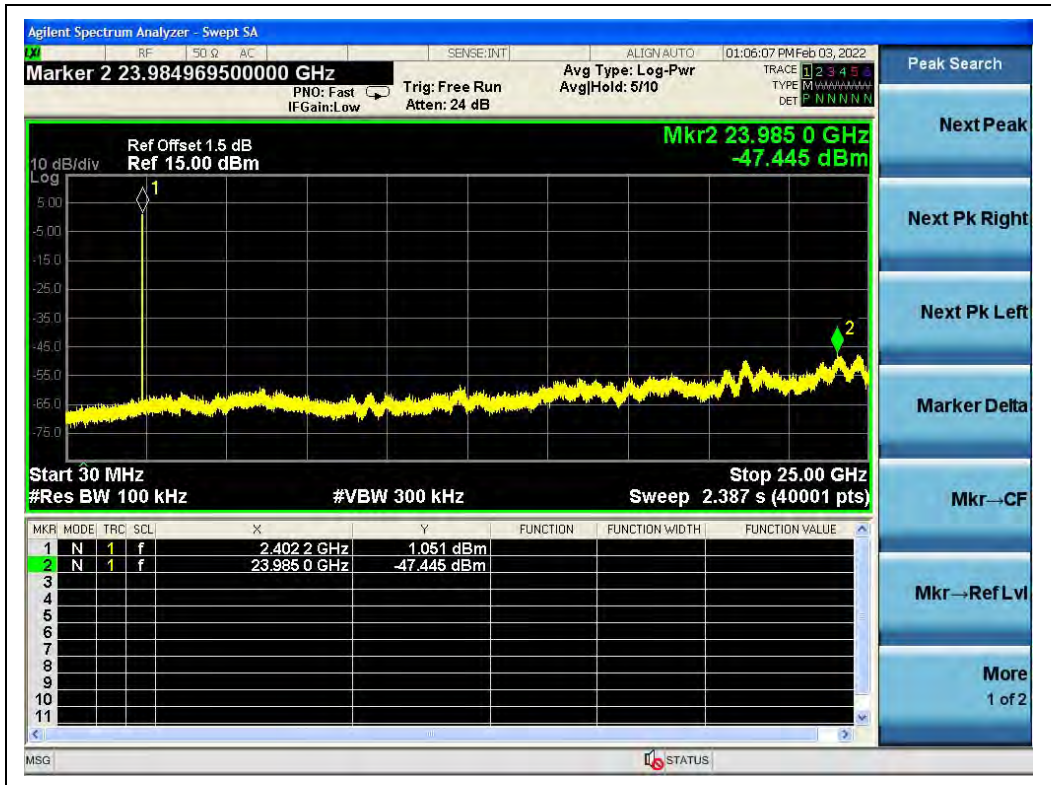


(30MHz to 25GHz, Channel 0, GFSK)

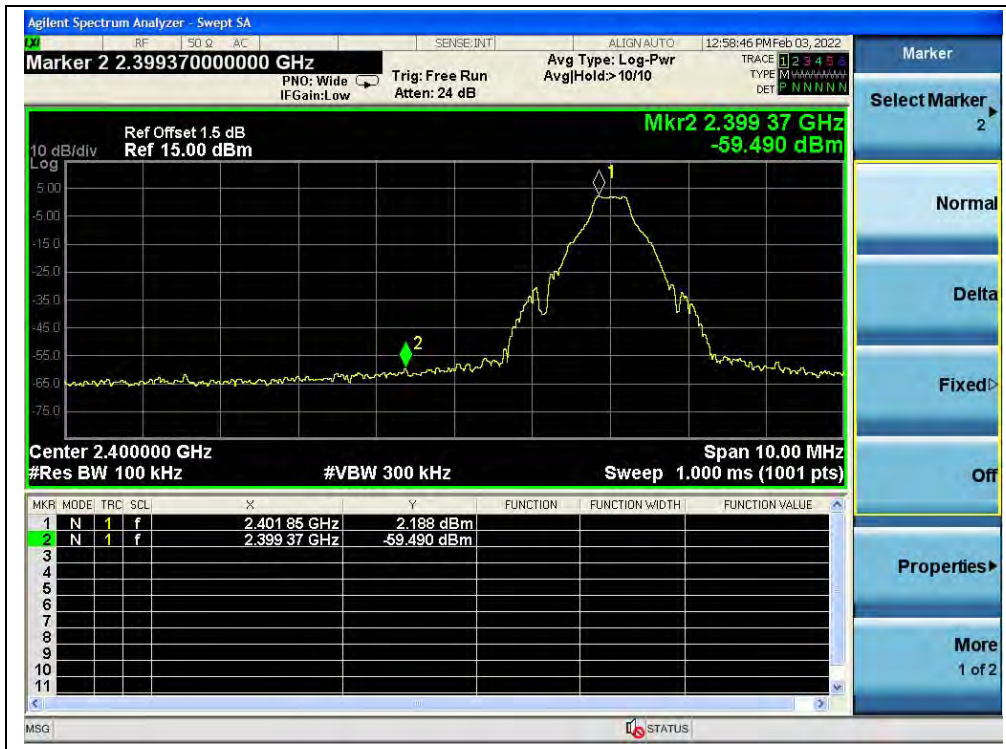


(Band edge, Channel 0, GFSK)

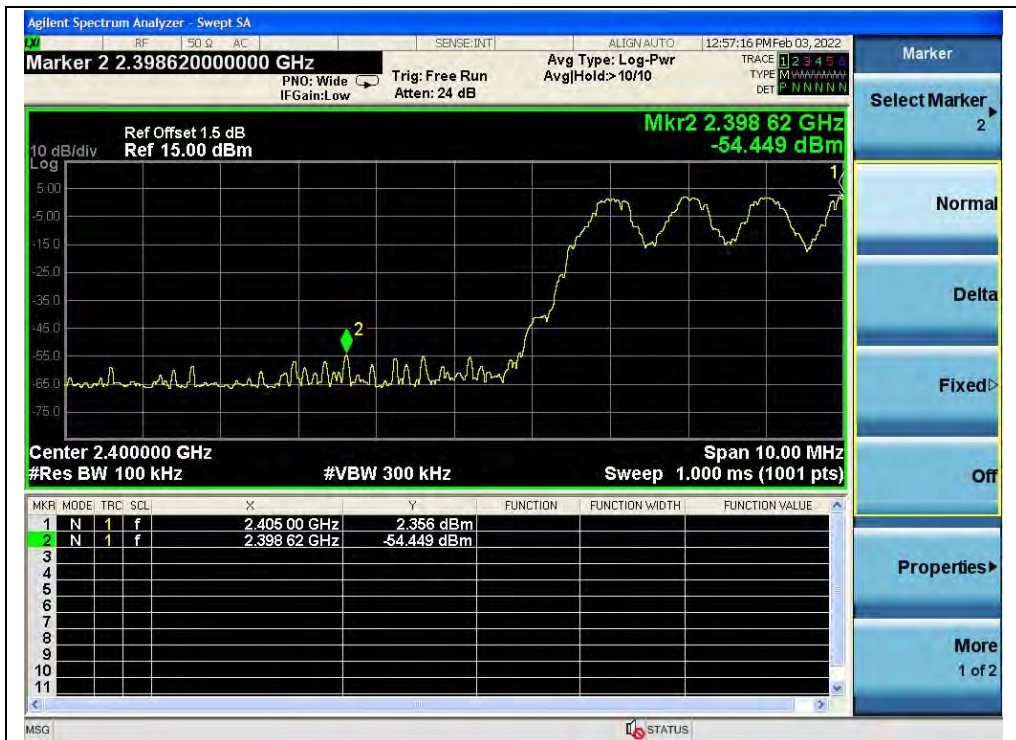


(Band edge with hopping on, Channel 0, GFSK)

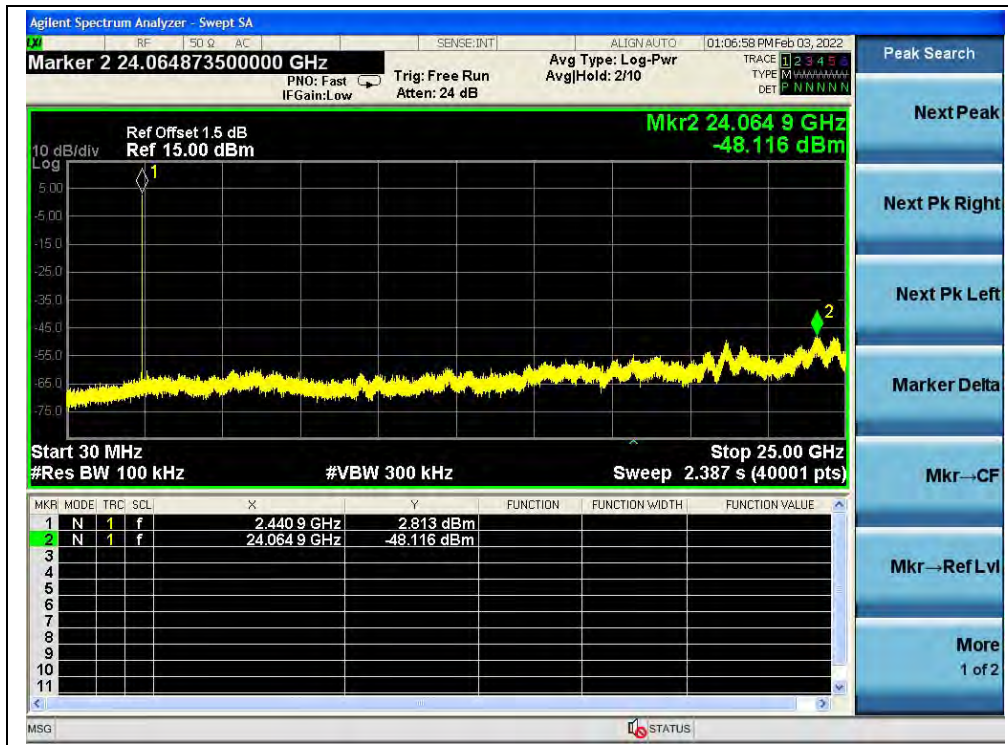

(30MHz to 25GHz, Channel 39, GFSK)

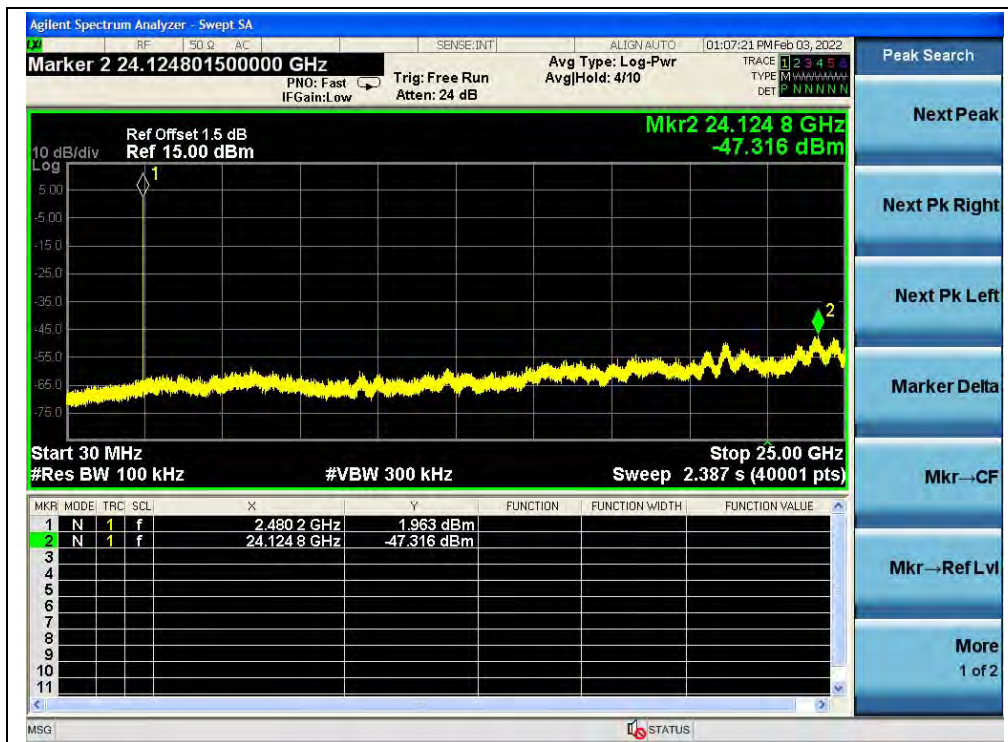

(30MHz to 25GHz, Channel 78, GFSK)

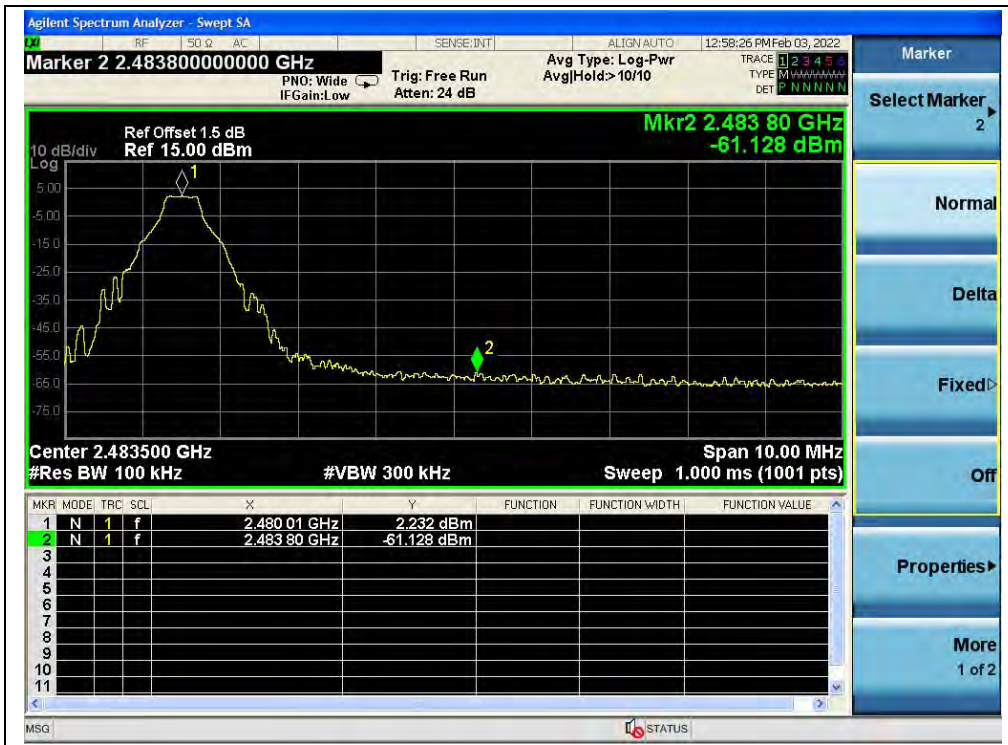

(Band edge, Channel 78, GFSK)



(Band edge with hopping on, Channel 78, GFSK)




$\pi/4$ -DQPSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
0	2402	-47.38	1.98	-18.02	PASS
39	2441	-47.40	1.83	-18.17	PASS
78	2480	-47.62	-2.08	-22.08	PASS

B. Test Plot:

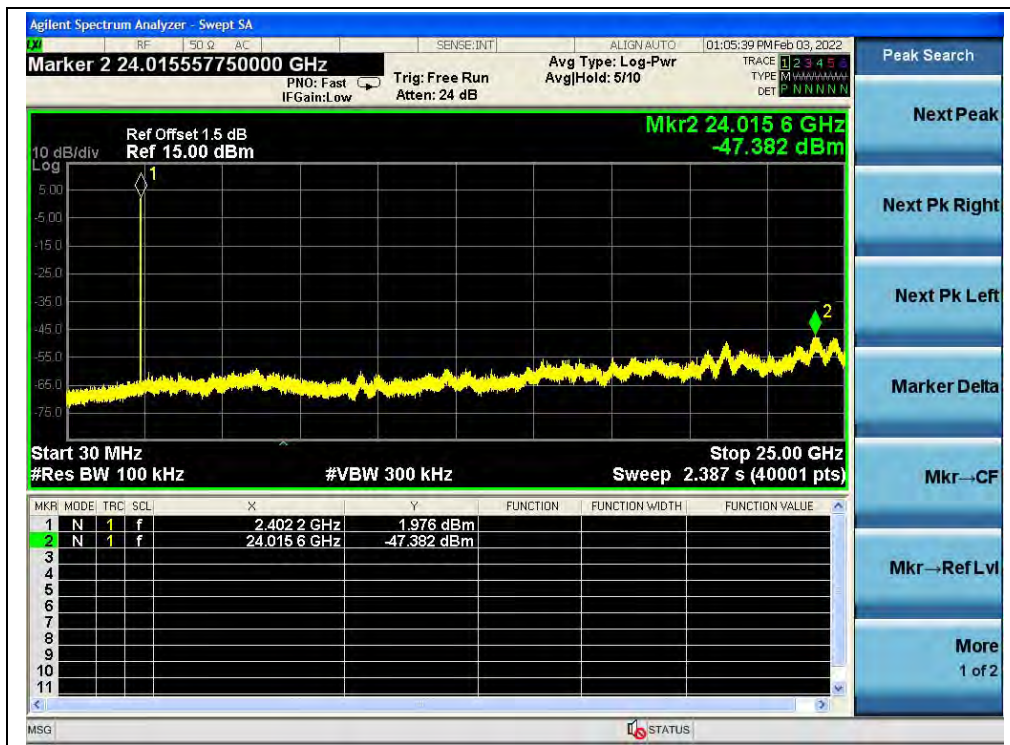


(30MHz to 25GHz, Channel 0, $\pi/4$ -DQPSK)




(Band edge, Channel 0, $\pi/4$ -DQPSK)



(Band edge with hopping on, Channel 0, $\pi/4$ -DQPSK)

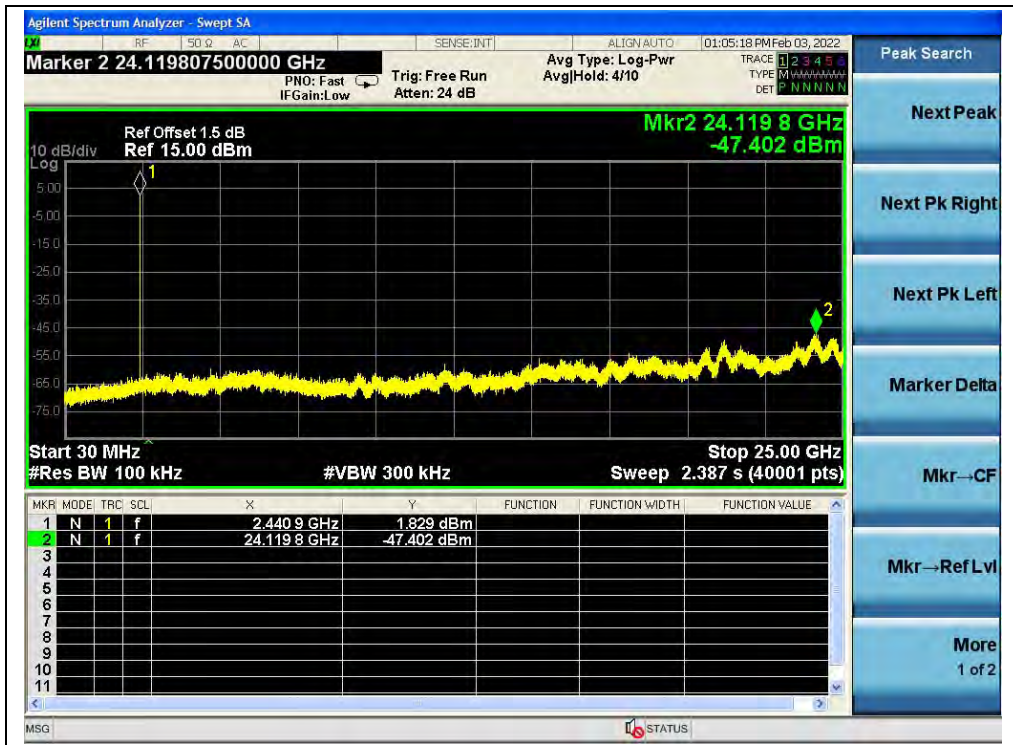

(30MHz to 25GHz, Channel 39, $\pi/4$ -DQPSK)

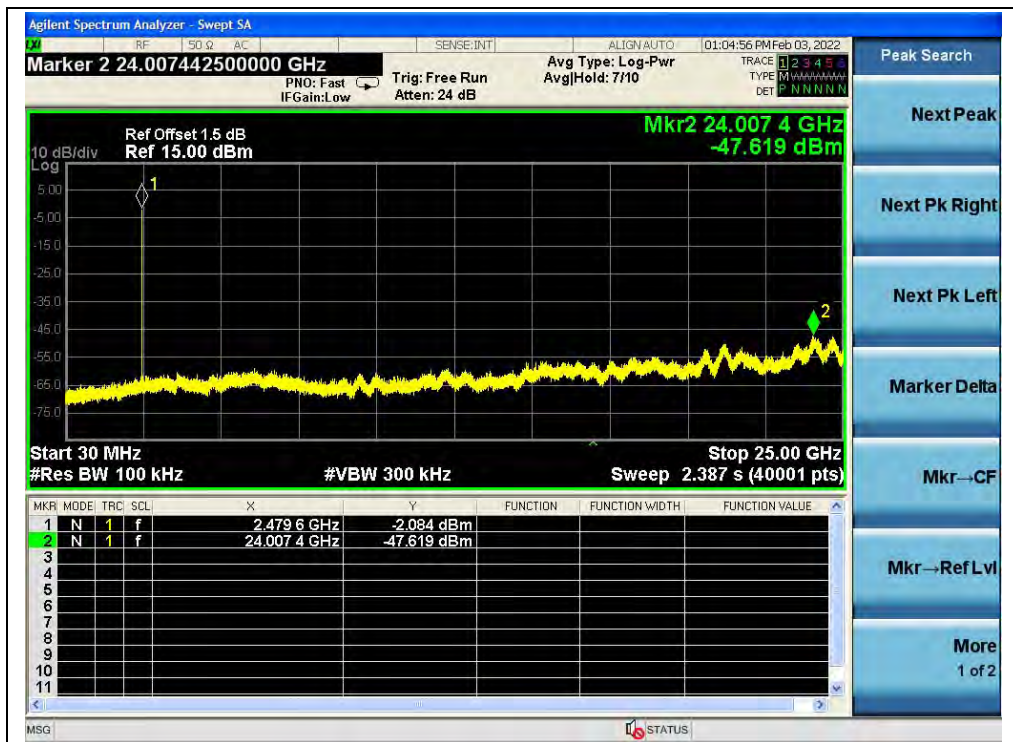

(30MHz to 25GHz, Channel 78, $\pi/4$ -DQPSK)



(Band edge, Channel 78, $\pi/4$ -DQPSK)



(Band edge with hopping on, Channel 78, $\pi/4$ -DQPSK)




8-DPSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
0	2402	-47.22	2.08	-17.92	PASS
39	2441	-46.73	-0.43	-20.43	PASS
78	2480	-47.33	-0.48	-20.48	PASS

B. Test Plot:

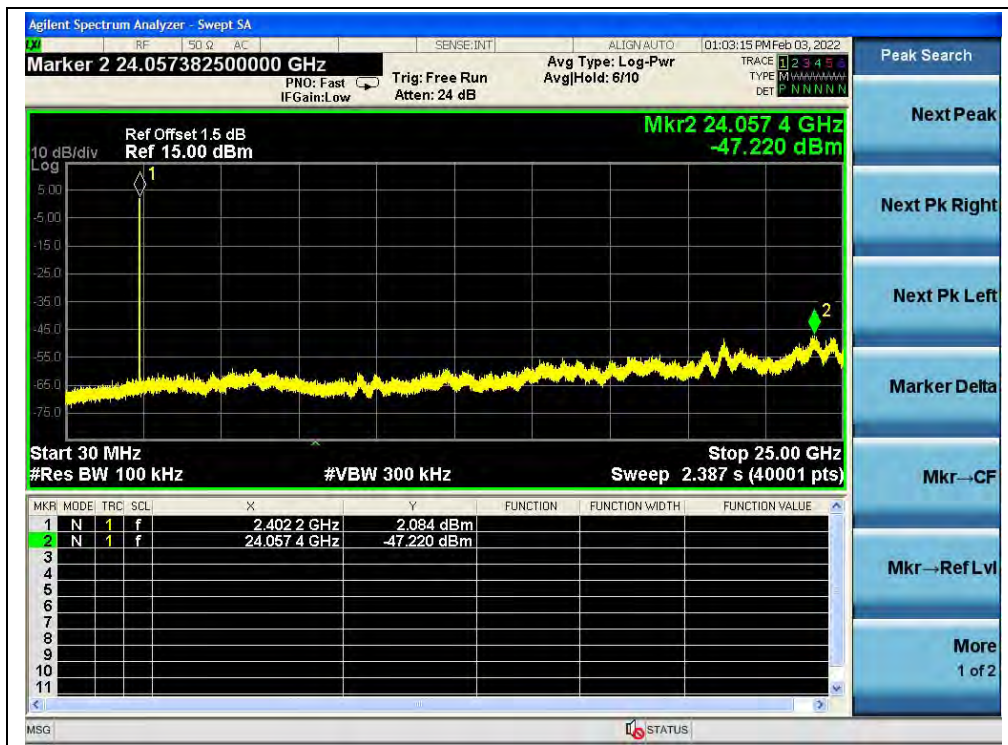


(30MHz to 25GHz, Channel 0, 8-DPSK)

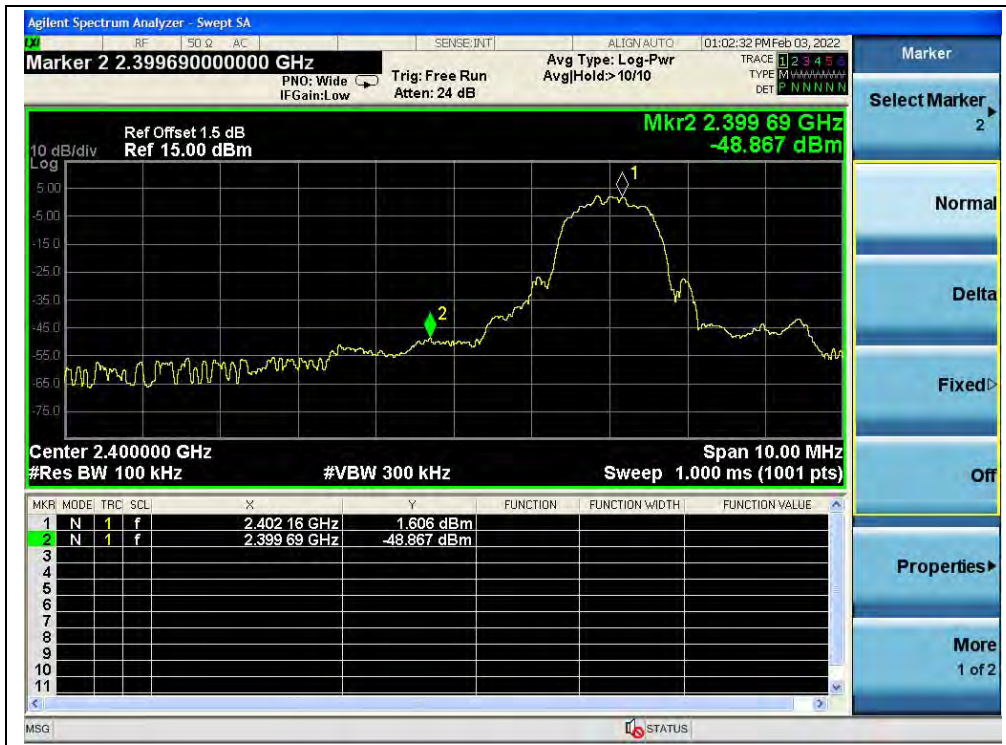


(Band edge, Channel 0, 8-DPSK)



(Band edge with hopping on, Channel 0, 8-DPSK)

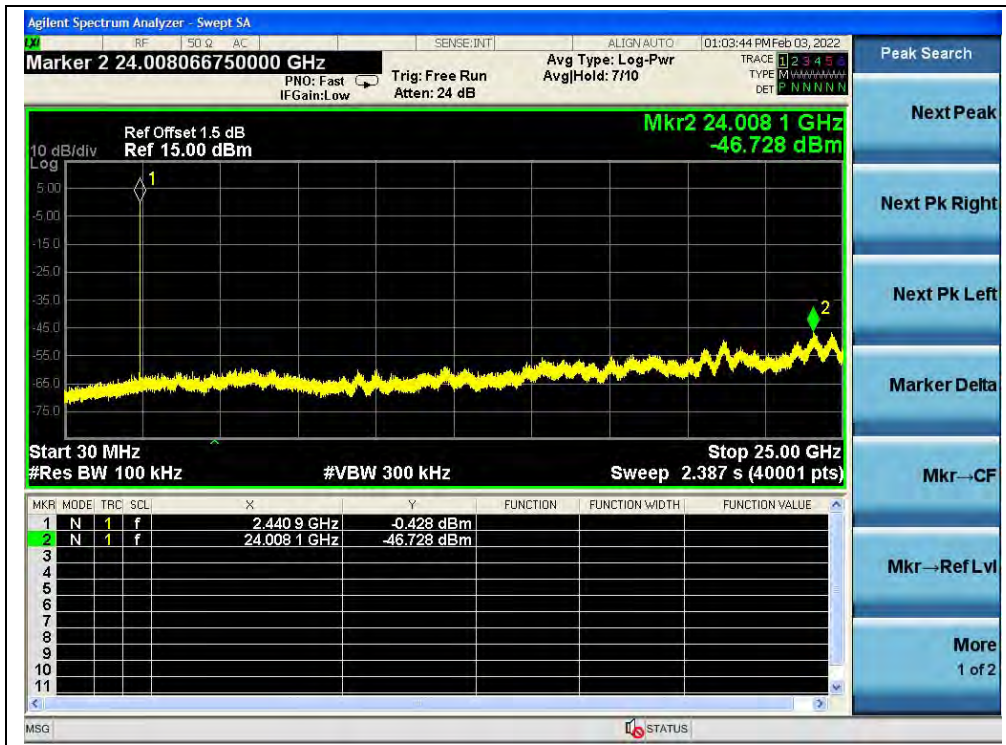

(30MHz to 25GHz, Channel 39, 8-DPSK)

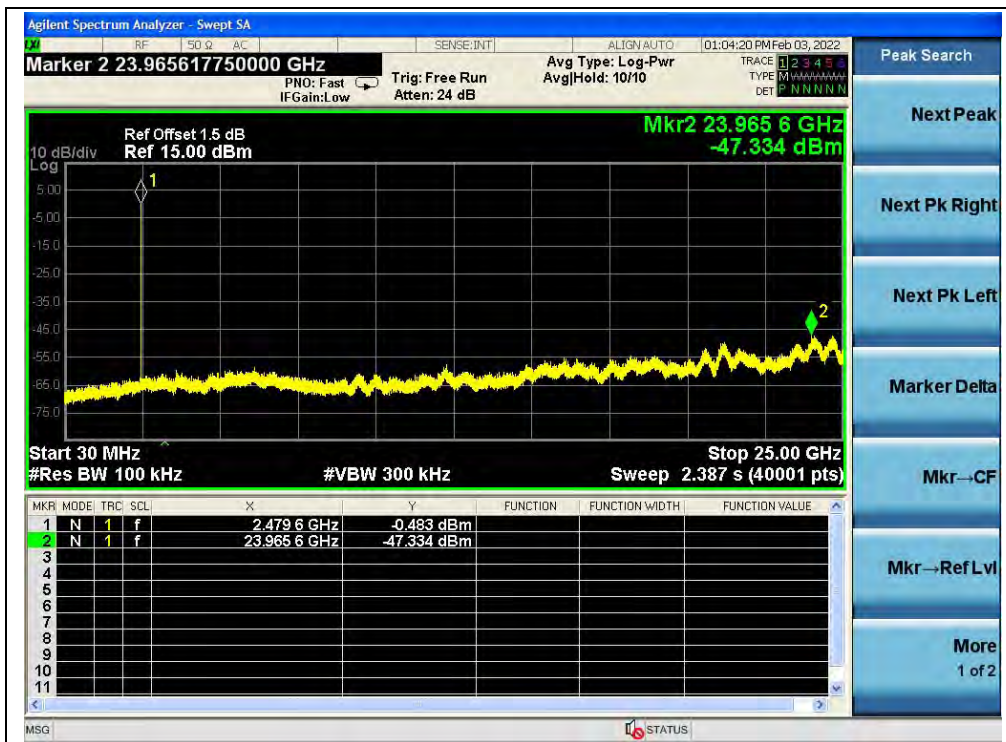

(30MHz to 25GHz, Channel 78, 8-DPSK)



(Band edge, Channel 78, 8-DPSK)



(Band edge with hopping on, Channel 78, 8-DPSK)

2.11. Conducted Emission

2.11.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency Range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5- 30	60	50

Note:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.11.2. Test Description

Test Setup:

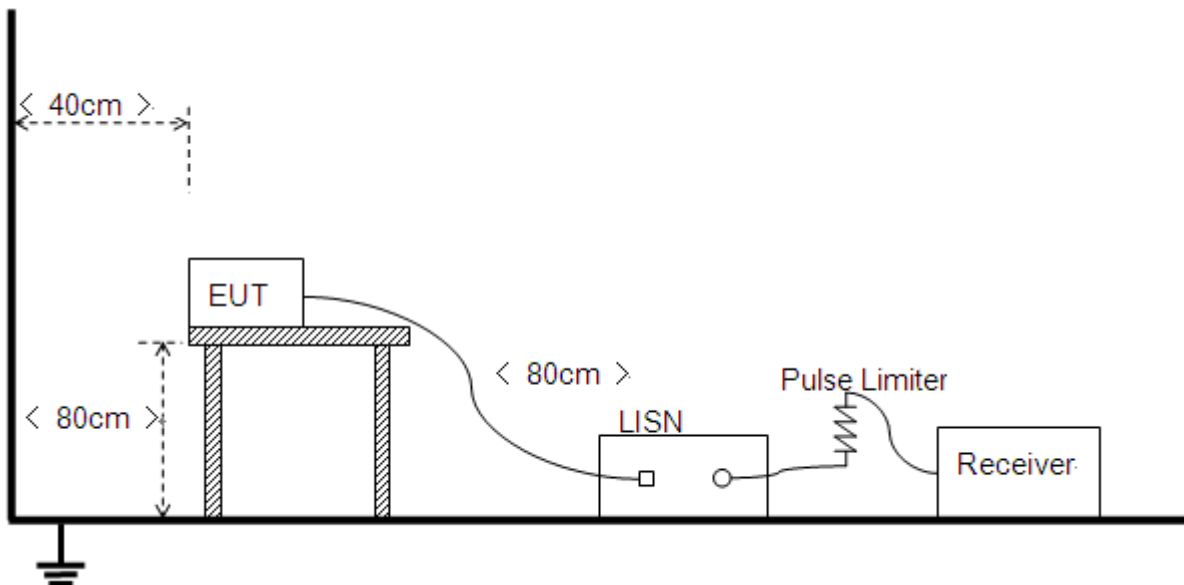

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.



2.11.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test Setup:

Test Mode: EUT+Adapter+Earphone+ BT TX

Test Voltage: AC 120V/60Hz


The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V]} = U_R + L_{\text{Cable loss}} \text{ [dB]} + A_{\text{Factor}}$$

U_R : Receiver Reading


A_{Factor} : Voltage division factor of LISN

B. Test Plot:

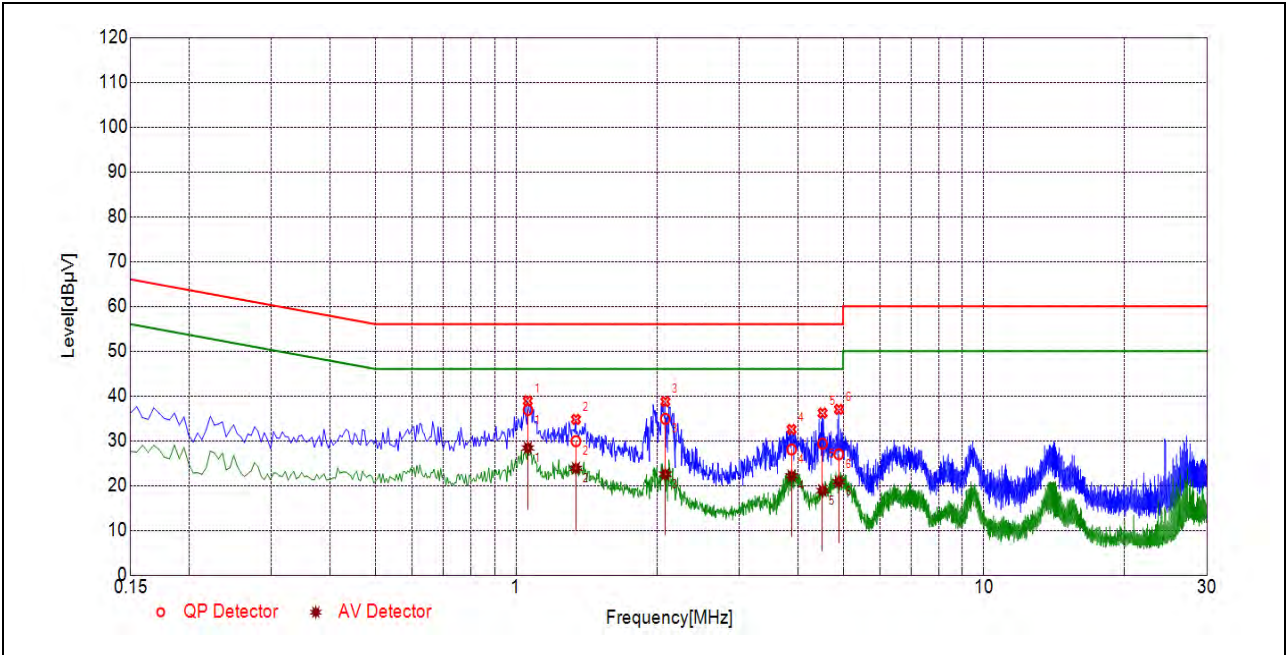

(L Phase)

No.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	1.0598	36.87	28.38	56.00	46.00	Line	PASS
2	1.3420	29.88	23.84	56.00	46.00		PASS
3	2.0843	34.88	22.50	56.00	46.00		PASS
4	3.8815	28.04	22.13	56.00	46.00		PASS
5	4.5185	29.31	18.86	56.00	46.00		PASS
6	4.8943	26.96	20.82	56.00	46.00		PASS

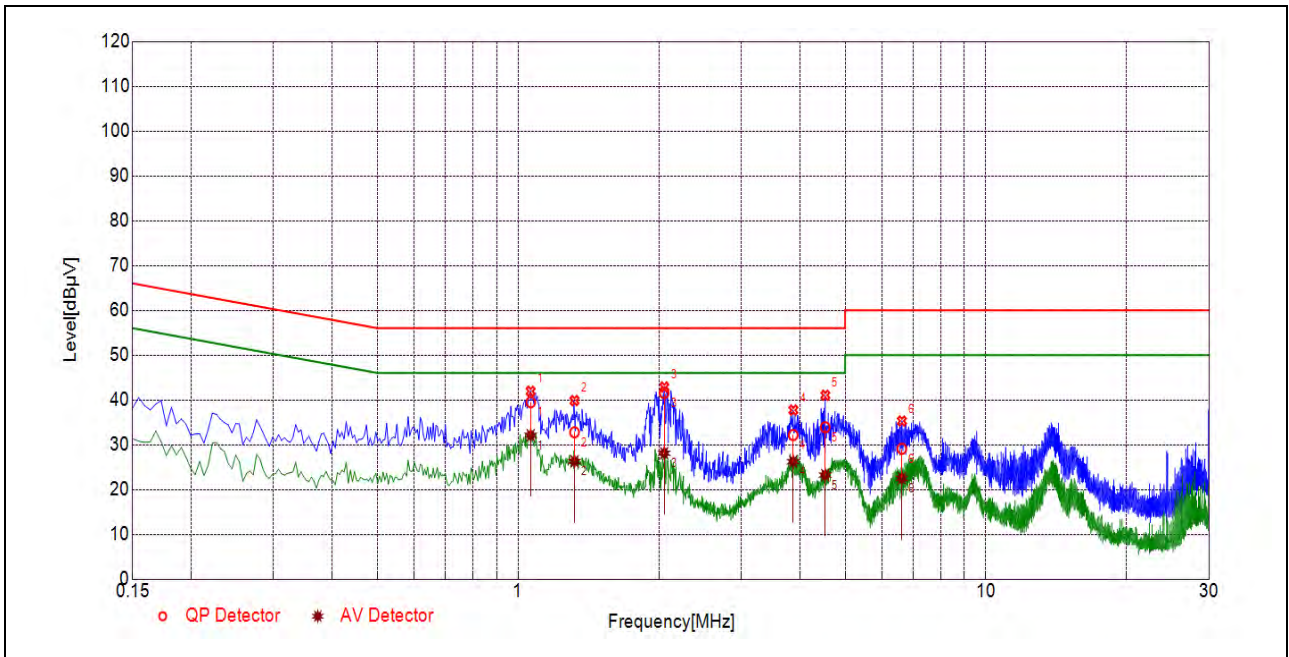

(N Phase)

No.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	1.0638	39.49	32.09	56.00	32.09	Neutral	PASS
2	1.3199	32.75	26.28	56.00	26.28		PASS
3	2.0521	41.55	28.10	56.00	28.10		PASS
4	3.8721	32.14	26.21	56.00	26.21		PASS
5	4.5331	33.88	23.21	56.00	23.21		PASS
6	6.6111	29.09	22.47	60.00	22.47		PASS


2.12. Restricted Frequency Bands

2.12.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.12.2. Test Description

Test Setup:

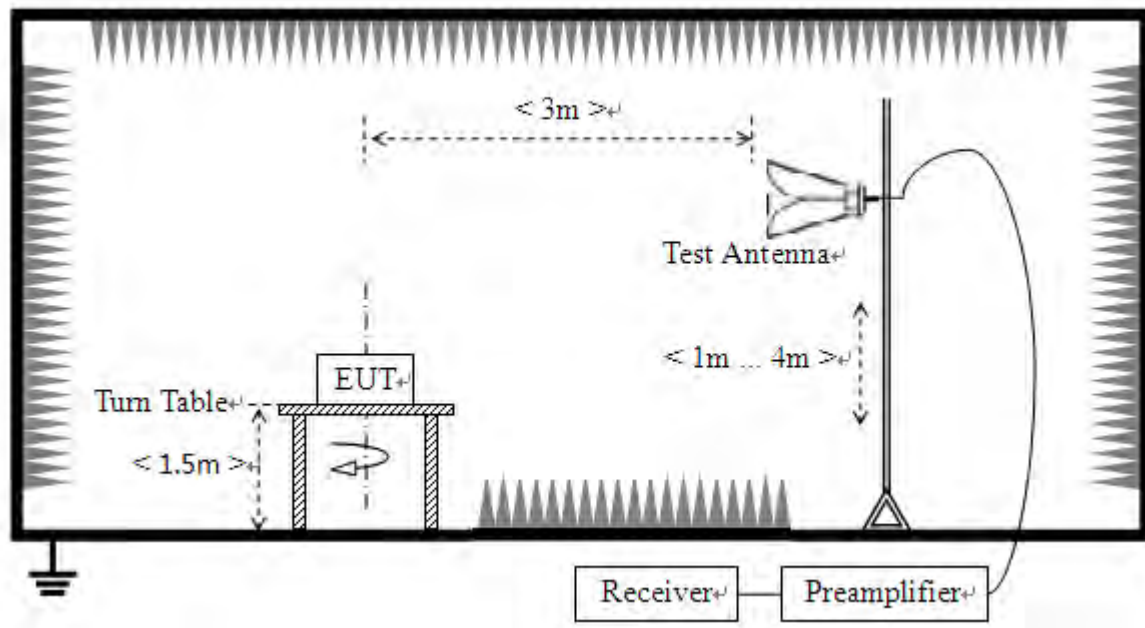

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Horn Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.



2.12.3. Test Procedure

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 kHz for $f < 1\text{GHz}$

VBW = 3 MHz

Sweep = auto

Detector function = peak/average

Trace = max hold

Allow the trace to stabilize

2.12.4. Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

AT: Total correction Factor except Antenna

UR: Receiver Reading

G_{preamp}: Preamplifier Gain

A_{Factor}: Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.


GFSK Mode

A. Test Verdict:


Channel	Frequency (MHz)	Detector	Receiver Reading U _R (dBμV)	A _T (dB)	A _{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
0	2383.74	PK	26.57	6.74	27.20	60.51	74	PASS
0	2390.00	AV	13.82	6.74	27.20	47.76	54	PASS
78	2485.78	PK	26.73	6.74	27.20	60.67	74	PASS
78	2485.14	AV	13.63	6.74	27.20	47.57	54	PASS




B. Test Plot:

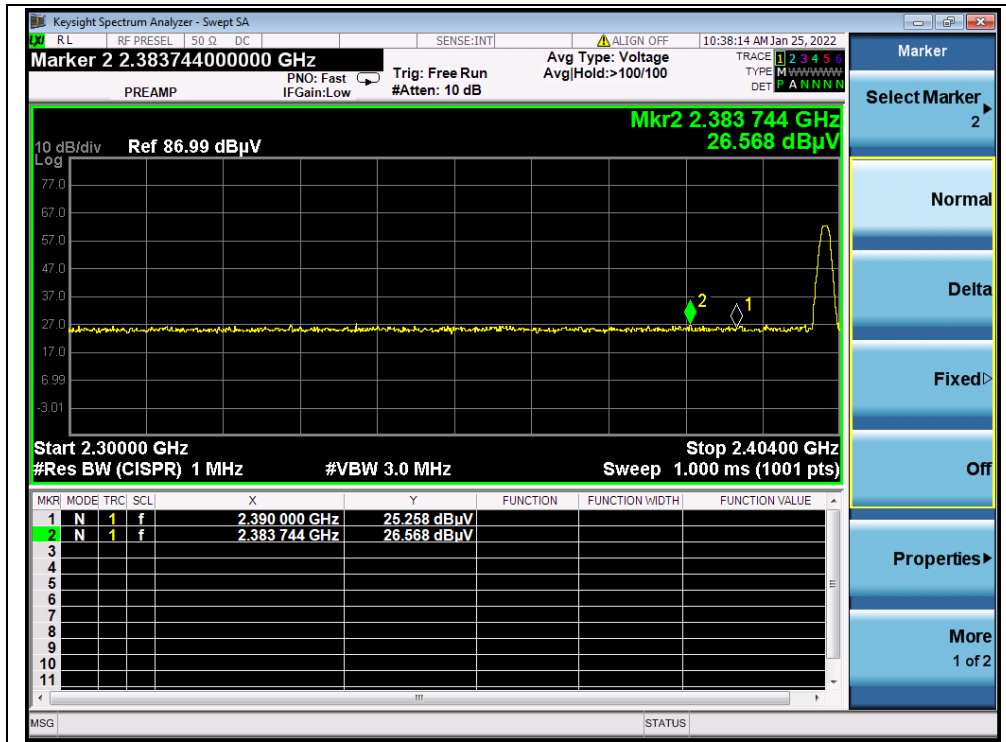

(PEAK, Channel 0, GFSK)

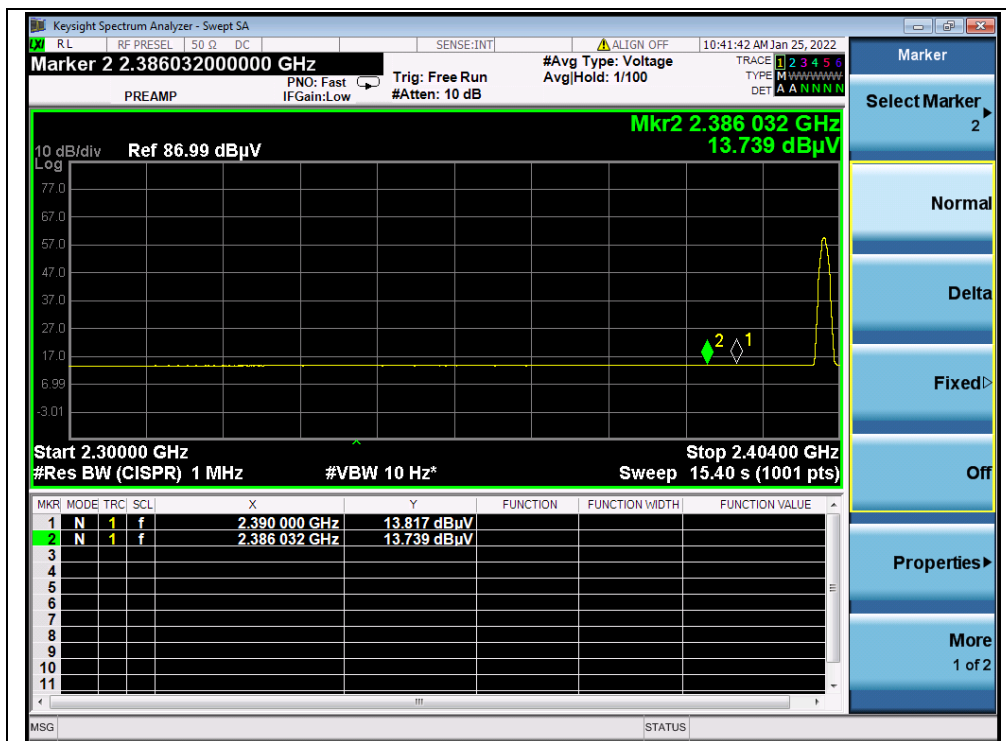

(AVERAGE, Channel 0, GFSK)

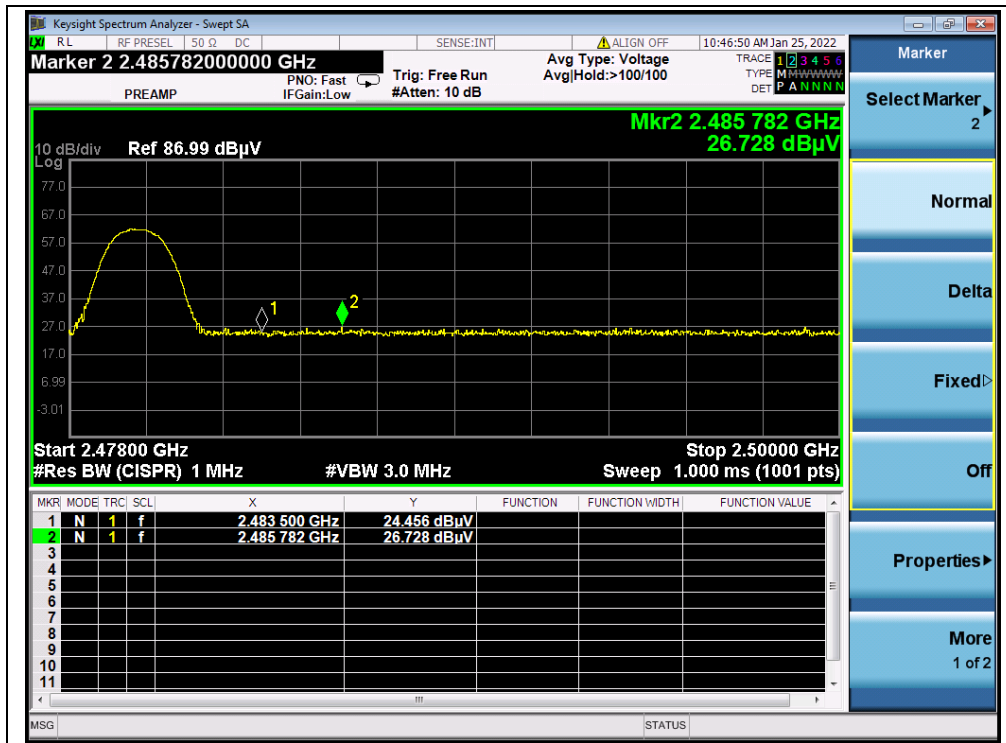

(PEAK, Channel 78, GFSK)



(AVERAGE, Channel 78, GFSK)




$\pi/4$ -DQPSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading	A _T (dB)	A _{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV	U _R (dBμV)					
0	2376.05	PK	26.94	6.74	27.20	60.88	74	PASS
0	2390.00	AV	13.78	6.74	27.20	47.72	54	PASS
78	2485.10	PK	26.39	6.74	27.20	60.33	74	PASS
78	2483.50	AV	13.54	6.74	27.20	47.48	54	PASS


B. Test Plot:

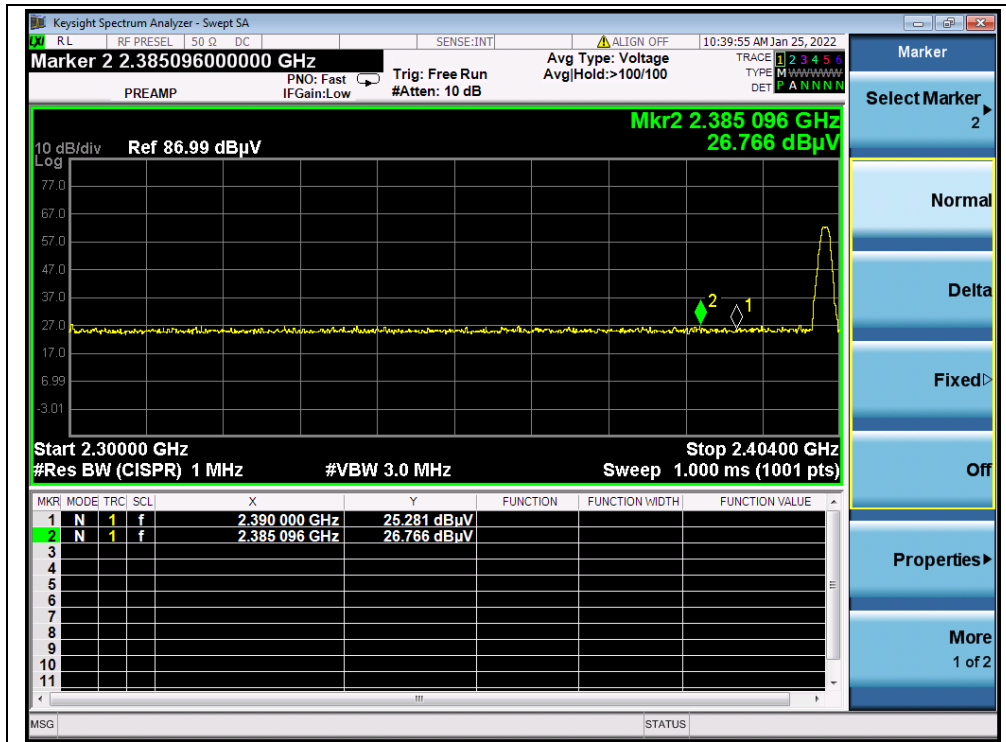


(PEAK, Channel 0, $\pi/4$ -DQPSK)

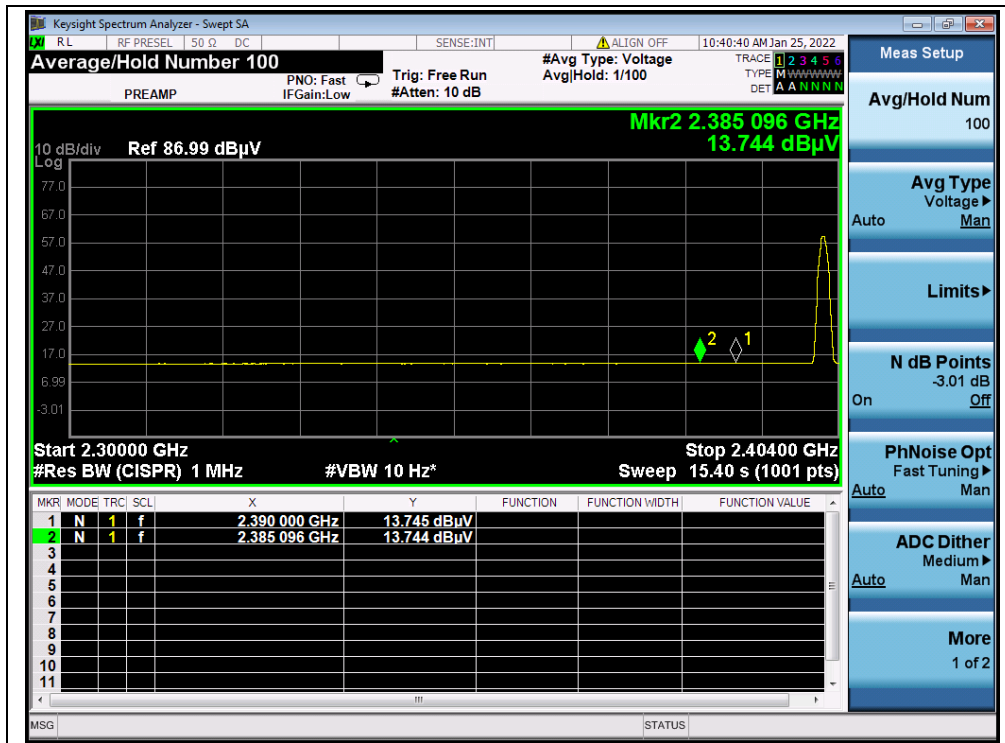

(AVERAGE, Channel 0, $\pi/4$ -DQPSK)

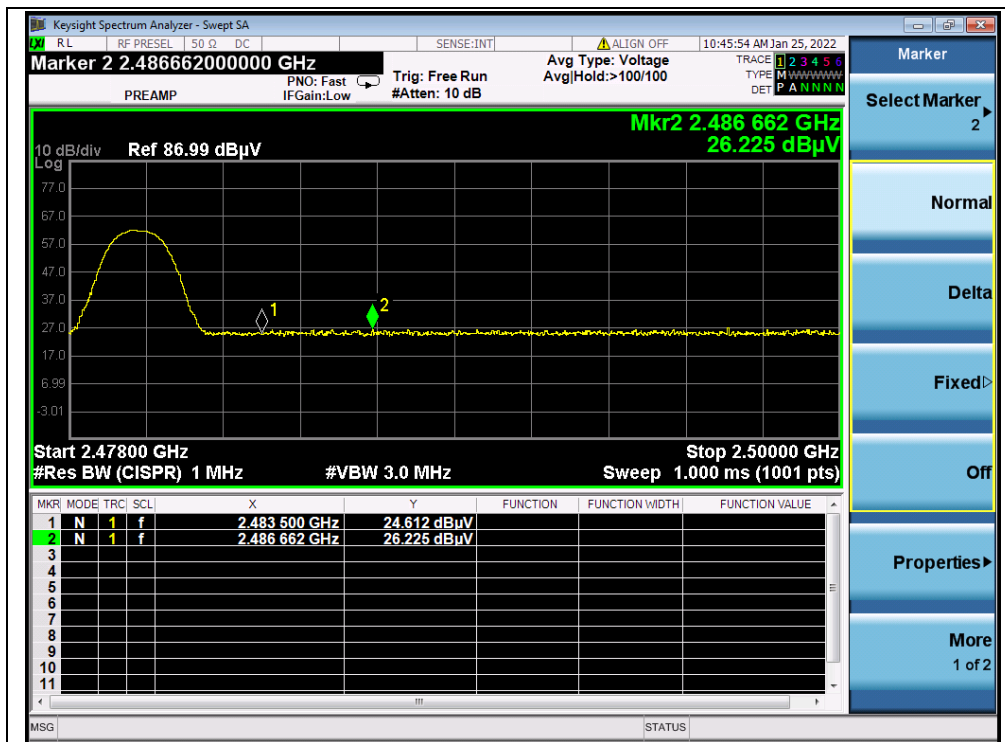

(PEAK, Channel 78, $\pi/4$ -DQPSK)

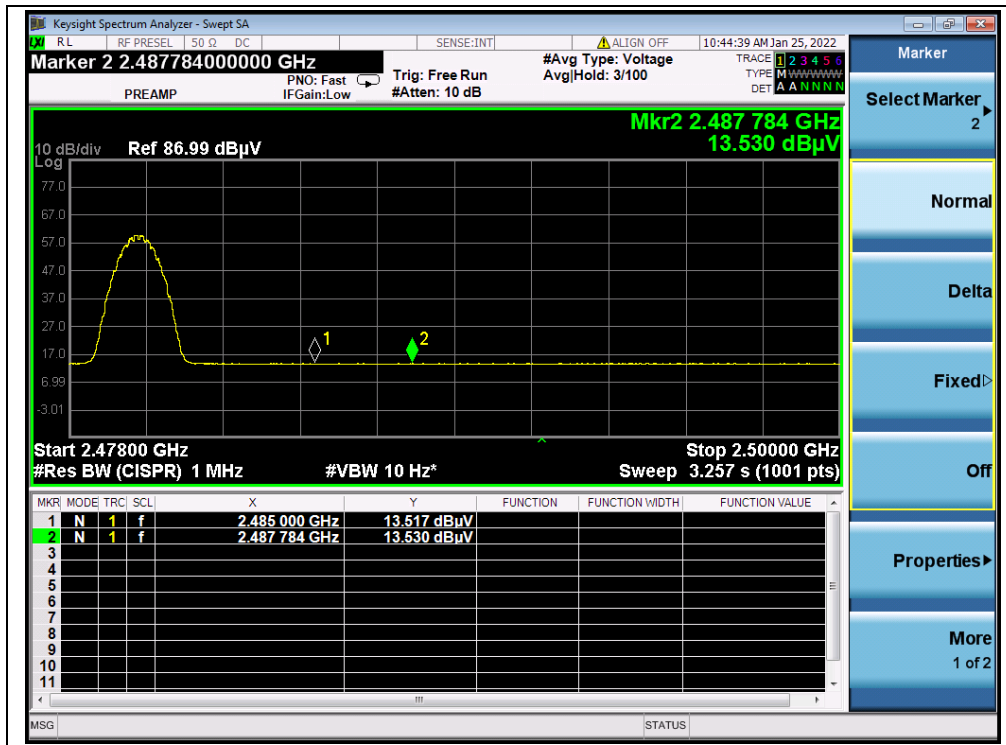

(AVERAGE, Channel 78, π/4-DQPSK)




8-DPSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading	A _T (dB)	A _{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV	U _R (dBμV)					
0	2385.10	PK	26.77	6.74	27.20	60.71	74	PASS
0	2390.00	AV	13.75	6.74	27.20	47.69	54	PASS
78	2486.66	PK	26.23	6.74	27.20	60.17	74	PASS
78	2487.78	AV	13.53	6.74	27.20	47.47	54	PASS


B. Test Plot:

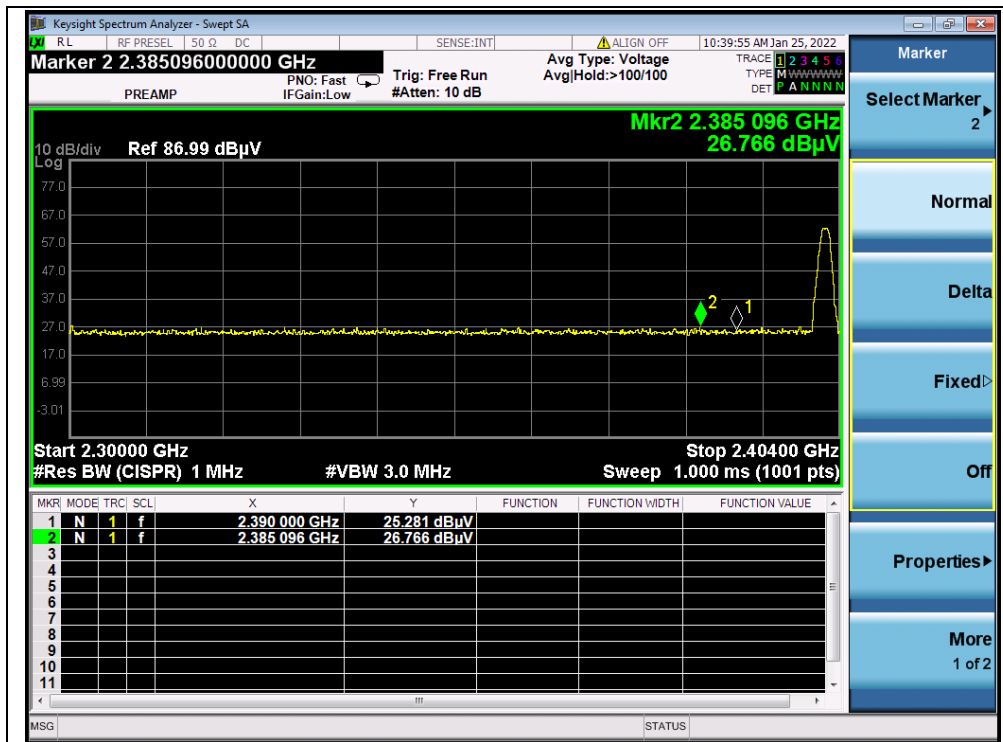


(PEAK, Channel 0, 8-DPSK)

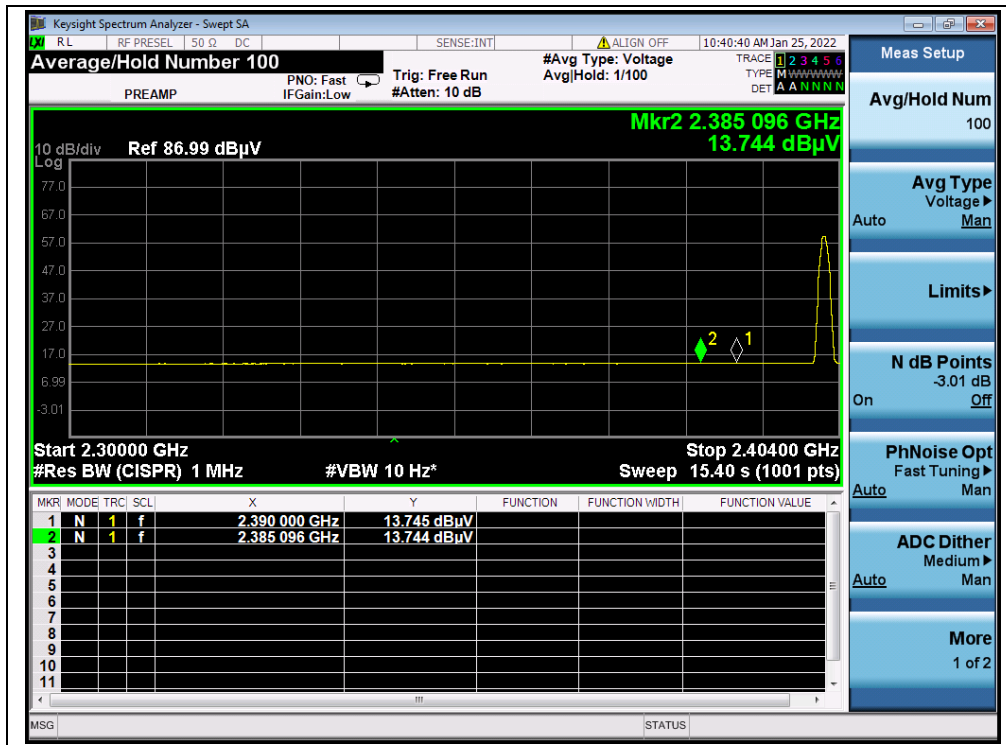

(AVERAGE, Channel 0, 8-DPSK)

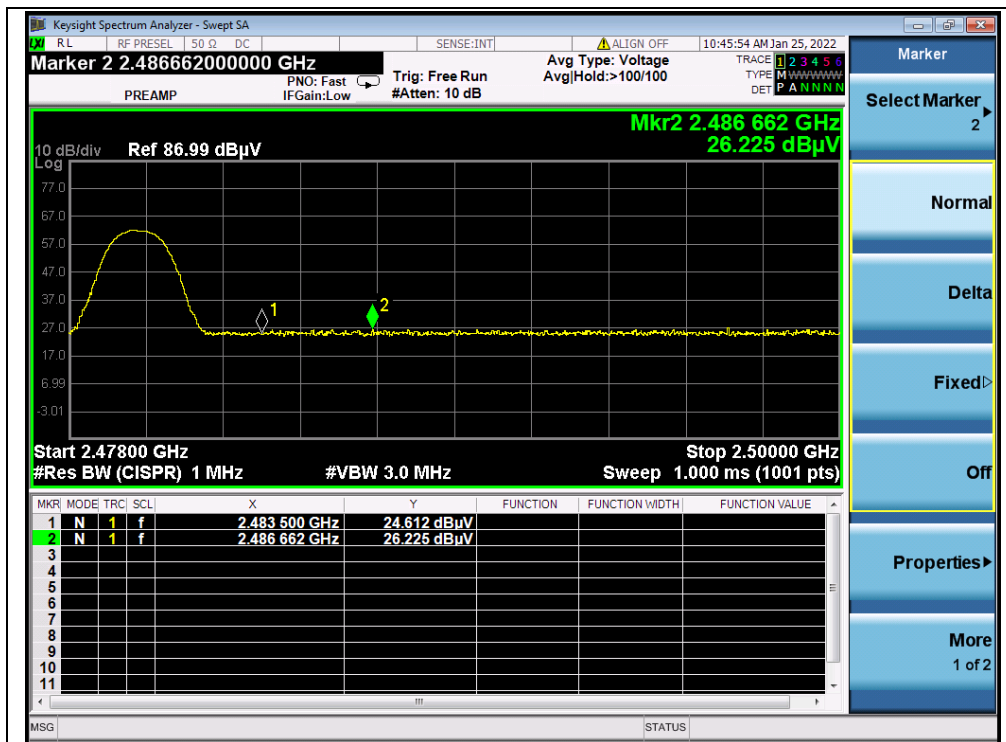

(PEAK, Channel 78, 8-DPSK)

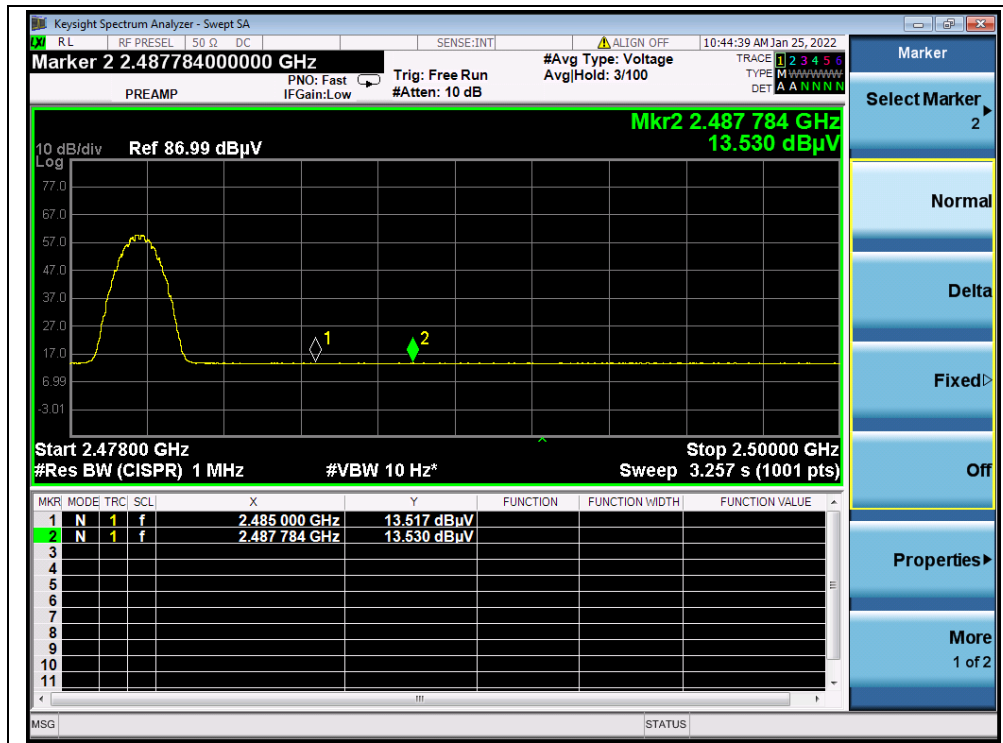

(AVERAGE, Channel 78, 8-DPSK)



2.13. Radiated Emission

2.13.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3


Note1: For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

Note2: For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK). In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).


2.13.2. Test Description

Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

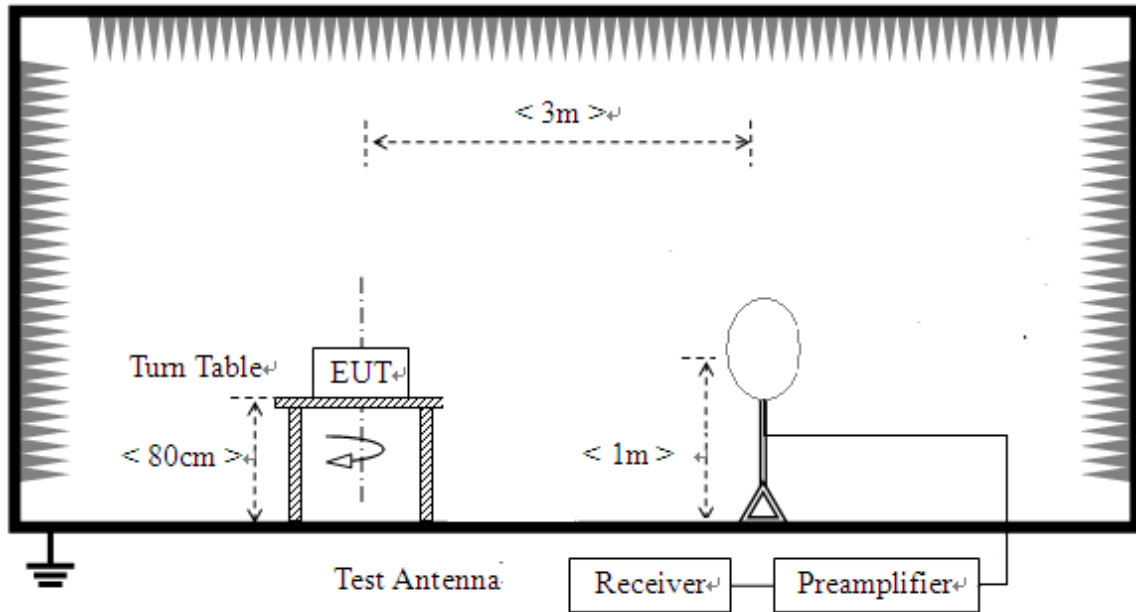

- 2) For radiated emissions from 30MHz to 1GHz

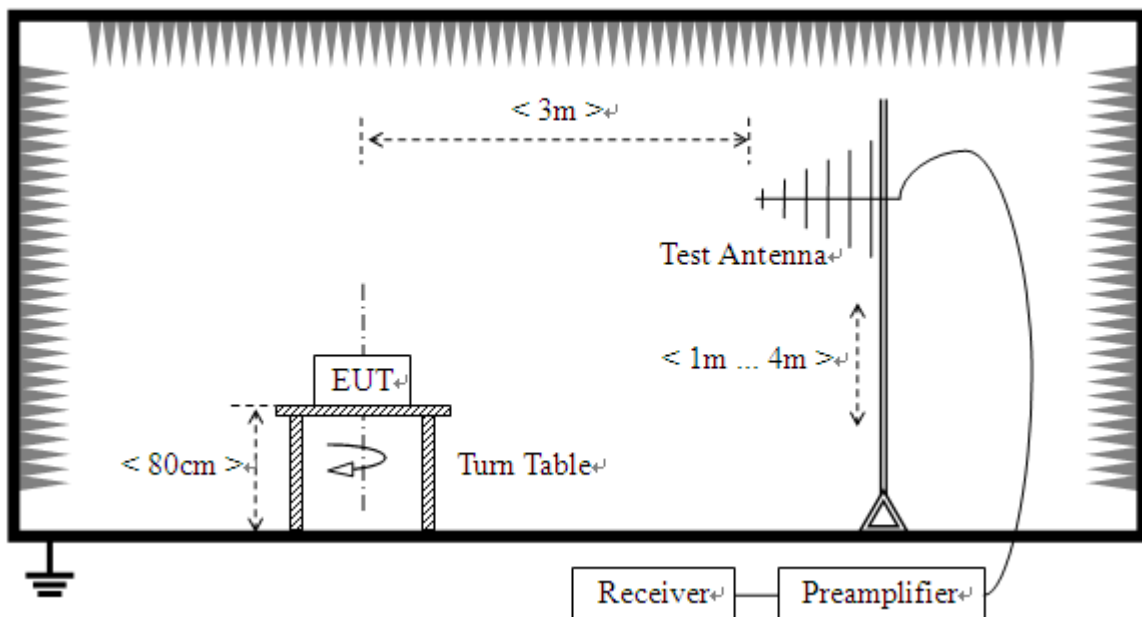

3) For radiated emissions above 1GHz

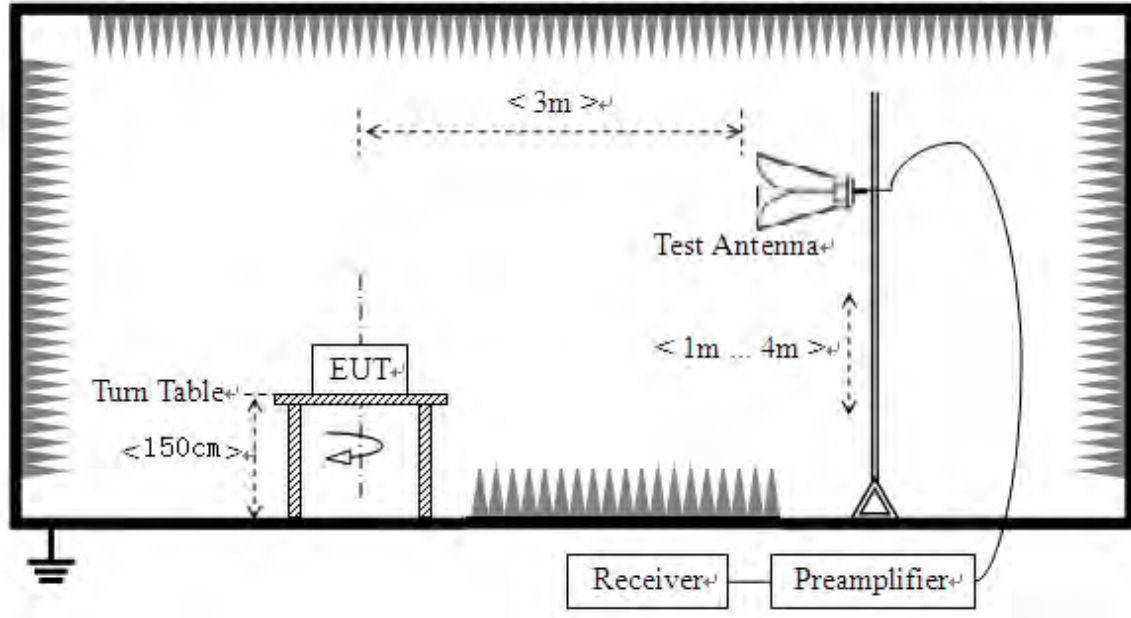

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.



2.13.3. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.


Note 1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note 2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


Note 3: For the frequency, which started from 18GHz to 40GHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

GFSK Mode


Plots for Channel 0

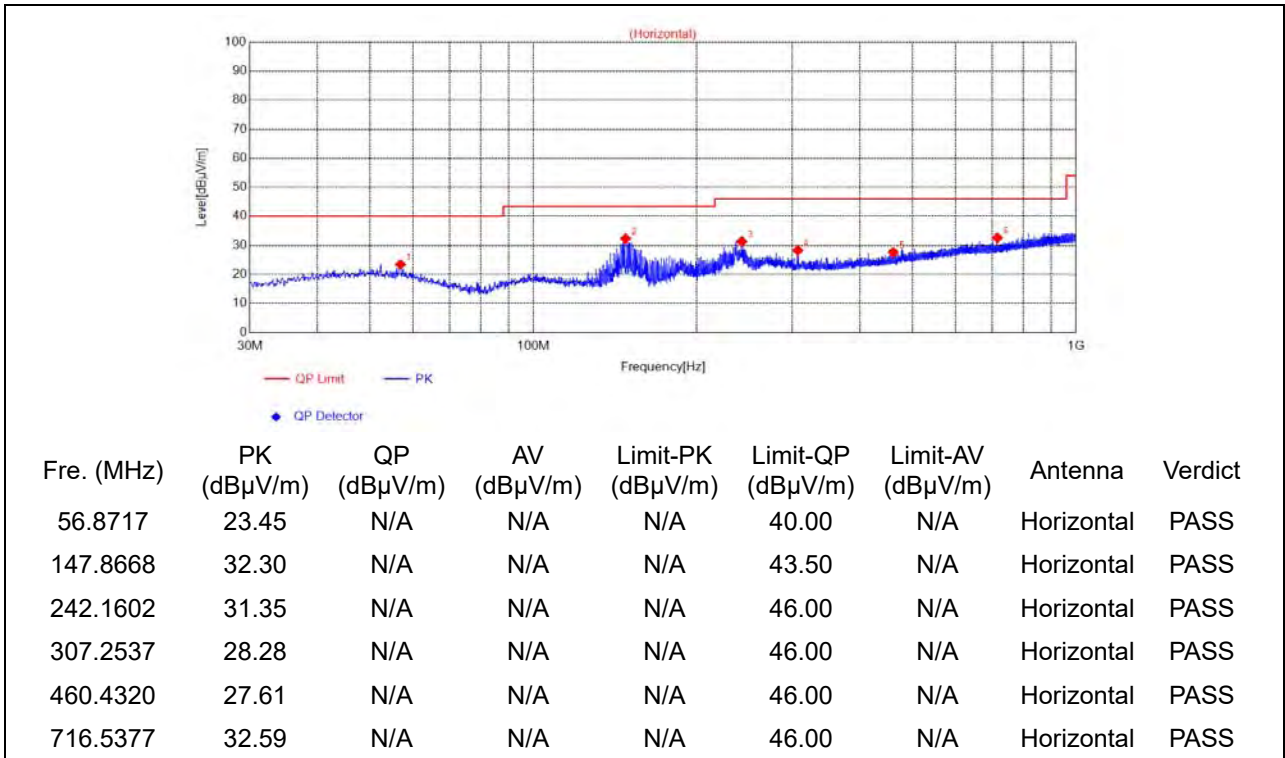

(Antenna Horizontal, 30MHz to 1GHz)

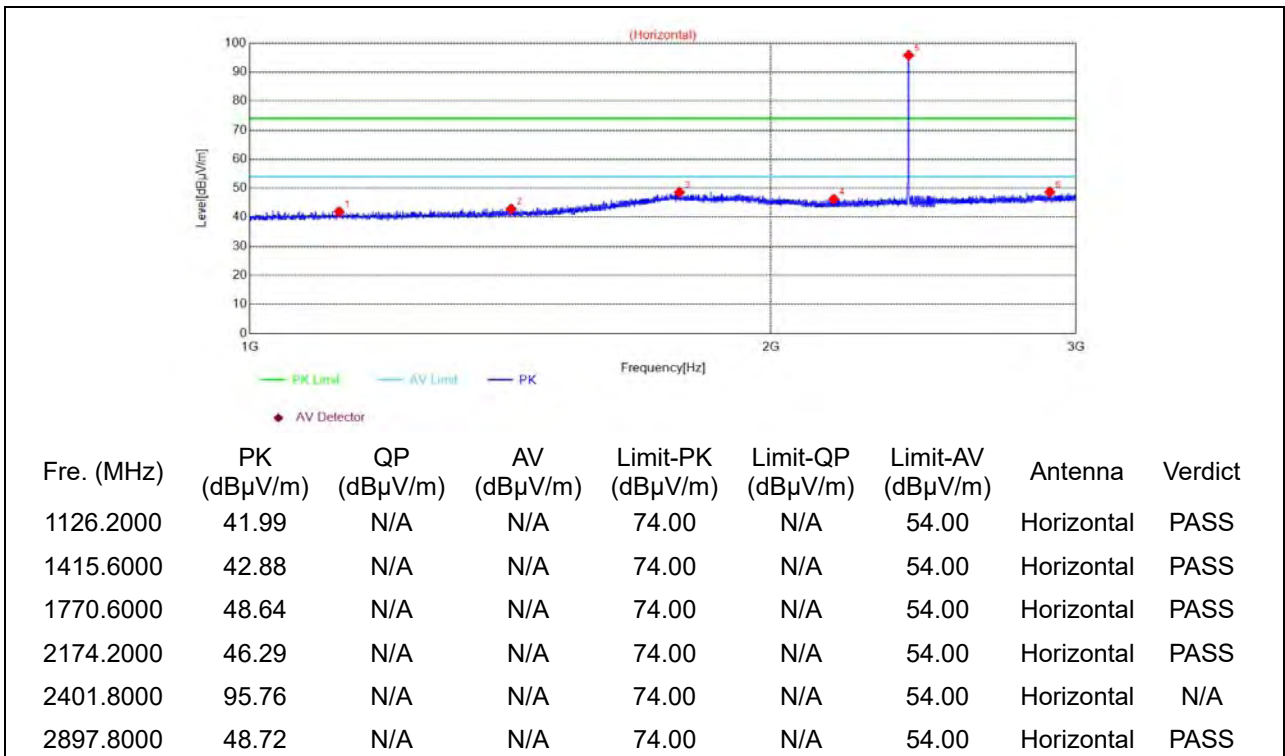


(Antenna Horizontal, 1GHz to 3GHz)

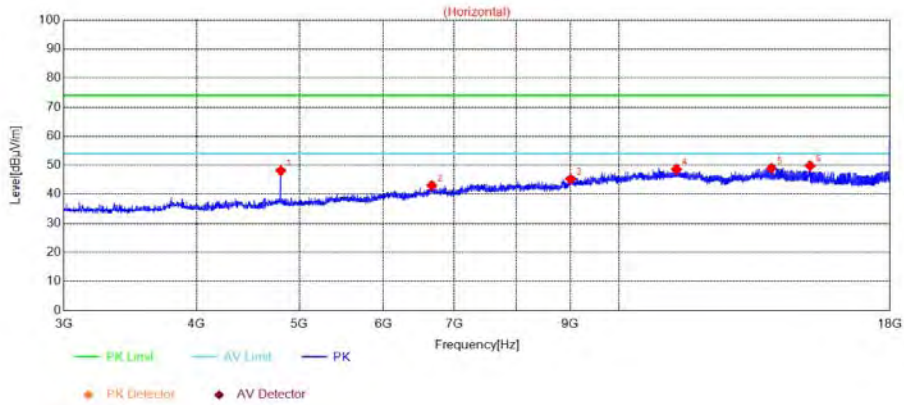


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
4803.0000	48.15	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
6664.5000	43.05	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9007.5000	45.30	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
11329.5000	48.65	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
13921.5000	49.05	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
15139.5000	49.80	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 3GHz to 18GHz)

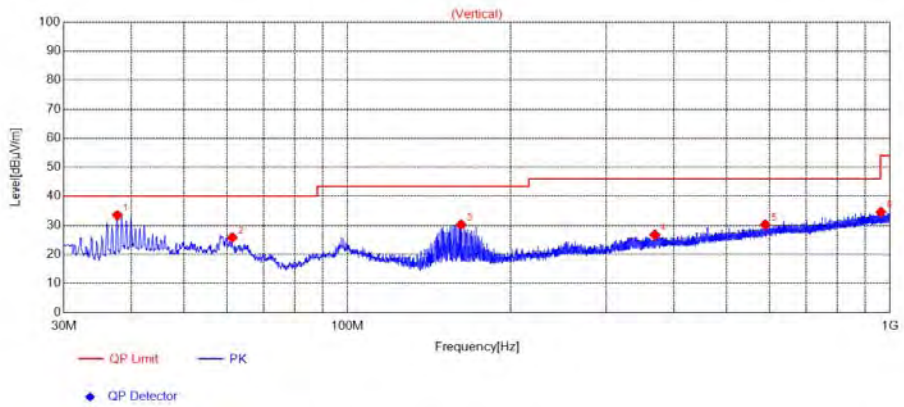


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
37.6638	33.49	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
61.3341	25.80	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
162.0302	30.28	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
368.7579	26.70	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
589.1639	30.27	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
962.5543	34.56	N/A	N/A	N/A	54.00	N/A	Vertical	PASS

(Antenna Vertical, 30MHz to 1GHz)

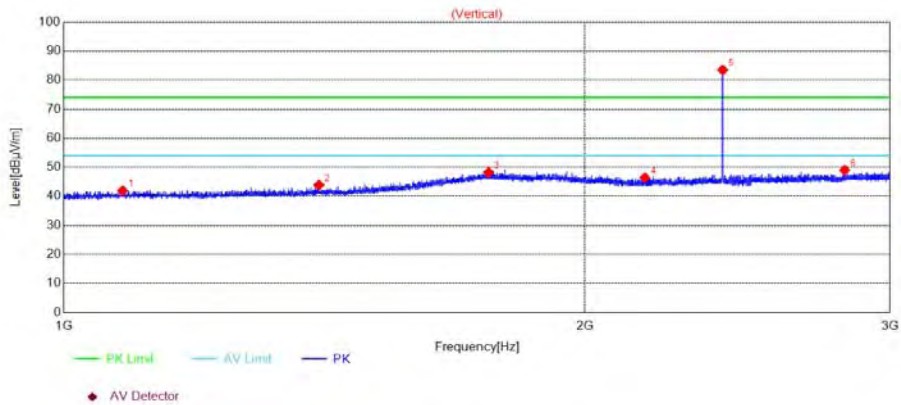

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
1081.4000	41.95	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1404.0000	43.87	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1759.4000	48.23	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2165.8000	46.43	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2401.8000	83.51	N/A	N/A	74.00	N/A	54.00	Vertical	N/A
2824.8000	49.02	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 1GHz to 3GHz)

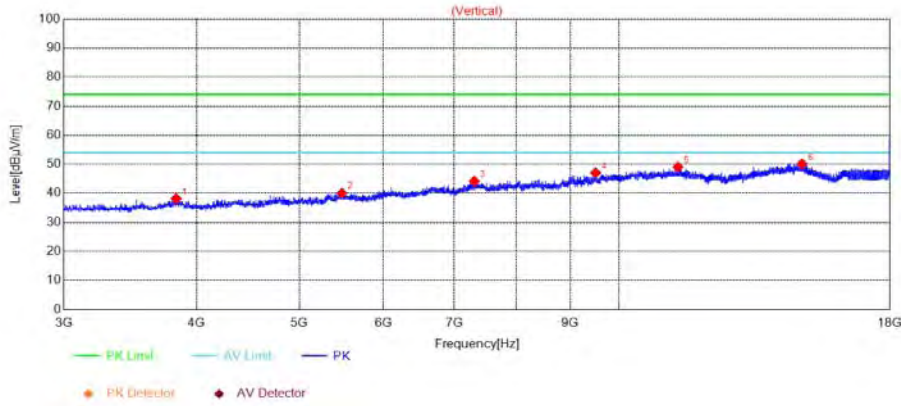


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
3828.0000	38.17	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5484.0000	40.03	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7308.0000	44.18	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
9508.5000	47.05	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
11367.0000	49.08	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
14874.0000	50.13	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 3GHz to 18GHz)


Plot for Channel 39

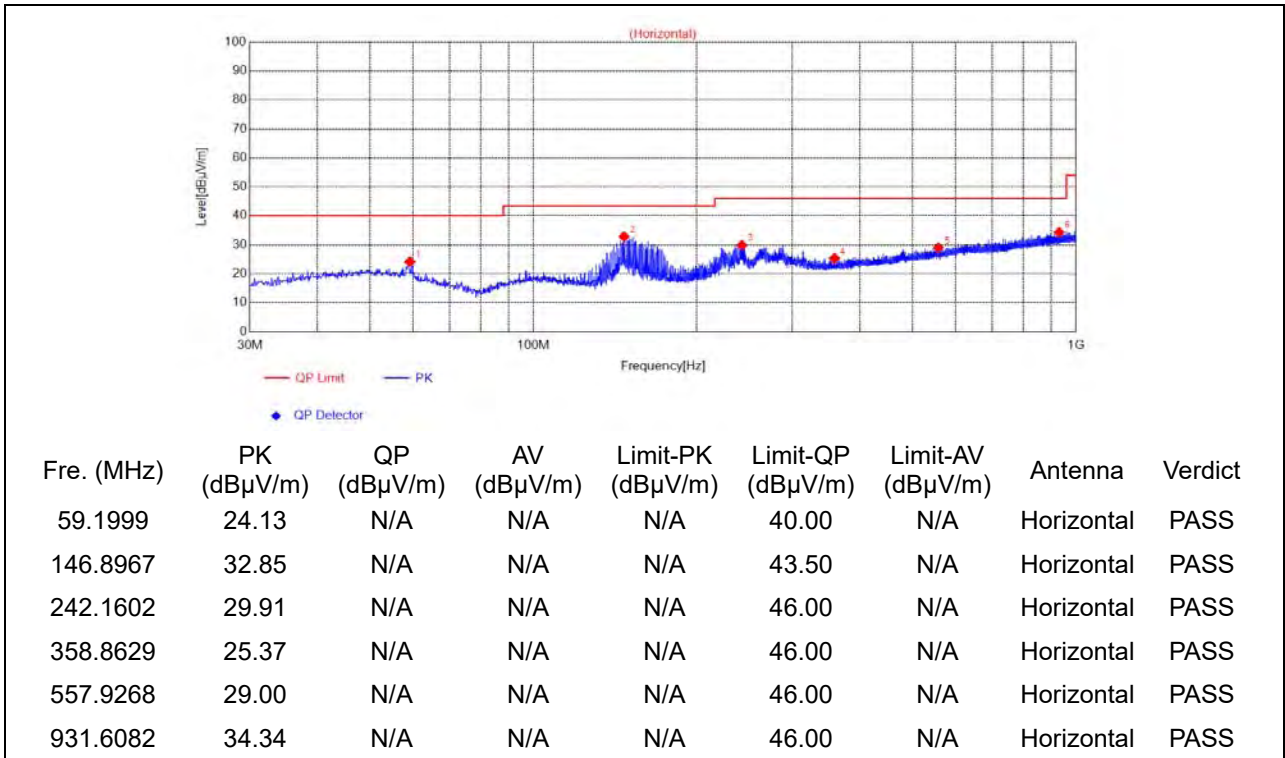

(Antenna Horizontal, 30MHz to 1GHz)

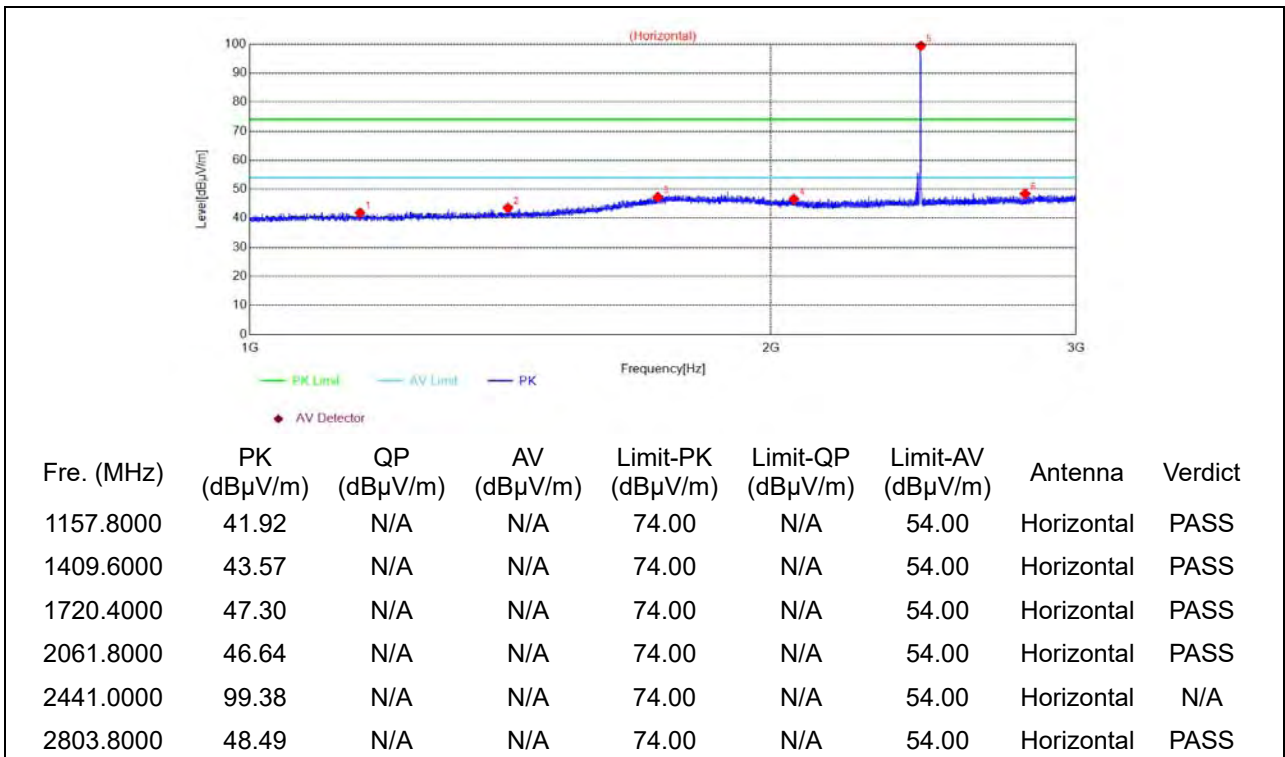


(Antenna Horizontal, 1GHz to 3GHz)

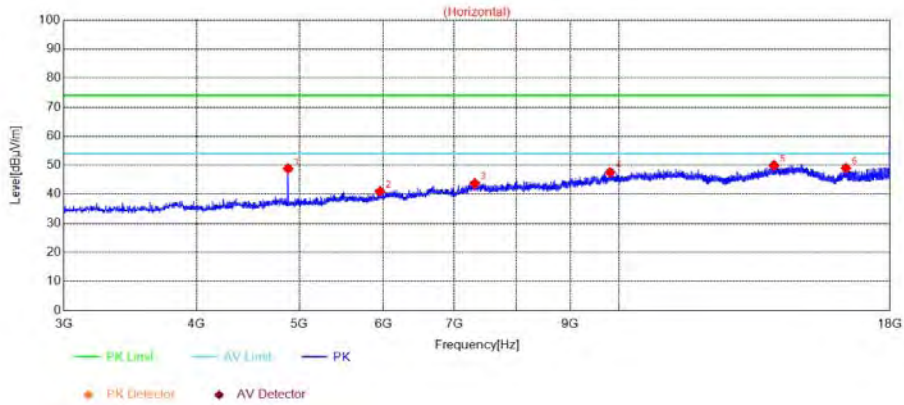


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
4881.0000	48.87	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5956.5000	41.04	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7317.0000	43.72	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9811.5000	47.60	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
13999.5000	49.92	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
16363.5000	48.99	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 3GHz to 18GHz)

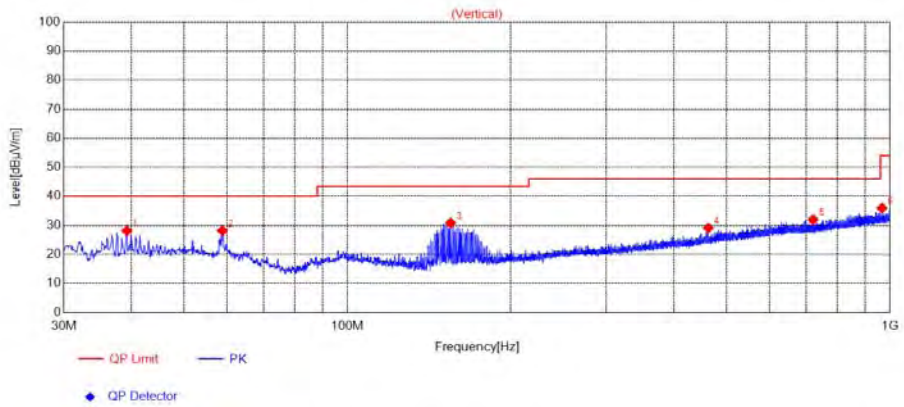


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
39.2159	28.16	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
58.8119	28.18	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
154.9485	30.85	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
462.6633	29.09	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
721.6792	31.96	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
966.9197	35.97	N/A	N/A	N/A	54.00	N/A	Vertical	PASS

(Antenna Vertical, 30MHz to 1GHz)

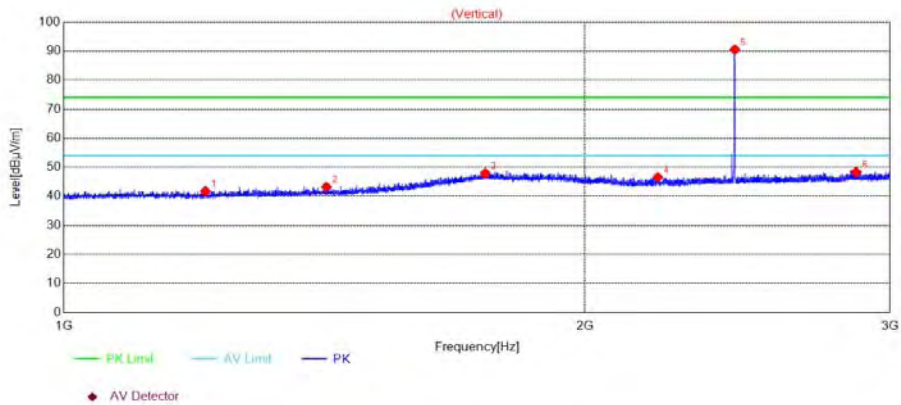

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
1207.4000	41.75	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1418.0000	43.20	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1751.6000	47.97	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2203.2000	46.54	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2441.0000	90.51	N/A	N/A	74.00	N/A	54.00	Vertical	N/A
2868.0000	48.40	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 1GHz to 3GHz)

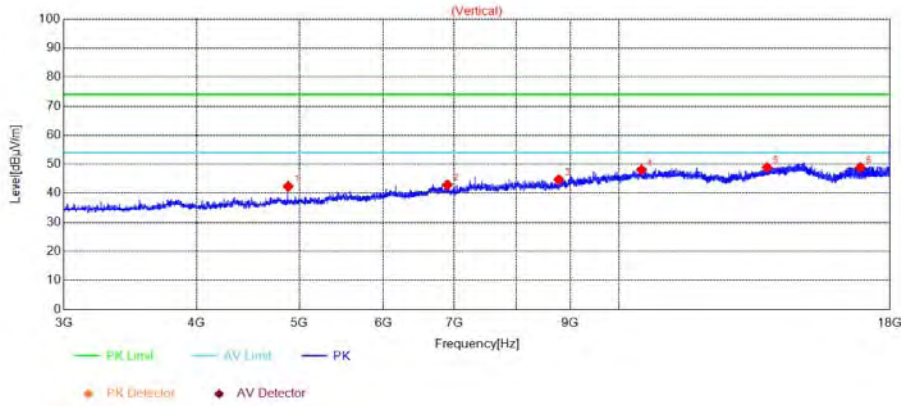


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
4881.0000	42.40	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
6894.0000	42.92	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8779.5000	44.71	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10501.5000	48.08	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
13788.0000	48.95	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
16879.5000	48.92	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 3GHz to 18GHz)


Plot for Channel 78

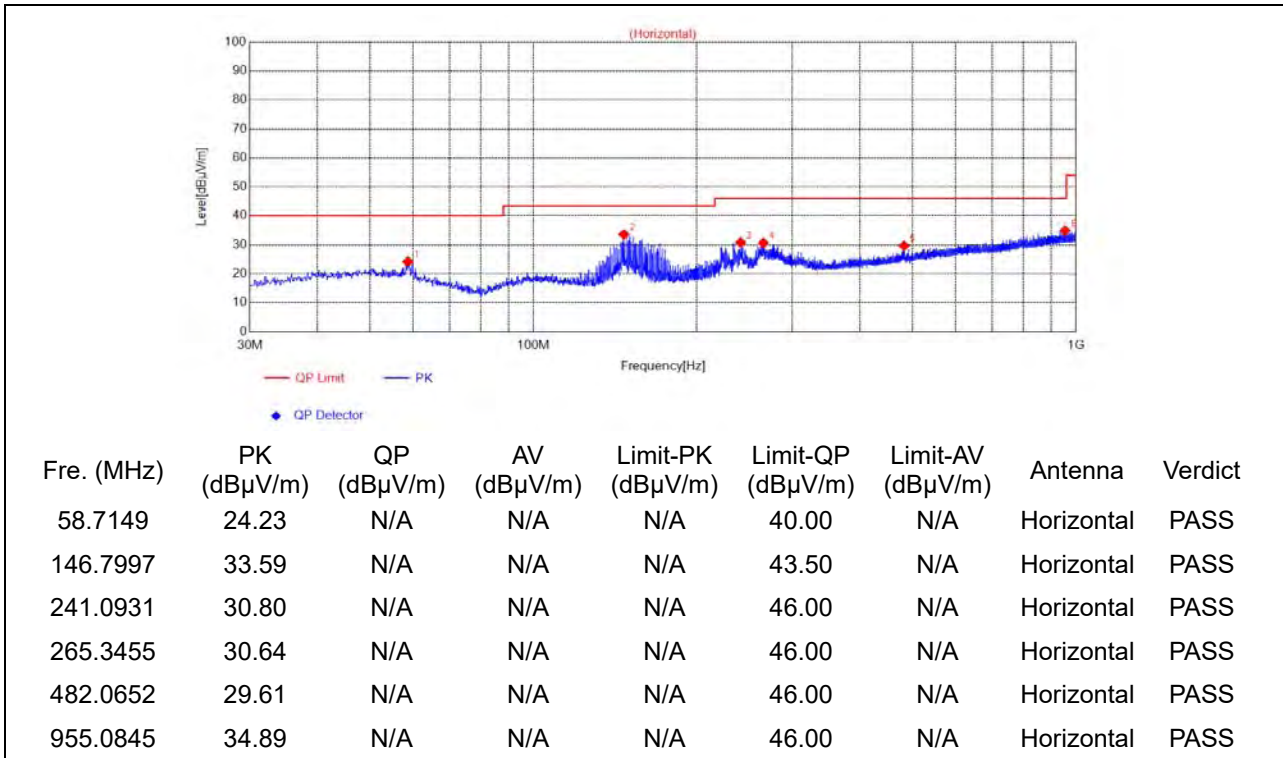

(Antenna Horizontal, 30MHz to 1GHz)

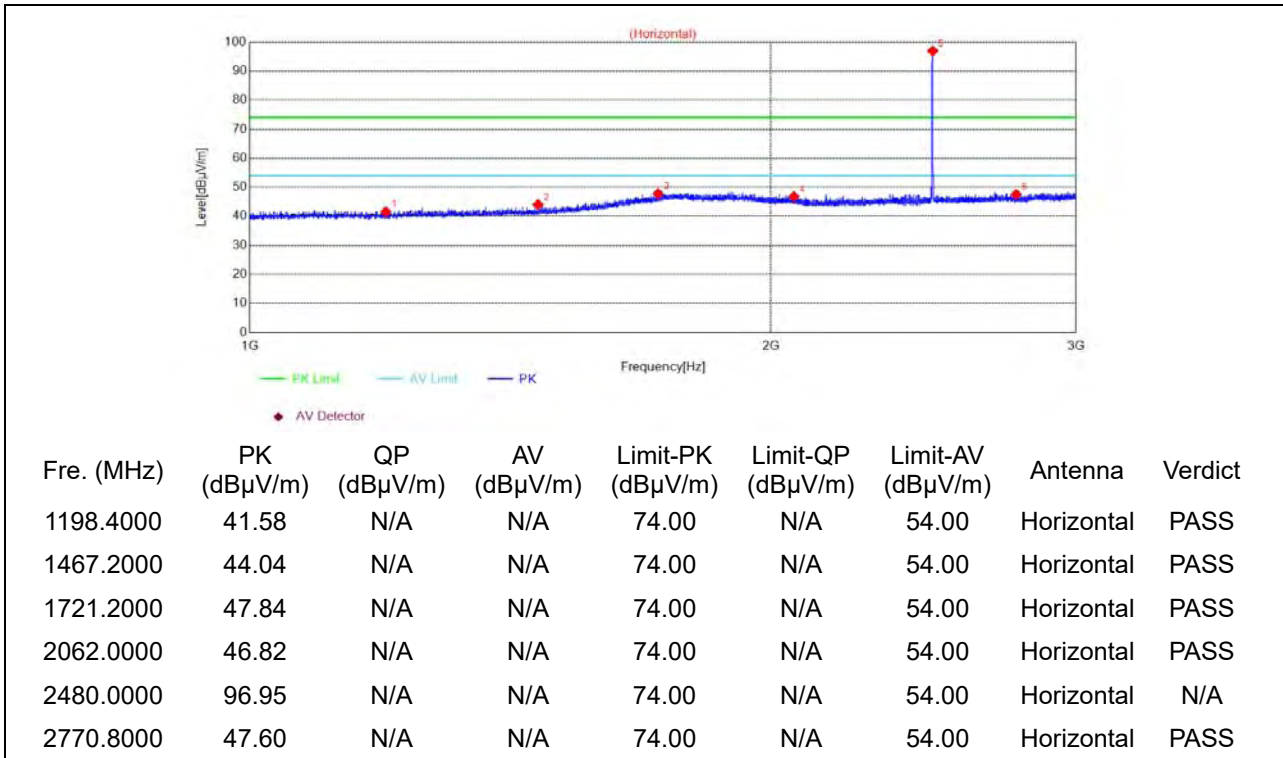


(Antenna Horizontal, 1GHz to 3GHz)

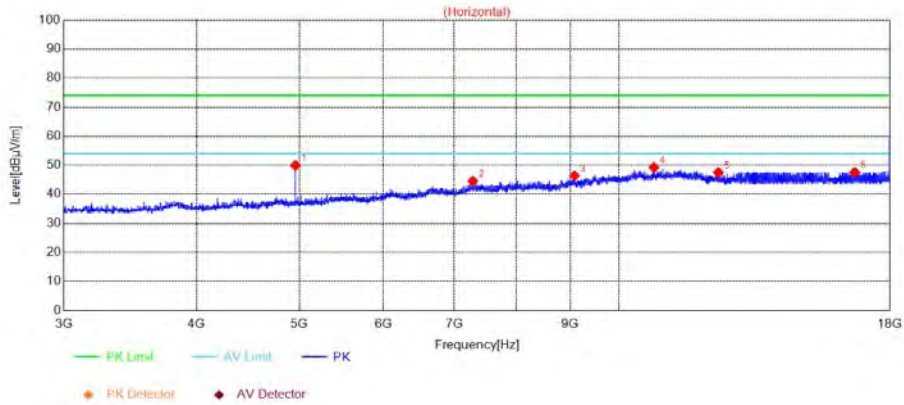


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
4959.0000	49.94	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7284.0000	44.54	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9082.5000	46.38	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10791.0000	49.24	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12409.5000	47.55	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
16677.0000	47.59	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 3GHz to 18GHz)

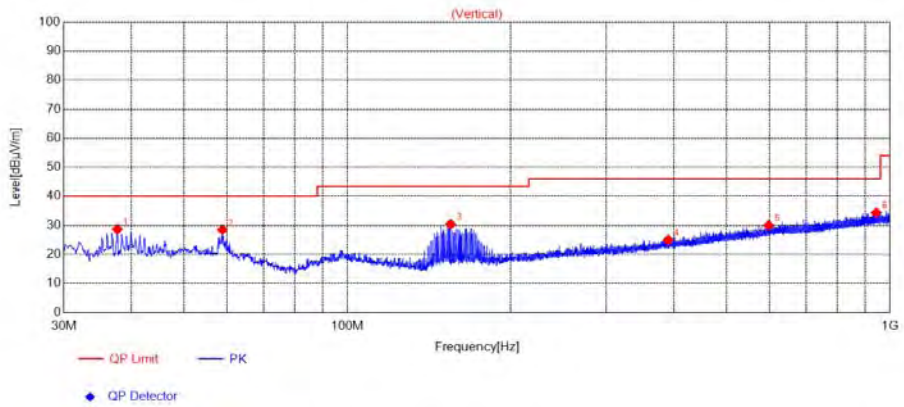


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
37.6638	28.67	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
58.8119	28.50	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
154.9485	30.41	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
390.1970	24.98	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
597.8948	30.00	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
943.4433	34.36	N/A	N/A	N/A	46.00	N/A	Vertical	PASS

(Antenna Vertical, 30MHz to 1GHz)

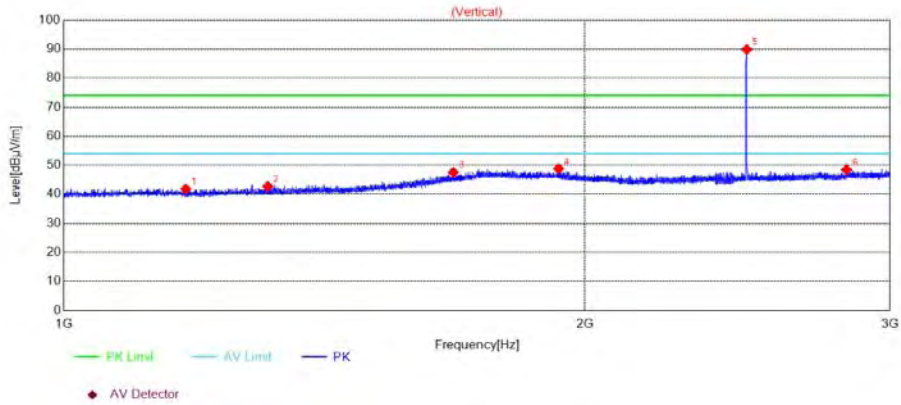

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
1176.2000	41.84	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1311.8000	42.73	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1678.8000	47.60	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1931.0000	48.82	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2480.0000	89.89	N/A	N/A	74.00	N/A	54.00	Vertical	N/A
2831.6000	48.51	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 1GHz to 3GHz)

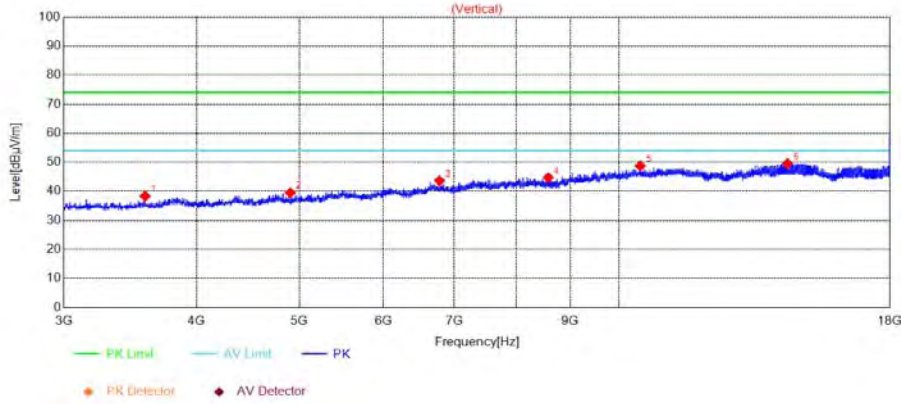


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
3579.0000	38.31	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4903.5000	39.50	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
6777.0000	43.63	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8580.0000	44.70	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10474.5000	48.76	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
14415.0000	49.53	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 3GHz to 18GHz)

$\pi/4$ -DQPSK Mode


Plots for Channel 0

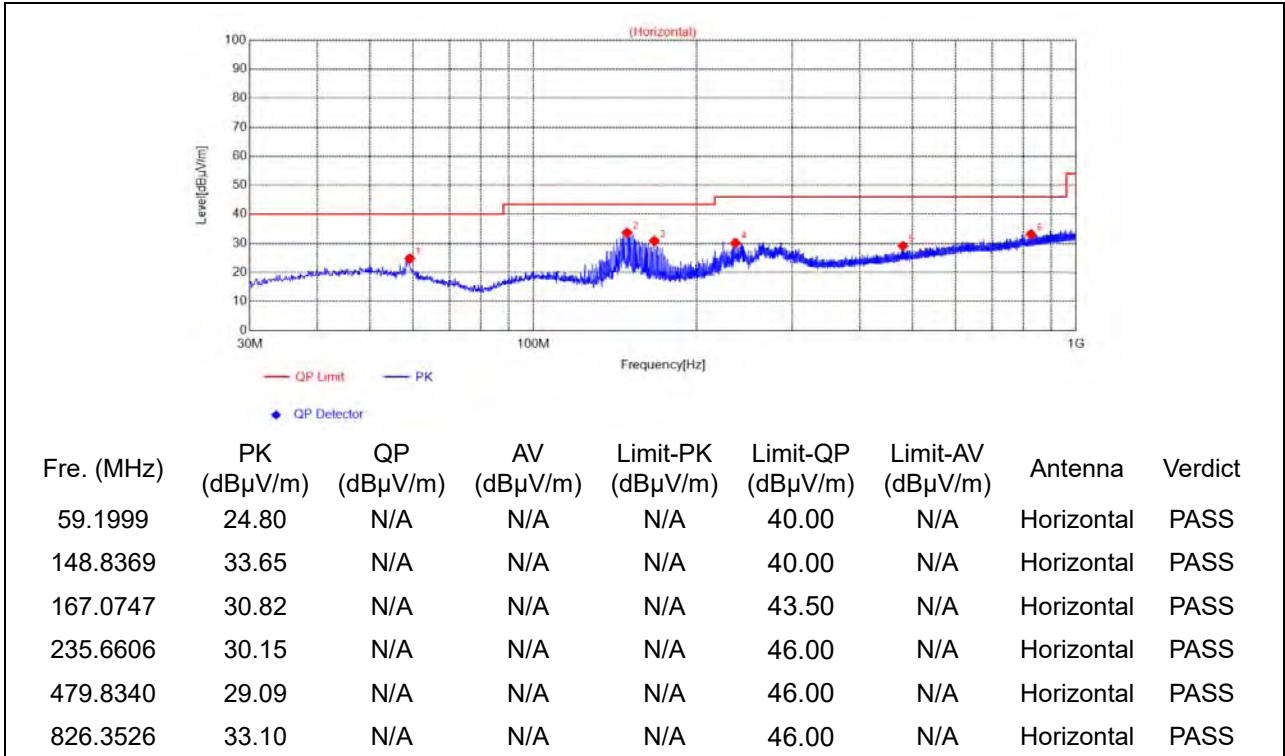

(Antenna Horizontal, 30MHz to 1GHz)

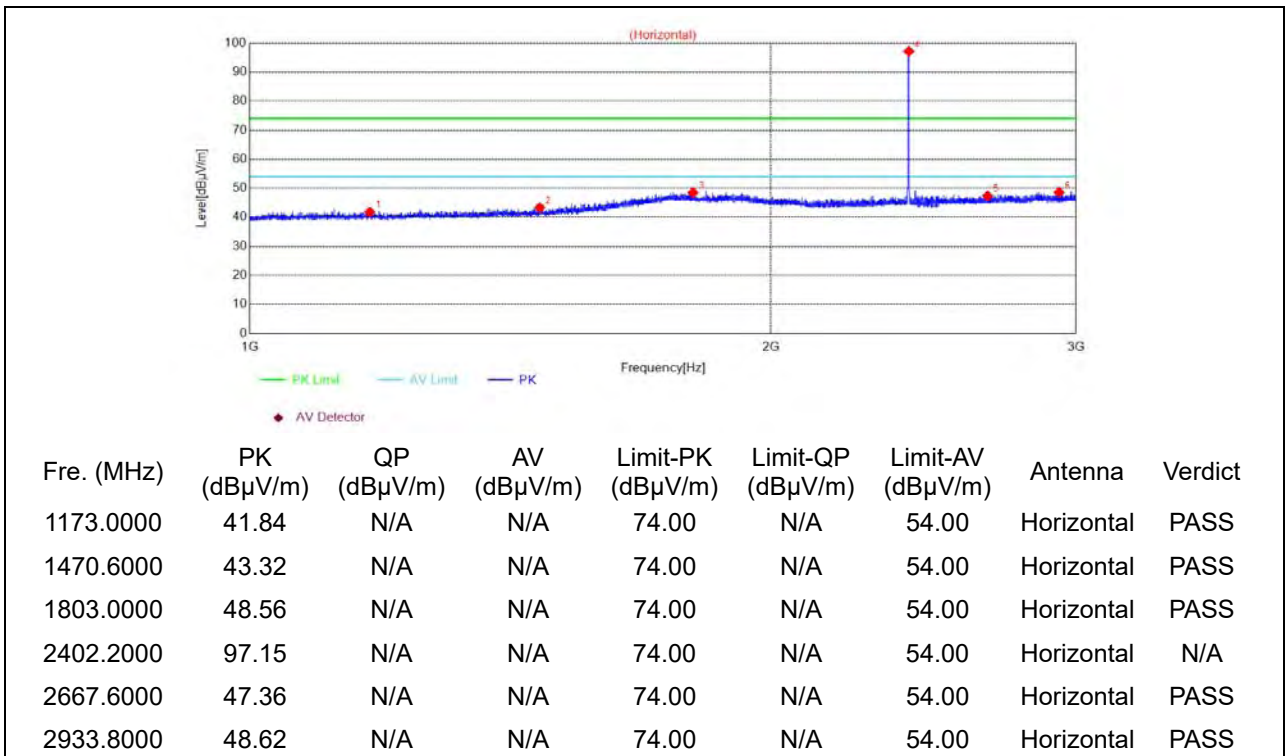


(Antenna Horizontal, 1GHz to 3GHz)

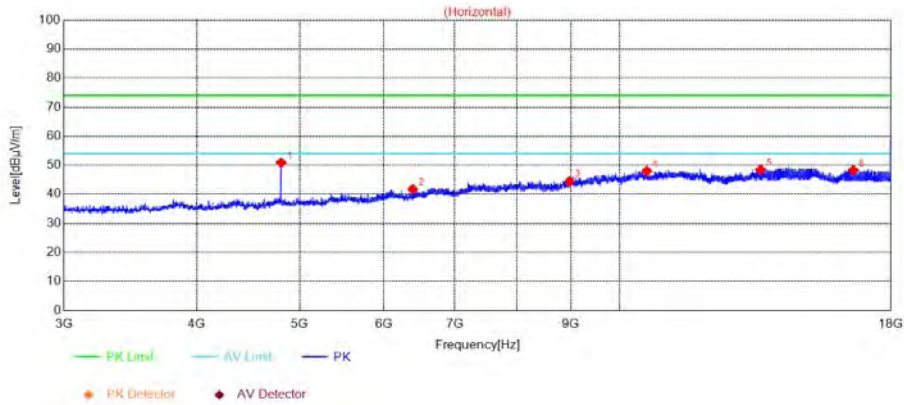


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
4804.5000	50.89	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
6388.5000	41.74	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8973.0000	44.45	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10608.0000	47.99	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
13572.0000	48.54	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
16593.0000	48.33	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 3GHz to 18GHz)

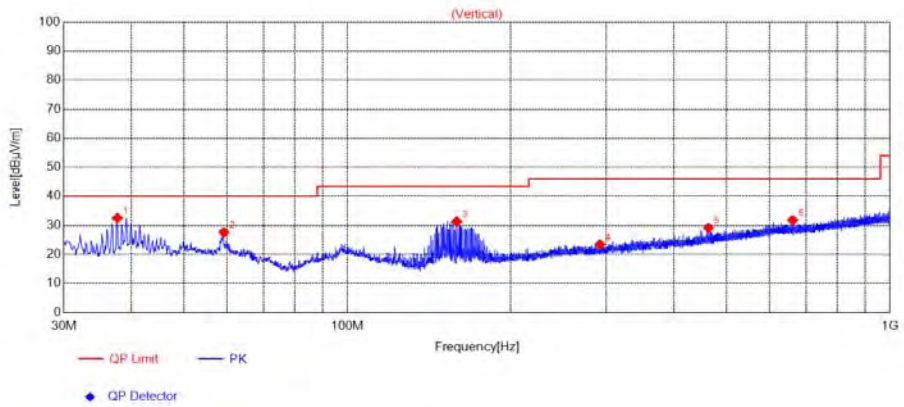


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
37.6638	32.54	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
59.1999	27.59	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
159.0229	31.32	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
292.1202	23.48	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
462.8573	29.12	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
661.7272	31.79	N/A	N/A	N/A	46.00	N/A	Vertical	PASS

(Antenna Vertical, 30MHz to 1GHz)

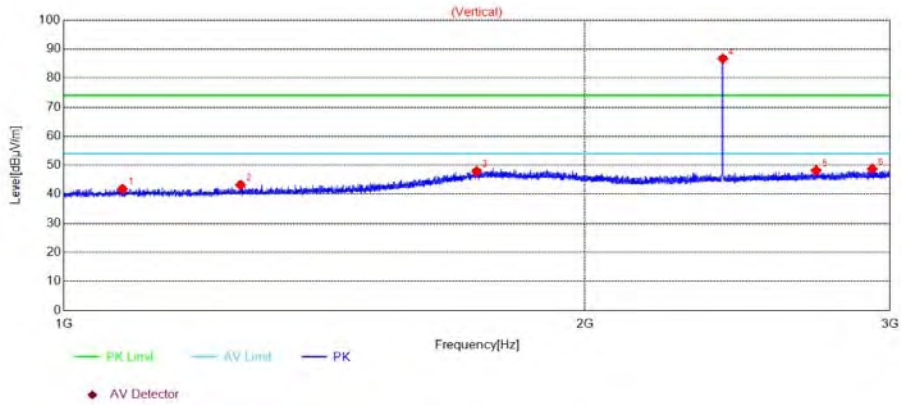

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
1081.2000	41.85	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1265.0000	43.23	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1731.8000	47.96	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2402.2000	86.72	N/A	N/A	74.00	N/A	54.00	Vertical	N/A
2719.8000	48.21	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2930.6000	48.77	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 1GHz to 3GHz)

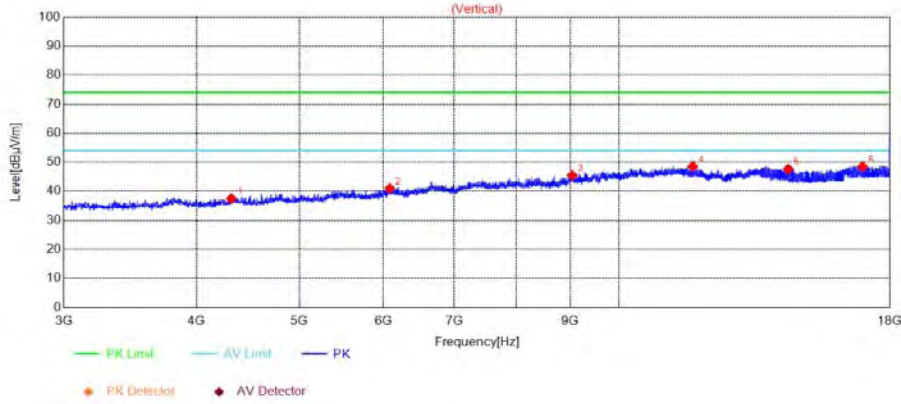


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
4315.5000	37.49	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
6084.0000	41.01	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
9036.0000	45.51	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
11736.0000	48.60	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
14436.0000	47.66	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
16965.0000	48.53	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 3GHz to 18GHz)


Plot for Channel 39

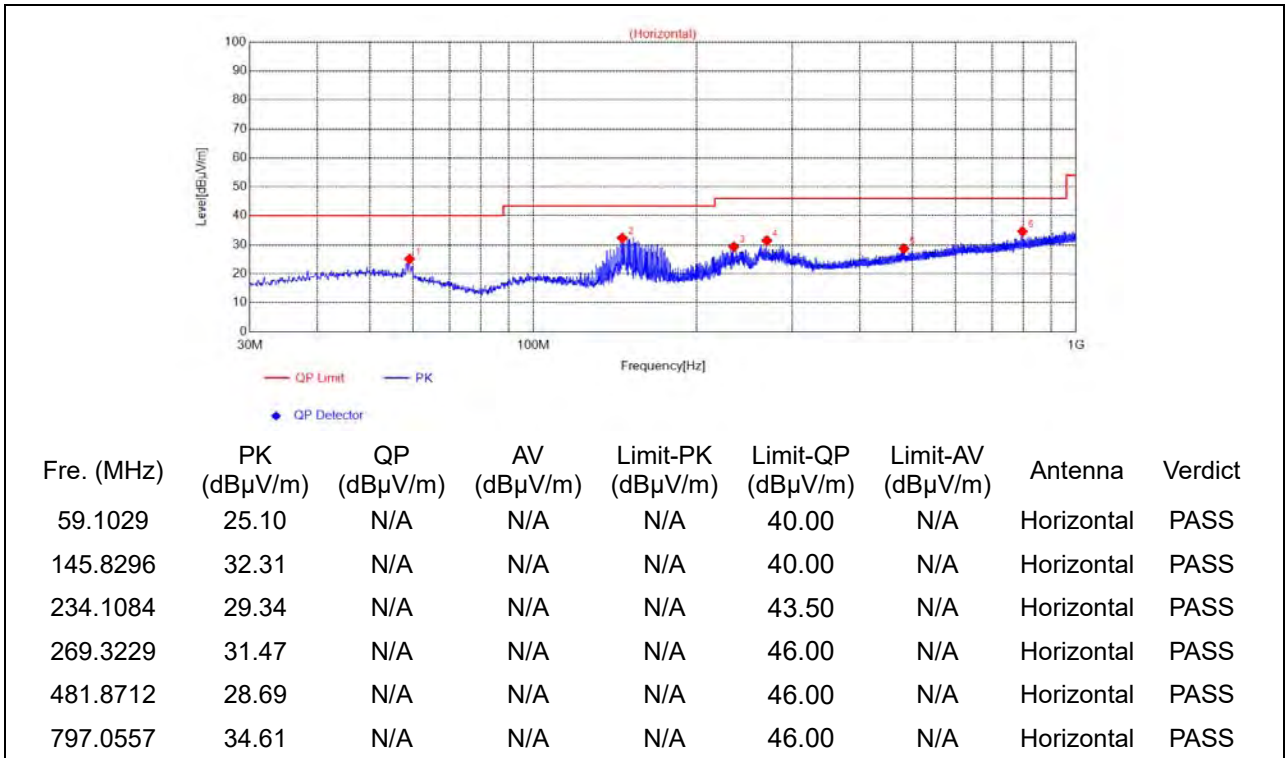

(Antenna Horizontal, 30MHz to 1GHz)

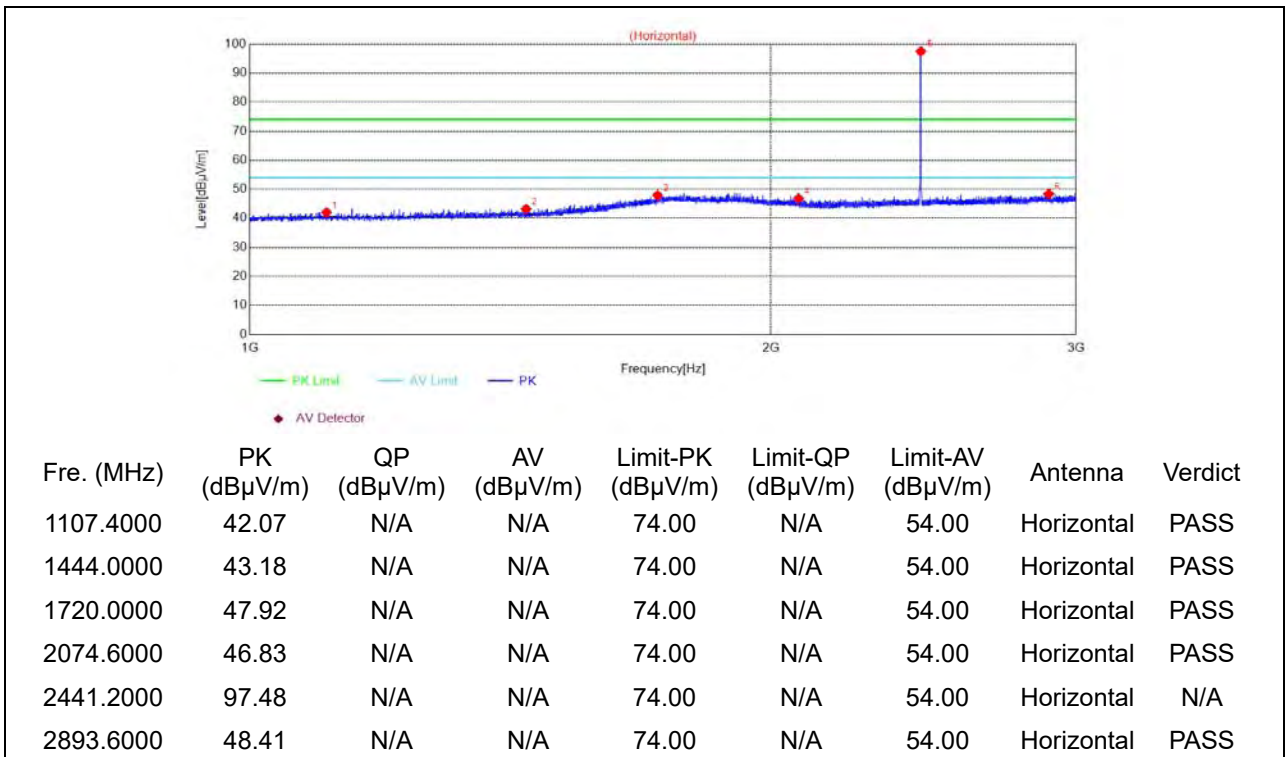


(Antenna Horizontal, 1GHz to 3GHz)

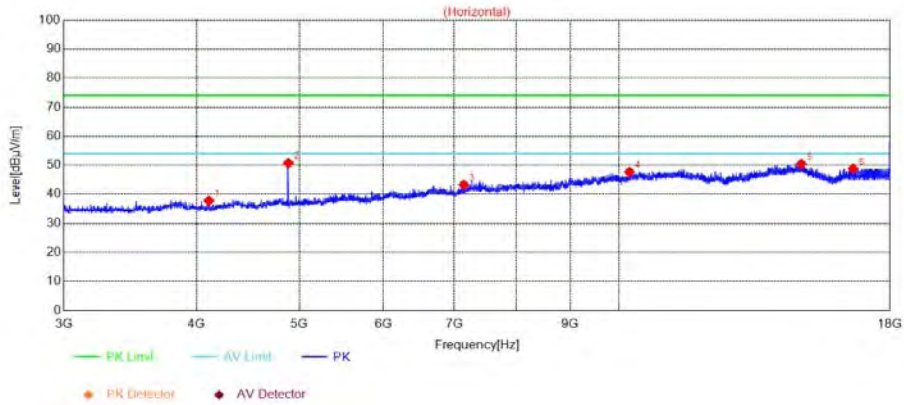


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
4110.0000	37.81	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4882.5000	50.73	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7143.0000	43.28	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10231.5000	47.72	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
14854.5000	50.41	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
16620.0000	48.82	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 3GHz to 18GHz)

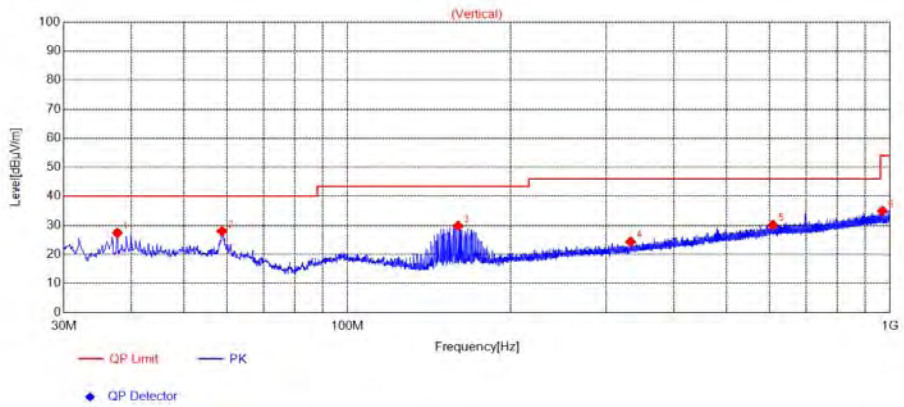


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
37.6638	27.38	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
58.7149	27.97	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
159.9930	29.82	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
332.6703	24.35	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
608.5659	30.13	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
968.6659	35.00	N/A	N/A	N/A	46.00	N/A	Vertical	PASS

(Antenna Vertical, 30MHz to 1GHz)

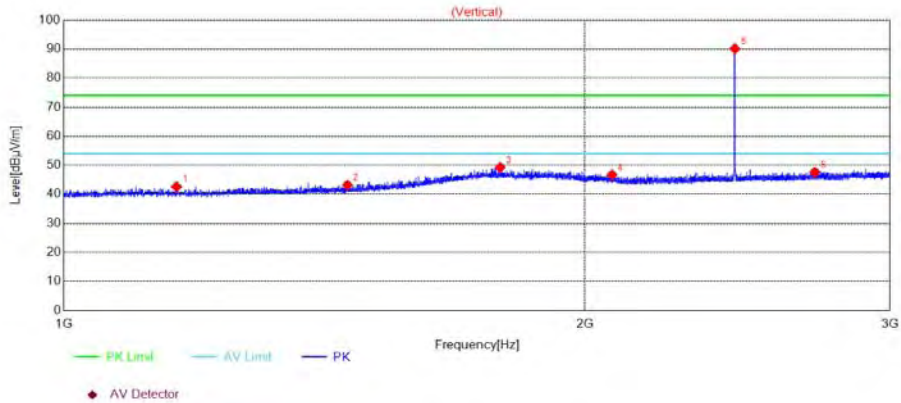

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
1161.6000	42.62	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1458.2000	43.21	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1786.6000	49.27	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2073.2000	46.74	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2441.2000	90.14	N/A	N/A	74.00	N/A	54.00	Vertical	N/A
2714.8000	47.68	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 1GHz to 3GHz)

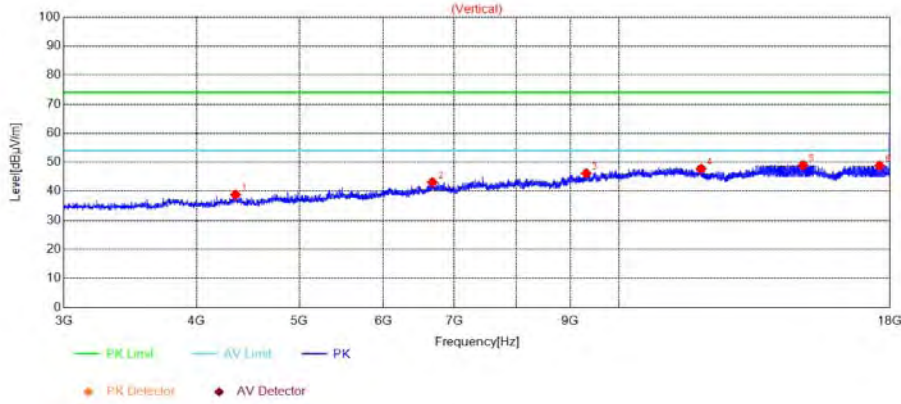


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
4354.5000	38.80	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
6673.5000	43.12	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
9315.0000	46.20	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
11952.0000	47.81	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
14911.5000	48.99	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
17601.0000	48.81	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 3GHz to 18GHz)


Plot for Channel 78

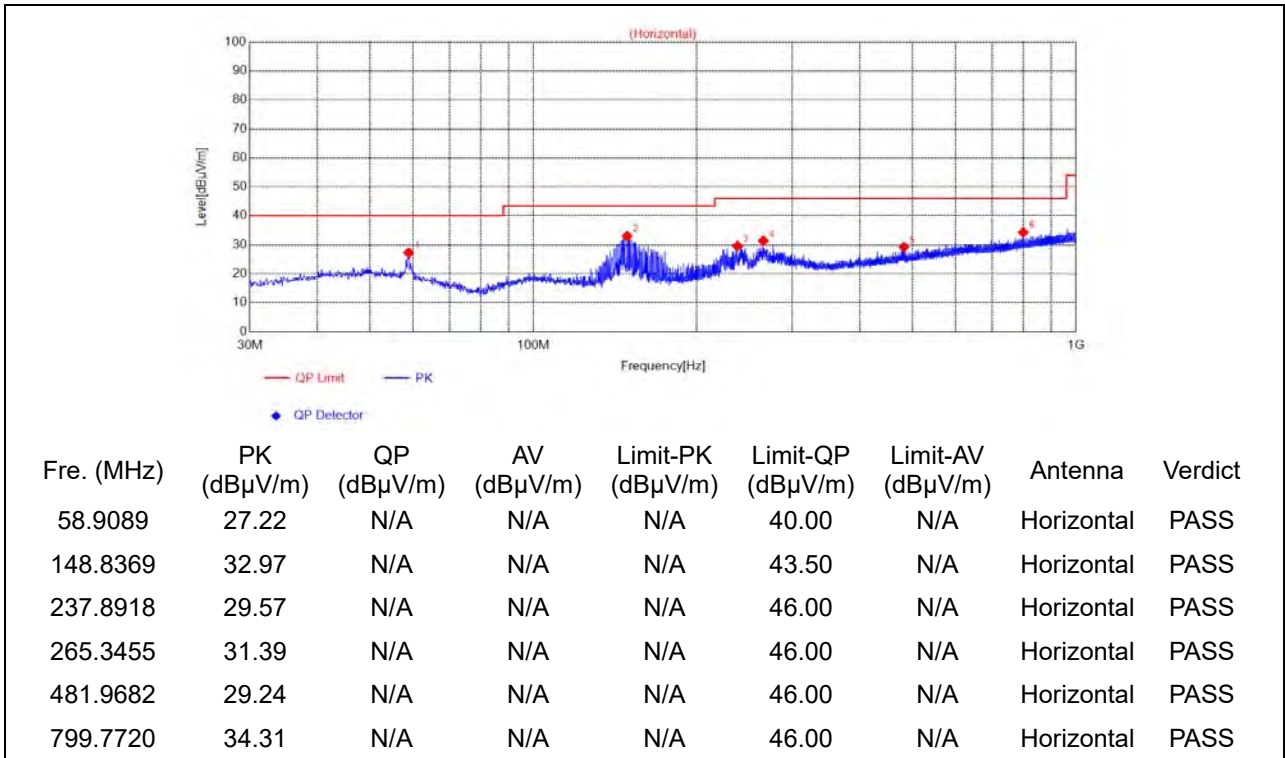

(Antenna Horizontal, 30MHz to 1GHz)

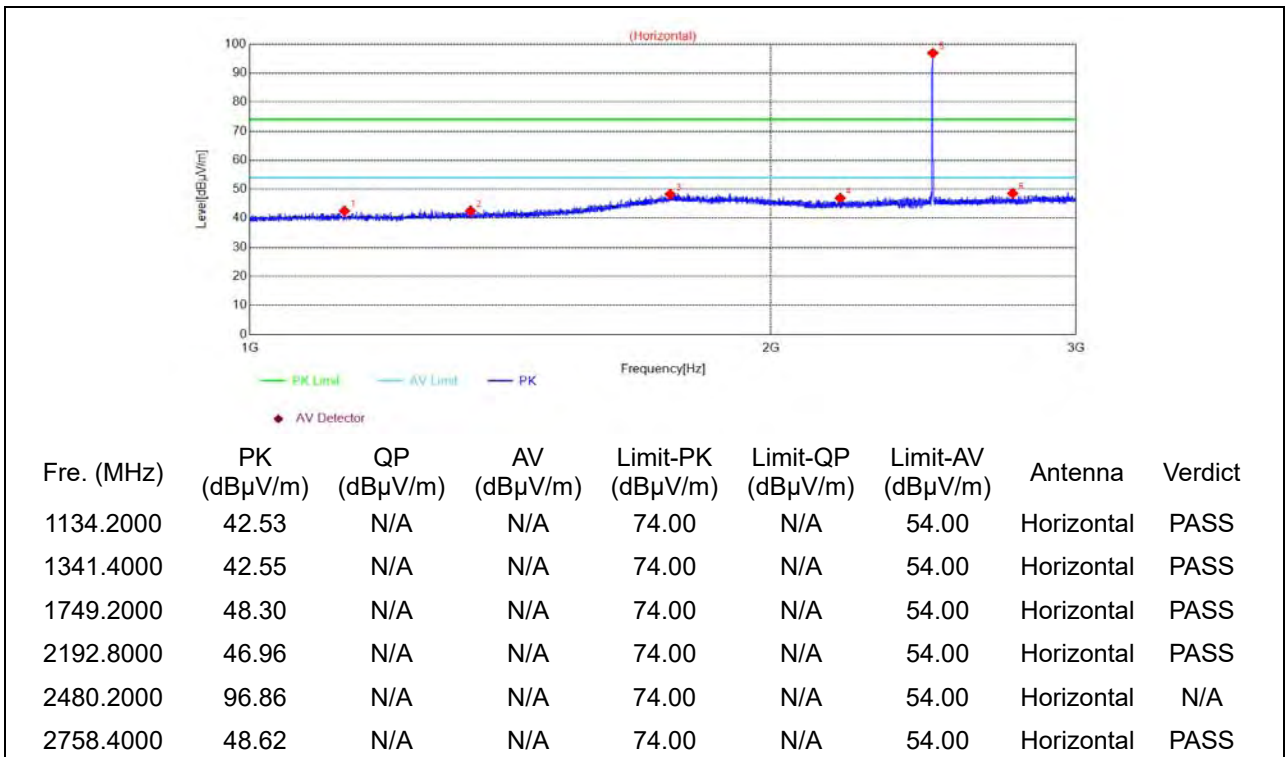


(Antenna Horizontal, 1GHz to 3GHz)

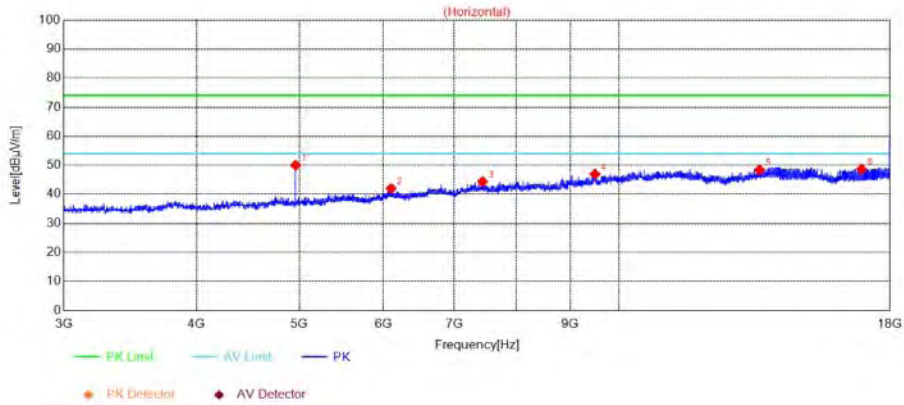


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
4960.5000	49.99	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
6102.0000	42.01	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7440.0000	44.37	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9493.5000	46.97	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
13567.5000	48.48	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
16929.0000	48.69	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 3GHz to 18GHz)

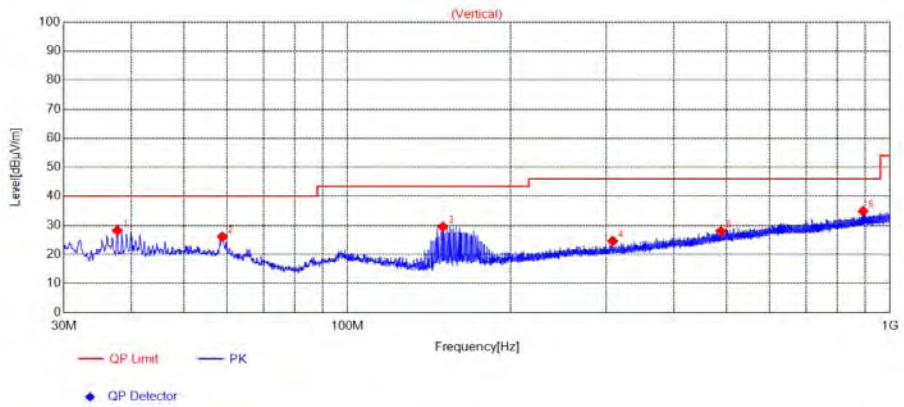


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
37.6638	28.21	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
58.8119	26.06	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
149.9040	29.50	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
308.4178	24.60	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
488.0798	27.98	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
892.1252	34.90	N/A	N/A	N/A	46.00	N/A	Vertical	PASS

(Antenna Vertical, 30MHz to 1GHz)

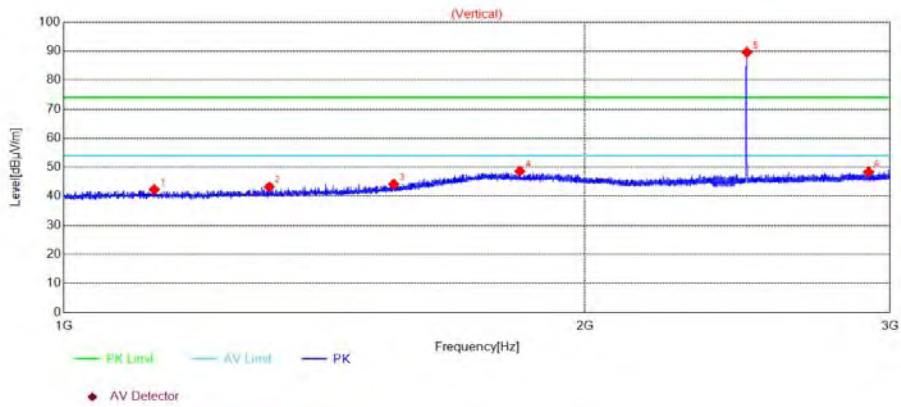

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
1128.0000	42.34	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1314.4000	43.25	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1550.8000	44.16	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1834.2000	48.66	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2480.2000	89.58	N/A	N/A	74.00	N/A	54.00	Vertical	N/A
2916.2000	48.42	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 1GHz to 3GHz)

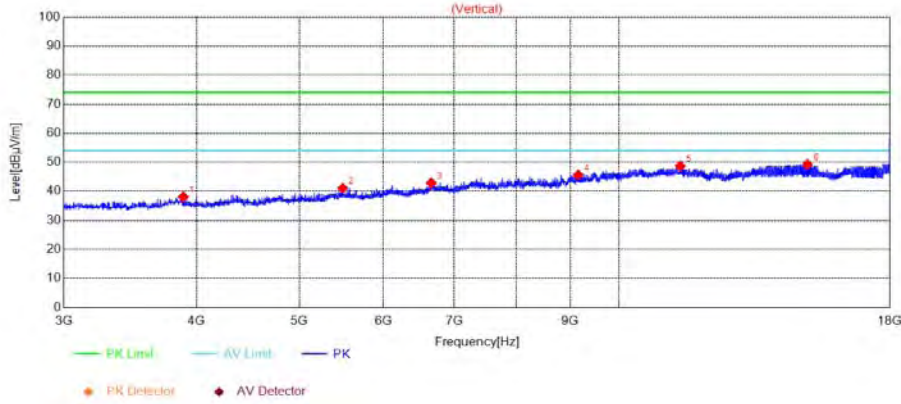


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
3888.0000	38.08	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5494.5000	41.06	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
6657.0000	42.87	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
9156.0000	45.64	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
11425.5000	48.74	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
15051.0000	49.26	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 3GHz to 18GHz)

8-DPSK Mode


Plots for Channel 0

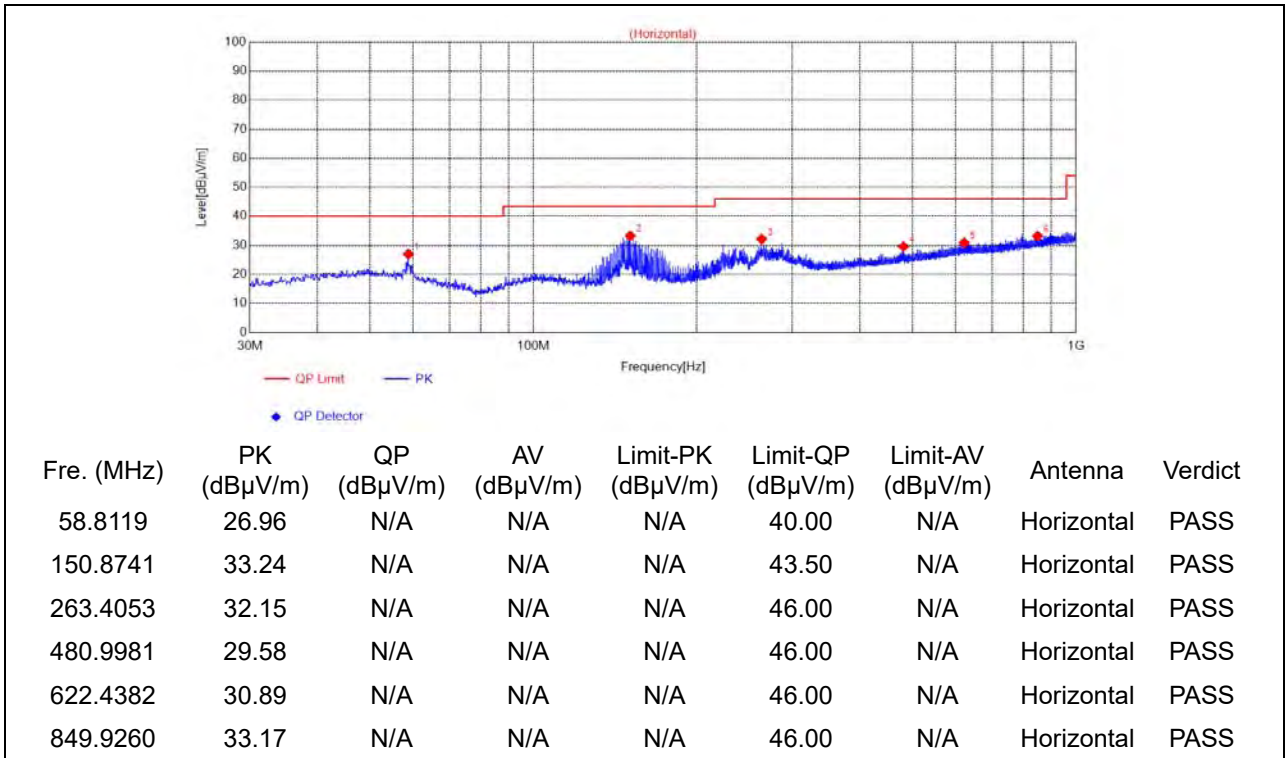

(Antenna Horizontal, 30MHz to 1GHz)

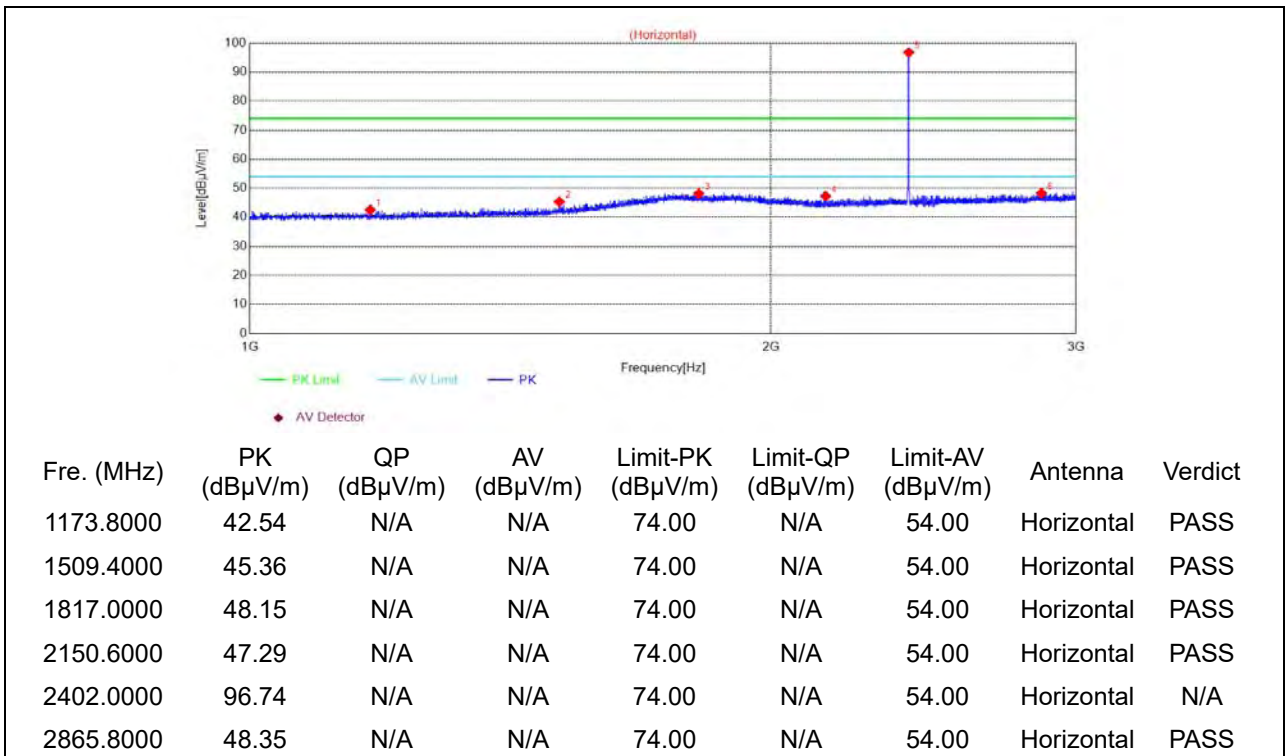


(Antenna Horizontal, 1GHz to 3GHz)

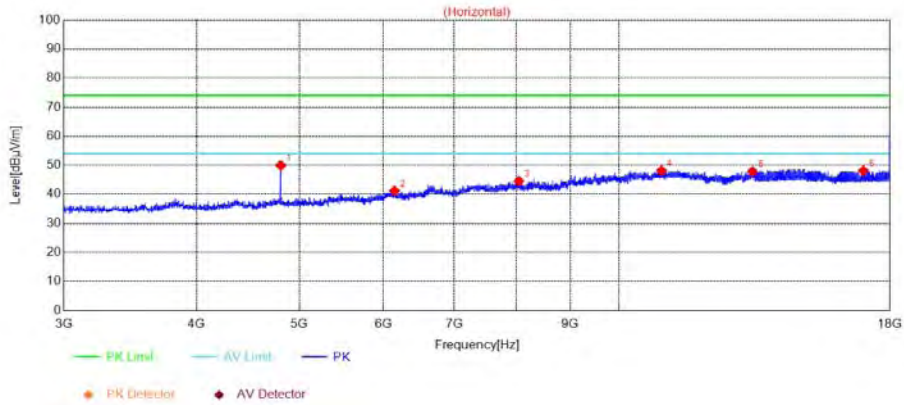


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
4803.0000	49.95	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
6147.0000	41.21	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8050.5000	44.54	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10968.0000	48.13	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
13360.5000	47.87	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
16990.5000	48.12	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 3GHz to 18GHz)

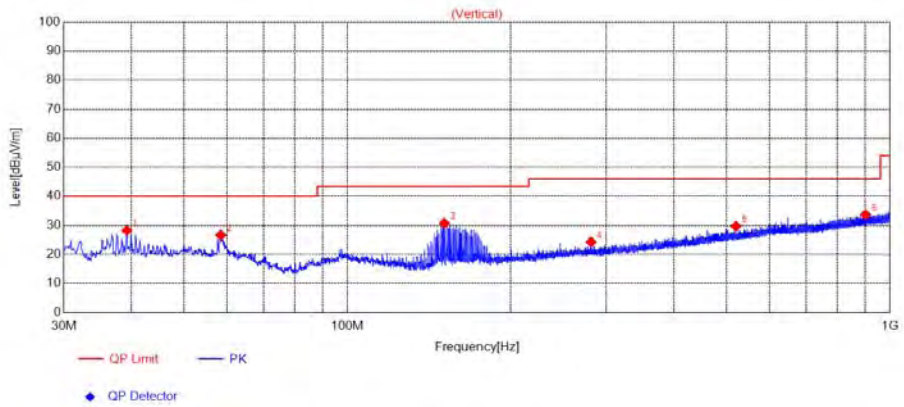


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
39.2159	28.24	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
58.4238	26.63	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
150.8741	30.73	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
281.2551	24.29	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
520.2870	29.71	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
901.6322	33.69	N/A	N/A	N/A	46.00	N/A	Vertical	PASS

(Antenna Vertical, 30MHz to 1GHz)

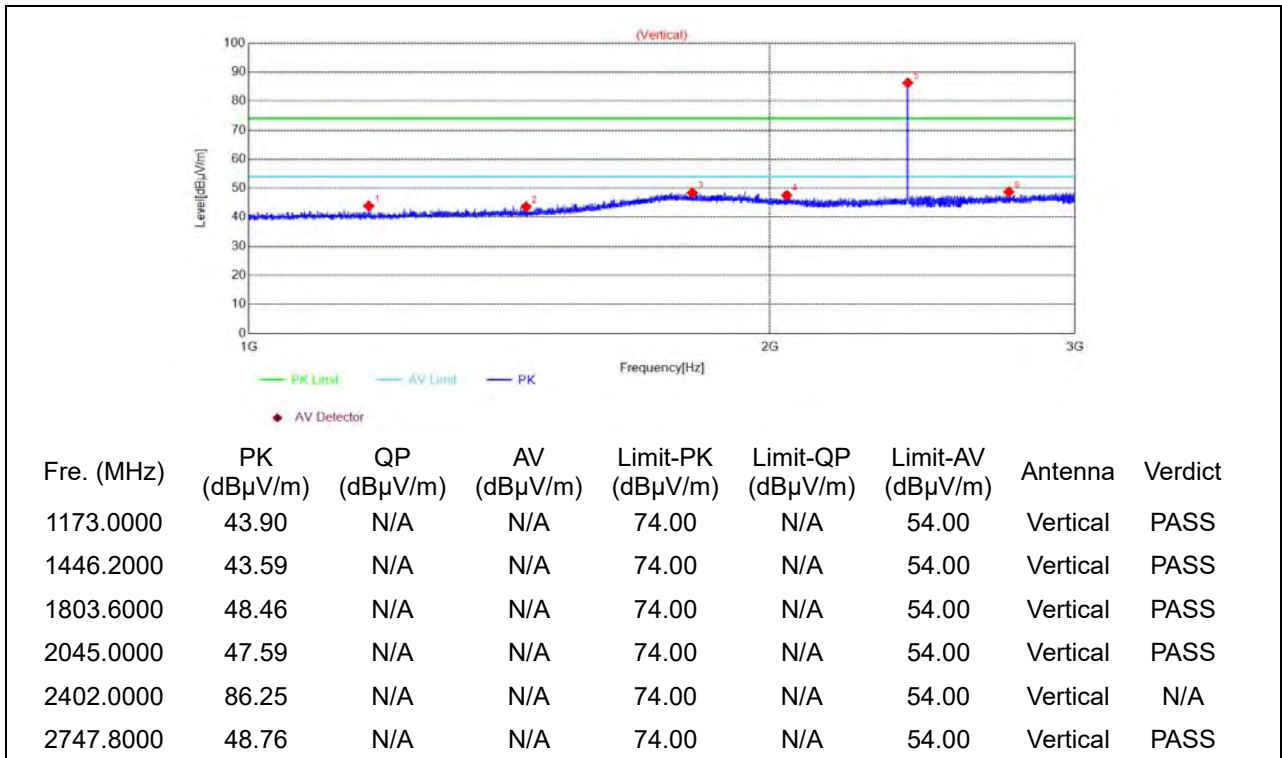


(Antenna Vertical, 1GHz to 3GHz)

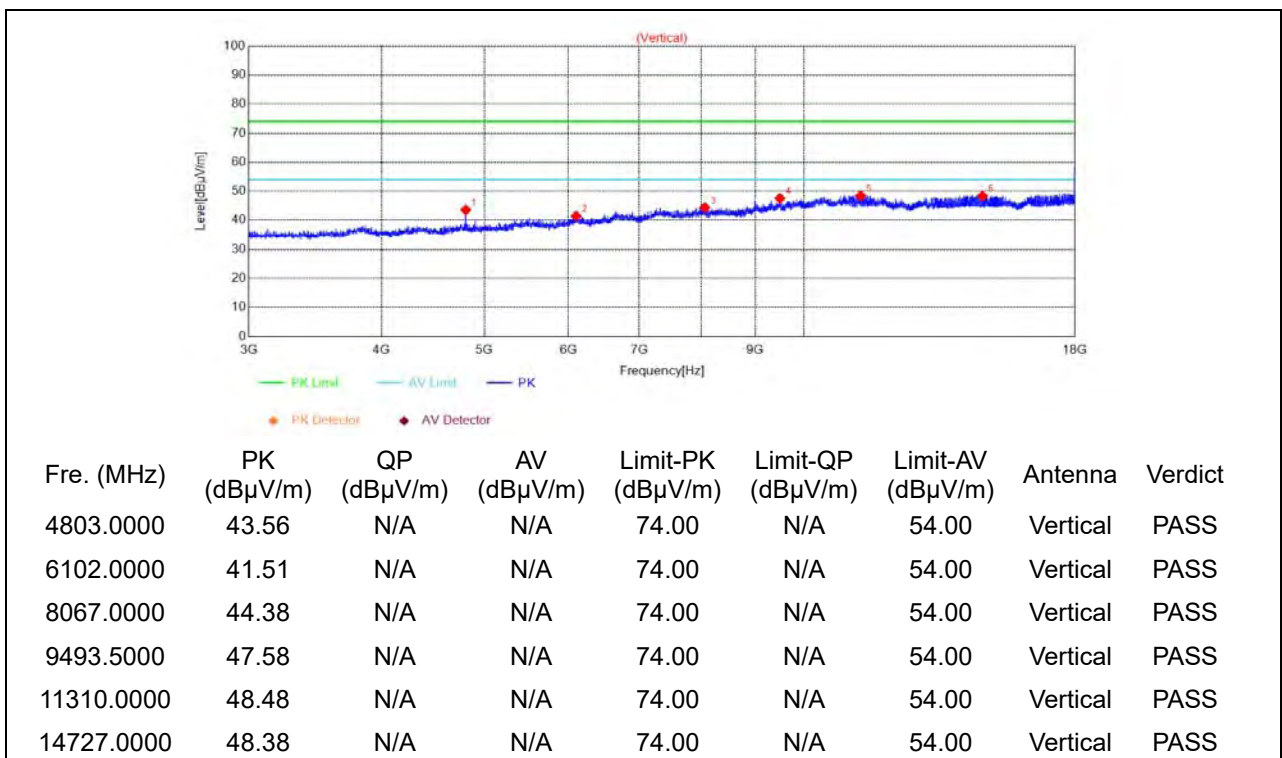


(Antenna Vertical, 3GHz to 18GHz)


Plot for Channel 39

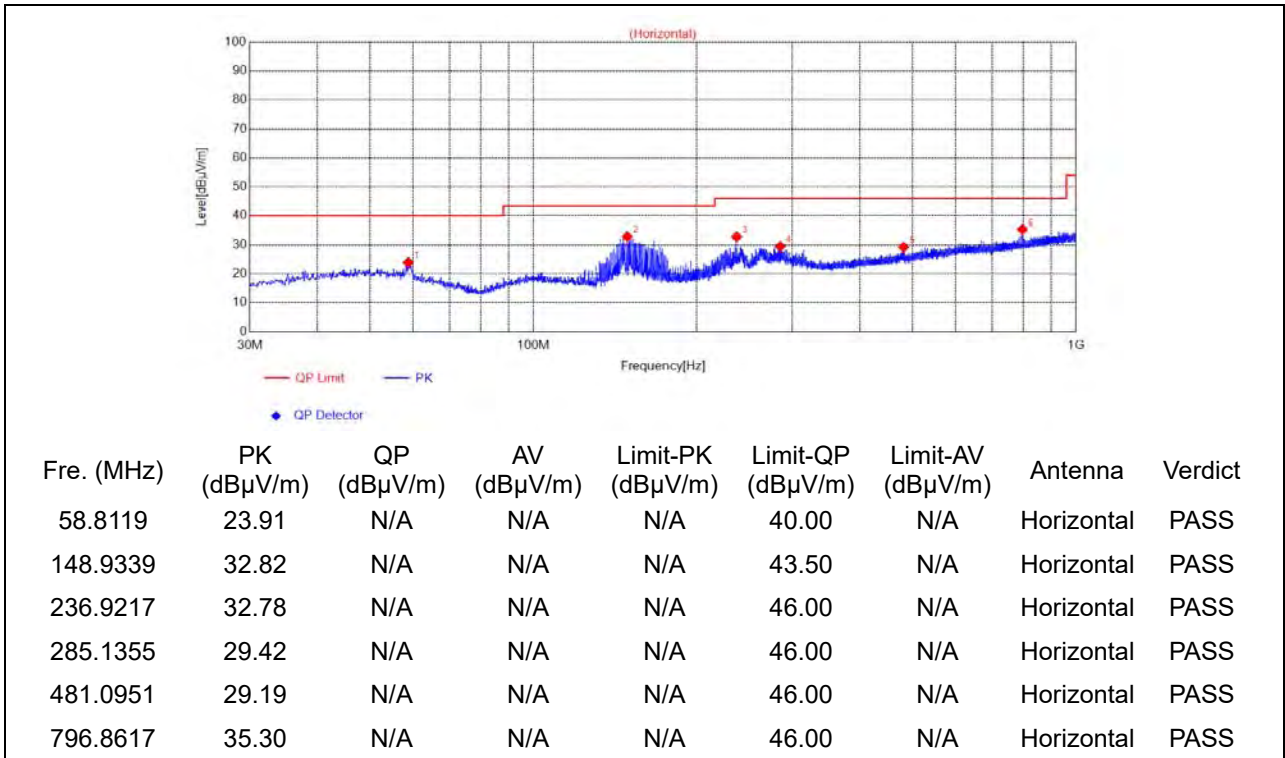

(Antenna Horizontal, 30MHz to 1GHz)

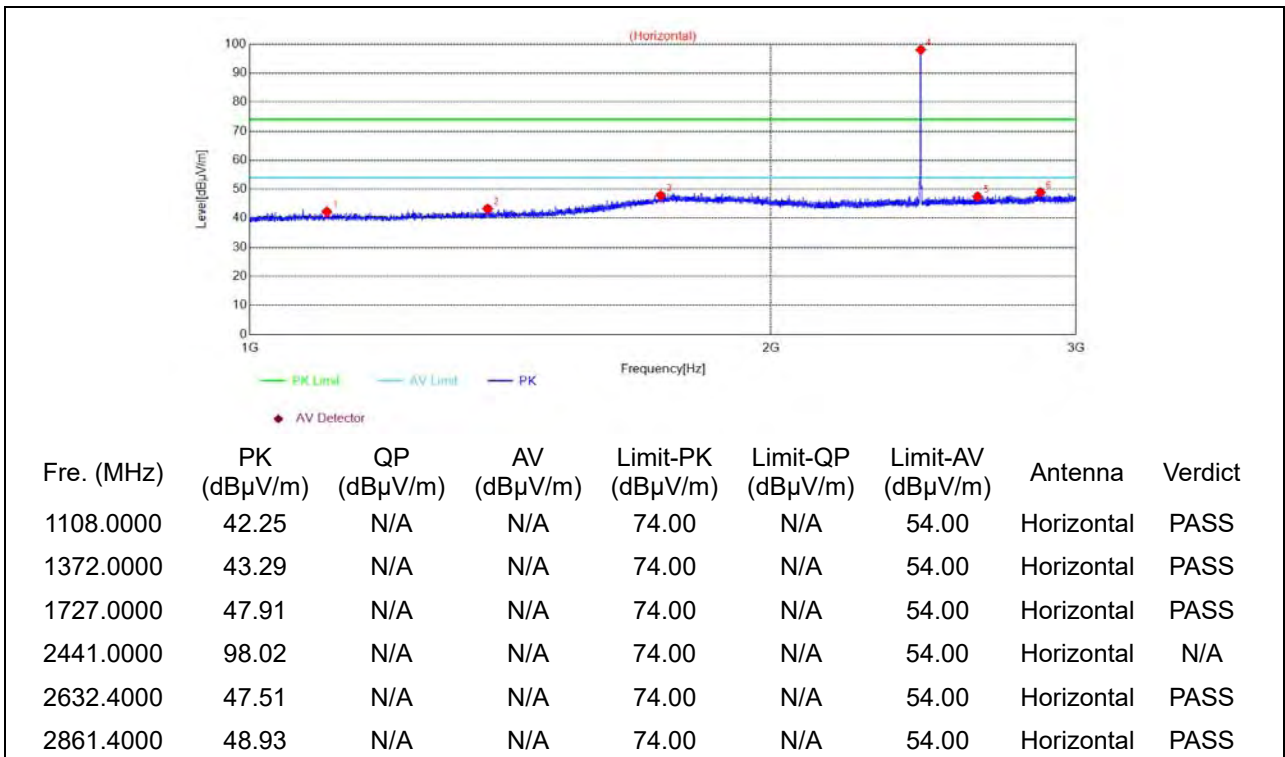


(Antenna Horizontal, 1GHz to 3GHz)

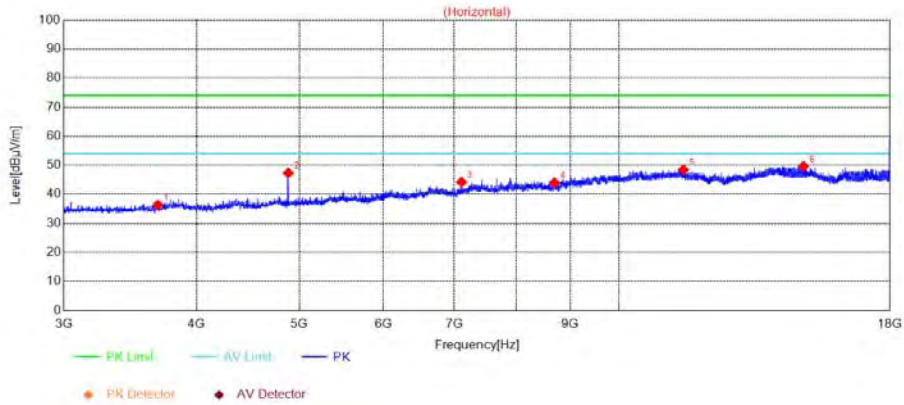


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
3679.5000	36.33	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4882.5000	47.34	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7108.5000	44.19	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8695.5000	43.97	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
11500.5000	48.46	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
14923.5000	49.64	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 3GHz to 18GHz)

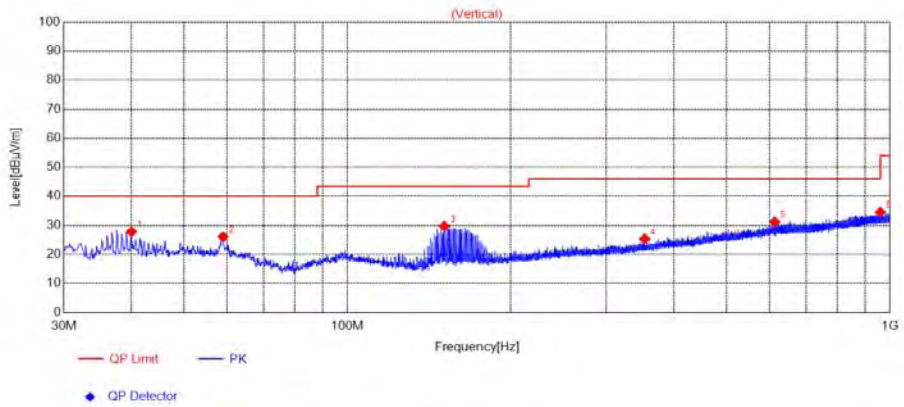


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
39.9920	27.80	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
59.0059	26.10	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
150.8741	29.71	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
353.1393	25.38	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
613.1253	31.22	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
959.7410	34.55	N/A	N/A	N/A	46.00	N/A	Vertical	PASS

(Antenna Vertical, 30MHz to 1GHz)

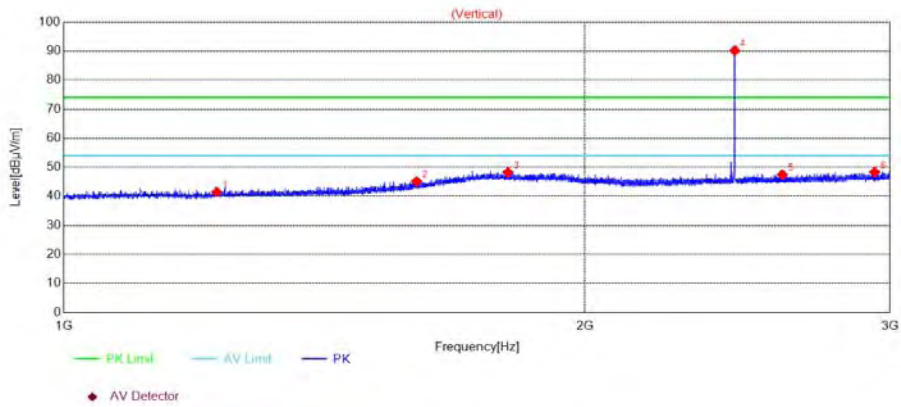

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
1225.6000	41.51	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1598.6000	45.13	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1805.2000	48.26	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2441.0000	90.18	N/A	N/A	74.00	N/A	54.00	Vertical	N/A
2600.2000	47.48	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2939.6000	48.35	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 1GHz to 3GHz)

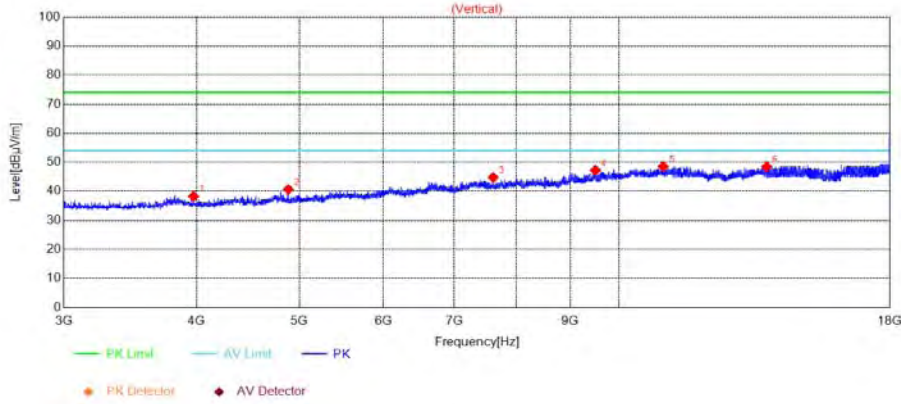


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
3975.0000	38.25	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4882.5000	40.69	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7614.0000	44.77	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
9502.5000	47.24	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
11008.5000	48.58	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
13779.0000	48.53	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 3GHz to 18GHz)


Plot for Channel 78

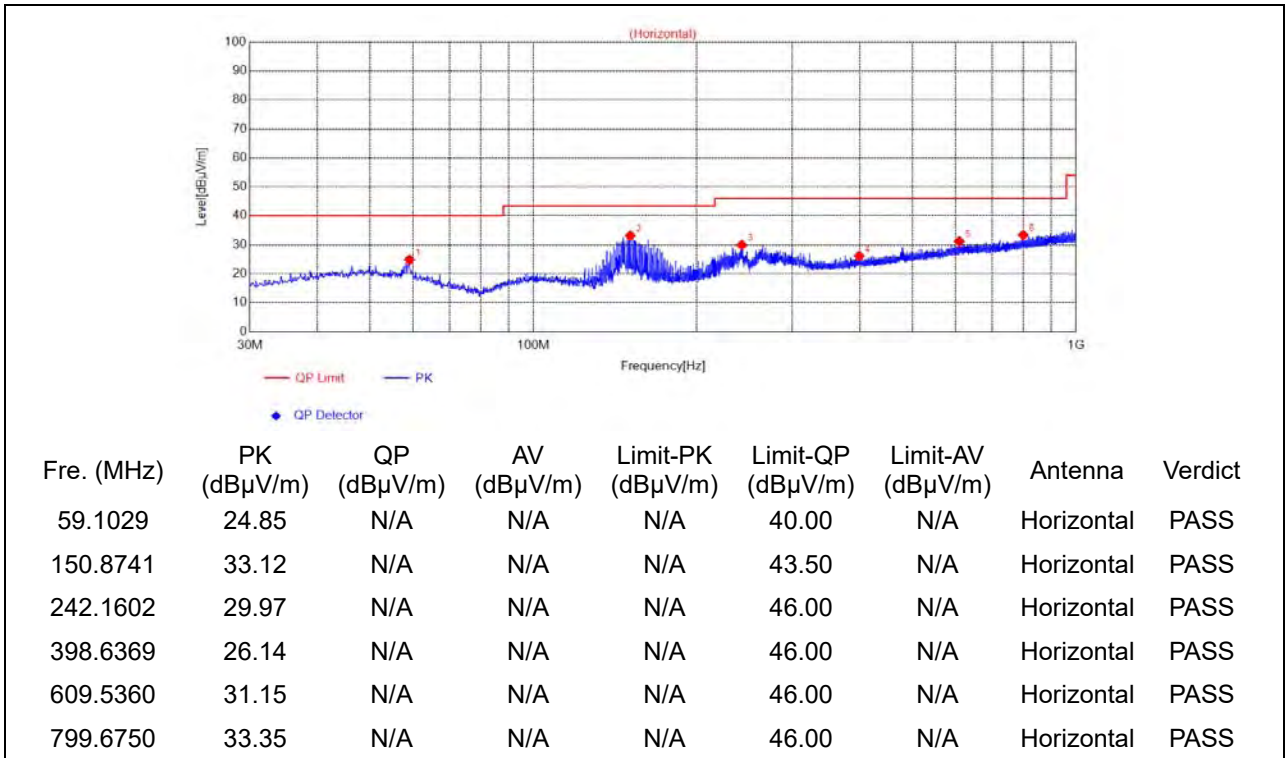

(Antenna Horizontal, 30MHz to 1GHz)

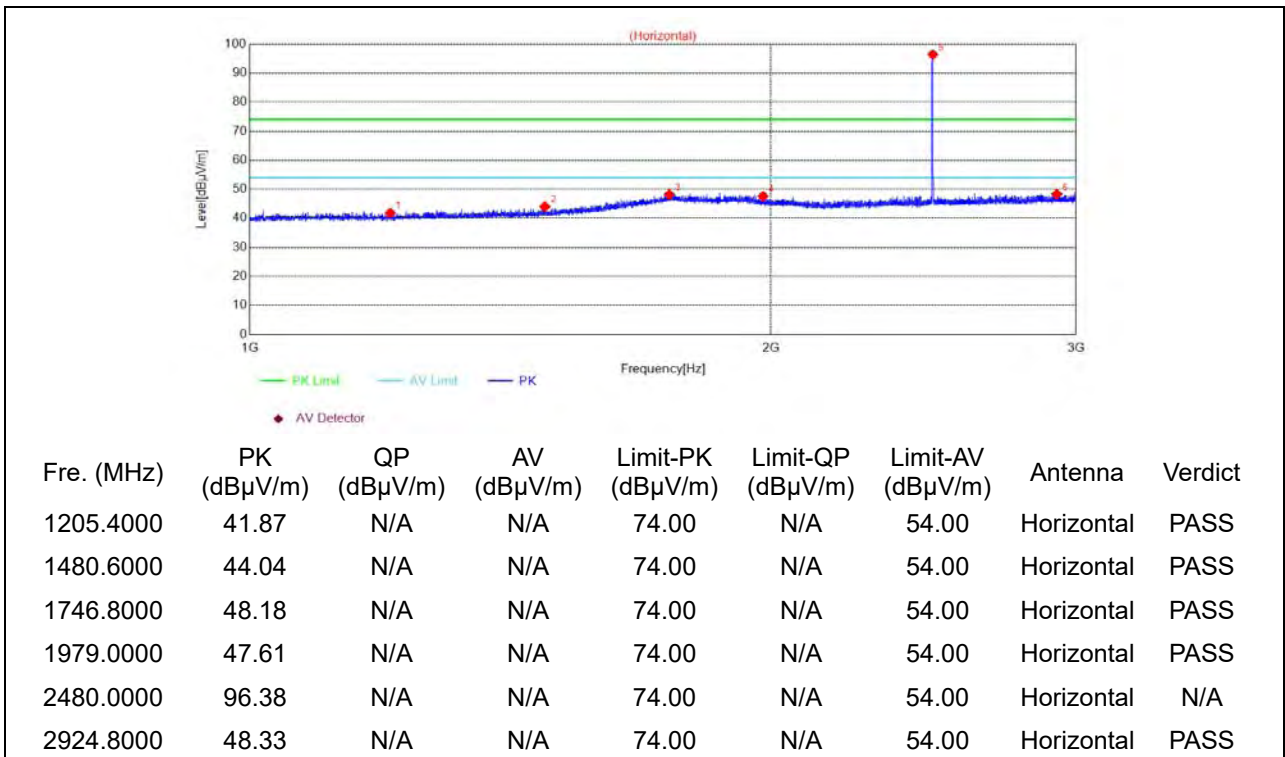


(Antenna Horizontal, 1GHz to 3GHz)

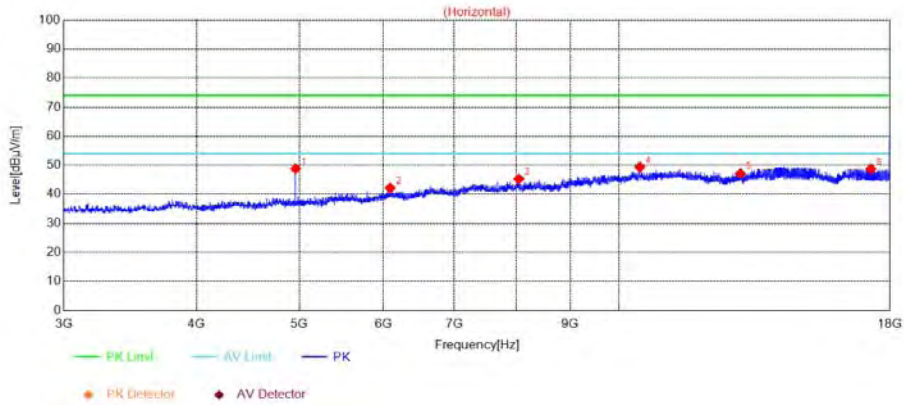


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
4960.5000	48.86	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
6088.5000	42.17	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8050.5000	45.30	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10464.0000	49.38	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
13015.5000	47.14	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
17271.0000	48.75	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 3GHz to 18GHz)

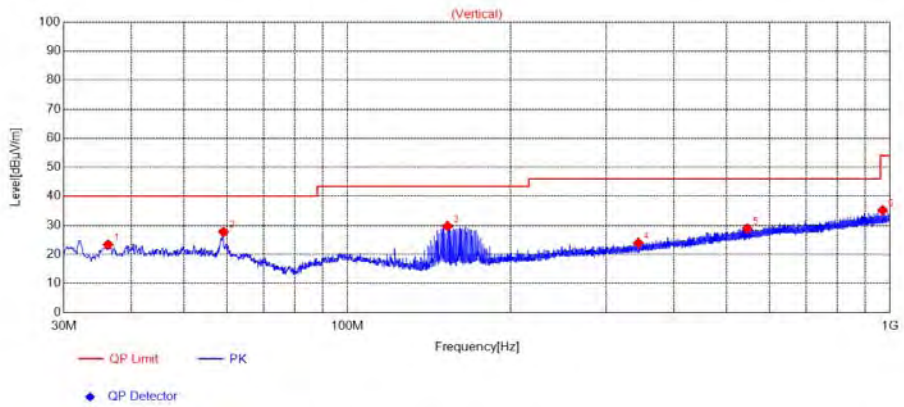


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
36.2086	23.38	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
59.1029	27.74	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
152.9113	29.72	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
343.8264	23.90	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
545.8006	28.91	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
969.5390	35.19	N/A	N/A	N/A	46.00	N/A	Vertical	PASS

(Antenna Vertical, 30MHz to 1GHz)

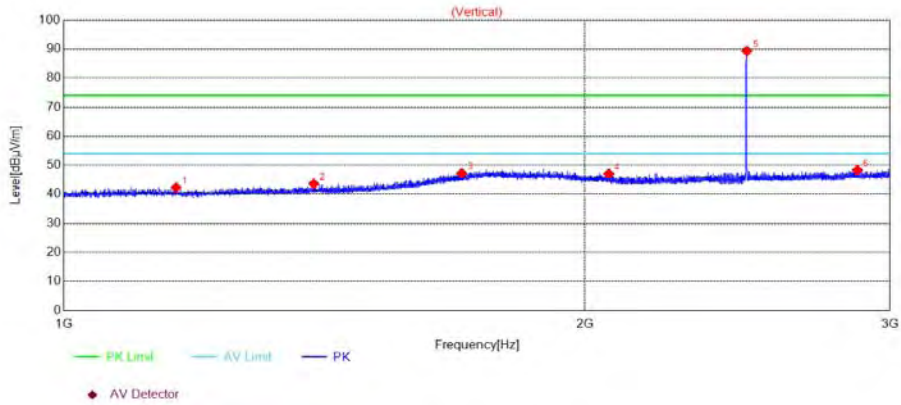

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
1161.0000	42.35	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1394.4000	43.62	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1697.4000	47.23	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2064.2000	47.04	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2480.2000	89.33	N/A	N/A	74.00	N/A	54.00	Vertical	N/A
2872.8000	48.33	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 1GHz to 3GHz)

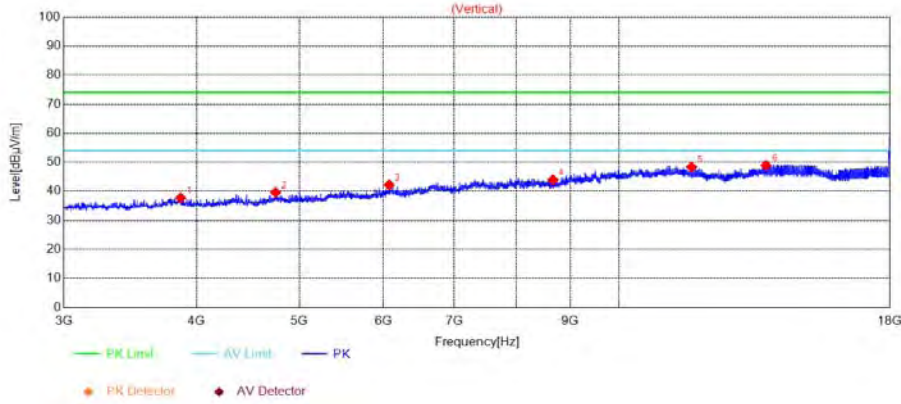

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
3865.5000	37.75	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4749.0000	39.65	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
6075.0000	42.24	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8668.5000	43.93	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
11707.5000	48.38	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
13759.5000	48.93	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 3GHz to 18GHz)

Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test Items	Uncertainty
Number of Hopping Frequency	±5%
Peak Output Power	±2.22dB
Bandwidth	±5%
Carrier Frequency Separation	±5%
Time of Occupancy (Dwell time)	±5%
Conducted Spurious Emission	±2.77dB
Restricted Frequency Bands	±5%
Radiated Emission	±2.95dB
Conducted Emission	±2.44dB

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



4. Test Equipments Utilized

4.1 Conducted Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Bluetooth Base Station	6K00006210	MT8852B	Anritsu	2021.03.25	2022.03.24
Directional Coupler	17041703	DTO-5-30	ShangHaiHuaxiang	N/A	N/A
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2021.03.25	2022.03.24
RF Cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial Cable	CB02	RF02	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

4.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2021.03.09	2022.03.08
LISN	812744	NSLK 8127	Schwarzbeck	2021.03.09	2022.03.08
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	Schwarzbeck	2021.07.21	2022.07.20
Coaxial Cable(BNC) (30MHz-26GHz)	CB01	EMC01	Morlab	N/A	N/A

4.3 List of Software Used

Description	Manufacturer	Software Version
Test System	Tonscend	V2.5.77.0418
Morlab EMCR V1.2	Morlab	V1.0
TS+ -[JS32-CE]	Tonscend	V2.5.0.0

**4.4 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY54130016	N9038A	Agilent	2021.07.16	2022.07.15
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2019.05.24	2022.05.23
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2019.02.14	2022.02.13
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2019.07.26	2022.07.25
Test Antenna – Horn	BBHA9170 #774	BBHA9170	Schwarzbeck	2019.07.26	2022.07.25
Coaxial Cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial Cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial Cable (N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
Coaxial Cable (N male) (30MHz-40GHz)	CB05	EMC05	Morlab	N/A	N/A
1-18GHz pre-Amplifier	61171/61172	S020180L32 03	Tonscend	2021.07.16	2022.07.15
18-26.5GHz pre-Amplifier	46732	S10M100L38 02	Tonscend	2021.07.16	2022.07.15
26-40GHz pre-Amplifier	56774	S40M400L40 02	Tonscend	2021.07.16	2022.07.15
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	2021.07.16	2022.07.15
Anechoic Chamber	N/A	9m*6m*6m	CRT	2020.01.06	2023.01.05

————— END OF REPORT —————