

FCC TEST REPORT

Product Name: Smart Phone
Trade Mark: BLU
Model No.: G52L
Report Number: 2211282816RFM-2
Test Standards: FCC 47 CFR Part 22
FCC 47 CFR Part 24
FCC 47 CFR Part 27
FCC ID: YHLBLUG52L
Test Result: PASS
Date of Issue: January 5, 2023


Prepared for:

BLU Products, Inc.
10814 NW 33rd St # 100 Doral, FL 33172 , USA

Prepared by:

Shenzhen UnionTrust Quality and Technology Co., Ltd.
Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and
technology park, Longhua district, Shenzhen, China
TEL: +86-755-2823 0888
FAX: +86-755-2823 0886

Prepared by:



Kieron Luo
Project Engineer

Reviewed by:



Henry Lu
Team Leader

Approved by:



Kevin Liang
Assistant Manager

Date:

January 5, 2023

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1

Version

Version No.	Date	Description
V1.0	January 5, 2023	Original



Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1

CONTENTS

1. GENERAL INFORMATION	5
1.1 CLIENT INFORMATION	5
1.2 EUT INFORMATION	5
1.2.1 GENERAL DESCRIPTION OF EUT	5
1.2.2 DESCRIPTION OF ACCESSORIES	6
1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	7
1.4 DESCRIPTION OF SUPPORT UNITS	11
1.5 TEST LOCATION	11
1.6 TEST FACILITY	11
1.7 DEVIATION FROM STANDARDS	11
1.8 ABNORMALITIES FROM STANDARD CONDITIONS	11
1.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER	12
1.10 MEASUREMENT UNCERTAINTY	12
2. TEST SUMMARY	13
3. EQUIPMENT LIST	16
4. TEST CONFIGURATION	17
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING	17
4.2 TEST SETUP	18
4.2.1 FOR RADIATED EMISSIONS TEST SETUP	18
4.2.2 FOR CONDUCTED RF TEST SETUP	19
4.3 TEST CHANNELS	20
4.4 SYSTEM TEST CONFIGURATION	22
4.5 PRE-SCAN	23
5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION	26
5.1 REFERENCE DOCUMENTS FOR TESTING	26
5.2 CONDUCTED OUTPUT POWER	26
5.2.1 LTE BAND 2	27
5.2.2 LTE BAND 4	28
5.2.3 LTE BAND 5	29
5.2.4 LTE BAND 7	30
5.2.6 LTE BAND 12	31
5.2.7 LTE BAND 17	32
5.2.8 LTE BAND 66	33
5.3 ERP OR EIRP	34
5.3.1 LTE BAND 2	35
5.3.2 LTE BAND 4	36
5.3.3 LTE BAND 5	37
5.3.1 LTE BAND 7	37
5.3.2 LTE BAND 12	38
5.3.3 LTE BAND 17	39
5.3.4 LTE BAND 66	39
5.4 PEAK-TO-AVERAGE RATIO	40
5.5 99%&26dB BANDWIDTH	41
5.6 BAND EDGE AT ANTENNA TERMINALS	42
5.7 SPURIOUS EMISSIONS AT ANTENNA TERMINALS	43
5.8 FIELD STRENGTH OF SPURIOUS RADIATION	44
5.8.1 LTE BAND 2	45
5.8.2 LTE BAND 4	46
5.8.3 LTE BAND 5	47
5.8.1 LTE BAND 7	48
5.8.2 LTE BAND 12	49
5.8.3 LTE BAND 17	50
5.8.4 LTE BAND 66	51

5.9 FREQUENCY STABILITY52

APPENDIX A RF TEST DATA.....56

A.1 LTE BAND 256

A.2 LTE BAND 486

A.3 LTE BAND 5116

A.4 LTE BAND 7137

A.5 LTE BAND 12158

A.6 LTE BAND 17179

A.7 LTE BAND 66191

APPENDIX 1 PHOTOS OF TEST SETUP221

APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS.....221

1. GENERAL INFORMATION

1.1 CLIENT INFORMATION

Applicant:	BLU Products, Inc.
Address of Applicant:	10814 NW 33rd St # 100 Doral, FL 33172 , USA
Manufacturer:	BLU Products, Inc.
Address of Manufacturer:	10814 NW 33rd St # 100 Doral, FL 33172 , USA

1.2 EUT INFORMATION

1.2.1 General Description of EUT

Product Name:	Smart Phone		
Model No.:	G52L		
Trade Mark:	BLU		
DUT Stage:	Identical Prototype		
EUT Supports Function: (Provided by the customer)	GSM Bands:	GSM850/PCS 1900	
	UTRA Bands:	WCDMA Band II/ Band IV/ Band V	
	E-UTRA Bands:	LTE FDD Band 2/ Band 4/ Band 5/ Band 7/ Band 12/ Band 17/ Band 66	
	2.4 GHz ISM Band:	IEEE 802.11b/g/n	
		Bluetooth V4.2	
	RNSS Bands:	1559 MHz to 1610 MHz	GPS/ BDS/ Galileo/ GLONASS
	BSR:	VHF Band II	FM
Software Version:	BLU_G0820WW_V12.0.G.05.00_TIGO 24-11-2022 17:28 (Provided by the customer)		
Hardware Version:	S6509-63D,FS301-56D,SC9863A1 (Provided by the customer)		
Sample Received Date:	November 28, 2022		
Sample Tested Date:	November 28, 2022 to December 26, 2022		
Remark:	The above EUT's information was provided by customer. Please refer to the specifications or user's manual for more detailed description.		

1.2.2 Description of Accessories

Adapter	
Model No.:	US-HY-2000
Input:	100-240 V~50/60 Hz 0.3 A
Output:	5.0 V $\pm$ 2000 mA

Battery	
Model No.:	C906549500P
Battery Type:	Lithium-ion Polymer Battery
Rated Voltage:	3.87 Vdc
Limited Charge Voltage:	4.45 Vdc
Typical Capacity:	4960 mAh
Rated Capacity:	4860 mAh

Cable	
Connector:	USB Cable
Cable Type:	Unshielded without ferrite
Length:	1.0 Meter

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com
<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1

1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

Support Networks:	Single Carrier: LTE Band 2/4/5/7/12/17/66	
Type of Modulation:	QPSK, 16QAM, 64QAM	
Antenna Type: (Provided by the customer)	FPCB Antenna	
Antenna Gain: (Provided by the customer)	LTE Band 2:	0.78 dBi
	LTE Band 4:	0.61 dBi
	LTE Band 5:	-0.98 dBi
	LTE Band 7:	0.67 dBi
	LTE Band 12:	-1.07 dBi
	LTE Band 17:	-1.07 dBi
	LTE Band 66:	0.61 dBi
Sample No.:	Radiated: S20221128863-ZJA02/6	
	Conducted: S20221128863-ZJA03/6	
Normal Test Voltage:	3.87 Vdc	
Extreme Test Voltage:	3.4 to 4.45Vdc	
Extreme Test Temperature:	-30 °C to +50 °C	

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1

Summary of Results:								
Bands	BW	Modulation	Frequency Range	Max RF Output Power (dBm)		ERP/EIRP	99% BW	Emission Designator
	(MHz)		(MHz)	Conducted (Average)	ERP/EIRP (Average)	(W)	(MHz)	
2	1.4	QPSK	1850.7-1909.3	20.78	21.56	0.1432	1.0792	1M08G7D
		16QAM		20.24	21.02	0.1265	1.0801	1M08W7D
		64QAM		19.46	20.24	0.1057	1.0808	1M08W7D
	3	QPSK	1851.5-1908.5	20.66	21.44	0.1393	2.6938	2M69G7D
		16QAM		20.44	21.22	0.1324	2.6851	2M69W7D
		64QAM		19.48	20.26	0.1062	2.6846	2M68W7D
	5	QPSK	1852.5-1907.5	20.81	21.59	0.1442	4.4799	4M48G7D
		16QAM		20.42	21.20	0.1318	4.4722	4M47W7D
		64QAM		19.52	20.30	0.1072	4.4750	4M48W7D
	10	QPSK	1855.0-1905.0	20.71	21.49	0.1409	8.9514	8M95G7D
		16QAM		20.70	21.48	0.1406	8.9539	8M95W7D
		64QAM		19.98	20.76	0.1191	8.9416	8M94W7D
	15	QPSK	1857.5-1902.5	20.67	21.45	0.1396	13.445	13M4G7D
		16QAM		20.57	21.35	0.1365	13.447	13M4W7D
		64QAM		19.69	20.47	0.1114	13.415	13M4W7D
	20	QPSK	1860.0-1900.0	20.89	21.67	0.1469	17.924	17M9G7D
		16QAM		20.63	21.41	0.1384	17.917	17M9W7D
		64QAM		20.30	21.08	0.1282	17.926	17M9W7D
4	1.4	QPSK	1710.7-1754.3	22.97	23.58	0.2280	1.0792	1M08G7D
		16QAM		22.88	23.49	0.2234	1.0794	1M08W7D
		64QAM		22.11	22.72	0.1871	1.0847	1M08W7D
	3	QPSK	1711.5-1753.5	23.02	23.63	0.2307	2.6889	2M69G7D
		16QAM		23.15	23.76	0.2377	2.6872	2M69W7D
		64QAM		21.76	22.37	0.1726	2.6878	2M69W7D
	5	QPSK	1712.5-1752.5	23.12	23.73	0.2360	4.4603	4M46G7D
		16QAM		21.94	22.55	0.1799	4.4700	4M47W7D
		64QAM		21.33	21.94	0.1563	4.4680	4M47W7D
	10	QPSK	1715-1750	22.95	23.56	0.2270	8.9413	8M94G7D
		16QAM		22.84	23.45	0.2213	8.9497	8M95W7D
		64QAM		22.14	22.75	0.1884	8.9452	8M95W7D
	15	QPSK	1717.5-1747.5	22.87	23.48	0.2228	13.415	13M4G7D
		16QAM		22.87	23.48	0.2228	13.433	13M4W7D
		64QAM		22.16	22.77	0.1892	13.419	13M4W7D
	20	QPSK	1720-1745	23.10	23.71	0.2350	17.900	17M9G7D
		16QAM		22.75	23.36	0.2168	17.924	17M9W7D
		64QAM		22.17	22.78	0.1897	17.924	17M9W7D

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1

Bands	BW	Modulation	Frequency Range	Max RF Output Power (dBm)		ERP/EIRP	99% BW	Emission Designator
	(MHz)		(MHz)	Conducted (Average)	ERP/EIRP (Average)	(W)	(MHz)	
5	1.4	QPSK	824.7-848.3	24.76	21.63	0.1455	1.0793	1M08G7D
		16QAM		23.97	20.84	0.1213	1.0797	1M08W7D
		64QAM		23.15	20.02	0.1005	1.0822	1M08W7D
	3	QPSK	825.5-847.5	24.78	21.65	0.1462	2.6905	2M69G7D
		16QAM		24.16	21.03	0.1268	2.6869	2M69W7D
		64QAM		23.45	20.32	0.1076	2.6849	2M68W7D
	5	QPSK	826.5-846.5	24.86	21.73	0.1489	4.4590	4M46G7D
		16QAM		24.01	20.88	0.1225	4.4623	4M46W7D
		64QAM		23.33	20.20	0.1047	4.4561	4M46W7D
	10	QPSK	829-844	25.46	22.33	0.1710	8.9595	8M96G7D
		16QAM		24.55	21.42	0.1387	8.9545	8M95W7D
		64QAM		24.16	21.03	0.1268	8.9572	8M96W7D
7	5	QPSK	2502.5-2567.5	21.44	22.11	0.1626	4.4596	4M46G7D
		16QAM		20.88	21.55	0.1429	4.4675	4M47W7D
		64QAM		20.50	21.17	0.1309	4.4729	4M47W7D
	10	QPSK	2505-2565	21.42	22.09	0.1618	8.9421	8M94G7D
		16QAM		21.18	21.85	0.1531	8.9347	8M93W7D
		64QAM		20.59	21.26	0.1337	8.9548	8M95W7D
	15	QPSK	2507.5-2562.5	21.40	22.07	0.1611	13.410	13M4G7D
		16QAM		21.11	21.78	0.1507	13.425	13M4W7D
		64QAM		20.63	21.30	0.1349	13.410	13M4W7D
	20	QPSK	2510-2560	21.46	22.13	0.1633	17.936	17M9G7D
		16QAM		21.33	22.00	0.1585	17.910	17M9W7D
		64QAM		20.89	21.56	0.1432	17.901	17M9W7D
12	1.4	QPSK	699.7-715.3	24.80	21.58	0.1439	1.0789	1M08G7D
		16QAM		23.97	20.75	0.1189	1.0829	1M08W7D
		64QAM		23.24	20.02	0.1005	1.0808	1M08W7D
	3	QPSK	700.5-714.5	24.78	21.56	0.1432	2.6859	2M69G7D
		16QAM		23.85	20.63	0.1156	2.6883	2M69W7D
		64QAM		23.10	19.88	0.0973	2.6817	2M68W7D
	5	QPSK	701.5-713.5	24.83	21.61	0.1449	4.4677	4M47G7D
		16QAM		24.02	20.80	0.1202	4.4644	4M46W7D
		64QAM		23.29	20.07	0.1016	4.4763	4M48W7D
	10	QPSK	704-711	25.04	21.82	0.1521	8.9523	8M95G7D
		16QAM		24.32	21.10	0.1288	8.9523	8M95W7D
		64QAM		23.78	20.56	0.1138	8.9506	8M95W7D
17	5	QPSK	706.5-713.5	24.74	21.52	0.1419	4.4656	4M47G7D
		16QAM		23.66	20.44	0.1107	4.4656	4M47W7D
		64QAM		23.12	19.90	0.0977	4.4638	4M46W7D

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1

Bands	BW	Modulation	Frequency Range	Max RF Output Power (dBm)		ERP/EIRP	99% BW	Emission Designator
	(MHz)		(MHz)	Conducted (Average)	ERP/EIRP (Average)	(W)	(MHz)	
66	10	QPSK	709-711	24.61	21.39	0.1377	8.9387	8M94G7D
		16QAM		24.11	20.89	0.1227	8.9465	8M95W7D
		64QAM		23.64	20.42	0.1102	8.9159	8M92W7D
	1.4	QPSK	1710.7-1779.3	23.05	23.66	0.2323	1.0792	1M08G7D
		16QAM		22.87	23.48	0.2228	1.0827	1M08W7D
		64QAM		21.88	22.49	0.1774	1.0851	1M09W7D
	3	QPSK	1711.5-1778.5	22.86	23.47	0.2223	2.6881	2M69G7D
		16QAM		22.97	23.58	0.2280	2.6883	2M69W7D
		64QAM		21.46	22.07	0.1611	2.6907	2M69W7D
	5	QPSK	1712.5-1777.5	23.10	23.71	0.2350	4.4661	4M47G7D
		16QAM		22.13	22.74	0.1879	4.4663	4M47W7D
		64QAM		21.25	21.86	0.1535	4.4607	4M46W7D
	10	QPSK	1715-1775	22.93	23.54	0.2259	8.9477	8M95G7D
		16QAM		22.90	23.51	0.2244	8.9429	8M94W7D
		64QAM		22.11	22.72	0.1871	8.9518	8M95W7D
	15	QPSK	1717.5-1772.5	22.91	23.52	0.2249	13.410	13M4G7D
		16QAM		22.90	23.51	0.2244	13.425	13M4W7D
		64QAM		22.10	22.71	0.1866	13.407	13M4W7D
	20	QPSK	1720-1770	23.17	23.78	0.2388	17.899	17M9G7D
		16QAM		22.85	23.46	0.2218	17.923	17M9W7D
		64QAM		21.99	22.60	0.1820	17.925	17M9W7D

1.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

1) Support Equipment

Description	Manufacturer	Model No.	Serial Number	Supplied by
--	--	--	--	--

2) Support Cable

Cable No.	Description	Connector	Length	Supplied by
1	Antenna Cable	SMA	0.1 Meter	Applicant

1.5 TEST LOCATION

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China, China 518109

Telephone: +86 (0) 755 2823 0888

Fax: +86 (0) 755 2823 0886

1.6 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

ISED Wireless Device Testing Laboratories

CAB identifier: CN0032

FCC Accredited Lab.

Designation Number: CN1194

Test Firm Registration Number: 259480

1.7 DEVIATION FROM STANDARDS

None.

1.8 ABNORMALITIES FROM STANDARD CONDITIONS

None.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1

1.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

1.10 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted Output Power	±0.7 dB
2	99%&26dB Bandwidth	±1.86 %
3	Emission Mask	±2.7 dBm
4	Spurious emissions at antenna terminals	±2.7 dBm
5	Field strength of spurious radiation	30 MHz-1 GHz: ±4.9 dB 1 GHz-18 GHz: ±4.8 dB 18 GHz-40 GHz: ±5.1 dB
6	Frequency stability	±6.5 x 10 ⁻⁸
7	Humidity	±3.9 %
8	Temperature	±0.62 °C
9	DC Voltages	±0.68 %

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1

2. TEST SUMMARY

FCC 47 CFR Part 24 Test Cases (Band 2)			
Test Item	Test Requirement	Test Method	Result
Equivalent Isotropic Radiated Power (EIRP)	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 24.232(c)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Conducted Output Power	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 24.232(c)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Peak-to-average ratio	FCC 47 CFR Part 24.232(d)	KDB 971168 D01v03r01	PASS
99%&26dB Bandwidth	FCC 47 CFR Part 2.1049(h) & FCC 47 CFR Part 24.238(b)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Band Edge at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 24.238(a)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Spurious emissions at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 24.238(a)(b)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Field strength of spurious radiation	FCC 47 CFR Part 2.1053 & FCC 47 CFR Part 24.238(a)(b)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Frequency stability	FCC 47 CFR Part 2.1055 & FCC 47 CFR Part 24.235	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS

FCC 47 CFR Part 27 Test Cases (LTE Band 4 & Band 66)			
Test Item	Test Requirement	Test Method	Result
Equivalent Isotropic Radiated Power (EIRP)	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 27.50(d)(4)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Conducted Output Power	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 27.50(d)(4)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Peak-to-average ratio	FCC 47 CFR Part 27.50(d)(5)	KDB 971168 D01v03r01	PASS
99%&26dB Bandwidth	FCC 47 CFR Part 2.1049(h) & FCC 47 CFR Part 27.53(h)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Band Edge at antenna terminals	FCC 47 CFR Part 27.53(h)(1)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Spurious emissions at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 27.53(h)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Field strength of spurious radiation	FCC 47 CFR Part 2.1053 & FCC 47 CFR Part 27.53(h)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Frequency stability	FCC 47 CFR Part 2.1055 & FCC 47 CFR Part 27.54	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS

FCC 47 CFR Part 22 Test Cases (Band 5)			
Test Item	Test Requirement	Test Method	Result
Effective Radiated Power (ERP)	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 22.913(a)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Conducted Output Power	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 22.913(a)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Peak-to-average ratio	FCC 47 CFR Part 22.913(a)	KDB 971168 D01v03r01	PASS
99%&26dB Bandwidth	FCC 47 CFR Part 2.1049(h)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Band Edge at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 22.917(a)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Spurious emissions at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 22.917(a)(b)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Field strength of spurious radiation	FCC 47 CFR Part 2.1053 & FCC 47 CFR Part 22.917(a)(b)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Frequency stability	FCC 47 CFR Part 2.1055 & FCC 47 CFR Part 22.355	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS

FCC 47 CFR Part 27 Test Cases (LTE Band 12& 17)			
Test Item	Test Requirement	Test Method	Result
Effective Radiated Power (ERP)	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 27.50(c)(10)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Conducted Output Power	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 27.50(c)(10)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Peak-to-average ratio	FCC 47 CFR Part 27.50(d)(5)	KDB 971168 D01v03r01	PASS
99%&26dB Bandwidth	FCC 47 CFR Part 2.1049(h) FCC 47 CFR Part 27.53(g)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Band Edge at antenna terminals	FCC 47 CFR Part 27.53(g)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Spurious emissions at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 27.53(g)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Field strength of spurious radiation	FCC 47 CFR Part 2.1053 & FCC 47 CFR Part 27.53(g)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Frequency stability	FCC 47 CFR Part 2.1055 & FCC 47 CFR Part 27.54	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS

FCC 47 CFR Part 27 Test Cases (LTE Band 7)			
Test Item	Test Requirement	Test Method	Result
Equivalent Isotropic Radiated Power (EIRP)	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 27.50(h)(2)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Conducted Output Power	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 27.50(h)(2)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Peak-to-average ratio	FCC 47 CFR Part 27.50(d)(5)	KDB 971168 D01v03r01	PASS
99%&26dB Bandwidth	FCC 47 CFR Part 2.1049(h)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Band Edge at antenna terminals	FCC 47 CFR Part 27.53(m)(4)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Spurious emissions at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 27.53(m)(4)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Field strength of spurious radiation	FCC 47 CFR Part 2.1053 & FCC 47 CFR Part 27.53(m)(4)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Frequency stability	FCC 47 CFR Part 2.1055 & FCC 47 CFR Part 27.54	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS

Disclaimer and Explanations:

The declared of product specification and data (e.g. antenna gain, RF specification, etc) for EUT presented in the report are provided by the customer, and the customer takes all the responsibilities for the accuracy of product specification.

3. EQUIPMENT LIST

Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
☒	3M Chamber & Accessory Equipment	ETS-LINDGREN	3M	Euroshiedpn-CT001270-1317	22-Jan-2021	21-Jan-2024
☒	Receiver	R&S	ESIB26	100114	03-Nov-2022	02-Nov-2023
☒	Broadband Antenna	ETS-LINDGREN	3142E	00201566	11-Nov-2021	10-Nov-2023
☒	6dB Attenuator	Talent	RA6A5-N-18	18103001	11-Nov-2021	10-Nov-2023
☒	Preamplifier	HP	8447F	2805A02960	03-Nov-2022	02-Nov-2023
☒	Pre-amplifier	HP	8447F	2805A02960	01-Nov-2022	31-Oct-2023
☒	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201874	17-Apr-2022	16-Apr-2024
☒	Pre-amplifier	ETS-LINDGREN	00118385	00201874	01-Nov-2022	31-Oct-2023
☐	Horn Antenna	ETS-LINDGREN	3116C	00200180	17-Apr-2022	16-Apr-2024
☒	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3116C-PA	00202652	21-Nov-2022	20-Nov-2023
☒	Pre-amplifier	ETS-LINDGREN	00118384	00202652	21-Nov-2022	20-Nov-2023
☒	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A
☒	Test Software	Audix	e3	Software Version: 9.160323		

RF Conducted Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
☒	EXA Signal Analyzer	KEYSIGHT	N9010B	MY62060155	02-Jun-2022	01-Jun-2023
☒	DC Source	KIKUSUI	PWR400L	LK003024	20-Aug-2022	19-Aug-2023
☒	Temp & Humidity chamber	Votisch	VT4002	58566133290020	15-Apr-2022	14-Apr-2023
☒	Wideband Radio Communication Tester	R&S	CMW500	119583	15-Apr-2022	14-Apr-2023
☒	Wideband Radio Communication Tester	R&S	CMW500	120932	15-Apr-2022	14-Apr-2023

4. TEST CONFIGURATION

4.1 ENVIRONMENTAL CONDITIONS FOR TESTING


Test Environment	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage (V)	Relative Humidity (%)
TN/VN	+15 to +35	3.87	20 to 75
TL/VL	-30	3.4	20 to 75
TH/VL	+50	3.4	20 to 75
TL/VH	-30	4.45	20 to 75
TH/VH	+50	4.45	20 to 75

Remark:


- 1) The EUT just work in such extreme temperature of -30 °C to +50 °C and the extreme voltage of 3.4 V to 4.45 V, so here the EUT is tested in the temperature of -30 °C to +50 °C and the voltage of 3.4 V to 4.45 V.
- 2) VN: Normal Voltage; TN: Normal Temperature;
TL: Low Extreme Test Temperature; TH: High Extreme Test Temperature;
VL: Low Extreme Test Voltage; VH: High Extreme Test Voltage.

4.2 TEST SETUP

4.2.1 For Radiated Emissions test setup

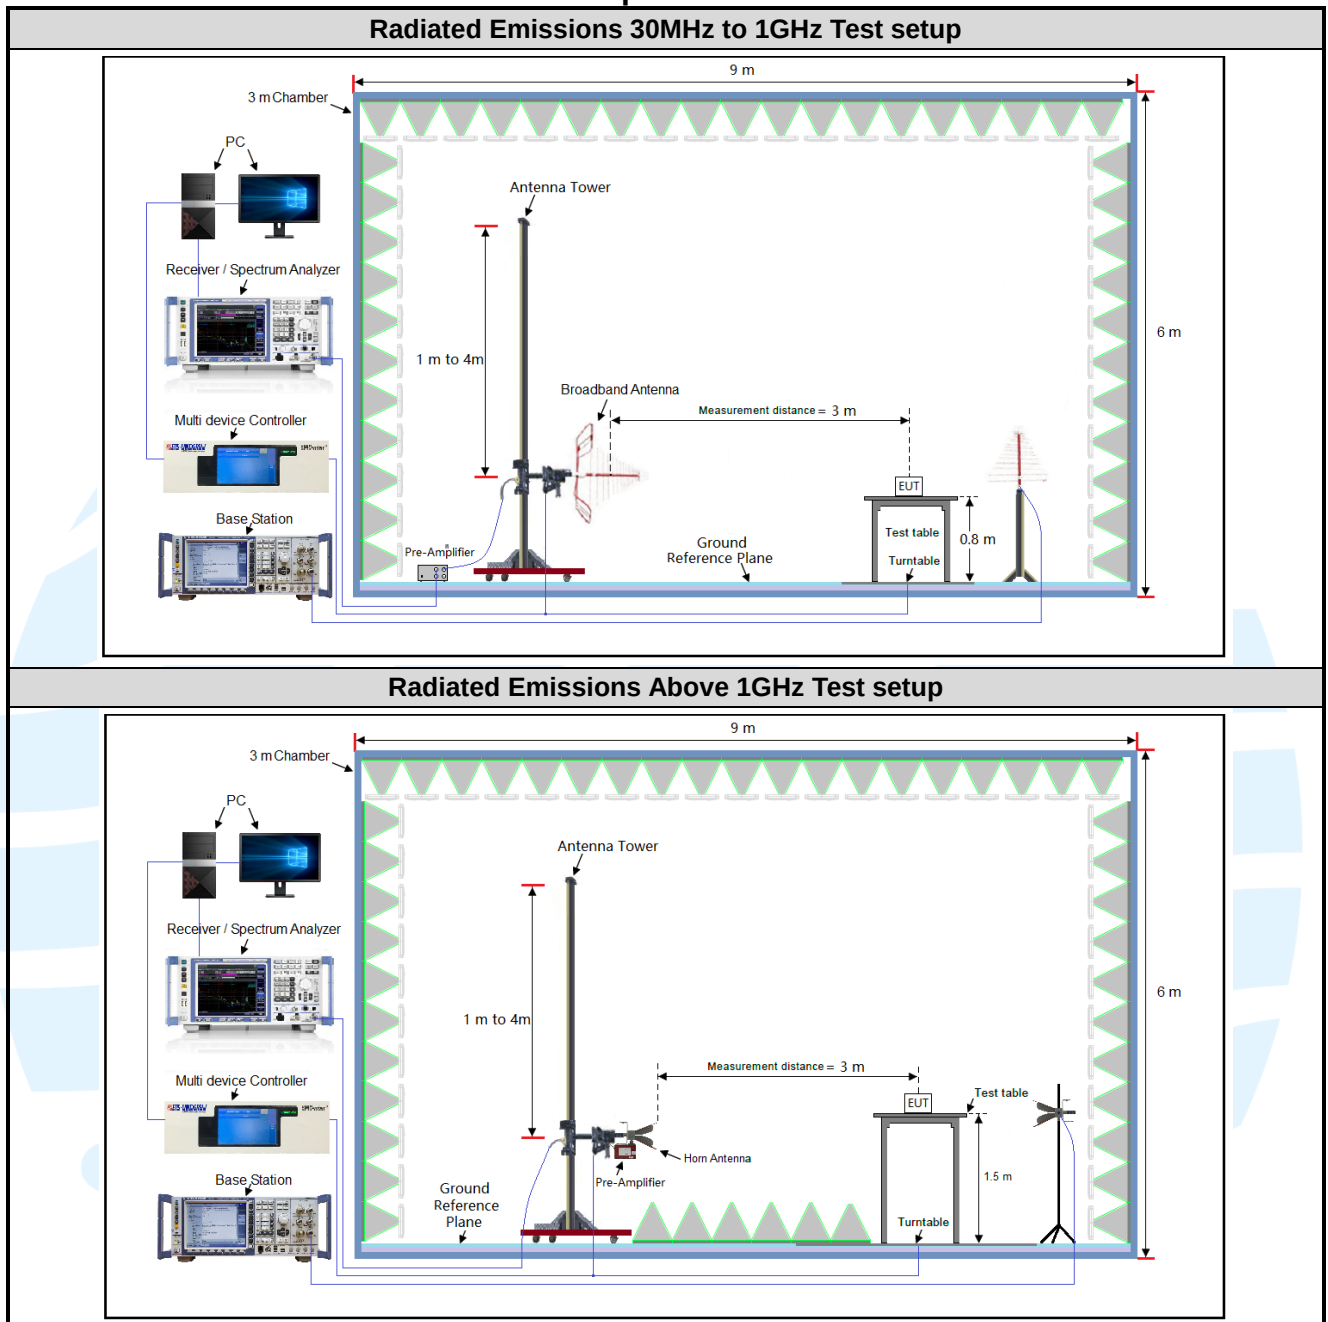

4.2.2 For Conducted RF test setup

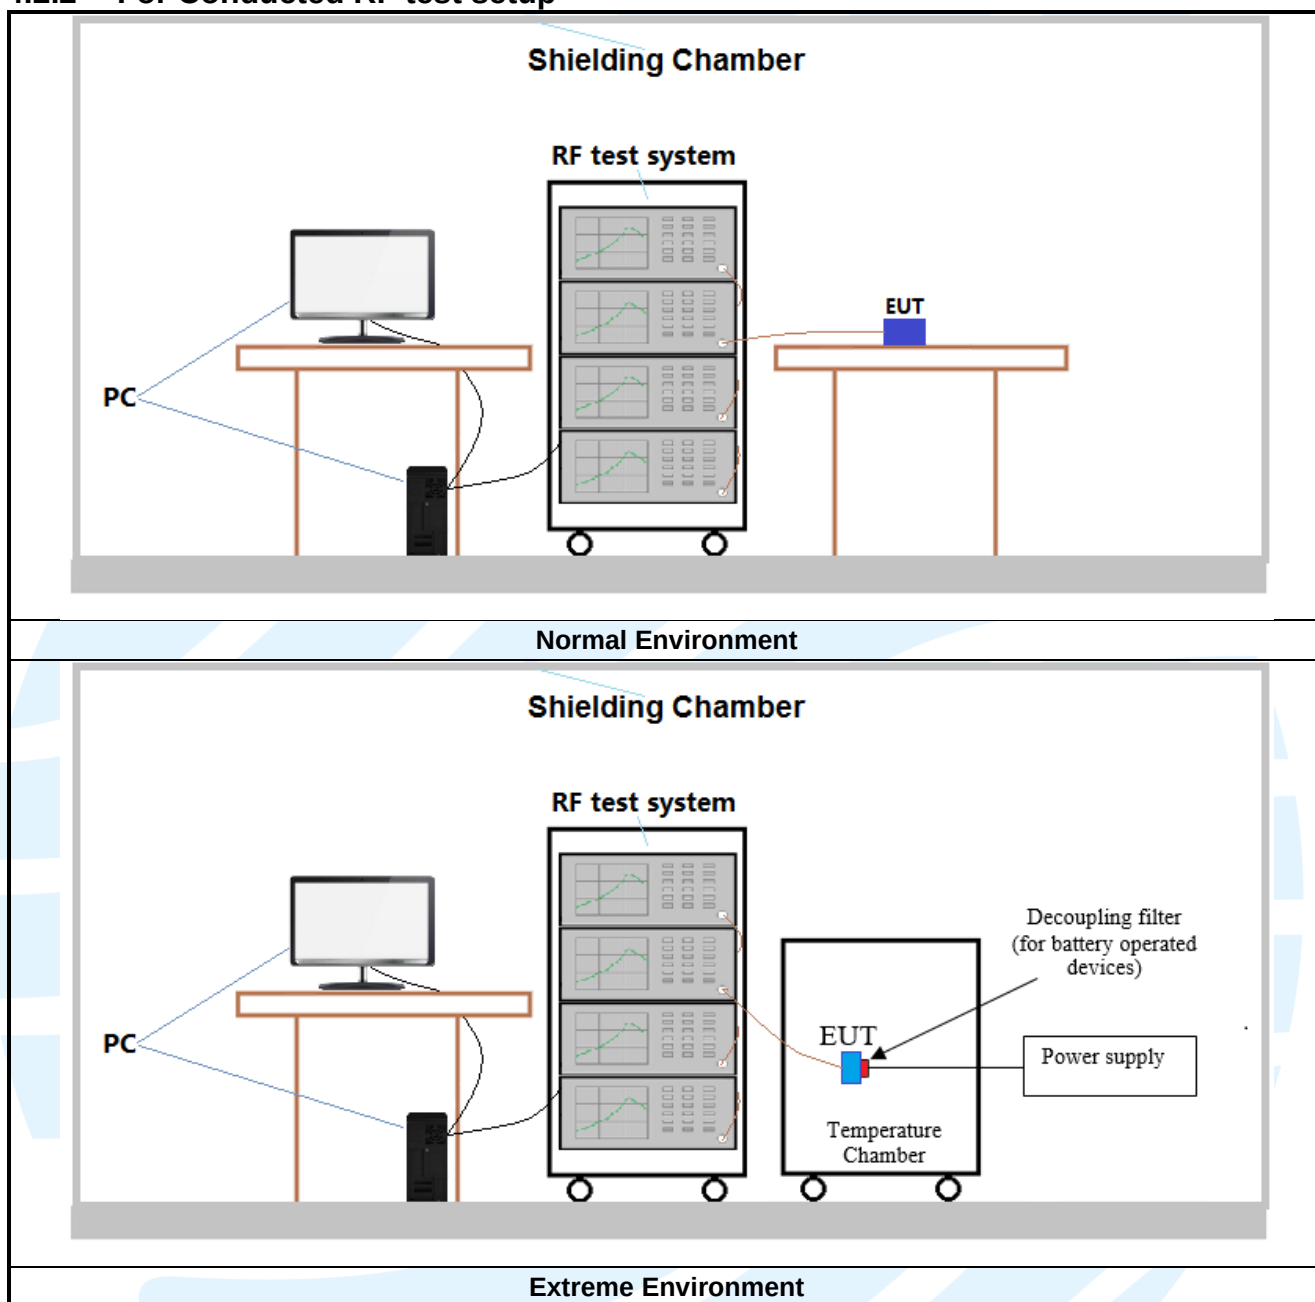

4.3 TEST CHANNELS

Band	Test Frequency ID	Bandwidth (MHz)	Number [UL]	Frequency of Uplink (MHz)
LTE Band 2 TX: 1850-1910MHz	Low Range	1.4	18607	1850.7
		3	18615	1851.5
		5	18625	1852.5
		10	18650	1855
		15	18675	1857.5
		20	18700	1860
	Middle Range	1.4/3/5/10/15/20	18900	1880
	High Range	1.4	19193	1909.3
		3	19185	1908.5
		5	19175	1907.5
		10	19150	1905
		15	19125	1902.5
		20	19100	1900
LTE Band 4 TX: 1710-1755MHz	Low Range	1.4	19957	1710.7
		3	19965	1711.5
		5	19975	1712.5
		10	20000	1715
		15	20025	1717.5
		20	20050	1720
	Middle Range	1.4/3/5/10/ 15/20	20175	1732.5
	High Range	1.4	20393	1754.3
		3	20385	1753.5
		5	20375	1752.5
		10	20350	1750
		15	20325	1747.5
		20	20300	1745
LTE band 5 TX: 824–849MHz	Low Range	1.4	20407	824.7
		3	20415	825.5
		5	20425	826.5
		10	20450	829
	Middle Range	1.4/3/5/10	20525	836.5
	High Range	1.4	20643	848.3
		3	20635	847.5
		5	20625	846.5
		10	20600	844
LTE Band 7 TX: 2500-2570MHz	Low Range	5	20775	2502.5
		10	20800	2505
		15	20825	2507.5
		20	20850	2510
	Middle Range	5/10/15/20	21100	2535
	High Range	5	21425	2567.5
		10	21400	2565
		15	21375	2562.5

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1

		20	21350	2560
LTE Band 12 TX: 699-716MHz	Low Range	1.4	23017	699.7
		3	23025	700.5
		5	23035	701.5
		10	23060	704
	Middle Range	1.4/3/5/10	23095	707.5
	High Range	1.4	23173	715.3
		3	23165	714.5
		5	23155	713.5
		10	23130	711
LTE Band 17 TX: 704-716MHz	Low Range	5	23755	706.5
		10	23780	709
	Middle Range	5/10	23790	710
	High Range	5	23825	713.5
		10	23800	711
LTE Band 66 TX: 1710-1780MHz	Low Range	1.4	131979	1710.7
		3	131987	1711.5
		5	131997	1712.5
		10	132022	1715
		15	132047	1717.5
		20	132072	1720
	Middle Range	1.4/3/5/10/ 15/20	132322	1745
	High Range	1.4	132665	1779.3
		3	132657	1778.5
		5	132647	1777.5
		10	132622	1775
		15	132597	1772.5
		20	132572	1770

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1

4.4 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. It was powered by a 3.87Vdc battery. Only the worst case data were recorded in this test report.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, X/Y/Z axis, and antenna ports.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000MHz. The resolution is 1 MHz or greater for frequencies above 1000MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

4.5 PRE-SCAN

Pre-scan all bandwidth and RB, find worse case mode are chosen to the report, the LTE worse case mode applicability and tested channel detail as below:

Item	Band	Bandwidth(MHz)						Modulation			RB			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Conducted output power	2	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒
	4	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒
	5	☒	☒	☒	☒	--	--	☒	☒	☒	☒	☒	☒	☒	☒	☒
	7	-	-	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒
	12	☒	☒	☒	☒	-	-	☒	☒	☒	☒	☒	☒	☒	☒	☒
	17	-	-	☒	☒	-	-	☒	☒	☒	☒	☒	☒	☒	☒	☒
	66	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒
99%&26dB Bandwidth	2	☒	☒	☒	☒	☒	☒	☒	☒	☒	☐	☐	☒	☒	☒	☒
	4	☒	☒	☒	☒	☒	☒	☒	☒	☒	☐	☐	☒	☒	☒	☒
	5	☒	☒	☒	☒	--	--	☒	☒	☒	☐	☐	☒	☒	☒	☒
	7	-	-	☒	☒	☒	☒	☒	☒	☒	☐	☐	☒	☒	☒	☒
	12	☒	☒	☒	☒	-	-	☒	☒	☒	☐	☐	☒	☒	☒	☒
	17	-	-	☒	☒	-	-	☒	☒	☒	☐	☐	☒	☒	☒	☒
	66	☒	☒	☒	☒	☒	☒	☒	☒	☒	☐	☐	☒	☒	☒	☒
peak-to-average ratio	2	☐	☐	☐	☐	☐	☒	☒	☒	☒	☐	☐	☒	☐	☒	☐
	4	☐	☐	☐	☐	☐	☒	☒	☒	☒	☐	☐	☒	☐	☒	☐
	5	☐	☐	☐	☒	--	--	☒	☒	☒	☐	☐	☒	☐	☒	☐
	7	-	-	☐	☐	☐	☒	☒	☒	☒	☐	☐	☒	☐	☒	☐
	12	☐	☐	☐	☒	-	-	☒	☒	☒	☐	☐	☒	☐	☒	☐
	17	-	-	☐	☒	-	-	☒	☒	☒	☐	☐	☒	☐	☒	☐
	66	☐	☐	☐	☐	☐	☒	☒	☒	☒	☐	☐	☒	☐	☒	☐

Item	Band	Bandwidth(MHz)						Modulation			RB			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Band Edge at antenna terminals	2	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☐	☒	☒	☐	☒
	4	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☐	☒	☒	☐	☒
	5	☒	☒	☒	☒	--	--	☒	☒	☒	☒	☐	☒	☒	☐	☒
	7	-	-	☒	☒	☒	☒	☒	☒	☒	☒	☐	☒	☒	☐	☒
	12	☒	☒	☒	☒	-	-	☒	☒	☒	☒	☐	☒	☒	☐	☒
	17	-	-	☒	☒	-	-	☒	☒	☒	☒	☐	☒	☒	☐	☒
	66	☒	☒	☒	☒	☒	--	☒	☒	☒	☒	☐	☒	☒	☐	☒
Spurious emissions at antenna terminals	2	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☐	☐	☒	☒	☒
	4	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☐	☐	☒	☒	☒
	5	☒	☒	☒	☒	--	--	☒	☒	☒	☒	☐	☐	☒	☒	☒
	7	-	-	☒	☒	☒	☒	☒	☒	☒	☒	☐	☐	☒	☒	☒
	12	☒	☒	☒	☒	-	-	☒	☒	☒	☒	☐	☐	☒	☒	☒
	17	-	-	☒	☒	-	-	☒	☒	☒	☒	☐	☐	☒	☒	☒
	66	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☐	☐	☒	☒	☒
Field strength of spurious radiation	2	☐	☐	☐	☐	☐	☒	☒	☐	☐	☒	☐	☐	☒	☒	☒
	4	☐	☐	☐	☐	☐	☒	☒	☐	☐	☒	☐	☐	☒	☒	☒
	5	☐	☐	☐	☒	--	--	☒	☐	☐	☒	☐	☐	☒	☒	☒
	7	-	-	☐	☐	☐	☒	☒	☐	☐	☒	☐	☐	☒	☒	☒
	12	☐	☐	☐	☒	-	-	☒	☐	☐	☒	☐	☐	☒	☒	☒
	17	-	-	☒	☒	-	-	☒	☐	☐	☒	☐	☐	☐	☒	☐
	66	☐	☐	☐	☐	☐	☒	☒	☐	☐	☒	☐	☐	☒	☒	☒

Item	Band	Bandwidth(MHz)						Modulation			RB			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Frequency stability	2	☐	☐	☐	☐	☐	☒	☒	☐	☐	☐	☐	☒	☐	☒	☐
	4	☐	☐	☐	☐	☐	☒	☒	☐	☐	☐	☐	☒	☐	☒	☐
	5	☐	☐	☐	☒	--	--	☒	☐	☐	☐	☐	☒	☐	☒	☐
	7	-	-	☐	☐	☐	☒	☒	☐	☐	☐	☐	☒	☐	☒	☐
	12	☐	☐	☐	☒	-	-	☒	☐	☐	☐	☐	☒	☐	☒	☐
	17	-	-	☒	☒	-	-	☒	☐	☐	☐	☐	☒	☐	☒	☐
	66	☐	☐	☐	☐	☐	☒	☒	☐	☐	☐	☐	☒	☐	☒	☐

Remark:

The mark "☒" means is chosen for testing; The mark "☐" means is not chosen for testing;
The mark "-" means is not supported bandwidth

5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 22	Public Mobile Services
3	FCC 47 CFR Part 27	Miscellaneous Wireless Communications Services
4	FCC 47 CFR Part 24	Personal Communications Services
5	ANSI C63.26-2015	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services
6	KDB 971168 D01	KDB 971168 D01 Power Meas License Digital Systems v03r01

5.2 CONDUCTED OUTPUT POWER

Test Requirement: FCC 47 CFR Part 2.1046(a)
LTE Band 2: FCC 47 CFR Part 24.232(c)
LTE Band 4 & LTE Band 66: FCC 47 CFR Part 27.50(d)(4)
LTE Band 5: FCC 47 CFR Part 22.913(a)
LTE Band 7: FCC 47 CFR Part 27.50(h)(2)
LTE Band 12 & Band 17: FCC 47 CFR Part 27.50(c)(10)
Test Method: KDB 971168 D01v03r01 & ANSI C63.26-2015

Limit:

FCC 47 CFR Part 22.913(a):

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

FCC 47 CFR Part 24.232(c):

Mobile and portable stations are limited to 2 watts EIRP.

FCC 47 CFR Part 27.50(d)(4):

Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

FCC 47 CFR Part 27.50(c)(10):

Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

FCC 47 CFR Part 27.50(h)(2):

Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

Test Procedure:

The EUT was set up for the maximum power with CMW500, and LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.2.2 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode

Test Results: Pass

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1

5.2.1 LTE Band 2

Conducted Power(dBm)											
Modulation			QPSK			16QAM			64QAM		
Band	Bandwidth (MHz)	RB	18607	18900	19193	18607	18900	19193	18607	18900	19193
			1850.7	1880	1909.3	1850.7	1880	1909.3	1850.7	1880	1909.3
2	1.4	1@0	20.65	20.38	20.35	19.44	19.84	19.27	18.50	19.02	18.51
		1@3	20.65	20.41	20.47	19.64	20.03	19.35	18.66	19.25	18.54
		1@5	20.59	20.47	20.40	19.45	19.82	19.09	18.46	19.04	18.25
		3@0	20.71	20.60	20.46	19.98	19.89	19.60	19.03	19.11	18.77
		3@1	20.78	20.54	20.49	19.95	20.24	19.78	19.02	19.46	18.95
		3@3	20.69	20.58	20.53	19.97	19.88	19.46	19.10	19.09	18.60
		6@0	19.80	19.93	19.47	17.87	17.92	17.40	16.86	17.08	16.45
Band	Bandwidth (MHz)	RB	18615	18900	19185	18615	18900	19185	18615	18900	19185
			1851.5	1880	1908.5	1851.5	1880	1908.5	1851.5	1880	1908.5
2	3	1@0	20.66	20.42	20.43	20.32	19.90	19.57	19.38	19.05	18.78
		1@8	20.62	20.52	20.41	20.44	20.00	19.47	19.48	19.11	18.59
		1@14	20.43	20.52	20.42	20.28	19.86	19.13	19.32	18.97	18.33
		8@0	19.84	20.00	19.70	18.07	17.94	17.73	17.08	17.09	16.91
		8@4	19.88	20.04	19.62	18.11	18.00	17.70	17.12	17.25	16.78
		8@7	19.83	19.97	19.47	18.13	17.84	17.58	17.14	17.09	16.63
		15@0	19.85	20.00	19.64	18.04	17.83	17.71	17.05	17.09	16.78
Band	Bandwidth (MHz)	RB	18625	18900	19175	18625	18900	19175	18625	18900	19175
			1852.5	1880	1907.5	1852.5	1880	1907.5	1852.5	1880	1907.5
2	5	1@0	20.81	20.69	20.58	19.28	19.95	19.58	18.35	19.09	18.86
		1@12	20.66	20.47	20.48	19.76	20.42	19.72	18.81	19.52	18.95
		1@24	20.60	20.36	20.54	19.20	19.88	18.86	18.25	18.97	18.03
		12@0	19.80	20.08	19.89	17.86	18.07	17.83	16.88	17.18	16.96
		12@7	19.93	20.21	19.84	18.12	18.34	17.94	17.13	17.45	17.05
		12@13	19.76	20.03	19.51	17.77	18.07	17.54	16.90	17.15	16.63
		25@0	19.79	20.07	19.71	17.83	18.04	17.80	16.97	17.16	16.90
Band	Bandwidth (MHz)	RB	18650	18900	19150	18650	18900	19150	18650	18900	19150
			1855	1880	1905	1855	1880	1905	1855	1880	1905
2	10	1@0	20.68	20.65	20.52	20.10	20.11	20.31	19.22	19.24	19.55
		1@25	20.47	20.65	20.45	20.15	20.21	20.00	19.28	19.32	19.26
		1@49	20.46	20.71	20.35	20.70	20.43	19.68	19.98	19.51	18.91
		25@0	19.67	20.26	20.45	17.81	18.22	18.50	16.99	17.35	17.62
		25@12	19.72	20.30	20.28	17.87	18.31	18.37	16.94	17.42	17.51
		25@25	19.97	20.43	20.13	18.14	18.30	18.26	17.27	17.47	17.39
		50@0	19.81	20.34	20.30	17.97	18.21	18.37	17.05	17.39	17.49
Band	Bandwidth (MHz)	RB	18675	18900	19125	18675	18900	19125	18675	18900	19125
			1857.5	1880	1902.5	1857.5	1880	1902.5	1857.5	1880	1902.5
2	15	1@0	20.67	20.56	20.63	20.28	20.14	20.57	19.39	19.32	19.57
		1@37	20.49	20.60	20.60	20.27	20.07	20.14	19.48	19.21	19.26
		1@74	20.40	20.50	20.55	20.43	20.02	19.26	19.69	19.09	18.39
		36@0	19.70	20.24	20.31	17.82	18.16	18.08	16.93	17.37	17.21
		36@20	19.66	20.12	19.98	17.83	18.14	17.81	17.00	17.32	16.91
		36@39	19.82	20.13	19.65	17.99	18.10	17.43	17.23	17.26	16.61
		75@0	19.81	20.17	19.99	17.90	18.14	17.73	17.09	17.33	16.88
Band	Bandwidth (MHz)	RB	18700	18900	19100	18700	18900	19100	18700	18900	19100
			1860	1880	1900	1860	1880	1900	1860	1880	1900
2	20	1@0	20.89	20.56	20.44	19.78	20.63	20.33	19.18	19.92	19.67
		1@49	20.45	20.48	20.52	19.76	20.06	20.58	19.21	19.32	19.30
		1@99	20.39	20.55	20.52	20.49	20.49	20.30	20.11	20.30	19.11
		50@0	19.53	20.06	20.25	17.53	18.04	18.03	16.67	17.27	17.10
		50@24	19.66	20.03	20.14	17.69	17.98	17.94	16.81	17.25	17.14
		50@50	20.02	20.43	20.09	18.10	18.37	17.82	17.32	17.49	17.04
		100@0	19.74	20.27	20.21	17.85	18.23	17.93	17.00	17.41	17.08

5.2.2 LTE Band 4

Conducted Power(dBm)											
Modulation			QPSK			16QAM			64QAM		
Band	Bandwidth (MHz)	RB	19957	20175	20393	19957	20175	20393	19957	20175	20393
			1710.7	1732.5	1754.3	1710.7	1732.5	1754.3	1710.7	1732.5	1754.3
4	1.4	1@0	22.70	22.97	22.86	22.80	22.28	21.91	21.59	21.92	21.33
		1@3	22.70	22.95	22.91	22.81	22.53	21.89	21.62	22.11	21.36
		1@5	22.70	22.97	22.78	22.88	22.56	22.02	21.71	22.08	21.27
		3@0	22.79	22.88	22.88	22.04	22.07	21.91	20.98	21.44	21.18
		3@1	22.90	22.93	22.92	21.92	21.98	22.02	21.30	21.27	21.29
		3@3	22.89	22.90	22.89	21.75	22.17	21.87	21.01	21.48	21.21
		6@0	21.78	21.94	21.88	20.96	21.22	21.29	20.22	20.55	20.61
Band	Bandwidth (MHz)	RB	19965	20175	20385	19965	20175	20385	19965	20175	20385
			1711.5	1732.5	1753.5	1711.5	1732.5	1753.5	1711.5	1732.5	1753.5
4	3	1@0	22.72	23.02	22.93	22.96	22.92	22.39	21.48	21.40	20.89
		1@8	22.71	22.88	22.99	22.67	22.65	21.86	21.36	21.31	20.89
		1@14	22.65	22.99	22.89	22.79	23.15	22.43	21.76	21.38	20.92
		8@0	21.78	21.93	21.86	21.20	21.14	21.49	20.56	20.48	20.72
		8@4	21.75	21.94	21.97	20.92	21.37	21.12	20.20	20.50	20.58
		8@7	21.83	21.83	21.90	21.25	21.04	21.41	20.68	20.39	20.75
		15@0	21.75	21.90	21.91	21.03	21.08	21.11	20.30	20.41	20.36
Band	Bandwidth (MHz)	RB	19975	20175	20375	19975	20175	20375	19975	20175	20375
			1712.5	1732.5	1752.5	1712.5	1732.5	1752.5	1712.5	1732.5	1752.5
4	5	1@0	22.80	22.69	22.83	20.90	21.90	21.32	20.42	21.05	21.31
		1@12	22.86	23.12	22.93	21.09	21.92	21.94	20.39	21.22	21.31
		1@24	22.77	22.75	22.76	20.90	21.92	21.38	20.41	21.18	21.33
		12@0	21.89	21.93	22.03	20.96	20.93	21.06	20.26	20.27	20.37
		12@7	21.83	21.96	21.98	21.01	21.06	21.03	20.22	20.36	20.39
		12@13	21.87	21.90	21.96	20.98	20.90	20.87	20.32	20.22	20.36
		25@0	21.81	21.82	21.95	21.04	20.95	21.08	20.41	20.30	20.50
Band	Bandwidth (MHz)	RB	20000	20175	20350	20000	20175	20350	20000	20175	20350
			1715	1732.5	1750	1715	1732.5	1750	1715	1732.5	1750
4	10	1@0	22.75	22.91	22.94	22.17	22.82	21.67	21.48	22.14	20.97
		1@25	22.75	22.85	22.94	22.21	22.81	21.74	21.69	21.32	20.73
		1@49	22.75	22.89	22.95	22.18	22.84	21.67	21.44	22.12	21.04
		25@0	21.80	21.88	21.99	20.99	21.15	21.25	20.32	20.48	20.49
		25@12	21.83	21.86	21.92	21.03	21.12	21.21	20.26	20.46	20.51
		25@25	21.72	21.95	21.90	20.90	21.10	21.28	20.31	20.48	20.51
		50@0	21.82	21.89	21.90	20.99	21.06	21.16	20.30	20.47	20.44
Band	Bandwidth (MHz)	RB	20025	20175	20325	20025	20175	20325	20025	20175	20325
			1717.5	1732.5	1747.5	1717.5	1732.5	1747.5	1717.5	1732.5	1747.5
4	15	1@0	22.78	22.87	22.76	22.42	22.86	22.04	21.82	22.12	21.37
		1@37	22.72	22.85	22.65	22.37	22.87	22.08	21.43	21.36	21.69
		1@74	22.72	22.79	22.69	22.38	22.78	22.00	21.75	22.16	21.42
		36@0	21.94	21.86	21.98	21.02	21.00	21.10	20.45	20.43	20.44
		36@20	21.75	21.82	21.99	20.89	21.15	21.05	20.19	20.46	20.31
		36@39	21.82	21.96	22.00	20.99	21.04	21.14	20.47	20.45	20.50
		75@0	21.83	21.94	21.94	20.86	21.04	21.05	20.02	20.43	20.39
Band	Bandwidth (MHz)	RB	20050	20175	20300	20050	20175	20300	20050	20175	20300
			1720	1732.5	1745	1720	1732.5	1745	1720	1732.5	1745
4	20	1@0	22.70	22.82	22.90	21.73	21.95	22.75	21.12	21.99	20.82
		1@49	22.68	22.84	22.89	21.72	21.90	22.65	21.15	22.06	20.80
		1@99	22.65	22.85	23.10	21.84	21.91	22.62	21.23	22.17	21.99
		50@0	21.84	21.78	22.03	21.03	20.96	21.15	20.21	20.31	20.46
		50@24	21.91	21.90	21.99	21.08	21.08	21.07	20.31	20.42	20.45
		50@50	21.88	21.83	21.83	21.04	21.01	21.07	20.29	20.37	20.51
		100@0	21.77	21.87	21.98	20.96	20.94	21.16	20.21	20.41	20.32

5.2.3 LTE Band 5

Conducted Power(dBm)											
Modulation			QPSK			16QAM			64QAM		
Band	Bandwidth (MHz)	RB	20407	20525	20643	20407	20525	20643	20407	20525	20643
			824.7	836.5	848.3	824.7	836.5	848.3	824.7	836.5	848.3
5	1.4	1@0	24.50	24.60	24.54	23.48	23.66	23.32	22.99	22.82	22.55
		1@3	24.68	24.76	24.59	23.65	23.86	23.45	22.96	23.02	22.65
		1@5	24.52	24.63	24.41	23.51	23.74	23.28	22.77	22.87	22.46
		3@0	24.68	24.66	24.54	23.88	23.67	23.62	23.15	22.81	22.77
		3@1	24.68	24.72	24.56	23.81	23.97	23.80	23.06	23.12	22.96
		3@3	24.65	24.69	24.48	23.92	23.77	23.55	23.12	22.80	22.76
		6@0	23.93	23.80	23.57	23.02	22.89	22.53	22.22	22.08	21.73
Band	Bandwidth (MHz)	RB	20415	20525	20635	20415	20525	20635	20415	20525	20635
			825.5	836.5	847.5	825.5	836.5	847.5	825.5	836.5	847.5
5	3	1@0	24.54	24.48	24.78	24.02	23.60	23.66	23.37	22.82	22.83
		1@8	24.72	24.66	24.59	24.16	23.81	23.55	23.45	23.01	22.70
		1@14	24.46	24.67	24.43	23.92	23.84	23.39	23.17	23.03	22.54
		8@0	23.86	23.76	23.83	23.15	22.84	22.87	22.41	22.06	22.03
		8@4	23.84	23.85	23.78	23.03	22.90	22.76	22.34	22.25	22.00
		8@7	23.74	23.87	23.69	22.98	22.83	22.68	22.28	22.18	21.92
		15@0	23.83	23.83	23.77	22.98	22.76	22.78	22.28	22.11	22.00
Band	Bandwidth (MHz)	RB	20425	20525	20625	20425	20525	20625	20425	20525	20625
			826.5	836.5	846.5	826.5	836.5	846.5	826.5	836.5	846.5
5	5	1@0	24.32	24.24	24.86	23.23	23.47	23.78	22.69	22.82	23.07
		1@12	24.64	24.76	24.83	23.43	24.01	23.81	22.87	23.33	23.07
		1@24	23.93	24.53	24.19	22.68	23.69	23.16	22.23	23.00	22.44
		12@0	23.76	23.66	24.07	22.89	22.78	23.06	22.37	22.12	22.28
		12@7	23.69	23.89	23.96	22.89	23.13	23.08	22.36	22.12	22.29
		12@13	23.37	23.85	23.67	22.48	22.98	22.70	22.34	22.11	22.30
		25@0	23.59	23.78	23.87	22.78	22.88	22.96	22.21	22.18	22.18
Band	Bandwidth (MHz)	RB	20450	20525	20600	20450	20525	20600	20450	20525	20600
			829	836.5	844	829	836.5	844	829	836.5	844
5	10	1@0	25.19	24.36	25.46	24.10	23.83	24.55	23.89	22.59	23.63
		1@25	24.96	24.75	25.07	23.95	24.25	24.15	23.82	23.08	23.20
		1@49	25.22	24.78	24.67	24.29	24.27	23.74	24.16	23.10	22.81
		25@0	24.39	23.68	24.55	23.58	22.87	23.63	22.75	22.08	22.88
		25@12	24.23	23.91	24.29	23.45	23.09	23.39	22.58	22.35	22.64
		25@25	24.30	24.04	24.06	23.54	23.25	23.14	22.76	22.08	22.90
		50@0	24.44	23.89	24.32	23.53	23.06	23.40	22.73	22.28	22.63

5.2.4 LTE Band 7

Conducted Power(dBm)											
Modulation			QPSK			16QAM			64QAM		
Band	Bandwidth (MHz)	RB	20775	21100	21425	20775	21100	21425	20775	21100	21425
			2502.5	2535	2567.5	2502.5	2535	2567.5	2502.5	2535	2567.5
7	5	1@0	21.39	21.24	21.44	19.30	19.97	20.36	18.95	19.74	19.39
		1@12	21.36	21.20	21.43	19.57	20.08	20.37	19.17	19.59	20.02
		1@24	21.36	21.19	21.41	19.51	19.99	20.29	19.04	19.67	19.97
		12@0	20.26	20.39	20.56	20.63	20.70	20.35	20.18	20.33	19.79
		12@7	20.27	20.29	20.39	20.88	20.86	20.44	20.37	20.50	19.86
		12@13	20.39	20.29	20.25	20.67	20.55	20.07	20.14	20.20	19.47
		25@0	20.37	20.37	20.42	20.70	20.59	20.28	20.17	20.22	19.70
Band	Bandwidth (MHz)	RB	20800	21100	21400	20800	21100	21400	20800	21100	21400
			2505	2535	2565	2505	2535	2565	2505	2535	2565
7	10	1@0	21.12	21.42	21.31	20.94	20.48	19.77	20.48	20.06	19.32
		1@25	21.15	21.35	21.29	20.41	20.43	19.70	20.13	19.94	19.41
		1@49	21.12	21.36	21.30	20.32	20.45	19.67	20.00	20.03	19.27
		25@0	20.38	20.26	20.48	20.81	20.86	20.89	20.35	20.46	20.28
		25@12	20.35	20.35	20.36	20.93	20.83	20.84	20.39	20.44	20.24
		25@25	20.29	20.23	20.45	21.18	20.89	20.73	20.59	20.48	20.14
		50@0	20.21	20.20	20.34	20.96	20.86	20.76	20.40	20.45	20.19
Band	Bandwidth (MHz)	RB	20825	21100	21375	20825	21100	21375	20825	21100	21375
			2507.5	2535	2562.5	2507.5	2535	2562.5	2507.5	2535	2562.5
7	15	1@0	21.11	21.40	21.32	20.43	20.61	20.75	20.03	20.20	20.30
		1@37	21.13	21.31	21.33	20.39	20.63	20.71	20.09	20.14	20.40
		1@74	21.07	21.32	21.40	20.36	20.64	20.73	20.06	20.33	20.44
		36@0	20.24	20.31	20.46	20.84	21.03	20.90	20.42	20.63	20.31
		36@20	20.28	20.22	20.30	20.85	20.82	20.75	20.33	20.42	20.18
		36@39	20.17	20.30	20.38	21.11	20.74	20.66	20.54	20.32	20.06
		75@0	20.23	20.18	20.33	20.96	20.87	20.80	20.43	20.45	20.18
Band	Bandwidth (MHz)	RB	20850	21100	21350	20850	21100	21350	20850	21100	21350
			2510	2535	2560	2510	2535	2560	2510	2535	2560
7	20	1@0	21.24	21.27	21.46	21.29	19.98	20.77	20.89	19.72	20.36
		1@49	21.23	21.15	21.36	21.14	19.78	20.84	20.77	19.48	20.39
		1@99	21.29	21.26	21.28	21.13	19.81	20.74	20.81	19.64	20.34
		50@0	20.32	20.39	20.32	20.64	20.98	20.77	20.13	20.48	20.24
		50@24	20.21	20.27	20.37	20.81	20.86	20.84	20.21	20.39	20.35
		50@50	20.22	20.39	20.46	21.33	20.97	20.90	20.72	20.49	20.48
		100@0	20.26	20.38	20.39	20.98	20.98	20.83	20.40	20.52	20.35

5.2.6 LTE Band 12

Conducted Power(dBm)											
Modulation			QPSK			16QAM			64QAM		
Band	Bandwidth (MHz)	RB	23017	23095	23173	23017	23095	23173	23017	23095	23173
			699.7	707.5	715.3	699.7	707.5	715.3	699.7	707.5	715.3
12	1.4	1@0	24.13	24.52	23.55	22.83	23.54	22.37	22.45	22.86	21.72
		1@3	24.23	24.80	23.63	23.03	23.84	22.51	22.51	23.12	21.83
		1@5	24.05	24.55	23.57	22.86	23.66	22.43	22.28	22.89	21.79
		3@0	24.15	24.66	23.55	23.34	23.61	22.68	22.71	22.89	21.97
		3@1	24.19	24.74	23.62	23.29	23.97	22.88	22.63	23.24	22.17
		3@3	24.14	24.68	23.59	23.34	23.68	22.68	22.67	22.89	21.96
		6@0	23.20	23.72	22.62	22.24	22.68	21.60	21.59	22.05	20.95
Band	Bandwidth (MHz)	RB	23025	23095	23165	23025	23095	23165	23025	23095	23165
			700.5	707.5	714.5	700.5	707.5	714.5	700.5	707.5	714.5
12	3	1@0	24.19	24.44	23.96	23.65	23.46	22.81	23.01	22.74	22.09
		1@8	24.20	24.78	23.73	23.76	23.85	22.61	23.10	23.07	21.89
		1@14	24.10	24.53	23.66	23.54	23.63	22.53	22.88	22.83	21.86
		8@0	23.33	23.71	22.91	22.33	22.61	22.04	21.77	21.96	21.30
		8@4	23.32	23.84	22.82	22.33	22.87	21.95	21.78	22.19	21.21
		8@7	23.24	23.80	22.74	22.30	22.74	21.84	21.76	22.04	21.13
		15@0	23.27	23.77	22.83	22.23	22.65	21.96	21.69	21.98	21.23
Band	Bandwidth (MHz)	RB	23035	23095	23155	23035	23095	23155	23035	23095	23155
			701.5	707.5	713.5	701.5	707.5	713.5	701.5	707.5	713.5
12	5	1@0	23.90	23.91	23.82	22.61	23.06	22.72	22.01	22.37	22.02
		1@12	24.21	24.83	23.75	23.00	24.02	22.65	22.38	23.29	21.95
		1@24	23.73	24.13	23.05	22.52	23.36	21.92	21.90	22.58	21.26
		12@0	23.14	23.45	22.92	22.18	22.41	21.83	21.53	21.81	21.12
		12@7	23.22	23.79	22.78	22.35	22.90	21.79	21.53	21.81	21.13
		12@13	23.02	23.63	22.42	22.05	22.62	21.32	21.53	21.81	21.14
		25@0	23.09	23.57	22.68	22.19	22.51	21.67	21.54	21.87	20.96
Band	Bandwidth (MHz)	RB	23060	23095	23130	23060	23095	23130	23060	23095	23130
			704	707.5	711	704	707.5	711	704	707.5	711
12	10	1@0	24.00	23.64	24.39	22.71	23.19	23.39	22.75	22.00	22.52
		1@25	24.13	24.77	24.21	22.90	24.32	23.26	22.97	23.10	22.36
		1@49	25.04	24.35	23.63	23.90	23.93	22.65	23.78	22.74	21.80
		25@0	22.96	23.33	23.57	21.99	22.29	22.52	21.39	21.70	21.86
		25@12	23.15	23.75	23.35	22.22	22.72	22.33	21.58	22.10	21.68
		25@25	23.85	23.80	23.02	22.83	22.82	21.98	21.39	21.70	21.89
		50@0	23.45	23.60	23.31	22.39	22.56	22.26	21.78	21.94	21.58

5.2.7 LTE Band 17

Conducted Power(dBm)											
Modulation			QPSK			16QAM			64QAM		
Band	Bandwidth (MHz)	RB	23755	23790	23825	23755	23790	23825	23755	23790	23825
			706.5	710	713.5	706.5	710	713.5	706.5	710	713.5
17	5	1@0	23.74	24.32	23.84	22.59	23.44	22.74	22.11	23.00	22.27
		1@12	24.74	24.39	23.75	23.66	23.54	22.66	23.12	23.10	22.19
		1@24	24.39	23.56	23.05	23.20	22.70	21.94	22.63	22.30	21.48
		12@0	23.34	23.45	22.93	22.25	22.42	21.86	21.85	22.01	21.36
		12@7	23.77	23.39	22.77	22.74	22.49	21.82	21.83	22.01	21.37
		12@13	23.77	23.02	22.42	22.62	22.01	21.35	21.82	22.01	21.38
		25@0	23.58	23.25	22.69	22.40	22.21	21.70	22.11	21.80	21.19
Band	Bandwidth (MHz)	RB	23780	23790	23800	23780	23790	23800	23780	23790	23800
			709	710	711	709	710	711	709	710	711
17	10	1@0	23.96	24.10	24.37	23.37	23.12	23.27	23.04	22.62	22.75
		1@25	24.61	24.34	24.20	24.11	23.43	23.06	23.64	22.90	22.59
		1@49	24.02	23.69	23.60	23.46	22.77	22.45	23.04	22.27	22.02
		25@0	23.53	23.60	23.58	22.42	22.57	22.51	22.00	22.04	22.09
		25@12	23.65	23.53	23.35	22.56	22.50	22.31	22.12	22.01	21.90
		25@25	23.42	23.21	23.00	22.38	22.10	21.95	22.01	22.05	22.11
		50@0	23.47	23.43	23.31	22.38	22.29	22.21	21.97	21.88	21.81

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1

5.2.8 LTE Band 66

Conducted Power(dBm)											
Modulation			QPSK			16QAM			64QAM		
Band	Bandwidth (MHz)	RB	131979	132322	132665	131979	132322	132665	131979	132322	132665
			1710.7	1745	1779.3	1710.7	1745	1779.3	1710.7	1745	1779.3
66	1.4	1@0	22.67	22.73	22.79	22.87	22.51	21.55	21.58	21.83	21.10
		1@3	22.67	22.77	22.76	22.86	22.52	21.51	21.59	21.88	21.02
		1@5	22.68	22.76	22.72	22.86	22.58	21.69	21.53	21.84	21.20
		3@0	22.76	23.05	22.86	22.07	21.76	21.86	20.92	20.90	21.20
		3@1	22.88	22.86	22.81	22.14	21.80	21.95	21.23	20.86	21.22
		3@3	22.87	22.90	22.76	21.67	21.73	21.82	21.25	20.96	21.13
		6@0	21.88	21.84	21.81	20.95	21.28	21.06	20.49	20.48	20.37
Band	Bandwidth (MHz)	RB	131987	132322	132657	131987	132322	132657	131987	132322	132657
			1711.5	1745	1778.5	1711.5	1745	1778.5	1711.5	1745	1778.5
66	3	1@0	22.69	22.67	22.81	22.89	22.97	22.19	21.36	21.45	20.43
		1@8	22.70	22.78	22.86	22.75	22.64	21.96	21.39	21.24	20.38
		1@14	22.76	22.74	22.76	22.86	22.97	22.14	21.28	21.46	20.41
		8@0	21.79	21.92	21.86	21.20	21.23	21.33	20.44	20.41	20.57
		8@4	21.83	21.88	21.81	20.93	21.35	21.04	20.03	20.41	20.31
		8@7	21.82	21.87	21.83	21.36	21.20	21.20	20.41	20.45	20.58
		15@0	21.81	21.83	21.93	20.96	21.17	21.04	20.18	20.31	20.28
Band	Bandwidth (MHz)	RB	131997	132322	132647	131997	132322	132647	131997	132322	132647
			1712.5	1745	1777.5	1712.5	1745	1777.5	1712.5	1745	1777.5
66	5	1@0	22.90	22.82	22.86	20.93	22.02	21.58	20.39	21.05	21.17
		1@12	22.96	23.10	22.89	21.03	21.94	21.96	20.31	21.09	21.08
		1@24	22.81	22.85	22.77	20.86	22.13	21.47	20.26	21.25	21.13
		12@0	21.84	21.86	21.96	20.97	21.01	21.03	20.10	20.24	20.28
		12@7	21.73	21.95	21.93	21.04	21.07	21.02	20.06	20.25	20.26
		12@13	21.86	22.00	21.87	20.99	21.08	20.93	20.17	20.31	20.27
		25@0	21.83	21.94	21.94	21.04	21.07	21.19	20.30	20.19	20.38
Band	Bandwidth (MHz)	RB	132022	132322	132622	132022	132322	132622	132022	132322	132622
			1715	1745	1775	1715	1745	1775	1715	1745	1775
66	10	1@0	22.75	22.93	22.87	22.18	22.80	21.78	21.33	22.08	20.43
		1@25	22.60	22.91	22.80	22.12	22.84	21.81	21.56	21.66	21.05
		1@49	22.76	22.84	22.80	22.16	22.90	21.71	21.31	22.11	21.03
		25@0	21.88	22.01	21.91	21.04	21.14	21.23	20.17	20.36	20.50
		25@12	21.81	21.94	21.96	20.97	21.11	21.32	20.22	20.36	20.53
		25@25	21.75	22.07	21.91	21.02	21.20	21.25	20.26	20.52	20.49
		50@0	21.83	21.92	21.98	20.98	21.21	21.08	20.15	20.43	20.32
Band	Bandwidth (MHz)	RB	132047	132322	132597	132047	132322	132597	132047	132322	132597
			1717.5	1745	1772.5	1717.5	1745	1772.5	1717.5	1745	1772.5
66	15	1@0	22.74	22.91	22.49	22.53	22.90	21.93	21.63	22.10	21.10
		1@37	22.73	22.89	22.41	22.52	22.84	21.80	21.38	22.71	21.48
		1@74	22.81	22.89	22.37	22.55	22.78	21.71	21.66	22.10	20.99
		36@0	21.78	21.98	22.02	20.99	20.98	21.15	20.28	20.42	20.31
		36@20	21.95	22.00	21.86	20.94	21.21	21.11	20.15	20.51	20.31
		36@39	21.85	21.87	21.95	20.93	21.01	21.03	20.30	20.44	20.31
		75@0	21.81	21.90	21.88	21.04	21.08	21.13	20.22	20.36	20.41
Band	Bandwidth (MHz)	RB	132072	132322	132572	132072	132322	132572	132072	132322	132572
			1720	1745	1770	1720	1745	1770	1720	1745	1770
66	20	1@0	22.76	22.90	22.88	21.80	21.92	22.82	21.96	20.72	21.22
		1@49	22.64	22.90	22.80	21.88	21.88	22.85	21.99	20.73	21.19
		1@99	22.76	23.17	22.73	21.83	22.32	22.72	21.95	21.86	21.10
		50@0	21.83	22.01	22.02	21.11	21.12	21.12	20.01	20.32	20.19
		50@24	21.85	21.96	21.86	21.08	21.09	21.01	20.01	20.30	20.35
		50@50	21.96	21.88	21.87	21.06	21.13	21.07	20.16	20.36	20.26
		100@0	21.93	22.03	21.98	21.08	21.02	21.08	20.23	20.30	20.26

5.3 ERP OR EIRP

Test Requirement: FCC 47 CFR Part 2.1046(a)
LTE Band 2: FCC 47 CFR Part 24.232(c)
LTE Band 4 & LTE Band 66: FCC 47 CFR Part 27.50(d)(4)
LTE Band 5: FCC 47 CFR Part 22.913(a)
LTE Band 7: FCC 47 CFR Part 27.50(h)(2)
LTE Band 12 & Band 17: FCC 47 CFR Part 27.50(c)(10)

Test Method: KDB 971168 D01v03r01 Section 5.6 & ANSI C63.26-2015

Limit:

FCC 47 CFR Part 22.913(a):

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

FCC 47 CFR Part 24.232(c):

Mobile and portable stations are limited to 2 watts EIRP.

FCC 47 CFR Part 27.50(d)(4):

Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

FCC 47 CFR Part 27.50(c)(10):

Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

FCC 47 CFR Part 27.50(h)(2):

Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

Test Procedure:

According to KDB 412172 D01 Power Approach,

- **ERP or EIRP = $P_T + G_T - L_C$**
- **ERP = EIRP - 2.15**

where

- **P_T** = transmitter output power, expressed in dBW, dBm, or PSD;
- **G_T** = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);
- **L_C** = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

Test Setup: Refer to section 4.2.1 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode

Test Results: Pass

Test Data: See table below

Note: The maximum ERP/EIRP is calculated from max output power and antenna gain, the antenna gain provided by the customer, and the customer takes all the responsibilities for the accuracy of antenna gain.

5.3.1 LTE Band 2

Channel	Maximum EIRP (dBm)				Maximum EIRP (W)				Result
	QPSK	16QAM	64QAM	Limit (dBm)	QPSK	16QAM	64QAM	Limit (W)	
Channel Bandwidth: 1.4MHz									
Lowest	21.56	20.76	19.88	33.01	0.1432	0.1191	0.0973	2	Pass
Middle	21.38	21.02	20.24	33.01	0.1374	0.1265	0.1057	2	Pass
Highest	21.31	20.56	19.73	33.01	0.1352	0.1138	0.0940	2	Pass
Channel Bandwidth: 3MHz									
Lowest	21.44	21.22	20.26	33.01	0.1393	0.1324	0.1062	2	Pass
Middle	21.30	20.78	19.89	33.01	0.1349	0.1197	0.0975	2	Pass
Highest	21.21	20.35	19.56	33.01	0.1321	0.1084	0.0904	2	Pass
Channel Bandwidth: 5MHz									
Lowest	21.59	20.54	19.59	33.01	0.1442	0.1132	0.0910	2	Pass
Middle	21.47	21.20	20.30	33.01	0.1403	0.1318	0.1072	2	Pass
Highest	21.36	20.50	19.73	33.01	0.1368	0.1122	0.0940	2	Pass
Channel Bandwidth: 10MHz									
Lowest	21.46	21.48	20.76	33.01	0.1400	0.1406	0.1191	2	Pass
Middle	21.49	21.21	20.29	33.01	0.1409	0.1321	0.1069	2	Pass
Highest	21.30	21.09	20.33	33.01	0.1349	0.1285	0.1079	2	Pass
Channel Bandwidth: 15MHz									
Lowest	21.45	21.21	20.47	33.01	0.1396	0.1321	0.1114	2	Pass
Middle	21.38	20.92	20.10	33.01	0.1374	0.1236	0.1023	2	Pass
Highest	21.41	21.35	20.35	33.01	0.1384	0.1365	0.1084	2	Pass
Channel Bandwidth: 20MHz									
Lowest	21.67	21.27	20.89	33.01	0.1469	0.1340	0.1227	2	Pass
Middle	21.34	21.41	21.08	33.01	0.1361	0.1384	0.1282	2	Pass
Highest	21.30	21.36	20.45	33.01	0.1349	0.1368	0.1109	2	Pass

5.3.2 LTE Band 4

Channel	Maximum EIRP (dBm)				Maximum EIRP (W)				Result
	QPSK	16QAM	64QAM	Limit (dBm)	QPSK	16QAM	64QAM	Limit (W)	
Channel Bandwidth: 1.4MHz									
Lowest	23.51	23.49	22.32	30.00	0.2244	0.2234	0.1706	1	Pass
Middle	23.58	23.17	22.72	30.00	0.2280	0.2075	0.1871	1	Pass
Highest	23.53	22.63	21.97	30.00	0.2254	0.1832	0.1574	1	Pass
Channel Bandwidth: 3MHz									
Lowest	23.33	23.57	22.37	30.00	0.2153	0.2275	0.1726	1	Pass
Middle	23.63	23.76	22.01	30.00	0.2307	0.2377	0.1589	1	Pass
Highest	23.60	23.04	21.53	30.00	0.2291	0.2014	0.1422	1	Pass
Channel Bandwidth: 5MHz									
Lowest	23.47	21.70	21.03	30.00	0.2223	0.1479	0.1268	1	Pass
Middle	23.73	22.53	21.83	30.00	0.2360	0.1791	0.1524	1	Pass
Highest	23.54	22.55	21.94	30.00	0.2259	0.1799	0.1563	1	Pass
Channel Bandwidth: 10MHz									
Lowest	23.36	22.82	22.30	30.00	0.2168	0.1914	0.1698	1	Pass
Middle	23.52	23.45	22.75	30.00	0.2249	0.2213	0.1884	1	Pass
Highest	23.56	22.35	21.65	30.00	0.2270	0.1718	0.1462	1	Pass
Channel Bandwidth: 15MHz									
Lowest	23.39	23.03	22.43	30.00	0.2183	0.2009	0.1750	1	Pass
Middle	23.48	23.48	22.77	30.00	0.2228	0.2228	0.1892	1	Pass
Highest	23.37	22.69	22.30	30.00	0.2173	0.1858	0.1698	1	Pass
Channel Bandwidth: 20MHz									
Lowest	23.31	22.45	21.84	30.00	0.2143	0.1758	0.1528	1	Pass
Middle	23.46	22.56	22.78	30.00	0.2218	0.1803	0.1897	1	Pass
Highest	23.71	23.36	22.60	30.00	0.2350	0.2168	0.1820	1	Pass

5.3.3 LTE Band 5

Channel	Maximum ERP (dBm)				Maximum ERP (W)				Result
	QPSK	16QAM	64QAM	Limit (dBm)	QPSK	16QAM	64QAM	Limit (W)	
Channel Bandwidth: 1.4MHz									
Lowest	21.55	20.79	20.02	38.45	0.1429	0.1199	0.1005	7	Pass
Middle	21.63	20.84	19.99	38.45	0.1455	0.1213	0.0998	7	Pass
Highest	21.46	20.67	19.83	38.45	0.1400	0.1167	0.0962	7	Pass
Channel Bandwidth: 3MHz									
Lowest	21.59	21.03	20.32	38.45	0.1442	0.1268	0.1076	7	Pass
Middle	21.54	20.71	19.90	38.45	0.1426	0.1178	0.0977	7	Pass
Highest	21.65	20.53	19.70	38.45	0.1462	0.1130	0.0933	7	Pass
Channel Bandwidth: 5MHz									
Lowest	21.51	20.30	19.74	38.45	0.1416	0.1072	0.0942	7	Pass
Middle	21.63	20.88	20.20	38.45	0.1455	0.1225	0.1047	7	Pass
Highest	21.73	20.68	19.94	38.45	0.1489	0.1169	0.0986	7	Pass
Channel Bandwidth: 10MHz									
Lowest	22.09	21.16	21.03	38.45	0.1618	0.1306	0.1268	7	Pass
Middle	21.65	21.14	19.97	38.45	0.1462	0.1300	0.0993	7	Pass
Highest	22.33	21.42	20.50	38.45	0.1710	0.1387	0.1122	7	Pass

5.3.1 LTE Band 7

Channel	Maximum EIRP (dBm)				Maximum EIRP (W)				Result
	QPSK	16QAM	64QAM	Limit (dBm)	QPSK	16QAM	64QAM	Limit (W)	
Channel Bandwidth: 5MHz									
Lowest	22.06	21.55	21.04	33.01	0.1607	0.1429	0.1271	2	Pass
Middle	21.91	21.53	21.17	33.01	0.1552	0.1422	0.1309	2	Pass
Highest	22.11	21.11	20.69	33.01	0.1626	0.1291	0.1172	2	Pass
Channel Bandwidth: 10MHz									
Lowest	21.82	21.85	21.26	33.01	0.1521	0.1531	0.1337	2	Pass
Middle	22.09	21.56	21.15	33.01	0.1618	0.1432	0.1303	2	Pass
Highest	21.98	21.56	20.95	33.01	0.1578	0.1432	0.1245	2	Pass
Channel Bandwidth: 15MHz									
Lowest	21.80	21.78	21.21	33.01	0.1514	0.1507	0.1321	2	Pass
Middle	22.07	21.70	21.30	33.01	0.1611	0.1479	0.1349	2	Pass
Highest	22.07	21.57	21.11	33.01	0.1611	0.1435	0.1291	2	Pass
Channel Bandwidth: 20MHz									
Lowest	21.96	22.00	21.56	33.01	0.1570	0.1585	0.1432	2	Pass
Middle	21.94	21.65	21.19	33.01	0.1563	0.1462	0.1315	2	Pass
Highest	22.13	21.57	21.15	33.01	0.1633	0.1435	0.1303	2	Pass

5.3.2 LTE Band 12

Channel	Maximum ERP (dBm)				Maximum ERP (W)				Result
	QPSK	16QAM	64QAM	Limit (dBm)	QPSK	16QAM	64QAM	Limit (W)	
Channel Bandwidth: 1.4MHz									
Lowest	21.01	20.12	19.49	34.77	0.1262	0.1028	0.0889	3	Pass
Middle	21.58	20.75	20.02	34.77	0.1439	0.1189	0.1005	3	Pass
Highest	20.41	19.66	18.95	34.77	0.1099	0.0925	0.0785	3	Pass
Channel Bandwidth: 3MHz									
Lowest	20.98	20.54	19.88	34.77	0.1253	0.1132	0.0973	3	Pass
Middle	21.56	20.63	19.85	34.77	0.1432	0.1156	0.0966	3	Pass
Highest	20.74	19.59	18.87	34.77	0.1186	0.0910	0.0771	3	Pass
Channel Bandwidth: 5MHz									
Lowest	20.99	19.78	19.16	34.77	0.1256	0.0951	0.0824	3	Pass
Middle	21.61	20.80	20.07	34.77	0.1449	0.1202	0.1016	3	Pass
Highest	20.60	19.50	18.80	34.77	0.1148	0.0891	0.0759	3	Pass
Channel Bandwidth: 10MHz									
Lowest	21.82	20.68	20.56	34.77	0.1521	0.1169	0.1138	3	Pass
Middle	21.55	21.10	19.88	34.77	0.1429	0.1288	0.0973	3	Pass
Highest	21.17	20.17	19.30	34.77	0.1309	0.1040	0.0851	3	Pass

5.3.3 LTE Band 17

Channel	Maximum ERP (dBm)				Maximum ERP (W)				Result
	QPSK	16QAM	64QAM	Limit (dBm)	QPSK	16QAM	64QAM	Limit (W)	
Channel Bandwidth: 5MHz									
Lowest	21.52	20.44	19.90	34.77	0.1419	0.1107	0.0977	3	Pass
Middle	21.17	20.32	19.88	34.77	0.1309	0.1076	0.0973	3	Pass
Highest	20.62	19.52	19.05	34.77	0.1153	0.0895	0.0804	3	Pass
Channel Bandwidth: 10MHz									
Lowest	21.39	20.89	20.42	34.77	0.1377	0.1227	0.1102	3	Pass
Middle	21.12	20.21	19.68	34.77	0.1294	0.1050	0.0929	3	Pass
Highest	21.15	20.05	19.53	34.77	0.1303	0.1012	0.0897	3	Pass

5.3.4 LTE Band 66

Channel	Maximum EIRP (dBm)				Maximum EIRP (W)				Result
	QPSK	16QAM	64QAM	Limit (dBm)	QPSK	16QAM	64QAM	Limit (W)	
Channel Bandwidth: 1.4MHz									
Lowest	23.49	23.48	22.20	30.00	0.2234	0.2228	0.1660	1	Pass
Middle	23.66	23.19	22.49	30.00	0.2323	0.2084	0.1774	1	Pass
Highest	23.47	22.56	21.83	30.00	0.2223	0.1803	0.1524	1	Pass
Channel Bandwidth: 3MHz									
Lowest	23.37	23.50	22.00	30.00	0.2173	0.2239	0.1585	1	Pass
Middle	23.39	23.58	22.07	30.00	0.2183	0.2280	0.1611	1	Pass
Highest	23.47	22.80	21.19	30.00	0.2223	0.1905	0.1315	1	Pass
Channel Bandwidth: 5MHz									
Lowest	23.57	21.65	21.00	30.00	0.2275	0.1462	0.1259	1	Pass
Middle	23.71	22.74	21.86	30.00	0.2350	0.1879	0.1535	1	Pass
Highest	23.50	22.57	21.78	30.00	0.2239	0.1807	0.1507	1	Pass
Channel Bandwidth: 10MHz									
Lowest	23.37	22.79	22.17	30.00	0.2173	0.1901	0.1648	1	Pass
Middle	23.54	23.51	22.72	30.00	0.2259	0.2244	0.1871	1	Pass
Highest	23.48	22.42	21.66	30.00	0.2228	0.1746	0.1466	1	Pass
Channel Bandwidth: 15MHz									
Lowest	23.42	23.16	22.27	30.00	0.2198	0.2070	0.1687	1	Pass
Middle	23.52	23.51	22.71	30.00	0.2249	0.2244	0.1866	1	Pass
Highest	23.10	22.54	22.09	30.00	0.2042	0.1795	0.1618	1	Pass
Channel Bandwidth: 20MHz									
Lowest	23.37	22.49	22.60	30.00	0.2173	0.1774	0.1820	1	Pass
Middle	23.78	22.93	22.47	30.00	0.2388	0.1963	0.1766	1	Pass
Highest	23.49	23.46	21.83	30.00	0.2234	0.2218	0.1524	1	Pass

5.4 PEAK-TO-AVERAGE RATIO

Test Requirement:	LTE Band 2: FCC 47 CFR Part 24.232(d)
	LTE Band 4 & LTE Band 66: FCC 47 CFR Part 27.50(d)(5)
	LTE Band 5: FCC 47 CFR Part 22.913(a)
	LTE Band 7: FCC 47 CFR Part 27.50(d)(5)
	LTE Band 12 & Band 17: FCC 47 CFR Part 27.50(d)(5)
Test Method:	KDB 971168 D01v03r01 Section 5.7
Limit:	In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB
Test Procedure:	The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. a) Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth b) Set the number of counts to a value that stabilizes the measured CCDF curve c) Record the maximum PAPR level associated with a probability of 0.1 %
Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.	
Test Setup:	Refer to section 4.2.2 for details.
Instruments Used:	Refer to section 3 for details
Test Mode:	Link mode
Test Results:	Pass
Test Data:	Please refer to Appendix A

5.5 99%&26DB BANDWIDTH

Test Requirement: FCC 47 CFR Part 2.1049(h)

Test Method: ANSI C63.26-2015 & KDB 971168 D01v03r01 Section 4

Limit: No Limit, for reporting purposes only.

Test Procedure:

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The 99% and -26dB bandwidths was also measured and recorded.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.2.2 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode

Test Results: Pass

Test Data: Please refer to Appendix A

5.6 BAND EDGE AT ANTENNA TERMINALS

Test Requirement: LTE Band 2: FCC 47 CFR Part 24.238(a)
LTE Band 4 & LTE Band 66: FCC 47 CFR Part 27.53(h)(1)
LTE Band 5: FCC 47 CFR Part 22.917(a)
LTE Band 7: FCC 47 CFR Part 27.53(m)(4)
LTE Band 12 & Band 17: FCC 47 CFR Part 27.53(g)

Test Method: ANSI C63.26-2015 & KDB 971168 D01v03r01

Limit:

FCC 47 CFR Part 24.238(a), 27.53(h)(1), 22.917(a):

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13 dBm.

FCC 47 CFR Part 27.53(g):

For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

FCC 47 CFR Part 27.53(m)(4):

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Test Procedure:

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer.

For each band edge measurement:

- 1) Set the spectrum analyzer span to include the block edge frequency.
- 2) Set a marker to point the corresponding band edge frequency in each test case.
- 3) Set display line at -13 dBm
- 4) Set resolution bandwidth to at least 1% of emission bandwidth.
- 5) Set spectrum analyzer with RMS detector.
- 6) Record the max trace plot into the test report

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.2.2 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode

Test Results: Pass

Test Data: Please refer to Appendix A

5.7 SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Test Requirement: LTE Band 2: FCC 47 CFR Part 24.238(a)
LTE Band 4 & LTE Band 66: FCC 47 CFR Part 27.53(h)
LTE Band 5: FCC 47 CFR Part 22.917(a)
LTE Band 7: FCC 47 CFR Part 27.53(m)(4)
LTE Band 12 & Band 17: FCC 47 CFR Part 27.53(g)

Test Method: ANSI C63.26-2015 & KDB 971168 D01v03r01

Limit:

FCC 47 CFR Part 24.238(a), 27.53(h)(1), 22.917(a), 27.53(g):

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13 dBm.

FCC 47 CFR Part 27.53(m)(4):

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $55 + 10 \log(P)$ dB. The emission limit equal to -25 dBm.

Test Procedure:

The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range. b. Measuring frequency range is from 30 MHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower. Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.2.2 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode

Test Results: Pass

Test Data: Please refer to Appendix A

5.8 FIELD STRENGTH OF SPURIOUS RADIATION

Test Requirement: LTE Band 2: FCC 47 CFR Part 24.238(a)
LTE Band 4 & LTE Band 66: FCC 47 CFR Part 27.53(h)
LTE Band 5: FCC 47 CFR Part 22.917(a)
LTE Band 7: FCC 47 CFR Part 27.53(m)(4)
LTE Band 12 & Band 17: FCC 47 CFR Part 27.53(g)

Test Method: ANSI C63.26-2015 & KDB 971168 D01v03r01

Receiver Setup:

Frequency	Detector	RBW	VBW	Remark
0.009 MHz-30 MHz	Peak	10 kHz	30 KHz	Peak
30 MHz-1 GHz	Quasi-peak	100 kHz	300 KHz	Peak
Above 1 GHz	Peak	1 MHz	3 MHz	Peak

Limits:

FCC 47 CFR Part 24.238(a), 27.53(h)(1), 22.917(a), 27.53(g):

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13 dBm.

FCC 47 CFR Part 27.53(m)(4):

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $55 + 10 \log(P)$ dB. The emission limit equal to -25 dBm.

Test Setup: Refer to section 4.2.1 for details.

Test Procedures: KDB 971168 D01v03r01 Section 7

Equipment Used: Refer to section 3 for details.

Test Result: Pass

The worst measurement data as follows:

5.8.1 LTE Band 2

LTE Band 2_ 20 MHz_ QPSK							
No.	Frequency (MHz)	SA Reading (dBm)	Correction factor (dB/m)	EIRP Result (dBm)	Limit (dBm)	Margin (dB)	Ant. Pol.
Lowest Channel							
1	765.648	-81.56	11.74	-69.82	-13.00	-56.82	Horizontal
2	798.620	-81.18	12.02	-69.16	-13.00	-56.16	Horizontal
3	925.613	-81.86	14.06	-67.80	-13.00	-54.80	Horizontal
4	3720.000	-62.51	8.24	-54.27	-13.00	-41.27	Horizontal
5	5580.000	-65.80	11.96	-53.84	-13.00	-40.84	Horizontal
6	771.047	-81.18	11.72	-69.46	-13.00	-56.46	Vertical
7	804.252	-81.19	12.19	-69.00	-13.00	-56.00	Vertical
8	899.958	-81.73	13.88	-67.85	-13.00	-54.85	Vertical
9	3720.000	-64.43	8.24	-56.19	-13.00	-43.19	Vertical
10	5580.000	-63.59	11.96	-51.63	-13.00	-38.63	Vertical
Middle Channel							
1	684.226	-80.64	10.62	-70.02	-13.00	-57.02	Horizontal
2	881.184	-81.17	13.59	-67.58	-13.00	-54.58	Horizontal
3	992.997	-82.47	14.78	-67.69	-13.00	-54.69	Horizontal
4	3760.000	-64.65	8.32	-56.33	-13.00	-43.33	Horizontal
5	5640.000	-65.60	11.94	-53.66	-13.00	-40.66	Horizontal
6	821.387	-80.56	12.31	-68.25	-13.00	-55.25	Vertical
7	881.184	-81.32	13.59	-67.73	-13.00	-54.73	Vertical
8	992.997	-81.45	14.78	-66.67	-13.00	-53.67	Vertical
9	3760.000	-64.63	8.32	-56.31	-13.00	-43.31	Vertical
10	5640.000	-65.94	11.94	-54.00	-13.00	-41.00	Vertical
Highest Channel							
1	718.725	-81.66	11.33	-70.33	-13.00	-57.33	Horizontal
2	809.924	-81.80	12.23	-69.57	-13.00	-56.57	Horizontal
3	912.695	-79.99	13.97	-66.02	-13.00	-53.02	Horizontal
4	3800.000	-64.53	8.41	-56.12	-13.00	-43.12	Horizontal
5	5700.000	-66.66	11.93	-54.73	-13.00	-41.73	Horizontal
6	815.635	-81.29	12.17	-69.12	-13.00	-56.12	Vertical
7	919.132	-81.99	14.01	-67.98	-13.00	-54.98	Vertical
8	992.997	-82.22	14.78	-67.44	-13.00	-54.44	Vertical
9	3800.000	-64.51	8.41	-56.10	-13.00	-43.10	Vertical
10	5700.000	-66.51	11.93	-54.58	-13.00	-41.58	Vertical

5.8.2 LTE Band 4

LTE Band 4_ 20 MHz_ QPSK							
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
Lowest Channel							
1	739.214	-80.14	11.59	-68.55	-13.00	-55.55	Horizontal
2	912.695	-79.99	13.97	-66.02	-13.00	-53.02	Horizontal
3	992.997	-80.94	14.78	-66.16	-13.00	-53.16	Horizontal
4	3440.000	-66.59	7.29	-59.30	-13.00	-46.30	Horizontal
5	5160.000	-65.27	10.75	-54.52	-13.00	-41.52	Horizontal
6	798.620	-80.52	12.02	-68.50	-13.00	-55.50	Vertical
7	862.802	-80.60	13.09	-67.51	-13.00	-54.51	Vertical
8	986.044	-82.05	14.63	-67.42	-13.00	-54.42	Vertical
9	3440.000	-65.31	7.29	-58.02	-13.00	-45.02	Vertical
10	5160.000	-65.77	10.75	-55.02	-13.00	-42.02	Vertical
Middle Channel							
1	833.013	-81.63	12.55	-69.08	-13.00	-56.08	Horizontal
2	906.304	-81.64	13.93	-67.71	-13.00	-54.71	Horizontal
3	986.044	-82.65	14.63	-68.02	-13.00	-55.02	Horizontal
4	3465.000	-65.00	7.43	-57.57	-13.00	-44.57	Horizontal
5	5197.500	-66.18	10.83	-55.35	-13.00	-42.35	Horizontal
6	744.427	-80.80	11.48	-69.32	-13.00	-56.32	Vertical
7	906.304	-82.46	13.93	-68.53	-13.00	-55.53	Vertical
8	979.139	-82.46	14.44	-68.02	-13.00	-55.02	Vertical
9	3465.000	-63.69	7.43	-56.26	-13.00	-43.26	Vertical
10	5197.500	-64.24	10.83	-53.41	-13.00	-40.41	Vertical
Highest Channel							
1	350.972	-78.93	4.51	-74.42	-13.00	-61.42	Horizontal
2	765.648	-81.40	11.74	-69.66	-13.00	-56.66	Horizontal
3	850.760	-81.60	12.97	-68.63	-13.00	-55.63	Horizontal
4	3490.000	-65.68	7.59	-58.09	-13.00	-45.09	Horizontal
5	5235.000	-65.70	10.97	-54.73	-13.00	-41.73	Horizontal
6	693.910	-80.91	10.95	-69.96	-13.00	-56.96	Vertical
7	856.760	-81.40	13.12	-68.28	-13.00	-55.28	Vertical
8	992.997	-80.96	14.78	-66.18	-13.00	-53.18	Vertical
9	3490.000	-63.61	7.59	-56.02	-13.00	-43.02	Vertical
10	5235.000	-65.19	10.97	-54.22	-13.00	-41.22	Vertical

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1

5.8.3 LTE Band 5

LTE Band 5_ 10 MHz_ QPSK							
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
Lowest Channel							
1	646.822	-89.13	39.37	-49.76	-13.00	-36.76	Horizontal
2	744.427	-87.87	40.77	-47.10	-13.00	-34.10	Horizontal
3	906.304	-87.04	42.80	-44.24	-13.00	-31.24	Horizontal
4	1658.000	-67.35	-0.32	-67.67	-13.00	-54.67	Horizontal
5	2487.000	-65.81	3.85	-61.96	-13.00	-48.96	Horizontal
6	520.208	-88.23	36.39	-51.84	-13.00	-38.84	Vertical
7	615.774	-88.95	38.58	-50.37	-13.00	-37.37	Vertical
8	919.132	-87.14	42.85	-44.29	-13.00	-31.29	Vertical
9	1658.000	-66.61	-0.32	-66.93	-13.00	-53.93	Vertical
10	2487.000	-67.25	3.85	-63.40	-13.00	-50.40	Vertical
Middle Channel							
1	660.602	-87.61	39.56	-48.05	-13.00	-35.05	Horizontal
2	684.226	-87.96	40.01	-47.95	-13.00	-34.95	Horizontal
3	965.474	-87.29	43.05	-44.24	-13.00	-31.24	Horizontal
4	1673.000	-64.77	-0.19	-64.96	-13.00	-51.96	Horizontal
5	2509.500	-66.38	3.90	-62.48	-13.00	-49.48	Horizontal
6	624.490	-88.09	38.76	-49.33	-13.00	-36.33	Vertical
7	665.261	-88.15	39.81	-48.34	-13.00	-35.34	Vertical
8	965.474	-86.38	43.05	-43.33	-13.00	-30.33	Vertical
9	1673.000	-66.92	-0.19	-67.11	-13.00	-54.11	Vertical
10	2509.500	-67.07	3.90	-63.17	-13.00	-50.17	Vertical
Highest Channel							
1	633.328	-88.34	38.92	-49.42	-13.00	-36.42	Horizontal
2	734.037	-87.49	40.67	-46.82	-13.00	-33.82	Horizontal
3	906.304	-86.82	42.80	-44.02	-13.00	-31.02	Horizontal
4	1688.000	-65.58	-0.05	-65.63	-13.00	-52.63	Horizontal
5	2532.000	-66.28	3.93	-62.35	-13.00	-49.35	Horizontal
6	718.725	-88.62	40.67	-47.95	-13.00	-34.95	Vertical
7	827.179	-86.71	41.56	-45.15	-13.00	-32.15	Vertical
8	938.714	-87.17	42.94	-44.23	-13.00	-31.23	Vertical
9	1688.000	-67.41	-0.05	-67.46	-13.00	-54.46	Vertical
10	2532.000	-66.28	3.93	-62.35	-13.00	-49.35	Vertical

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1

5.8.1 LTE Band 7

LTE Band 7_ 20 MHz_ QPSK							
No.	Frequency (MHz)	SA Reading (dBm)	Correction factor (dB/m)	EIRP Result (dBm)	Limit (dBm)	Margin (dB)	Ant. Pol.
Lowest Channel							
1	771.047	-80.48	11.72	-68.76	-25.00	-43.76	Horizontal
2	815.635	-80.17	12.17	-68.00	-25.00	-43.00	Horizontal
3	938.714	-80.13	14.16	-65.97	-25.00	-40.97	Horizontal
4	5020.000	-66.36	10.45	-55.91	-25.00	-30.91	Horizontal
5	7530.000	-66.06	13.17	-52.89	-25.00	-27.89	Horizontal
6	754.963	-81.00	11.30	-69.70	-25.00	-44.70	Vertical
7	893.656	-82.42	13.85	-68.57	-25.00	-43.57	Vertical
8	1000.000	-83.09	14.99	-68.10	-25.00	-43.10	Vertical
9	5020.000	-67.41	10.45	-56.96	-25.00	-31.96	Vertical
10	7530.000	-66.58	13.17	-53.41	-25.00	-28.41	Vertical
Middle Channel							
1	713.692	-81.06	11.19	-69.87	-25.00	-44.87	Horizontal
2	798.620	-81.25	12.02	-69.23	-25.00	-44.23	Horizontal
3	899.958	-81.78	13.88	-67.90	-25.00	-42.90	Horizontal
4	5070.000	-66.43	10.56	-55.87	-25.00	-30.87	Horizontal
5	7605.000	-68.90	13.51	-55.39	-25.00	-30.39	Horizontal
6	875.013	-82.09	13.46	-68.63	-25.00	-43.63	Vertical
7	958.714	-81.79	14.29	-67.50	-25.00	-42.50	Vertical
8	992.997	-82.17	14.78	-67.39	-25.00	-42.39	Vertical
9	5070.000	-64.94	10.56	-54.38	-25.00	-29.38	Vertical
10	7605.000	-65.11	13.51	-51.60	-25.00	-26.60	Vertical
Highest Channel							
1	793.028	-81.34	11.82	-69.52	-25.00	-44.52	Horizontal
2	875.013	-82.06	13.46	-68.60	-25.00	-43.60	Horizontal
3	945.334	-82.17	14.20	-67.97	-25.00	-42.97	Horizontal
4	5120.000	-65.50	10.66	-54.84	-25.00	-29.84	Horizontal
5	7680.000	-67.92	13.84	-54.08	-25.00	-29.08	Horizontal
6	708.694	-80.67	11.05	-69.62	-25.00	-44.62	Vertical
7	868.886	-81.87	13.20	-68.67	-25.00	-43.67	Vertical
8	992.997	-82.45	14.78	-67.67	-25.00	-42.67	Vertical
9	5120.000	-65.54	10.66	-54.88	-25.00	-29.88	Vertical
10	7680.000	-66.52	13.84	-52.68	-25.00	-27.68	Vertical

5.8.2 LTE Band 12

LTE Band 12_ 10 MHz_ QPSK							
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
Lowest Channel							
1	461.631	-87.70	35.02	-52.68	-13.00	-39.68	Horizontal
2	833.013	-88.02	41.63	-46.39	-13.00	-33.39	Horizontal
3	958.714	-86.75	43.02	-43.73	-13.00	-30.73	Horizontal
4	1408.000	-64.36	-1.40	-65.76	-13.00	-52.76	Horizontal
5	2112.000	-66.48	2.70	-63.78	-13.00	-50.78	Horizontal
6	542.610	-88.70	37.09	-51.61	-13.00	-38.61	Vertical
7	646.822	-87.70	39.37	-48.33	-13.00	-35.33	Vertical
8	945.334	-86.18	42.96	-43.22	-13.00	-30.22	Vertical
9	1408.000	-67.40	-1.40	-68.80	-13.00	-55.80	Vertical
10	2112.000	-67.18	2.70	-64.48	-13.00	-51.48	Vertical
Middle Channel							
1	535.038	-87.63	37.02	-50.61	-13.00	-37.61	Horizontal
2	655.977	-87.35	39.52	-47.83	-13.00	-34.83	Horizontal
3	912.695	-85.28	42.82	-42.46	-13.00	-29.46	Horizontal
4	1415.000	-65.73	-1.41	-67.14	-13.00	-54.14	Horizontal
5	2122.500	-65.48	2.73	-62.75	-13.00	-49.75	Horizontal
6	655.977	-88.54	39.52	-49.02	-13.00	-36.02	Vertical
7	856.760	-87.22	42.14	-45.08	-13.00	-32.08	Vertical
8	932.141	-87.06	42.91	-44.15	-13.00	-31.15	Vertical
9	1415.000	-65.54	-1.41	-66.95	-13.00	-53.95	Vertical
10	2122.500	-66.92	2.73	-64.19	-13.00	-51.19	Vertical
Highest Channel							
1	651.383	-88.20	39.37	-48.83	-13.00	-35.83	Horizontal
2	689.051	-88.46	40.21	-48.25	-13.00	-35.25	Horizontal
3	754.963	-86.97	40.57	-46.40	-13.00	-33.40	Horizontal
4	1422.000	-65.54	-1.42	-66.96	-13.00	-53.96	Horizontal
5	2133.000	-66.52	2.74	-63.78	-13.00	-50.78	Horizontal
6	558.079	-88.21	37.15	-51.06	-13.00	-38.06	Vertical
7	679.435	-88.52	39.83	-48.69	-13.00	-35.69	Vertical
8	912.695	-87.16	42.82	-44.34	-13.00	-31.34	Vertical
9	1422.000	-66.42	-1.42	-67.84	-13.00	-54.84	Vertical
10	2133.000	-68.01	2.74	-65.27	-13.00	-52.27	Vertical

5.8.3 LTE Band 17

LTE Band 17_ 5 MHz_ QPSK							
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
Lowest Channel							
1	787.475	-87.31	40.98	-46.33	-13.00	-33.33	Horizontal
2	856.760	-87.20	42.14	-45.06	-13.00	-32.06	Horizontal
3	958.714	-86.97	43.02	-43.95	-13.00	-30.95	Horizontal
4	1418.000	-65.07	-1.42	-66.49	-13.00	-53.49	Horizontal
5	2127.000	-66.32	2.72	-63.60	-13.00	-50.60	Horizontal
6	615.774	-87.94	38.58	-49.36	-13.00	-36.36	Vertical
7	899.958	-87.99	42.77	-45.22	-13.00	-32.22	Vertical
8	979.139	-87.11	43.11	-44.00	-13.00	-31.00	Vertical
9	1418.000	-65.67	-1.42	-67.09	-13.00	-54.09	Vertical
10	2127.000	-67.95	2.72	-65.23	-13.00	-52.23	Vertical
Middle Channel							
1	804.252	-88.36	41.36	-47.00	-13.00	-34.00	Horizontal
2	893.656	-88.13	42.76	-45.37	-13.00	-32.37	Horizontal
3	1000.000	-87.20	43.60	-43.60	-13.00	-30.60	Horizontal
4	1420.000	-64.92	-1.41	-66.33	-13.00	-53.33	Horizontal
5	2130.000	-66.63	2.73	-63.90	-13.00	-50.90	Horizontal
6	798.620	-87.12	41.20	-45.92	-13.00	-32.92	Vertical
7	938.714	-87.26	42.94	-44.32	-13.00	-31.32	Vertical
8	972.283	-87.06	43.08	-43.98	-13.00	-30.98	Vertical
9	1420.000	-65.98	-1.41	-67.39	-13.00	-54.39	Vertical
10	2130.000	-67.49	2.73	-64.76	-13.00	-51.76	Vertical
Highest Channel							
1	660.602	-88.55	39.56	-48.99	-13.00	-35.99	Horizontal
2	850.760	-88.08	42.00	-46.08	-13.00	-33.08	Horizontal
3	938.714	-87.02	42.94	-44.08	-13.00	-31.08	Horizontal
4	1422.000	-65.51	-1.42	-66.93	-13.00	-53.93	Horizontal
5	2133.000	-66.71	2.74	-63.97	-13.00	-50.97	Horizontal
6	798.620	-87.06	41.20	-45.86	-13.00	-32.86	Vertical
7	881.184	-87.20	42.53	-44.67	-13.00	-31.67	Vertical
8	979.139	-86.64	43.11	-43.53	-13.00	-30.53	Vertical
9	1422.000	-65.93	-1.42	-67.35	-13.00	-54.35	Vertical
10	2133.000	-66.98	2.74	-64.24	-13.00	-51.24	Vertical

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1

5.8.4 LTE Band 66

LTE Band 66_ 20 MHz_ QPSK							
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
Lowest Channel							
1	620.117	-79.60	9.14	-70.46	-13.00	-57.46	Horizontal
2	932.141	-82.43	14.11	-68.32	-13.00	-55.32	Horizontal
3	965.474	-82.46	14.34	-68.12	-13.00	-55.12	Horizontal
4	3440.000	-64.21	7.29	-56.92	-13.00	-43.92	Horizontal
5	5160.000	-65.85	10.75	-55.10	-13.00	-42.10	Horizontal
6	827.179	-80.96	12.46	-68.50	-13.00	-55.50	Vertical
7	938.714	-81.89	14.16	-67.73	-13.00	-54.73	Vertical
8	992.997	-81.81	14.78	-67.03	-13.00	-54.03	Vertical
9	3440.000	-65.61	7.29	-58.32	-13.00	-45.32	Vertical
10	5160.000	-64.81	10.75	-54.06	-13.00	-41.06	Vertical
Middle Channel							
1	804.252	-81.53	12.19	-69.34	-13.00	-56.34	Horizontal
2	881.184	-81.60	13.59	-68.01	-13.00	-55.01	Horizontal
3	906.304	-80.70	13.93	-66.77	-13.00	-53.77	Horizontal
4	3490.000	-65.32	7.59	-57.73	-13.00	-44.73	Horizontal
5	5235.000	-65.89	10.97	-54.92	-13.00	-41.92	Horizontal
6	754.963	-81.24	11.30	-69.94	-13.00	-56.94	Vertical
7	809.924	-81.03	12.23	-68.80	-13.00	-55.80	Vertical
8	919.132	-81.10	14.01	-67.09	-13.00	-54.09	Vertical
9	3490.000	-64.74	7.59	-57.15	-13.00	-44.15	Vertical
10	5235.000	-65.02	10.97	-54.05	-13.00	-41.05	Vertical
Highest Channel							
1	628.894	-80.60	9.36	-71.24	-13.00	-58.24	Horizontal
2	838.887	-81.26	12.80	-68.46	-13.00	-55.46	Horizontal
3	912.695	-82.31	13.97	-68.34	-13.00	-55.34	Horizontal
4	3540.000	-65.28	7.76	-57.52	-13.00	-44.52	Horizontal
5	5310.000	-65.02	11.26	-53.76	-13.00	-40.76	Horizontal
6	850.760	-81.91	12.97	-68.94	-13.00	-55.94	Vertical
7	893.656	-82.02	13.85	-68.17	-13.00	-55.17	Vertical
8	952.000	-81.84	14.25	-67.59	-13.00	-54.59	Vertical
9	3540.000	-64.82	7.76	-57.06	-13.00	-44.06	Vertical
10	5310.000	-64.52	11.26	-53.26	-13.00	-40.26	Vertical

Remark:

1. Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result – Limit

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1

5.9 FREQUENCY STABILITY

Test Requirement: FCC 47 CFR Part 2.1055 &
FCC 47 CFR Part 22.355 &
FCC 47 CFR Part 24.235 &
FCC 47 CFR Part 27.54

Test Method: ANSI C63.26-2015 & KDB 971168 D01v03r01

Limits:

FCC 47 CFR Part 22.355, FCC 47 CFR Part 90.213

The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

FCC 47 CFR Part 24.235, FCC 47 CFR Part 27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Setup: Refer to section 4.2.2 for details.

Test Procedures:

1) Use CMW 500 with Frequency Error measurement capability.

a) Temp. = -30° to $+50^{\circ}\text{C}$

b) Voltage = low voltage, 3.4 Vdc, Normal, 3.87 Vdc and High voltage, 4.45 Vdc.

2) Frequency Stability vs Temperature:

The EUT is placed inside a temperature chamber. The temperature is set to 20°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until $+50^{\circ}\text{C}$ is reached.

3) Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

Equipment Used: Refer to section 3 for details.

Test Result: Pass

Modulation	Channel/ Frequency (MHz)	Voltage (Vdc)	Temperature ($^{\circ}\text{C}$)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Result
LTE Band 2 / 20MHz / Full RB							
QPSK	18900 / 1880.0	VL	TN	-6.59	-0.0035	Note 1	Pass
		VN		-12.12	-0.0064		Pass
		VH		-7.34	-0.0039		Pass
		VN	50	-8.33	-0.0044		Pass
			40	-12.51	-0.0067		Pass
			30	-10.77	-0.0057		Pass
			20	-12.22	-0.0065		Pass
			10	-7.31	-0.0039		Pass
			0	-6.23	-0.0033		Pass
			-10	-6.33	-0.0034		Pass
			-20	-7.23	-0.0038		Pass
			-30	-8.83	-0.0047		Pass

Modulation	Channel/ Frequency	Voltage	Temperature	Deviation	Deviation	Limit	Pass/ Fail
	(MHz)	(Vdc)	(°C)	(Hz)	(ppm)	(ppm)	
LTE Band 4 / 20MHz / Full RB							
QPSK	20175 / 1732.5	VL	TN	-6.46	-0.0037	Note 1	Pass
		VN		-6.25	-0.0036		Pass
		VH		-5.15	-0.0030		Pass
		VN	50	-6.32	-0.0036		Pass
			40	-7.88	-0.0045		Pass
			30	-5.62	-0.0032		Pass
			20	-5.02	-0.0029		Pass
			10	-6.23	-0.0036		Pass
			0	-5.36	-0.0031		Pass
			-10	-4.58	-0.0026		Pass
			-20	-6.02	-0.0035		Pass
			-30	-5.18	-0.0030		Pass

Modulation	Channel/ Frequency	Voltage	Temperature	Deviation	Deviation	Limit	Pass/ Fail
	(MHz)	(Vdc)	(°C)	(Hz)	(ppm)	(ppm)	
LTE Band 5 / 10MHz / Full RB							
QPSK	20525 / 836.5	VL	TN	-4.77	-0.0057	± 2.5	Pass
		VN		-6.31	-0.0075	± 2.5	Pass
		VH		-8.96	-0.0107	± 2.5	Pass
		VN	50	-5.94	-0.0071	± 2.5	Pass
			40	-4.71	-0.0056	± 2.5	Pass
			30	-6.48	-0.0077	± 2.5	Pass
			20	-7.95	-0.0095	± 2.5	Pass
			10	-5.94	-0.0071	± 2.5	Pass
			0	-6.41	-0.0077	± 2.5	Pass
			-10	-6.72	-0.0080	± 2.5	Pass
			-20	-5.94	-0.0071	± 2.5	Pass
			-30	-5.25	-0.0063	± 2.5	Pass

Modulation	Channel/ Frequency	Voltage	Temperature	Deviation	Deviation	Limit	Pass/ Fail
	(MHz)	(Vdc)	(°C)	(Hz)	(ppm)	(ppm)	
LTE Band 7 / 20MHz / Full RB							
QPSK	21100 / 2535	VL	TN	-12.79	-0.0074	N/A	Pass
		VN		-15.45	-0.0089		Pass
		VH		-11.34	-0.0065		Pass
		VN	50	-15.25	-0.0088		Pass
			40	-11.31	-0.0065		Pass
			30	-13.68	-0.0079		Pass
			20	-12.45	-0.0072		Pass
			10	-11.87	-0.0069		Pass
			0	-15.85	-0.0091		Pass
			-10	-10.74	-0.0062		Pass
			-20	-11.83	-0.0068		Pass
			-30	-14.38	-0.0083		Pass

Modulation	Channel/ Frequency	Voltage	Temperature	Deviation	Deviation	Limit	Pass/ Fail
	(MHz)	(Vdc)	(°C)	(Hz)	(ppm)	(ppm)	
LTE Band 12 / 10MHz / Full RB							
QPSK	23095 / 707.5	VL	TN	-9.15	-0.0129	Note 1	Pass
		VN		-6.92	-0.0098		Pass
		VH		-6.17	-0.0087		Pass
		VN	50	-9.77	-0.0138		Pass
			40	-5.78	-0.0082		Pass
			30	-7.17	-0.0101		Pass
			20	-8.99	-0.0127		Pass
			10	-8.25	-0.0117		Pass
			0	-9.75	-0.0138		Pass
			-10	-6.48	-0.0092		Pass
			-20	-7.07	-0.0100		Pass
			-30	-5.35	-0.0076		Pass

Modulation	Channel/ Frequency	Voltage	Temperature	Deviation	Deviation	Limit	Pass/ Fail
	(MHz)	(Vdc)	(°C)	(Hz)	(ppm)	(ppm)	
LTE Band 17 / 10MHz / Full RB							
QPSK	23790 / 710	VL	TN	-6.46	-0.0091	Note 1	Pass
		VN		-4.64	-0.0065		Pass
		VH		-6.32	-0.0089		Pass
		VN	50	-5.31	-0.0075		Pass
			40	-6.99	-0.0098		Pass
			30	-4.79	-0.0067		Pass
			20	-5.31	-0.0075		Pass
			10	-5.94	-0.0084		Pass
			0	-4.79	-0.0067		Pass
			-10	-6.75	-0.0095		Pass
			-20	-6.25	-0.0088		Pass
			-30	-5.43	-0.0076		Pass

Modulation	Channel/ Frequency	Voltage	Temperature	Deviation	Deviation	Limit	Pass/ Fail
	(MHz)	(Vdc)	(°C)	(Hz)	(ppm)	(ppm)	
LTE Band 66/ 20MHz / Full RB							
QPSK	132322 / 1745	VL	TN	-4.97	-0.0028	Note 1	Pass
		VN		-6.26	-0.0036		Pass
		VH		-9.11	-0.0052		Pass
		VN	50	-5.78	-0.0033		Pass
			40	-4.97	-0.0028		Pass
			30	-8.26	-0.0047		Pass
			20	-9.56	-0.0055		Pass
			10	-7.08	-0.0041		Pass
			0	-8.54	-0.0049		Pass
			-10	-8.37	-0.0048		Pass
			-20	-5.06	-0.0029		Pass
			-30	-7.75	-0.0044		Pass

APPENDIX A RF TEST DATA

A.1 LTE BAND 2

Peak to Average Ratio

Band	Bandwidth (MHz)	Channel	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
2	20.0	18700	1860.0	QPSK	100@0	5.86	13	PASS
2	20.0	18700	1860.0	16QAM	100@0	6.47	13	PASS
2	20.0	18700	1860.0	64QAM	100@0	6.35	13	PASS
2	20.0	18900	1880.0	QPSK	100@0	5.93	13	PASS
2	20.0	18900	1880.0	16QAM	100@0	6.34	13	PASS
2	20.0	18900	1880.0	64QAM	100@0	6.28	13	PASS
2	20.0	19100	1900.0	QPSK	100@0	5.75	13	PASS
2	20.0	19100	1900.0	16QAM	100@0	6.32	13	PASS
2	20.0	19100	1900.0	64QAM	100@0	6.29	13	PASS

B2 20M QPSK 100@0 CH 18700



B2 20M 16QAM 100@0 CH 18700



B2 20M QPSK 100@0 CH 18900



B2 20M 16QAM 100@0 CH 18900



B2 20M QPSK 100@0 CH 19100



B2 20M 16QAM 100@0 CH 19100



B2 20M 64QAM 100@0 CH 18700



B2 20M 64QAM 100@0 CH 18900



B2 20M 64QAM 100@0 CH 19100



Occupied Bandwidth

Band	Bandwidth (MHz)	Channel	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
2	20.0	18700	1860.0	QPSK	100@0	17.854	19.15
2	20.0	18700	1860.0	16QAM	100@0	17.881	19.07
2	20.0	18700	1860.0	64QAM	100@0	17.888	19.26
2	20.0	18900	1880.0	QPSK	100@0	17.924	19.23
2	20.0	18900	1880.0	16QAM	100@0	17.917	19.26
2	20.0	18900	1880.0	64QAM	100@0	17.926	19.23
2	20.0	19100	1900.0	QPSK	100@0	17.854	18.92
2	20.0	19100	1900.0	16QAM	100@0	17.826	19.05
2	20.0	19100	1900.0	64QAM	100@0	17.824	19.10
2	15.0	18675	1857.5	QPSK	75@0	13.445	14.41
2	15.0	18675	1857.5	16QAM	75@0	13.447	14.43
2	15.0	18675	1857.5	64QAM	75@0	13.415	14.43
2	15.0	18900	1880.0	QPSK	75@0	13.405	14.49
2	15.0	18900	1880.0	16QAM	75@0	13.428	14.37
2	15.0	18900	1880.0	64QAM	75@0	13.399	14.42
2	15.0	19125	1902.5	QPSK	75@0	13.397	14.24
2	15.0	19125	1902.5	16QAM	75@0	13.401	14.29
2	15.0	19125	1902.5	64QAM	75@0	13.407	14.59
2	10.0	18650	1855.0	QPSK	50@0	8.9514	9.741
2	10.0	18650	1855.0	16QAM	50@0	8.9302	9.694
2	10.0	18650	1855.0	64QAM	50@0	8.9416	9.721
2	10.0	18900	1880.0	QPSK	50@0	8.9348	9.640
2	10.0	18900	1880.0	16QAM	50@0	8.9539	9.530
2	10.0	18900	1880.0	64QAM	50@0	8.9381	9.681
2	10.0	19150	1905.0	QPSK	50@0	8.9341	9.627
2	10.0	19150	1905.0	16QAM	50@0	8.9275	9.572
2	10.0	19150	1905.0	64QAM	50@0	8.9306	9.640
2	5.0	18625	1852.5	QPSK	25@0	4.4541	4.871
2	5.0	18625	1852.5	16QAM	25@0	4.4633	4.883
2	5.0	18625	1852.5	64QAM	25@0	4.4599	4.813
2	5.0	18900	1880.0	QPSK	25@0	4.4799	4.847
2	5.0	18900	1880.0	16QAM	25@0	4.4722	4.859
2	5.0	18900	1880.0	64QAM	25@0	4.4750	4.902
2	5.0	19175	1907.5	QPSK	25@0	4.4586	4.870
2	5.0	19175	1907.5	16QAM	25@0	4.4597	4.873
2	5.0	19175	1907.5	64QAM	25@0	4.4620	4.887
2	3.0	18615	1851.5	QPSK	15@0	2.6909	2.969
2	3.0	18615	1851.5	16QAM	15@0	2.6813	2.954
2	3.0	18615	1851.5	64QAM	15@0	2.6846	2.968
2	3.0	18900	1880.0	QPSK	15@0	2.6938	2.993
2	3.0	18900	1880.0	16QAM	15@0	2.6851	2.978
2	3.0	18900	1880.0	64QAM	15@0	2.6829	2.974
2	3.0	19185	1908.5	QPSK	15@0	2.6846	2.972
2	3.0	19185	1908.5	16QAM	15@0	2.6839	2.978
2	3.0	19185	1908.5	64QAM	15@0	2.6830	2.981
2	1.4	18607	1850.7	QPSK	6@0	1.0792	1.220
2	1.4	18607	1850.7	16QAM	6@0	1.0794	1.232
2	1.4	18607	1850.7	64QAM	6@0	1.0808	1.230
2	1.4	18900	1880.0	QPSK	6@0	1.0757	1.216
2	1.4	18900	1880.0	16QAM	6@0	1.0747	1.213
2	1.4	18900	1880.0	64QAM	6@0	1.0753	1.215
2	1.4	19193	1909.3	QPSK	6@0	1.0779	1.227
2	1.4	19193	1909.3	16QAM	6@0	1.0801	1.218
2	1.4	19193	1909.3	64QAM	6@0	1.0790	1.217

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com


<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1


B2_20M QPSK 100@0 CH 18700

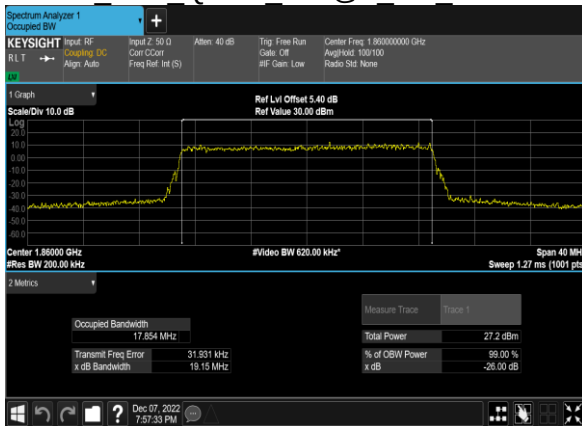


B2_20M 16QAM 100@0 CH 18700

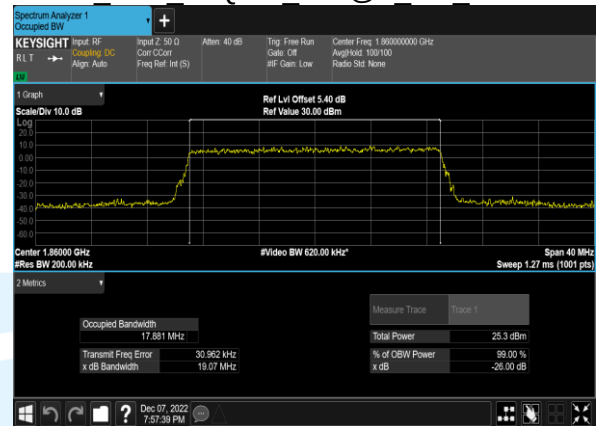


B2_20M QPSK 100@0 CH 18900

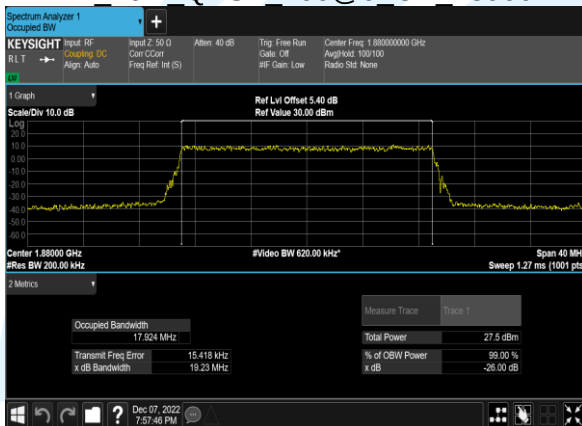


B2_20M 16QAM 100@0 CH 18900

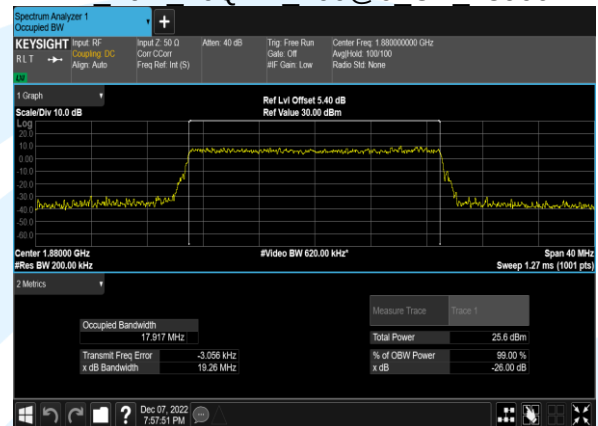


B2_20M QPSK 100@0 CH 19100

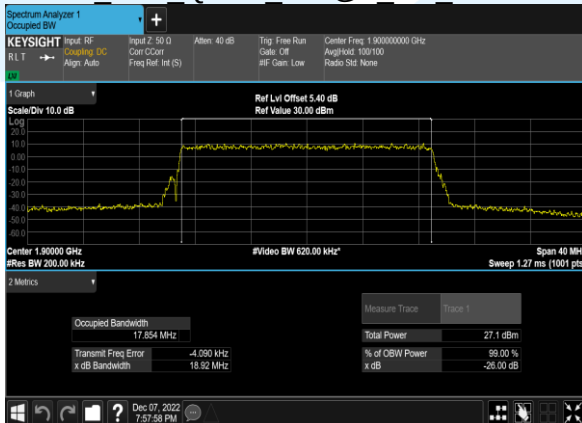


B2_20M 16QAM 100@0 CH 19100

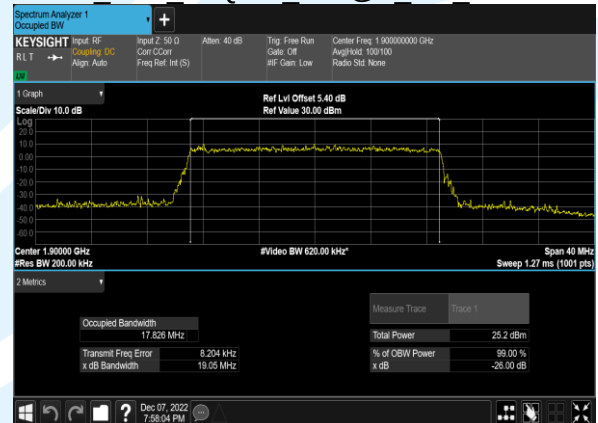


B2_15M QPSK 75@0 CH 18675

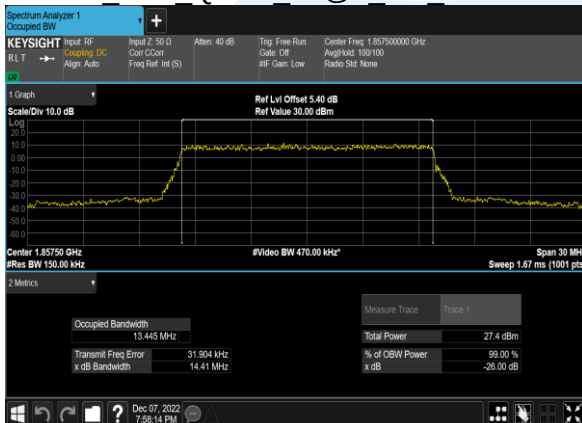

B2_15M 16QAM 75@0 CH 18675

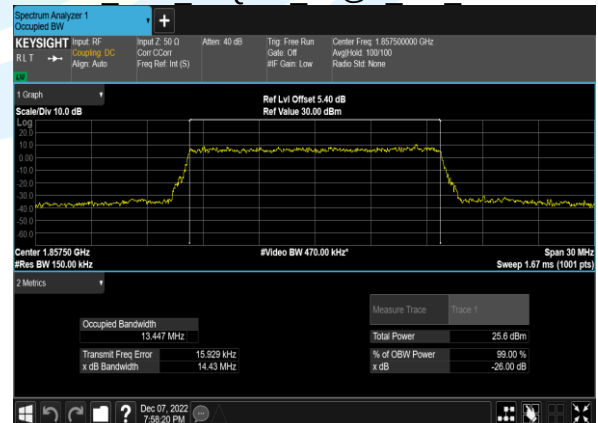


B2 15M QPSK 75@0 CH 18900

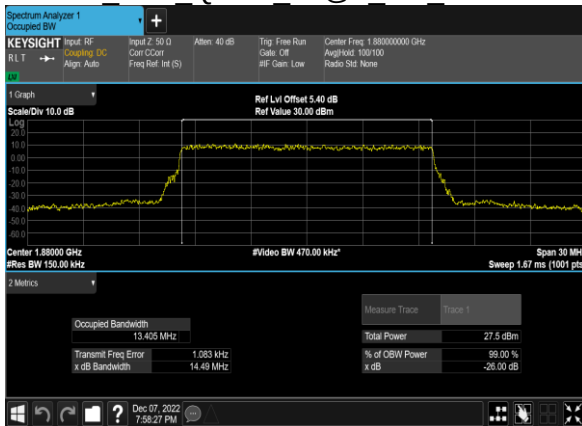


B2 15M 16QAM 75@0 CH 18900




B2 15M QPSK 75@0 CH 19125

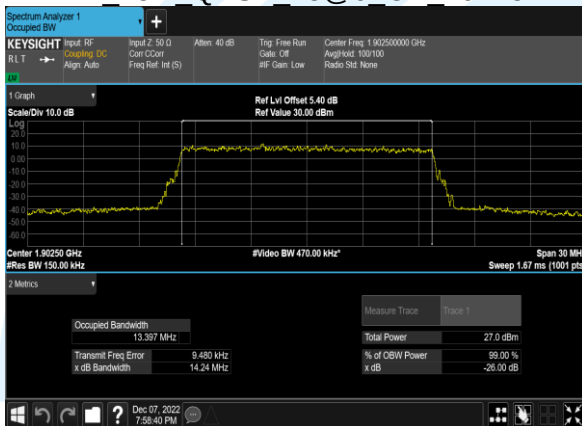


B2 15M 16QAM 75@0 CH 19125

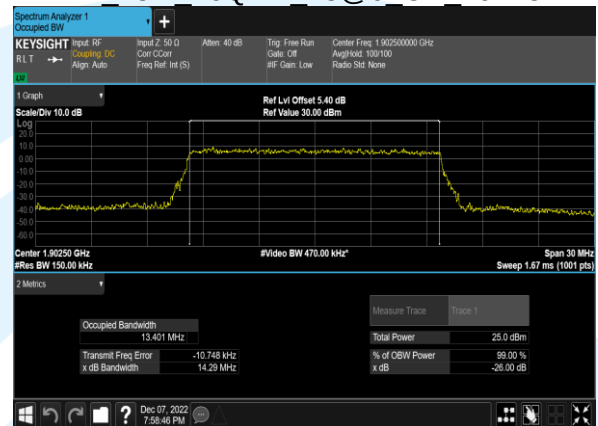


B2 10M QPSK 50@0 CH 18650

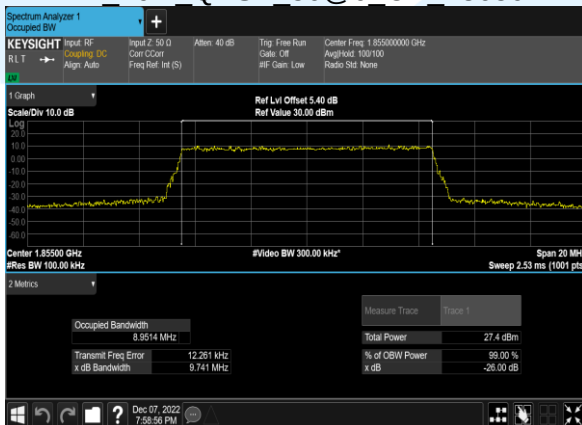


B2 10M 16QAM 50@0 CH 18650

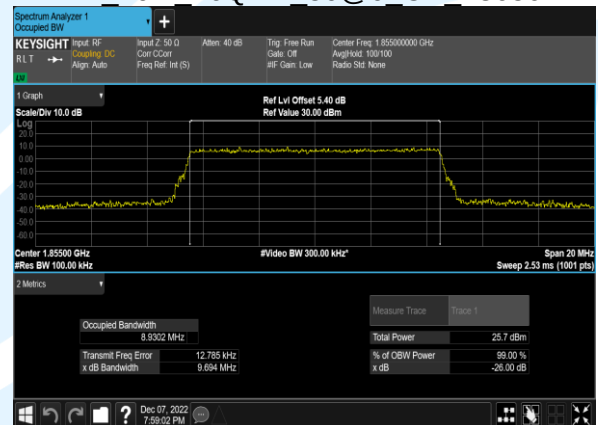

B2 10M QPSK 50@0 CH 18900

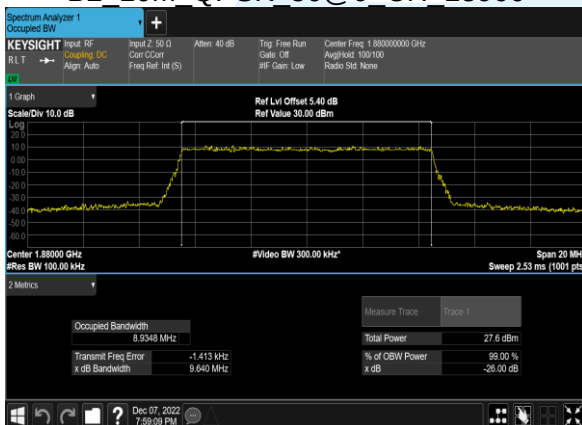


B2 10M 16QAM 50@0 CH 18900

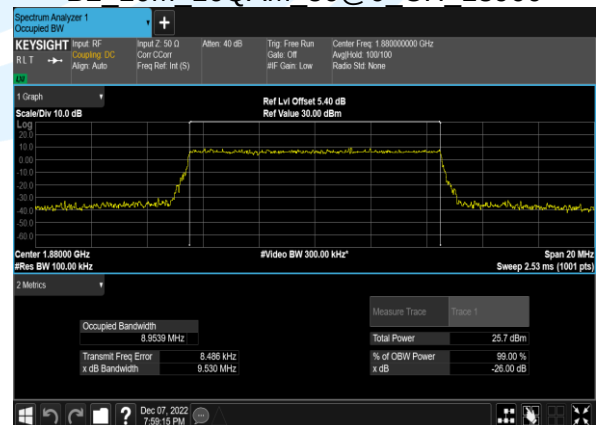


B2 10M QPSK 50@0 CH 19150




B2 10M 16QAM 50@0 CH 19150

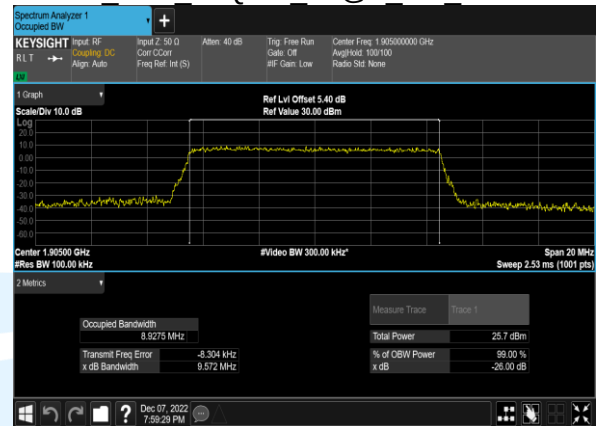


B2 5M QPSK 25@0 CH 18625

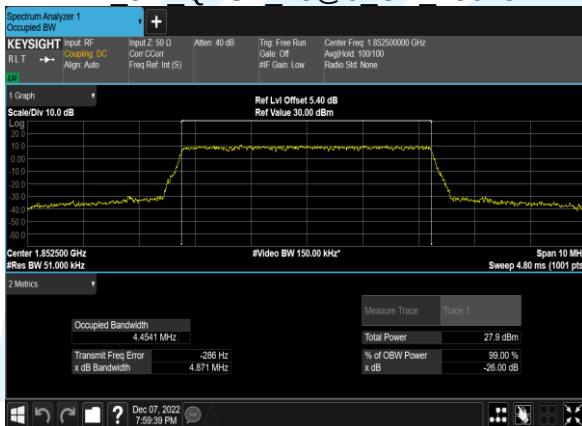


B2 5M 16QAM 25@0 CH 18625

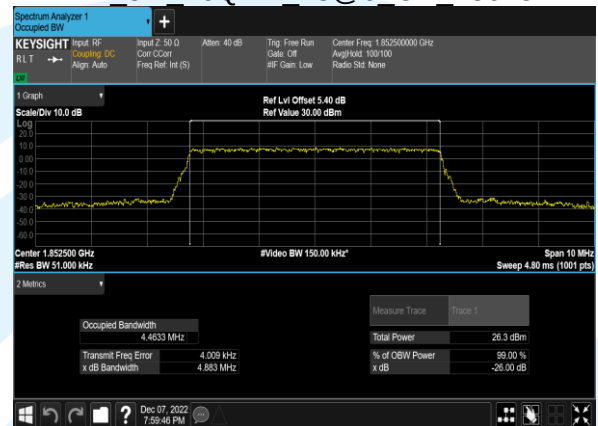


B2 5M QPSK 25@0 CH 18900

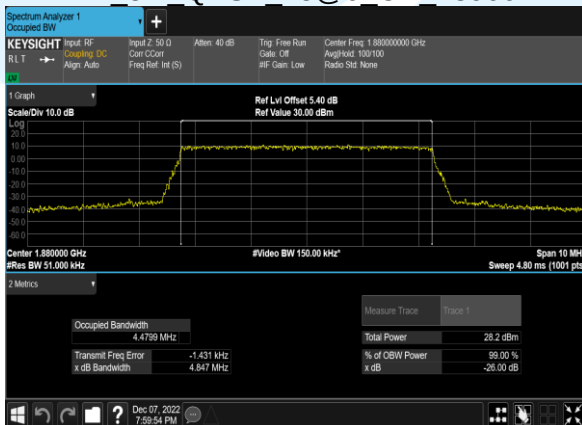


B2 5M 16QAM 25@0 CH 18900

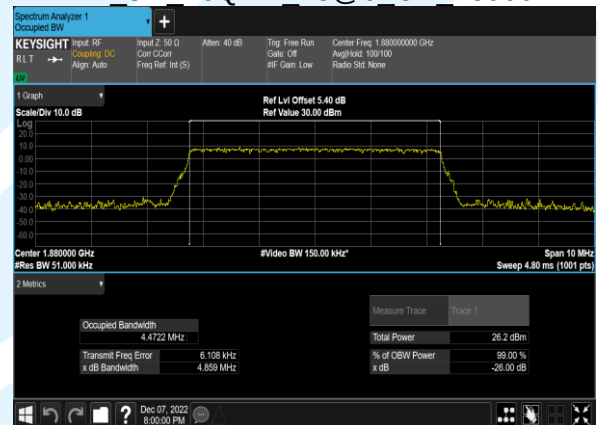

B2 5M QPSK 25@0 CH 19175

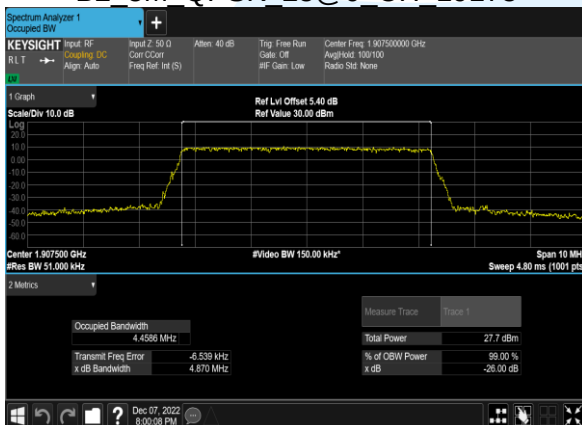


B2 5M 16QAM 25@0 CH 19175

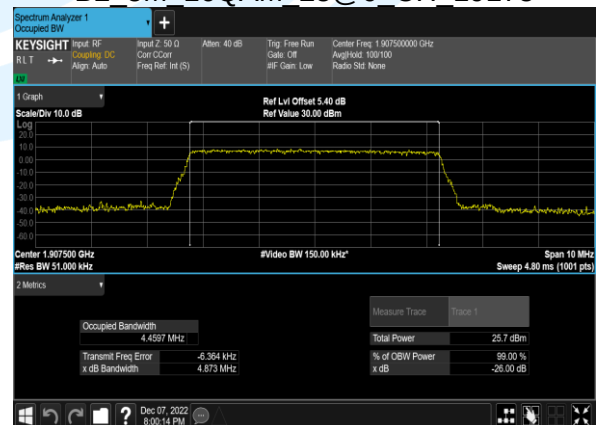


B2_3M_QPSK_15@0_CH_18615




B2_3M_16QAM_15@0_CH_18615

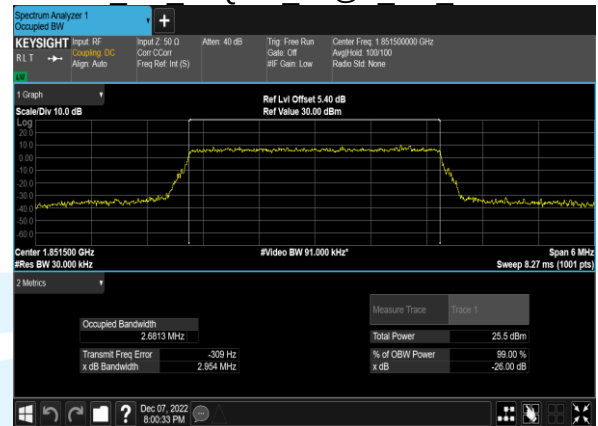

B2_3M_QPSK_15@0_CH_18900

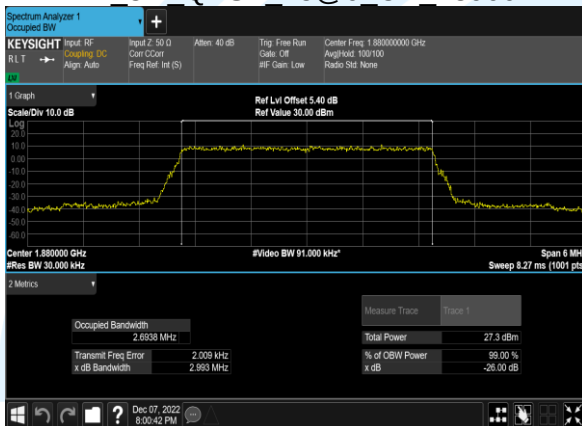

B2_3M_16QAM_15@0_CH_18900

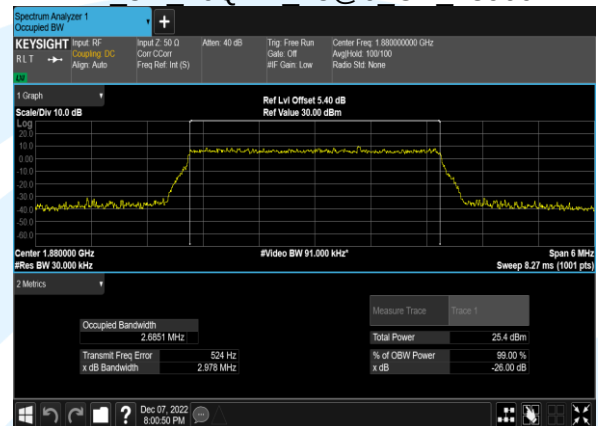


B2_3M_QPSK_15@0_CH_19185




B2_3M_16QAM_15@0_CH_19185




B2_1.4M_QPSK_6@0_CH_18607

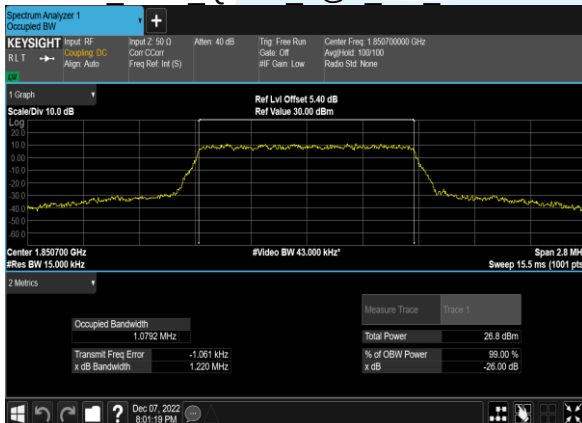


B2_1.4M_16QAM_6@0_CH_18607

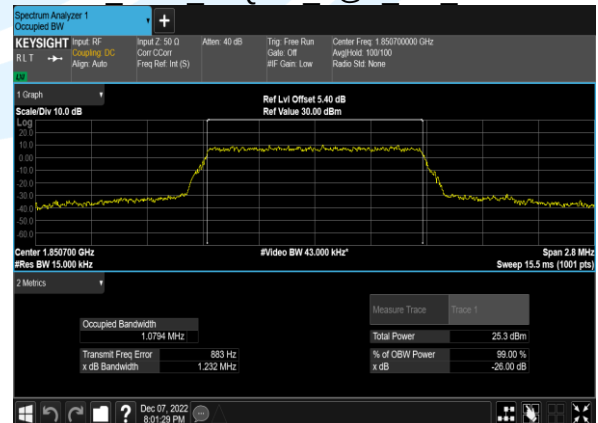


B2 1.4M QPSK 6@0 CH 18900

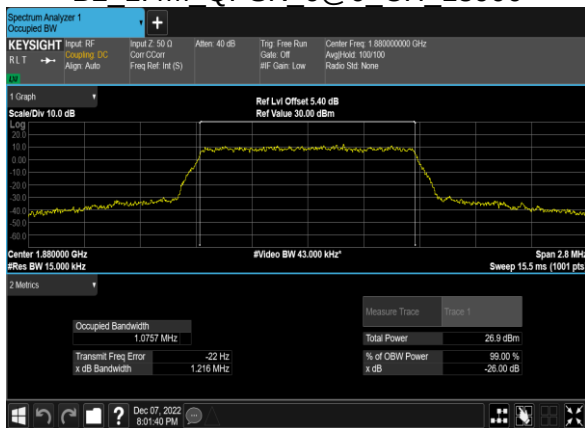

B2 1.4M 16QAM 6@0 CH 18900

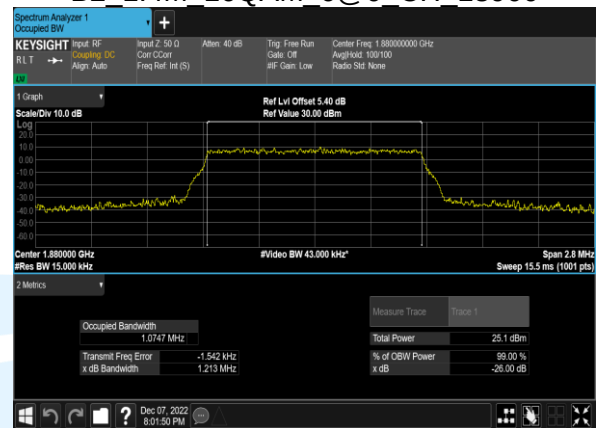

B2 1.4M QPSK 6@0 CH 19193

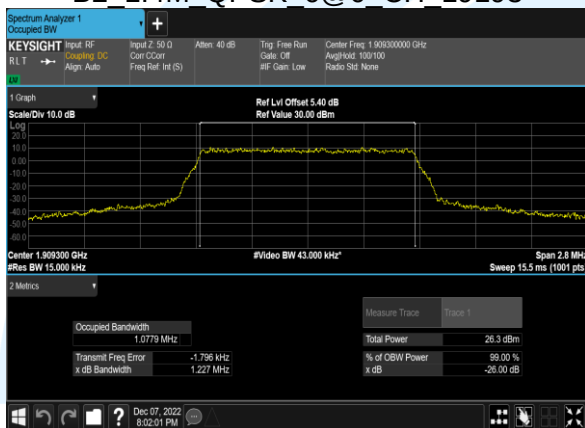

B2 1.4M 16QAM 6@0 CH 19193

