



FCC Test Report

APPLICANT : BLU Products, Inc.
EQUIPMENT : Mobile Phone
BRAND NAME : BLU
MODEL NAME : G9
FCC ID : YHLBLUG9
STANDARD : 47 CFR Part 15 Subpart B
CLASSIFICATION : Certification

The product was received on Jan. 16, 2019 and testing was completed on Feb.26, 2019. We, Sporton International (Shenzhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Shenzhen) Inc., the test report shall not be reproduced except in full.



Approved by: Eric Shih / Manager

Sporton International (Shenzhen) Inc.

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen City,
Guangdong Province 518055, China**



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1. GENERAL DESCRIPTION 5

 1.1. Applicant..... 5

 1.2. Manufacturer 5

 1.3. Product Feature of Equipment Under Test 5

 1.4. Product Specification of Equipment Under Test 6

 1.5. Modification of EUT 7

 1.6. Test Location 7

 1.7. Applicable Standards 8

2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST 9

 2.1. Test Mode 9

 2.2. Connection Diagram of Test System 10

 2.3. Support Unit used in test configuration and system 10

 2.4. EUT Operation Test Setup 11

3. TEST RESULT 12

 3.1. Test of AC Conducted Emission Measurement 12

 3.2. Test of Radiated Emission Measurement 16

4. LIST OF MEASURING EQUIPMENT 21

5. UNCERTAINTY OF EVALUATION 22

APPENDIX A. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FC911616	Rev. 01	Initial issue of report	Mar. 01, 2019



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 8.29 dB at 16.140 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 3.27 dB at 257.950 MHz for Quasi-Peak



1. General Description

1.1. Applicant

BLU Products, INC.
10814 NW 33rd St # 100 Doral, FL 33172

1.2. Manufacturer

BLU Products, Inc.
10814 NW 33rd St # 100 Doral, FL 33172

1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	BLU
Model Name	G9
FCC ID	YHLBLUG9
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/HSPA+/LTE WLAN 2.4GHz 802.11b/g/n HT20 Bluetooth BR/EDR/LE GNSS/FM Receiver
IMEI Code	Conduction: 866713035511659/866713035511550 Radiation: 866713035511642/866713035511634
HW Version	K6203Q_03
SW Version	BLU_G0130WW_V9.0.02.01_GENERIC_20190130_1136.zip
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band IV : 1712.4 MHz ~ 1752.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz LTE Band 2 : 1850.7 MHz ~ 1909.3 MHz LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 7 : 2502.5 MHz ~ 2567.5 MHz LTE Band 12 : 699.7 MHz ~ 715.3 MHz LTE Band 13 : 779.5 MHz ~ 784.5 MHz LTE Band 17 : 706.5 MHz ~ 713.5 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Rx Frequency	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band IV : 2112.4 MHz ~ 2152.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz LTE Band 2 : 1930.7 MHz ~ 1989.3 MHz LTE Band 4 : 2110.7 MHz ~ 2154.3 MHz LTE Band 5 : 869.7 MHz ~ 893.3 MHz LTE Band 7 : 2622.5 MHz ~ 2687.5 MHz LTE Band 12 : 729.7 MHz ~ 745.3 MHz LTE Band 13 : 748.5 MHz ~ 753.5 MHz LTE Band 17 : 736.5 MHz ~ 743.5 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz GNSS : 1559 MHz ~ 1610 MHz FM: 88 MHz - 108 MHz
Antenna Type	WWAN : PIFA Antenna WLAN : PIFA Antenna Bluetooth : PIFA Antenna GNSS: PIFA Antenna FM : External Handset Antenna
Type of Modulation	GSM: GMSK GPRS: GMSK EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK WCDMA : BPSK (Uplink) HSDPA/DC-HSDPA : QPSK (Uplink) HSUPA : QPSK (Uplink) HSPA+ : 16QAM DC-HSDPA : 64QAM LTE: QPSK / 16QAM / 64QAM 802.11b : DSSS (DBPSK / DQPSK / CCK) Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : $\pi/4$ -DQPSK Bluetooth (3Mbps) : 8-DPSK GNSS : BPSK



	FM
--	----

GNSS = BDS + Galileo + GLONASS + GPS + SBAS

1.5. Modification of EUT

No modifications are made to the EUT during all test items.

1.6. Test Location

Sporton International (Shenzhen) Inc. is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600156-0).

Test Site	Sporton International (Shenzhen) Inc.		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen City, Guangdong Province 518055, China TEL: +86-755-8637-9589 FAX: +86-755-8637-9595		
Test Site No.	Sporton Site No.	FCC designation No.	FCC Test Firm Registration No.
	CO01-SZ	CN5018	337463

Test Site	Sporton International (Shenzhen) Inc.		
Test Site Location	No. 3 Bldg the third floor of south, Shahe River west, Fengzeyuan Warehouse, Nanshan District, Shenzhen City, Guangdong Province 518055, China TEL: +86-755- 3320-2398		
Test Site No.	Sporton Site No.	FCC designation No.	FCC Test Firm Registration No.
	03CH03-SZ	CN5019	577730



1.7. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart B
- ♦ ANSI C63.4-2014

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2. Test Configuration of Equipment Under Test


2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: GSM850 Idle + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + USB Cable (Charging from Adapter) + Earphone + SIM 1 Mode 2: PCS1900 Idle + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Front) + USB Cable (Charging from Adapter) + Earphone + SIM 1 Mode 3: WCDMA Band V Idle + Bluetooth Idle + WLAN (2.4G) Idle + MPEG4 + USB Cable (Charging from Adapter) + Earphone + SIM 1 Mode 4: LTE Band 4 Idle + Bluetooth Idle + WLAN (2.4G) Idle + H-patten + USB Cable (Charging from Adapter) + Earphone + SIM 1 Mode 5: LTE Band 7 Idle + Bluetooth Idle + WLAN (2.4G) Idle + GPS on + USB Cable (Data Link with Notebook) + Earphone + SIM 2
Radiated Emissions	Mode 1: GSM850 Idle + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + USB Cable (Charging from Adapter) + Earphone + SIM 1 Mode 2: PCS1900 Idle + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Front) + USB Cable (Charging from Adapter) + Earphone + SIM 1 Mode 3: WCDMA Band V Idle + Bluetooth Idle + WLAN (2.4G) Idle + MPEG4 + USB Cable (Charging from Adapter) + Earphone + SIM 1 Mode 4: LTE Band 4 Idle + Bluetooth Idle + WLAN (2.4G) Idle + H-patten + USB Cable (Charging from Adapter) + Earphone + SIM 1 Mode 5: LTE Band 7 Idle + Bluetooth Idle + WLAN (2.4G) Idle + GPS on + USB Cable (Data Link with Notebook) + Earphone + SIM 2
Remark: <ol style="list-style-type: none"> The worst case of AC is mode 5; only the test data of this mode is reported. The worst case of RE is mode 5; only the test data of this mode is reported. Data Link with Notebook means data application transferred mode between EUT and Notebook. 	

2.2. Connection Diagram of Test System

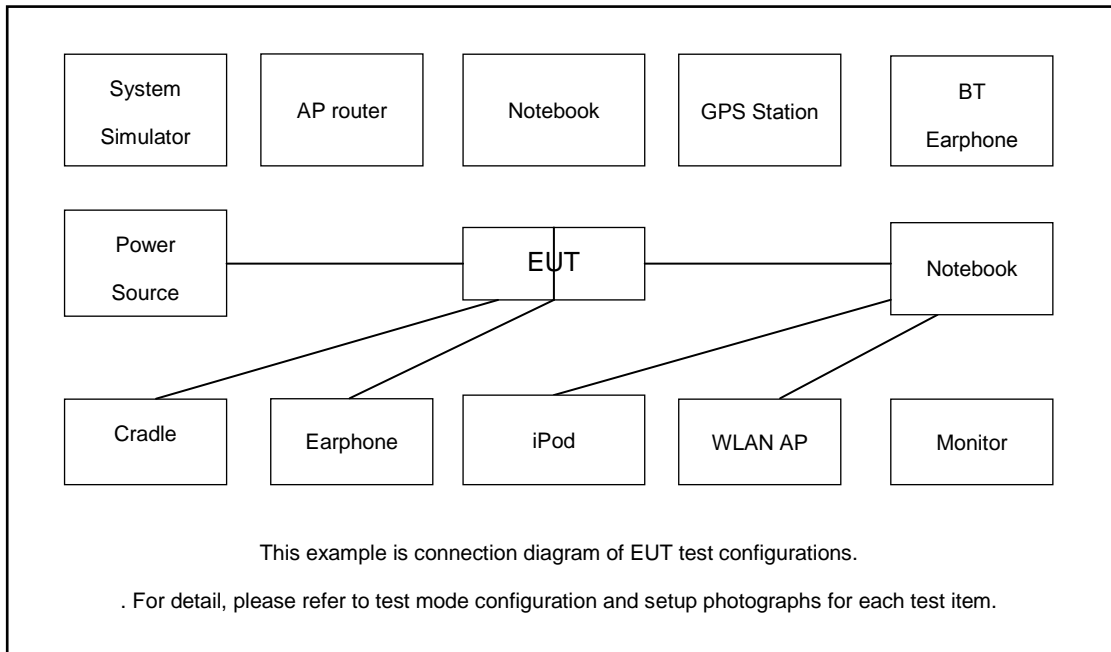

2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station(LTE)	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A
3.	SD Card	N/A	MicroSD HC	FCC DoC	N/A	N/A
4.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m
5.	WLAN AP	Lenovo	E540	Fcc DoC	N/A	shielded cable DC O/P 1.8m Unshielded AC I/P cable 1.8m
6.	WLAN AP	ASUSTek	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded,2.7m with Core
7.	NOTE BOOK	Lenovo	E540	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
8.	Labsat	RACELOGIC	18645	N/A	N/A	Unshielded, 1.8 m
9.	iPod	Apple	MC69029/A	N/A	N/A	Unshielded,1.8m
10.	IPod	Apple	MC525 ZP/A	Fcc DoC	Shielded, 1.0m	N/A
11.	SD Card	Kingston	3300-10000-078	Fcc DoC	N/A	N/A
12.	GPS Station	T&E	GS-50	N/A	N/A	Unshielded,1.8m



2.4. EUT Operation Test Setup

The EUT was in GSM or WCDMA or LTE idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between Notebook and EUT via USB cable.
2. Turn on GNSS function to make the EUT receive continuous signals from GNSS station.
3. Turn on camera to capture images.
4. Turn on MPEG4 function.
5. Execute "H Pattern" to show H Pattern via HDMI Cable on the Monitor.

3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


3.1.4 Test Setup





3.1.5 Test Result of AC Conducted Emission

Test Engineer :	ZhangXu	Temperature :	22~25°C
		Relative Humidity :	50~55 %
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

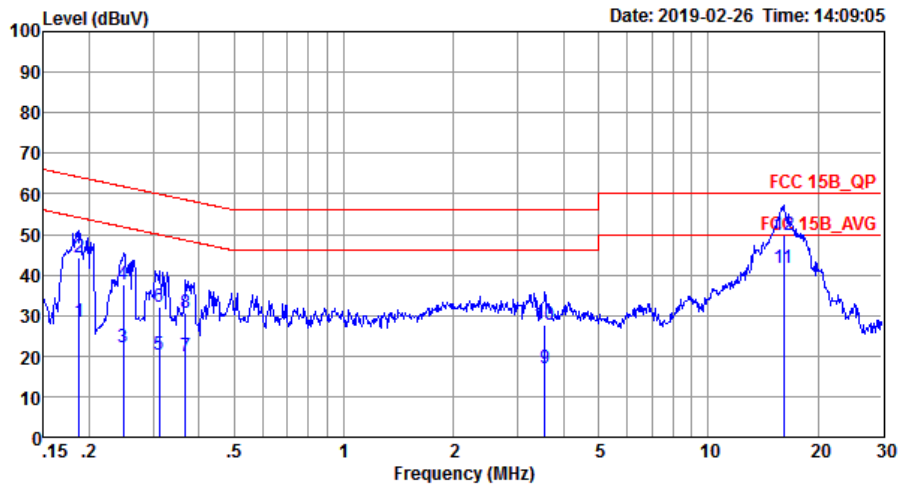


Site : C001-SZ
 Condition: FCC 15B_QP LISN_20180719_L LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.19	28.60	-25.55	54.15	18.50	0.03	10.07	Average
2	0.19	44.40	-19.75	64.15	34.30	0.03	10.07	QP
3	0.25	22.30	-29.52	51.82	12.20	0.03	10.07	Average
4	0.25	37.70	-24.12	61.82	27.60	0.03	10.07	QP
5	0.31	20.31	-29.62	49.93	10.20	0.03	10.08	Average
6	0.31	32.11	-27.82	59.93	22.00	0.03	10.08	QP
7	0.37	20.01	-28.55	48.56	9.90	0.03	10.08	Average
8	0.37	30.71	-27.85	58.56	20.60	0.03	10.08	QP
9	3.57	16.82	-29.18	46.00	6.50	0.17	10.15	Average
10	3.57	27.72	-28.28	56.00	17.40	0.17	10.15	QP
11 *	16.14	41.71	-8.29	50.00	30.59	0.72	10.40	Average
12	16.14	49.81	-10.19	60.00	38.69	0.72	10.40	QP



Test Engineer :	ZhangXu	Temperature :	22~25°C
		Relative Humidity :	50~55 %
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

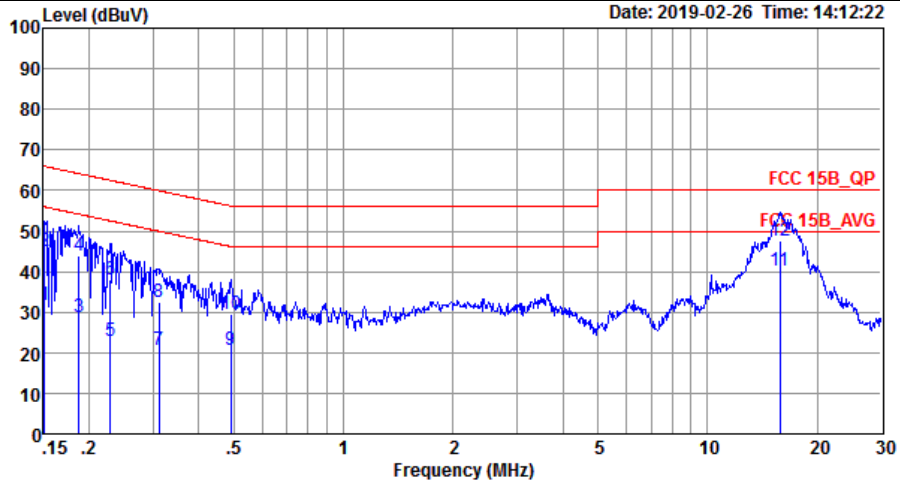

Site : C001-SZ
 Condition: FCC 15B_QP LISN_20180719_N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.15	31.89	-24.07	55.96	21.80	0.03	10.06	Average
2	0.15	44.89	-21.07	65.96	34.80	0.03	10.06	QP
3	0.19	28.69	-25.46	54.15	18.59	0.03	10.07	Average
4	0.19	44.10	-20.05	64.15	34.00	0.03	10.07	QP
5	0.23	22.70	-29.78	52.48	12.60	0.03	10.07	Average
6	0.23	38.00	-24.48	62.48	27.90	0.03	10.07	QP
7	0.31	20.81	-29.12	49.93	10.70	0.03	10.08	Average
8	0.31	32.51	-27.42	59.93	22.40	0.03	10.08	QP
9	0.49	20.80	-25.34	46.14	10.70	0.02	10.08	Average
10	0.49	29.60	-26.54	56.14	19.50	0.02	10.08	QP
11 *	15.80	40.07	-9.93	50.00	29.30	0.37	10.40	Average
12	15.80	47.57	-12.43	60.00	36.80	0.37	10.40	QP



3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB μ V/m) = 20 log Emission level (μ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz




For radiated emissions above 1GHz

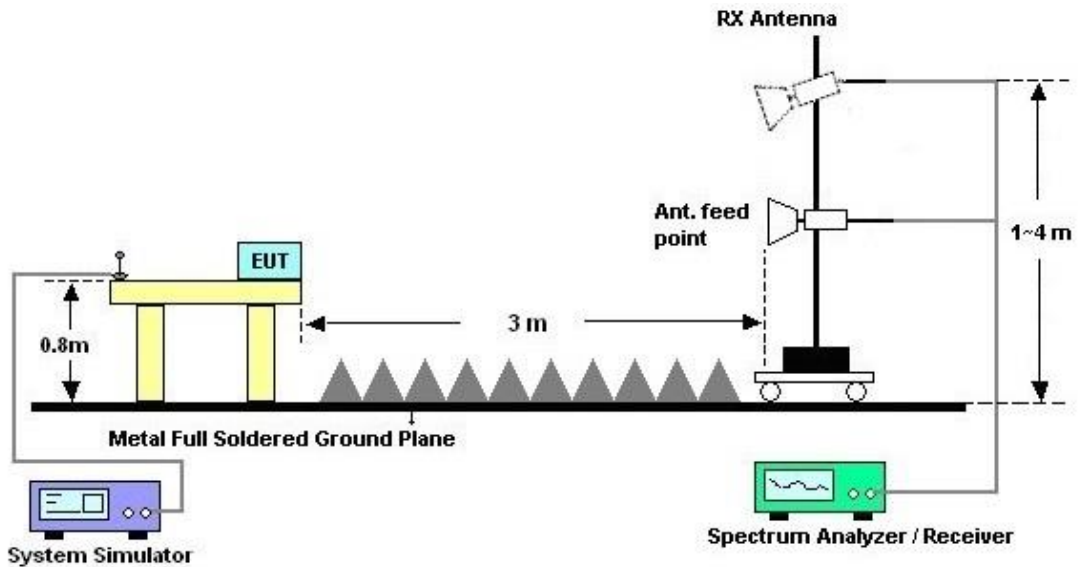



3.2.5. Test Result of Radiated Emission

Test Engineer :	Liangliang Lu	Temperature :	24~25°C
		Relative Humidity :	48~49%
Test Distance :	3m	Polarization :	Horizontal
Remark :	#7 is system simulator signal which can be ignored.		

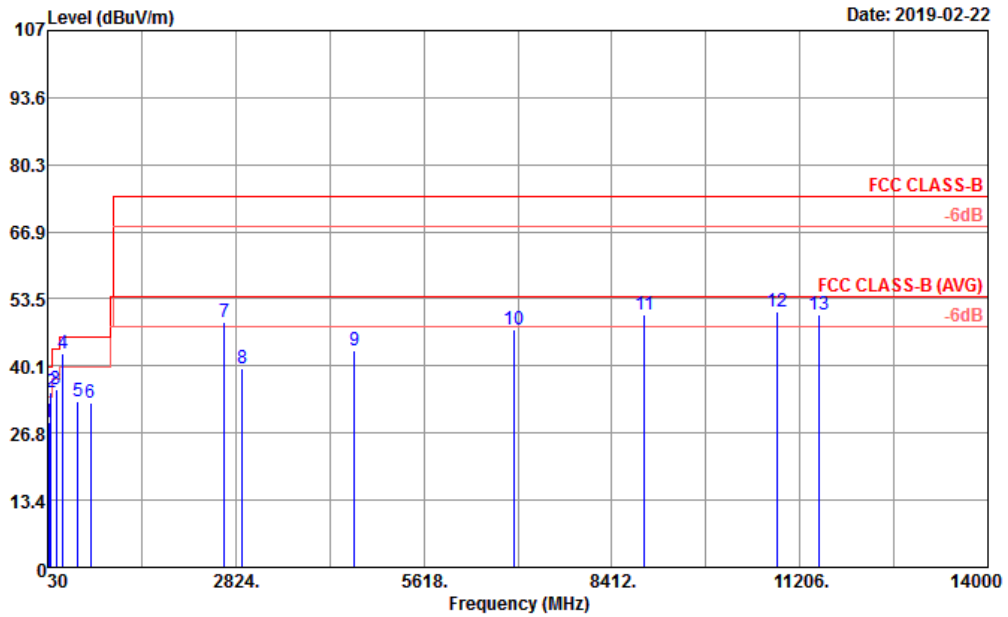


Site : 03CH03-SZ
 Condition : FCC CLASS-B 3m LF35407_CBL6112D_6 HORIZONTAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	44.55	28.94	-11.06	40.00	43.71	16.35	0.68	31.80	---	---	Peak
2 !	84.32	35.00	-5.00	40.00	52.65	13.40	0.95	32.00	---	---	Peak
3	156.10	35.42	-8.08	43.50	49.74	16.27	1.30	31.89	---	---	Peak
4 !	257.95	42.73	-3.27	46.00	53.12	19.76	1.69	31.84	136	217	QP
5	480.08	33.13	-12.87	46.00	39.25	23.14	2.34	31.60	---	---	Peak
6	667.29	32.87	-13.13	46.00	37.37	24.97	2.80	32.27	---	---	Peak
7	2656.00	48.99			73.30	27.84	5.40	57.55	---	---	Peak
8	2928.00	39.67	-34.33	74.00	62.51	28.39	6.13	57.36	---	---	Peak
9	4594.00	43.29	-30.71	74.00	61.44	30.88	8.29	57.32	---	---	Peak
10	6970.00	47.52	-26.48	74.00	61.22	34.98	10.08	58.76	---	---	Peak
11	8894.00	50.34	-23.66	74.00	60.50	37.96	10.90	59.02	---	---	Peak
12	10872.00	50.85	-23.15	74.00	57.02	40.45	11.81	58.43	196	83	Peak
13	11490.00	50.43	-23.57	74.00	54.97	41.18	12.04	57.76	---	---	Peak



Test Engineer :	Liangliang Lu	Temperature :	24~25°C
		Relative Humidity :	48~49%
Test Distance :	3m	Polarization :	Vertical
Remark :	#7 is system simulator signal which can be ignored.		

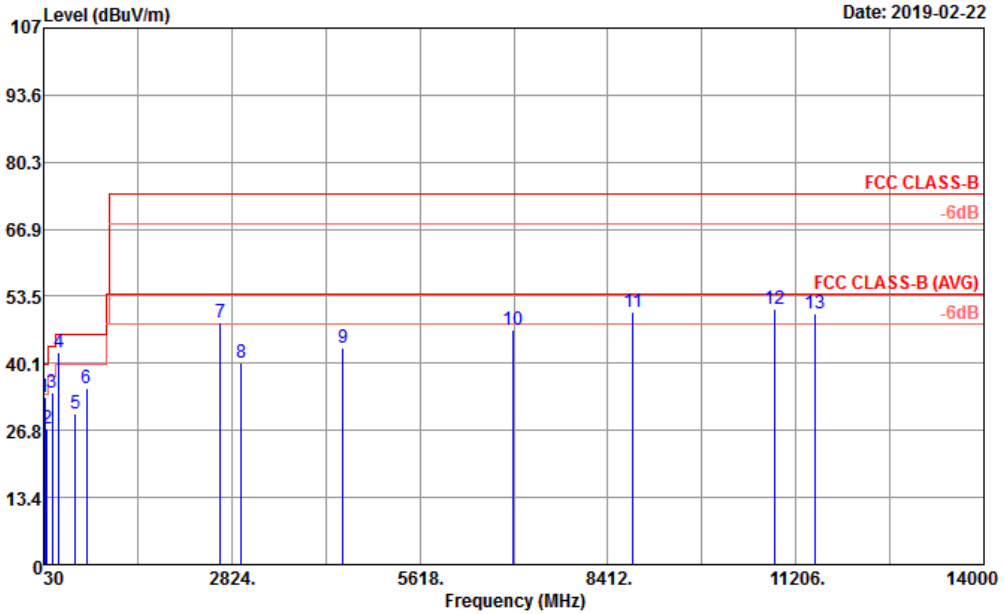

Site : 03CH03-SZ
 Condition : FCC CLASS-B 3m LF35407_CBL6112D_6 VERTICAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	44.55	33.41	-6.59	40.00	48.18	16.35	0.68	31.80	---	---	Peak
2	84.32	27.15	-12.85	40.00	44.80	13.40	0.95	32.00	---	---	Peak
3	152.22	34.14	-9.36	43.50	48.21	16.53	1.29	31.89	---	---	Peak
4	255.04	42.45	-3.55	46.00	53.19	19.40	1.68	31.82	155	289	Peak
5	499.48	30.05	-15.95	46.00	35.78	23.48	2.39	31.60	---	---	Peak
6	663.41	35.04	-10.96	46.00	39.55	24.95	2.79	32.25	---	---	Peak
7	2656.30	48.29			72.60	27.84	5.40	57.55	---	---	Peak
8	2972.00	40.16	-33.84	74.00	62.41	28.52	6.55	57.32	---	---	Peak
9	4474.00	43.17	-30.83	74.00	61.54	30.65	8.21	57.23	---	---	Peak
10	7000.00	46.80	-27.20	74.00	60.40	35.10	10.10	58.80	---	---	Peak
11	8782.00	50.33	-23.67	74.00	60.66	37.84	10.87	59.04	---	---	Peak
12	10882.00	50.93	-23.07	74.00	57.10	40.45	11.81	58.43	162	71	Peak
13	11482.00	50.13	-23.87	74.00	54.67	41.18	12.04	57.76	---	---	Peak



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Dec. 23, 2018	Feb. 26, 2019	Dec. 22, 2019	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2SH	00103912	9kHz~30MHz	Oct. 18, 2018	Feb. 26, 2019	Oct. 17, 2019	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Dec. 23, 2018	Feb. 26, 2019	Dec. 22, 2019	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Jul. 18, 2018	Feb. 26, 2019	Jul. 17, 2019	Conduction (CO01-SZ)
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	Apr. 19, 2018	Feb. 22, 2019	Apr. 18, 2019	Radiation (03CH03-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150246	10Hz~44GHz;	Apr. 19, 2018	Feb. 22, 2019	Apr. 18, 2019	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz~2GHz	Apr. 19, 2018	Feb. 22, 2019	Apr. 18, 2019	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1355	1GHz~18GHz	Mar. 29, 2018	Feb. 22, 2019	Mar. 28, 2019	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz~40GHz	Mar. 30, 2018	Feb. 22, 2019	Mar. 29, 2019	Radiation (03CH03-SZ)
LF Amplifier	Burgeon	BPA-530	102210	0.01Hz ~3000MHz	Oct. 18, 2018	Feb. 22, 2019	Oct. 17, 2019	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-R	1943528	1GHz~18GHz	Oct. 18, 2018	Feb. 22, 2019	Oct. 17, 2019	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 30, 2018	Feb. 22, 2019	Jul. 30, 2019	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	NCR	Feb. 22, 2019	NCR	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Feb. 22, 2019	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Feb. 22, 2019	NCR	Radiation (03CH03-SZ)



5. Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	
---	--

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	
---	--

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	
---	--