

GSM850_GPRS10_Left Cheek_251

DUT: EUT

Communication System: GPRS 850-2solt; Frequency: 848.8 MHz;Duty Cycle: 1:4

Medium: H835 Medium parameters used: $f = 849$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 40.5$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.25, 6.25, 6.25); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.756 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.2 V/m; Power Drift = 0.055 dB

Peak SAR (extrapolated) = 0.935 W/kg

SAR(1 g) = 0.641 mW/g; SAR(10 g) = 0.426 mW/g

Maximum value of SAR (measured) = 0.730 mW/g

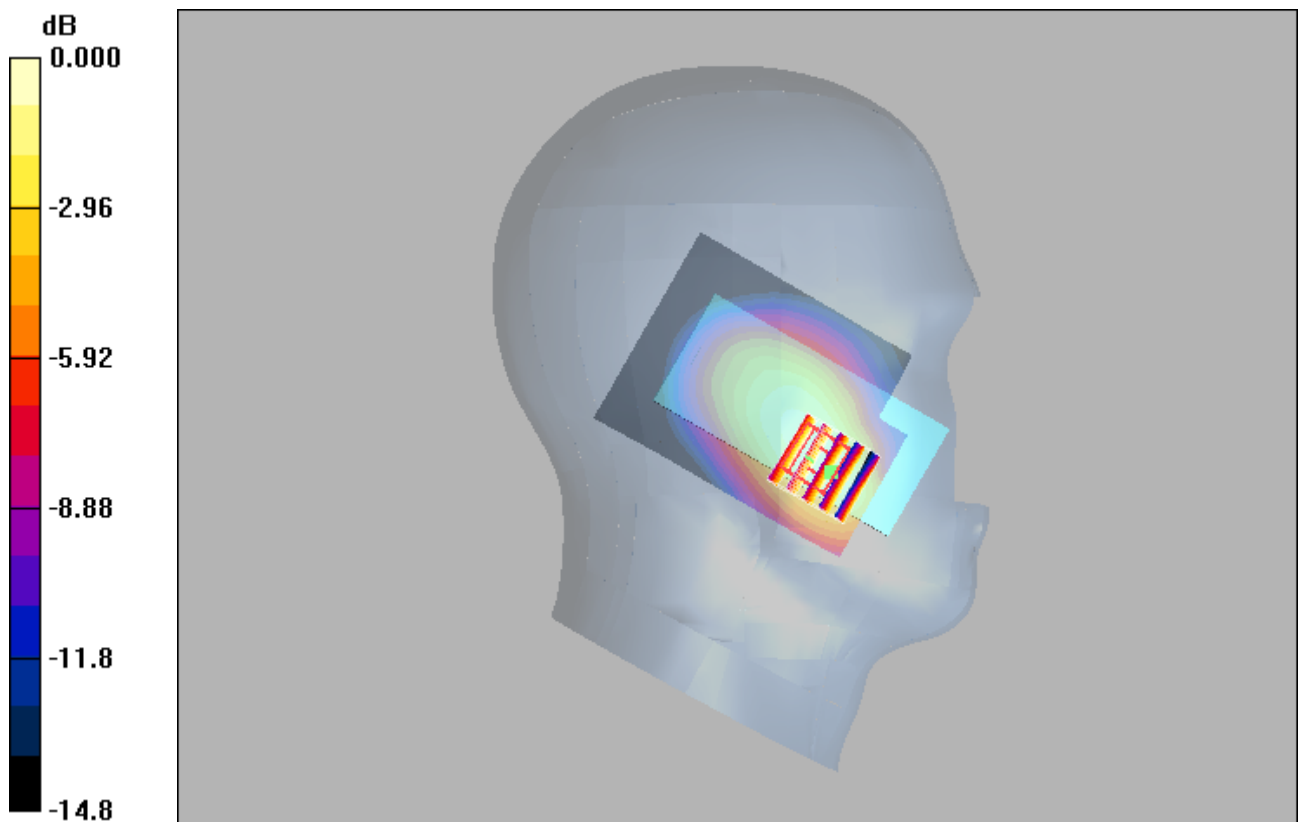

0 dB = 0.730mW/g

GSM1900_GPRS11_Left Cheek_810

DUT: EUT

Communication System: GPRS1900-3slots; Frequency: 1909.8 MHz; Duty Cycle: 1:2.67

Medium: H1900 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.34$ mho/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.11, 5.11, 5.11); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x71x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.915 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.73 V/m; Power Drift = -0.037 dB

Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.743 mW/g; SAR(10 g) = 0.422 mW/g

Maximum value of SAR (measured) = 0.892 mW/g

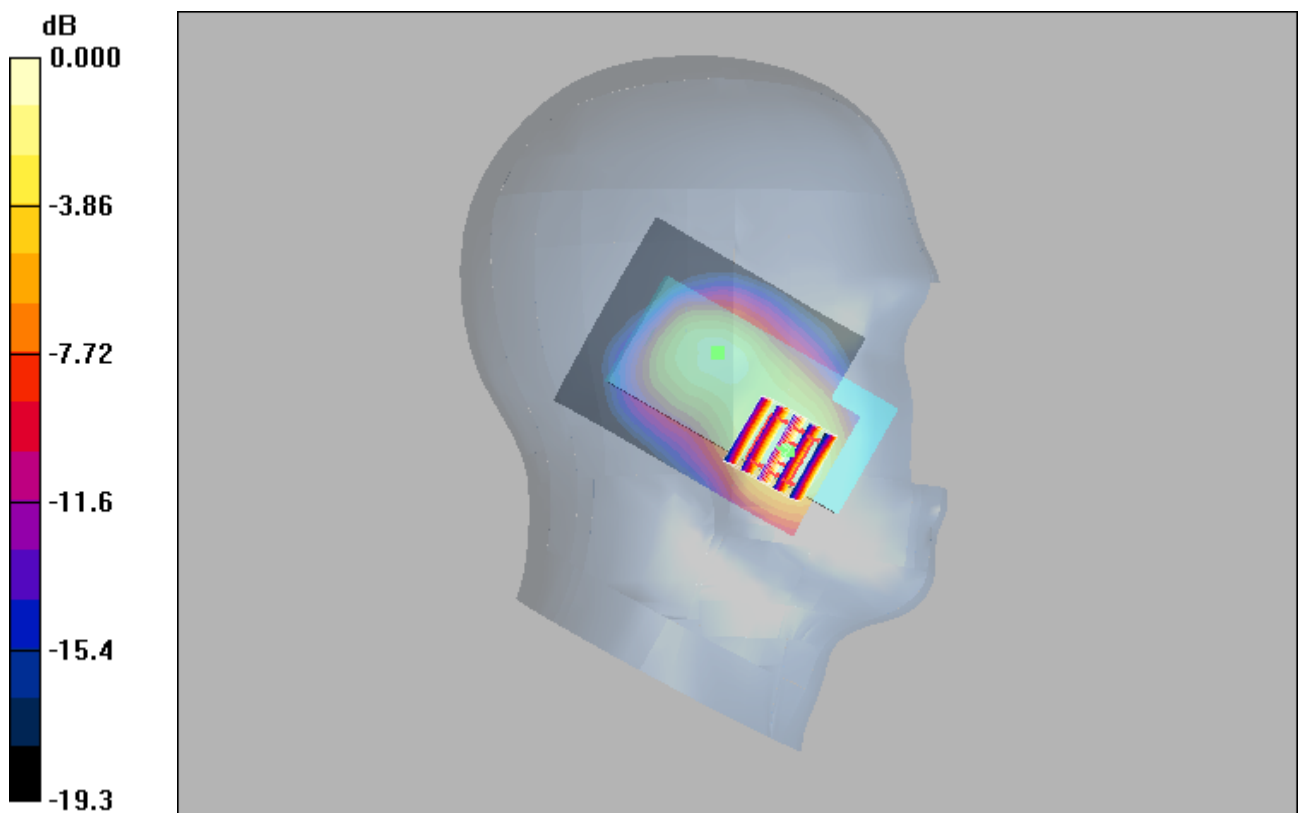

0 dB = 0.892mW/g

WCDMA II_RMC12.2K_Left Cheek_9262

DUT: EUT


Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium: H1900 Medium parameters used : $f = 1852.4$ MHz; $\sigma = 1.32$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.11, 5.11, 5.11); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x71x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.35 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 11.2 V/m; Power Drift = -0.064 dB
Peak SAR (extrapolated) = 1.81 W/kg
SAR(1 g) = 1.1 mW/g; SAR(10 g) = 0.623 mW/g
Maximum value of SAR (measured) = 1.33 mW/g

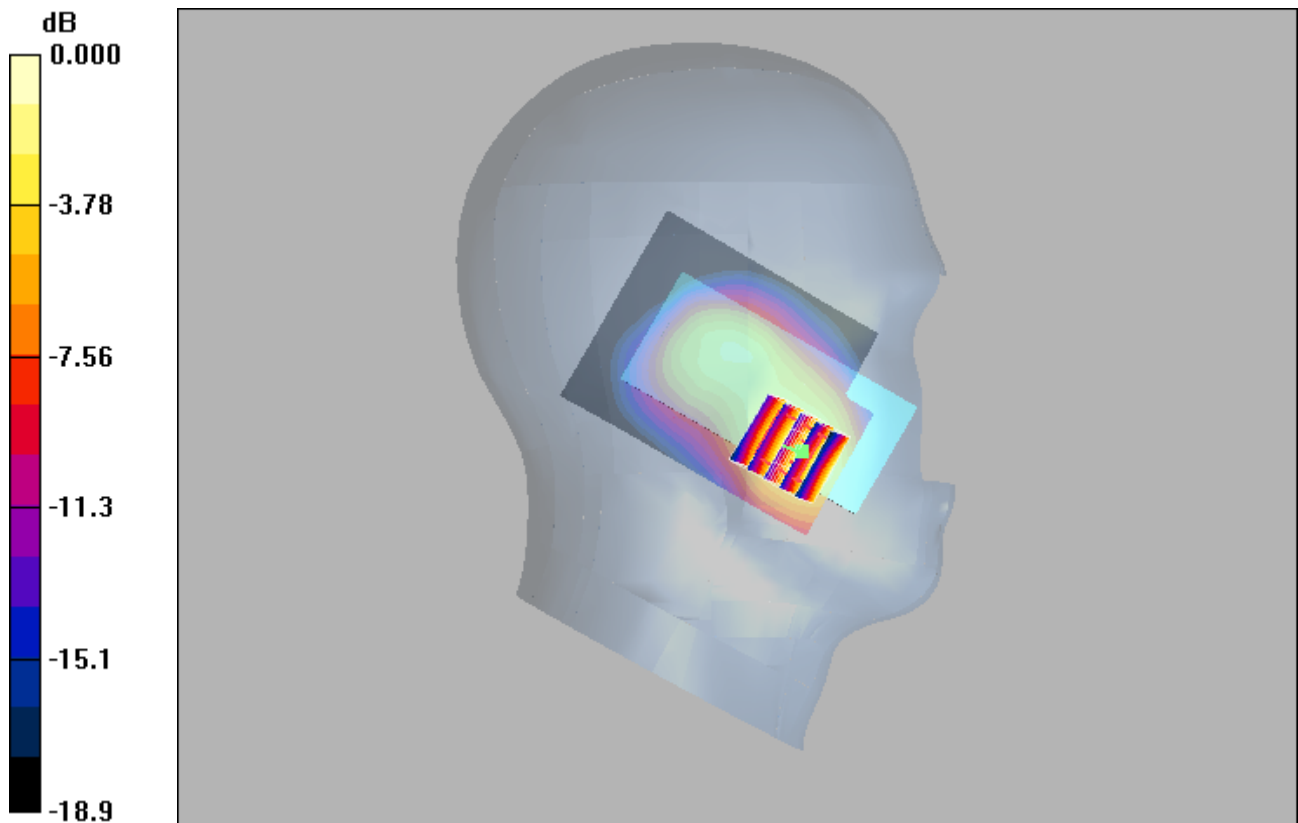

0 dB = 1.33mW/g

WCDMA V_RMC12.2K_Left Cheek_4132

DUT: EUT


Communication System: WCDMA Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1
 Medium: H835 Medium parameters used : $f = 826.4 \text{ MHz}$; $\sigma = 0.918 \text{ mho/m}$; $\epsilon_r = 40.6$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.25, 6.25, 6.25); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x71x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.524 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 9.56 V/m; Power Drift = 0.198 dB
 Peak SAR (extrapolated) = 0.695 W/kg
SAR(1 g) = 0.457 mW/g; SAR(10 g) = 0.298 mW/g
 Maximum value of SAR (measured) = 0.531 mW/g

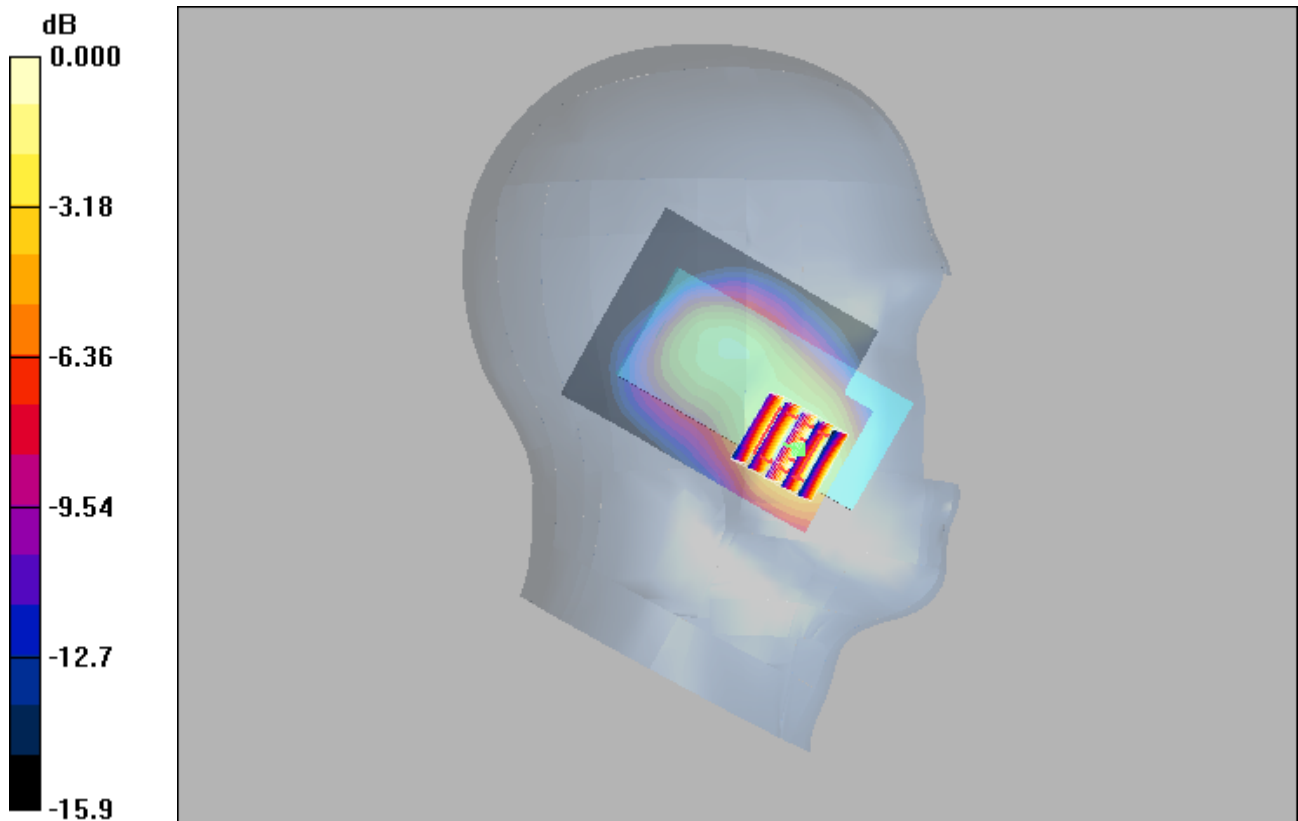

0 dB = 0.531mW/g

LTE 2_QPSK20M_1_99_Left Cheek_18700

DUT: EUT

Communication System: LTE Band 2; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: H1900 Medium parameters used : $f = 1860$ MHz; $\sigma = 1.33$ mho/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.11, 5.11, 5.11); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.45 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.1 V/m; Power Drift = -0.027 dB

Peak SAR (extrapolated) = 1.91 W/kg

SAR(1 g) = 1.14 mW/g; SAR(10 g) = 0.645 mW/g

Maximum value of SAR (measured) = 1.39 mW/g

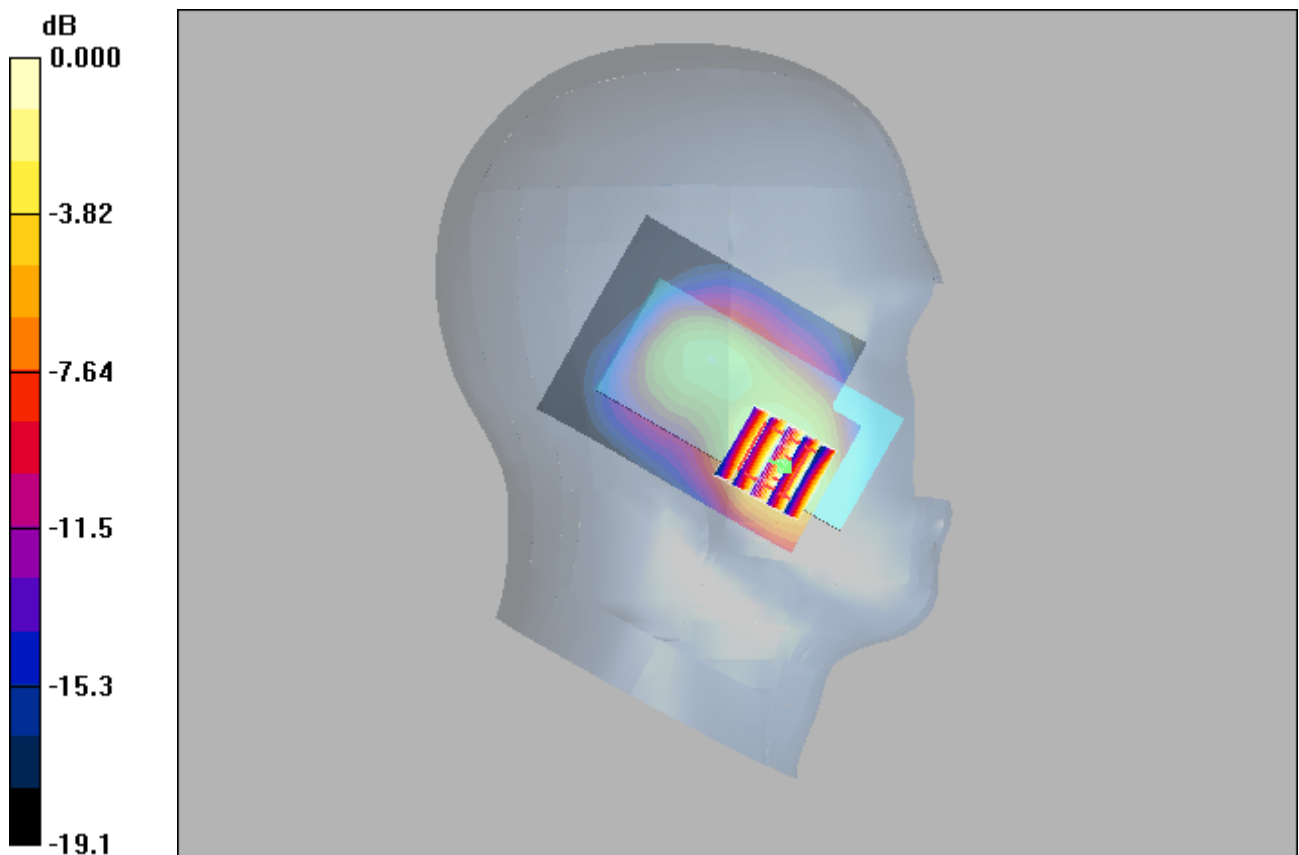

0 dB = 1.39mW/g

LTE 4_QPSK20M_1_99_Left Cheek_20300

DUT: EUT

Communication System: LTE Band 4&20M; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: H1750 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.37, 5.37, 5.37); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.35 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.2 V/m; Power Drift = 0.003 dB

Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 1.08 mW/g; SAR(10 g) = 0.630 mW/g

Maximum value of SAR (measured) = 1.29 mW/g

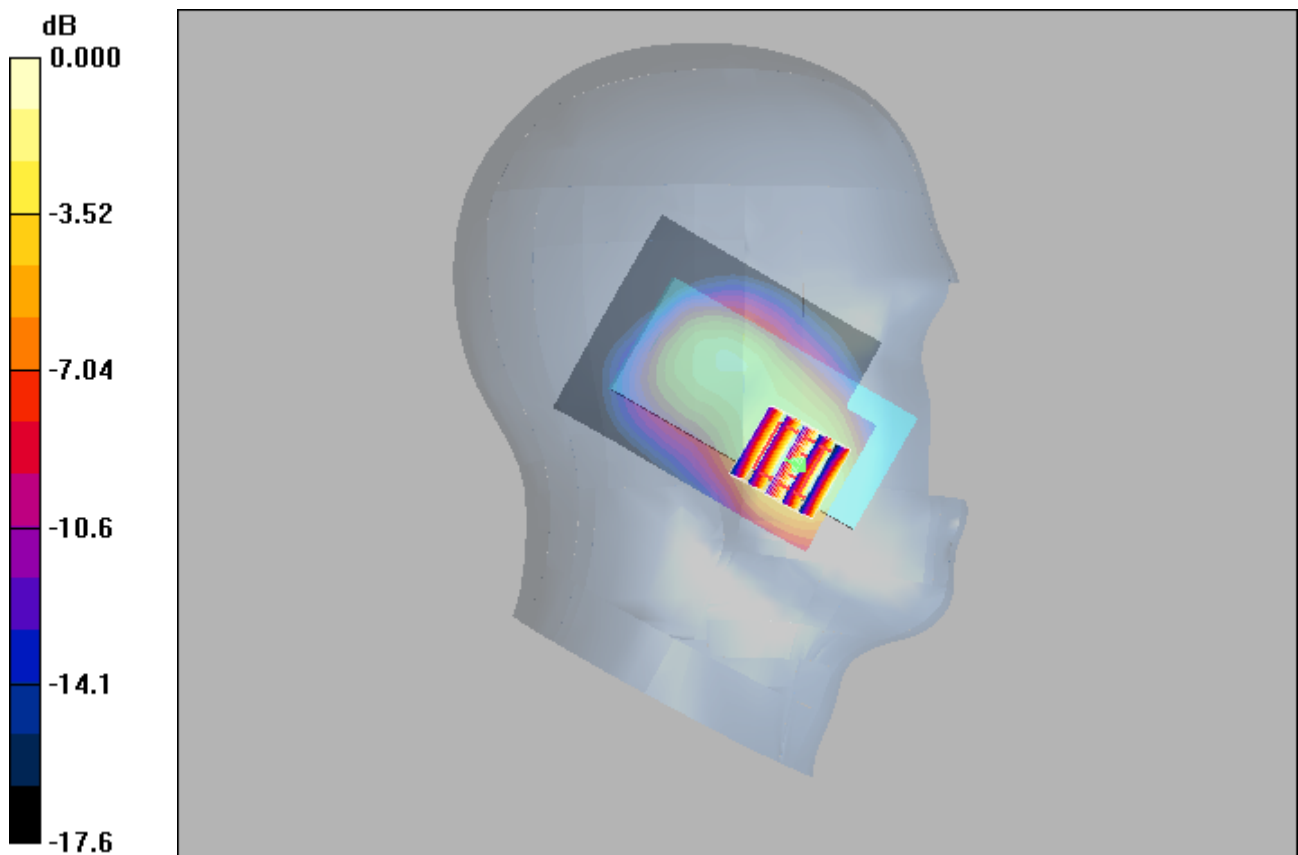

0 dB = 1.29mW/g

LTE 5_QPSK10M_1_49_Left Cheek_20600

DUT: EUT

Communication System: LTE Band5; Frequency: 844 MHz; Duty Cycle: 1:1

Medium: H835 Medium parameters used: $f = 844$ MHz; $\sigma = 0.926$ mho/m; $\epsilon_r = 40.5$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.25, 6.25, 6.25); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x71x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.458 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.53 V/m; Power Drift = -0.060 dB

Peak SAR (extrapolated) = 0.576 W/kg

SAR(1 g) = 0.383 mW/g; SAR(10 g) = 0.254 mW/g

Maximum value of SAR (measured) = 0.449 mW/g

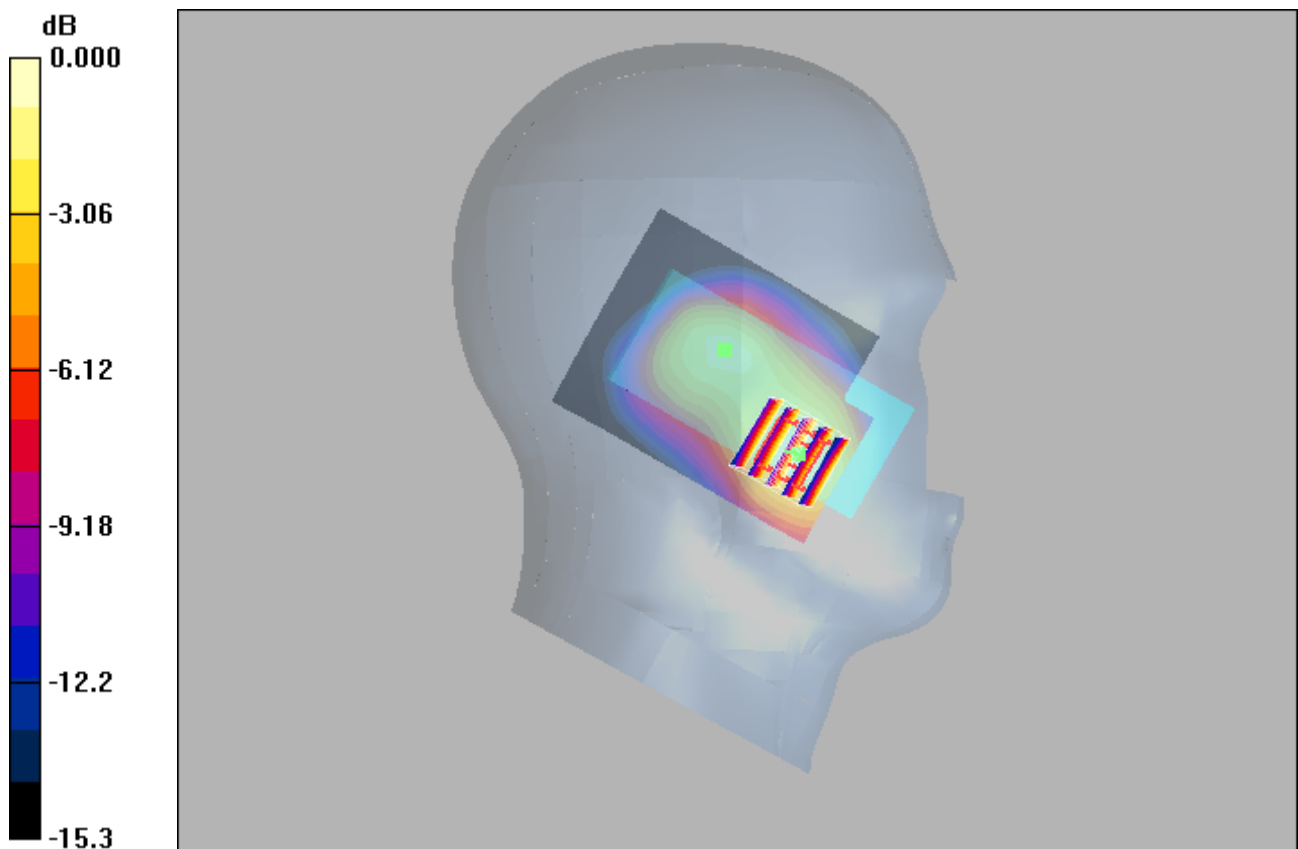

0 dB = 0.449mW/g

LTE 7_QPSK20M_1_0_Left Cheek_20850

DUT: EUT


Communication System: LTE Band 7&20M; Frequency: 2510 MHz;Duty Cycle: 1:1
 Medium: H2600 Medium parameters used: $f = 2510$ MHz; $\sigma = 1.89$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.68, 4.68, 4.68); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x91x1): Measurement grid: dx=12mm, dy=12mm
 Maximum value of SAR (interpolated) = 0.644 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 7.95 V/m; Power Drift = -0.030 dB
 Peak SAR (extrapolated) = 0.875 W/kg
SAR(1 g) = 0.505 mW/g; SAR(10 g) = 0.281 mW/g
 Maximum value of SAR (measured) = 0.614 mW/g

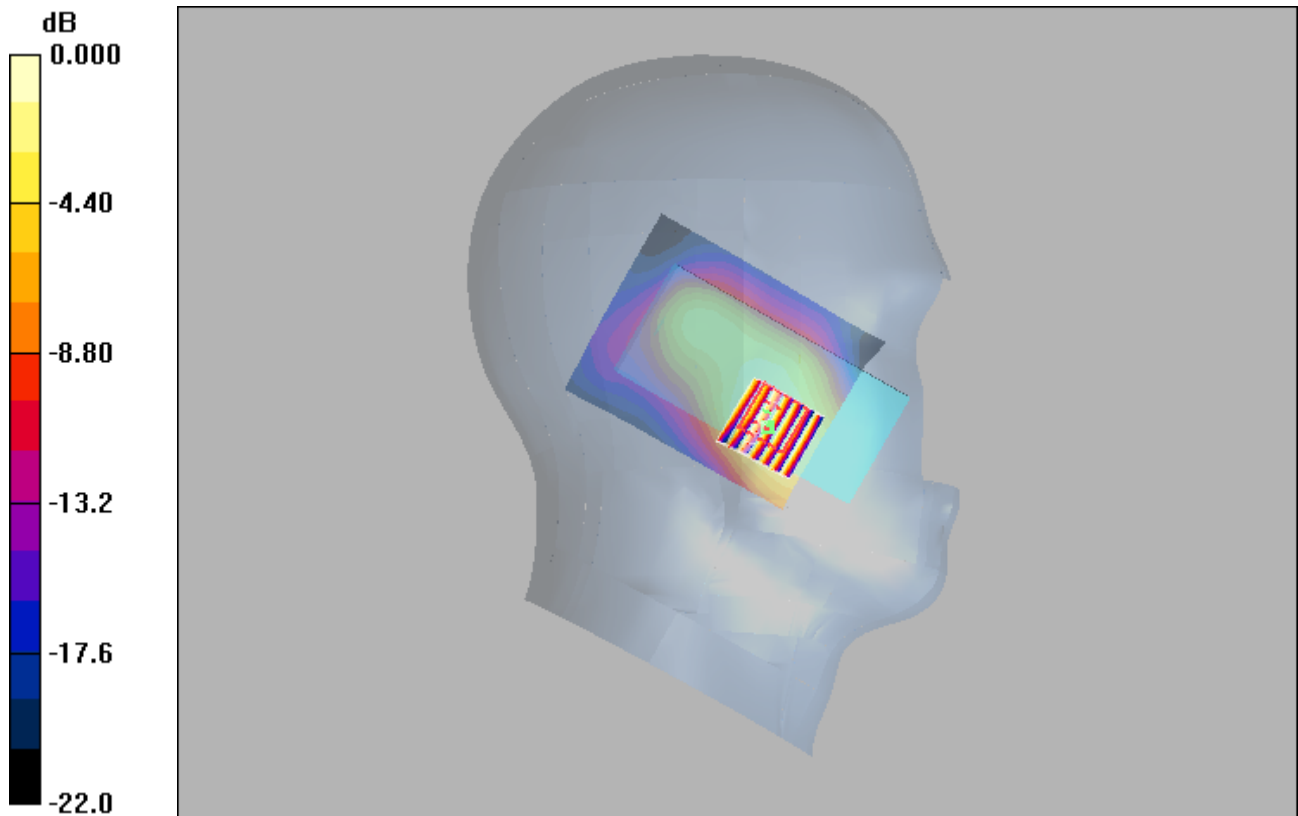

0 dB = 0.614mW/g

EDR_DH5_Left Tilted_10mm_78

DUT: EUT

Communication System: Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.84$ mho/m; $\epsilon_r = 38$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.68, 4.68, 4.68); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (81x91x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.019 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.35 V/m; Power Drift = 0.042 dB

Peak SAR (extrapolated) = 0.043 W/kg

SAR(1 g) = 0.015 mW/g; SAR(10 g) = 0.00626 mW/g

Maximum value of SAR (measured) = 0.021 mW/g

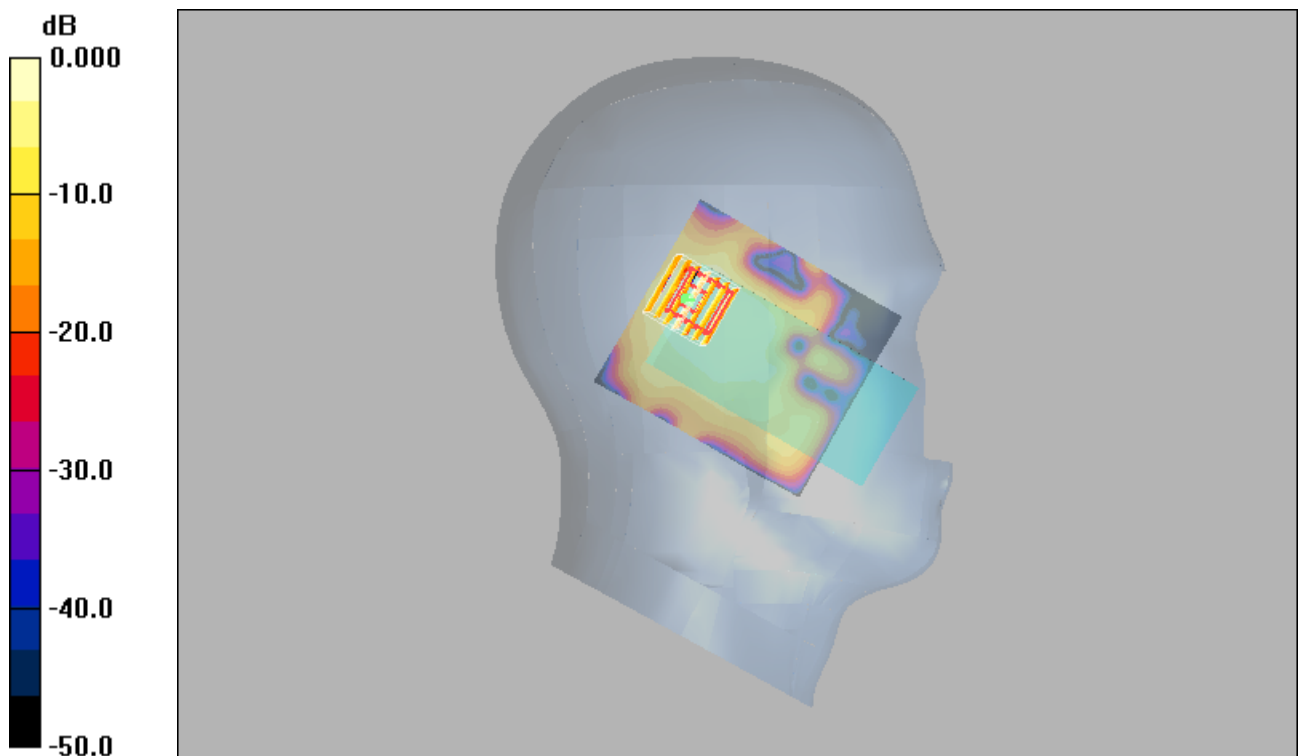

0 dB = 0.021mW/g

GSM850_GPRS10_Rear Face_10mm_251

DUT: EUT

Communication System: GPRS 850-2solt; Frequency: 848.8 MHz;Duty Cycle: 1:4

Medium: H835 Medium parameters used: $f = 849 \text{ MHz}$; $\sigma = 0.93 \text{ mho/m}$; $\epsilon_r = 40.5$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.25, 6.25, 6.25); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x61x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 1.13 mW/g



Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 35.1 V/m; Power Drift = -0.034 dB

Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 0.982 mW/g; SAR(10 g) = 0.680 mW/g

Maximum value of SAR (measured) = 1.11 mW/g

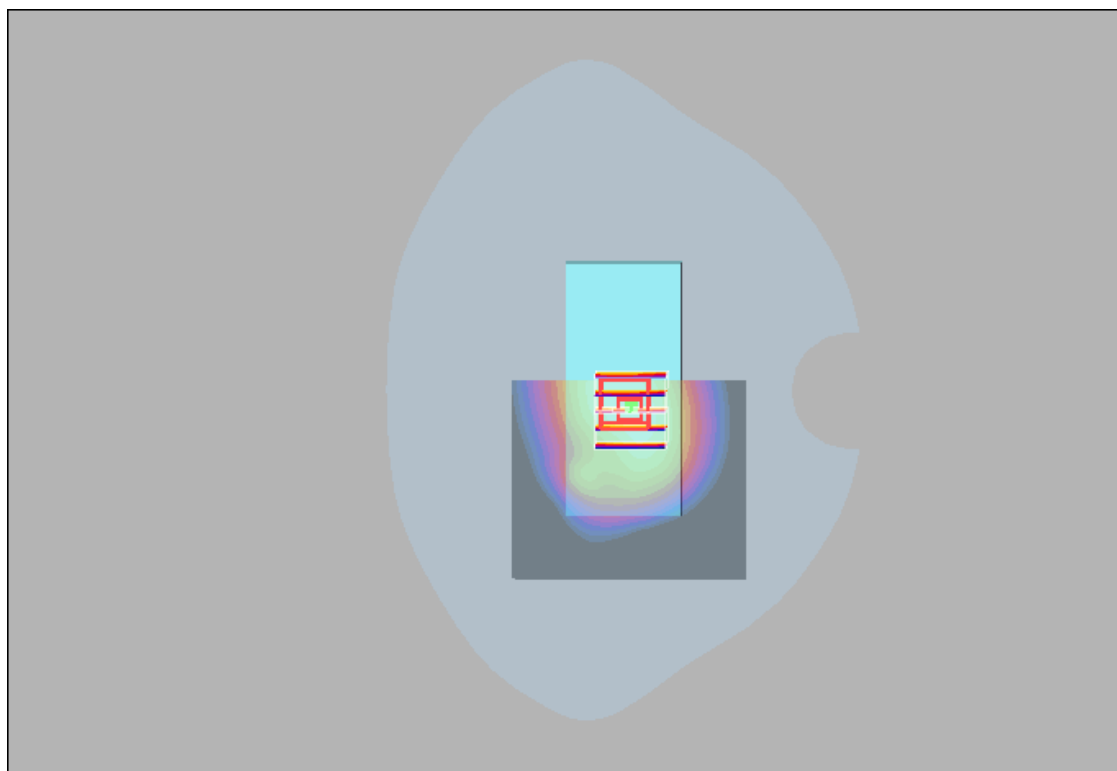

0 dB = 1.11mW/g

GSM1900_GPRS11_Rear Face_10mm_661

DUT: EUT

Communication System: GPRS1900-3slots; Frequency: 1880 MHz;Duty Cycle: 1:2.67

Medium: H1900 Medium parameters used : $f = 1880 \text{ MHz}$; $\sigma = 1.33 \text{ mho/m}$; $\epsilon_r = 39$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.11, 5.11, 5.11); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x61x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 1.24 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.0 V/m; Power Drift = -0.018 dB

Peak SAR (extrapolated) = 1.70 W/kg

SAR(1 g) = 0.980 mW/g; SAR(10 g) = 0.540 mW/g

Maximum value of SAR (measured) = 1.19 mW/g

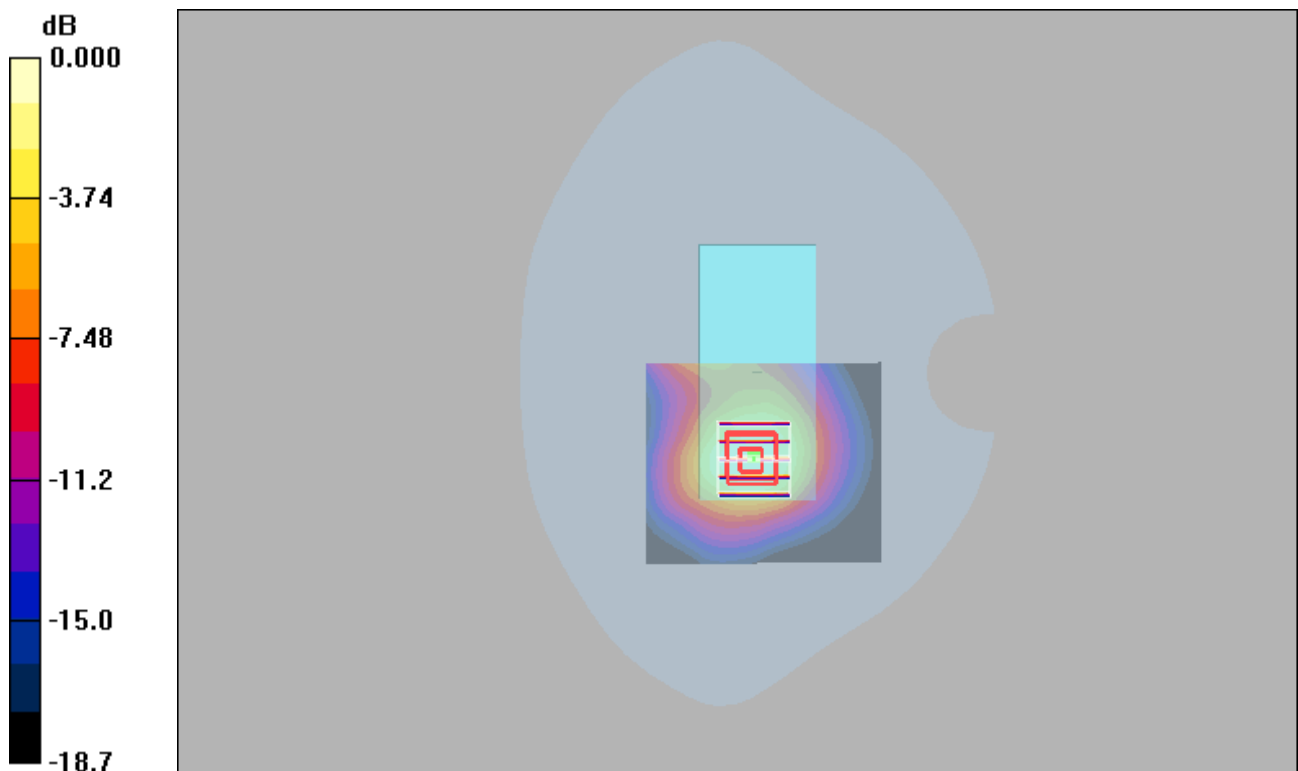

0 dB = 1.19mW/g

WCDMA II_RMC12.2K_Rear Face_10mm_9262

DUT: EUT


Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium: H1900 Medium parameters used : $f = 1852.4$ MHz; $\sigma = 1.32$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.11, 5.11, 5.11); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x61x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.57 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 15.4 V/m; Power Drift = 0.091 dB
Peak SAR (extrapolated) = 2.15 W/kg
SAR(1 g) = 1.22 mW/g; SAR(10 g) = 0.669 mW/g
Maximum value of SAR (measured) = 1.49 mW/g

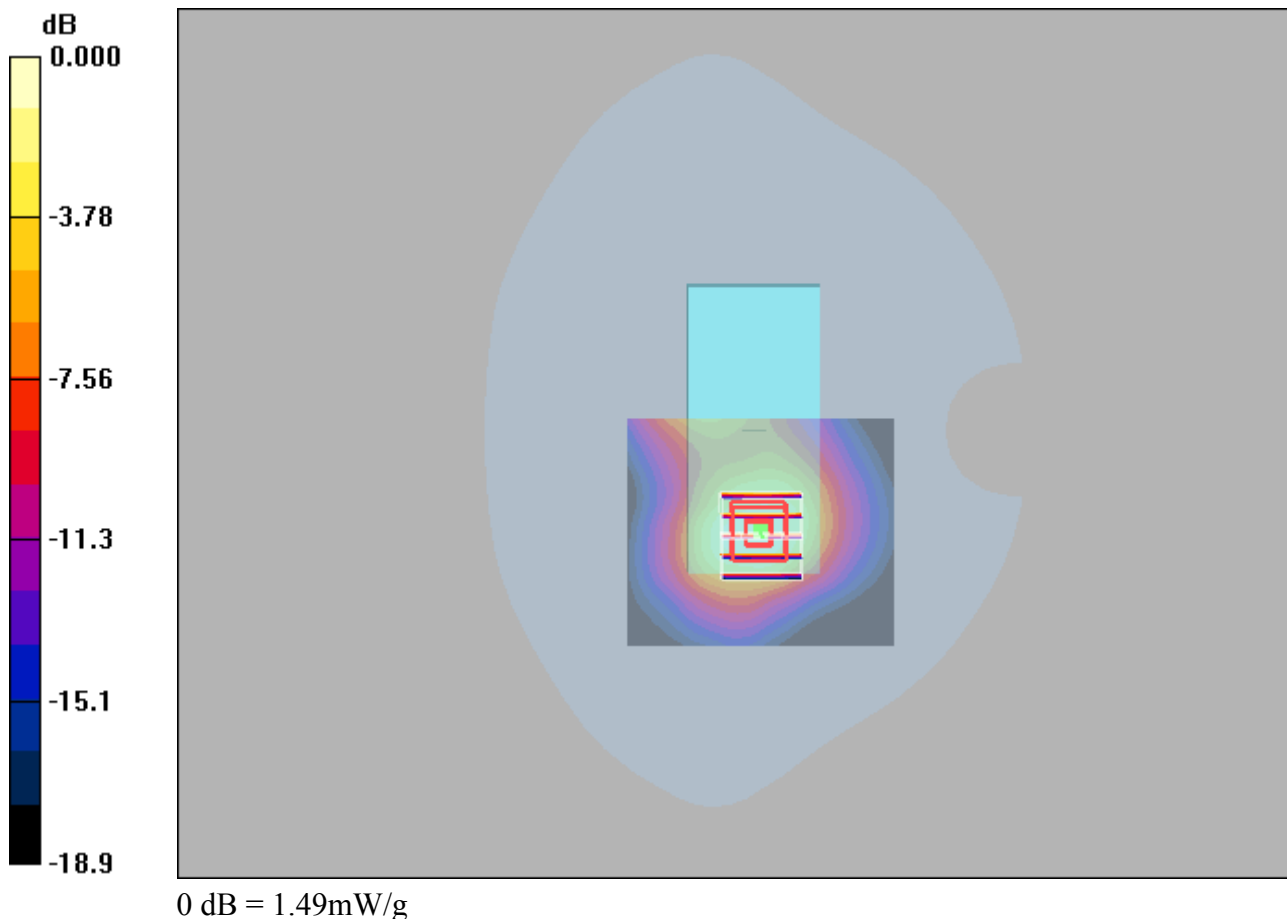

WCDMA V_RMC12.2K_Rear Face_10mm_4132

DUT: EUT


Communication System: WCDMA Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1
Medium: H835 Medium parameters used : $f = 826.4$ MHz; $\sigma = 0.918$ mho/m; $\epsilon_r = 40.6$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.25, 6.25, 6.25); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x61x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.672 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 26.8 V/m; Power Drift = -0.084 dB
Peak SAR (extrapolated) = 0.818 W/kg
SAR(1 g) = 0.581 mW/g; SAR(10 g) = 0.402 mW/g
Maximum value of SAR (measured) = 0.659 mW/g

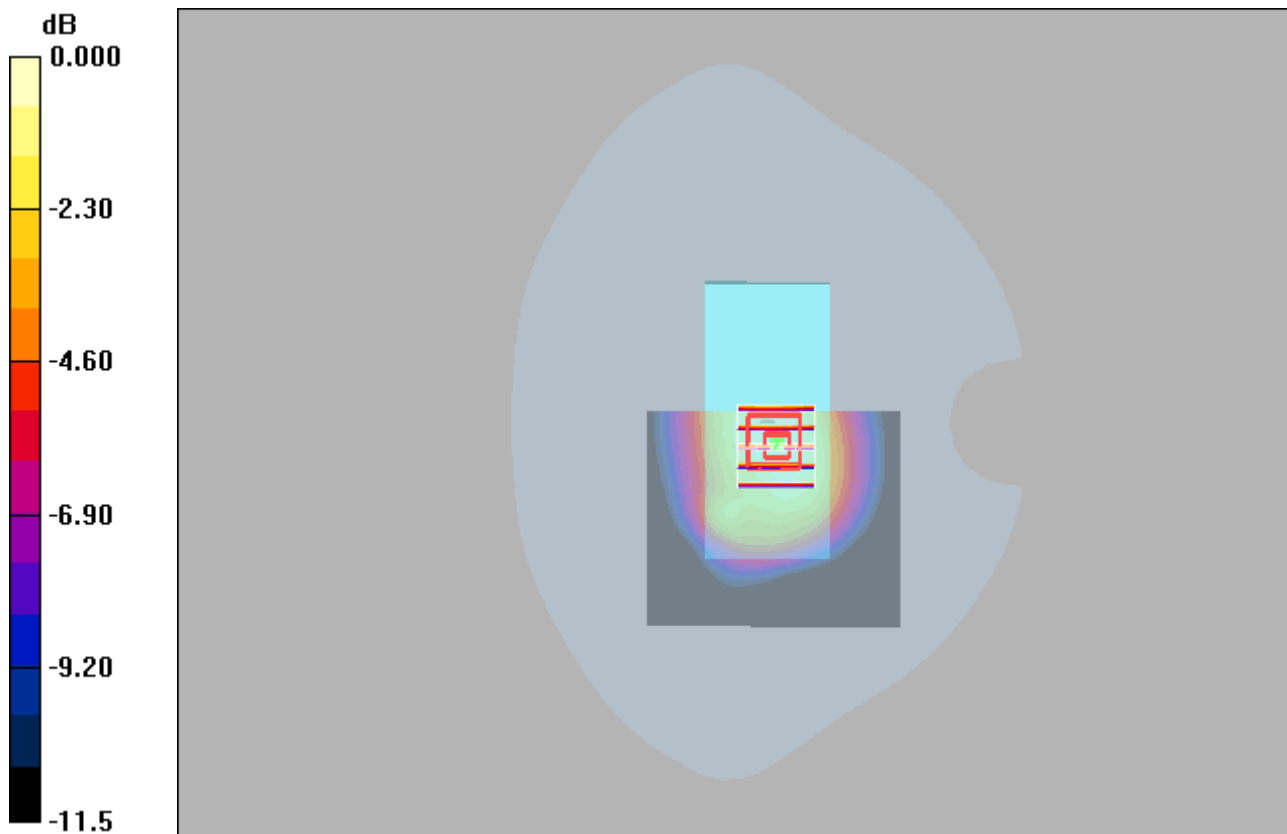

0 dB = 0.659mW/g

LTE 2_QPSK20M_1_99_Front Face_10mm_18700

DUT: EUT

Communication System: LTE Band 2; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: H1900 Medium parameters used : $f = 1860 \text{ MHz}$; $\sigma = 1.33 \text{ mho/m}$; $\epsilon_r = 39$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.11, 5.11, 5.11); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x61x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 1.50 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.5 V/m; Power Drift = -0.084 dB

Peak SAR (extrapolated) = 2.03 W/kg

SAR(1 g) = 1.14 mW/g; SAR(10 g) = 0.625 mW/g

Maximum value of SAR (measured) = 1.41 mW/g

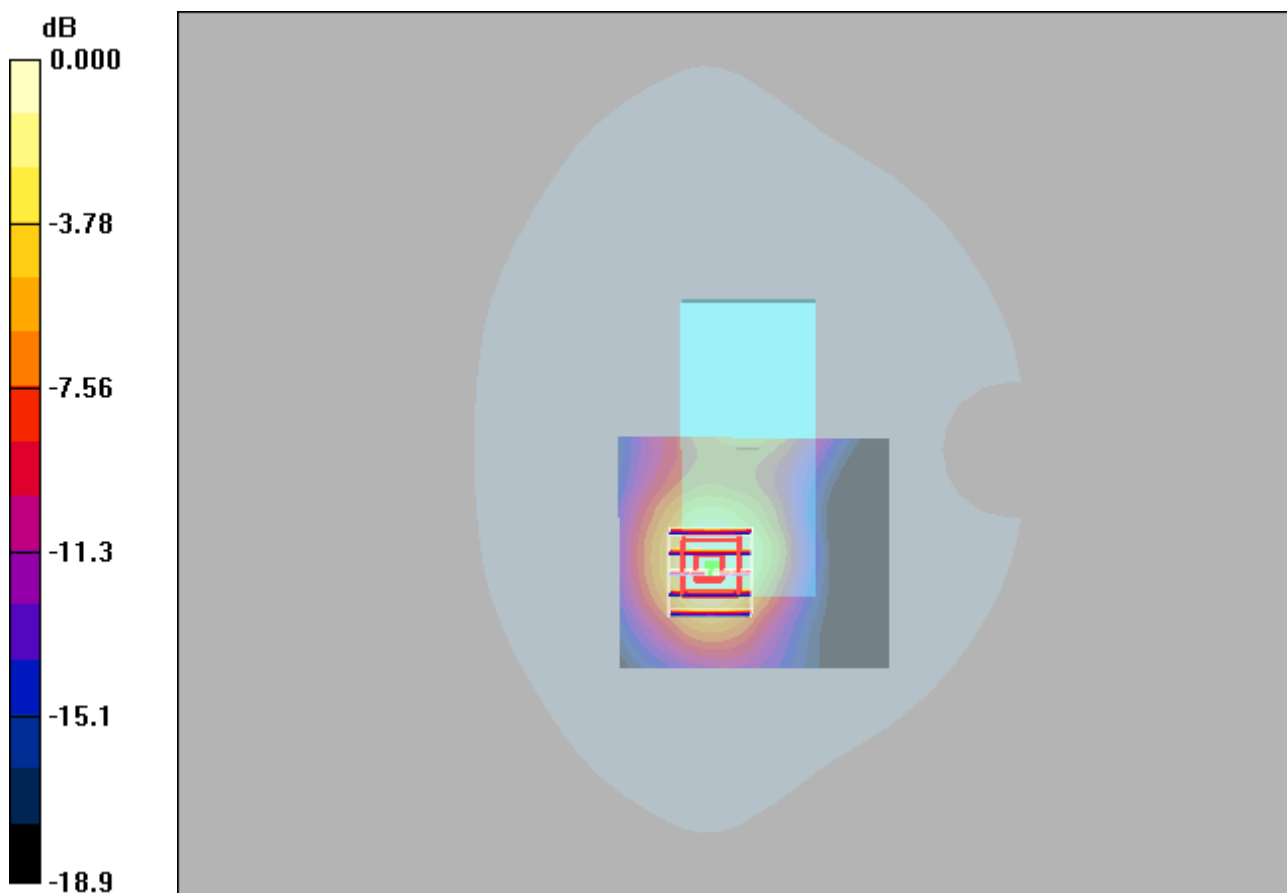

0 dB = 1.41mW/g

LTE 4_QPSK20M_1_99_Rear Face_10mm_20175

DUT: EUT


Communication System: LTE Band 4&20M; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium: H1750 Medium parameters used : $f = 1732.5$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.37, 5.37, 5.37); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x61x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.82 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 17.1 V/m; Power Drift = -0.050 dB
Peak SAR (extrapolated) = 2.49 W/kg
SAR(1 g) = 1.36 mW/g; SAR(10 g) = 0.734 mW/g
Maximum value of SAR (measured) = 1.68 mW/g

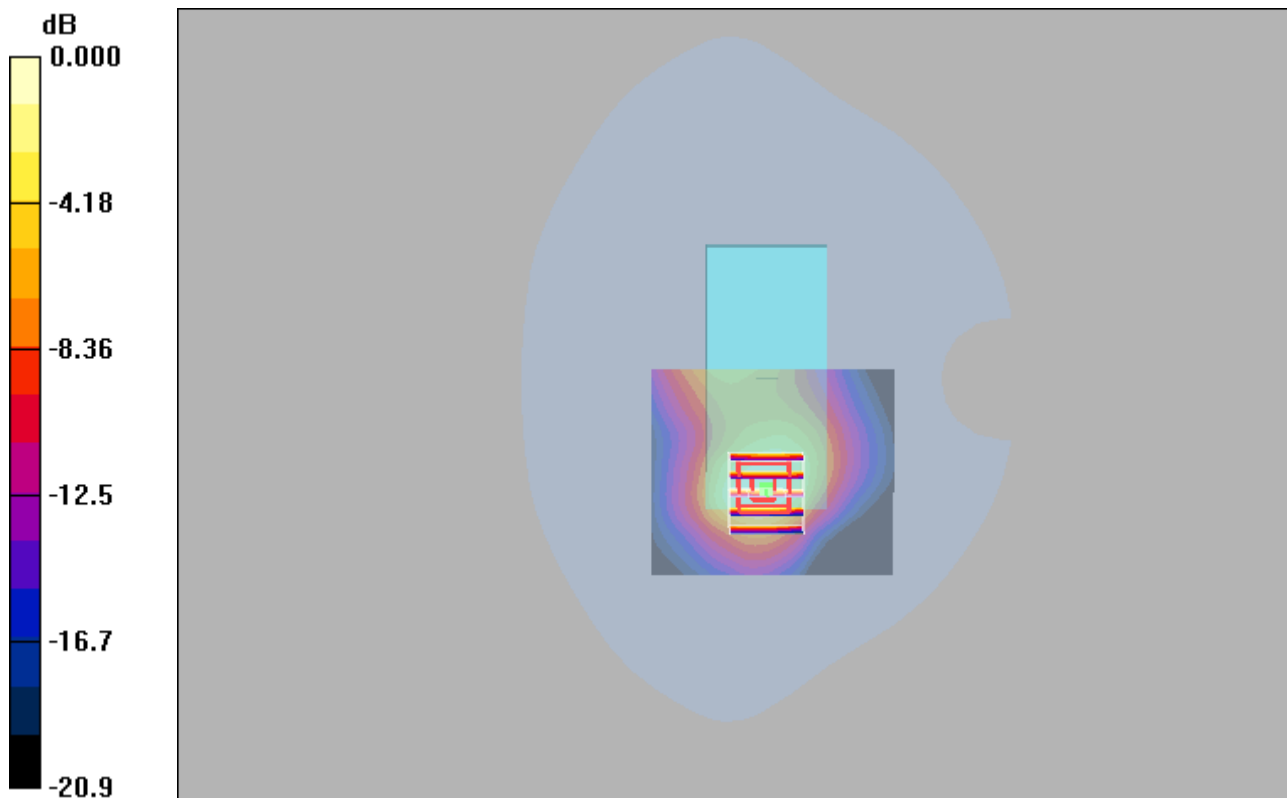

0 dB = 1.68mW/g

LTE 5_QPSK10M_1_49_Rear Face_10mm_20600

DUT: EUT

Communication System: LTE Band5; Frequency: 844 MHz; Duty Cycle: 1:1

Medium: H835 Medium parameters used: $f = 844 \text{ MHz}$; $\sigma = 0.926 \text{ mho/m}$; $\epsilon_r = 40.5$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.25, 6.25, 6.25); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x61x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.525 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.3 V/m; Power Drift = -0.072 dB

Peak SAR (extrapolated) = 0.664 W/kg

SAR(1 g) = 0.460 mW/g; SAR(10 g) = 0.314 mW/g

Maximum value of SAR (measured) = 0.525 mW/g

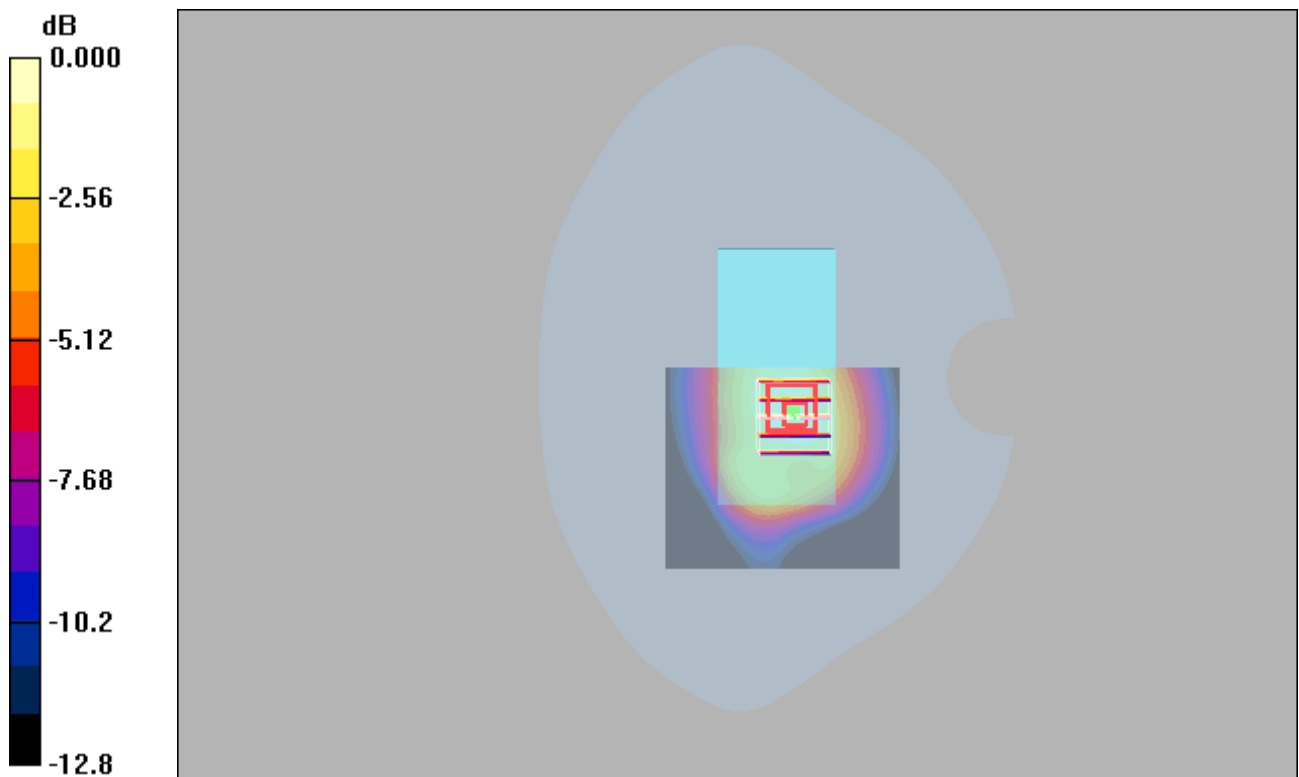

0 dB = 0.525mW/g

LTE 7_QPSK20M_1_0_Rear Face_10mm_21350

DUT: EUT


Communication System: LTE Band 7&20M; Frequency: 2560 MHz; Duty Cycle: 1:1
Medium: H2600 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.89$ mho/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.53, 4.53, 4.53); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (81x61x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 1.52 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 16.1 V/m; Power Drift = 0.097 dB
Peak SAR (extrapolated) = 2.32 W/kg
SAR(1 g) = 1.08 mW/g; SAR(10 g) = 0.491 mW/g
Maximum value of SAR (measured) = 1.43 mW/g

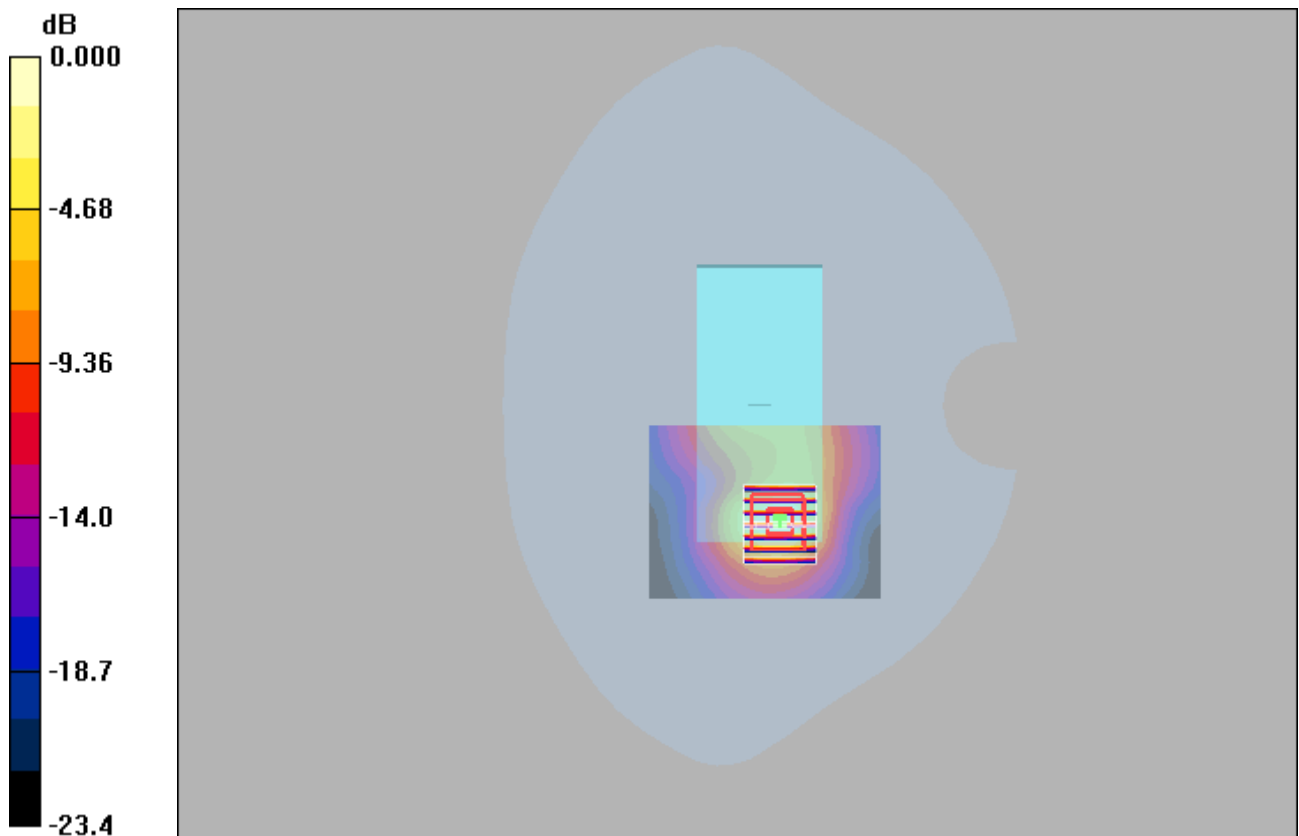

0 dB = 1.43mW/g

EDR_DH5_Front Face_10mm_78

DUT: EUT

Communication System: Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.84$ mho/m; $\epsilon_r = 38$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.68, 4.68, 4.68); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x61x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.007 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.34 V/m; Power Drift = -0.026 dB

Peak SAR (extrapolated) = 0.010 W/kg

SAR(1 g) = 0.00518 mW/g; SAR(10 g) = 0.00252 mW/g

Maximum value of SAR (measured) = 0.007 mW/g

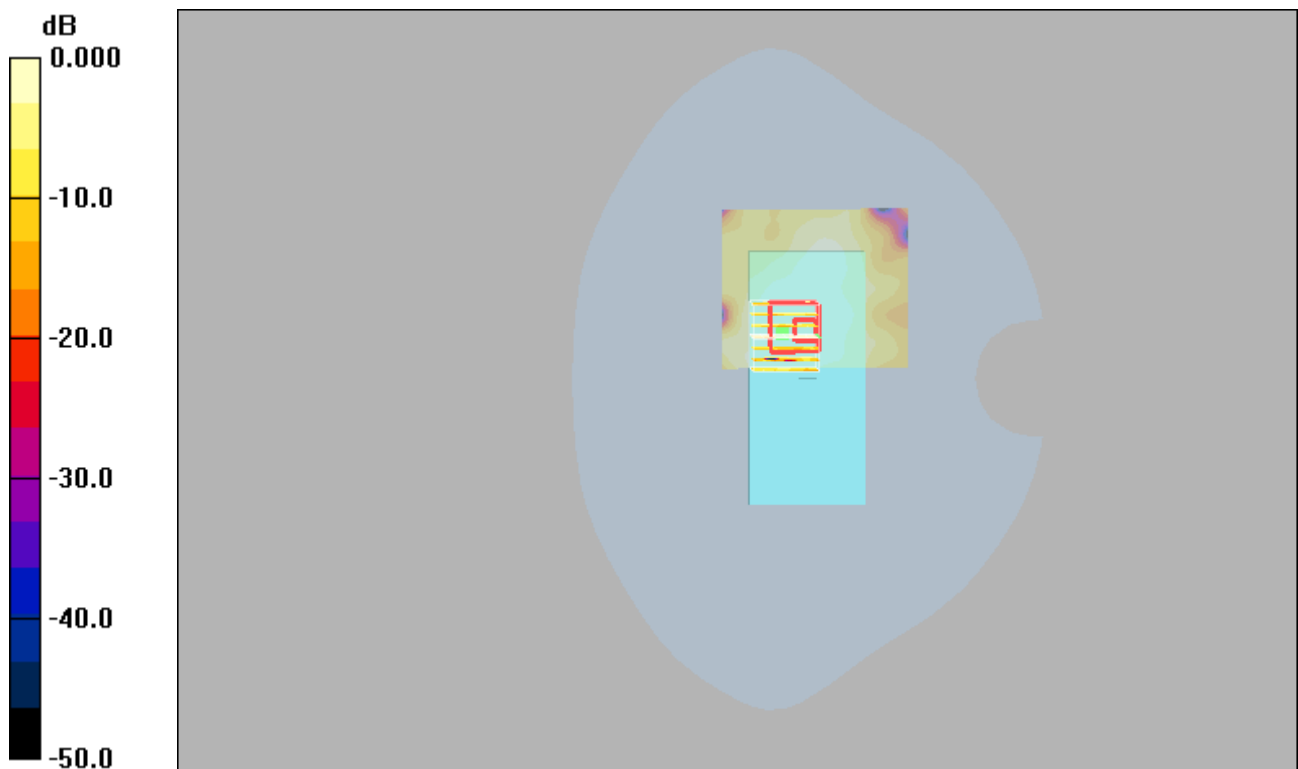

0 dB = 0.007mW/g