

RF TEST REPORT



Report No.: 16071342-FCC-R2

Supersede Report No.: N/A

Applicant	BLU Products, Inc.	
Product Name	Smartphone	
Model No.	LIFE ONE X2 MINI	
Serial No.	N/A	
Test Standard	FCC Part 15.247: 2015, ANSI C63.10: 2013	
Test Date	November 26 to December 12, 2016	
Issue Date	December 13, 2016	
Test Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	
Equipment complied with the specification	<input checked="" type="checkbox"/>	
Equipment did not comply with the specification	<input type="checkbox"/>	
Loren Luo Test Engineer	David Huang Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report	16071342-FCC-R2
Page	3 of 60

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION.....	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	9
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	10
6.1 ANTENNA REQUIREMENT.....	10
6.2 CHANNEL SEPARATION	11
6.3 20DB BANDWIDTH.....	15
6.4 PEAK OUTPUT POWER.....	19
6.5 NUMBER OF HOPPING CHANNEL.....	23
6.6 TIME OF OCCUPANCY (DWELL TIME)	25
6.7 BAND EDGE & RESTRICTED BAND	29
6.8 AC POWER LINE CONDUCTED EMISSIONS.....	37
6.9 RADIATED SPURIOUS EMISSIONS & RESTRICTED BAND	43
ANNEX A. TEST INSTRUMENT.....	49
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....	50
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	55
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	59
ANNEX E. DECLARATION OF SIMILARITY.....	60

1. Report Revision History

Report No.	Report Version	Description	Issue Date
16071342-FCC-R2	NONE	Original	December 13, 2016

2. Customer information

Applicant Name	BLU Products, Inc.
Applicant Add	10814 NW 33rd St # 100 Doral, FL 33172
Manufacturer	BLU Products, Inc.
Manufacturer Add	10814 NW 33rd St # 100 Doral, FL 33172

3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

4. Equipment under Test (EUT) Information

Description of EUT:	Smartphone
Main Model:	LIFE ONE X2 MINI
Serial Model:	N/A
Date EUT received:	November 25, 2016
Test Date(s):	November 26 to December 12, 2016
Equipment Category :	DSS
Antenna Gain:	GSM850: -0.5dBi PCS1900: 0.5dBi UMTS-FDD Band V: -0.5dBi UMTS-FDD Band IV: 0.5dBi UMTS-FDD Band II: 0.5dBi LTE Band II: 0.5dBi LTE Band IV: 0.5dBi LTE Band VII: 0.8dBi LTE Band XII: -0.5dBi LTE Band XVII: -0.5dBi WIFI: 1.6dBi Bluetooth/BLE:1.6dBi GPS: 0.5dBi
Antenna Type:	PIFA antenna
Type of Modulation:	GSM / GPRS: GMSK EGPRS: GMSK,8PSK UMTS-FDD: QPSK LTE Band: QPSK, 16QAM 802.11b/g/n: DSSS, OFDM Bluetooth: GFSK, π /4DQPSK, 8DPSK BLE: GFSK GPS:BPSK

	GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz
	PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz
	UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz
	UMTS-FDD Band IV TX:1712.4 ~ 1752.6 MHz; RX : 2112.4 ~ 2152.6 MHz
	UMTS-FDD Band II TX:1852.4 ~ 1907.6 MHz; RX: 1932.4 ~ 1987.6 MHz
RF Operating Frequency (ies):	LTE Band II TX: 1850.7 ~ 1909.3MHz; RX : 1930.7 ~ 1989.3 MHz
	LTE Band IV TX: 1710.7 ~ 1754.3 MHz; RX : 2110.7~ 2154.3 MHz
	LTE Band VII TX: 2502.5 ~ 2567.5 MHz; RX : 2622.5 ~ 2687.5 MHz
	LTE Band XII TX:699.7 ~ 715.3 MHz; RX : 729.7~ 745.3MHz
	LTE Band XVII TX: 706.5 ~ 713.5 MHz; RX : 736.5 ~ 743.5 MHz
	WIFI: 802.11b/g/n(20M): 2412-2462 MHz
	WIFI: 802.11n(40M): 2422-2452 MHz
	Bluetooth& BLE: 2402-2480 MHz
	GPS: 1575.42 MHz
Max. Output Power:	6.969dBm
Number of Channels:	GSM 850: 124CH PCS1900: 299CH UMTS-FDD Band V: 102CH UMTS-FDD Band IV: 202CH UMTS-FDD Band II: 277CH WIFI :802.11b/g/n(20M): 11CH WIFI :802.11n(40M): 7CH Bluetooth: 79CH BLE: 40CH GPS:1CH
Port:	USB Port, Earphone Port

Test Report	16071342-FCC-R2
Page	8 of 60

Adapter:
Model: US-BM-1500
Input: AC 100-240V,50/60Hz, 0.25A
Output: DC5V,1550mA
Battery:
Model: C705904300P
Spec: 3.84V,3000mAh,11.52Wh
Charging Limited Voltage: 4.4V

Input Power:

Trade Name : BLU

GPRS/EGPRS Multi-slot class 8/10/12

FCC ID: YHLBLULOX2MN

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.247(a)(1)	Channel Separation	Compliance
§15.247(a)(1)	20 dB Bandwidth	Compliance
§15.247(b)(1)	Peak Output Power	Compliance
§15.247(a)(1)(iii)	Number of Hopping Channel	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(d)	Band Edge& Restricted Band	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions& Restricted Band	Compliance

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-

6. Measurements, Examination And Derived Results

6.1 Antenna Requirement

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has 3 antennas:

A permanently attached PIFA antenna for Bluetooth/BLE/WIFI/GPS, the gain is 1.6dBi for Bluetooth/BLE, the gain is 1.6dBi for WIFI, the gain is 0.5dBi for GPS.

A permanently attached PIFA antenna for GSM/PCS/UMTS, the gain is -0.5dBi for GSM850, 0.5dBi for PCS1900, -0.5dBi for UMTS-FDD Band V, 0.5dBi for UMTS-FDD Band IV, 0.5dBi for UMTS-FDD Band II.

A permanently attached PIFA antenna for LTE Band II/ IV/VII/XII/XVII, the gain is 0.5dBi for LTE Band II, the gain is 0.5dBi for LTE Band IV, the gain is 0.8dBi for LTE Band VII, the gain is -0.5dBi for LTE XII, the gain is -0.5dBi for LTE Band XVII.

The antenna meets up with the ANTENNA REQUIREMENT.


Result: Compliance.

6.2 Channel Separation

Temperature	23°C
Relative Humidity	58%
Atmospheric Pressure	1006mbar
Test date :	December 06, 2016
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§ 15.247(a)(1)	a)	Channel Separation < 20dB BW and 20dB BW < 25KHz ; Channel Separation Limit=25KHz Chanel Separation < 20dB BW and 20dB BW > 25kHz ; Channel Separation Limit=2/3 20dB BW	<input checked="" type="checkbox"/>

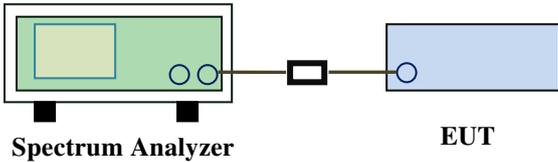Test Setup	 <p style="text-align: center;">Spectrum Analyzer EUT</p>
------------	--

Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none"> - The EUT must have its hopping function enabled - Span = wide enough to capture the peaks of two adjacent channels - Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span - Video (or Average) Bandwidth (VBW) ≥ RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.
----------------	--

Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A


Test Plot Yes (See below) N/A

Channel Separation measurement result

Type/ Modulation	CH	CH Frequency (MHz)	CH Separation (MHz)	Limit (MHz)	Result
CH Separation GFSK	Low Channel	2402	1.002	0.962	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.002	0.963	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.002	0.967	Pass
	Adjacency Channel	2479			
CH Separation $\pi/4$ DQPSK	Low Channel	2402	1.002	0.854	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.002	0.855	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.002	0.855	Pass
	Adjacency Channel	2479			
CH Separation 8DPSK	Low Channel	2402	1.002	0.862	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.002	0.861	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.002	0.863	Pass
	Adjacency Channel	2479			

Test Plots

Channel Separation measurement result

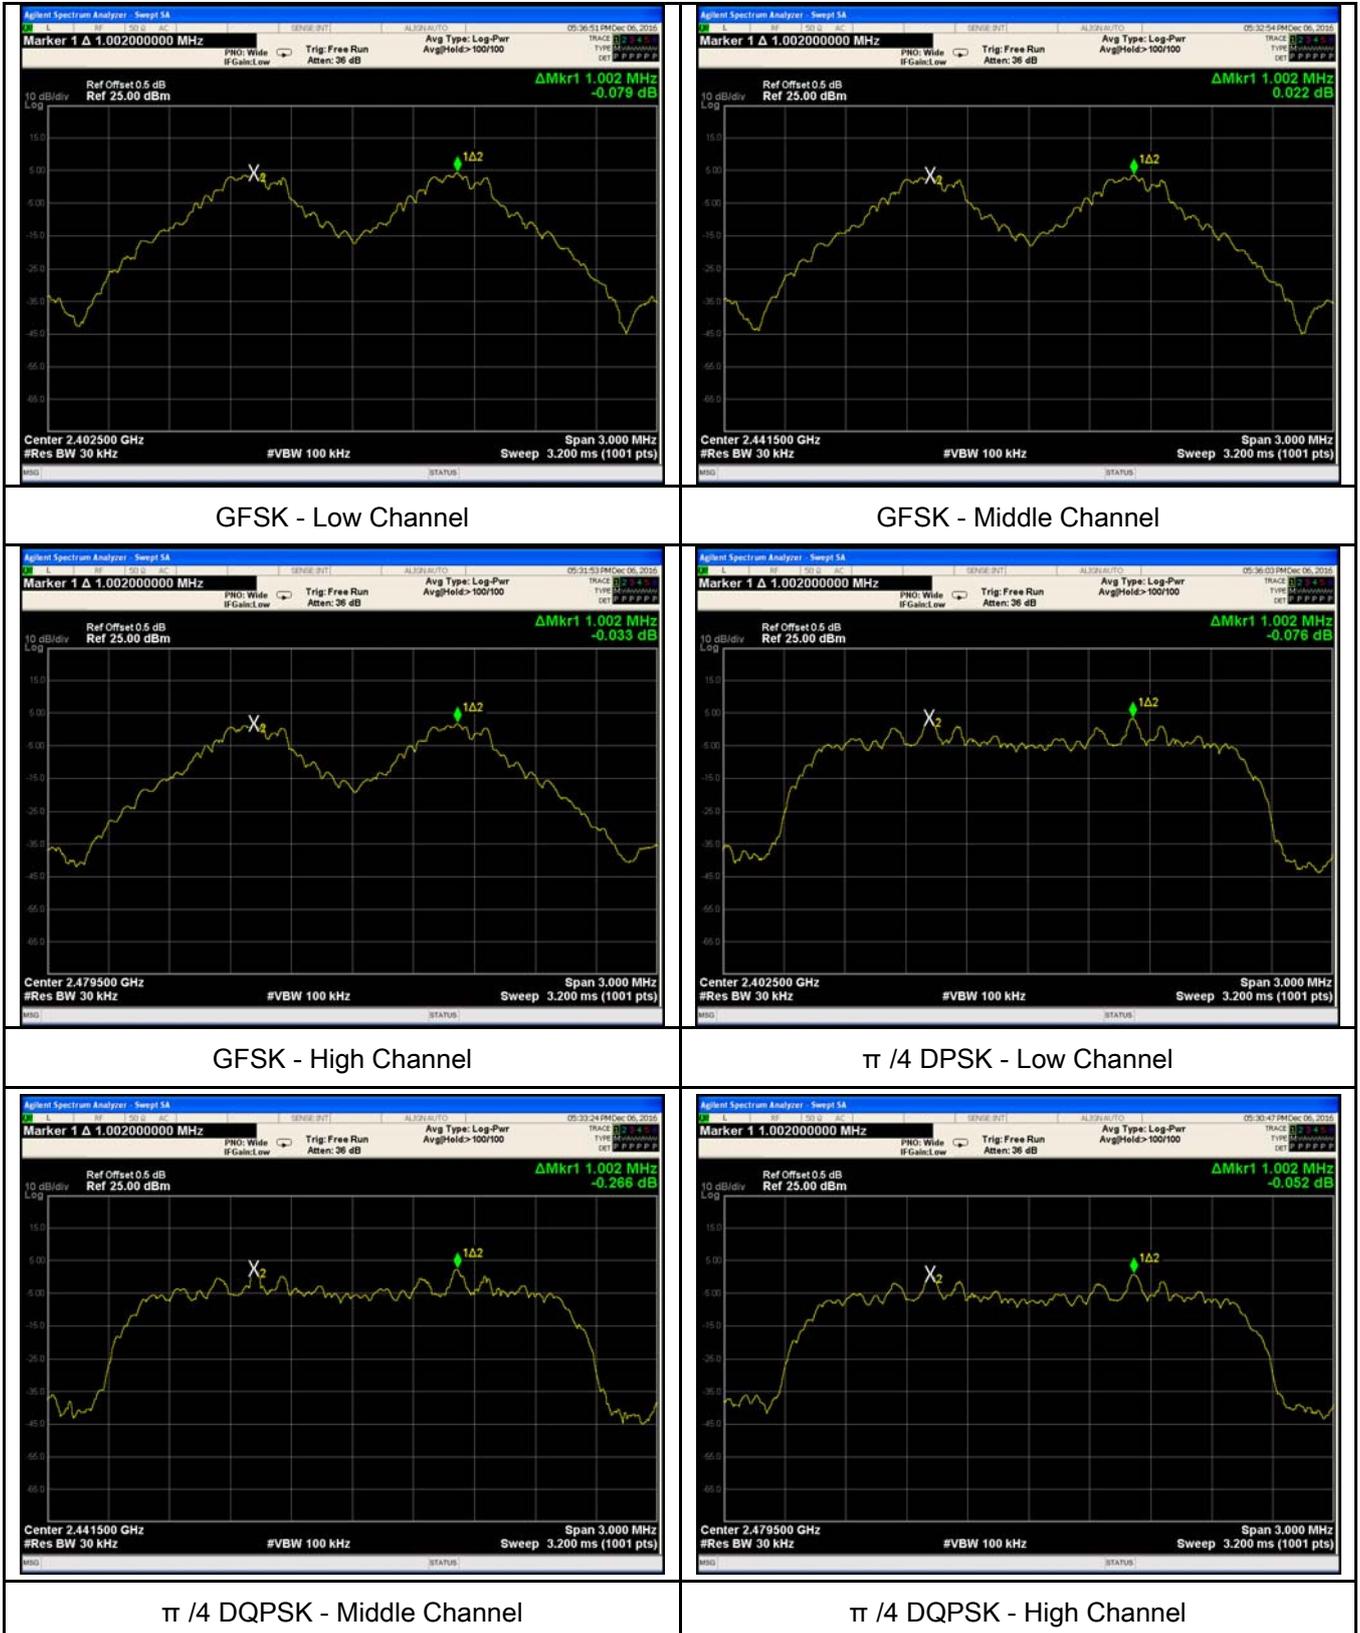



8DPSK - Low Channel



8DPSK - Middle Channel



8DPSK - High Channel




6.3 20dB Bandwidth

Temperature	23°C
Relative Humidity	58%
Atmospheric Pressure	1006mbar
Test date :	December 06, 2016
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(a) (1)	a)	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.	<input checked="" type="checkbox"/>

Test Setup	 <p style="text-align: center;">Spectrum Analyzer EUT</p>
------------	--

Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. <u>Use the following spectrum analyzer settings:</u></p> <ul style="list-style-type: none"> - Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel - RBW ≥ 1% of the 20 dB bandwidth - VBW ≥ RBW - Sweep = auto - Detector function = peak - Trace = max hold. - The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference
----------------	--

	marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A

Measurement result

Modulation	CH	CH Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
GFSK	Low	2402	0.962	0.9008
	Mid	2441	0.963	0.8985
	High	2480	0.967	0.9073
$\pi/4$ DQPSK	Low	2402	1.281	1.1715
	Mid	2441	1.282	1.1705
	High	2480	1.282	1.1770
8-DPSK	Low	2402	1.293	1.1749
	Mid	2441	1.291	1.1754
	High	2480	1.295	1.1757

Test Plots

20dB Bandwidth measurement result



GFSK - Low Channel




GFSK - Middle Channel



GFSK - High Channel



$\pi/4$ DPSK - Low Channel

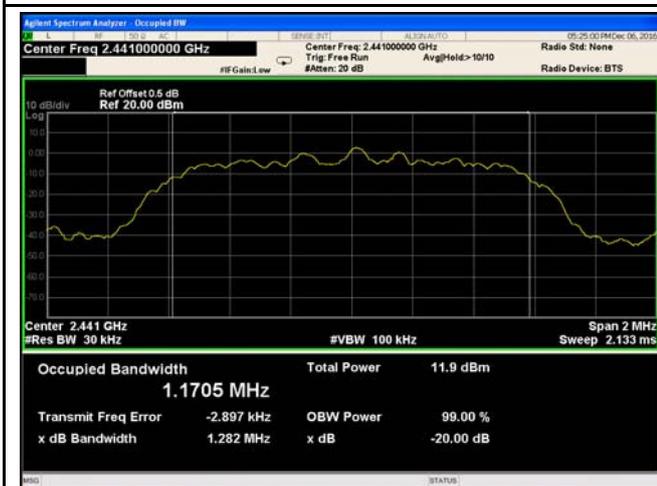

$\pi/4$ DQPSK - Middle Channel




$\pi/4$ DQPSK - High Channel



8DPSK - Low Channel



8DPSK - Middle Channel

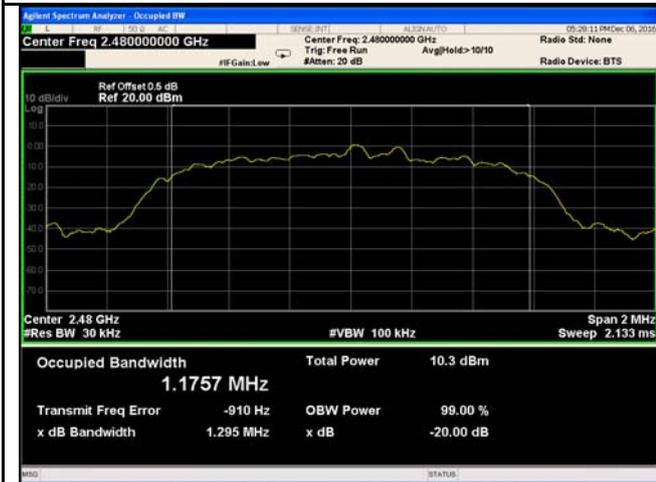


8DPSK - High Channel

6.4 Peak Output Power

Temperature	23°C
Relative Humidity	58%
Atmospheric Pressure	1006mbar
Test date :	December 06, 2016
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(b) (3)	a)	FHSS in 2400-2483.5MHz with ≥ 75 channels: ≤ 1 Watt	<input checked="" type="checkbox"/>
	b)	FHSS in 5725-5850MHz: ≤ 1 Watt	<input type="checkbox"/>
	c)	For all other FHSS in the 2400-2483.5MHz band: ≤ 0.125 Watt.	<input checked="" type="checkbox"/>
	d)	FHSS in 902-928MHz with ≥ 50 channels: ≤ 1 Watt	<input type="checkbox"/>
	e)	FHSS in 902-928MHz with ≥ 25 & < 50 channels: ≤ 0.25 Watt	<input type="checkbox"/>
	f)	DTS in 902-928MHz, 2400-2483.5MHz: ≤ 1 Watt	<input type="checkbox"/>

Test Setup	 <p style="text-align: center;">Spectrum Analyzer EUT</p>
------------	--

Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none"> - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel - RBW > the 20 dB bandwidth of the emission being measured - VBW \geq RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow the trace to stabilize.
----------------	--

	<ul style="list-style-type: none"> - Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power (see the note above regarding external attenuation and cable loss). The limit is specified in one of the subparagraphs of this Section. Submit this plot. A peak responding power meter may be used instead of a spectrum analyzer.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A
 Test Plot Yes (See below) N/A

Peak Output Power measurement result


Type	Modulation	CH	Frequency (MHz)	Conducted Power (dBm)	Limit (mW)	Result
Output power	GFSK	Low	2402	6.239	1000	Pass
		Mid	2441	5.447	1000	Pass
		High	2480	3.701	1000	Pass
	$\pi/4$ DQPSK	Low	2402	6.700	125	Pass
		Mid	2441	5.862	125	Pass
		High	2480	4.088	125	Pass
	8-DPSK	Low	2402	6.969	125	Pass
		Mid	2441	6.240	125	Pass
		High	2480	4.377	125	Pass

Test Plots

Output Power measurement result




GFSK Output power - Low CH 2402

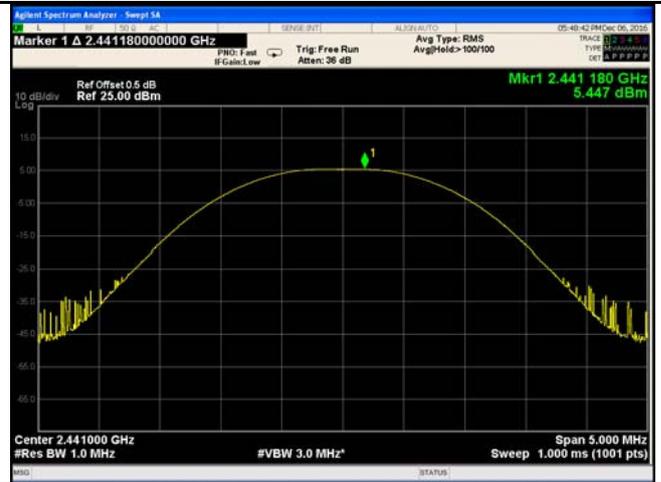


GFSK Output power - Mid CH 2441



GFSK Output power - High CH 2480

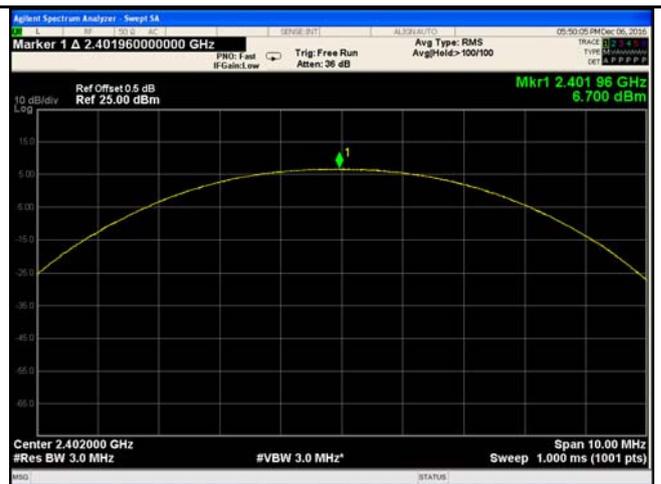

$\pi/4$ DQPSK Output power - Low CH 2402

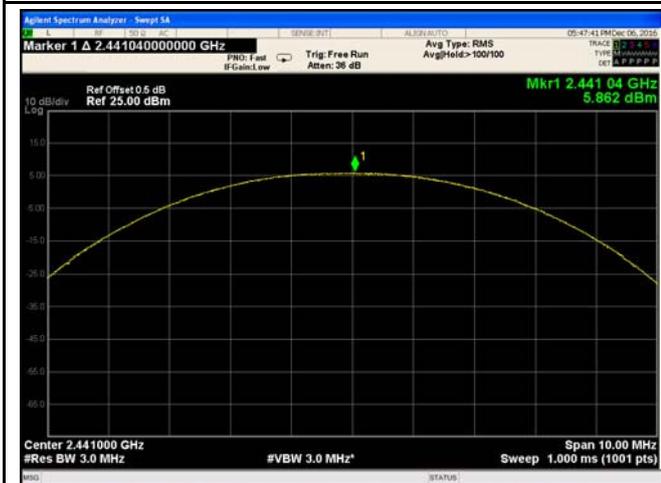

$\pi/4$ DQPSK Output power - Mid CH 2441



$\pi/4$ DQPSK Output power - High CH 2480




8DPSK Output power - Low CH 2402



8DPSK Output power - Mid CH 2441




8DPSK Output power - High CH 2480



6.5 Number of Hopping Channel

Temperature	23°C
Relative Humidity	58%
Atmospheric Pressure	1006mbar
Test date :	December 06, 2016
Tested By :	Loren Luo

Requirement(s):

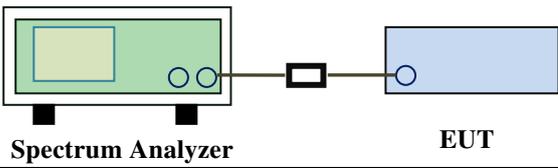Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	FHSS in 2400-2483.5MHz ≥ 15 channels	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer EUT</p>		
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Use the following spectrum analyzer settings:</p> <p>The EUT must have its hopping function enabled.</p> <ul style="list-style-type: none"> - Span = the frequency band of operation - RBW ≥ 1% of the span - VBW ≥ RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow trace to fully stabilize. - It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s). 		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		


Test Data Yes N/A
 Test Plot Yes (See below) N/A

Number of Hopping Channel measurement result

Type	Modulation	Frequency Range	Number of Hopping Channel	Limit
Number of Hopping Channel	GFSK	2400-2483.5	79	15
	$\pi/4$ DQPSK	2400-2483.5	79	15
	8-DPSK	2400-2483.5	79	15

Test Plots


Number of Hopping Channels measurement result

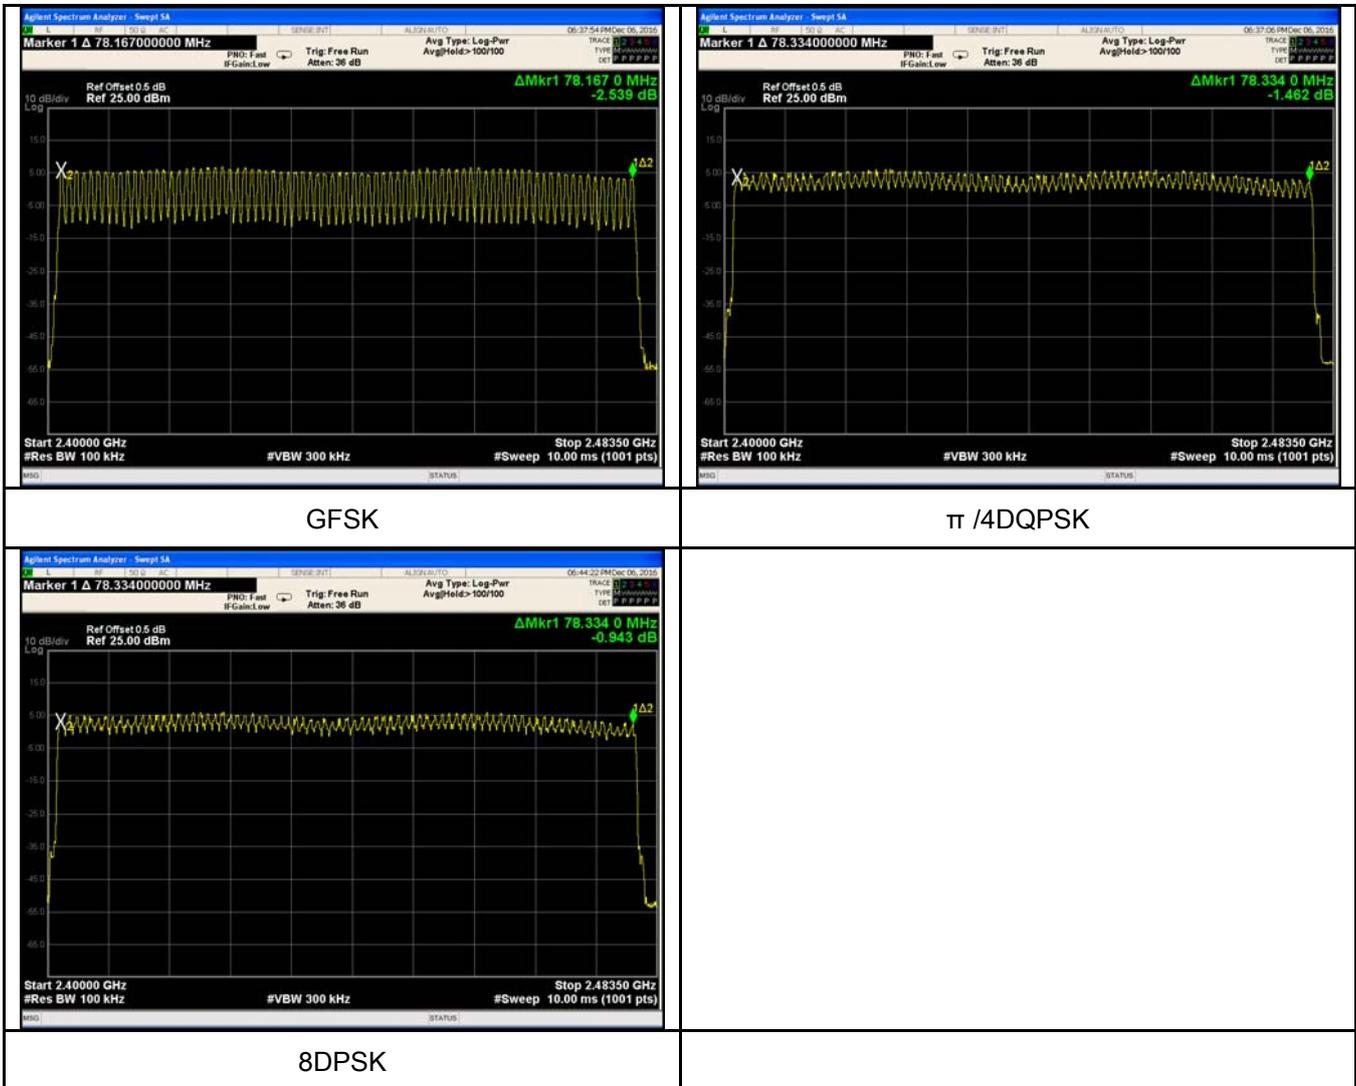

6.6 Time of Occupancy (Dwell Time)

Temperature	23°C
Relative Humidity	58%
Atmospheric Pressure	1006mbar
Test date :	December 06, 2016
Tested By :	Loren Luo

Requirement(s):

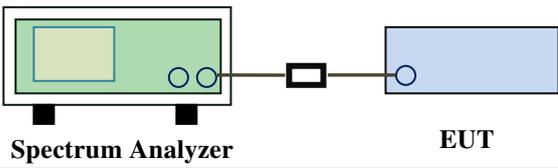Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	Dwell Time < 0.4s	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer EUT</p>		
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. <u>Use the following spectrum analyzer</u></p> <ul style="list-style-type: none"> - Span = zero span, centered on a hopping channel - RBW = 1 MHz - VBW ≥ RBW - Sweep = as necessary to capture the entire dwell time per hopping channel - Detector function = peak - Trace = max hold - use the marker-delta function to determine the dwell time 		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data Yes N/A

Test Plot Yes (See below) N/A

Dwell Time measurement result

Type	Modulation	CH	Pulse Width (ms)	Dwell Time (ms)	Limit (ms)	Result
Dwell Time	GFSK	Low	2.880	307.200	400	Pass
		Mid	2.880	307.200	400	Pass
		High	2.880	307.200	400	Pass
	π /4 DQPSK	Low	2.880	307.200	400	Pass
		Mid	2.890	308.267	400	Pass
		High	2.890	308.267	400	Pass
	8-DPSK	Low	2.880	307.200	400	Pass
		Mid	2.880	307.200	400	Pass
		High	2.860	305.067	400	Pass
Note: Dwell time=Pulse Time (ms) × (1600 ÷ 6 ÷ 79) ×31.6						

Test Plots


Dwell Time measurement result



GFSK - Low CH 2402



GFSK - Mid CH 2441

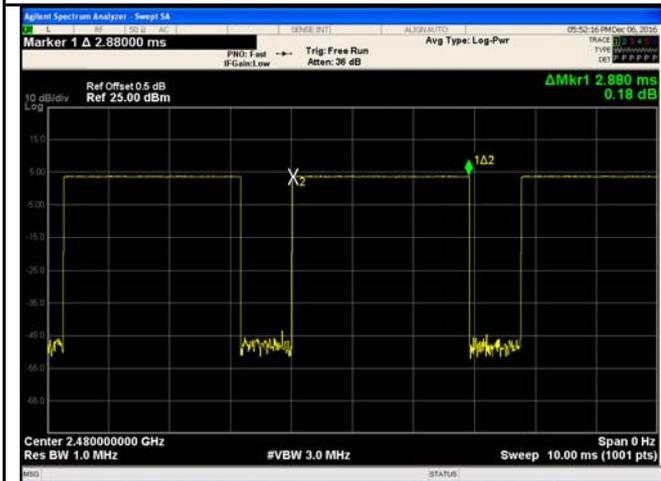

GFDK - High CH 2480



$\pi/4$ DQPSK - Low CH 2402



$\pi/4$ DQPSK - Mid CH 2441



$\pi/4$ DQPSK - High CH 2480



8DPSK - Low CH 2402



8DPSK - Mid CH 2441



8DPSK - High CH 2480



6.7 Band Edge & Restricted Band

Temperature	24°C
Relative Humidity	59%
Atmospheric Pressure	1007mbar
Test date :	December 07, 2016
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.	<input checked="" type="checkbox"/>

Test Setup	
------------	--

Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Radiated Method Only</p> <ul style="list-style-type: none"> - 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator. - 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range,
----------------	--


Test Report	16071342-FCC-R2
Page	30 of 60

	<p>and make sure the instrument is operated in its linear range.</p> <ul style="list-style-type: none"> - 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, check the emission of EUT, if pass then set Spectrum Analyzer as below: <ul style="list-style-type: none"> a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz. b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz. - 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency. - 5. Repeat above procedures until all measured frequencies were complete.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail


Test Data Yes N/A
Test Plot Yes (See below) N/A

Test Plots


GFSK Mode:

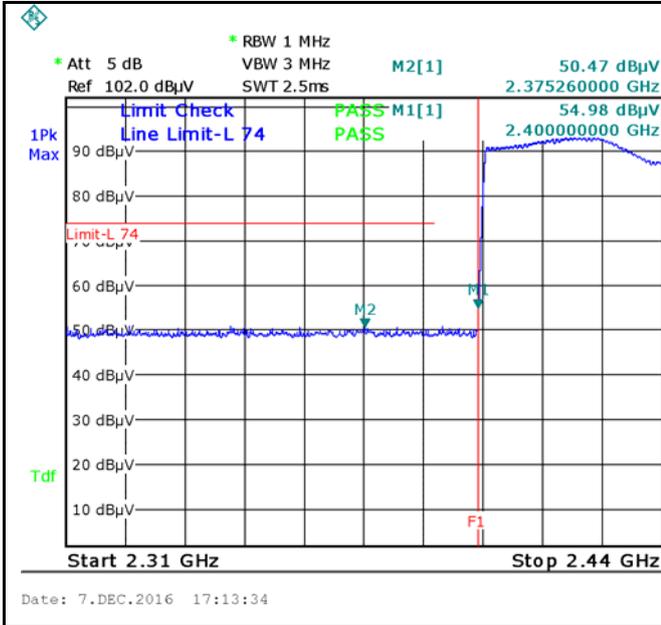

GFSK-Hopping Left Side-PK
 Note: F1 is frequency 2400MHz

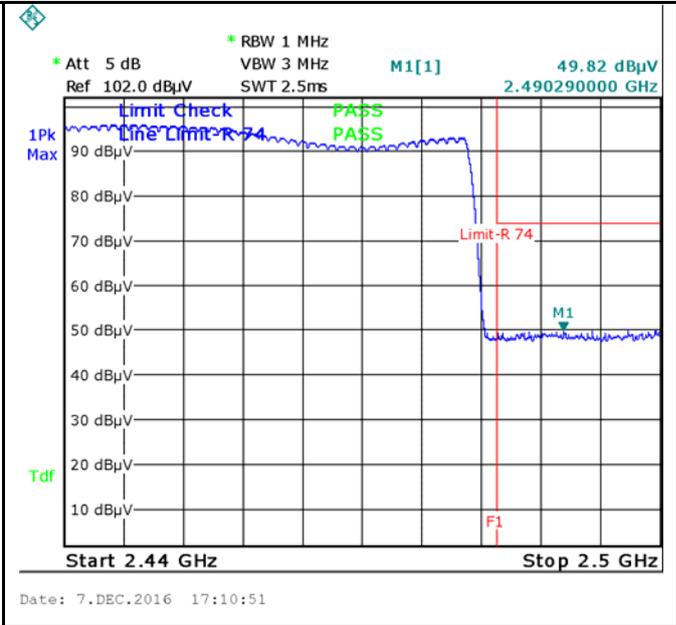


GFSK-Hopping Right Side-PK
 Note: F1 is frequency 2483.5MHz

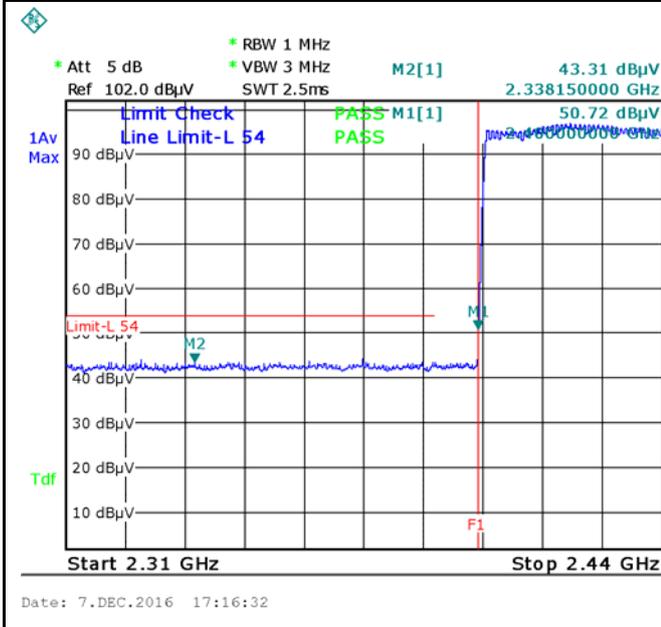

GFSK-Hopping Left Side-AV


Note: (no need if PK value less than the AV limit)

GFSK-Hopping Right Side-AV

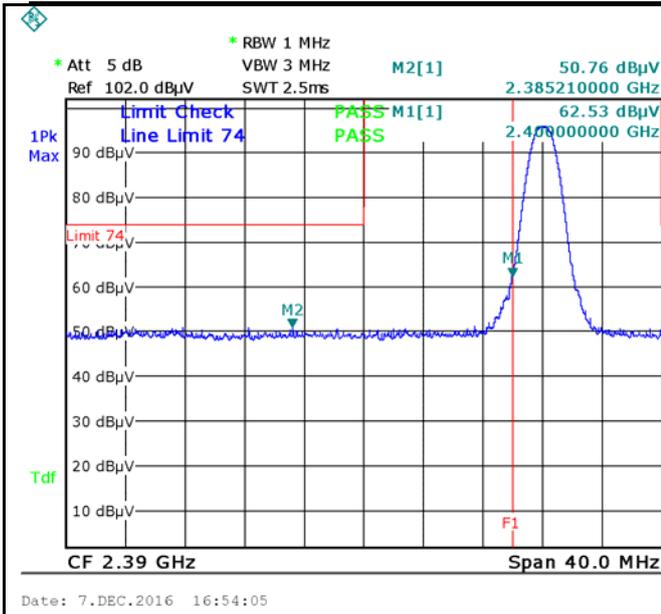


GFSK-Left Side-PK

Note: F1 is frequency 2400MHz

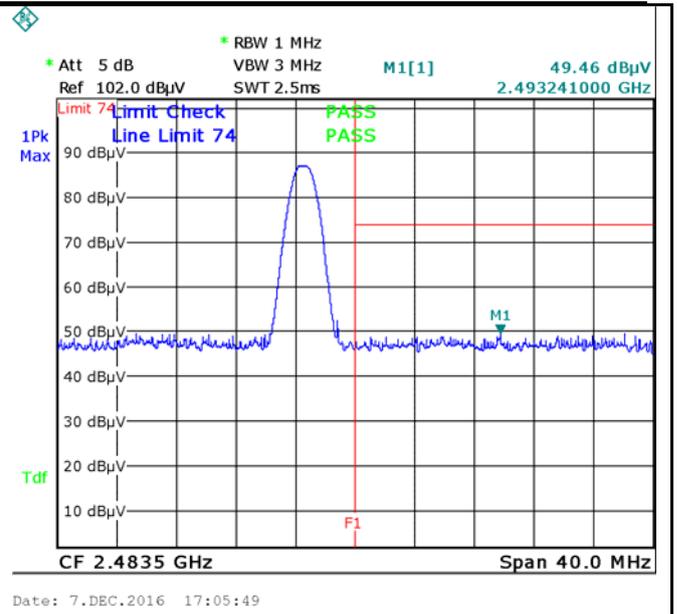

GFSK-Right Side-PK


Note: F1 is frequency 2483.5MHz

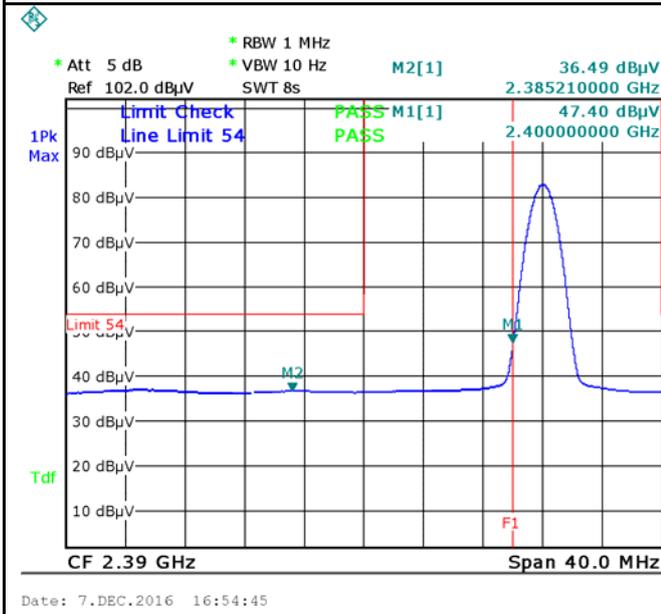


GFSK-Left Side-AV

Note: (no need if PK value less than the AV limit)

GFSK-Right Side-AV

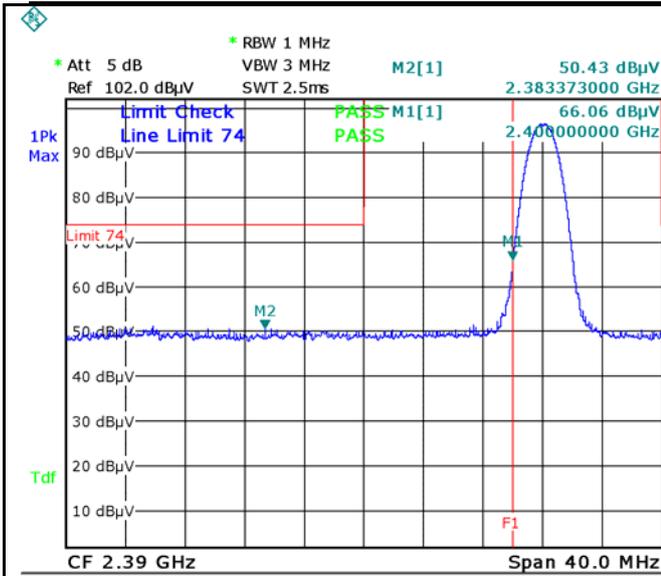

Date: 7.DEC.2016 16:56:06

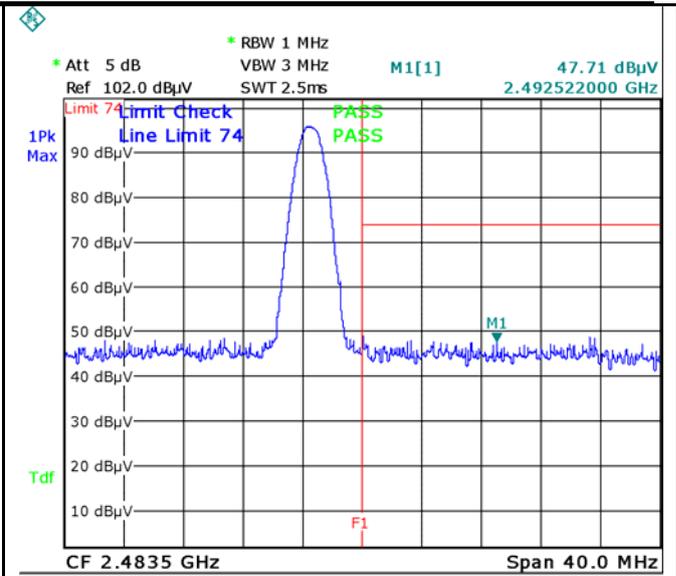


Date: 7.DEC.2016 17:06:13

π / 4 DQPSK-Left Side-PK

Note: F1 is frequency 2400MHz

π / 4 DQPSK-Right Side-PK

Note: F1 is frequency 2483.5MHz

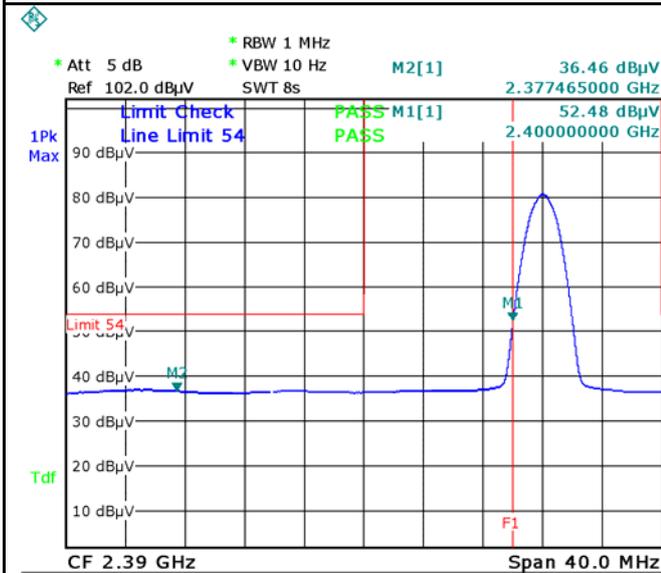


Date: 7.DEC.2016 16:56:45


Note: (no need if PK value less than the AV limit)

π / 4 DQPSK-Left Side-AV

π / 4 DQPSK-Right Side-AV

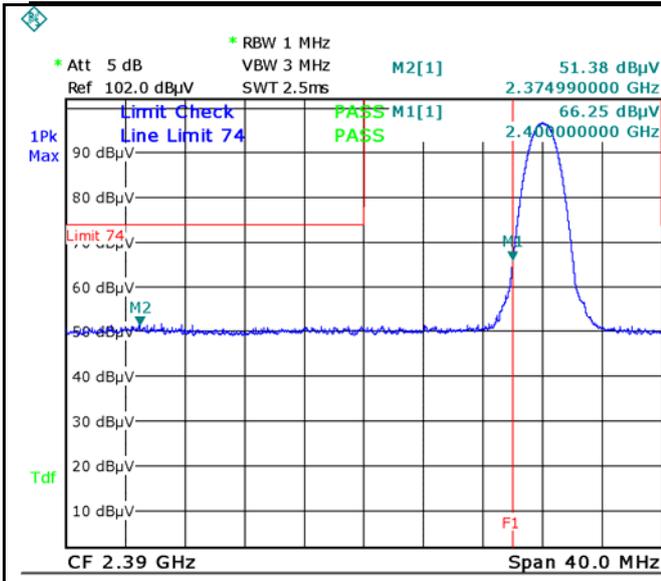

Date: 7.DEC.2016 17:00:49

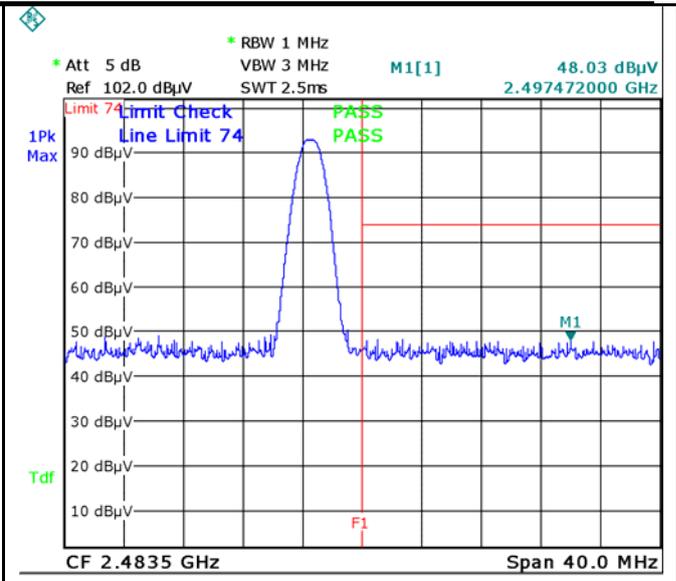


Date: 7.DEC.2016 17:07:09

8DPSK-Left Side-PK

Note: F1 is frequency 2400MHz

8DPSK-Right Side-PK

Note: F1 is frequency 2483.5MHz

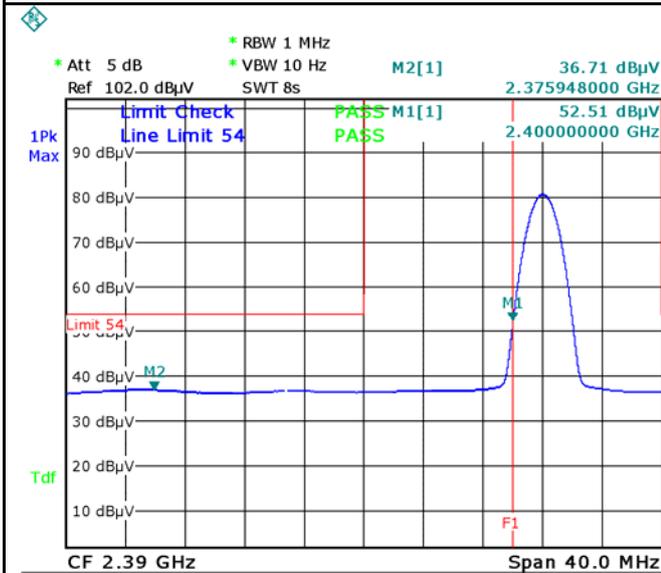

Date: 7.DEC.2016 16:58:26

Note: (no need if PK value less than the AV limit)

8DPSK-Left Side-AV

8DPSK-Right Side-AV

6.8 AC Power Line Conducted Emissions

Temperature	24°C
Relative Humidity	59%
Atmospheric Pressure	1007mbar
Test date :	December 07, 2016
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable														
47CFR§15.207, RSS210 (A8.1)	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [μ]H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.	<input checked="" type="checkbox"/>														
		<table border="1"> <thead> <tr> <th rowspan="2">Frequency ranges (MHz)</th> <th colspan="2">Limit (dBμV)</th> </tr> <tr> <th>QP</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td> <td>66 – 56</td> <td>56 – 46</td> </tr> <tr> <td>0.5 ~ 5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 ~ 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>		Frequency ranges (MHz)	Limit (dBμV)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50
		Frequency ranges (MHz)			Limit (dBμV)												
				QP	Average												
0.15 ~ 0.5	66 – 56	56 – 46															
0.5 ~ 5	56	46															
5 ~ 30	60	50															

Test Setup	<p>Note: 1.Support units were connected to second LISN. 2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.</p>
------------	--

Procedure	<ol style="list-style-type: none"> The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss
-----------	---


Test Report	16071342-FCC-R2
Page	38 of 60

	coaxial cable. 4. All other supporting equipment were powered separately from another main supply. 5. The EUT was switched on and allowed to warm up to its normal operating condition. 6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver. 7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. 8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A

Test Mode:	Bluetooth Mode
-------------------	-----------------------

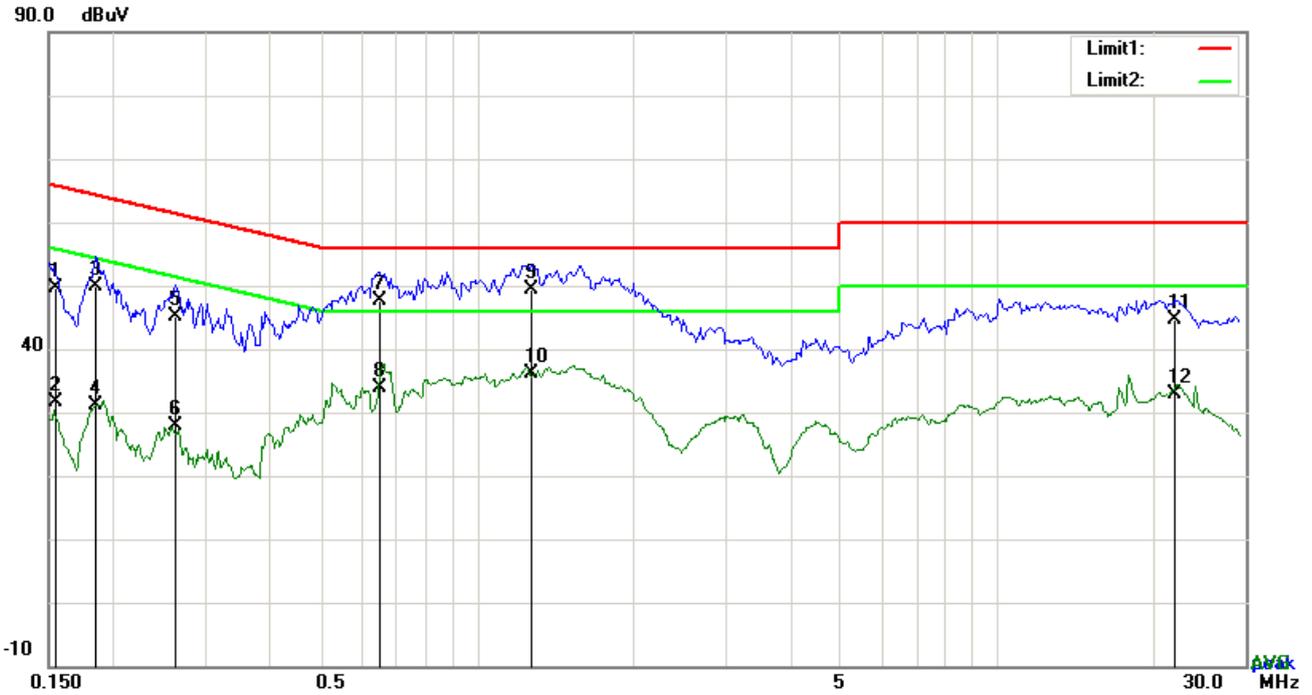


Test Data

Phase Line Plot at 120Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	L1	0.1548	39.69	QP	10.03	49.72	65.74	-16.02
2	L1	0.1548	21.52	AVG	10.03	31.55	55.74	-24.19
3	L1	0.1851	39.88	QP	10.03	49.91	64.25	-14.34
4	L1	0.1851	21.14	AVG	10.03	31.17	54.25	-23.08
5	L1	0.2631	34.99	QP	10.03	45.02	61.33	-16.31
6	L1	0.2631	17.75	AVG	10.03	27.78	51.33	-23.55
7	L1	0.6492	37.54	QP	10.03	47.57	56.00	-8.43
8	L1	0.6492	23.94	AVG	10.03	33.97	46.00	-12.03
9	L1	1.2693	39.47	QP	10.03	49.50	56.00	-6.50
10	L1	1.2693	26.22	AVG	10.03	36.25	46.00	-9.75
11	L1	21.9813	34.36	QP	10.34	44.70	60.00	-15.30
12	L1	21.9813	22.59	AVG	10.34	32.93	50.00	-17.07

Test Mode:	Bluetooth Mode
-------------------	-----------------------

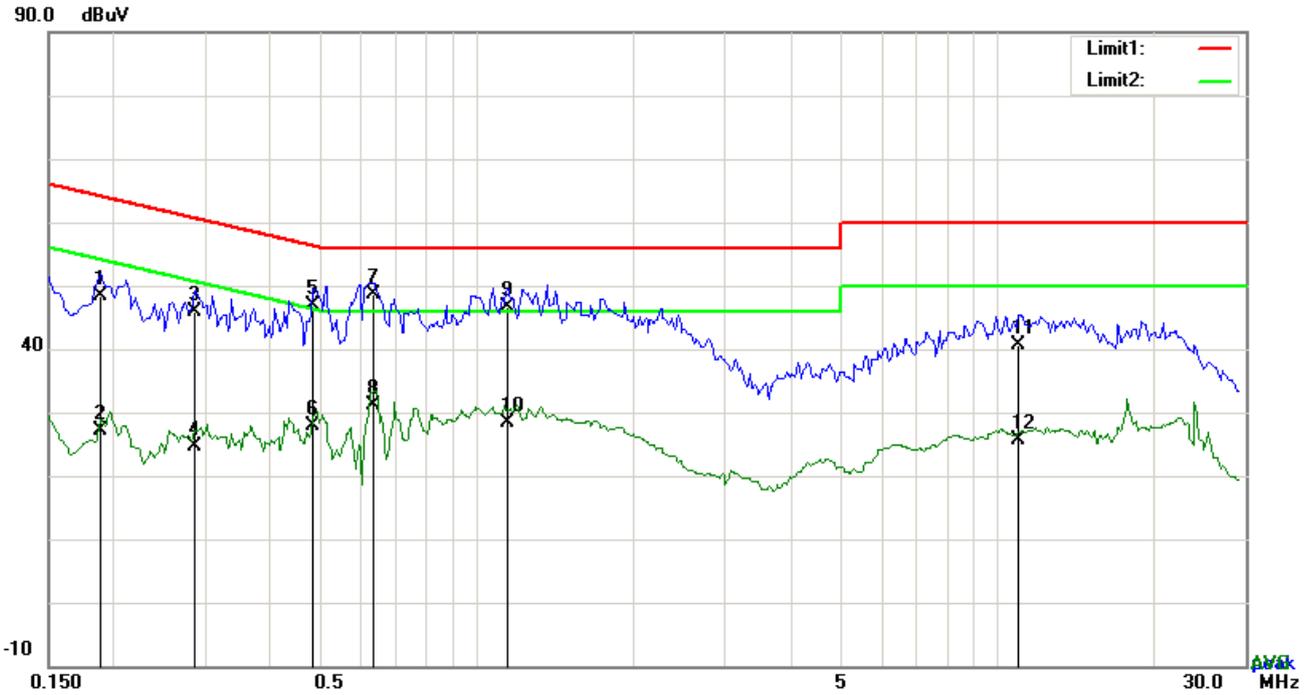


Test Data

Phase Neutral Plot at 120Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	N	0.1890	38.48	QP	10.02	48.50	64.08	-15.58
2	N	0.1890	17.00	AVG	10.02	27.02	54.08	-27.06
3	N	0.2865	35.80	QP	10.02	45.82	60.63	-14.81
4	N	0.2865	14.64	AVG	10.02	24.66	50.63	-25.97
5	N	0.4815	36.78	QP	10.02	46.80	56.31	-9.51
6	N	0.4815	17.83	AVG	10.02	27.85	46.31	-18.46
7	N	0.6336	38.61	QP	10.02	48.63	56.00	-7.37
8	N	0.6336	21.19	AVG	10.02	31.21	46.00	-14.79
9	N	1.1445	36.62	QP	10.03	46.65	56.00	-9.35
10	N	1.1445	18.29	AVG	10.03	28.32	46.00	-17.68
11	N	11.0028	30.41	QP	10.15	40.56	60.00	-19.44
12	N	11.0028	15.48	AVG	10.15	25.63	50.00	-24.37

Test Mode:	Bluetooth Mode
-------------------	-----------------------

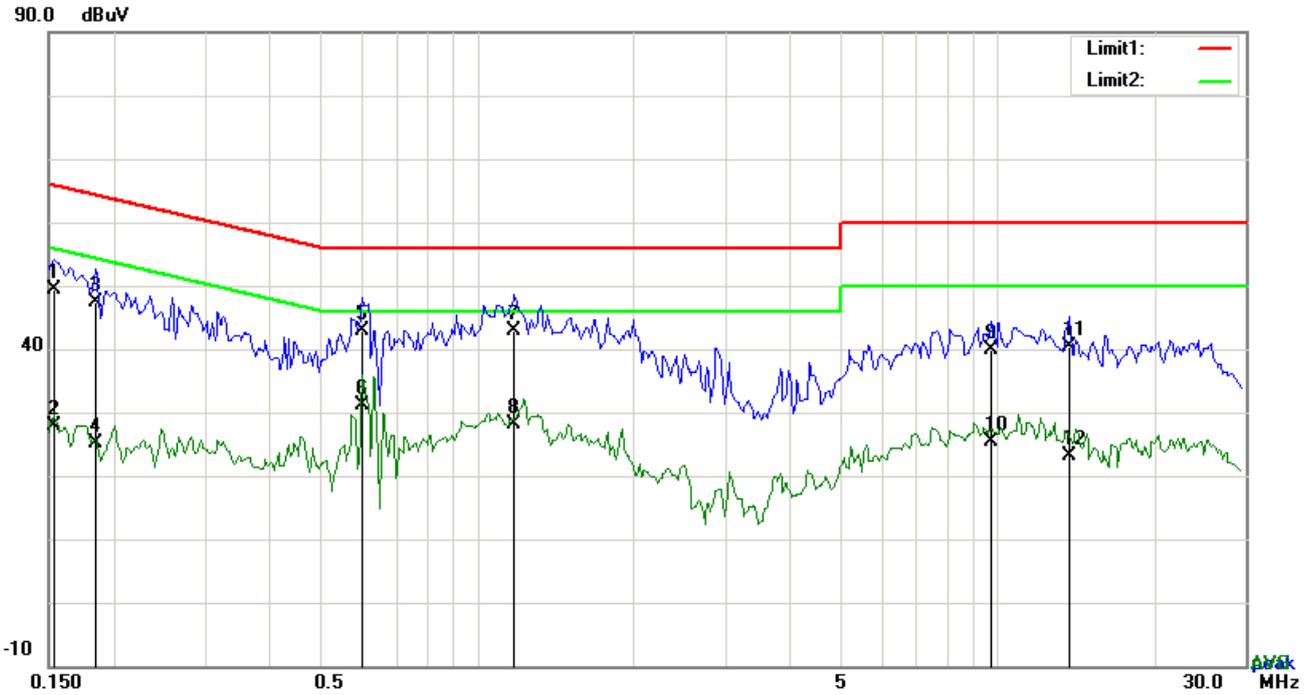


Test Data

Phase Line Plot at 240Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	L1	0.1539	39.39	QP	10.03	49.42	65.79	-16.37
2	L1	0.1539	17.75	AVG	10.03	27.78	55.79	-28.01
3	L1	0.1851	37.33	QP	10.03	47.36	64.25	-16.89
4	L1	0.1851	15.14	AVG	10.03	25.17	54.25	-29.08
5	L1	0.6024	32.92	QP	10.03	42.95	56.00	-13.05
6	L1	0.6024	21.02	AVG	10.03	31.05	46.00	-14.95
7	L1	1.1796	32.90	QP	10.03	42.93	56.00	-13.07
8	L1	1.1796	18.08	AVG	10.03	28.11	46.00	-17.89
9	L1	9.7314	29.68	QP	10.15	39.83	60.00	-20.17
10	L1	9.7314	15.27	AVG	10.15	25.42	50.00	-24.58
11	L1	13.7484	30.08	QP	10.21	40.29	60.00	-19.71
12	L1	13.7484	12.83	AVG	10.21	23.04	50.00	-26.96

Test Mode:	Bluetooth Mode
-------------------	-----------------------

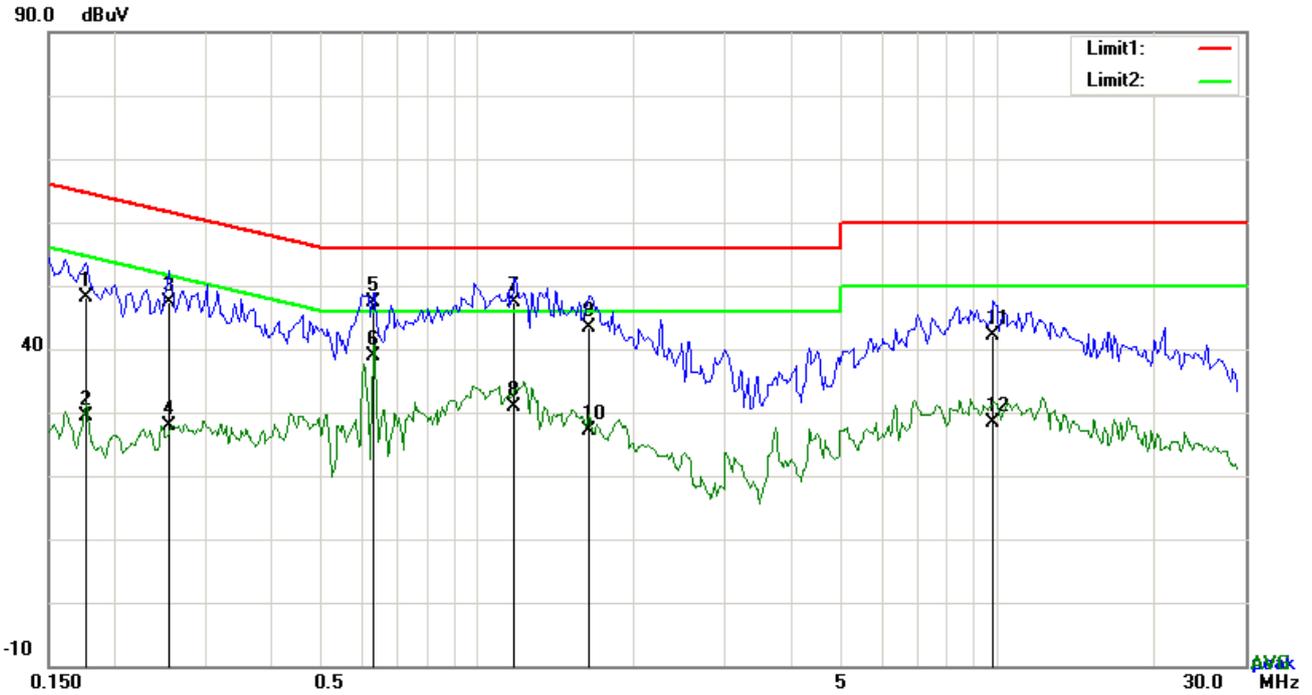

Test Data

Phase Neutral Plot at 240Vac, 60Hz


No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	N	0.1773	38.14	QP	10.02	48.16	64.61	-16.45
2	N	0.1773	19.32	AVG	10.02	29.34	54.61	-25.27
3	N	0.2553	37.36	QP	10.02	47.38	61.58	-14.20
4	N	0.2553	17.77	AVG	10.02	27.79	51.58	-23.79
5	N	0.6336	37.45	QP	10.02	47.47	56.00	-8.53
6	N	0.6336	28.85	AVG	10.02	38.87	46.00	-7.13
7	N	1.1835	37.31	QP	10.03	47.34	56.00	-8.66
8	N	1.1835	20.95	AVG	10.03	30.98	46.00	-15.02
9	N	1.6398	33.42	QP	10.04	43.46	56.00	-12.54
10	N	1.6398	17.19	AVG	10.04	27.23	46.00	-18.77
11	N	9.7821	32.05	QP	10.14	42.19	60.00	-17.81
12	N	9.7821	18.27	AVG	10.14	28.41	50.00	-21.59

6.9 Radiated Spurious Emissions & Restricted Band

Temperature	24°C
Relative Humidity	59%
Atmospheric Pressure	1007mbar
Test date :	December 07, 2016
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable										
47CFR§15.205, §15.209, §15.247(d)	a)	<p>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength ($\mu\text{V/m}$)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>	Frequency range (MHz)	Field Strength ($\mu\text{V/m}$)	30 – 88	100	88 – 216	150	216 960	200	Above 960	500	<input checked="" type="checkbox"/>
Frequency range (MHz)	Field Strength ($\mu\text{V/m}$)												
30 – 88	100												
88 – 216	150												
216 960	200												
Above 960	500												

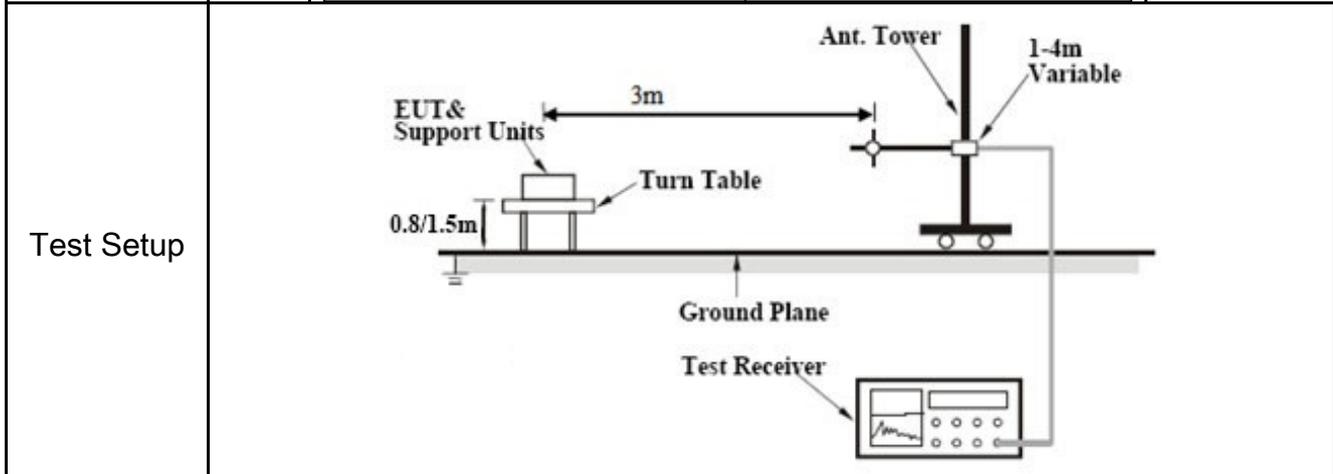

Procedure	<ol style="list-style-type: none"> The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
-----------	---

Test Report	16071342-FCC-R2
Page	44 of 60


	<p>a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</p> <p>b. The EUT was then rotated to the direction that gave the maximum emission.</p> <p>c. Finally, the antenna height was adjusted to the height that gave the maximum emission.</p> <p>3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.</p> <p>4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz.</p> <p>5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</p>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A

Test Mode: Bluetooth Mode

Below 1GHz

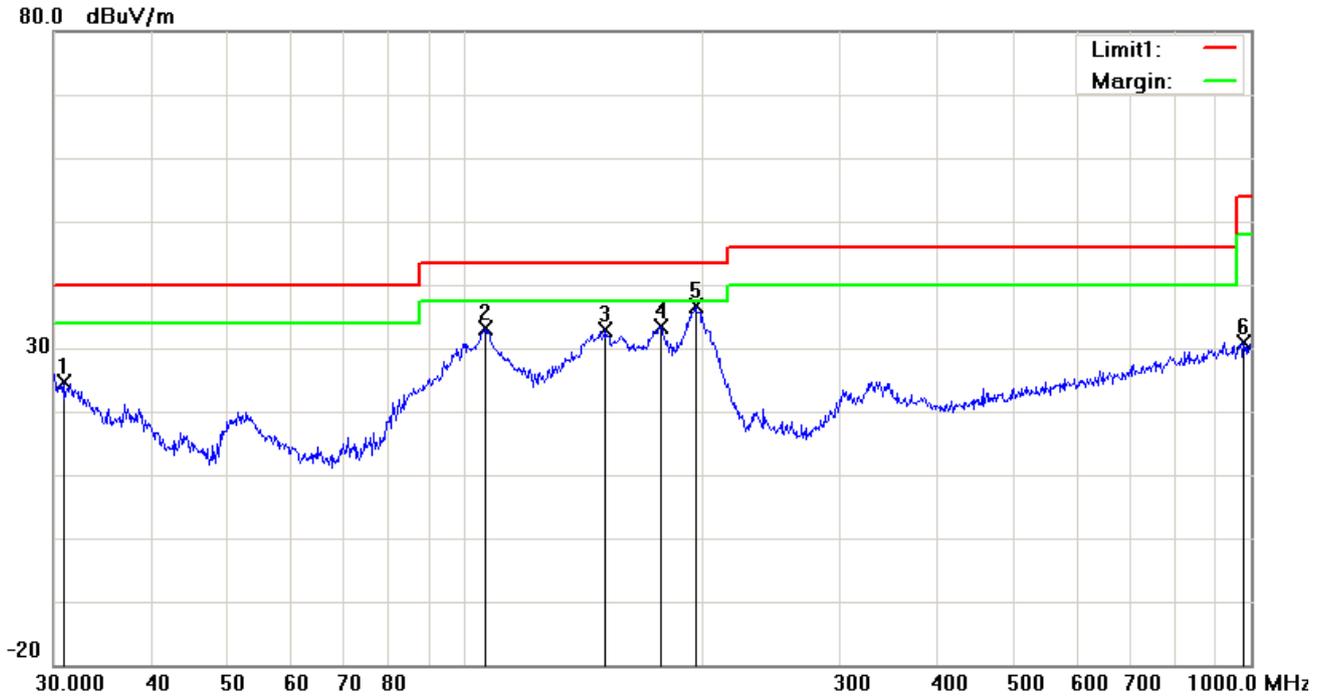

Test Data

Horizontal Polarity Plot @3m

No.	P/L	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	H	30.8535	25.55	peak	-0.89	24.66	40.00	-15.34	100	36
2	H	106.3850	42.78	peak	-9.66	33.12	43.50	-10.38	100	182
3	H	151.0666	41.15	peak	-8.38	32.77	43.50	-10.73	100	294
4	H	177.5092	43.08	peak	-9.69	33.39	43.50	-10.11	100	157
5	H	196.5098	45.47	peak	-8.91	36.56	43.50	-6.94	100	316
6	H	979.1804	25.31	peak	5.52	30.83	54.00	-23.17	100	91

Below 1GHz



Test Data

Vertical Polarity Plot @3m

No.	P/L	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	V	30.6379	34.23	QP	-0.73	33.50	40.00	-6.50	100	78
2	V	49.8814	51.08	QP	-13.13	37.95	40.00	-2.05	100	224
3	V	93.1132	48.95	QP	-12.60	36.35	43.50	-7.15	100	183
4	V	103.8055	46.17	QP	-10.12	36.05	43.50	-7.45	100	326
5	V	196.5098	40.44	peak	-8.91	31.53	43.50	-11.97	100	147
6	V	925.7563	26.50	peak	4.92	31.42	46.00	-14.58	100	85

Above 1GHz

Test Mode:	Transmitting Mode
-------------------	--------------------------

Low Channel: 8-DPSK Mode (Worst Case) (2402 MHz)

Frequency (MHz)	S.A. Reading (dBμV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4804	38.78	AV	V	33.67	6.86	32.66	46.65	54	-7.35
4804	38.62	AV	H	33.67	6.86	32.66	46.49	54	-7.51
4804	48.36	PK	V	33.67	6.86	32.66	56.23	74	-17.77
4804	48.02	PK	H	33.67	6.86	32.66	55.89	74	-18.11
17796	24.75	AV	V	45.03	11.21	32.38	48.61	54	-5.39
17796	24.33	AV	H	45.03	11.21	32.38	48.19	54	-5.81
17796	41.64	PK	V	45.03	11.21	32.38	65.5	74	-8.5
17796	41.57	PK	H	45.03	11.21	32.38	65.43	74	-8.57

Middle Channel: 8-DPSK Mode (Worst Case) (2441 MHz)

Frequency (MHz)	S.A. Reading (dBμV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4882	39.29	AV	V	33.71	6.95	32.74	47.21	54	-6.79
4882	39.15	AV	H	33.71	6.95	32.74	47.07	54	-6.93
4882	49.66	PK	V	33.71	6.95	32.74	57.58	74	-16.42
4882	48.97	PK	H	33.71	6.95	32.74	56.89	74	-17.11
17805	25.46	AV	V	45.15	11.18	32.41	49.38	54	-4.62
17805	25.35	AV	H	45.15	11.18	32.41	49.27	54	-4.73
17805	42.72	PK	V	45.15	11.18	32.41	66.64	74	-7.36
17805	41.88	PK	H	45.15	11.18	32.41	65.8	74	-8.2

High Channel: 8-DPSK Mode (Worst Case) (2480 MHz)

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4960	39.35	AV	V	33.9	6.76	32.74	47.27	54	-6.73
4960	39.22	AV	H	33.9	6.76	32.74	47.14	54	-6.86
4960	49.81	PK	V	33.9	6.76	32.74	57.73	74	-16.27
4960	49.16	PK	H	33.9	6.76	32.74	57.08	74	-16.92
17799	25.76	AV	V	45.22	11.35	32.38	49.95	54	-4.05
17799	25.34	AV	H	45.22	11.35	32.38	49.53	54	-4.47
17799	42.85	PK	V	45.22	11.35	32.38	67.04	74	-6.96
17799	42.61	PK	H	45.22	11.35	32.38	66.8	74	-7.2

Note:


- 1, The testing has been conformed to $10 \times 2480 \text{ MHz} = 24,800 \text{ GHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.


Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted					
EMI test receiver	ESCS30	8471241027	09/16/2016	09/15/2017	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191106	09/24/2016	09/23/2017	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191107	09/24/2016	09/23/2017	<input checked="" type="checkbox"/>
LISN	ISN T800	34373	09/24/2016	09/23/2017	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/23/2016	09/22/2017	<input checked="" type="checkbox"/>
Transient Limiter	LIT-153	531118	08/31/2016	08/30/2017	<input checked="" type="checkbox"/>
RF conducted test					
Agilent ESA-E SERIES	E4407B	MY45108319	09/16/2016	09/15/2017	<input checked="" type="checkbox"/>
Power Splitter	1#	1#	08/31/2016	08/30/2017	<input checked="" type="checkbox"/>
DC Power Supply	E3640A	MY40004013	09/16/2016	09/15/2017	<input checked="" type="checkbox"/>
Radiated Emissions					
EMI test receiver	ESL6	100262	09/16/2016	09/15/2017	<input checked="" type="checkbox"/>
Positioning Controller	UC3000	MF780208282	11/18/2016	11/17/2017	<input checked="" type="checkbox"/>
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	08/31/2016	08/30/2017	<input checked="" type="checkbox"/>
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/24/2016	03/23/2017	<input checked="" type="checkbox"/>
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/20/2016	09/19/2017	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/23/2016	09/22/2017	<input checked="" type="checkbox"/>
Universal Radio Communication Tester	CMU200	121393	09/24/2016	09/23/2017	<input checked="" type="checkbox"/>

Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph: EUT External Photo

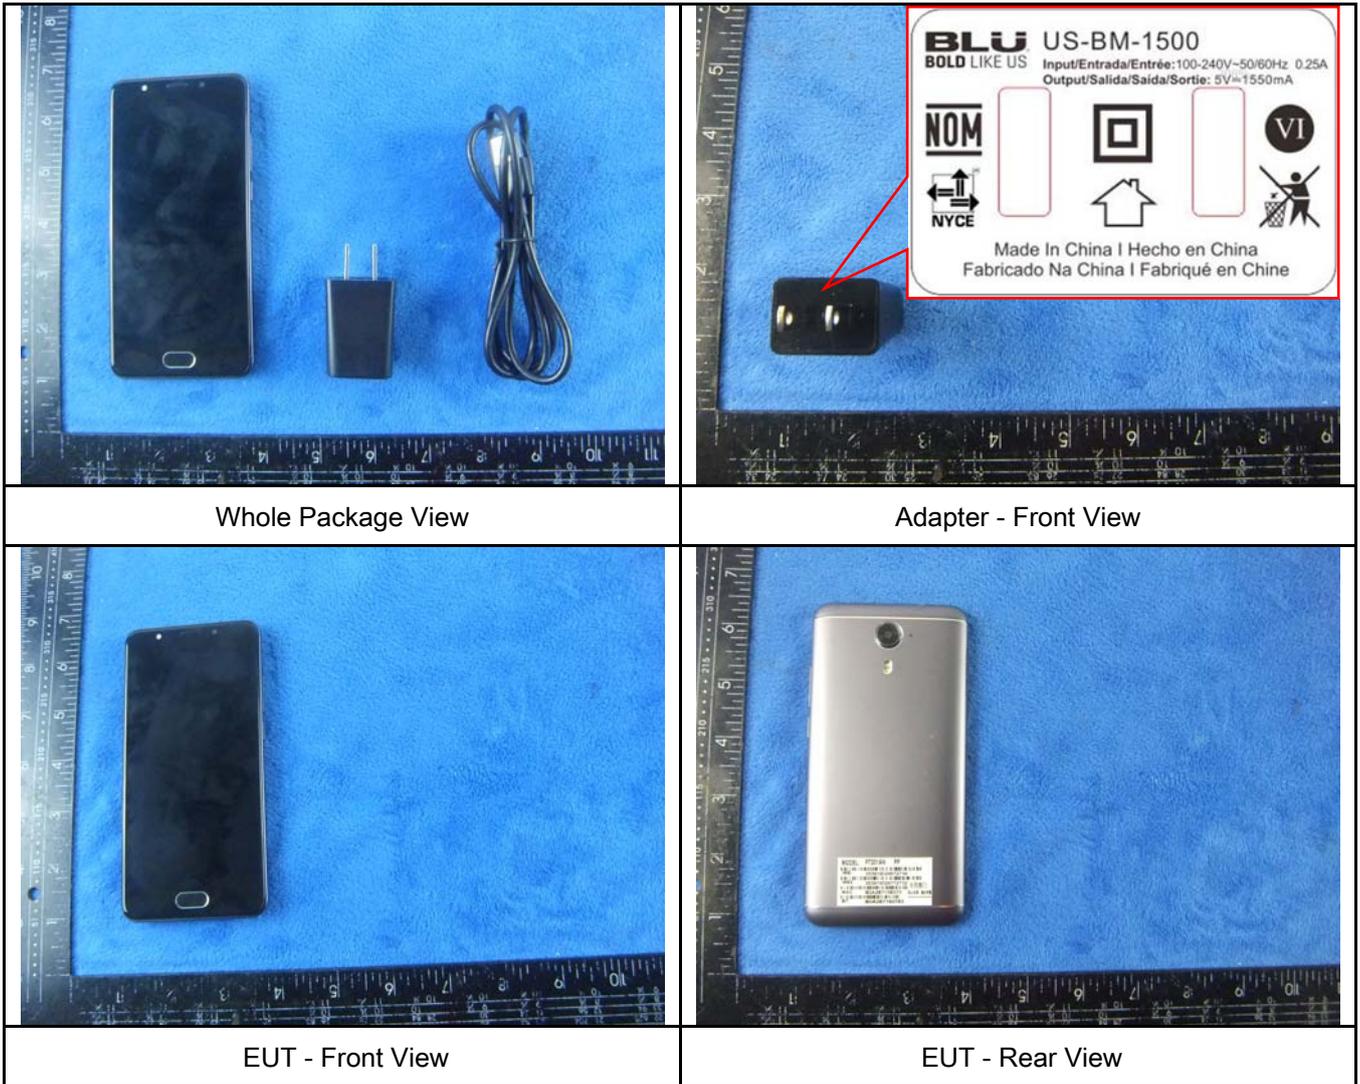

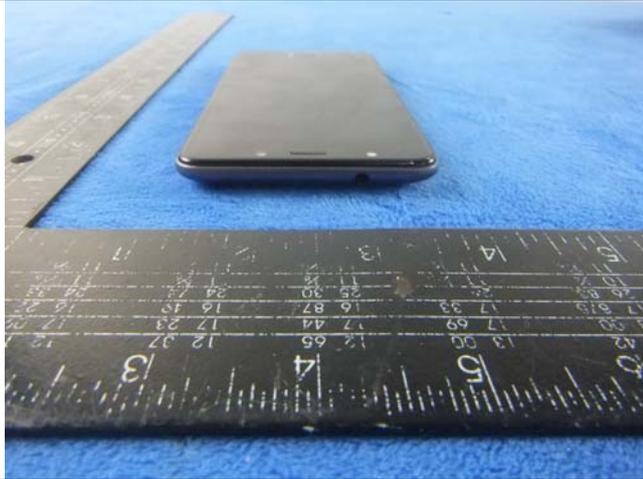


EUT - Top View



EUT - Bottom View



EUT - Left View

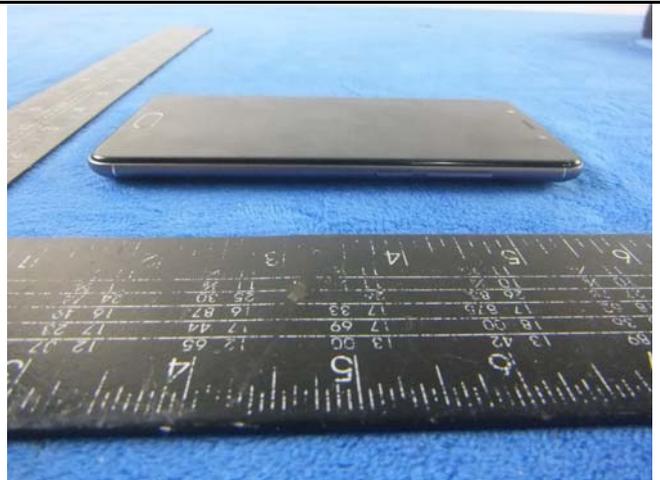

EUT - Right View


Annex B.ii. Photograph: EUT Internal Photo



Cover Off - Top View




Battery - Front View

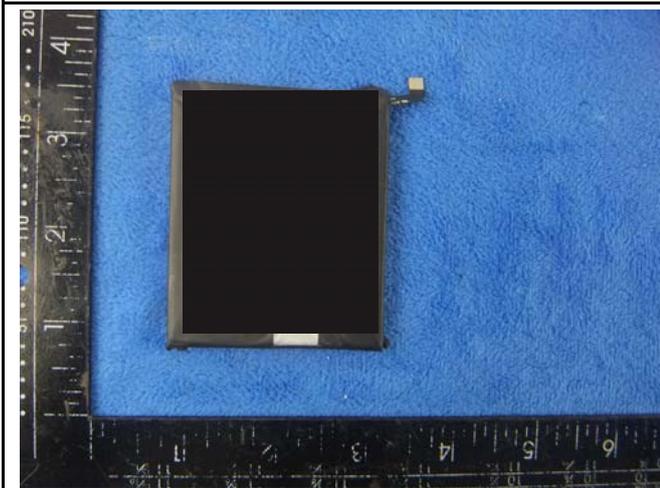

Battery - Rear View



Mainboard with Shielding - Front View

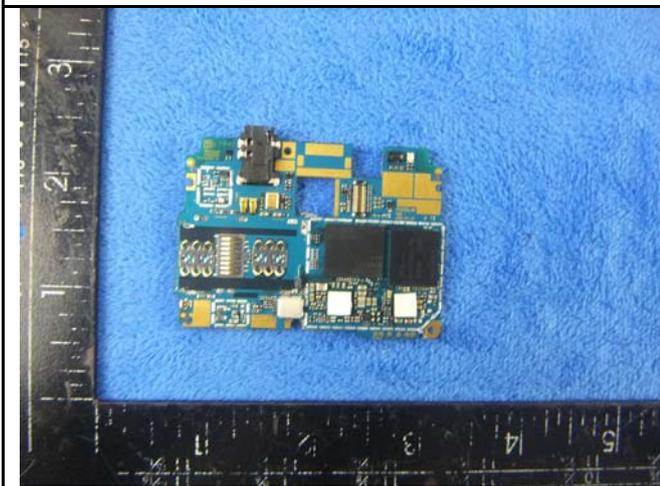

Mainboard without Shielding - Front View



Mainboard with Shielding - Rear View




Mainboard without Shielding - Rear View



LCD – Front View



LCD – Rear View

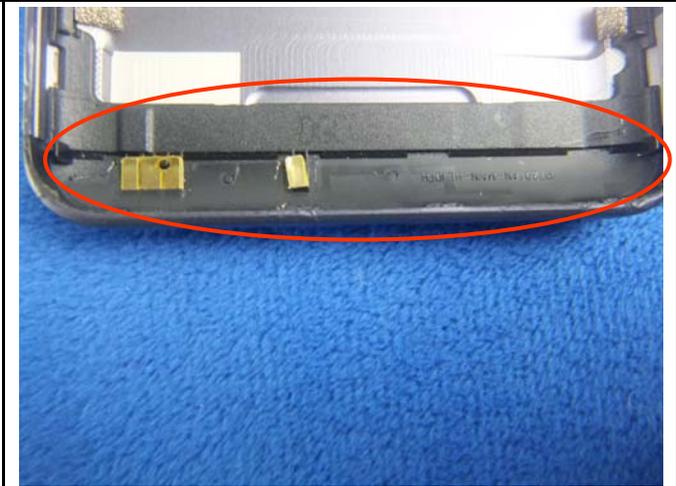

GSM/PCS/UMTS-FDD Antenna View



LTE - Antenna View



WIFI/BT/BLE/GPS - Antenna View


Annex B.iii. Photograph: Test Setup Photo




Conducted Emissions Test Setup Front View



Conducted Emissions Test Setup Side View

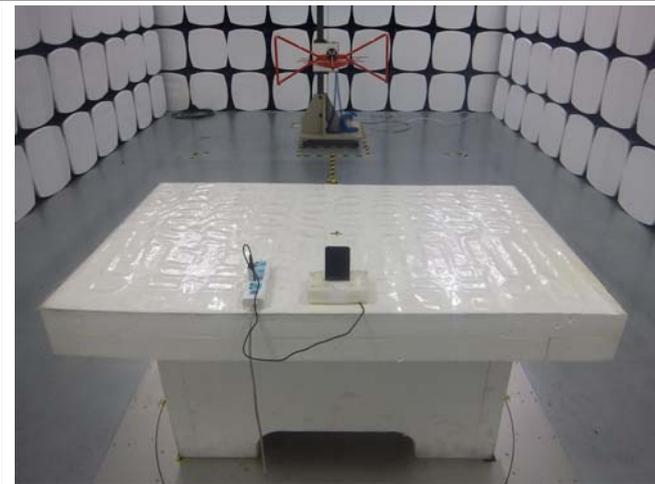

Radiated Spurious Emissions Test Setup Below 1GHz

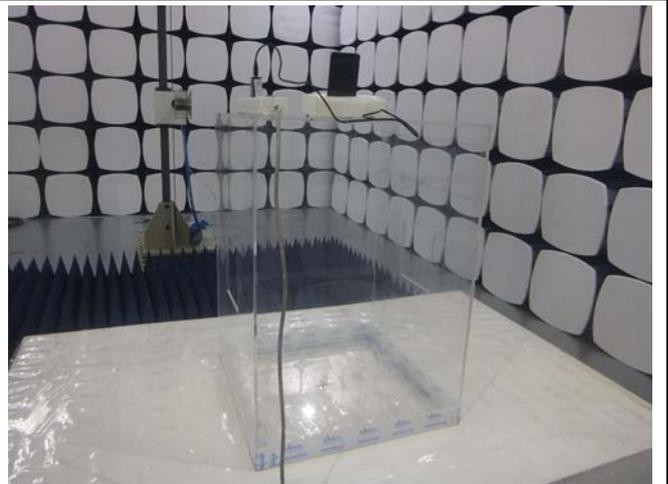


Radiated Spurious Emissions Test Setup Above 1GHz


Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK


Block Configuration Diagram for AC Line Conducted Emissions

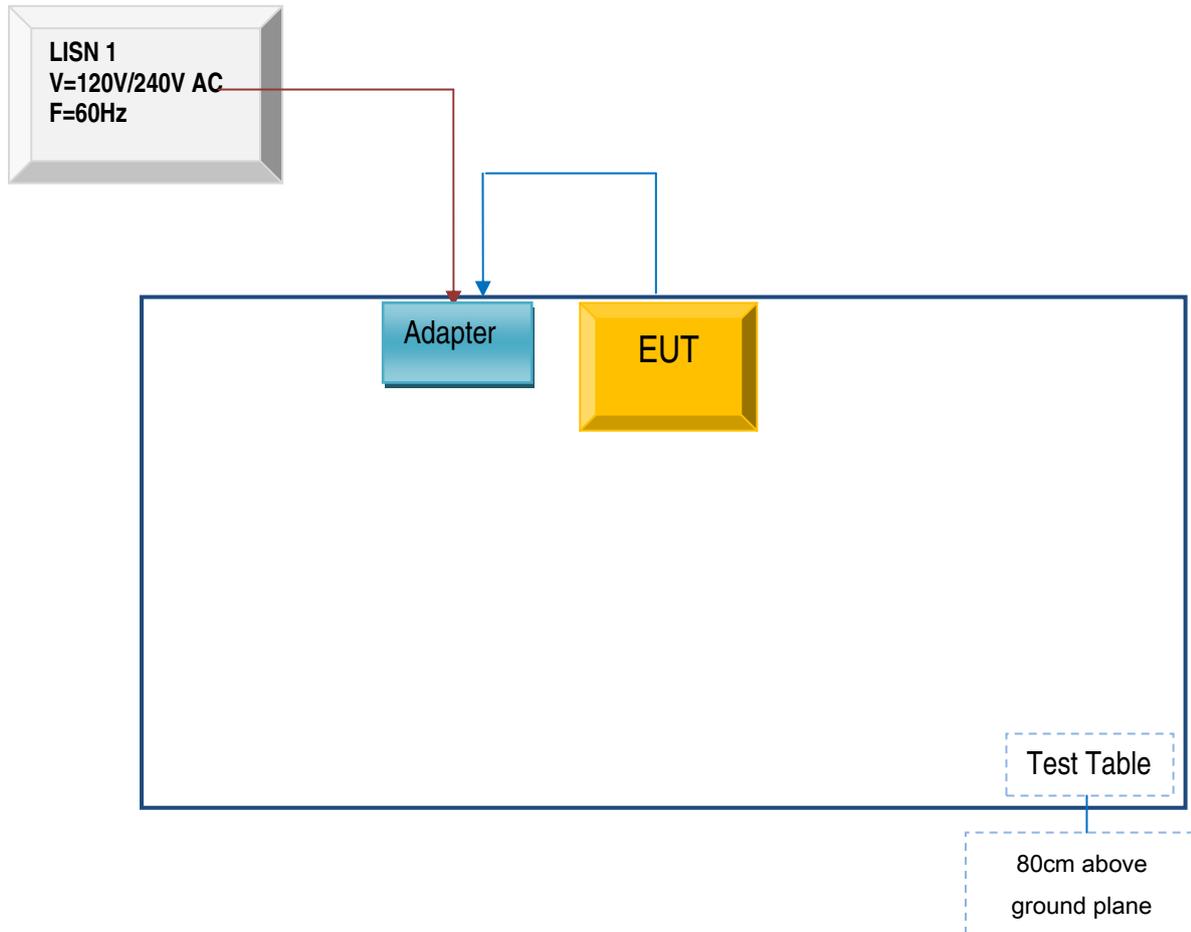

Block Configuration Diagram for Radiated Emissions (Below 1GHz) .

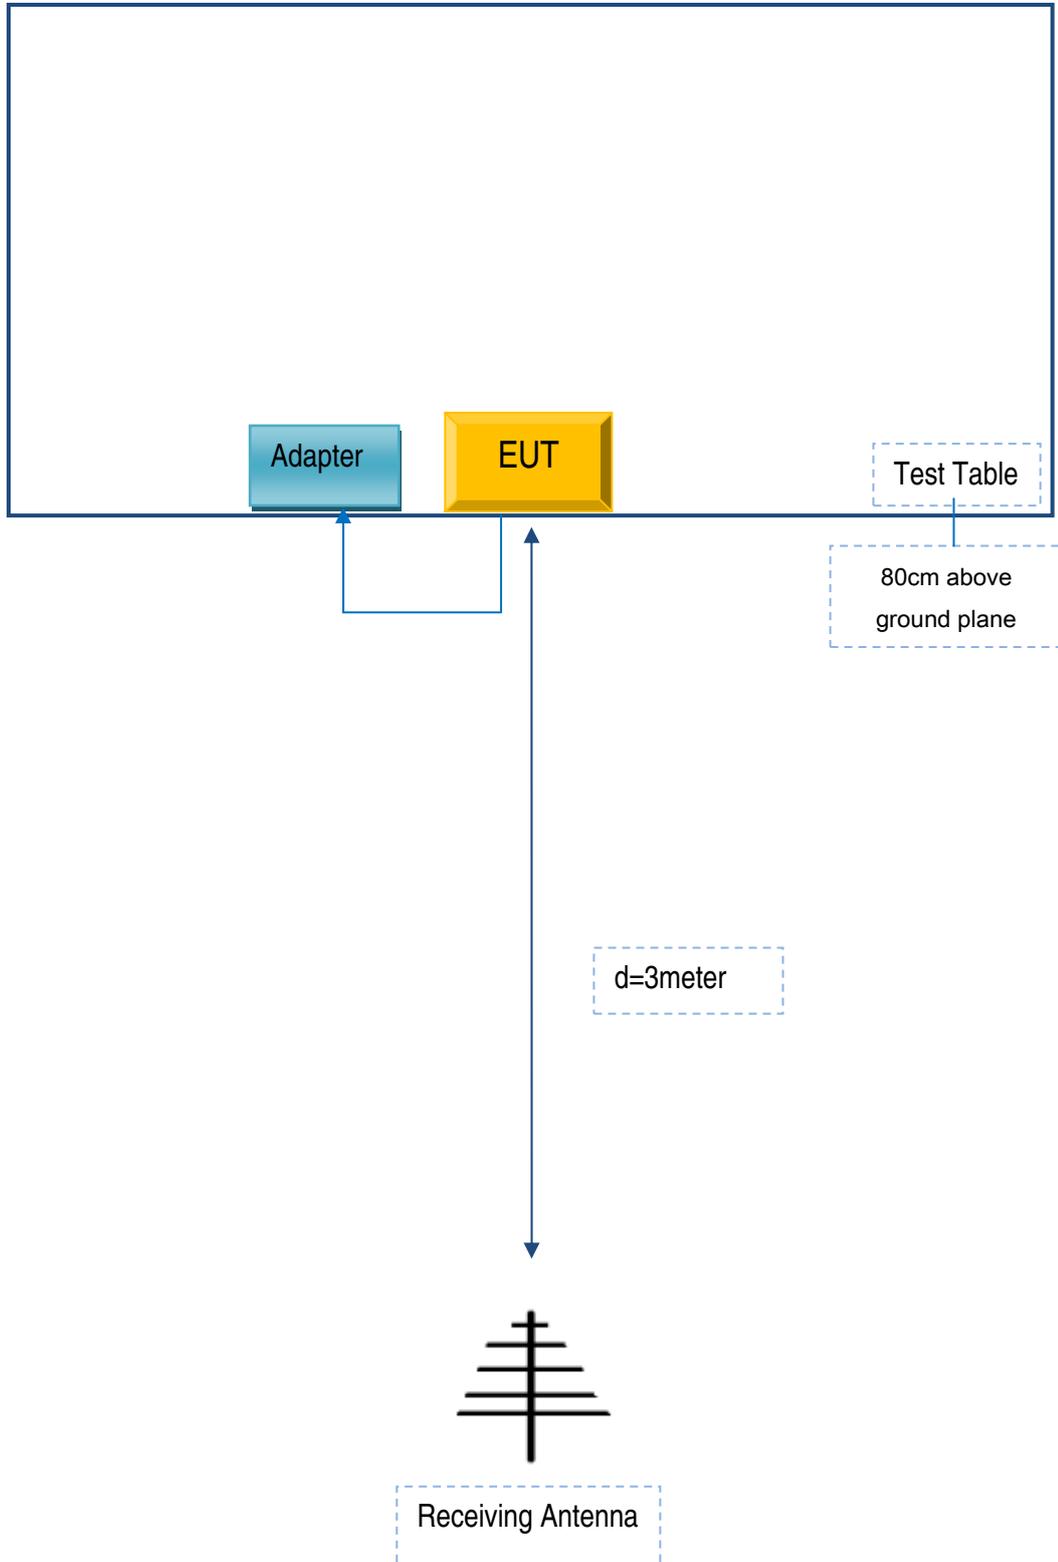

Block Configuration Diagram for Radiated Emissions (Above 1GHz) .

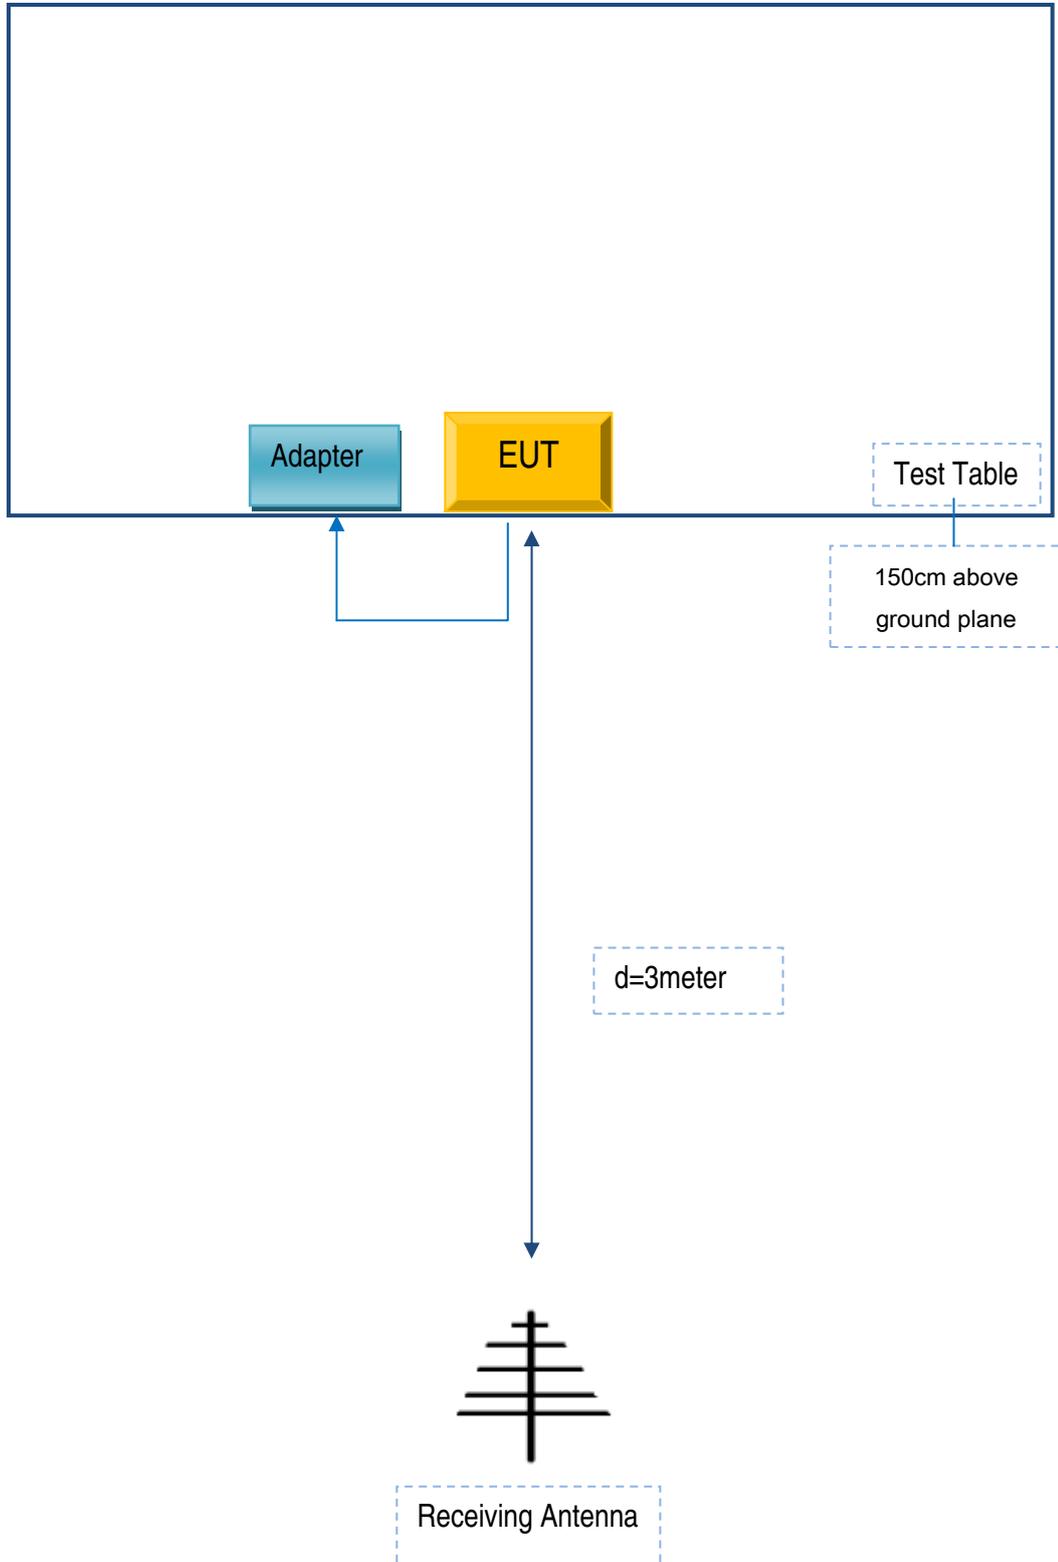

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
BLU Products, Inc.	Adapter	US-BM-1500	D05362

Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	0.8m	D05362

Test Report	16071342-FCC-R2
Page	59 of 60

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see the attachment

Test Report	16071342-FCC-R2
Page	60 of 60

Annex E. DECLARATION OF SIMILARITY

N/A